

NUWC-NL TM No. 931140

REFERENCE COPY

NAVAL UNDERSEA WARFARE CENTER DETACHMENT
NEW LONDON, CONNECTICUT

Technical Memorandum

BOTTOM CHARACTERISTICS AND SHALLOW WATER SOUND
PROPAGATION: AN ACOUSTICIAN'S VIEW AT
MID-FREQUENCIES (500 - 5000 HZ)

Date: 21 September 1993

Prepared by: Joseph M. Monti
Joseph M. Monti
Surface ASW Systems
Department

David G. Browning
David G. Browning
Environmental and Tactical
Support Systems Department

Peter D. Herstein
Peter D. Herstein
Surface ASW Systems
Department

Approved for public release; distribution is unlimited.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 21 SEP 1993		2. REPORT TYPE Technical Memo		3. DATES COVERED 21-09-1993 to 21-09-1993	
4. TITLE AND SUBTITLE Bottom Characteristics and Shallow Water Sound Propagation : an Acoustician's View at Mid-Frequencies (500 - 5000 HZ)				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Joseph Monti; David Browning; Peter Herstein				5d. PROJECT NUMBER A62200	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Undersea Warfare Center Detachment, New London, CT, 06320				8. PERFORMING ORGANIZATION REPORT NUMBER TM 931140	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES NUWC2015 This technical document contains the material of the presentation 021B-9 given at the poster session 021B, "Remote Sensing, Acoustics, and Instrumentation," at the Fall 1992 meeting of the American Geophysical Union held at San Francisco, CA, on Tuesday, 8 December 1992.					
14. ABSTRACT Interaction with the bottom can certainly be a dominant factor in shallow water sound propagation, hence there is a renewed interest in understanding bottom characteristics. A study of 10 typical shallow water sites indicates the extent of this problem, at least from an acoustician's perspective. Perhaps surprisingly, strong bottom interaction due to a totally downward refracting sound speed profile occurred only 25% of the time, with some form of ducting occurring the remaining time. Eight of the locations had a "hard" or "fast" bottom which results in a step-like bottom loss, with the increase occurring at the critical angle. It was typically found, under downward refracting conditions, that sources and receivers located near the bottom would have dominant propagation paths with less-than-critical-angle bottom interactions and hence, relatively low propagation loss. Sources near the surface, on the other hand, may have steeper angle interactions, higher bottom loss, and correspondingly higher propagation loss. Therefore, the sound speed profile, source/receiver location, water depth, and propagation range must all be considered to anticipate the extent of the bottom interaction.					
15. SUBJECT TERMS shallow water sound propagation; bottom characteristics; bottom interaction; sound speed profile					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 24	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

ABSTRACT

Interaction with the bottom can certainly be a dominant factor in shallow water sound propagation, hence there is a renewed interest in understanding bottom characteristics. A study of 10 typical shallow water sites indicates the extent of this problem, at least from an acoustician's perspective. Perhaps surprisingly, strong bottom interaction due to a totally downward refracting sound speed profile occurred only 25% of the time, with some form of ducting occurring the remaining time. Eight of the locations had a "hard" or "fast" bottom which results in a step-like bottom loss, with the increase occurring at the critical angle. It was typically found, under downward refracting conditions, that sources and receivers located near the bottom would have dominant propagation paths with less-than-critical-angle bottom interactions and hence, relatively low propagation loss. Sources near the surface, on the other hand, may have steeper angle interactions, higher bottom loss, and correspondingly higher propagation loss. Therefore, the sound speed profile, source/receiver location, water depth, and propagation range must all be considered to anticipate the extent of the bottom interaction.

ADMINISTRATIVE INFORMATION

This work was accomplished under NUWC Project No. A62200, the Shallow Water Sonar Initiative (SWSI), P. D. Herstein, Principal Investigator. The SWSI is part of the Surface Ship ASW Advanced Development Program (SASWAD), B. Cole, NUWC Program Manager. This work was sponsored by E. Plummer, PEO USW ASTO B.

The authors of this memorandum are located at the Naval Undersea Warfare Center Detachment, New London, Connecticut 06320.

**BOTTOM CHARACTERISTICS AND SHALLOW WATER SOUND
PROPAGATION: AN ACOUSTICIAN'S VIEW AT
MID-FREQUENCIES (500 - 5000 HZ)**

INTRODUCTION

This technical document contains the material of the presentation 021B-9 given at the poster session 021B, "Remote Sensing, Acoustics, and Instrumentation," at the Fall 1992 meeting of the American Geophysical Union held at San Francisco, CA, on Tuesday, 8 December 1992.

**BOTTOM CHARACTERISTICS AND
SHALLOW WATER SOUND PROPAGATION:
AN ACOUSTICIAN'S VIEW AT MID-FREQUENCIES
(500 - 5000 Hz)**

**JOSEPH M. MONTI
DAVID G. BROWNING
PETER D. HERSTEIN**

**NAVAL UNDERSEA WARFARE CENTER DIVISION NEWPORT
NEW LONDON DETACHMENT
NEW LONDON, CT 06320**

**1992 AGU FALL MEETING
7 - 11 DECEMBER 1992
SAN FRANCISCO, CA**

AGU DEC 92 11/25/92 VG 1

VISUAL 1


ABSTRACT

INTERACTION WITH THE BOTTOM CAN CERTAINLY BE A DOMINANT FACTOR IN SHALLOW WATER SOUND PROPAGATION HENCE THERE IS A RENEWED INTEREST IN UNDERSTANDING BOTTOM CHARACTERISTICS. A STUDY OF 10 TYPICAL SHALLOW WATER SITES INDICATES THE EXTENT OF THIS PROBLEM, AT LEAST FROM AN ACOUSTICIAN'S PERSPECTIVE. PERHAPS SURPRISINGLY, STRONG BOTTOM INTERACTION DUE TO A TOTALLY DOWNWARD REFRACTING SOUND SPEED PROFILE OCCURRED ONLY 25% OF THE TIME, WITH SOME FORM OF DUCTING OCCURRING THE REMAINING TIME. EIGHT OF THE LOCATIONS HAD A "HARD" OR "FAST" BOTTOM WHICH RESULTS IN A STEP-LIKE BOTTOM LOSS, WITH THE INCREASE OCCURRING AT THE CRITICAL ANGLE. IT WAS TYPICALLY FOUND, UNDER DOWNWARD REFRACTING CONDITIONS, THAT SOURCES AND RECEIVERS LOCATED NEAR THE BOTTOM WOULD HAVE DOMINANT PROPAGATION PATHS WITH LESS-THAN-CRITICAL-ANGLE BOTTOM INTERACTIONS AND HENCE RELATIVELY LOW PROPAGATION LOSS. SOURCES NEAR THE SURFACE, ON THE OTHER HAND, MAY HAVE STEEPER ANGLE INTERACTIONS, HIGHER BOTTOM LOSS, AND CORRESPONDINGLY HIGHER PROPAGATION LOSS. THEREFORE, THE SOUND SPEED PROFILE, SOURCE/RECEIVER LOCATION, WATER DEPTH, AND PROPAGATION RANGE MUST ALL BE CONSIDERED TO ANTICIPATE THE EXTENT OF THE BOTTOM INTERACTION.

AGU DEC 92 11/25/92 VG 2

VISUAL 2

SHALLOW WATER PROPAGATION LOSS vs RANGE
Based on Marsh-Shulkin Eq (1962)

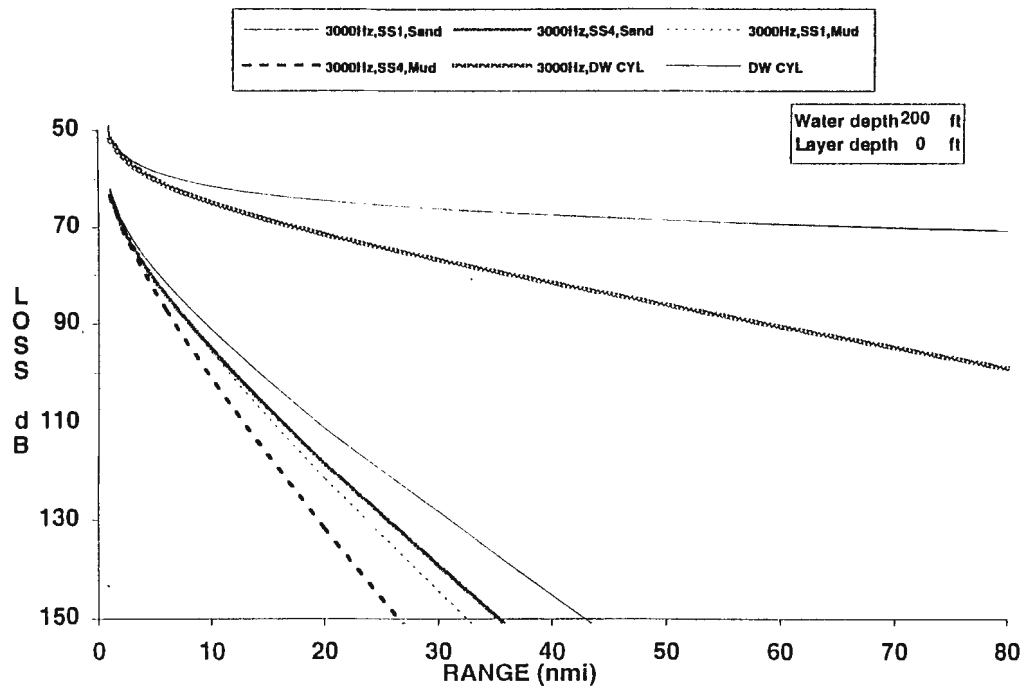

AGU DEC 92 11/25/92 VG 3

VISUAL 3


OUTLINE

**KEY QUESTION: BY OPTIMUM DEPTH PLACEMENT OF A RECEIVER
CAN WE MINIMIZE PROPAGATION LOSS FROM A GIVEN SOURCE
DEPTH IN SHALLOW WATER?**

- 1. IMPACT OF BOTTOM LOSS IN SHALLOW WATER**
- 2. GRAZING ANGLE DEPENDENCE AND SOURCE/RECEIVER DEPTH**
- 3. WORLDWIDE SURVEY**
- 4. RESULTS AND CONCLUSIONS**

VISUAL 4


SHALLOW WATER SOUND SPEED PROFILE (SOUTH OF LONG ISLAND, MAY)

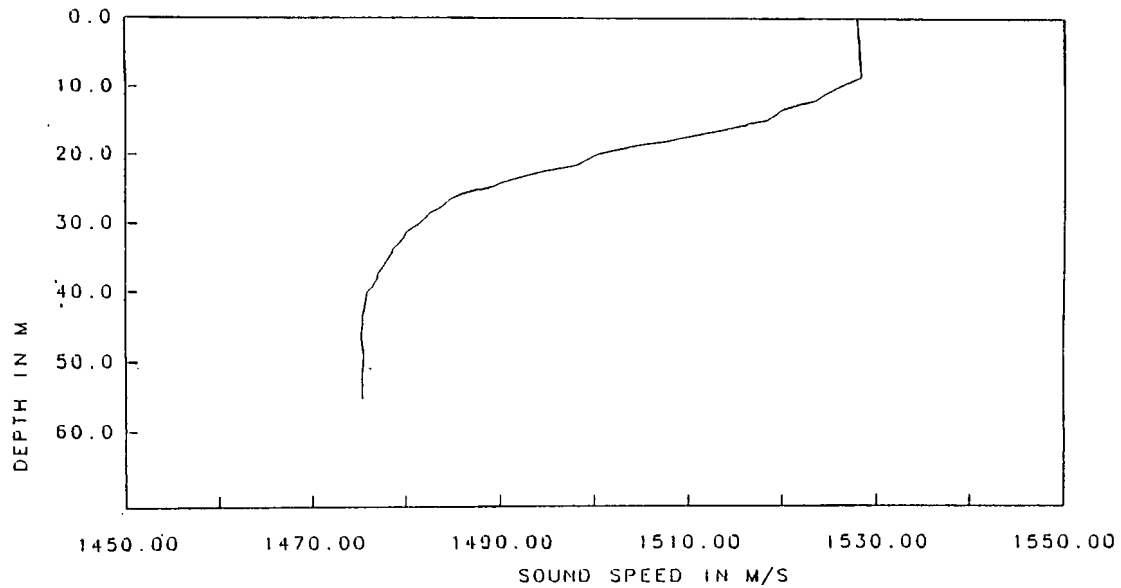

AGU DEC 92 11/25/92 VG 6

VISUAL 5


SHALLOW WATER

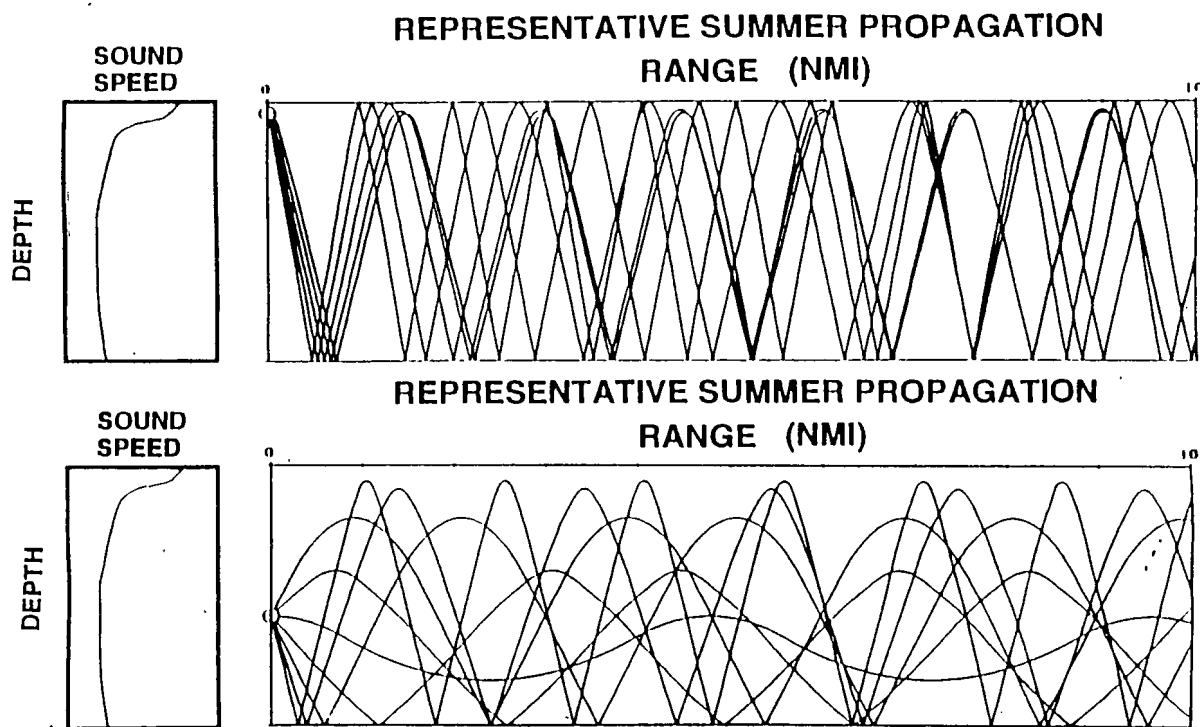

AGU DEC 92 11/25/92 VG 7

VISUAL 6

BIOT THEORY

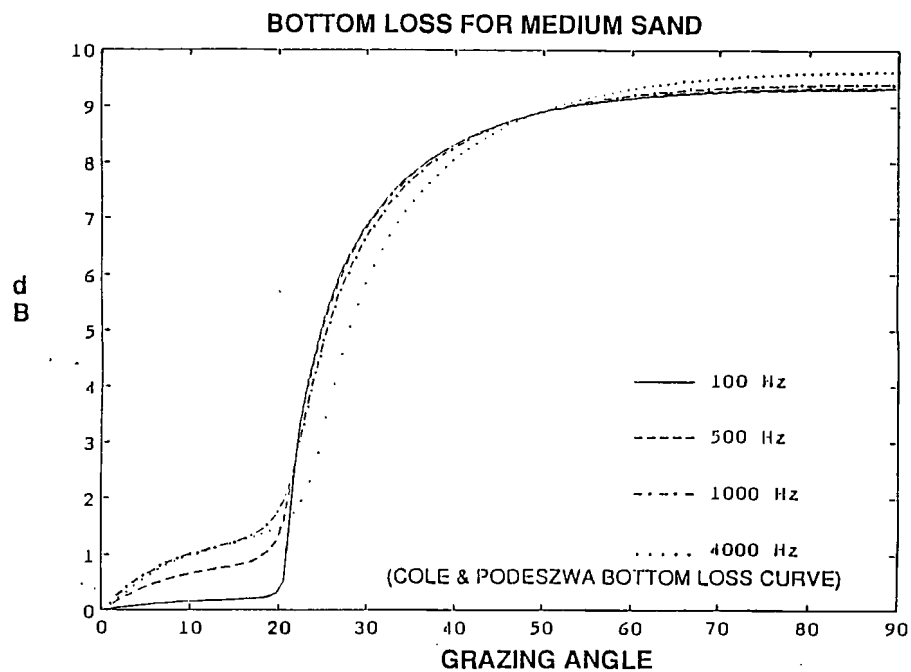

AGU DEC 92 11/25/92 VG 8

VISUAL 7

IT IS MEANINGFUL TO COMPARE THIS LOSS TO BOTTOM LOSS ENCOUNTERED IN SHALLOW WATER (AREA FOXTROT, SOUTH OF LONG ISLAND, EXPERIMENTAL DATA RECENTLY OBTAINED BY J.M. TATTERSALL, NUWCDIVNPT.) UNDER SUMMER DOWNWARD REFRACTING CONDITIONS FOR A 15 DEGREE GRAZING ANGLE (CORRESPONDS TO RAYPATH FROM A HULL MOUNTED SURFACE SHIP SONAR - SKIP DISTANCE .65 KM), AND A 5 DEGREE GRAZING ANGLE (A TOWED ARRAY BELOW THE THERMOCLINE - SKIP DISTANCE .80 KM.)

RATE OF LOSS (ATTENUATION) COMPARISON, SHALLOW WATER NORTH ATLANTIC

FREQ.	DEEP WATER (THORP)	SHALLOW WATER (LOV. C. 1.8)	BL RATE 15 DEG..	BL RATE 5 DEG.
100 HZ	.001 dB/KM	.0018 dB/KM	.32 dB/KM	.13 dB/KM
1000 HZ	.062	.106	1.84	.75
3500 HZ	.220	.326	1.84	.75

LOSS COMPARISON AT 50 KM (ACTIVE, TWO-WAY, 100 KM TOTAL PATH) FOR PROPAGATION IN NORTH ATLANTIC SHALLOW WATER - SUMMER CONDITIONS



FREQ.	DEEP WATER (THORP)	SHALLOW WATER (LOV. C. 1.8)	BOT. LOSS 5 DEG..	BOT. LOSS 15 DEG.
100 HZ	.1 dB	.18 dB	13. dB	32. dB
1000 HZ	6.2	10.6	75.	184.
3500 HZ	22.0	32.6	75.	184.

LOSS COMPARISON AT 20 KM (ACTIVE, TWO-WAY, 40 KM TOTAL PATH) FOR PROPAGATION IN NORTH ATLANTIC SHALLOW WATER - SUMMER CONDITIONS

FREQ.	DEEP WATER (THORP)	SHALLOW WATER (LOV. C. 1.8)	BOT. LOSS 5 DEG..	BOT. LOSS 15 DEG.
100 HZ	.04	.072	5.2	12.8
1000 HZ	2.48	4.24	30.	73.6
3500 HZ	8.8	13.0	30.	73.6

THE MINIMUM OBTAINABLE BOTTOM GRAZING ANGLE IS A FUNCTION OF SOURCE DEPTH


$$\theta_{\min} = \cos^{-1} \frac{C_{\text{SOURCE}}}{C_{\text{BOUNDARY}}}$$

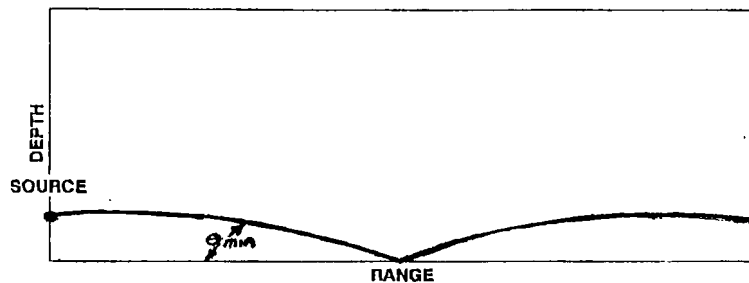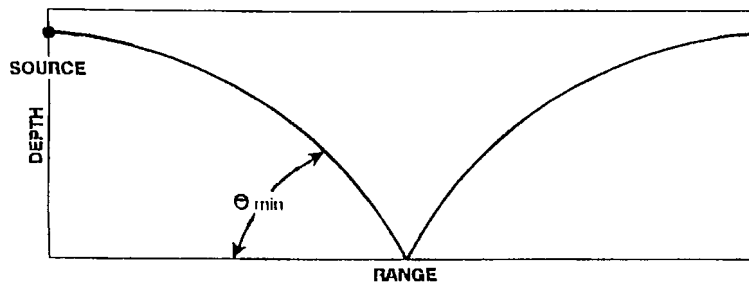

AGU DEC 92 11/24/92 VG 7

VISUAL 9

SHALLOW WATER TRANSMISSION LOSS

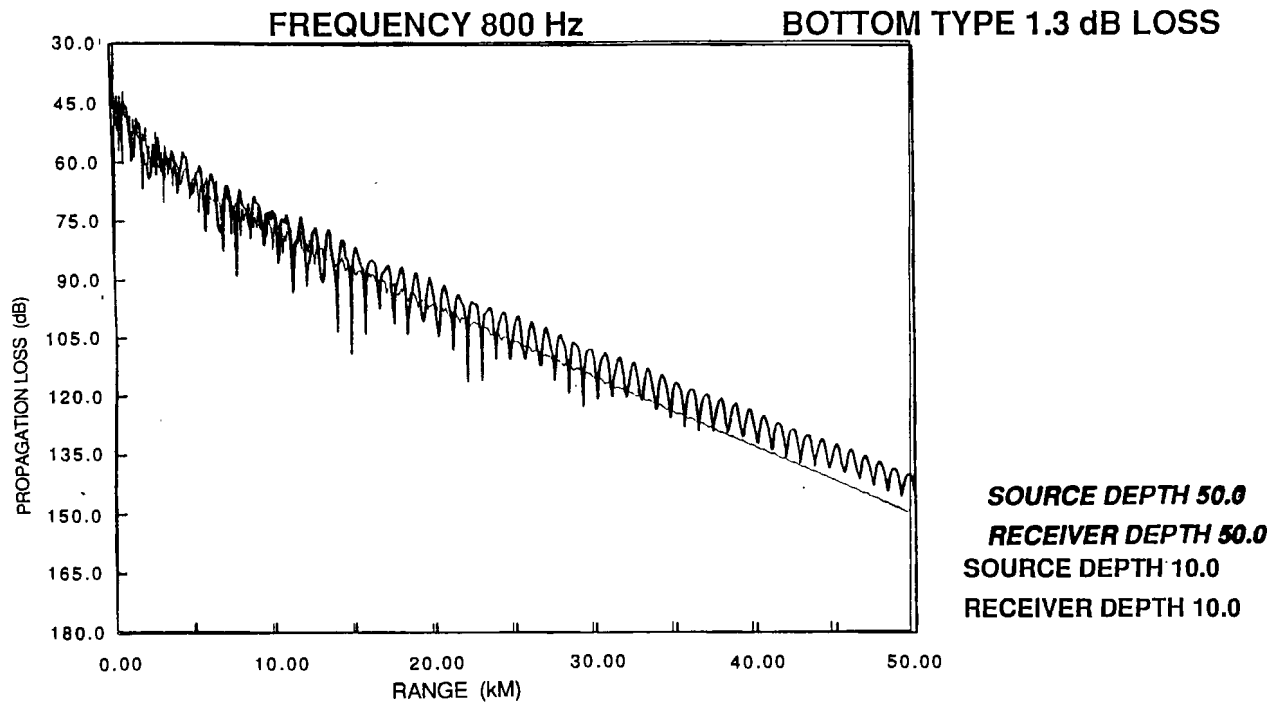


AGU DEC 92 11/25/92 VG 10

VISUAL 10

SHALLOW WATER TRANSMISSION LOSS

FREQUENCY 800 Hz


BOTTOM TYPE BIOT (SAND)

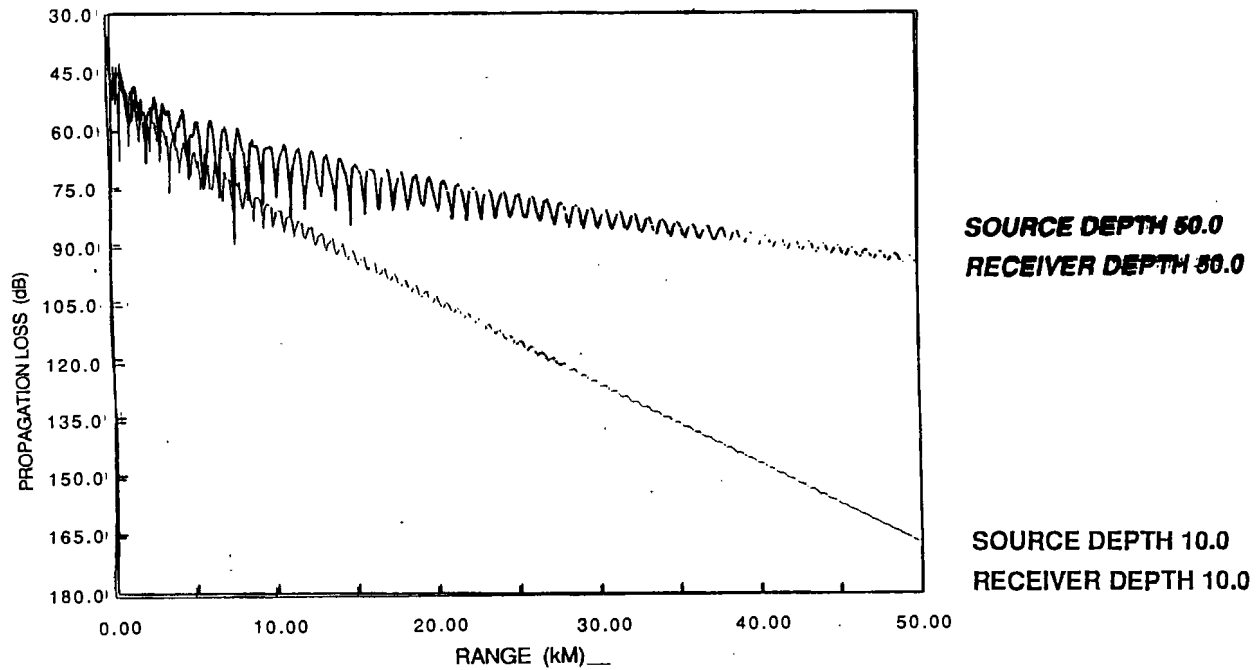

AGU DEC 92 11/25/92 VG 11

VISUAL 11

PHENOMENOLOGICAL EXPLANATION OF DEPTH DEPENDENT TRANSMISSION LOSS

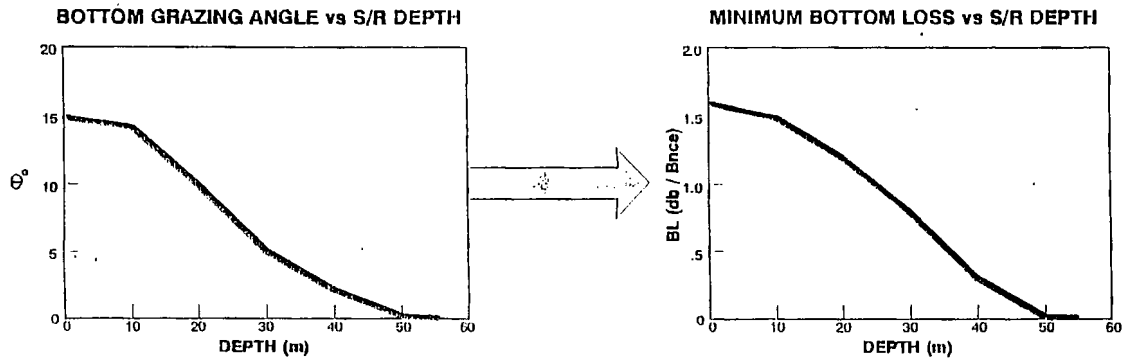


S/R DEPTH = min [SOURCE DEPTH, RECEIVER DEPTH]

AGU DEC 92 11/24/92 VG 10

VISUAL 12

SHALLOW WATER LOCATIONS

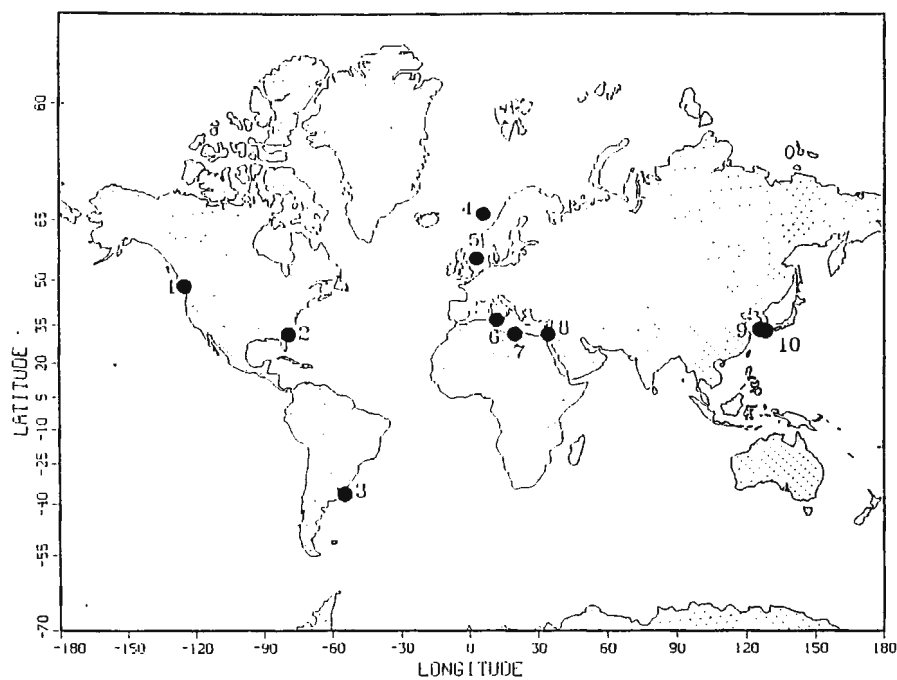

AGU DEC 92 11/24/92 VG 11

VISUAL 13

SOUND SPEED PROFILE ATTRIBUTES

<u>LOCATION</u>	<u>SOUND SPEED PROFILE CHARACTER</u>				<u>WATER DEPTH</u>
	<u>WINTER</u> [Feb]	<u>SPRING</u> [May]	<u>SUMMER</u> [Aug]	<u>FALL</u> [Nov]	
E. YELLOW SEA	D400'	C250'	D35',C150'	D165'	400'
GULF OF SIDRA	D255'	DOWN REF	DOWN REF	D75'	500'
NORWEGIAN SEA	D850'	D350'	D75'	D300'	2000'
KINGS BAY	D90'	D40'	DOWN REF	D90'	1250'
NORTH SEA	D300'	D80',C150'	C175'	D175', C250'	300'
STRAITS OF SICILY	D600'/2000'	C350'	C450'	D100', C350'	2000'
*MONTEVIDEO	DOWN REF	D100'	DOWN REF	DOWN REF	300'
SINAI	D400'/660'	DOWN REF	DOWN REF	D125'	660'
KOREAN STRAITS	D250'	D80'	D65'	D165'	500'
JUAN DE FUCA	D80'	DOWN REF	DOWN REF	D55'	600'

Dn - Surface Duct, n ft thick

Cn - Sound Channel (Sound Velocity minimum) at n ft

DOWN REF - Downward Refracting Conditions over the entire water column

* Southern Hemisphere, therefore Seasons are reversed

- PURELY DOWNWARD REFRACTION OCCURS IN 25% OF THE ENVIRONMENTS EXAMINED IN THIS SHALLOW WATER STUDY
- DOWNWARD REFRACTING CASES FOLLOW EXPECTED MONOTONIC DEPENDENCE ASSOCIATED WITH BOTTOM INTERACTION AND ATTENUATION
- 75% OF THE ENVIRONMENTS IN THIS STUDY HAVE SOME FORM OF ACOUSTIC DUCT OR NEAR SURFACE SOUND CHANNEL
- DUCTED PROPAGATION MAKES SOURCE/RECEIVER DEPTH CONFIGURATION MORE CRITICAL AND ALLOWS DUCT LEAKAGE AND/OR SURFACE LOSS TO BECOME ADDITIONAL SIGNIFICANT FACTORS
- CUTOFF FREQUENCIES FOR DUCTED PROPAGATION INTRODUCE A SIGNIFICANT FREQUENCY DEPENDENT COMPONENT TO SOURCE/RECEIVER OPTIMIZATION TO MINIMIZE TRANSMISSION LOSS

VISUAL 15

GRAZING (ARRIVAL) ANGLES OF DOMINANT EIGENRAYS

SUMMER PROFILES - DOWN REFRACTING

TARGET ON BOTTOM

RANGE = 20 NMI


<u>LOCATION</u>	<u>SOURCE = 25 FT</u>	<u>SOURCE = "DEEP"</u>
GULF OF SIDRA	10 - 11°	1 - 2°
KOREA STRAIT	11°	4 - 10°
STRAIT OF SICILY	9 - 11°	0 - 4°
JUAN DE FUCA	9°	0 - 3°
MONTEVIDEO (FEBRUARY)	13°	1 - 2°
NORWEGIAN SEA	11 - 12°	9 - 12°
EAST YELLOW SEA	11°	0 - 1°
KINGS BAY	15°	7 - 8°
NORTH SEA	11 - 12°	0 - 1°
SINAI	11 - 12°	2 - 3°

TWO WAY TRANSMISSION LOSS

FREQUENCY = 500 Hz

RANGE = 10 nmi


TARGET DEPTH = DEEP

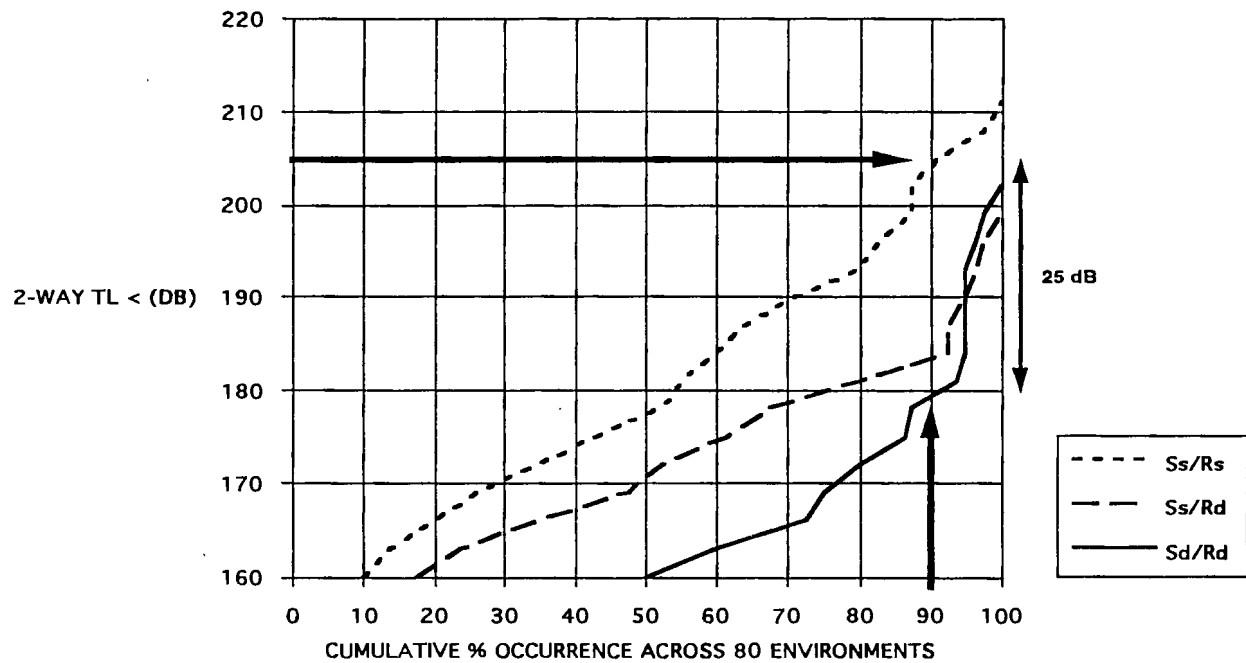

AGU DEC 92 11/25/92 VG 17

VISUAL 17

TWO WAY TRANSMISSION LOSS
 FREQUENCY = 500 Hz
 RANGE = 10 nmi
 TARGET DEPTH = 60 ft

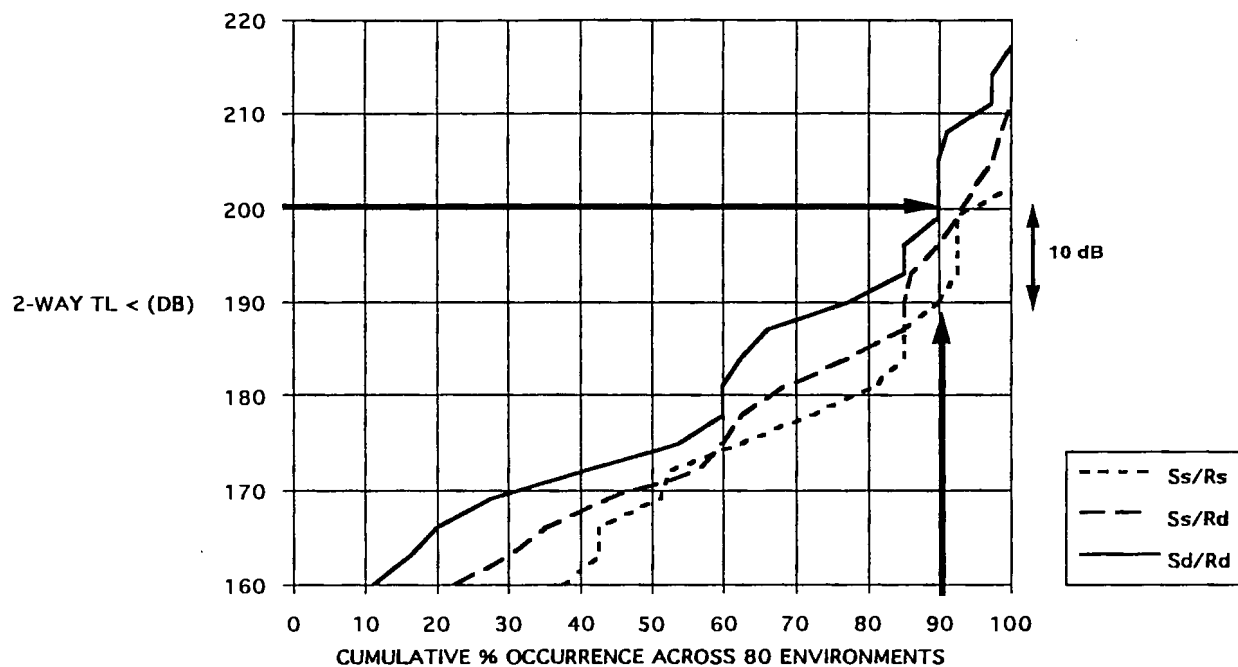

AGU DEC 92 11/25/92 VG 18

VISUAL 18

CONCLUSIONS

1. IN OUR SURVEY SOME FORM OF DUCTING WAS POSSIBLE FOR MID FREQUENCIES APPROXIMATELY 75% OF THE TIME (10 SITES, 4 SEASONS)
2. WHEN STRONGLY DOWNWARD REFRACTING CONDITIONS EXIST, GRAZING ANGLE DEPENDENCE OF BOTTOM LOSS IS CRITICAL
3. THROUGH KNOWLEDGE OF THE ENVIRONMENT IT IS POSSIBLE TO MINIMIZE PROPAGATION LOSS BY SOURCE/RECEIVER CONFIGURATION IN SHALLOW WATER
4. HISTORICALLY IT HAS BEEN DIFFICULT TO FIND VALIDATED BOTTOM LOSS DATA FOR A GIVEN LOCATION; TO ESTIMATE THE VARIABILITY IN THE REGION; AND DETERMINE THE APPLICABILITY OVER A BROAD FREQUENCY RANGE

VISUAL 19

REFERENCES

1. JOSEPH M. MONTI, JEFFREY H. SAMMIS, DAVID G. BROWNING, PETER D. HERSTEIN. "A STUDY OF LOW FREQUENCY SOUND PROPAGATION IN SHALLOW WATER DUCTS" NUWC-NL TECHNICAL DOCUMENT 4011, 14 FEBRUARY 1992
2. DAVID G. BROWNING, JOSEPH M. MONTI, JEFFREY H. SAMMIS, PETER D. HERSTEIN, FRANK L. GRONEMAN. "SENSITIVITY OF PREDICTED SHALLOW WATER PROPAGATION LOSS TO EMPIRICAL AND EXTRAPOLATED BOTTOM LOSS VALUES" NUWC-NL TECHNICAL DOCUMENT 10,061 (IN PRINT)
3. PETER D. HERSTEIN, BERNARD F. COLE, DAVID G. BROWNING, WILLIAM G. KANABIS. "SENSITIVITY OF SHALLOW WATER TRANSMISSION LOSS TO SOURCE AND RECEIVER PROXIMITY TO A HARD BOTTOM UNDER DOWNWARD REFRACTING CONDITIONS" NUWC-NL TECHNICAL DOCUMENT (IN PREPARATION)
4. DMITRY CHIZHIK, J. MATTHEW TATTERSALL. "APPLICATION OF BIOT THEORY TO THE STUDY OF ACOUSTIC REFLECTION FROM SEDIMENTS" NUWC-NL TECHNICAL REPORT 10,115, 8 SEPTEMBER 1992
5. BERNARD F. COLE, EUGENE M. PODESZWA "SHALLOW-WATER PROPAGATION UNDER DOWNWARD-REFRACTION CONDITIONS" J. ACOUSTICAL SOCIETY OF AMERICA, VOL. 41(6), 1479-1484, JUNE 1967.
6. JEFFREY S. COHEN, BERNARD F. COLE. "SHALLOW-WATER PROPAGATION UNDER DOWNWARD-REFRACTION CONDITIONS 2" J. ACOUSTICAL SOCIETY OF AMERICA, VOL. 61(1), 213-217, JANUARY 1977.

TM No. 931140

DISTRIBUTION LIST

Internal
Codes:

0211		
0261	(NLON Library)	
0262	(NPT Library)	2 copies
33A	(Herstein)	
33A	(Monti)	3 copies
3121	(Browning)	10 copies
3314	(Barton)	
3314	(Tremblay)	

Total: 20 copies