

Final Design and Initial Pulsed Power Results for the Decade Quad Plasma Radiation Source Machine Configuration*

W. Rix, B. Altes, K. Childers, P. Corcoran, M. Danforth, P. Spence, P. Sincerny,
T. Tucker, and J. Douglas

Titan Pulse Sciences Division, 2700 Merced Street, San Leandro, CA 94577, USA

M. Babineau, V. Kenyon, L. Christensen and G. L. Whitehead

Sverdrup Technology - AEDC, 1088 Ave C, Arnold AFB, TN 37389, USA

P. Kurucz and K. Ware

Defense Threat Reduction Agency, 6801 Telegraph Road, Alexandria, VA 22310, USA

J. K. Brandon

Arnold Engineering Development Center, 1088 Ave C, Arnold AFB, TN 37389, USA

Abstract

At the 1999 IEEE Pulsed Power Conference, we reported on the preliminary design of a water coupler system that would combine the current from four individual Decade modules to drive a single plasma radiation source. The design has been finalized; the hardware has been fabricated and fielded on the Decade Quad at the Arnold Engineering Development Center. The final design issues associated with fabrication of the hardware and initial results into a short circuit load and imploding aluminum wire arrays are presented. We also present initial test results with the Decade Quad in the large area bremsstrahlung mode.

I. BACKGROUND

The DECADE Quad (DQ) Large Area Bremsstrahlung (LAB) mode, shown in Figure 1, became operational in August 1999. Four independent modules drive separate, closely packed bremsstrahlung diodes.[1] Each oil-insulated Marx generator stores 1.4 MJ and discharges in about 1 μ s. Water transfer capacitors and triggered gas output switches are employed to compress the pulse to a ≈ 300 ns quarter cycle. A final stage of pulse compression is provided by plasma opening

switches in the vacuum MITLS after the water output lines. Initial tests on the Decade Quad in LAB mode demonstrated an area-weighted dose of 16.2 krad(Si) with:

- End-point Energy of 1.7 MV
- Pulse width of 35 ns
- Area of 2,250 cm² @ 2.8:1 uniformity

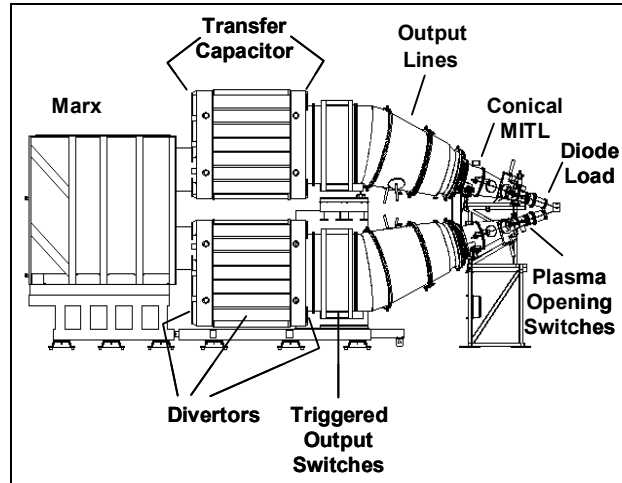


Figure 1. DECADE Quad in the Large Area Bremsstrahlung configuration.

During a subsequent test series led by AEDC, the power flow geometry between the plasma opening switch and the diode load was modified, resulting

* Work supported by the Defense Threat Reduction Agency.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE JUN 2001		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Final Design and Initial Pulsed Power Results for the Decade Quad Plasma Radiation Source Machine Configuration				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Titan Pulse Sciences Division, 2700 Merced Street, San Leandro, CA 94577, USA				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM002371. 2013 IEEE Pulsed Power Conference, Digest of Technical Papers 1976-2013, and Abstracts of the 2013 IEEE International Conference on Plasma Science. IEEE International Pulsed Power Conference (19th). Held in San Francisco, CA on 16-21 June 2013. U.S. Government or Federal Purpose Rights License.					
14. ABSTRACT At the 1999 IEEE Pulsed Power Conference, we reported on the preliminary design of a water coupler system that would combine the current from four individual Decade modules to drive a single plasma radiation source. The design has been finalized; the hardware has been fabricated and fielded on the Decade Quad at the Arnold Engineering Development Center. The final design issues associated with fabrication of the hardware and initial results into a short circuit load and imploding aluminum wire arrays are presented. We also present initial test results with the Decade Quad in the large area bremsstrahlung mode.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

in improved current transfer to the radiation source. Data from operation in the LAB mode indicate that the pulse power driver elements (Marx generator, transfer capacitors, MITLS, and plasma opening switches) operated as expected. Details on LAB mode operation can be found in Paper O5B1 entitled, “Improved Large Area Bremsstrahlung Performance of the Decade Quad,” by Babineau, et al. [2]

II. PRS DRIVER DESIGN

In order to provide the Decade Facility with a cold x-ray source a design for combining currents to drive a plasma radiation source (PRS) was commissioned. The design goals for a PRS driver were:

- Current output of greater than 10 MA peak into a short-circuit load and greater than 8 MA into a ≈ 300 ns imploding PRS load. Capability of driving future monolithic plasma opening switches for use in both PRS and bremsstrahlung output modes.
- Consistent with the (future) installation of a 10-cm-diameter uniform-fill gas-puff PRS load.

As reported at the 1999 Pulse Power Conference, the design shown in Figure 2 combining currents from each module in a water coupler was selected. [3] The electrical power from the four output line modules is carried through four interface spools and combined in a triplate, conical, water-filled coupler. The power flows through a high voltage insulator stack, onto triconic MITLs, through a post-hole-convolute (PHC) and finally to conical load. The conical coupler design provides 90° line-of-sight access to imploding plasma radiation through twelve ports around the circumference of the user chamber.

Figure 3 displays more details of the coupler design. Based on this design the simplified circuit model shown in Figure 4 was developed.[4] Analysis of the model indicated that the design

would meet the design goals of 8 MA into a 300 ns imploding plasma load while maintaining acceptable breakdown margins in the water transmission lines, on the diaphragms in the water lines, at the insulator stack, and in the vacuum MITLs.

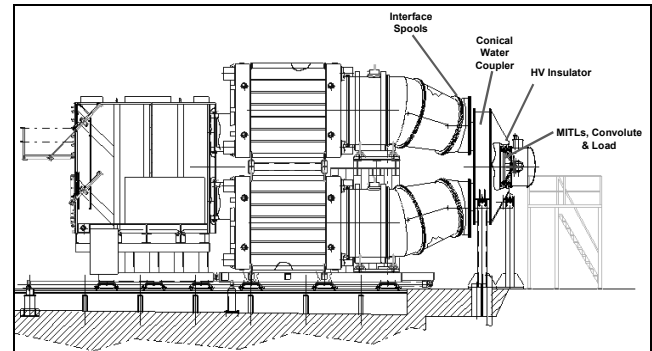


Figure 2. The Decade Quad in the PRS mode.

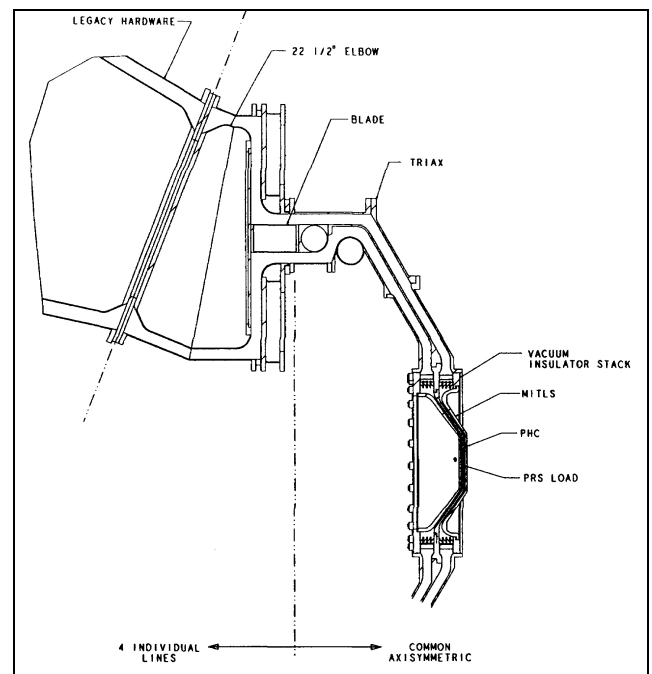


Figure 3. Details of the water coupler design. The 3 m diameter, 3000 kg annular cover and the 1 m diameter test chamber are not shown.

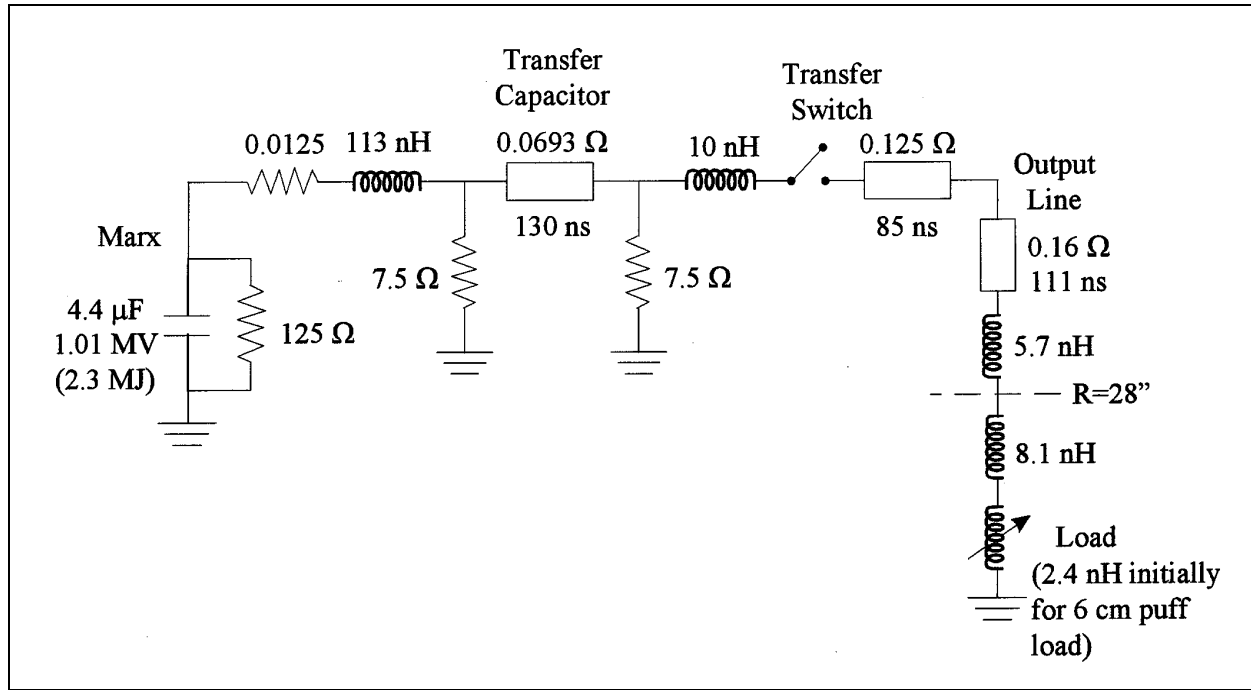


Figure 4. Simplified version of circuit model from reference [4] used to predict DQ PRS performance.

III. PRS DRIVER REALIZATION

In fabrication, there was a significant distortion of the rear outer anode cone. In a welding operation, the angle of the cone “flattened” from about 30 degrees to about 29 degrees. Fabricating a replacement part that was “to print” would have added a 6 to 9 month delay to the fabrication schedule. We elected to use the part with minor modifications and change adjacent parts to retain critical electrode separations that control impedance, inductance, and electrical breakdown strength. This resulted in shortening the water coupler about 1/2 inch. Analysis of the mechanical changes indicated no degradation in expected electrical performance.

The hardware was delivered and assembled at AEDC in the fall of 2000. Figure 5 shows the water coupler attached to the modules.

IV. PRS DRIVER PERFORMANCE

Water coupler performance was demonstrated with short-circuit and over-massed wire aluminum loads. Short-circuit loads tests performed at 65 kV Marx charge voltage scaled to the required 10 MA at a full Marx charge



Figure 5. Decade Quad in PRS Mode

voltage of 85kV. Data from an over-massed aluminum wire shot is. Calculated and measured output currents into an imploding aluminum wire array at full power (85 kV Marx charge voltage) are shown in Figure 6. Itube and Iload were measured and match the calculated tube, MITL, and load currents very well up until the peak current. The peak current reaches 9 MA in about 250 ns, exceeding the design goal. Any changes in electrical performance caused by the differences between the design and the fabricated parts were undetectable. The water coupler design is now

available to support development of PRS radiation sources and plasma opening switches for driving bremsstrahlung loads at currents in the 8 to 10 MA and 250 to 300 ns range.

V. REFERENCES

- [1] P. Sincerny, S. Ashby, K. Childers, C. Deeney, D. Drury, J. Goyer, D. Kortbawi, I. Roth, C. Stallings, L. Schlitt, "The Decade High Power Generator," in Proc. Ninth IEEE Intl. Pulse Power Conf., Albuquerque, NM, 1993, p. 880.
- [2] M.A. Babineau, C. Enis, T. Worley, V. Kenyon, L. Christensen, G.L. Whitehead, "Improved Large Area Bremsstrahlung Performance of the Decade Quad," presented at

13th International Pulsed Power Conference, Las Vegas, Nevada, 2001.

- [3] D. Price, M. Danforth, T. Naff, T. Tucker, P. Sincerny, P. Spence, P. Corcoran, R. Altes, V. Bailey, J. Douglas, D. Fiely, and K. Ware, "Electrical and Mechanical Design of the Decade Quad in the PRS Mode," in Proc. Twelfth IEEE Intl. Pulse Power Conf., Monterey, CA, 1999, p. 489.

- [4] J. Douglas, P. Corcoran, P. Spence, K. Childers, D. Price, W. Rix, P. Sincerny, M. Babineau, L. Christensen, V. Kenyon, G.L. Whitehead, J.K. Brandon, P. Kurucz, K. Ware, "Decade Quad Water Coupler – Electrical Design and Performance," presented at 13th International Pulsed Power Conference, Las Vegas, Nevada, 2001.

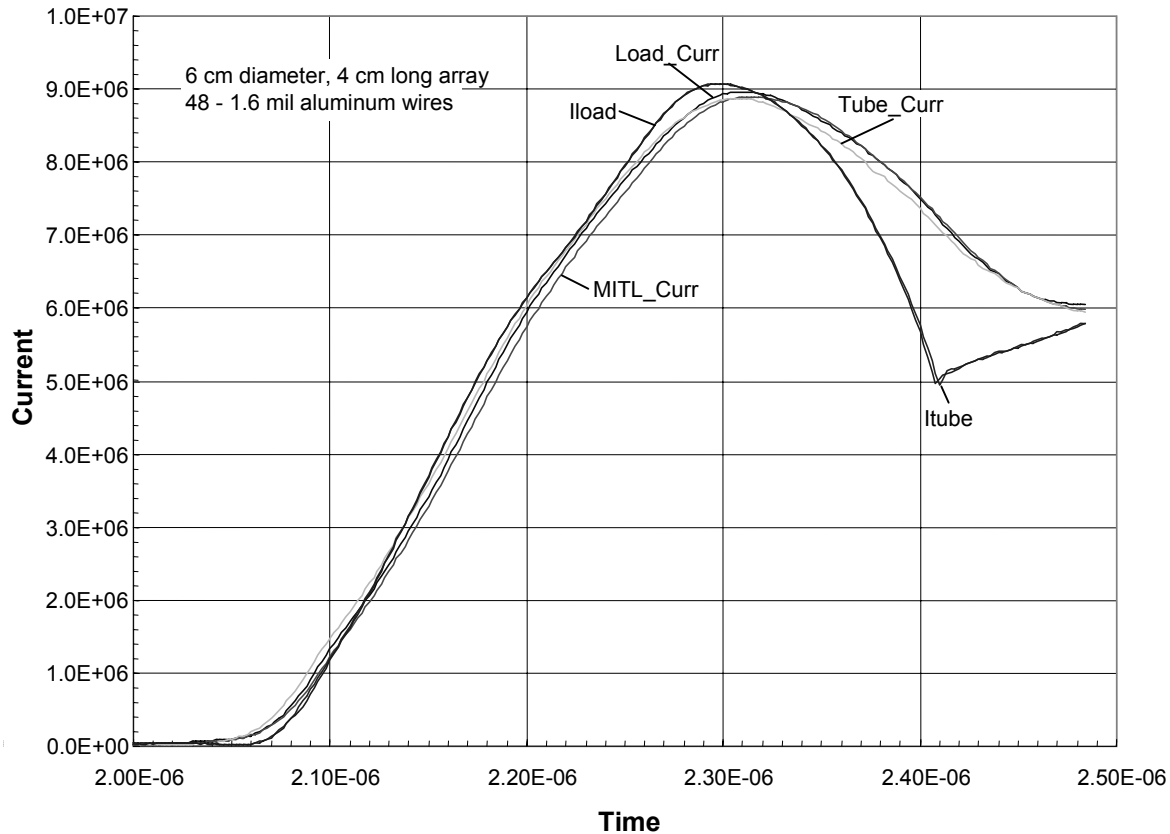


Figure 6. Calculated and measured output currents into an imploding aluminum wire array at full power (85 kV Marx charge voltage).