

UNCLASSIFIED

AD NUMBER	
ADA800631	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	restricted
LIMITATION CHANGES	
TO: Approved for public release; distribution is unlimited.	
FROM: Distribution authorized to DoD only; Administrative/Operational Use; 14 APR 1947. Other requests shall be referred to National Aeronautics and Space Administration, Washington, DC. Pre-dates formal DoD distribution statements. Treat as DoD only.	
AUTHORITY	
NASA TR Server website; NASA TR Server website	

THIS PAGE IS UNCLASSIFIED

Reproduction Quality Notice

This document is part of the Air Technical Index [ATI] collection. The ATI collection is over 50 years old and was imaged from roll film. The collection has deteriorated over time and is in poor condition. DTIC has reproduced the best available copy utilizing the most current imaging technology. ATI documents that are partially legible have been included in the DTIC collection due to their historical value.

If you are dissatisfied with this document, please feel free to contact our Directorate of User Services at [703] 767-9066/9068 or DSN 427-9066/9068.

**Do Not Return This Document
To DTIC**

Reproduced by
AIR DOCUMENTS DIVISION



HEADQUARTERS AIR MATERIEL COMMAND
WRIGHT FIELD, DAYTON, OHIO

The
U.S. GOVERNMENT

IS ABSOLVED

FROM ANY LITIGATION WHICH MAY

ENSUE FROM THE CONTRACTORS IN -

FRINGING ON THE FOREIGN PATENT

RIGHTS WHICH MAY BE INVOLVED.

REEL - C

119

A.T.I.

3157

Copy No. 66

RESTRICTED

RM No. L6J04



RESEARCH MEMORANDUM

3157

RECEIVED
JUN 5 - 1947

A LOW-SPEED INVESTIGATION OF AN ANNULAR TRANSONIC AIR INLET

By

Mark R. Nichols and Donald W. Rinkoski

Langley Memorial Aeronautical Laboratory
Langley Field, Va.

CLASSIFIED DOCUMENT

This document contains classified information affecting the National Defense of the United States within the meaning of the Espionage Act, USC 793 and 794. No transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law. Information so classified may be imparted only to persons in the military and naval services of the United States, appropriate civilian officers and employees of the Federal Government who have a legitimate interest therein, and to United States citizens of known loyalty and discretion who of necessity must be informed thereof.

AIR DOCUMENTS DIVISION, T-2
AMC, WRIGHT FIELD
MICROFILM No.
R C 119 F 3157

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WASHINGTON

April 14, 1947

RESTRICTED

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

A LOW-SPEED INVESTIGATION OF AN ANNULAR
TRANSONIC AIR INLET

By Mark R. Nichols and Donald W. Rinkoski

SUMMARY

A special problem is encountered in the application of fuselage scoops to a transonic airplane in that compression shocks must be avoided on the surface of the fuselage ahead of the air inlets to prevent boundary-layer separation which would result in unstable inlet flow and losses in ram. However, subsonic flow can be maintained on the fuselage surface ahead of an annular inlet up to flight Mach numbers of about 1.2, thereby avoiding shocks in this region through both the subsonic and the transonic flight regimes, providing that the fuselage forward of the inlet is a cone of the proper proportions. The present investigation of this type of inlet was conducted at low speeds in the Langley propeller-research tunnel in order to obtain some indication of the basic characteristics of such inlets.

Two theoretically-designed cone-type fuselage noses of different apex angle and one ogival nose were tested in conjunction with an NACA 1-85-050 cowl which was also tested in the open-nose condition. Surface pressures and inlet total pressures were measured at the tops of the test configurations for wide ranges of inlet-velocity ratio and angle of attack.

The results of the investigation show that substream velocities were maintained on the three fuselage noses over the ranges of angle of attack and inlet-velocity ratio useful for high-speed flight. At an angle of attack of 0° , boundary-layer separation from the noses was not encountered over this range of inlet-velocity ratio. At and above its design inlet-velocity ratio, the NACA 1-85-050 cowl used as the basic inlet had approximately the same critical Mach numbers with the various noses installed as when tested in the open-nose condition; thus, data for the NACA 1-series nose inlets can be used in the design of installations of this type. At very high values in inlet-velocity ratio, the high negative pressure peaks encountered on the inner portion of the inlet lip caused the internal flow to separate.

RESTRICTED

INTRODUCTION

The use of fuselage scoops offers several important advantages in the arrangement of a fighter-type airplane. First, the ducting to the engine may be made as short as possible; second, good visibility may be obtained by locating the pilot ahead of the inlets in a thin section of the fuselage; third, the gun installations may be located in the nose where they will not interfere with the air inlets or ducting; and fourth, the directional stability may be improved by reducing the lateral area forward of the center of gravity.

A special problem is encountered in the application of fuselage scoops to a transonic airplane in that compression shocks must be avoided on the surface of the fuselage ahead of the air inlets to prevent boundary-layer separation which would result in unstable inlet flow and losses in ram. This condition can be fulfilled only by maintaining the velocity of the flow on this surface at subsonic values throughout the speed range of the airplane. It appears that if the fuselage forward of the inlet is a cone of the correct apex angle, the desired subsonic velocities will be maintained on its surface up to Mach numbers of about 1.2, with low total-pressure losses, and the inlet lip at the base of the cone will operate essentially in the subsonic regime.

Because of the great interest in these inlets and the difficulty of detailed transonic testing at adequate Reynolds numbers, a preliminary study of such designs has been made at low speeds in the Langley propeller-research tunnel as a part of the current NACA air-inlet research. Obviously many important phenomena associated with compressibility were thereby not observed; however, it was considered that the study would indicate many of the basic characteristics of such inlets. In the present paper are reported studies of the pressure distributions and inlet-flow conditions for annular inlets consisting of an NACA 1-series nose inlet (reference 1) around two theoretically-designed cone-type noses of different apex angle and one ogival nose, together with comparison tests of the inlet in the open-nose condition. A subsequent report will describe tests in which a canopy and wheel-well fairing were added to the test model to provide a twin-side-scoop configuration applicable to a fighter-type airplane.

SYMBOLS

- A_1 inlet area, 1.12 square feet
D maximum diameter of cowling, 27.25 inches

h	height of inlet, 2.47 inches
H	total pressure, pounds per square foot
M_{cr}	predicted critical Mach number
p	static pressure, pounds per square foot
p_0	static pressure of free stream, pounds per square foot
q_0	dynamic pressure of free stream, pounds per square foot
u	local velocity at point in boundary layer, feet per second
U	velocity just outside boundary layer, feet per second
V_1	average velocity of flow at inlet, feet per second
V_0	velocity of free stream, feet per second
x	horizontal distance from station 0 (see fig. 2), inches
α	angle of attack of center line of model, degrees
δ	boundary-layer thickness, the normal distance from surface to point where $\frac{H - p_0}{q_0} = 0.98$, inches

MODEL AND TESTS

General views of the model are shown as figure 1; line drawings of the three annular-inlet configurations and coordinates of the "curved" nose and of the NACA 1-05-090 nose inlet used in conjunction with each of the fuselage noses are given in figure 2. The three fuselage noses had the same maximum diameter at the inlet. The "short" conical nose had an apex angle of 19° and a ratio of length to diameter of about 3, while the "long" conical nose had an apex angle of 14° and a ratio of length to diameter of approximately 4. The curved nose which had approximately the same length as the short conical nose was designed to obtain increased volume within the nose; its nose angle was about 32° .

A schematic drawing of the body of the model showing the arrangement, instrumentation, and principal dimensions is presented as figure 3. The internal-flow system included an axial-flow fan

which was necessary to obtain the higher inlet-velocity ratios. Flow control was obtained by varying the speed of the motor and the position of the shutters. The quantity of internal flow was measured by means of rakes of total- and static-pressure tubes at the throat of the venturi and at the exit of the model.

Surface pressures were measured by means of 11 to 15 flush orifices distributed along the top center line of each nose and 21 orifices installed in the top section of the inlet lip. Total pressures in the boundary layers of the several noses at the entrance station were measured by the use of a removable rake of nine 0.030-inch-diameter stainless-steel tubes with ends flattened to form openings about 0.005 by 0.05 inch. Pressure recoveries in the flow adjacent to the inner surface of the top section of the inlet lip were measured by means of the rake of five 1/16-inch-diameter total-pressure tubes shown in figure 3. All pressures were recorded by photographing a millivoltmeter.

The three annular-inlet configurations were tested over the angle-of-attack range from -20° to 60° at inlet-velocity ratios ranging from 0.4 to 1.5, while the open-nose cowl was investigated over the angle-of-attack range from 0° to 60° at inlet-velocity ratios ranging between 0.3 and 0.9. All tests were conducted at tunnel speeds of from 70 to 100 miles per hour; the latter value corresponds to a Mach number of 0.13 and a Reynolds number of about 2 million based on the maximum cowl diameter.

RESULTS AND DISCUSSION

The results of the present investigation are discussed in three sections which deal separately with surface pressures on the noses, surface pressures on the inlet lip, and flow conditions at the inlet.

Surface pressures on noses. - Static-pressure distributions over the top external surface of the three inlet configurations are presented in figures 4 to 6.

The static-pressure distributions over the short conical-nose configuration at an angle of attack of 0° , figure 4(b), show that substream velocities were obtained over the entire nose for low and medium values of inlet-velocity ratio. The effect of increasing the inlet-velocity ratio was to raise the velocities on the surface of the nose; however, these increases were very small except within one-half cowl diameter ahead of the inlet. Superstream velocities

occurred at the inlet at inlet-velocity ratios above approximately 0.9. The surface pressure on the nose at the inlet was always more negative than the corresponding value that could be estimated from the inlet-velocity ratio because the inlet-velocity distribution was nonuniform due to the boundary layer on the nose and to the pressure field of the inlet lip.

The more important effect of increasing the angle of attack of the model with the short conical nose was to increase (at the top of the nose) the extent of the superstream velocity field ahead of the inlet for inlet-velocity ratios above approximately 1.1. Small decreases were effected in the local velocities on the top of the nose at the inlet; presumably, as indicated by the data for the top of the nose for $\alpha = -2^\circ$, corresponding small increases were effected in the local velocities at the bottom of the nose.

Velocities over the forward portion of the long conical nose, although substream, were slightly higher than those for the short conical nose. (Compare figs. 4 and 5.) This condition caused some increases in the extent of the superstream velocity fields ahead of the inlet for the higher inlet-velocity ratios. At values of inlet-velocity ratio below unity, however, conditions at the section immediately in front of the inlet were essentially the same as those for the short nose.

The introduction of curvature to the sides of the short nose caused decreases in the surface velocities well forward on the nose, but also resulted in the formation of a minimum pressure peak located 0.5 to 1.0 cowling diameters ahead of the inlet. (Compare figs. 4 and 6.) The surface velocities in the latter region were approximately free-stream values at an inlet-velocity ratio of 0.9 at an angle of attack of 0° . However, at the usual high-speed inlet-velocity ratios, superstream velocities did not occur within the useful range of angle of attack. Surface velocities at the inlet of the curved-nose configuration, in general, were slightly lower than those for the conical-nose configurations at any given value of inlet-velocity ratio, probably because of the improved alignment of the entering flow.

The following table presents the maximum values of inlet-velocity ratio for which substream velocities were maintained on the three noses at angles of attack of 0° and 2° :

Nose	$\alpha = 0^\circ$	$\alpha = 2^\circ$
Short cone	0.88	0.83
Long cone	.93	.87
Curved	.91	.73

For $\alpha = 2^\circ$, the above maximum values were determined in the case of the two conical noses by the pressures on the bottom surfaces at the inlet, and in the case of the curved nose by the pressures on the top surface of the nose well forward of the inlet. These velocity ratios exceed the usual design values for high-speed flight; thereby indicating the feasibility of this type of inlet for a transonic airplane. The critical Mach number characteristics of the top surfaces of the three noses (predicted by the use of the von Karman relationship, reference 2, and qualified by the fact that some of the higher inlet-velocity ratios are unobtainable in the high-speed flight conditions due to choking of the inlet) are presented in figure 7 for the range of inlet-velocity ratio over which superstream surface velocities occurred.

Surface pressures on inlet lip.— The pressure distributions over the external surface of the lip of the annular inlets (figs. 4 to 6) were essentially similar to those for the basic open-nose cowl (fig. 8), and were characteristic of those for the NACA 1-series nose inlets in that they were fairly flat at and above the inlet-velocity ratios which were required to prevent the occurrence of a negative pressure peak at the leading edge. The predicted critical Mach number characteristics for this surface are shown in figure 7 as a function of the inlet-velocity ratio for angles of attack of 0° and 4° , and are compared in figure 9 at $\alpha = 0^\circ$ with corresponding data for the NACA 1-85-050 open-nose cowl. This comparison shows that at and above its design inlet-velocity ratio (that is, beyond the "knee" of the curve) the basic inlet had approximately the same critical Mach numbers with the various noses installed as when tested in the open-nose condition. Below the design point, the critical speeds for the lip of the annular-inlet configurations decreased more gradually with decreases in the inlet-velocity ratio than did those for the open-nose cowl, probably because the presence of the noses improved the alignment of the entering flow. (See fig. 8.) The curved nose produced a higher critical speed on the inlet lip than did the conical noses over most of the range of V_i/V_o for the same reason. The flow appears to have been separated from the lip of the open-nose cowl at $\frac{V_i}{V_o} = 0.3$ because of the high effective angle of attack of the lip.

The foregoing results indicate that satisfactory lips for this type of inlet can be designed by application of existing data for the NACA 1-series nose inlets; the design charts of reference 1 cover the selection of these inlets for critical Mach numbers as high as 0.9. In the use of these data it should be noted that the critical Mach number is defined as the Mach number at which sonic

velocity is attained on the surface of the nose inlet. Tests of airfoils and streamlined bodies indicate that the Mach number at which shock separation and abrupt drag increases take place is somewhat greater than the critical Mach number.

Static-pressure distributions around the top section of the inlet lip, figure 10, show that negative pressure coefficients occurred on the inside of the lip at inlet-velocity ratios above 0.9 at an angle of attack of 0° . Both decreases in α and further increase in V_1/V_0 caused rapid increases in the values of these negative pressure coefficients; the internal flow therefore might be expected to separate from the lower lip of the inlet in the climb condition in which combinations of high values of V_1/V_0 and α are encountered. This result, together with the fact that the critical Mach numbers for this surface were lower than those for any other component of the inlet at high values of V_1/V_0 (fig. 7), stresses the necessity for the experimental development of less sensitive inner-lip fairings.

Flow conditions at inlet.— Total-pressure and velocity distributions in the boundary layers of the three noses at the inlet are presented in figures 11 and 12, respectively. The profiles are typical of those for turbulent flow. Decreases in the inlet-velocity ratio caused rapid increases in boundary-layer thickness because of the resulting increases in the adverse pressure gradient in front of the inlet. Extensive pressure fluctuations at the recording manometer furnished an indication that the boundary layers on the three noses were unstable at $\frac{V_1}{V_0} = 0.4$; the sample total-pressure and velocity profiles contained in figures 11 and 12 show that the flow was either separated or on the verge of separation from the surface of the two conical noses for this test condition.

The boundary-layer thickness δ and the ratio of this thickness to the inlet height δ/h are presented in figure 13 as a function of the inlet-velocity ratio. The boundary-layer thicknesses for the short conical nose and the curved nose were of the same order over most of the V_1/V_0 range, and were about 19 percent of the inlet height for a typical high-speed inlet-velocity ratio of 0.7 compared to about 32 percent for the long conical nose. As the high-speed inlet-velocity ratio for an installation of this type probably would not be less than 0.6, the boundary-layer instability and flow separation mentioned in the preceding paragraph probably would not be encountered except in the dive condition with the engine throttled.

Total pressure recoveries in the outer half of the inlet annulus at the top of the model are shown in figure 14. The losses for low inlet-velocity ratios, which increased rapidly with angle of attack, were caused by the separated boundary layer on the noses. (See fig. 11 for inner portion of boundary layer profiles for $\alpha = 0^\circ$.) The losses for high inlet-velocity ratios and low angles of attack were caused by separation of the flow from the inner fairing of the lip due to the negative pressure peaks shown in figure 10; as separation from the lip at the bottom of the inlet would be especially severe in the climb condition, this result again stresses the necessity for further development of inner-lip fairings for use at inlet-velocity ratios greater than unity. For angles of attack between -20° and 20° , the flow did not separate from either the inlet lip or the noses of the three configurations for inlet-velocity ratios between 0.7 and 1.0. The short conical nose appeared to have a somewhat wider separation-free operating range of inlet-velocity ratio than did the other two noses.

SUMMARY OF RESULTS

A low-speed investigation has been made of three transonic fuselage-inlet installations designed to maintain substream velocities on the body ahead of the air inlets. The more important results and conclusions of this investigation are summarized as follows:

1. Substream velocities were maintained on the three cone-type fuselage noses over the ranges of angle of attack and inlet-velocity ratio useful for high-speed flight.
2. The thicknesses of the boundary layers on the short and long noses were about 19 and 32 percent of the inlet height, respectively, for a typical high-speed inlet-velocity ratio of 0.7. Boundary-layer separation was not encountered at an angle of attack of 0° over the range of inlet-velocity ratio useful for high-speed flight.
3. At and above its design inlet-velocity ratio, the NACA 1-85-050 cowl used as the basic inlet had approximately the same critical Mach numbers with the various noses installed as when tested in the open-nose condition. Below this design point, the critical speeds for the inlet lip of the annular-inlet configurations decreased more gradually with decreases in inlet-velocity ratio than did those for the basic cowl. Thus, data for the NACA 1-series nose inlets, which cover the range of critical Mach number up to 0.9, can be used in the design of installations of this type.

4. At very high values of inlet-velocity ratio the high negative pressure peaks encountered on the inner portion of the inlet lip caused the internal flow to separate. This result stresses the necessity for the development of less sensitive inner-lip fairings for inlets which operate at inlet-velocity ratios exceeding unity.

Langley Memorial Aeronautical Laboratory
National Advisory Committee for Aeronautics
Langley Field, Va.


REFERENCES

1. Baals, Donald D., Smith, Norman F., and Wright, John B.: The Development and Application of High-Critical-Speed Nose Inlets. NACA ACR No. L6F30a, 1945.
2. von Kármán, Th.: Compressibility Effects in Aerodynamics. Jour. Aero. Sci., vol. 8, no. 9, July 1941, pp 337-355.


10

NACA RM No. L6J04


Fig. 1

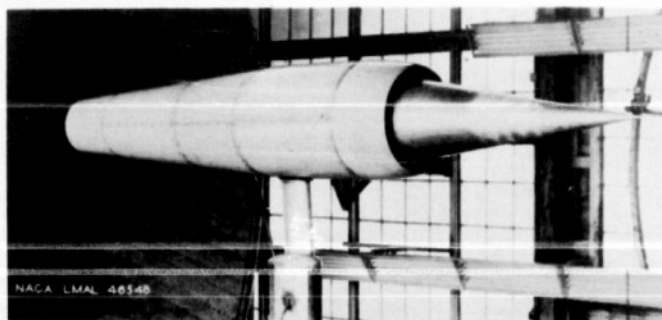

(a) Short conical nose.

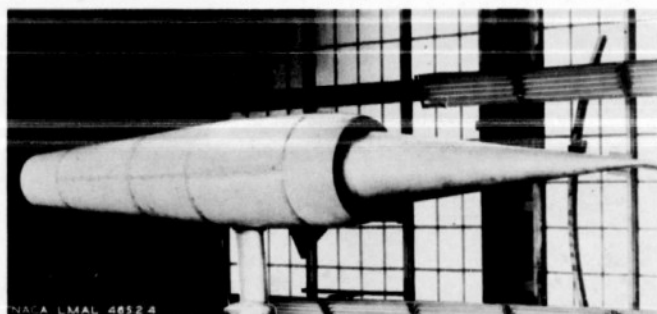

(b) Long conical nose.

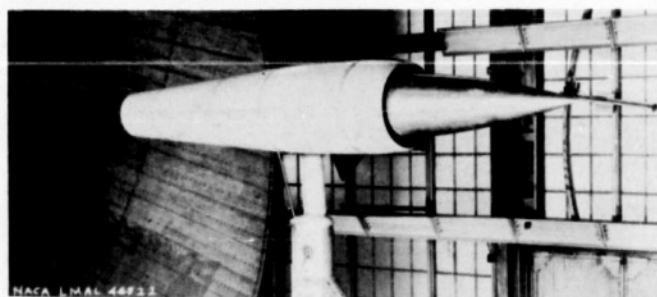


(c) Curved nose.

Figure 1.- General views of the model with the three annular inlet configurations.

13


Fig. 3

NACA RM No. L6J04

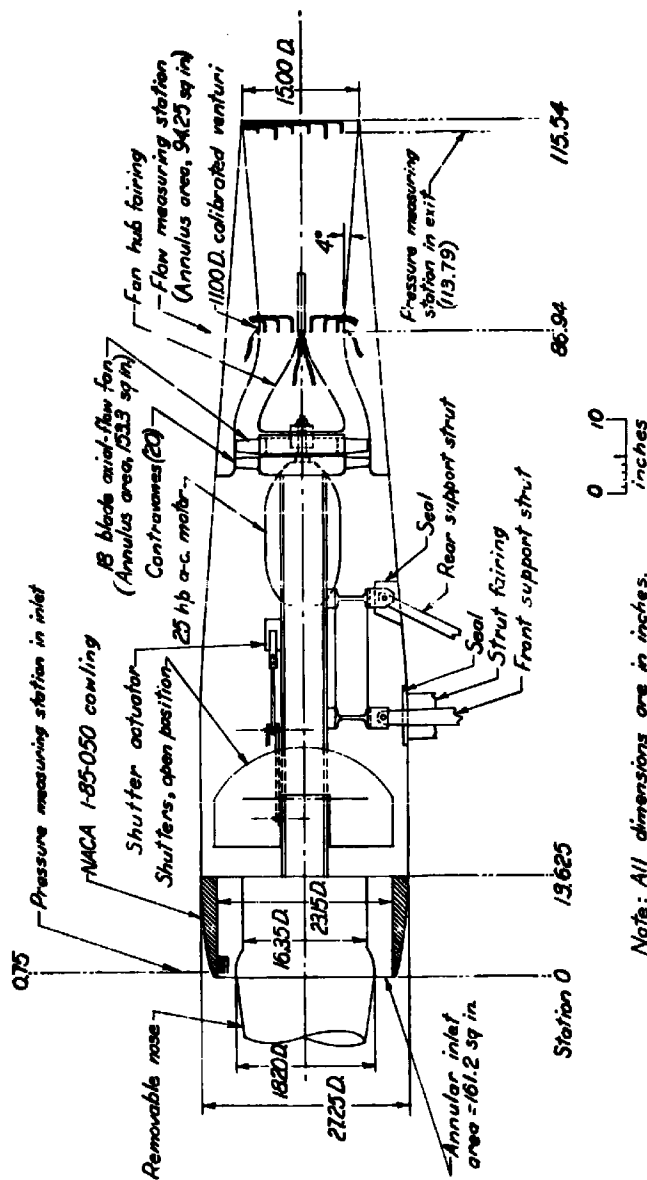

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS


Figure 3. - Schematic drawing of body of model showing the arrangement, instrumentation, and principal dimensions.

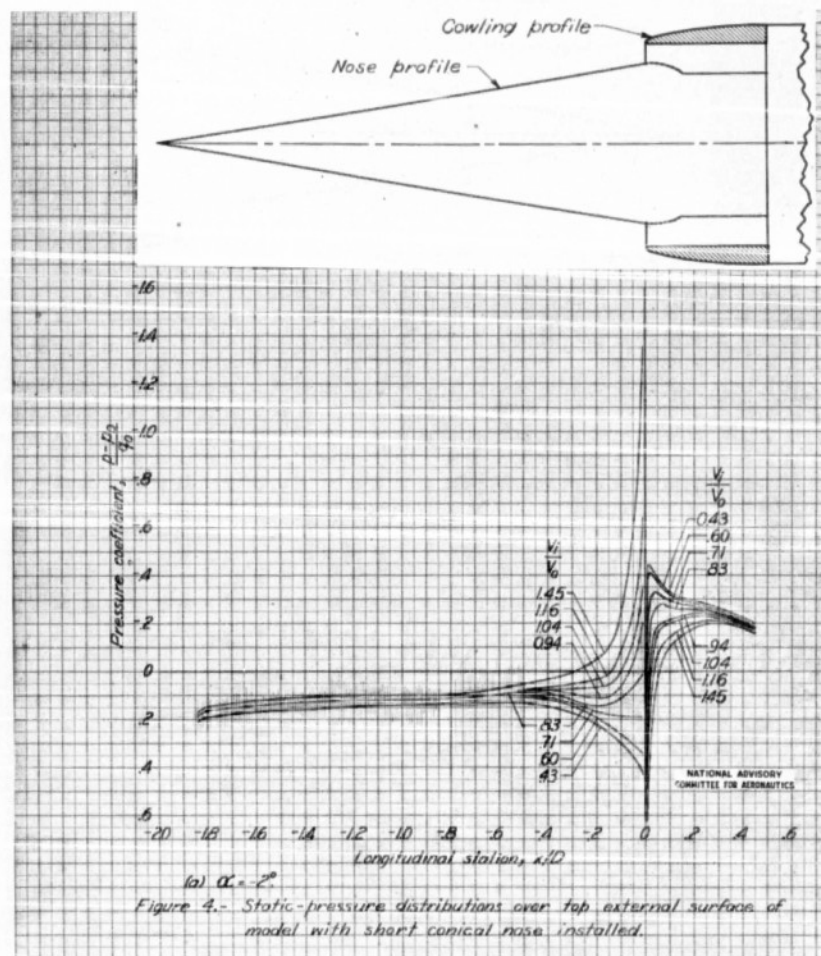


14

Fig. 4b

NACA RM No. L6J04

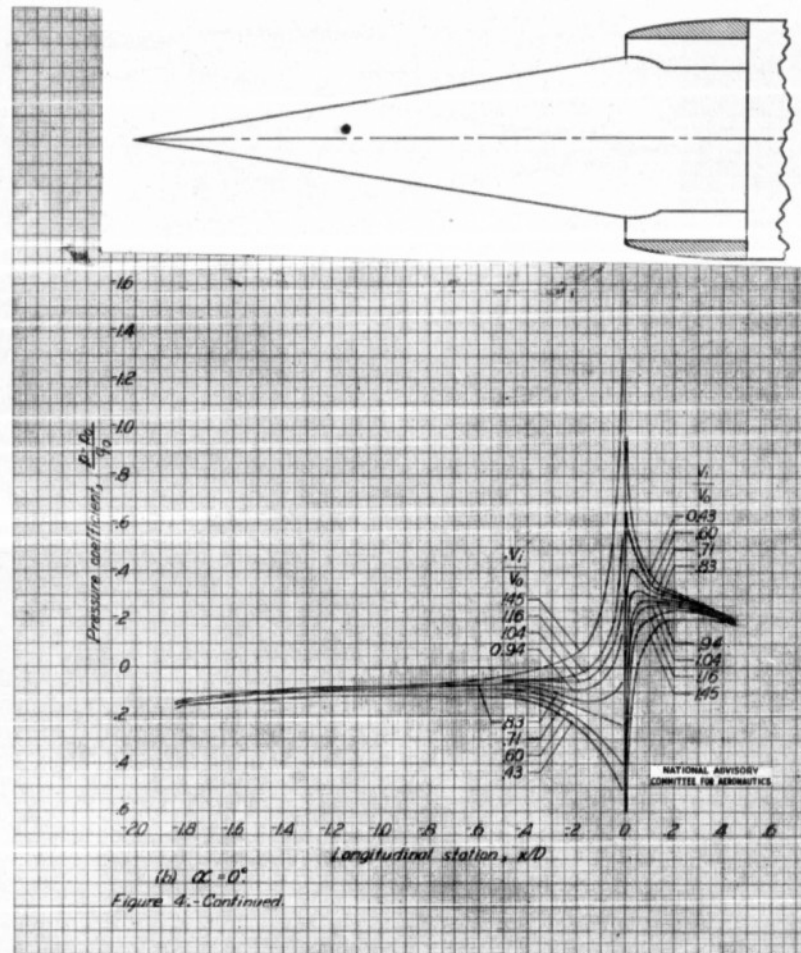


15

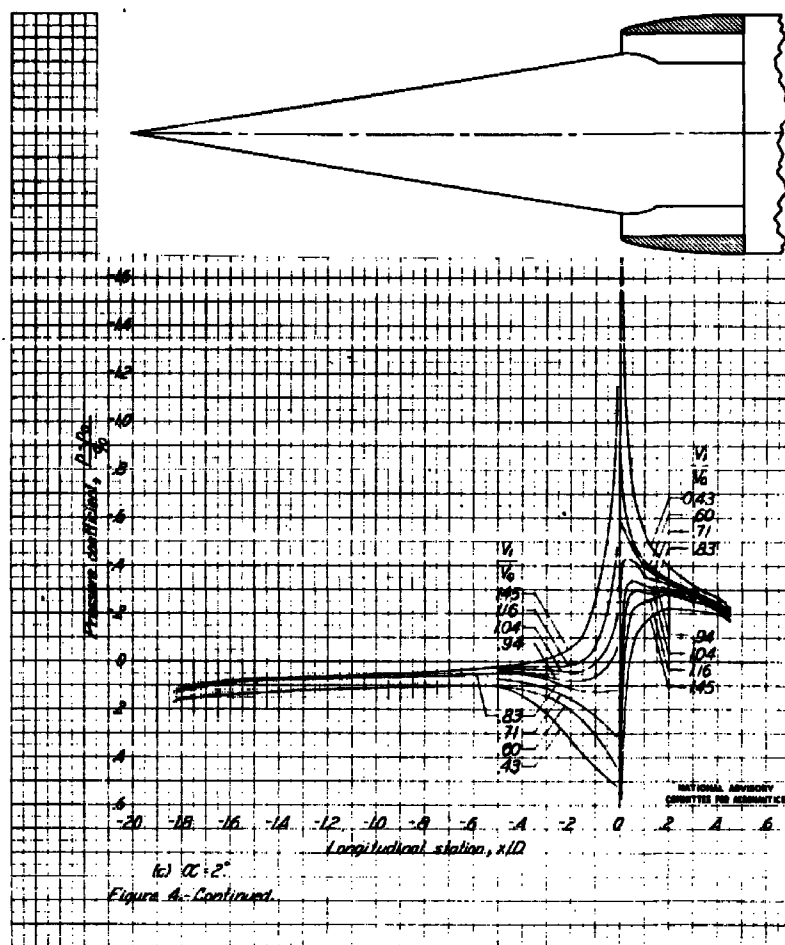

16

Fig. 4d

NACA RM No. L6J04

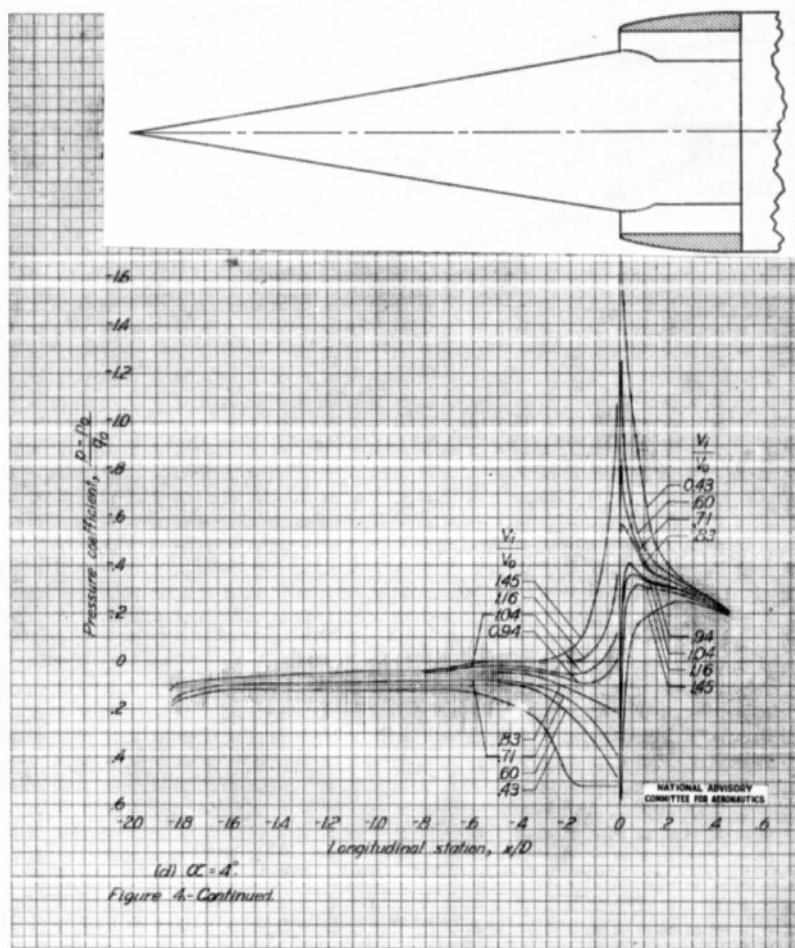


(b) $\alpha = 0^\circ$
Figure 5. Continued.


(b) $\alpha = 0^\circ$
Figure 5 - Continued

(18)

Fig. 5c

NACA RM No. L6J04

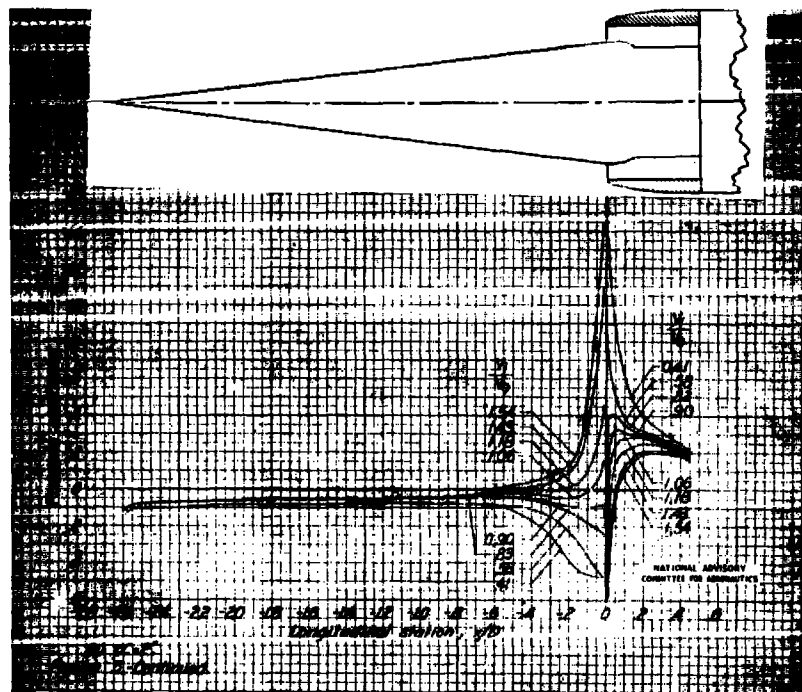

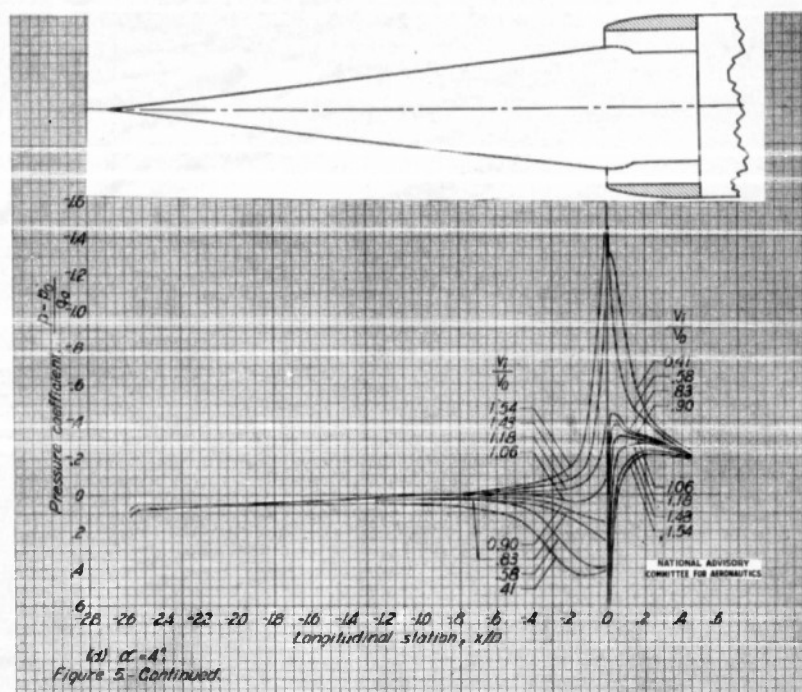

20

Fig. 5e

NACA RM No. L6j04


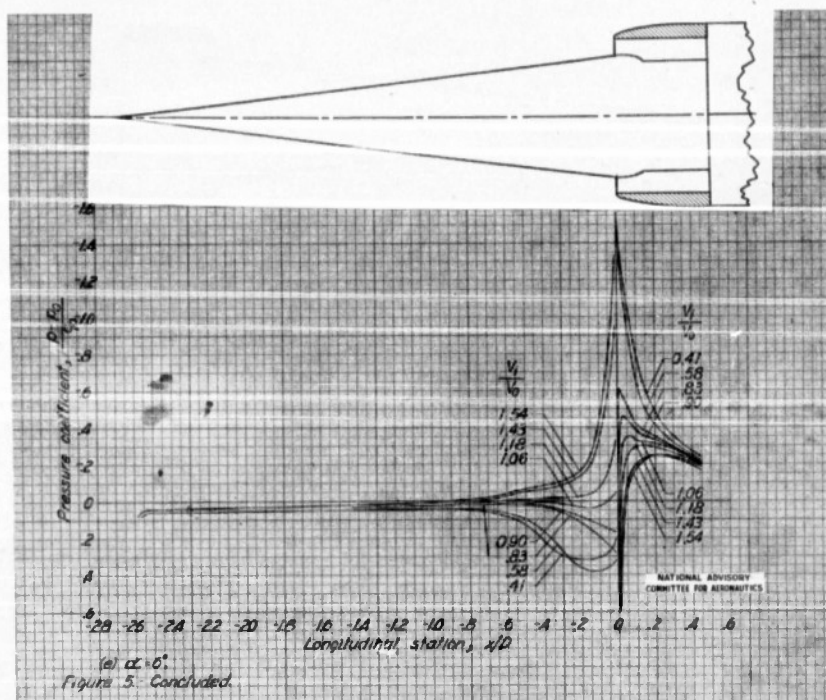


Fig. 6a

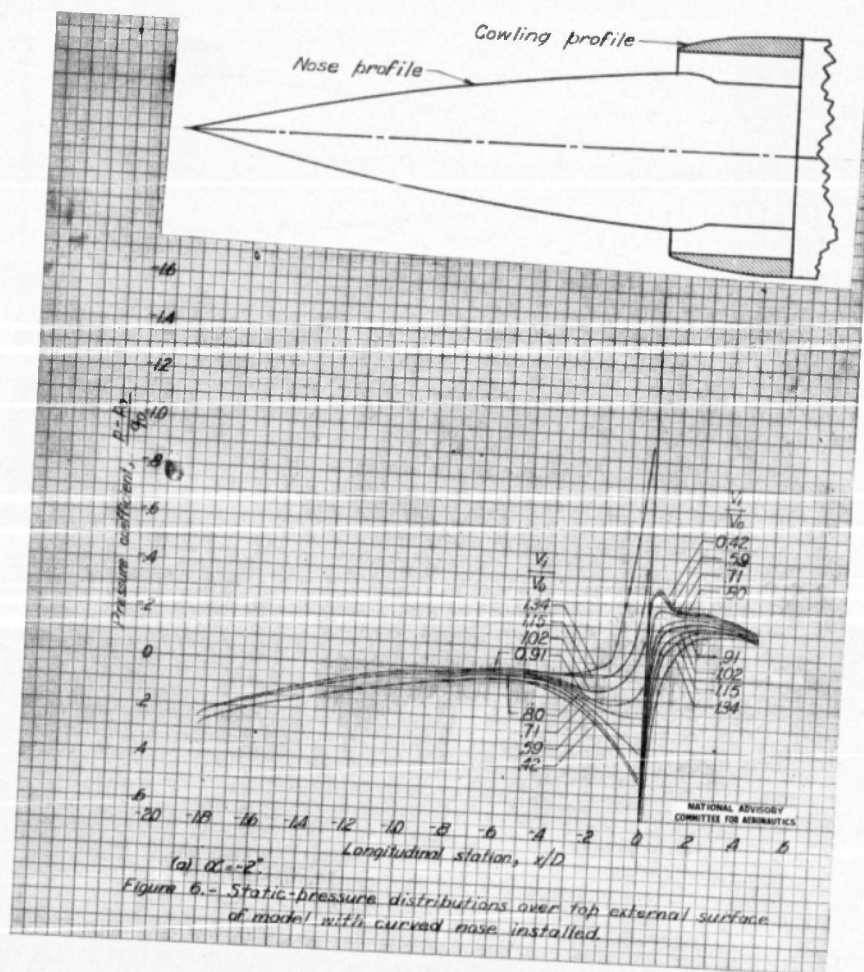

22

Fig. 6b

NACA RM No. L6J04



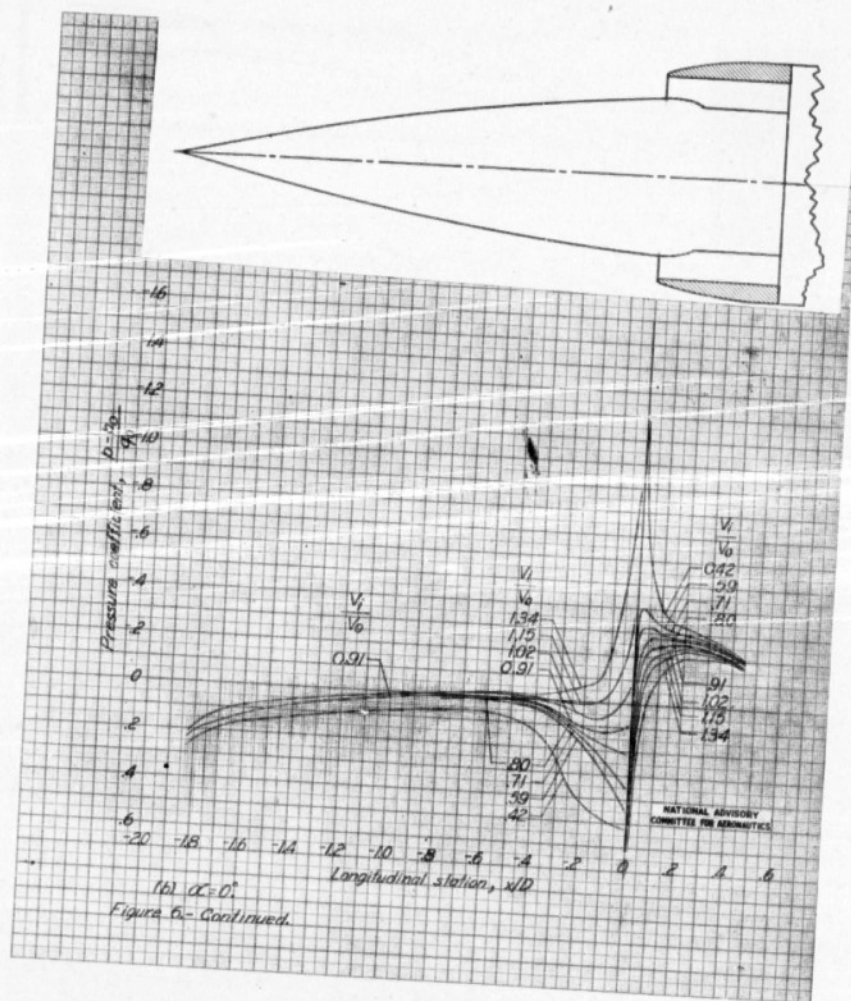




Fig. 6d

NACA RM No. L6J04

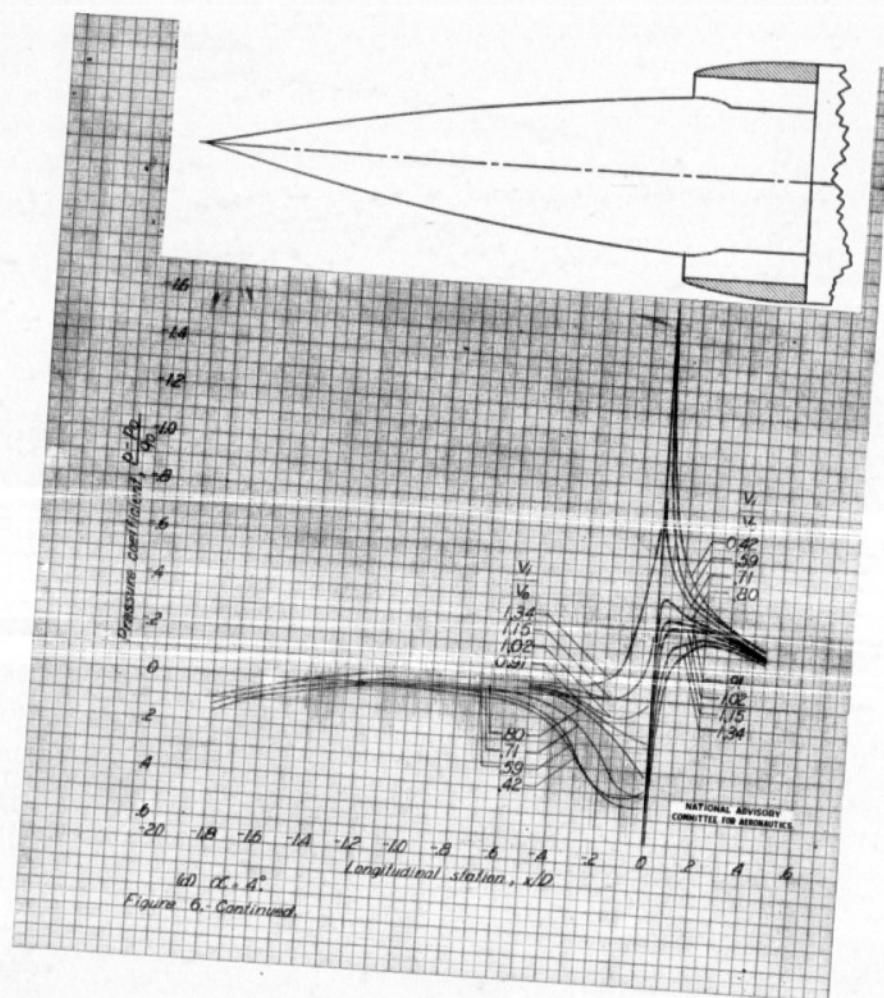


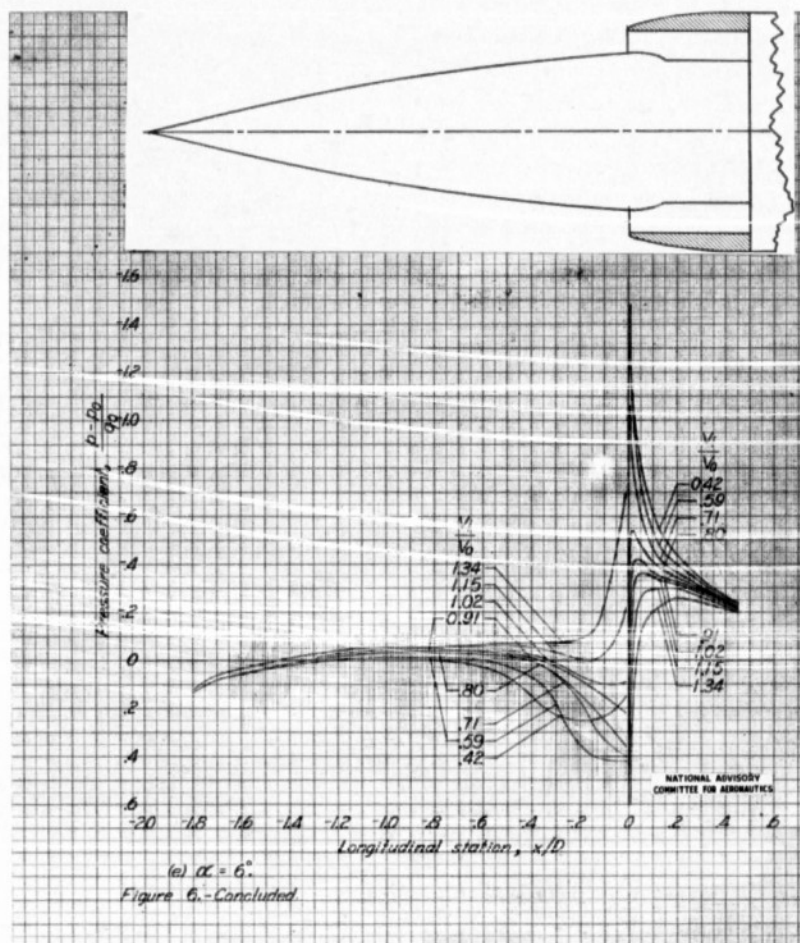


26

Fig. 7

NACA RM No. L6J04

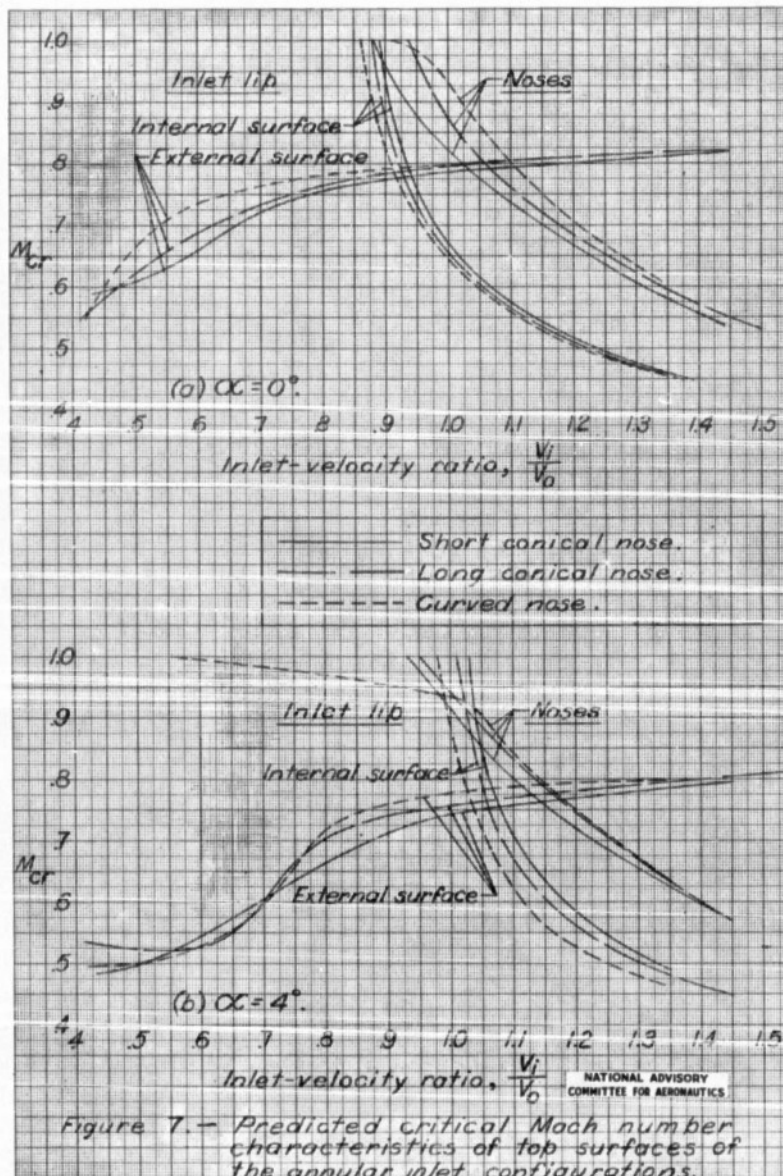


27

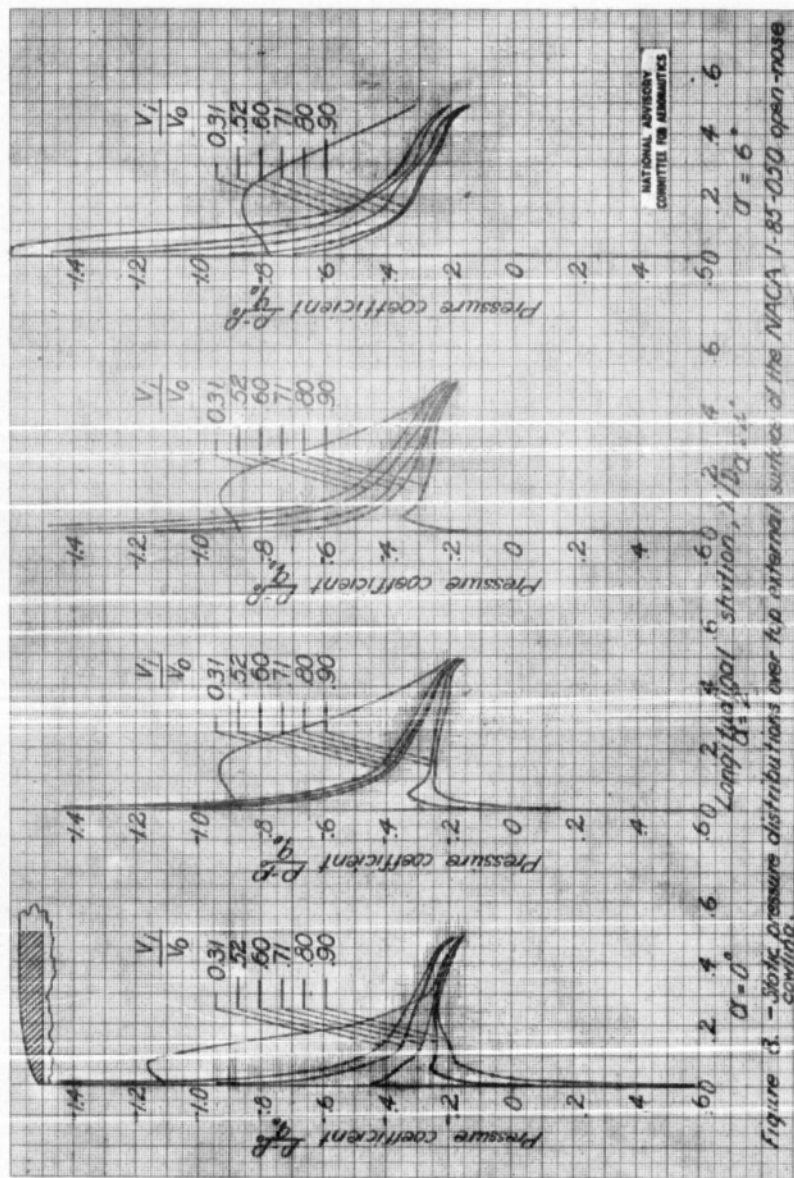

68

Fig. 9

NACA RM No. L6J04

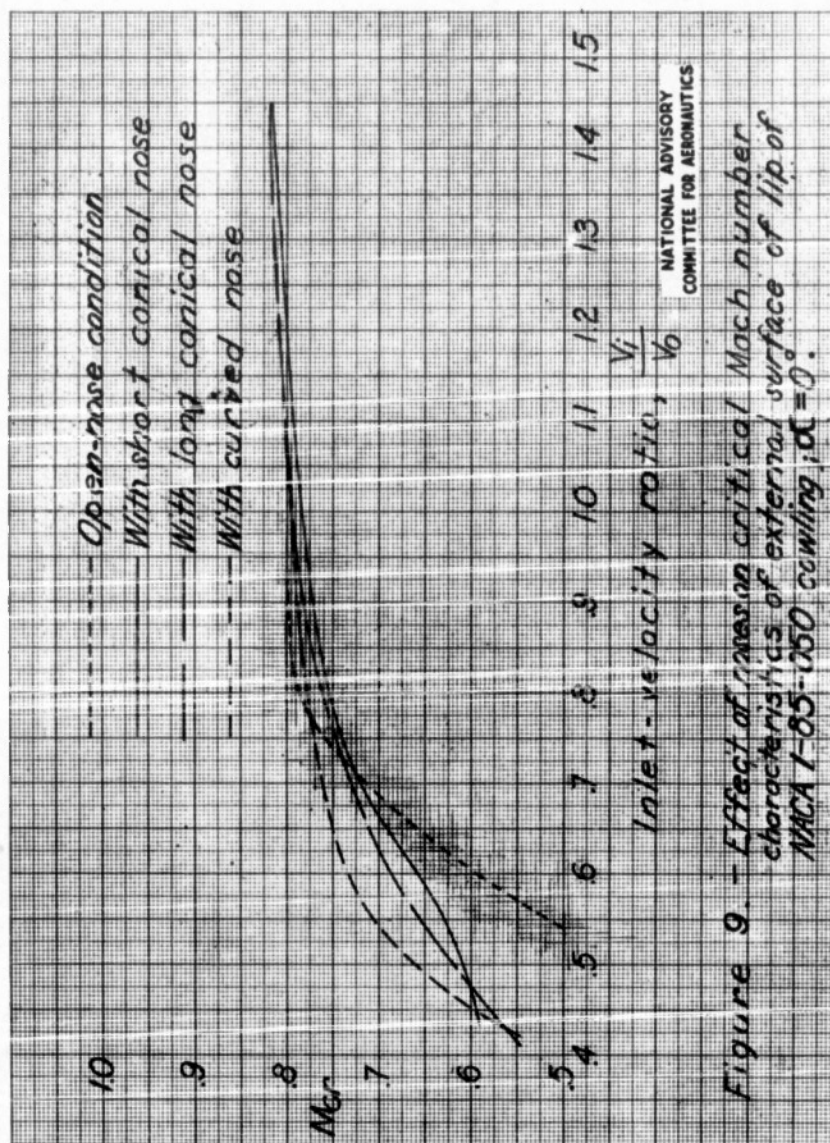

29

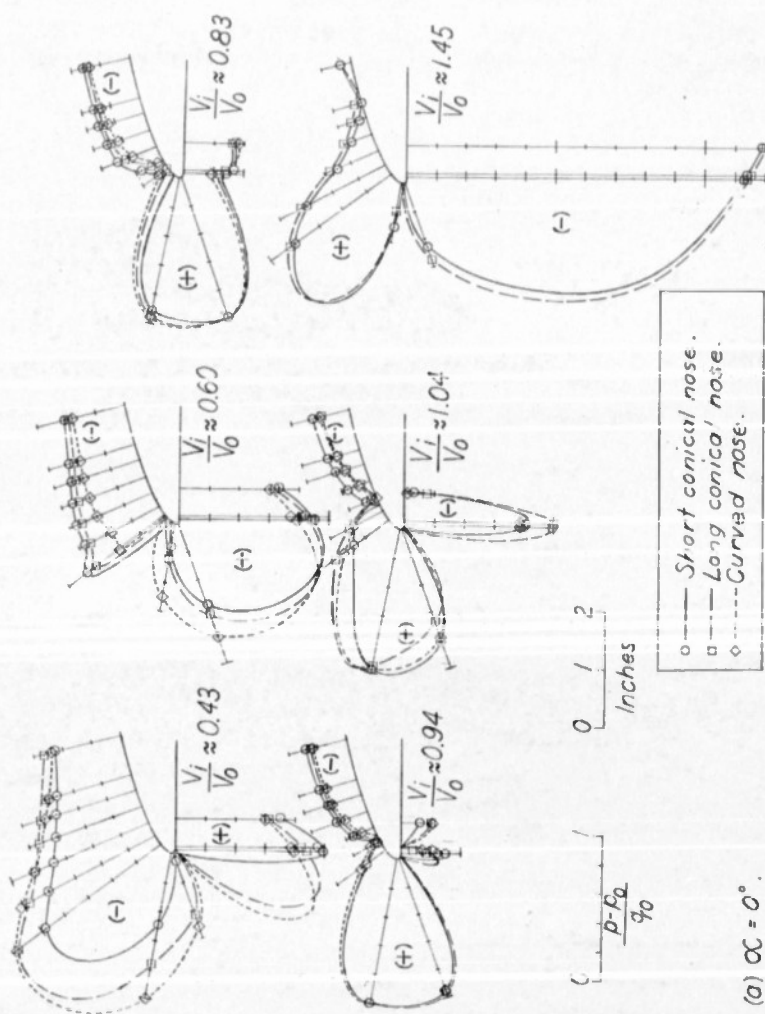
(a) $\alpha = 0^\circ$.

Figure 10. Static-pressure distributions around top section of lip of NACA 1-85-050 cowl with the three noses installed.

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

30

Fig. 10b

NACA RM No. L8J04

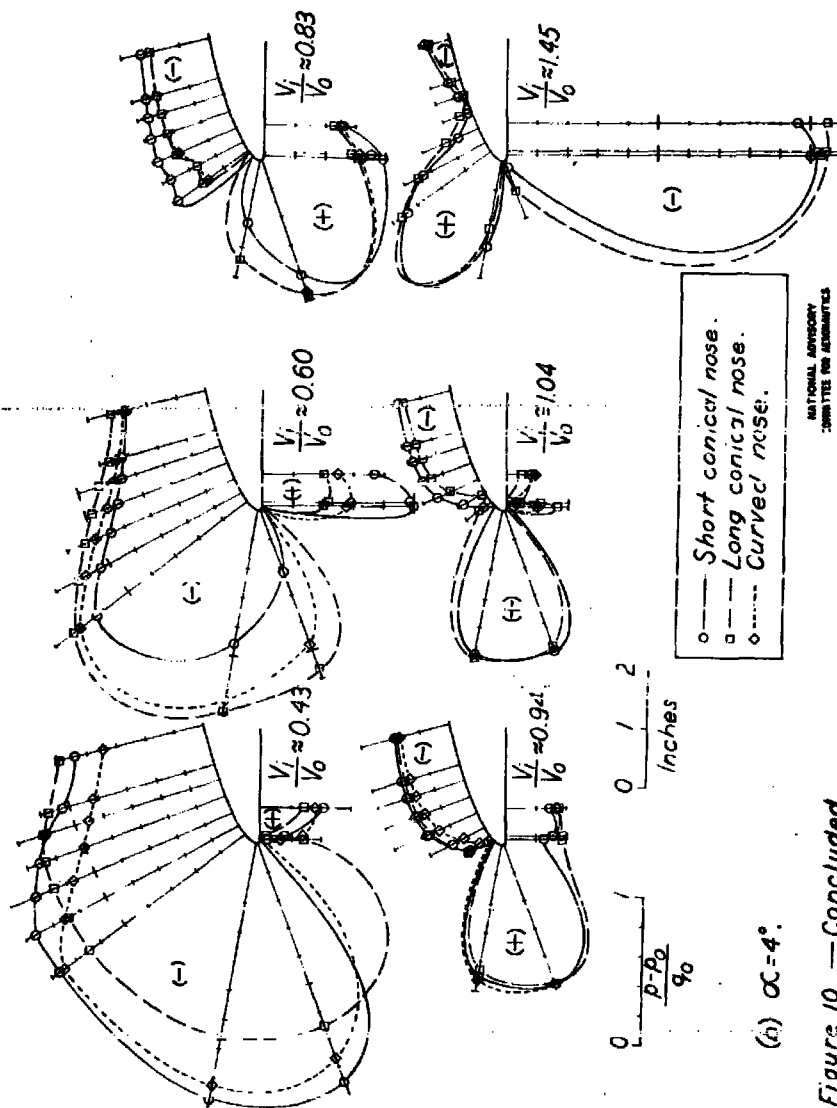


Figure 10. — Concluded.

31



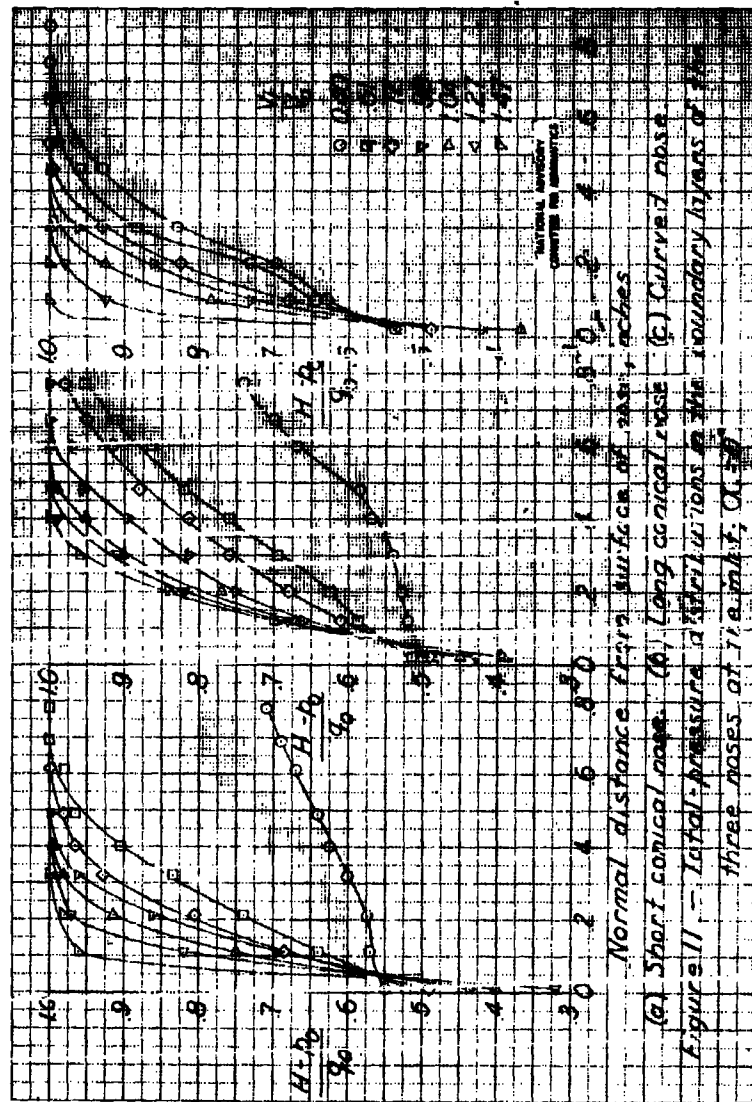


Fig. 12


NACA RM No. L6J04

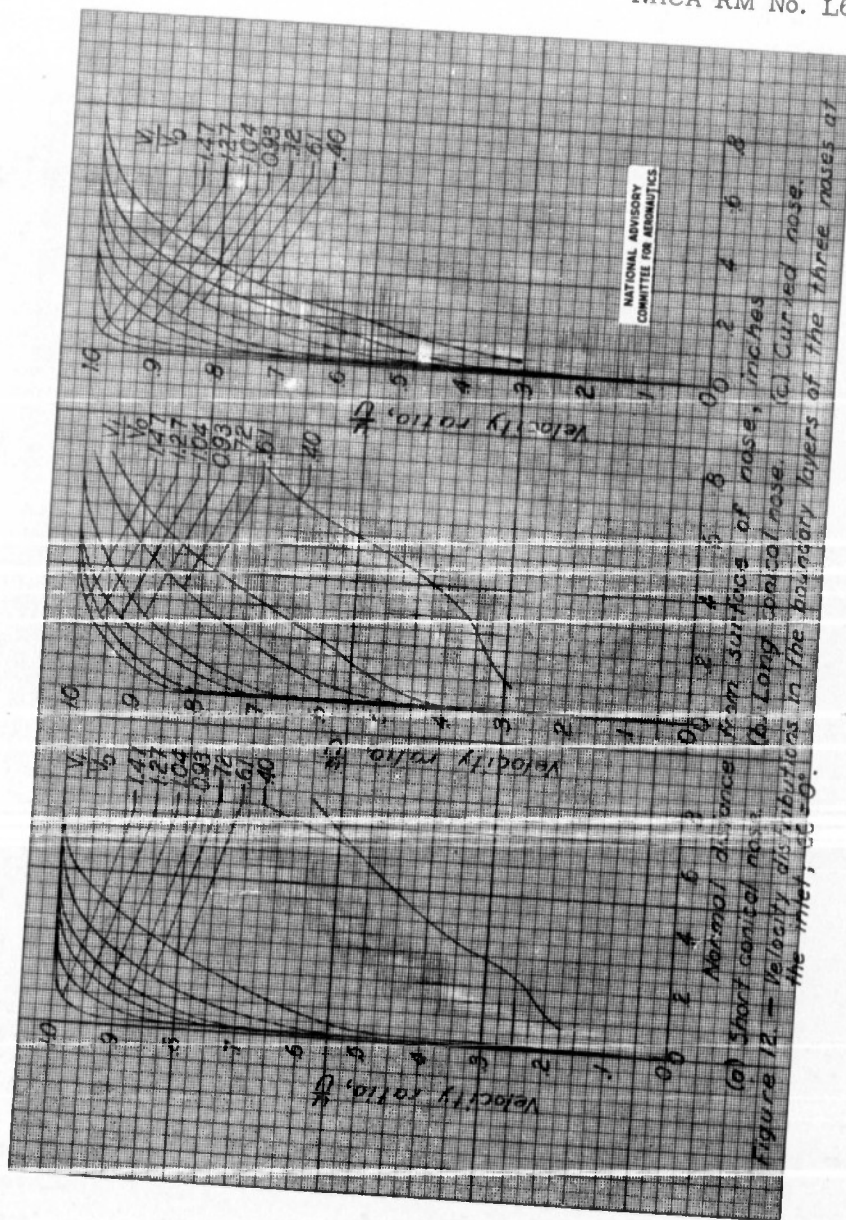


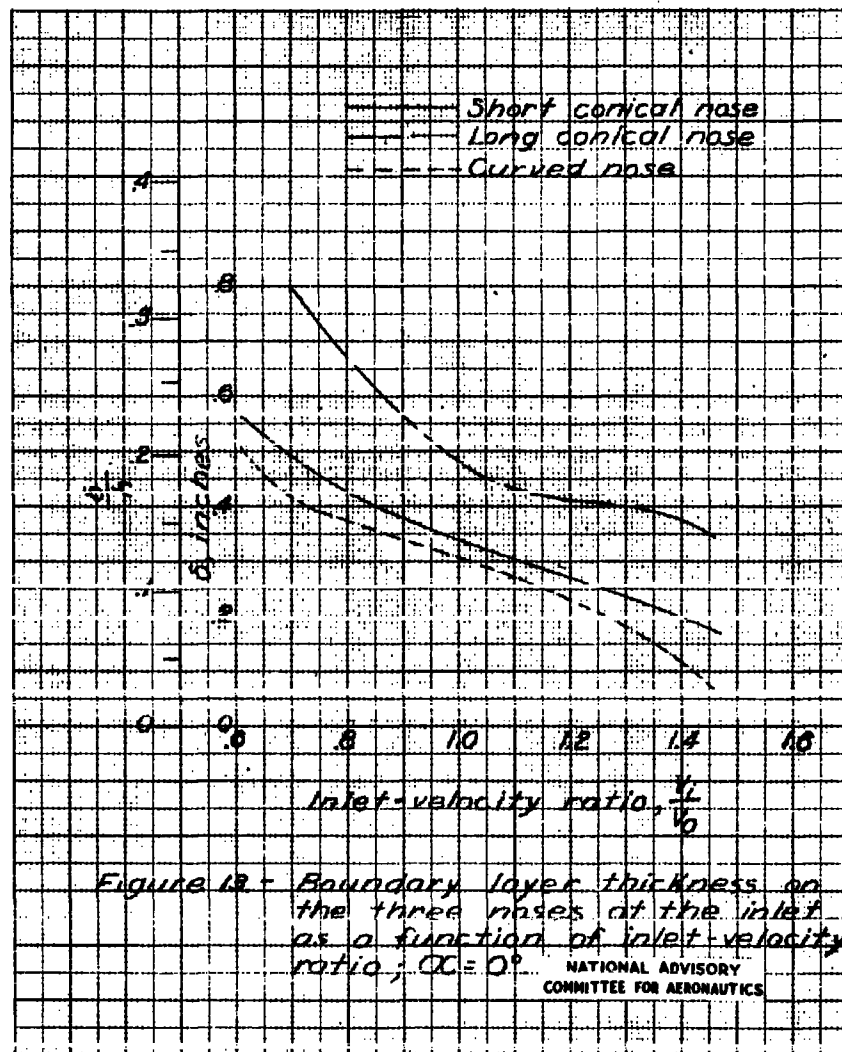

34

Fig. 14a

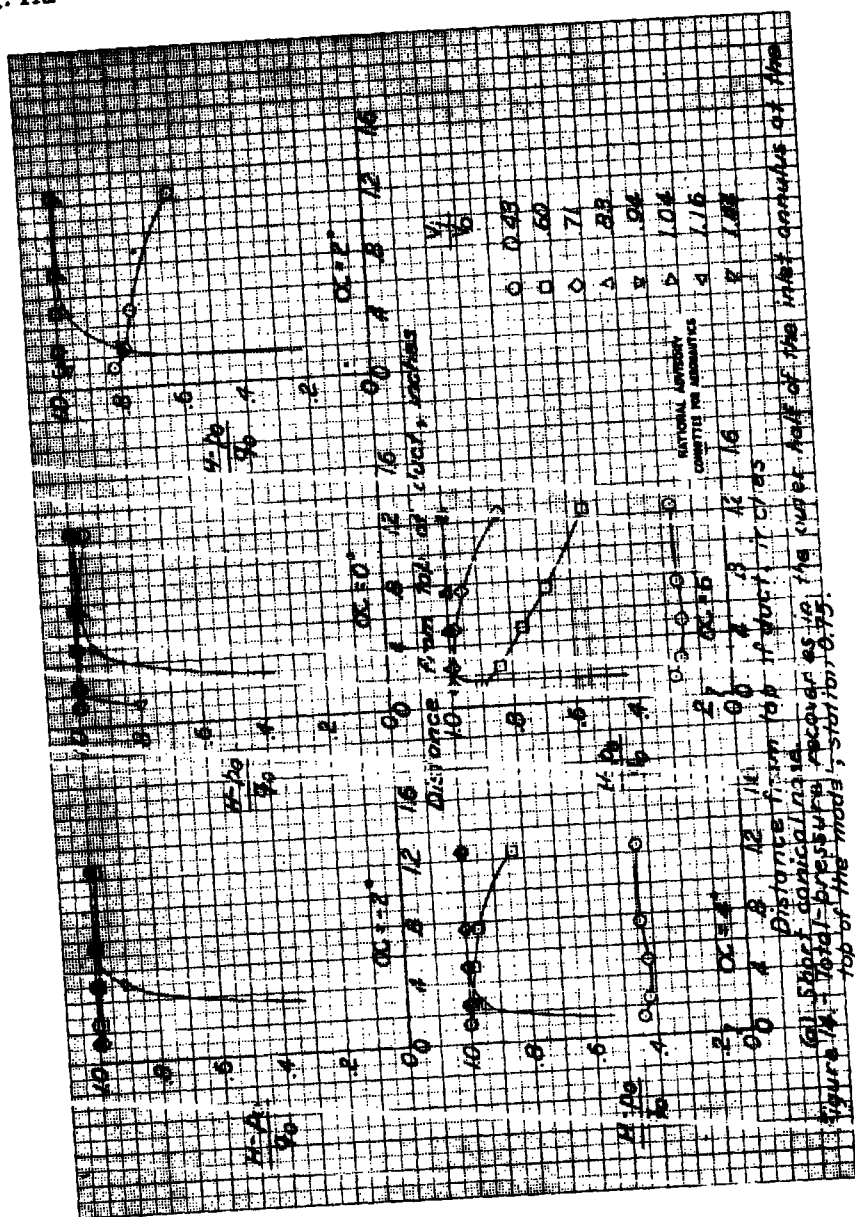


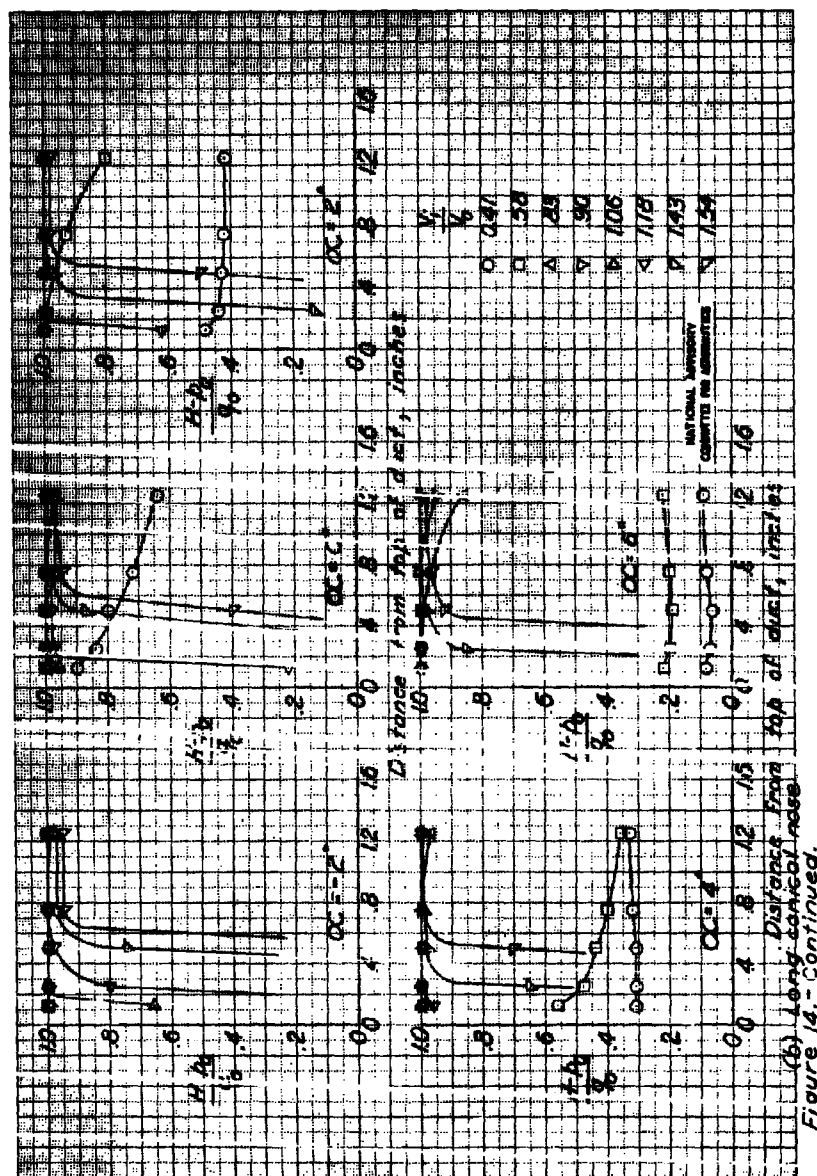

26

Fig. 14c

NACA RM No. L8J04

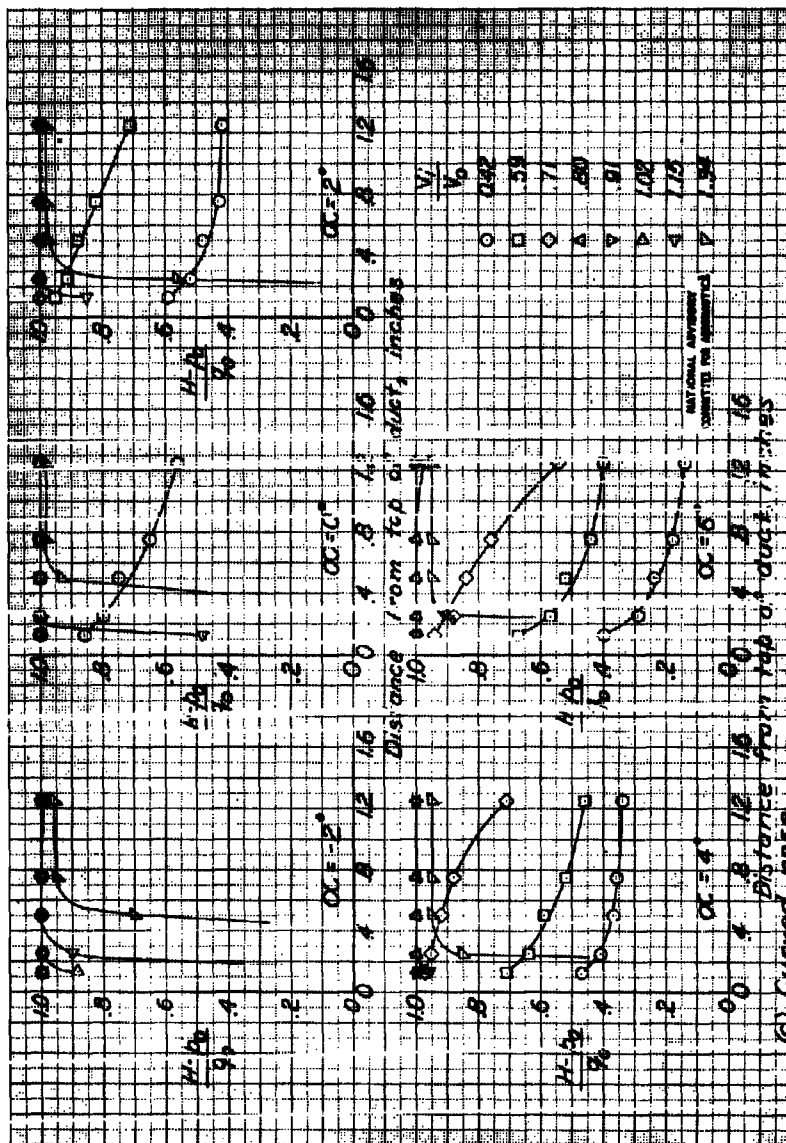

(a) Curved plate.
Figure 14. - Concluded.

REEL - C

119

A.T.I.

3 1 5 7

RESTRICTED**TITLE:** A Low-Speed Investigation of an Annular Transonic Air Inlet**ATI- 3157****AUTHOR(S):** Nichols, M. R.; Rinkoski, D. W.**REVISION****(None)****ORIGINATING AGENCY:** National Advisory Committee for Aeronautics, Washington, D. C.**ORIG. AGENCY NO.****RM-L6J04****PUBLISHED BY:** (Same)**PUBLISHING AGENCY NO.**

DATE	DOC. CLASS.	COUNTRY	LANGUAGE	PAGES	ILLUSTRATIONS
April '47	Reslr.	U.S.	Eng.	36	photos, tables, diagrs, graphs

ABSTRACT:

Study was made of the problem encountered in application of fuselage scoops to transonic airplane. Design must be so as to prevent compression shocks on fuselage forward of air inlets to prevent boundary layer separation which would result in unstable inlet flow and losses in ram. Two theoretically designed cone-type fuselage noses of different apex angle and one with an ogival nose were tested. Surface pressures and inlet total pressure were measured for wide ranges of inlet velocity ratio and angle of attack. Results showed that substream velocities were maintained over ranges of angle of attack. Inlet velocity ratio was useful for high speed flight.

DISTRIBUTION: Request copies of this report only from Originating Agency**DIVISION:** Aerodynamics (2)**SECTION:** Boundary Layer (5)**SUBJECT HEADINGS:** Boundary layer control (18400);
Induction systems (51401)**ATI SHEET NO.:** R-2-5-12Air Documents Division, Intelligence Department
Air Materiel Command**AIR TECHNICAL INDEX**
RESTRICTEDWright-Patterson Air Force Base
Dayton, Ohio

Air to 21's
Annular Nozzles

P2014

UNCLASSIFIED

ATI Revision 3157

(U. S. Military Organizations request
copies from ASTIA-DSC. Others
request copies from NACA, Wash., D. C.)

National Advisory Committee for Aeronautics, Langley Aeronautical
Lab., Langley Air Force Base, Va. (NACA TN 2685)

A Low Speed Investigation of an Annular Transonic Air Inlet -
Technical Note

Nichols, Mark R.; Rinkoski, Donald W. 11 Oct'46 (April '52) 38pp.
photos, table, diagrs, graphs drwgs

Ducts, Intake - Location
Ducts, Intake - Pressure distribution
Flow, Transonic

Aerodynamics (2)
Internal Flow (4)



UNCLASSIFIED

RESTRICTED

TITLE: A Low-Speed Investigation of an Annular Transonic Air Inlet

ATI- 3157

REVISION

(None)

ORIG. AGENCY NO.

RM-L6J04

PUBLISHING AGENCY NO.

AUTHOR(S): Nichols, M. R.; Rinkoski, D. W.

ORIGINATING AGENCY: National Advisory Committee for Aeronautics, Washington, D. C.

PUBLISHED BY: (Same)

DATE	DOC. CLASS.	COUNTRY	LANGUAGE	PAGES	ILLUSTRATIONS
April '47	Restr.	U.S.	Eng.	36	photos, tables, diagrs, graphs

ABSTRACT:

Study was made of the problem encountered in application of fuselage scoops to transonic airplane. Design must be so as to prevent compression shocks on fuselage forward of air inlets to prevent boundary layer separation which would result in unstable inlet flow and losses in ram. Two theoretically designed cone-type fuselage noses of different apex angle and one with an ogival nose were tested. Surface pressures and inlet total pressure were measured for wide ranges of inlet velocity ratio and angle of attack. Results showed that substream velocities were maintained over ranges of angle of attack. Inlet velocity ratio was useful for high speed flight.

DISTRIBUTION: Request copies of this report only from Originating Agency

DIVISION: Aerodynamics (2)

SECTION: Boundary Layer (5)

SUBJECT HEADINGS: Boundary layer control (18400);
Induction systems (51401)

ATI SHEET NO.: R-2-5-12

Air Documents Division, Intelligence Department
Air Materiel CommandAIR TECHNICAL INDEX
RESTRICTEDWright-Patterson Air Force Base
Dayton, Ohio

AT|-3157

REV. 22 July '52

National Advisory Committee for Aeronautics,
Langley Aeronautical Lab., Langley Air Force
Base, Va. (NACA TN 2685)

A LOW SPEED INVESTIGATION OF AN ANNULAR
TRANSONIC AIR INLET - TECHNICAL NOTE, by
Mark R. Nichols, and Donald W. Rinkoski. 11 Oct '46,
(April '52), 38 pp. incl. photos, table, diagrs, graphs,
drwgs. UNCLASSIFIED

A low-speed investigation of an annular transonic air
inlet was conducted in the Langley propeller-research
tunnel in order to obtain some indication of the basic
(over)

DIVISION: Aerodynamics (2)

SECTION: Internal Flow (4)

DISTRIBUTION: U.S. Military Organizations request
copies from ASTIA-DSC. Others request copies from
NACA, Washington, D.C.

1. Ducts, Intake - Location
 2. Ducts, Intake - Pressure
distribution
 3. Flow, Transonic
- I. Nichols, Mark R.
II. Rinkoski, Donald W.

ARMED SERVICES TECHNICAL INFORMATION AGENCY
DOCUMENT SERVICE CENTER

characteristics of such inlets. Two theoretically designed cone fuselage noses of different apex angle, and one ogival nose were tested in conjunction with an NACA 1-85-050 cowl which was also tested in the open-nose condition. Surface pressures and inlet total pressures were measured at the tops of the test configurations for wide ranges of inlet-velocity ratio and angle of attack. The results of the investigation show that substream velocities were maintained on the three fuselage noses over the ranges of angle of attack and inlet-velocity ratio useful for high-speed flight. At very high values of inlet-velocity ratio, the high negative pressure peaks encountered on the inner part of the inlet lip caused the internal flow to separate. A discussion of the results is included.

ATI-3157