

UNCLASSIFIED

AD NUMBER

ADA800699

CLASSIFICATION CHANGES

TO: unclassified

FROM: restricted

LIMITATION CHANGES

TO:
Approved for public release; distribution is unlimited.

FROM:
Distribution authorized to DoD only; Foreign Government Information; SEP 1946. Other requests shall be referred to British Embassy, 3100 Massachusetts Avenue, NW, Washington, DC 20008.

AUTHORITY

DSTL, AVIA 6/9974, 15 Oct 2009; DSTL, AVIA 6/9974, 15 Oct 2009

THIS PAGE IS UNCLASSIFIED

Reproduction Quality Notice

This document is part of the Air Technical Index [ATI] collection. The ATI collection is over 50 years old and was imaged from roll film. The collection has deteriorated over time and is in poor condition. DTIC has reproduced the best available copy utilizing the most current imaging technology. ATI documents that are partially legible have been included in the DTIC collection due to their historical value.

If you are dissatisfied with this document, please feel free to contact our Directorate of User Services at [703] 767-9066/9068 or DSN 427-9066/9068.

**Do Not Return This Document
To DTIC**

Reproduced by
AIR DOCUMENTS DIVISION



HEADQUARTERS AIR MATERIEL COMMAND

WRIGHT FIELD, DAYTON, OHIO

The
U.S. GOVERNMENT

IS ABSOLVED

FROM ANY LITIGATION WHICH MAY

ENSUE FROM THE CONTRACTORS IN-

FRINGING ON THE FOREIGN PATENT

RIGHTS WHICH MAY BE INVOLVED.

HEADQUARTERS AIR MATERIEL COMMAND

WRIGHT FIELD, DAYTON, OHIO

REEL - C

3 6 6

A.T.I.

9 1 0 6

SUITABLE FOR CONTROLLED DISTRIBUTION

RESTRICTED
REPORT No: AERO. 2151.

*Inc 1 to
710 72667*

BRITISH RESTRICTED
UNITED STATES RESTRICTED




ATI No. **9106**

ROYAL AIRCRAFT ESTABLISHMENT

Farnborough, Hants.

AEROFOIL THEORY OF A FLAT DELTA WING AT SUPERSONIC SPEEDS

by



A. ROBINSON, M.Sc., A.F.R.Ae.S.



ATTENTION IS CALLED TO THE PENALTIES ATTACHING
TO ANY INFRINGEMENT OF THE OFFICIAL SECRETS ACT

THIS DOCUMENT IS THE PROPERTY OF H.M. GOVERNMENT

IT IS INTENDED FOR THE USE OF THE RECIPIENT ONLY, AND FOR COMMUNICATION TO SUCH OFFICERS UNDER
HIM AS MAY REQUIRE TO BE ACQUAINTED WITH THE CONTENTS OF THE REPORT IN THE COURSE OF THEIR
DUTIES. THE OFFICERS EXERCISING THIS POWER OF COMMUNICATION WILL BE HELD RESPONSIBLE THAT SUCH
INFORMATION IS IMPARTED WITH DUE CAUTION AND RESERVE.

ANY PERSON OTHER THAN THE AUTHORISED HOLDER, UPON OBTAINING POSSESSION OF THIS DOCUMENT, BY
FINDING OR OTHERWISE SHOULD FORWARD IT, TOGETHER WITH HIS NAME AND ADDRESS, IN A CLOSED ENVELOPE
TO:-

THE SECRETARY, MINISTRY OF SUPPLY,
THAMES HOUSE, MILBANK, LONDON S.W.1

LETTER POSTAGE NEED NOT BE PREPAID; OTHER POSTAGE WILL BE REFUNDED.

ALL PERSONS ARE HEREBY WARNED THAT THE UNAUTHORISED RETENTION OR DESTRUCTION OF THIS
DOCUMENT IS AN OFFENCE AGAINST THE OFFICIAL SECRETS ACT 1911-1920.

AIR DOCUMENTS DIVISION, T-2
AEC, WRIGHT FIELD
MICROFILM No.
R C-366 F 9106

3 to Report No. **R-702-47**
Military Attache, London.

a.m.c.

RESTRICTED

Class number 533.691.13 : 533.6.011.5

Report No. Aero.2151.

September, 1946.

ROYAL AIRCRAFT ESTABLISHMENT, FARNBOROUGH

Aerofoil theory of a flat Delta wing at
supersonic speeds

- by -

A. Robinson, M.Sc., A.F.R.Ae.S.

Summary

Lift, drag, and pressure distribution of a triangular flat plate moving at a small incidence at supersonic speeds are given for arbitrary Mach number and aspect ratio. The values obtained for lift and drag are compared with the corresponding values obtained by strip theory.¹⁷ The possibility of further applications of the analysis leading up to the above results is indicated.¹⁶

LIST OF CONTENTS

	<u>Page</u>
1. General discussion	2
1.1 Introduction	2
1.2 Notation	2
1.3 Results	3
2. Analysis	5
2.1 Pseudo-orthogonal co-ordinates	5
2.2 Hyperboloido-conal co-ordinates	6
2.3 The triangular aerofoil	9
2.4 Transformation into hyperboloido-conal co-ordinates	10
2.5 The flat Delta wing at incidence	11
2.6 Lift and drag	13

LIST OF APPENDICES

	<u>Appendix</u>
The second differential parameter in a pseudo-orthogonal system	I
Calculation of some partial derivatives	II
Evaluation of a definite integral	III
Calculation of the suction force	IV
Solutions in terms of Lamé functions	V
The position of the centre of pressure	VI

1 General discussion

1.1 Introduction

The pressure distribution on a flat Delta wing (i.e. an isosceles triangular flat plate having its apex pointed against the direction of flow) belongs to one of two different types according to whether the apex semi-angle of the triangle is (i) greater, or (ii) smaller than the given Mach angle. The difference between the two types of flow expresses itself not only in the final result but also in the fact that different methods are best suited for their analytical treatment.

The pressure distribution on a flat Delta wing whose apex semi-angle is larger than the given Mach-angle (Case (i)) was first calculated by Ward (ref.3). It was later obtained as a corollary to some work by the present author (ref.2). The total lift and drag of the aerofoil in that case are also given in ref.2.

The solution of the corresponding problem for a flat Delta wing whose apex semi-angle is smaller than the given Mach angle (Case (ii)) has now been obtained by a method which is a counter part of the treatment of Laplace's equation by systems of orthogonal co-ordinates. Results obtained for this case will be given together with the corresponding results for Case (i) which are taken from the above-mentioned papers. These results - without the analysis leading up to them - have already been issued in a preliminary note (ref.1).

1.2 Notation

- ρ - air density
- V - free stream velocity
- M - Mach number
- μ - Mach angle
- S - surface area of Delta wing
- b - span
- c - maximum chord
- A - aspect ratio
- γ - apex semi-angle
- x - chordwise co-ordinate (measured from the apex against the direction of flow)
- y - spanwise co-ordinate (measured from the centre line)
- α - incidence (in radians)
- $\bar{\Delta}p$ - pressure difference between top and bottom surfaces of the aerofoil
- $c(y)$ - spanwise loading
- C_L - lift coefficient, based on surface area
- C_{Di} - induced drag coefficient based on surface area
- λ - $\cot \mu \cdot \tan \gamma$

1.3 Results

The pressure difference between top and bottom surfaces is given by

$$(1, i) \quad \Delta p = \frac{2\rho V^2 \alpha}{\sqrt{\cot^2 \mu - \cot^2 \gamma}},$$

when $|x| \cot \gamma < |y| \cot \mu$, i.e. outside the Mach cone of the apex,

$$\Delta p = \frac{4\rho V^2 \alpha}{\pi \sqrt{\cot^2 \mu - \cot^2 \gamma}} \tan^{-1} \left(|x| \sqrt{\frac{\cot^2 \mu - \cot^2 \gamma}{x^2 \cot^2 \gamma - y^2 \cot^2 \mu}} \right),$$

when $|x| \cot \gamma > |y| \cot \mu$, i.e. inside the Mach cone of the apex,

and by

$$(1, ii) \quad \Delta p = \frac{2\rho V^2 \alpha \tan^2 \gamma}{E'(\cot \mu \tan \gamma)} \cdot \frac{|x|}{\sqrt{x^2 \tan^2 \gamma - y^2}}$$

in case (ii), i.e. when $\gamma < \mu$.

In these formulae ρ denotes the air density, V the free stream velocity, α the incidence of the Delta wing in radians, and γ its apex semi-angle; μ is the Mach angle, $\cot \mu = \sqrt{M^2 - 1}$ where M is the Mach number, and E' is the elliptic integral defined by

$$E'(m) = \int_0^{\pi/2} \sqrt{1 - (1 - m^2) \sin^2 \phi} \, d\phi. \quad \text{The chordwise co-ordinate } x \text{ is}$$

measured from the apex against the direction of flow, and the spanwise co-ordinate y is measured from the centre-line of the aerofoil.

(The above formulae are still valid if the trailing edge of the aerofoil is deformed in any way such that the Mach cones issuing from the trailing edge do not include any portion of the aerofoil.)

Let c be the maximum chord of the triangular aerofoil and b its span so that the surface area is given by $S = \frac{1}{2}bc$, and the aspect ratio by $\Lambda = \frac{b^2}{S} = \frac{2b}{c} = 4 \tan \gamma$. Then the spanwise lift distribution $\ell(y)$ is given by

$$(2, i) \quad \ell(y) = \frac{2\rho V^2 \alpha (c - |y| \cot \gamma)}{\sqrt{\cot^2 \mu - \cot^2 \gamma}} \quad \text{when } c \cot \gamma < |y| \cot \mu$$

$$\ell(y) = \frac{2\rho V^2 \alpha}{\sqrt{\cot^2 \mu - \cot^2 \gamma}} \left[(c + y \cot \gamma) \tan^{-1} \sqrt{\frac{\cot \mu - \cot \gamma}{\cot \mu + \cot \gamma}} \cdot \frac{c - y \cot \gamma}{c + y \cot \gamma} \right]_{\text{in case (i)}} \\ + (c - y \cot \gamma) \tan^{-1} \sqrt{\frac{\cot \mu - \cot \gamma}{\cot \mu + \cot \gamma}} \cdot \frac{c + y \cot \gamma}{c - y \cot \gamma} \quad \text{when } c \cot \gamma > |y| \cot \mu$$

and by

$$(2, ii) \quad \ell(y) = \frac{2\rho V^2 \alpha}{E'(\cot \gamma \cdot \tan \gamma)} \sqrt{c^2 \tan^2 \gamma - y^2} \quad \text{in case (ii)}$$

The lift coefficient based as usual on surface area is given by

$$(3, i) \quad C_L = 4 \alpha \tan \mu \quad \text{in Case (i), and by}$$

$$C_L = \frac{2 \pi \alpha \tan \gamma}{E'(\cot \mu \cdot \tan \gamma)} \quad \text{in Case (ii) .}$$

The ratio of this coefficient and of the lift coefficient predicted by two-dimensional ("strip") theory is shown in Fig.1. It depends only on the parameter $\lambda = \cot \mu \cdot \tan \gamma$. Fig.2 gives C_L for various apex angles (or aspect ratios) plotted against Mach number. As mentioned in ref.2 C_L is equal to its value by strip-theory if $\gamma > \mu$ (Case (i)).

A simple dimensional argument shows that the centre of pressure coincides with the centroid of the wing ($x_0 = -\frac{2c}{3}$, $y_0 = 0$, see Appendix V).

It will be seen from formula (1.1) that in Case (i), the pressure remains finite at the leading edge, and we may therefore assume that the resultant aerodynamic force is normal to the plate. This implies that the drag associated with the lift equals the product of lift and incidence (in radians). To avoid some of the confusion which has arisen in this connection we shall agree to call the whole of this drag "induced drag". The corresponding coefficient C_{D_1} will again be based on surface area. In Case (ii), formula (1, ii) shows that at least according to linear theory, there will be infinite suction at the leading edge, as in subsonic flow, and of the same order of infinity. This indicates the presence of a longitudinal "suction force" which tends to reduce the induced drag. As a result, the induced drag no longer equals the product of lift and incidence.

As formulae (2, i) and (2, ii) show, the spanwise lift distribution is of elliptic shape as long as $\gamma < \mu$, i.e. in Case (ii) but not in Case (i). The value of C_{D_1} for a given elliptic lift distribution under low speed conditions is known to be

$\frac{C_L^2}{\pi \Lambda}$, so that the value of $\frac{C_{D_1}}{C_L^2 / \pi \Lambda}$ measures the deviation of the high speed regime from the low speed regime, at least for $\gamma < \mu$. This ratio which again depends only on the parameter $\lambda = \cot \mu \tan \gamma$ is plotted against λ in Fig.3, and for various apex angles or aspect ratios against Mach number in Fig.4.

Analytically

$$(4, i) \quad \frac{C_{D_1}}{C_L^2 / \pi \Lambda} = \pi \cot \mu \tan \gamma \quad \text{in Case (i), and}$$

$$(4, ii) \quad \frac{C_{D_1}}{C_L^2 / \pi \Lambda} = 2E'(\cot \mu \tan \gamma) - \tan \gamma \sqrt{\cot^2 \gamma - \cot^2 \mu} \quad \text{in Case (ii).}$$

For a given spanwise lift distribution, the trailing vortex field in regions far behind the aerofoil is the same in supersonic as in subsonic flow (compare ref.7). Accordingly we may subdivide the induced drag into vortex drag, which is associated with the trailing vortex field and is the same for supersonic as for subsonic flow, and induced wave drag, which is peculiar to supersonic flow. The corresponding "vortex drag coefficient" for a Delta wing equals $C_L^2 / \pi \Lambda$ for $\gamma < \mu$. For $\gamma > \mu$ this coefficient increases, for a given lift coefficient, as the spanwise lift distribution curve deviates

from the elliptic shape. Inspection of Fig.3, then shows that even when $Y < \mu$ (Case (ii)) there still is an induced wave drag in addition to the vortex drag. Thus while this case shows some affinity with subsonic conditions, the flow is still not truly subsonic. However, as shown by formulae (3, ii) and (4, ii), as the aspect ratio tends to 0, $C_L \div \frac{\pi k}{2} \alpha$, while $C_{D1} \div \frac{C_L^2}{\pi k}$, both of which are the values given by low speed theory. This is in agreement with an argument due to R.T. Jones (ref.8) which tends to show that for pointed wings of infinitely small aspect ratio lift and drag are given by the above formulae in supersonic as in subsonic flow, and serves as a check on the results obtained here.

2 Analysis

2.1 Pseudo-orthogonal co-ordinates

Let x_1, x_2, x_3 and y_1, y_2, y_3 be two sets of variables interconnected by the relations

$$(1) \quad \begin{aligned} x_j &= f_j(y_1, y_2, y_3) \quad , \quad j = 1, 2, 3 \quad . \\ y_j &= g_j(x_1, x_2, x_3) \quad , \quad j = 1, 2, 3 \quad . \end{aligned}$$

The transformation is supposed to be non-singular in a given region, $|\frac{\partial f_j}{\partial y_k}| \neq 0, |\frac{\partial g_j}{\partial x_k}| \neq 0$.

We have

$$(2) \quad dx_j = \sum_{k=1}^3 \frac{\partial f_j}{\partial y_k} dy_k \quad , \quad j = 1, 2, 3$$

Hence

$$(3) \quad dx_1^2 - dx_2^2 - dx_3^2 = h_1^2 dy_1^2 - h_2^2 dy_2^2 - h_3^2 dy_3^2 \\ + 2h_{12} dy_1 dy_2 + 2h_{13} dy_1 dy_3 + 2h_{23} dy_2 dy_3$$

where

$$(4) \quad \begin{aligned} h_1^2 &= \left(\frac{\partial f_1}{\partial y_1}\right)^2 - \left(\frac{\partial f_2}{\partial y_1}\right)^2 - \left(\frac{\partial f_3}{\partial y_1}\right)^2 \\ h_2^2 &= -\left(\frac{\partial f_1}{\partial y_2}\right)^2 + \left(\frac{\partial f_2}{\partial y_2}\right)^2 + \left(\frac{\partial f_3}{\partial y_2}\right)^2 \\ h_3^2 &= -\left(\frac{\partial f_1}{\partial y_3}\right)^2 + \left(\frac{\partial f_2}{\partial y_3}\right)^2 + \left(\frac{\partial f_3}{\partial y_3}\right)^2 \end{aligned}$$

and

$$h_{jk} = \left(\frac{\partial f_1}{\partial y_j}\right)\left(\frac{\partial f_1}{\partial y_k}\right) - \left(\frac{\partial f_2}{\partial y_j}\right)\left(\frac{\partial f_2}{\partial y_k}\right) - \left(\frac{\partial f_3}{\partial y_j}\right)\left(\frac{\partial f_3}{\partial y_k}\right) \quad j, k = 1, 2, 3, \quad j \neq k.$$

Now assume that the functions h_{jk} vanish identically. In that case

$$(5) \quad dx_1^2 - dx_2^2 - dx_3^2 = h_1^2 dy_1^2 - h_2^2 dy_2^2 - h_3^2 dy_3^2 \quad .$$

If x_1, x_2, x_3 , are rectangular cartesian co-ordinates in three dimensional space, and another set of co-ordinates y_1, y_2, y_3 is given, such that the functions h_{jk} vanish identically, then y_1, y_2, y_3 will be said to be pseudo-orthogonal co-ordinates in the given space. As a simple example of a system of curvilinear pseudo-orthogonal co-ordinates, we may mention the pseudo-orthogonal counterpart of the familiar spherical co-ordinates. It is given by

$$x_1 = y_1 \cosh y_2, \quad x_2 = y_1 \sinh y_2 \cos y_3, \quad x_3 = y_1 \sinh y_2 \sin y_3$$

We shall require an expression for the differential parameter $\frac{\partial^2 \phi}{\partial x_1^2} - \frac{\partial^2 \phi}{\partial x_2^2} - \frac{\partial^2 \phi}{\partial x_3^2}$ in terms of general pseudo-orthogonal co-ordinates, where ϕ is an arbitrary scalar function. It is shown in Appendix I that

$$(6) \quad \frac{\partial^2 \phi}{\partial x_1^2} - \frac{\partial^2 \phi}{\partial x_2^2} - \frac{\partial^2 \phi}{\partial x_3^2} = \frac{1}{h_1 h_2 h_3} \left[\frac{\partial}{\partial y_1} \left(\frac{h_2 h_3}{h_1} \frac{\partial \phi}{\partial y_1} \right) - \frac{\partial}{\partial y_2} \left(\frac{h_1 h_3}{h_2} \frac{\partial \phi}{\partial y_2} \right) - \frac{\partial}{\partial y_3} \left(\frac{h_1 h_2}{h_3} \frac{\partial \phi}{\partial y_3} \right) \right]$$

2.2 Hyperboloido-conal co-ordinates

The solution of problems connected with triangular aerofoils moving at supersonic speeds can be effected by the introduction of a special system of pseudo-orthogonal co-ordinates. Writing x', y', z' and r, μ, ν for x_1, x_2, x_3 , and y_1, y_2, y_3 , respectively, the connection between the rectangular cartesian co-ordinates x', y', z' , and the special system to be introduced, r, μ, ν , will be given by

$$(7) \quad x' = r \frac{\mu \nu}{hk}, \quad y' = r \frac{\sqrt{\mu^2 - h^2} \sqrt{\nu^2 - h^2}}{h \sqrt{k^2 - h^2}}, \quad z' = r \frac{\sqrt{\mu^2 - k^2} \sqrt{k^2 - \nu^2}}{k \sqrt{k^2 - h^2}}$$

where k and h are positive constants, $k > h$. The intervals of variation of r, μ, ν will be taken as

$$0 < r < \infty, \quad k < \mu < \infty, \quad h < \nu < k$$

Eliminating μ and ν from (7) we obtain a family of surfaces with r as parameter,

$$(8) \quad x'^2 - y'^2 - z'^2 = r^2$$

Similarly, eliminating r and ν , and r and μ , respectively, we obtain two more families of surfaces,

$$(9) \quad \frac{x'^2}{\mu^2} - \frac{y'^2}{\mu^2 - h^2} - \frac{z'^2}{\mu^2 - k^2} = 0$$

and

$$(10) \quad \frac{x'^2}{\nu^2} - \frac{y'^2}{\nu^2 - h^2} + \frac{z'^2}{k^2 - \nu^2} = 0$$

(8) represents a family of hyperboloids of two sheets while (9) and (10) are families of cones. This justifies the name "hyperboloido-conal co-ordinates" for the system under consideration. They are the pseudo-orthogonal counterpart of the system of orthogonal co-ordinates known as "sphero-conal co-ordinates" (ref.4).

Equation (7) shows that for the specified interval of variation, the co-ordinates r, μ, ν can only represent points inside the positive half of the cone $x'^2 - y'^2 - z'^2 = 0$ (i.e. $x' > 0, x'^2 - y'^2 - z'^2 > 0$). By solving (7) for r, μ, ν it is found that to every point satisfying $x' > 0, x'^2 - y'^2 - z'^2 > 0$ there corresponds exactly one triplet r, μ, ν inside the domain of variation of these variables. On the other hand, to each triplet r, μ, ν there correspond four points x', y', z' , according to the determination of the square roots in (7). The ambiguity can be avoided by writing μ and ν as elliptic functions of new variables, but this procedure will not be required in the present report.

For $\mu \rightarrow \infty$, the cones of the family (9) tend to approximate the cone $x'^2 - y'^2 - z'^2 = 0$, while for $\mu \rightarrow k$ they tend to become equal to the (two-sided) angular region in the x', y' plane given by $\frac{x'^2}{k^2} - \frac{y'^2}{k^2 - h^2} > 0$. On the other hand, the cones of (10) approximate the complementary angular region in the x', y' plane $\left(\frac{x'^2}{k} - \frac{y'^2}{k^2 - h^2} < 0\right)$ as $\nu \rightarrow k$, and the y -axis ($x' = 0, z' = 0$) as $\nu \rightarrow h$. Thus, the intersections of the μ -cones with the plane $x' = 1$ are ellipses, varying between the circle $y'^2 + z'^2 = 1$ and the slit $z' = 0, y'^2 < 1 - \frac{h^2}{k^2}$. The intersections of the ν -cones with the same plane are hyperbolae (Fig.7).

We shall now calculate the quantities $h_1, h_2, h_3, h_{12}, h_{13}, h_{23}$ defined in para.2.1 above. We have

(11)

$$\begin{aligned} \frac{\partial x'}{\partial r} &= \frac{\mu\nu}{hk} & \frac{\partial x'}{\partial \mu} &= r \frac{\nu}{hk} & \frac{\partial x'}{\partial \nu} &= r \frac{\mu}{hk} \\ \frac{\partial y'}{\partial r} &= \frac{\sqrt{\mu^2 - h^2} \sqrt{\nu^2 - h^2}}{h\sqrt{k^2 - h^2}} & \frac{\partial y'}{\partial \mu} &= r \frac{\mu}{h\sqrt{k^2 - h^2}} \cdot \frac{\sqrt{\nu^2 - h^2}}{\sqrt{\mu^2 - h^2}} & \frac{\partial y'}{\partial \nu} &= r \frac{\nu}{h\sqrt{k^2 - h^2}} \cdot \frac{\sqrt{\mu^2 - h^2}}{\sqrt{\nu^2 - h^2}} \\ \frac{\partial z'}{\partial r} &= \frac{\sqrt{\mu^2 - k^2} \sqrt{k^2 - \nu^2}}{k\sqrt{k^2 - h^2}} & \frac{\partial z'}{\partial \mu} &= r \frac{\mu}{k\sqrt{k^2 - h^2}} \cdot \frac{\sqrt{k^2 - \nu^2}}{\sqrt{\mu^2 - k^2}} & \frac{\partial z'}{\partial \nu} &= -r \frac{\nu}{k\sqrt{k^2 - h^2}} \cdot \frac{\sqrt{\mu^2 - k^2}}{\sqrt{k^2 - \nu^2}} \end{aligned}$$

Hence

(12)/

$$(12) \quad h_1^2 = \left(\frac{\partial x'}{\partial r}\right)^2 - \left(\frac{\partial y'}{\partial r}\right)^2 - \left(\frac{\partial z'}{\partial r}\right)^2 = 1$$

$$h_2^2 = -\left(\frac{\partial x'}{\partial \mu}\right)^2 + \left(\frac{\partial y'}{\partial \mu}\right)^2 + \left(\frac{\partial z'}{\partial \mu}\right)^2 = \frac{r^2 (\mu^2 - \nu^2)}{(\mu^2 - h^2)(\mu^2 - k^2)}$$

$$h_3^2 = -\left(\frac{\partial x'}{\partial \nu}\right)^2 + \left(\frac{\partial y'}{\partial \nu}\right)^2 + \left(\frac{\partial z'}{\partial \nu}\right)^2 = \frac{r^2 (\mu^2 - \nu^2)}{(\nu^2 - h^2)(k^2 - \nu^2)}$$

$$h_{12} = \left(\frac{\partial x'}{\partial r}\right) \left(\frac{\partial x'}{\partial \mu}\right) - \left(\frac{\partial y'}{\partial r}\right) \left(\frac{\partial y'}{\partial \mu}\right) - \left(\frac{\partial z'}{\partial r}\right) \left(\frac{\partial z'}{\partial \mu}\right) = 0$$

$$h_{13} = \left(\frac{\partial x'}{\partial r}\right) \left(\frac{\partial x'}{\partial \nu}\right) - \left(\frac{\partial y'}{\partial r}\right) \left(\frac{\partial y'}{\partial \nu}\right) - \left(\frac{\partial z'}{\partial r}\right) \left(\frac{\partial z'}{\partial \nu}\right) = 0$$

$$h_{23} = \left(\frac{\partial x'}{\partial \mu}\right) \left(\frac{\partial x'}{\partial \nu}\right) - \left(\frac{\partial y'}{\partial \mu}\right) \left(\frac{\partial y'}{\partial \nu}\right) - \left(\frac{\partial z'}{\partial \mu}\right) \left(\frac{\partial z'}{\partial \nu}\right) = 0$$

The last three equations show that the system of co-ordinates r, μ, ν is in fact pseudo-orthogonal, as asserted.

Let Φ be an arbitrary scalar function. Then, by (6),

$$\frac{\partial^2 \Phi}{\partial x'^2} - \frac{\partial^2 \Phi}{\partial y'^2} - \frac{\partial^2 \Phi}{\partial z'^2} = \frac{\sqrt{(\mu^2 - h^2)(\nu^2 - h^2)(\mu^2 - k^2)(k^2 - \nu^2)}}{r^2 (\mu^2 - \nu^2)}$$

$$\left[\frac{\partial}{\partial r} \left(\frac{r^2 (\mu^2 - \nu^2)}{\sqrt{(\mu^2 - h^2)(\nu^2 - h^2)(\mu^2 - k^2)(k^2 - \nu^2)}} \frac{\partial \Phi}{\partial r} \right) - \frac{\partial}{\partial \mu} \left(\frac{\sqrt{(\mu^2 - h^2)(\mu^2 - k^2)}}{(\nu^2 - h^2)(k^2 - \nu^2)} \frac{\partial \Phi}{\partial \mu} \right) \right. \\ \left. - \frac{\partial}{\partial \nu} \left(\frac{\sqrt{(\nu^2 - h^2)(k^2 - \nu^2)}}{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{\partial \Phi}{\partial \nu} \right) \right]$$

Or
(13)

$$\frac{\partial^2 \Phi}{\partial x'^2} - \frac{\partial^2 \Phi}{\partial y'^2} - \frac{\partial^2 \Phi}{\partial z'^2} =$$

$$\frac{1}{r^2} \left[(\mu^2 - \nu^2) \frac{\partial}{\partial r} \left(r^2 \frac{\partial \Phi}{\partial r} \right) - \sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{\partial}{\partial \mu} \left(\sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{\partial \Phi}{\partial \mu} \right) \right. \\ \left. - \sqrt{(\nu^2 - h^2)(k^2 - \nu^2)} \frac{\partial}{\partial \nu} \left(\sqrt{(\nu^2 - h^2)(k^2 - \nu^2)} \frac{\partial \Phi}{\partial \nu} \right) \right]$$

A scalar function Φ which satisfies the equation

$$(14) \quad \frac{\partial^2 \Phi}{\partial x'^2} - \frac{\partial^2 \Phi}{\partial y'^2} - \frac{\partial^2 \Phi}{\partial z'^2} = 0$$

will be called a hyperbolic potential function (or, alternatively, a pseudo-harmonic). Equation (14) is equivalent to

(15)

$$(\mu^2 - v^2) \frac{\partial}{\partial r} \left(r^2 \frac{\partial \Phi}{\partial r} \right) - \sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{\partial}{\partial \mu} \left(\sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{\partial \Phi}{\partial \mu} \right) \\ - \sqrt{(v^2 - h^2)(k^2 - v^2)} \frac{\partial}{\partial v} \left(\sqrt{(v^2 - h^2)(k^2 - v^2)} \frac{\partial \Phi}{\partial v} \right) = 0$$

in hyperboloido-conal co-ordinates.

2.5 The triangular aerofoil

Consider a triangular aerofoil of span b and maximum chord length c in a uniform supersonic airstream (Fig.5). The linearised equation of stationary supersonic flow is (e.g. ref.7)

$$(16) \quad n^2 \frac{\partial^2 \Phi}{\partial x^2} - \frac{\partial^2 \Phi}{\partial y^2} - \frac{\partial^2 \Phi}{\partial z^2} = 0,$$

where $n^2 = M^2 - 1$, $M = \frac{V}{a}$, M being the Mach number, V the free stream velocity, and a the velocity of sound; x is the longitudinal co-ordinate, measured from the apex of the aerofoil against the direction of flow, y the lateral co-ordinate, positive to starboard and negative to port, and z the vertical co-ordinate, positive downward. Φ is the induced velocity potential so that the three velocity components are given by

$$-V + \frac{\partial \Phi}{\partial x}, \quad \frac{\partial \Phi}{\partial y}, \quad \text{and} \quad \frac{\partial \Phi}{\partial z} \quad \text{respectively.}$$

In accordance with the conventions of linearised theory, the incidence of the stream-lines at the aerofoil is estimated at the vertical projection of the aerofoil into the x, y plane, thus

$$(17) \quad s = \frac{1}{V} \left(\frac{\partial \Phi}{\partial z} \right)_{z=0}$$

where s is the slope of the aerofoil at the point in question, on the upper or lower surface, as the case may be.

Φ must be continuous everywhere except possibly across the wake of the aerofoil. In the present analysis we assume that the aerofoil is completely inside the Mach cone issuing from the apex, so that Φ must be a constant, and may be assumed to vanish, outside the cone. In particular, this yields the condition

$$(18) \quad \Phi = 0 \quad \text{for} \quad x^2 - n^2(y^2 + z^2) = 0$$

The assumption that the aerofoil is inside the Mach cone issuing from the apex means, in symbols,

$$(19) \quad n = \cot \mu < \frac{2c}{b} = \cot \gamma$$

where γ is the apex semi-angle of the aerofoil, and μ is the Mach angle.

The longitudinal component of induced velocity is $\frac{\partial \Phi}{\partial x}$, hence, by the linearised Bernoulli equation,

$$(20) \quad p = p_\infty - \rho V \frac{\partial \Phi}{\partial x}$$

where p is the pressure at the point in question, p_∞ the free stream pressure, and ρ the air density. The excess pressure $\bar{\Delta}p$ is therefore given by

$$(21) \quad \bar{\Delta}p = -\rho v \frac{\partial \phi}{\partial x}$$

2.4 Transformation into hyperboloido-conal co-ordinates

Put $x = -nx'$, $y = y'$, $z = z'$. Expressing equation (10) in terms of x' , y' , z' , we then obtain equation (14). The span of the triangle remains unaltered in the transformation, while the chord is magnified in the ratio of 1 : n . The Mach cone $x^2 - n^2(y^2 + z^2) = 0$ is transformed into $x'^2 - y'^2 - z'^2 = 0$.

Next, transform into hyperboloido-conal co-ordinates, as by (7), with $k = \cot \gamma$, $h = \sqrt{\cot^2 \gamma - \cot^2 \mu}$. For these constants, the leading edges of the aerofoil determine the angular region in the x' , y' plane to which the cones of the family (9) approximate as $\mu \rightarrow k$. The triangle itself becomes part of that region.

In order to express the derivatives $\frac{\partial f}{\partial x}$ and $\frac{\partial f}{\partial z}$ of an arbitrary function f in terms of hyperboloido-conal co-ordinates, we first have to calculate the derivatives of r , μ , ν with respect to x' and z' in terms of r , μ , and ν . The calculation of these quantities is simplified by the fact that we are dealing with pseudo-orthogonal co-ordinates (see Appendix II). Using equations (11) and (12) we find

$$(22) \quad \frac{\partial r}{\partial x'} = \frac{\mu\nu}{hk} \quad \frac{\partial \mu}{\partial x'} = -\frac{\nu(\mu^2-h^2)(\mu^2-k^2)}{hkr(\mu^2-\nu^2)}$$

$$\frac{\partial \nu}{\partial x'} = -\frac{\mu(\nu^2-h^2)(k^2-\nu^2)}{hkr(\mu^2-\nu^2)}$$

$$\frac{\partial r}{\partial z'} = -\frac{\sqrt{\mu^2-k^2} \sqrt{k^2-\nu^2}}{k\sqrt{k^2-h^2}} \quad \frac{\partial \mu}{\partial z'} = \frac{\mu(\mu^2-h^2) \sqrt{\mu^2-k^2} \sqrt{k^2-\nu^2}}{k\sqrt{k^2-h^2} r(\mu^2-\nu^2)}$$

$$\frac{\partial \nu}{\partial z'} = -\frac{\nu(\nu^2-h^2) \sqrt{\mu^2-k^2} \sqrt{k^2-\nu^2}}{k\sqrt{k^2-h^2} r(\mu^2-\nu^2)}$$

Hence

$$(23) \quad \frac{\partial f}{\partial x} = \frac{-1}{nhk} \left[\mu\nu \frac{\partial f}{\partial r} - \frac{\nu(\mu^2-h^2)(\mu^2-k^2)}{r(\mu^2-\nu^2)} \cdot \frac{\partial f}{\partial \mu} - \frac{\mu(\nu^2-h^2)(k^2-\nu^2)}{r(\mu^2-\nu^2)} \cdot \frac{\partial f}{\partial \nu} \right]$$

and

$$(24) \quad \frac{\partial f}{\partial z} = \frac{\sqrt{\mu^2-k^2} \sqrt{k^2-\nu^2}}{k\sqrt{k^2-h^2}} \left[-\frac{\partial f}{\partial r} + \frac{\mu(\mu^2-h^2)}{r(\mu^2-\nu^2)} \cdot \frac{\partial f}{\partial \mu} - \frac{\nu(\nu^2-h^2)}{r(\mu^2-\nu^2)} \cdot \frac{\partial f}{\partial \nu} \right]$$

If the induced velocity potential is given as a function of r , μ , and ν , then the excess pressure at any point will be found from (21) and (23). Also, the corresponding shape of the aerofoil will be found from (17) and (24). It is to be noted that the differentiation, as by (24), has to precede the passage to the limit $\mu \rightarrow k$. The induced velocity potential, apart from being continuous except possibly across the wake of the aerofoil also has to satisfy equation (15),

which is the equivalent of equations (14) and (16) in hyperboloidal co-ordinates. Particular solutions of (15) can be obtained by separation of the co-ordinates. This leads to Lamé functions of all kinds and degrees (Appendix V). To each such solution there corresponds a possible aerofoil whose shape can be calculated, as detailed above. It should be observed that as long as we confine our attention to the region ahead of the trailing edge, conditions behind the trailing edge do not affect the results, so that we may modify the boundary conditions there at our convenience.

In the present paper we shall only consider the special function which corresponds to the flow round a triangular flat plate at incidence.

2.5 The flat Delta wing at incidence

Let α be the incidence of the aerofoil; α is supposed to be small, so that $\tan \alpha \doteq \alpha$. Equation (17) then becomes

$$(25) \quad \alpha = \frac{1}{V} \left(\frac{\partial \phi}{\partial z} \right)_{z=0}$$

According to what has been said in para.2.4 we may assume (25) to hold not only at the aerofoil, but also aft of its trailing edge, between the two straight lines through the leading edges. As there is now no definite length involved in the specification of the boundary conditions, it follows from geometrical considerations that the induced velocity potential ϕ must be of the form $r \phi$, where ϕ is a function of μ and ν only. In particular we shall try to find a solution of the form

$$(26) \quad \phi = r \frac{\sqrt{\mu^2 - k^2} \sqrt{k^2 - \nu^2}}{k \sqrt{k^2 - h^2}} g(\mu); \quad z' g(\mu) = z g(\mu)$$

where g is a function of μ yet to be determined. The reason for choosing ϕ in this way is that at the aerofoil $\mu = k$, while $z = 0$, so that $\frac{\partial \phi}{\partial z}$ is constant at the aerofoil, as required. Substituting $\phi = z' g(\mu)$ in (15) we obtain an ordinary differential equation for $g(\mu)$. In performing the substitution it is useful to remember that

$$z' = r \frac{\sqrt{\mu^2 - k^2} \sqrt{k^2 - \nu^2}}{k \sqrt{k^2 - h^2}} \text{ is a solution of (14) and therefore of (15).}$$

We obtain

$$z' \cdot \sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{d}{d\mu} \left(\sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{dg}{d\mu} \right) + 2(\mu^2 - h^2)(\mu^2 - k^2) \frac{\partial z'}{\partial \mu} \cdot \frac{dg}{d\mu} = 0$$

or

$$(27) \quad (\mu^2 - k^2) \frac{d}{d\mu} \left(\sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \cdot \frac{dg}{d\mu} \right) + 2\mu \sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{dg}{d\mu} = 0$$

Hence

$$(\mu^2 - k^2) \sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{dg}{d\mu} = \text{const.} = C$$

and

$$g(\mu) = C \int_{\mu}^{\mu_0} \frac{dt}{(t^2 - k^2) \sqrt{(t^2 - h^2)(t^2 - k^2)}}$$

In order to ensure that $\phi \rightarrow 0$ as $\mu \rightarrow \infty$ for any given r and v , as required by continuity, we have to take $\mu_0 = \infty$. Hence

$$(28) \quad g(\mu) = C \int_{\mu}^{\infty} \frac{dt}{(t^2-k^2)\sqrt{(t^2-h^2)(t^2-k^2)}}$$

and

$$(29) \quad \phi = \frac{C r \sqrt{k^2-v^2}}{k \sqrt{k^2-h^2}} \cdot \sqrt{\mu^2-k^2} \int_{\mu}^{\infty} \frac{dt}{(t^2-k^2)\sqrt{(t^2-h^2)(t^2-k^2)}}$$

At the aerofoil (i.e. for $\mu = k$) we have, $x' = \frac{rv}{h}$, $y' = \frac{r\sqrt{v^2-h^2}}{h}$, $x'^2 - y'^2 = r^2$, and so $r\sqrt{k^2-v^2} = \sqrt{x'^2(k^2-h^2) - y'^2k^2}$. Also, by partial integration

$$\begin{aligned} \lim_{\mu \rightarrow k} \left\{ \sqrt{\mu^2-k^2} \int_{\mu}^{\infty} \frac{dt}{(t^2-k^2)\sqrt{(t^2-h^2)(t^2-k^2)}} \right\} \\ = \lim_{\mu \rightarrow k} \sqrt{\mu^2-k^2} \left\{ \left[-\frac{1}{\sqrt{t^2-k^2} \cdot t \sqrt{t^2-h^2}} \right]_{\mu}^{\infty} + \int_{\mu}^{\infty} \frac{d}{dt} \left(\frac{1}{t \sqrt{t^2-h^2}} \right) \frac{dt}{\sqrt{t^2-k^2}} \right\} \\ = \lim_{\mu \rightarrow k} \frac{\sqrt{\mu^2-k^2}}{\sqrt{\mu^2-k^2} \cdot \mu \sqrt{\mu^2-h^2}} = \frac{1}{k \sqrt{k^2-h^2}} \end{aligned}$$

Hence, at the aerofoil (but not elsewhere in the x, y plane)

$$(30) \quad \phi = C \frac{\sqrt{\frac{k^2-h^2}{n^2} x^2 - k^2 y^2}}{k^2(k^2-h^2)}$$

The value of the constant C can be determined by means of equation (25). We have, using (24)

$$\begin{aligned} \frac{\partial \phi}{\partial z} = \frac{\partial}{\partial z} (zg(\mu)) &= g(\mu) + z \frac{\partial g}{\partial z} \\ &= g(\mu) + \frac{\sqrt{\mu^2-k^2} \sqrt{k^2-v^2}}{k \sqrt{k^2-h^2}} \cdot \frac{\mu(\mu^2-h^2)}{r(\mu^2-v^2)} \cdot \frac{r \sqrt{\mu^2-k^2} \sqrt{k^2-v^2}}{k \sqrt{k^2-h^2}} \cdot \frac{dg}{d\mu} \\ &= C \left[\int_{\mu}^{\infty} \frac{dt}{(t^2-k^2)\sqrt{(t^2-h^2)(t^2-k^2)}} - \frac{\mu}{k^2(k^2-h^2)} \cdot \frac{k^2-v^2}{\mu^2-v^2} \cdot \sqrt{\frac{\mu^2-h^2}{\mu^2-k^2}} \right] \\ &= C \left[\int_{\mu}^{\infty} \frac{dt}{(t^2-k^2)\sqrt{(t^2-h^2)(t^2-k^2)}} - \frac{\mu}{k^2(k^2-h^2)} \cdot \sqrt{\frac{\mu^2-h^2}{\mu^2-k^2}} + \frac{\mu \sqrt{\mu^2-k^2} \sqrt{\mu^2-h^2}}{k^2(k^2-h^2)(\mu^2-v^2)} \right] \end{aligned}$$

As μ tends to k , $\frac{\mu \sqrt{\mu^2-k^2} \sqrt{\mu^2-h^2}}{k^2(k^2-h^2)(\mu^2-v^2)}$ tends to 0, so that $\frac{\partial \phi}{\partial z}$ is in fact independent of v and r at the aerofoil, as required. Also, as before,

$$\int_{\mu}^{\infty} \frac{dt}{(t^2-k^2)\sqrt{(t^2-h^2)(t^2-k^2)}} - \frac{\mu}{k^2(k^2-h^2)} \sqrt{\frac{\mu^2-h^2}{\mu^2-k^2}}$$

$$= \int_{\mu}^{\infty} \frac{d}{dt} \left(\frac{1}{t\sqrt{t^2-h^2}} \right) \frac{dt}{\sqrt{t^2-k^2}} + \frac{1}{\sqrt{\mu^2-k^2} \cdot \mu \sqrt{\mu^2-h^2}} - \frac{\mu}{k^2(k^2-h^2)} \sqrt{\frac{\mu^2-h^2}{\mu^2-k^2}}$$

by partial integration. Now

$$\lim_{\mu \rightarrow k} \left[\frac{1}{\sqrt{\mu^2-k^2} \cdot \mu \sqrt{\mu^2-k^2}} - \frac{\mu}{k^2(k^2-h^2)} \sqrt{\frac{\mu^2-h^2}{\mu^2-k^2}} \right] = \lim_{\mu \rightarrow k} \frac{k^2(k^2-h^2) - \mu^2(\mu^2-h^2)}{k^2(k^2-h^2)\mu\sqrt{\mu^2-h^2}\sqrt{\mu^2-k^2}} = 0$$

Hence, at the aerofoil

$$\frac{\partial \phi}{\partial z} = C \int_k^{\infty} \frac{d}{dt} \left(\frac{1}{t\sqrt{t^2-h^2}} \right) \frac{dt}{\sqrt{t^2-k^2}}$$

where the integral on the right hand side is now convergent. It is shown in Appendix III that the value of this integral is $\frac{-1}{k(k^2-h^2)} E\left(\frac{h}{k}\right)$, where $E(m)$ is the complete elliptic integral of the second kind, $E(m) = \int_0^{\pi/2} \sqrt{1-m^2 \sin^2 \phi} d\phi$. Hence, by (25), $C = -\frac{V\alpha k(k^2-h^2)}{E\left(\frac{h}{k}\right)}$. Equation (30) now becomes

$$\phi = -\frac{V\alpha}{k E\left(\frac{h}{k}\right)} \sqrt{\frac{k^2-h^2}{n^2} x^2 - k^2 y^2}$$

Recalling that $n = \cot \mu$, $k = \cot \gamma$, $h = \sqrt{\cot^2 \gamma - \cot^2 \mu}$, we finally obtain

$$(31) \quad \phi = -\frac{V\alpha}{E'(\cot \mu \cdot \tan \gamma)} \sqrt{x^2 \tan^2 \gamma - y^2}$$

where $E'(m)$ is the complementary complete elliptic integral of the second kind, $E'(m) = \int_0^{\pi/2} \sqrt{1-(1-m^2) \sin^2 \phi} d\phi$. According to our choice of co-ordinates, the sign of the square root is to be taken as positive at the top surface of the aerofoil, and as negative at the bottom surface. The magnitude of the pressure difference between top and bottom surfaces is, by (21), and (31)

$$(32) \quad \bar{\Delta p} = \frac{2\rho V^2 \alpha \tan^2 \gamma}{E'(\cot \mu \cdot \tan \gamma)} \cdot \left| \frac{x}{\sqrt{x^2 \tan^2 \gamma - y^2}} \right|$$

2.6 Lift and drag

The spanwise lift distribution $l(y)$ is obtained by integrating the pressure difference $\bar{\Delta p}$ along the chords of the aerofoil. It will be seen that ϕ vanishes at the leading edge, and so

$$(33) \quad l(y) = \int \bar{\Delta p} dx = 2|\phi(c_0, y)|, \text{ or}$$

$$l(y) = \frac{2\rho V^2 \alpha}{E'(\cot \mu \cdot \tan \gamma)} \sqrt{c^2 \tan^2 \gamma - y^2}$$

The total lift L on the aerofoil is obtained by integrating $l(y)$ along the span, from $-\frac{b}{2} = -c \tan \gamma$ to $\frac{b}{2} = c \tan \gamma$,

$$(34) \quad L = \frac{\pi \rho V^2 a c^2 \tan^2 \gamma}{E'(\cot \mu \cdot \tan \gamma)}$$

The lift coefficient C_L , based on surface area, is given by $C_L = \frac{L}{\frac{1}{2} \rho V^2 S}$, $S = c^2 \tan \gamma$, or

$$(35) \quad C_L = \frac{2 \pi a \tan \gamma}{E'(\cot \mu \cdot \tan \gamma)}$$

The longitudinal component of the pressure integral is given by

$$(36) \quad D_p = L \alpha = \frac{\pi \rho V^2 a^2 c^2 \tan^2 \gamma}{E'(\cot \mu \cdot \tan \gamma)}$$

However, the induced drag D_i (defined as the total drag associated with the lift, para.1.3) will not in general be equal to D_p but will be rather smaller than that quantity. In fact, by Equations (31) and (32), the longitudinal component of induced velocity, and hence the pressure difference, both tend to infinity at the leading edge. As in subsonic flow, (compare ref.5), this indicates the presence of a suction force whose longitudinal component D_s acts in a direction opposite to that of the longitudinal component of the pressure integral, D_p . It follows from the nature of this force that the contribution to it of any particular element of the leading edge depends only on the local conditions (e.g. the local trend to infinity of $\frac{\partial \phi}{\partial x}$) and not on conditions elsewhere in the field.

Let $d\ell$ be an element of the leading edge of the aerofoil, and assume $d\ell$ to be yawed at an angle β , (Fig.6). Let x_0, y_0 be the co-ordinates of the midpoint of $d\ell$, and dy the length of its lateral projection. Assume that on approaching $d\ell$ longitudinally against the direction of flow, $\frac{\partial \phi}{\partial x}$ is given by

$$\frac{\partial \phi}{\partial x} = \frac{\bar{C}}{\sqrt{x_0 - x}} + \dots \dots \dots \text{(finite terms)}$$

on the upper surface. It is then shown in Appendix IV that the longitudinal component $d D_s$ of the suction force contributed by $d\ell$ equals

$$(37) \quad d D_s = \bar{C}^2 \pi \rho \sqrt{\tan^2 \beta - \cot^2 \mu} dy$$

where μ is the Mach angle, as before. The total suction force is then obtained by integrating $d D_s$ across the span of the aerofoil. For the

Delta wing, $\bar{C} = \frac{V a \sqrt{y_0 \tan \gamma}}{\sqrt{2} E'(\cot \mu \cdot \tan \gamma)}$, $\beta = \pm \left(\frac{\pi}{2} \cdot \gamma\right)$.

Hence

$$(38) \quad D_s = \frac{\pi \rho V^2 a^2 c^2 \tan^3 \gamma \sqrt{\cot^2 \gamma - \cot^2 \mu}}{2 [E'(\cot \mu \cdot \tan \gamma)]^2}$$

and

$$(39) D_1 = D_p - D_s = \frac{\pi \rho V^2 \alpha^2 c^2 \tan^2 \gamma}{E'(\cot \mu \cdot \tan \gamma)} - \frac{\pi \rho V^2 \alpha^2 c^2 \tan^3 \gamma \sqrt{\cot^2 \gamma - \cot^2 \mu}}{2 [E'(\cot \mu \cdot \tan \gamma)]^2}$$

Let C_{D_1} be the induced drag coefficient based on surface area,
 $D_1 = C_{D_1} \cdot \frac{1}{2} \rho V^2 S$. Then

$$(40) C_{D_1} = \frac{\pi \alpha^2 \tan \gamma}{[E'(\cot \mu \cdot \tan \gamma)]^2} \left[2 E'(\cot \mu \cdot \tan \gamma) - \tan \gamma \sqrt{\cot^2 \gamma - \cot^2 \mu} \right]$$

and, observing that the aspect ratio A equals $4 \tan \gamma$,

$$(41) \frac{C_{D_1}}{C_L^2 / \pi A} = 2 E'(\cot \mu \cdot \tan \gamma) - \tan \gamma \sqrt{\cot^2 \gamma - \cot^2 \mu}.$$

This completes the justification of the data given in para.1.3 in relation to Delta wings whose apex semi-angle is smaller than the given Mach angle.

REFERENCES

No.	Author	Title, etc.	
1	A. Robinson	Lift and drag of a flat Delta wing at supersonic speeds. R.A.E. Tech. Note No. Aero.1791.	1946
2	A. Robinson	The wave drag of diamond shaped aerofoils at zero incidence. R.A.E. Tech. Note No. Aero.1784.	1946
3	G.N. Ward	The pressure distribution on some flat laminar aerofoils of incidence at supersonic speeds. I. S.R.E./Airflow/30.	1946
4	E.W. Hobson	The theory of spherical and ellipsoidal harmonics, Cambridge.	1931
5	W. Kimmer	Die kreisförmige Tragfläche auf potential-theoretischer Grundlage. Ingenieurarchiv, vol.8.	1937
6	H. Poritsky	Compressible flows obtainable from two-dimensional flows through the addition of a constant normal velocity. Journal of Applied Mechanics, vol.13.	1946
7	H. Schlichting	Tragflügeltheorie bei Überschallgeschwindigkeit. Luftfahrtforschung, vol.13.	1936
8	R.T. Jones	Properties of low-aspect-ratio pointed wings at speeds below and above the speed of sound. N.A.C.A. A.C.R. L5F13.	1946
9	G. Temple	Vorticity transport and the theory of the wake. R.A.E. Report No. S.M.E.3263.	1943

Attached: Drg. Nos. 19316S - 19321S

Distribution:	C.S.(A)	
	D.G.S.R.(A)	
	D.S.R.(A)	
	A.D.A.R.D.(Res.)	Action copy
	A.D.S.R.(Records)	
	D.A.R.D.	
	P.D.T.D.	
	R.T.P./T.I.B.	110 + 1
	F.M. Sub-Committee	40

Appendix I**The second differential parameter in a pseudo-orthogonal system.**

In this appendix we shall use the notation of the tensor calculus, including Einstein's convention. Accordingly, we have to replace x_1, x_2, x_3 and y_1, y_2, y_3 as used in para.2.1 by x^1, x^2, x^3 , and y^1, y^2, y^3 respectively.

Let g_{ij} be the fundamental covariant tensor of the quadratic differential form $(dx^1)^2 - (dx^2)^2 - (dx^3)^2$, i.e.

$$[g_{ij}] = \begin{bmatrix} 1 & 0 & 0 \\ 0 & -1 & 0 \\ 0 & 0 & -1 \end{bmatrix}, \text{ so that } g = |g_{ij}| = 1.$$

If the x^j are rectangular cartesian co-ordinates, and the y^j form a pseudo-orthogonal system, then by (5), the above tensor is given by

$$[\bar{g}_{ij}] = \begin{bmatrix} h_1^2 & 0 & 0 \\ 0 & -h_2^2 & 0 \\ 0 & 0 & -h_3^2 \end{bmatrix}, \bar{g} = |\bar{g}_{ij}| = h_1^2 h_2^2 h_3^2,$$

in the y^j co-ordinates.

The corresponding contravariant tensors are

$$[g^{ij}] = \begin{bmatrix} 1 & 0 & 0 \\ 0 & -1 & 0 \\ 0 & 0 & -1 \end{bmatrix} \quad \text{and} \quad [\bar{g}^{ij}] = \begin{bmatrix} 1/h_1^2 & 0 & 0 \\ 0 & -1/h_2^2 & 0 \\ 0 & 0 & -1/h_3^2 \end{bmatrix}$$

The expression $\frac{1}{\sqrt{g}} \frac{\partial}{\partial x^i} \left(\sqrt{g} g^{ij} \frac{\partial \phi}{\partial x^j} \right)$ is called the second differential parameter of the (arbitrary) scalar functions ϕ . This expression is known to be an absolute scalar, i.e.

$$\frac{1}{\sqrt{g}} \frac{\partial}{\partial x^i} \left(\sqrt{g} g^{ij} \frac{\partial \phi}{\partial x^j} \right) = \frac{1}{\sqrt{\bar{g}}} \frac{\partial}{\partial y^i} \left(\sqrt{\bar{g}} \bar{g}^{ij} \frac{\partial \phi}{\partial y^j} \right).$$

In the particular case here under consideration, this equation becomes

$$\begin{aligned} \frac{\partial^2 \phi}{(\partial x^1)^2} - \frac{\partial^2 \phi}{(\partial x^2)^2} - \frac{\partial^2 \phi}{(\partial x^3)^2} \\ = \frac{1}{h_1 h_2 h_3} \left[\frac{\partial}{\partial y^1} \left(\frac{h_2 h_3}{h_1} \frac{\partial \phi}{\partial y^1} \right) - \frac{\partial}{\partial y^2} \left(\frac{h_1 h_3}{h_2} \frac{\partial \phi}{\partial y^2} \right) - \frac{\partial}{\partial y^3} \left(\frac{h_1 h_2}{h_3} \frac{\partial \phi}{\partial y^3} \right) \right] \end{aligned}$$

which is equivalent to equation (6).

Appendix II

Calculation of some partial derivatives.

Using the notation of para.2.1 we require expressions for $\frac{\partial g_j}{\partial x_k}$, $j = 1, 2, 3$, $k = 1, 2, 3$, in terms of y_1, y_2, y_3 . We have

$$dx_j = \sum_{k=1}^3 a_{jk} dy_k$$

where $a_{jk} = \frac{\partial f_j}{\partial y_k}$. Solving for dy_k ,

$$dy_k = \sum_{j=1}^3 A_{kj} dx_j$$

where $[A_{kj}]$ is the inverse matrix of $[a_{jk}]$, $[A_{kj}] = [a_{jk}]^{-1}$. On the other hand, evidently $A_{kj} = \frac{\partial g_k}{\partial x_j}$.

Now let the x_j be rectangular cartesian co-ordinates, and the y_j any system of pseudo-orthogonal co-ordinates. Using the relations of pseudo-orthogonality we find, by direct (matrix) multiplication that

$$\begin{bmatrix} \frac{\partial f_1}{\partial y_1} / h_1^2 & -\frac{\partial f_2}{\partial y_1} / h_1^2 & -\frac{\partial f_3}{\partial y_1} / h_1^2 \\ -\frac{\partial f_1}{\partial y_2} / h_2^2 & \frac{\partial f_2}{\partial y_2} / h_2^2 & \frac{\partial f_3}{\partial y_2} / h_2^2 \\ -\frac{\partial f_1}{\partial y_3} / h_3^2 & \frac{\partial f_2}{\partial y_3} / h_3^2 & \frac{\partial f_3}{\partial y_3} / h_3^2 \end{bmatrix} \cdot \begin{bmatrix} \frac{\partial f_1}{\partial y_1} & \frac{\partial f_1}{\partial y_2} & \frac{\partial f_1}{\partial y_3} \\ \frac{\partial f_2}{\partial y_1} & \frac{\partial f_2}{\partial y_2} & \frac{\partial f_2}{\partial y_3} \\ \frac{\partial f_3}{\partial y_1} & \frac{\partial f_3}{\partial y_2} & \frac{\partial f_3}{\partial y_3} \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

The second of the above matrices is identical with $[a_{jk}]$ so that the first must be $[A_{kj}]$. Hence

$$\begin{aligned} \frac{\partial g_1}{\partial x_1} &= \frac{\partial f_1}{\partial y_1} / h_1^2 & \frac{\partial g_1}{\partial x_2} &= -\frac{\partial f_2}{\partial y_1} / h_1^2 & \frac{\partial g_1}{\partial x_3} &= -\frac{\partial f_3}{\partial y_1} / h_1^2 \\ \frac{\partial g_2}{\partial x_1} &= -\frac{\partial f_1}{\partial y_2} / h_2^2 & \frac{\partial g_2}{\partial x_2} &= \frac{\partial f_2}{\partial y_2} / h_2^2 & \frac{\partial g_2}{\partial x_3} &= \frac{\partial f_3}{\partial y_2} / h_2^2 \\ \frac{\partial g_3}{\partial x_1} &= -\frac{\partial f_1}{\partial y_3} / h_3^2 & \frac{\partial g_3}{\partial x_2} &= \frac{\partial f_2}{\partial y_3} / h_3^2 & \frac{\partial g_3}{\partial x_3} &= \frac{\partial f_3}{\partial y_3} / h_3^2 \end{aligned}$$

These are the required expressions.

Appendix IIIEvaluation of a definite integral.

The integral to be evaluated is

$$J = \int_k^{\infty} \frac{d}{dt} \left(\frac{1}{t\sqrt{t^2-h^2}} \right) \frac{dt}{\sqrt{t^2-k^2}}$$

$$= - \int_k^{\infty} \left[\frac{1}{t^2\sqrt{t^2-h^2}} + \frac{1}{(t^2-h^2)\sqrt{t^2-h^2}} \right] \frac{dt}{\sqrt{t^2-k^2}} = -J_1 - J_2, \text{ say,}$$

where $J_1 = \int_k^{\infty} \frac{dt}{t^2\sqrt{(t^2-h^2)(t^2-k^2)}}$ and $J_2 = \int_k^{\infty} \frac{dt}{(t^2-h^2)\sqrt{(t^2-h^2)(t^2-k^2)}}$

Put $t = \frac{k}{\text{sn } u}$ the elliptic function sn u being taken with modulus

$m = \frac{h}{k}$. Then

$$t^2 - h^2 = t^2 \left(1 - \left(\frac{h}{k} \cdot \frac{k}{t} \right)^2 \right) = \left(\frac{k}{\text{sn } u} \right)^2 \text{dn}^2 u = k^2 \text{ds}^2 u$$

$$t^2 - k^2 = t^2 \left(1 - \left(\frac{k}{t} \right)^2 \right) = \left(\frac{k}{\text{sn } u} \right)^2 \text{cn}^2 u = k^2 \text{cs}^2 u$$

$$dt = - \frac{k \text{cn } u \text{ dn } u \text{ du}}{\text{sn}^2 u} = -k \text{cs } u \text{ ds } u \text{ du}$$

Hence

$$J_1 = \int_0^K \frac{\text{sn}^2 u \text{ du}}{k^3}, \quad J_2 = \int_0^K \frac{\text{sd}^2 u \text{ du}}{k^3},$$

where K is the quarter-period, (the complete elliptic integral of the first kind) $K = \int_0^{\pi/2} \frac{d\phi}{\sqrt{1-m^2 \sin^2 \phi}}$. Integrating, we obtain

$$J_1 = \frac{1}{k^3 m^2} \left[u - \int \text{dn}^2 u \text{ dy} \right]_0^K = \frac{1}{k^3 m^2} [K - E] = \frac{1}{kh^2} [K - E],$$

where E is the complete elliptic integral of the second kind,

$$E = \int_0^{\pi/2} \sqrt{1-m^2 \sin^2 \phi} \text{ d}\phi. \text{ Similarly}$$

$$J_2 = \left[\frac{1}{kh^2} \cdot \frac{1}{1-m^2} \int \text{dn}^2 u \text{ du} - \frac{1}{k^3(1-m^2)} \text{sn } u \text{ cd } u - \frac{u}{kh^2} \right]_0^K = \frac{1}{kh^2} \left[\frac{E}{1-m^2} - K \right]$$

Hence

$$J = -J_1 - J_2 = \frac{1}{kh^2} \left(E - \frac{E}{1-m^2} \right) = - \frac{m^2}{kh^2(1-m^2)} E = \frac{-1}{k(k^2-h^2)} E(m)$$

Appendix IV

Calculation of the suction force.

As in para.2.6, let $d\ell$ be an element of the leading edge of the aerofoil, yawed at an angle β . Let x_0, y_0 be the co-ordinates of the midpoint of $d\ell$, and dy the length of its lateral projection. As the suction force depends only on local conditions, we may modify the boundary conditions elsewhere at pleasure. Accordingly, we may assume that $d\ell$ forms part of an infinite straight leading edge (Fig.6). It is therefore sufficient for our purposes to calculate the suction force at the leading edge of a yawed infinite flat plate. The type of flow is again assumed to be such that

$$\frac{\partial \Phi}{\partial x} = \frac{\bar{C}}{\sqrt{x_0 - x}} + \dots \dots \dots \text{(finite terms)}$$

The free stream velocity is $-V$.

According to a now well-established argument (e.g. ref.6) the flow round an infinite aerofoil yawed at an angle β to the free stream direction is the resultant of (i) a uniform field of flow parallel to the leading edge at a velocity $-V \sin \beta$ and (ii) a two dimensional field of flow at a free stream velocity $-V \cos \beta$ in planes normal to the leading edge. Field (i) does not affect the dynamic reactions at the aerofoil, so that we may confine our attention to Field (ii). Since Field (ii) can produce no reactions in a direction parallel to the leading edge, it follows that

$$(42) \quad d D_s = \cos \beta \, d D'_s$$

where $d D'_s$ is the suction force produced by $d\ell$ against the direction of the free stream of Field (ii).

Let x', y', z' be a new system of co-ordinates, obtained by turning the x, y, z system round the z -axis through an angle β , i.e.

$$\begin{aligned} x' &= x \cos \beta - y \sin \beta \\ y' &= x \sin \beta + y \cos \beta \\ z' &= z \end{aligned}$$

The linearised equation for the velocity potential is

$$\cot^2 \mu \frac{\partial^2 \Phi}{\partial x^2} - \frac{\partial^2 \Phi}{\partial y^2} - \frac{\partial^2 \Phi}{\partial z^2} = 0$$

For the primed co-ordinates, this equation is carried into

$$\begin{aligned} (\cot^2 \mu \cos^2 \beta - \sin^2 \beta) \frac{\partial^2 \Phi}{\partial x'^2} + (\cot^2 \mu \sin^2 \beta - \cos^2 \beta) \frac{\partial^2 \Phi}{\partial y'^2} \\ + 2(\cot^2 \mu - 1) \cos \beta \sin \beta \frac{\partial^2 \Phi}{\partial x' \partial y'} - \frac{\partial^2 \Phi}{\partial z'^2} = 0 \end{aligned}$$

Now in Field (ii) both the total velocity potential, and the induced velocity potential satisfy $\frac{\partial \Phi}{\partial y'} = 0$ so that the above equation becomes

becomes

$$(43) \quad q^2 \frac{\partial^2 \phi}{\partial x'^2} + \frac{\partial^2 \phi}{\partial z'^2} = 0$$

where

$$q^2 = \sin^2 \beta - \cot^2 \mu \cos^2 \beta$$

(43) is in fact the linearised compressible flow equation corresponding to the component free stream velocity in the direction of the x' -axis (Mach number $\tilde{M} = \sqrt{1 - q^2} = M \cos \beta$).

It was assumed above that the total velocity in longitudinal direction is of the form

$$\frac{\bar{c}}{\sqrt{x_0 - x}} + \dots \dots \dots \text{(finite - i.e. bounded-terms)}$$

This is the resultant of the longitudinal component of Field (i), which is bounded, and of Field (ii). Hence the component velocity of Field (ii) in the direction of the x' -axis is of the form

$$\frac{\bar{c}}{\cos \beta \sqrt{x_0 - x}} + \dots \dots \dots \text{(bounded terms)}$$

or

$$\frac{\tilde{c}}{\sqrt{x'_0 - x'}} + \dots \dots \dots \text{(bounded terms)}$$

where x'_0 is the x' -co-ordinate of the midpoint of d^l (see Fig.6)

and $\tilde{c} = \frac{\bar{c}}{\sqrt{\cos \beta}}$.

Again, it follows from the character of the suction force as depending only on a local singularity, that the suction force per unit length in the direction of the x' -axis (σ , say), depends only on ρ , \tilde{c} , and the parameter q (representing the Mach number $\tilde{M} = M \cos \beta$). To calculate it, we consider the special case of an infinite flat plate of constant chord width \tilde{c} at an incidence $\tilde{\alpha}$ in a uniform stream of velocity \tilde{V} , the corresponding Mach-number being $\tilde{M} < 1$. It is known that - by linearised theory - the longitudinal induced velocity at the plate is given by $v = \frac{\tilde{\alpha}}{q} \tilde{V} \sqrt{\frac{\tilde{c} + x'}{x'}}$, where the leading edge of the plate is at $x' = 0$, and its trailing edge at $x' = -\tilde{c}$. Hence, in the notation used above, $\tilde{c} = \frac{\tilde{\alpha}}{q} \tilde{V} \sqrt{\tilde{c}}$. Also, the total pressure per unit length of the span is given by $\tilde{L} = \pi \rho \tilde{c} \tilde{V}^2 \frac{\tilde{\alpha}}{q}$. Now the pressure acts in a direction normal to the surface so that there is a backward component of magnitude $\tilde{L} \tilde{\alpha} = \pi \rho \tilde{c} \tilde{V}^2 \frac{\tilde{\alpha}^2}{q} = \pi q \rho \tilde{c}^2$ per unit length. As there can be no resultant drag in two-dimensional potential flow (see ref.9, for compressible fluid flow), it follows that the suction force exactly balances the above backward component, or

$$(44) \quad \sigma = \pi q \rho \tilde{c}^2$$

For $q = 1$, this formula was first given by Grammel (compare ref.5).

It follows from the character of the suction force that (44) holds not only for the case for which it has been established, but also for

any other case with equal q, ρ, \bar{C} . In the particular circumstances in which we are interested $\bar{C} = \frac{C}{\cos\beta}$, $q = \sin^2\beta - \cot^2\mu \cos^2\beta$, and so

$$(45) \quad \sigma = \pi\rho \bar{C}^2 \sqrt{\tan^2\beta - \cot^2\mu} .$$

This is the result stated in para.2.6.

Appendix VSolutions in terms of Lamé functions.

The differential equation of a pseudo-harmonic in hyperboloidal co-ordinates is (compare para. 2.2, equation (15)),

$$(\mu^2 - \nu^2) \frac{\partial}{\partial r} \left(r^2 \frac{\partial \Phi}{\partial r} \right) - \sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{\partial}{\partial \mu} \left(\sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{\partial \Phi}{\partial \mu} \right) - \sqrt{(\nu^2 - h^2)(k^2 - \nu^2)} \frac{\partial}{\partial \nu} \left(\sqrt{(\nu^2 - h^2)(k^2 - \nu^2)} \frac{\partial \Phi}{\partial \nu} \right) = 0$$

We try to find solutions of the form $\Phi = r^n \Psi$, where Ψ is a function of μ and ν only. On substitution in the above equation we have

$$(46) \quad n(n+1)(\mu^2 - \nu^2) \Psi - \sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{\partial}{\partial \mu} \left(\sqrt{(\mu^2 - h^2)(\mu^2 - k^2)} \frac{\partial \Psi}{\partial \mu} \right) - \sqrt{(\nu^2 - h^2)(k^2 - \nu^2)} \frac{\partial}{\partial \nu} \left(\sqrt{(\nu^2 - h^2)(k^2 - \nu^2)} \frac{\partial \Psi}{\partial \nu} \right) = 0$$

Next, we assume Ψ to be of the form $\Psi = G(\mu) H(\nu)$. The differential equation (46) now becomes

$$H(\nu) \left[n(n+1)\mu^2 G(\mu) - 2\mu(2\mu^2 - h^2 - k^2) \frac{dG}{d\mu} - (\mu^2 - h^2)(\mu^2 - k^2) \frac{d^2 G}{d\mu^2} \right] - G(\mu) \left[n(n+1)\nu^2 H(\nu) - 2\nu(2\nu^2 - h^2 - k^2) \frac{dH}{d\nu} - (\nu^2 - h^2)(\nu^2 - k^2) \frac{d^2 H}{d\nu^2} \right] = 0$$

In order that this equation should be satisfied it is required that

$$\begin{aligned} \frac{1}{G(\mu)} \left[n(n+1)\mu^2 G(\mu) - 2\mu(2\mu^2 - h^2 - k^2) \frac{dG}{d\mu} - (\mu^2 - h^2)(\mu^2 - k^2) \frac{d^2 G}{d\mu^2} \right] \\ = \frac{1}{H(\nu)} \left[n(n+1)\nu^2 H(\nu) - 2\nu(2\nu^2 - h^2 - k^2) \frac{dH}{d\nu} - (\nu^2 - h^2)(\nu^2 - k^2) \frac{d^2 H}{d\nu^2} \right] \\ = \text{const.} = p(h^2 + k^2), \text{ say,} \end{aligned}$$

where p is an arbitrary constant. It follows that $G(\mu)$ has to satisfy the differential equation

$$(47) \quad \left[n(n+1)\mu^2 - p(h^2 + k^2) \right] G(\mu) - 2\mu(2\mu^2 - h^2 - k^2) \frac{dG}{d\mu} - (\mu^2 - h^2)(\mu^2 - k^2) \frac{d^2 G}{d\mu^2} = 0$$

with an exactly similar equation for $H(\nu)$.

Equation (47) is Lamé's equation (compare ref. 7). For given n , p can be determined in $(2n + 1)$ different ways, so that $G(\mu)$ is of one of the following four forms

$$K(\mu) = (a_0 \mu^n + a_1 \mu^{n-2} + \dots)$$

$$L(\mu) = \sqrt{|\mu^2 - h^2|} (a_0 \mu^{n+1} + a_1 \mu^{n-3} + \dots)$$

$$M(\mu) = \sqrt{|\mu^2 - k^2|} (a_0 \mu^{n-1} + a_1 \mu^{n-3} + \dots)$$

$$N(\mu) = \sqrt{|\mu^2 - h^2|} \sqrt{|\mu^2 - k^2|} (a_0 \mu^{n-2} + a_1 \mu^{n-4} + \dots)$$

where the expressions $a_0 \mu^n + a_1 \mu^{n-2}$, $a_0 \mu^{n-1} + a_1 \mu^{n-3}$, $a_0 \mu^{n-1} + a_1 \mu^{n-3} + \dots$, $a_0 \mu^{n-2} + a_1 \mu^{n-4} + \dots$, are all polynomials in μ .

Thus, for $n = 0$, the only solution of the above mentioned type is (except for a constant factor)

$$E_0^1(\mu) = 1$$

For $n = 1$, there are three independent solutions,

$$E_1^1(\mu) = \mu, \quad E_1^2(\mu) = \sqrt{|\mu^2 - k^2|}, \quad E_1^3(\mu) = \sqrt{|\mu^2 - k^2|}$$

Assume that $E_n^m(\mu)$ has already been determined for given n and for an appropriate p . Then a second solution of Lamé's equation is given by

$$F_n^m(\mu) = E_n^m(\mu) \int_{\mu}^{\infty} \frac{dt}{\left[E_n^m(t)^2 \sqrt{|(t^2 - h^2)(t^2 - k^2)|} \right]}$$

Thus

$$F_0^1(\mu) = \int_{\mu}^{\infty} \frac{dt}{\sqrt{(t^2 - h^2)(t^2 - k^2)}}$$

$$F_1^1(\mu) = \mu \int_{\mu}^{\infty} \frac{dt}{t^2 \sqrt{(t^2 - h^2)(t^2 - k^2)}}$$

$$F_1^2(\mu) = \sqrt{\mu^2 - h^2} \int_{\mu}^{\infty} \frac{dt}{(t^2 - h^2)^{3/2} \sqrt{t^2 - k^2}}$$

$$F_1^3(\mu) = \sqrt{\mu^2 - k^2} \int_{\mu}^{\infty} \frac{dt}{\sqrt{t^2 - h^2} (t^2 - k^2)^{3/2}}$$

From the above particular solutions of Lamé's equation we then obtain "normal" pseudo-harmonics of the form $r^n G(\mu) H(\nu)$. For instance,

$$\Phi = \frac{C}{K \sqrt{k^2 - h^2}} r F_1^3(\mu) E_1^3(\nu)$$

is the solution used in the body of the report.

Appendix VIThe position of the centre of pressure.

The spanwise position of the centre of pressure is $y_0 = 0$, for reasons of symmetry. In order to find the chordwise (longitudinal) position of the centre of pressure, let $\lambda(x)$ be the pressure integral over the span of the aerofoil for given x , $0 > x > -c$. Then the longitudinal position of the centre of pressure is given by


$$x_0 = \frac{\int_0^{-c} x \lambda(x) dx}{\int_0^{-c} \lambda(x) dx}$$

Now $\lambda(x)$ is independent of the magnitude of the wing chord, c (compare para.2.5). By dimensional analysis it therefore must be of the form $\lambda(x) = f(\alpha) \rho V^2 x$, where $f(\alpha)$ is a function of the incidence α only. Substituting this value of $\lambda(x)$ in the above integral, we obtain

$$x_0 = \frac{\int_0^{-c} f(\alpha) \rho V^2 x^2 dx}{\int_0^{-c} f(\alpha) \rho V^2 x dx} = \frac{\int_0^{-c} x^2 dx}{\int_0^{-c} x dx} = -\frac{2c}{3}$$


This is the result stated in para.1.3.

FIG. 1.

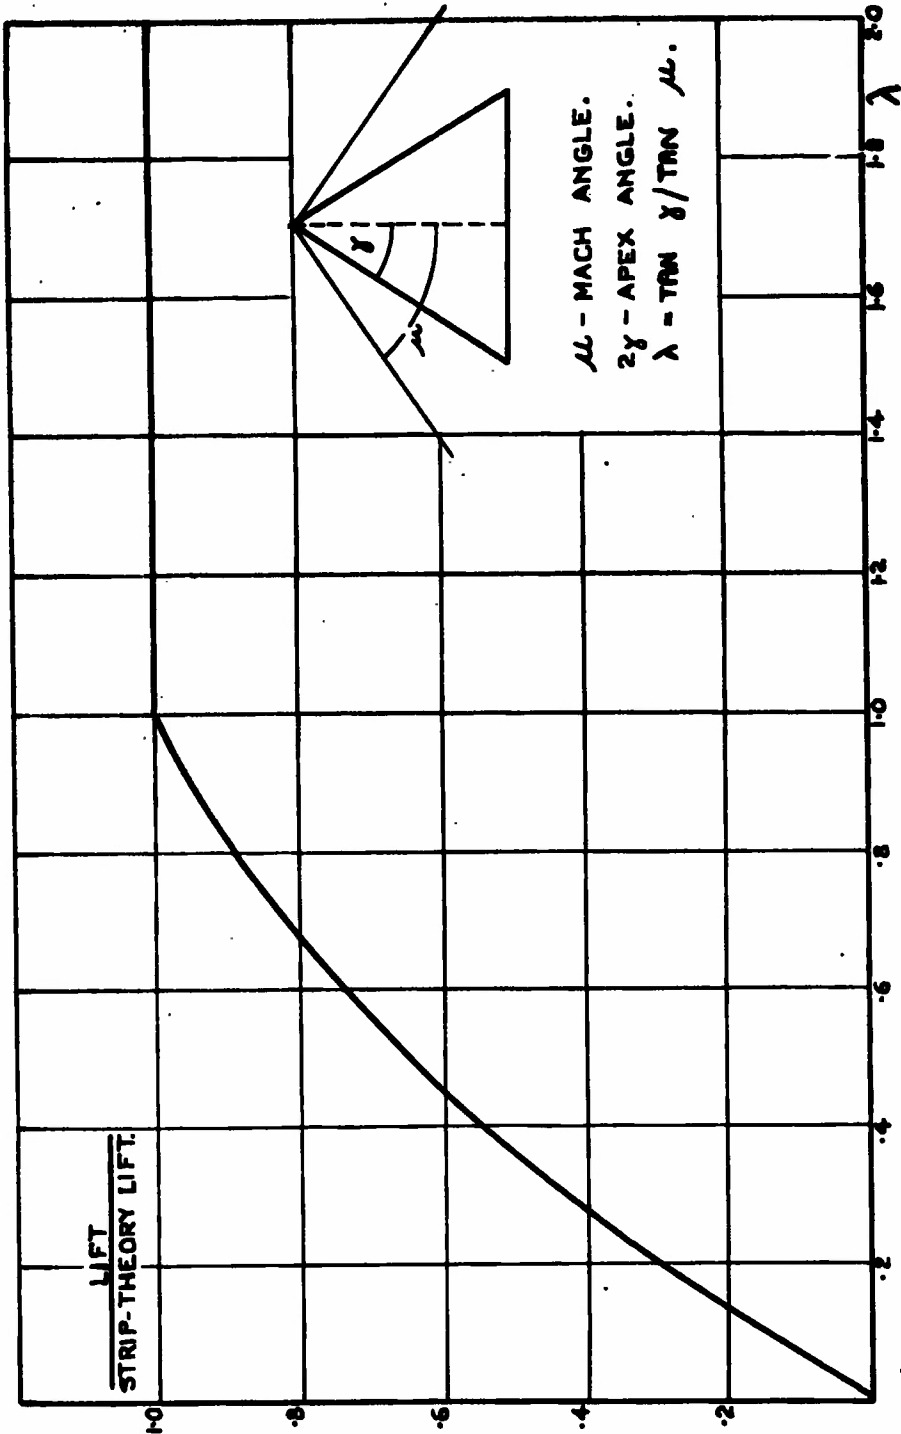


LIFT OF A FLAT DELTA WING.

261

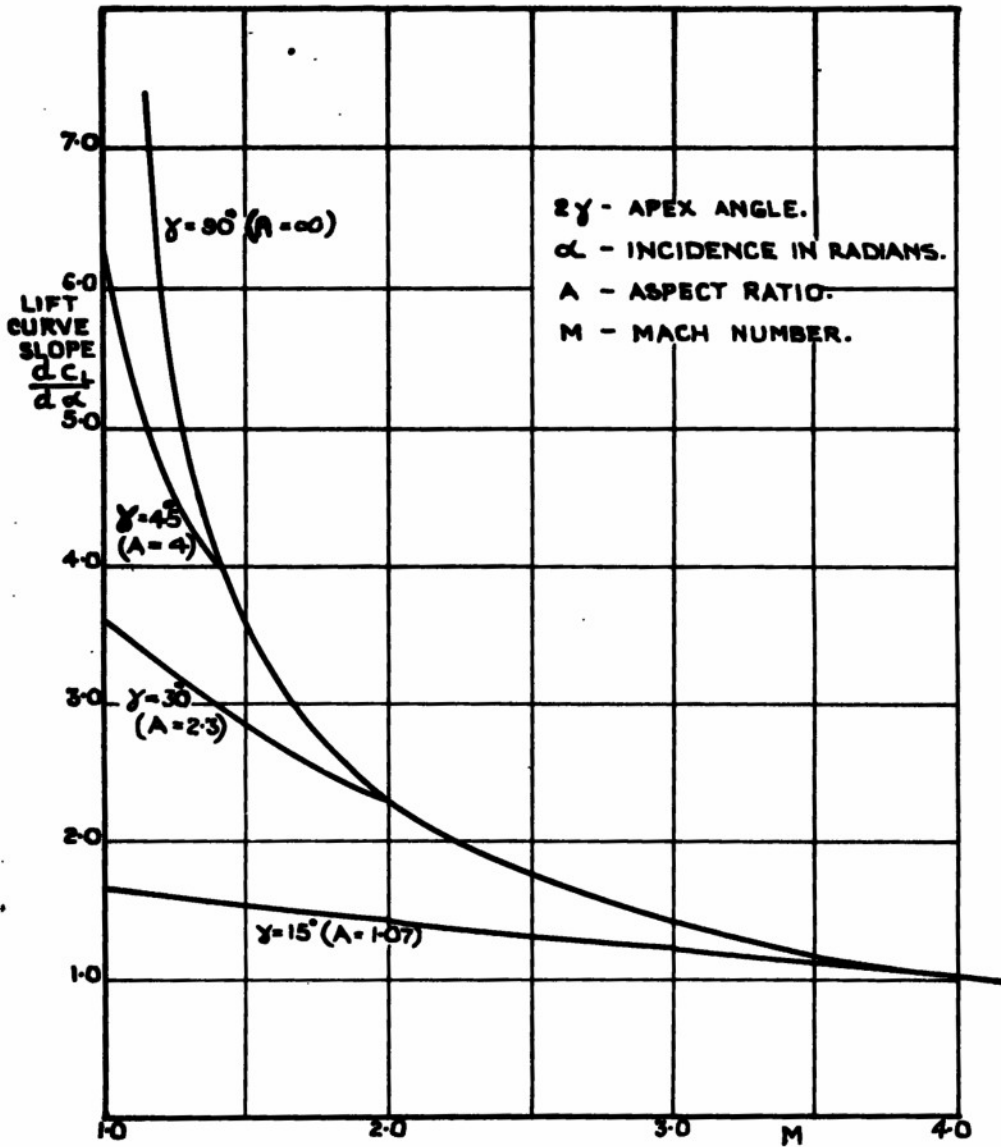


VARIATION OF THE LIFT COEFFICIENT OF
A DELTA WING WITH MACH NUMBER
FOR VARIOUS APEX ANGLES.

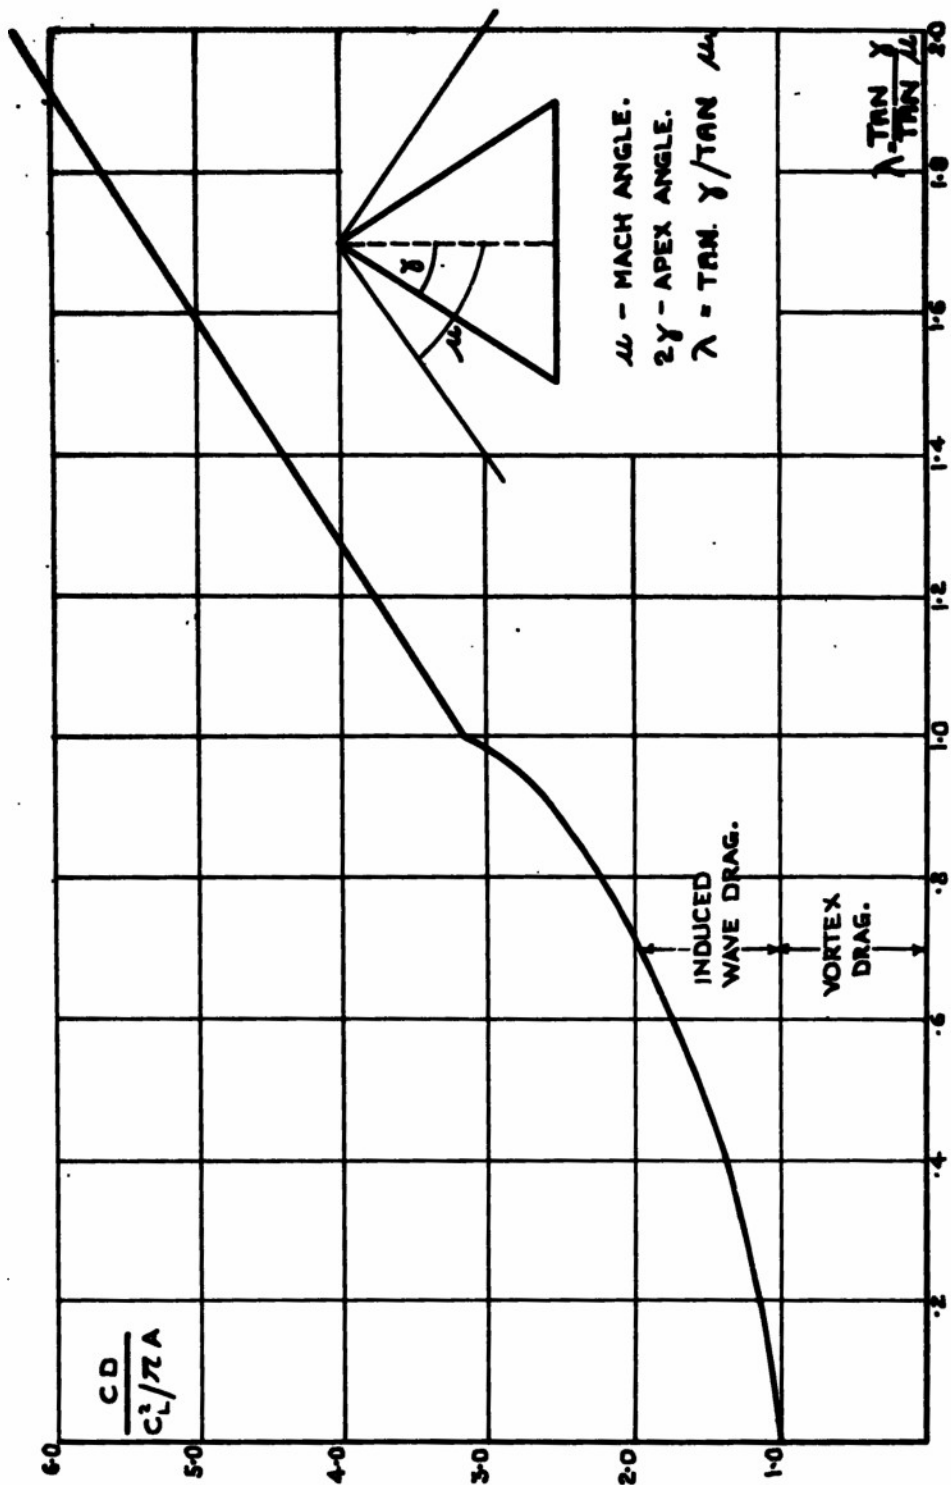

INDUCED DRAG OF A FLAT DELTA WING.

28-

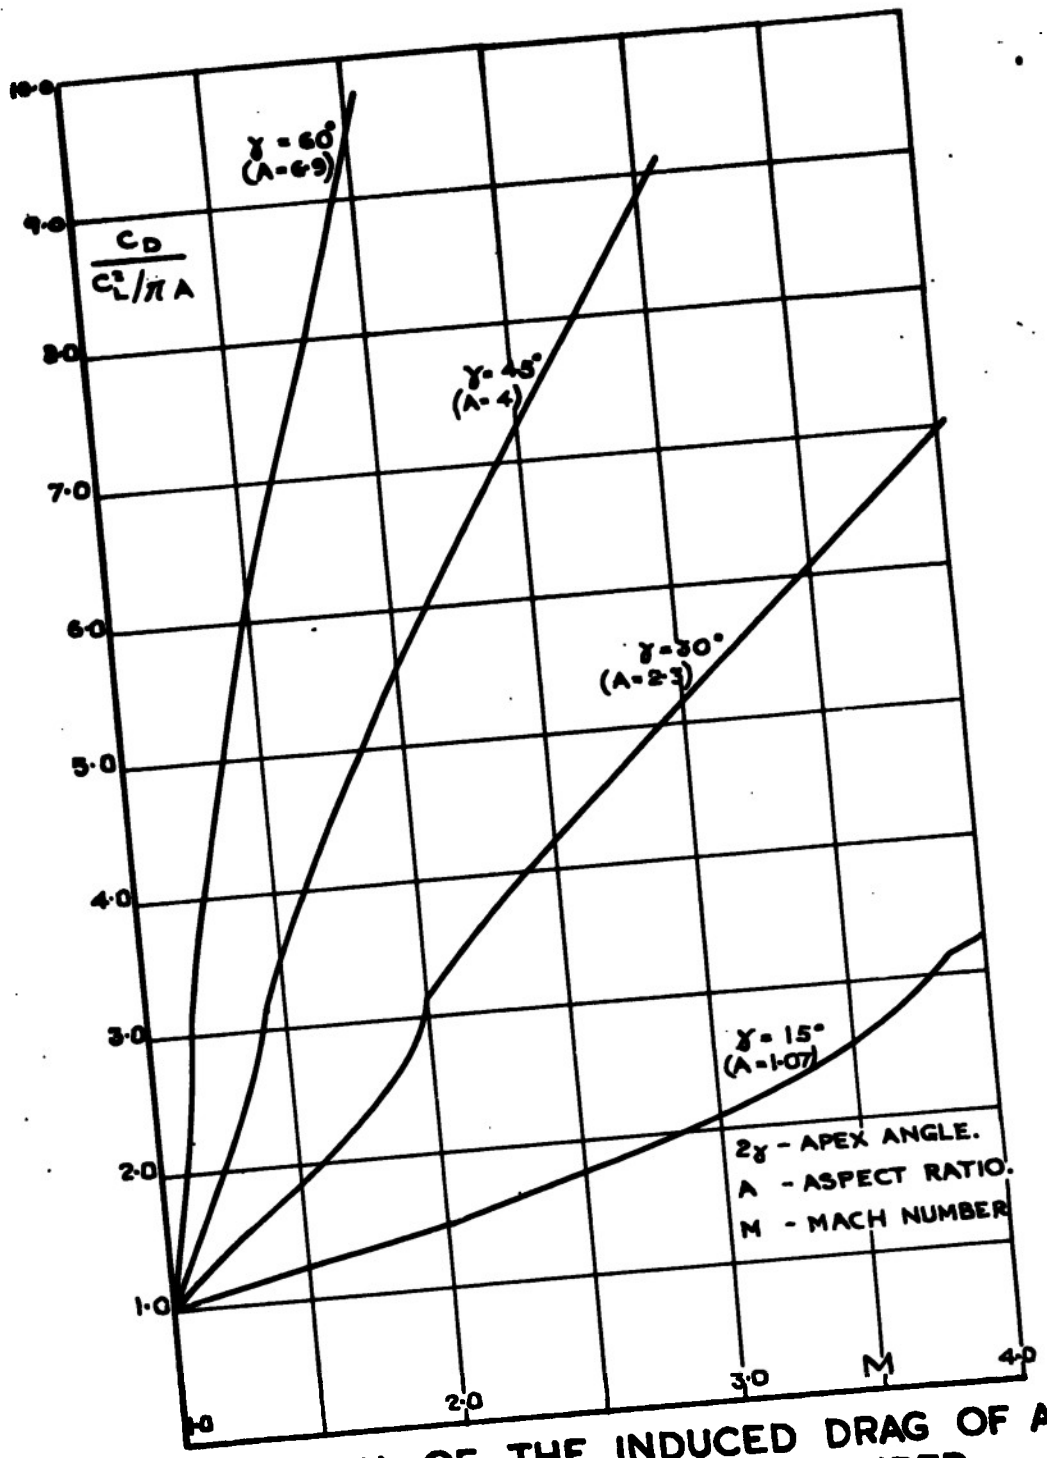

VARIATION OF THE INDUCED DRAG OF A DELTA WING WITH MACH NUMBER FOR VARIOUS APEX ANGLES.

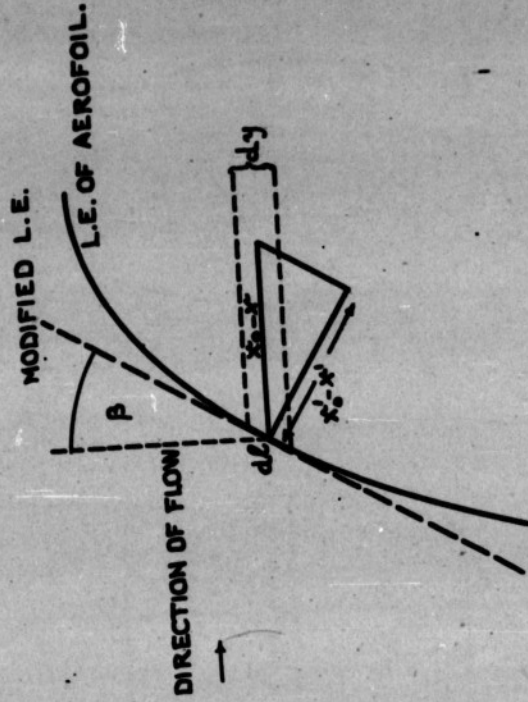


FIG. 6.


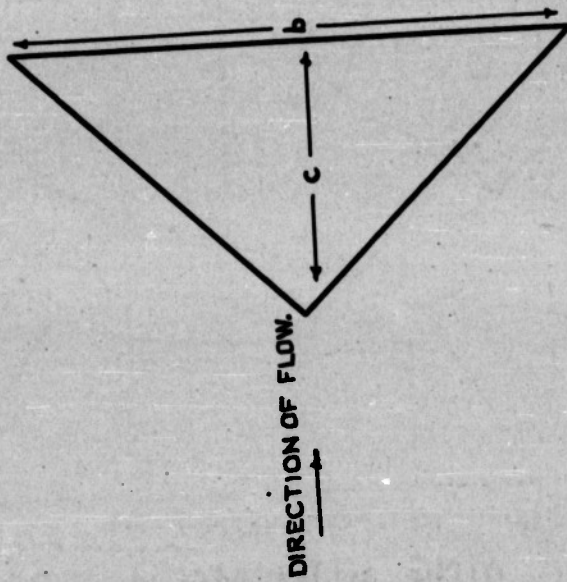


FIG. 5.

FOR VENTURE APPEX

30-

FAMILIES μ : CONST. (ELLIPSES) AND ν : CONST. (HYPERBOLAE) IN A PLANE $x = \text{CONST.}$

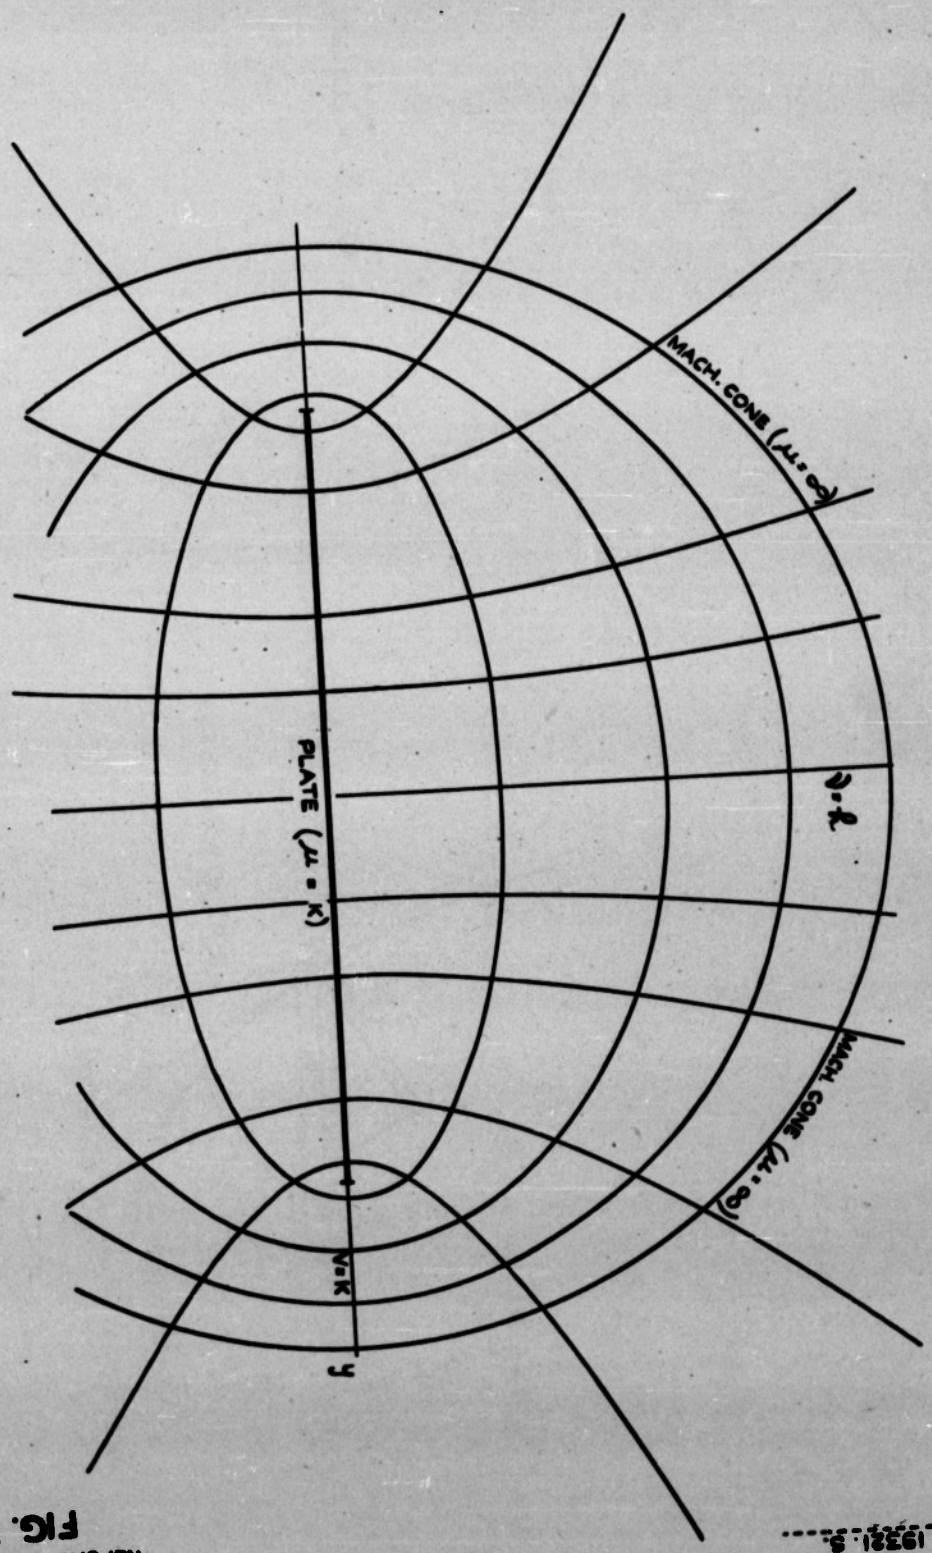

REPORT AERO 2151. FIG. 7.

REEL - C

3 6 6

A.T.I.

9 1 0 6

RESTRICTED

TITLE: Aerofoll Theory of a Flat Delta Wing at Supersonic Speeds

ATI- 9108

AUTHOR(S): Robinson, A.

CLASSIFICATION

(None)

ORIGINATING AGENCY: Royal Aircraft Establishment, Farnborough, Hants

ORIG. AGENCY NO.

Aero-2151

PUBLISHED BY: (Same)

PUBLISHING AGENCY NO.

(Same)

DATE	DOC. CLASS.	COUNTRY	LANGUAGE	PAGES	ILLUSTRATIONS
Sept '46	Restr.	Gt. Brit.	Eng.	31	diags, graphs

ABSTRACT:

Lift, drag, and pressure distribution of a flat Delta wing moving at small incidence at supersonic speeds are given for arbitrary Mach number and aspect ratio. The lift and drag values obtained are compared with corresponding strip theory values. The possibility of further applications of the analysis leading up to the above results is indicated. The calculations are a counterpart of the treatment of Laplace's equation by systems of orthogonal coordinates.

DISTRIBUTION: Copies of this report obtainable from Air Documents Division; Attn: MCIDXD

DIVISION: Aerodynamics (2)
SECTION: Wings and Airfoils (6)

SUBJECT HEADINGS: Wings, Delta - Aerodynamics (99252.8);
Pressure distribution - Wings (74500)

ATI SHEET NO.: R-2-6-112

Air Documents Division, Intelligence Department
Air Historical Command

AIR TECHNICAL INDEX
RESTRICTED

Wright-Patterson Air Force Base
Dayton, Ohio

~~SECRET~~
TITLE: Aerofoll Theory of a Flat Delta Wing at Supersonic Speeds

C

ATI-9106

REVISION
(None)

ORIG. AGENCY NO.
Aero-2151

PUBLISHING AGENCY NO.
(Same)

AUTHOR(S): Robinson, A.

ORIGINATING AGENCY: Royal Aircraft Establishment, Farnborough, Hants

PUBLISHED BY: (Same)

DATE
Sept '48

DOC. CLASS.
Restr.

COUNTRY
Gt. Brit.

LANGUAGE
Eng.

PAGES
31

ILLUSTRATIONS
diags, graphs

ABSTRACT:

Lift, drag, and pressure distribution of a flat Delta wing moving at small incidence at supersonic speeds are given for arbitrary Mach number and aspect ratio. The lift and drag values obtained are compared with corresponding strip theory values. The possibility of further applications of the analysis leading up to the above results is indicated. The calculations are a counterpart of the treatment of Laplace's equation by systems of orthogonal coordinates.

DISTRIBUTION: Copies of this report obtainable from Air Documents Division; Attn: MCIDXD

DIVISION: Aerodynamics (2)
SECTION: Wings and Airfoils (6)

SUBJECT HEADINGS: Wings, Delta - Aerodynamics (99252.8);
Pressure distribution - Wings (74500)

ATI SHEET NO.: R-2-6-112

Air Documents Division, Intelligence Department
Air Materiel Command

AIR TECHNICAL INDEX

Wright-Patterson Air Force Base
Dayton, Ohio

SCP-1. AUTH: DOD DIR 5200.10, 29 June 51

C

EO 10501 dd 5 NOV 1953



*Information Centre
Language Services*
[dstl] *Technical Information
Services*
Basing
St Leonards
2200-6218
Tel: 01980-61933
Fax: 01980-61970

Defense Technical Information Center (DTIC)
8725 John J. Kingman Road, Suit 0944
Fort Belvoir, VA 22060-6218
U.S.A.

AD#: ADA800699

Date of Search: 15 Oct 2009

Record Summary: AVIA 6/9974

Title: Aerofoil theory of a flat delta wing at supersonic speeds
Availability Open Document, Open Description, Normal Closure before FOI Act: 30 years
Former reference (Department): 2151
Held by The National Archives, Kew

This document is now available at the National Archives, Kew, Surrey, United Kingdom.

DTIC has checked the National Archives Catalogue website (<http://www.nationalarchives.gov.uk>) and found the document is available and releasable to the public.

Access to UK public records is governed by statute, namely the Public Records Act, 1958, and the Public Records Act, 1967.

The document has been released under the 30 year rule.

(The vast majority of records selected for permanent preservation are made available to the public when they are 30 years old. This is commonly referred to as the 30 year rule and was established by the Public Records Act of 1967).

This document may be treated as UNLIMITED.