

1947
NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS C.2

WARTIME REPORT

ORIGINALLY ISSUED
April 1945 as
Memorandum Report L5D09a

FLIGHT TESTS OF THE SIKORSKY HNS-1 (ARMY YR-4B) HELICOPTER

II - HOVERING AND VERTICAL-FLIGHT PERFORMANCE WITH THE

ORIGINAL AND AN ALTERNATE SET OF MAIN-ROTOR BLADES,

INCLUDING A COMPARISON WITH HOVERING

PERFORMANCE THEORY

By F. B. Gustafson and Alfred Gessow

Langley Memorial Aeronautical Laboratory
Langley Field, Va.

NACA

WASHINGTON

NACA WARTIME REPORTS are reprints of papers originally issued to provide rapid distribution of advance research results to an authorized group requiring them for the war effort. They were previously held under a security status but are now unclassified. Some of these reports were not technically edited. All have been reproduced without change in order to expedite general distribution.

MR No. L5D09a

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

MEMORANDUM REPORT

for the

Bureau of Aeronautics, Navy Department

and the

Army Air Forces, Air Technical Service Command

FLIGHT TESTS OF THE SIKORSKY HNS-1 (ARMY YR-4B) HELICOPTER

II - HOVERING AND VERTICAL-FLIGHT PERFORMANCE WITH THE

ORIGINAL AND AN ALTERNATE SET OF MAIN-ROTOR BLADES,

INCLUDING A COMPARISON WITH HOVERING

PERFORMANCE THEORY

By F. B. Gustafson and Alfred Gessow

SUMMARY

The results of hovering and vertical-flight performance tests conducted on an HNS-1 (Army YR-4B) helicopter are presented. Hovering data were obtained in the ground-effect region and at altitude with the original set of main-rotor blades. An alternate set of blades, provided for the tests by the Army Air Forces, was then tested in the hovering condition at altitude to determine whether significant differences in performance could be obtained by use of blades of different aerodynamic design and surface condition. The increased performance resulting from the use of the alternate set of blades enabled the determination of rotor efficiency in vertical climb.

Comparison of the hovering data obtained at altitude for the alternate set of blades with the corresponding data for the original set indicates an increase of more than 300 pounds in thrust available for hovering.

Data taken over a range of rotor speeds with the original blades showed that, as predicted by theory and by full-scale tunnel tests, appreciable power can be

saved by use of lower tip speeds. A saving of 10 horsepower, which corresponds to an increase in thrust available of about 130 pounds, was obtained by reducing the rpm from 2260 ($C_T = 0.0037$) to 1910 ($C_T = 0.0052$).

Good agreement was shown between the hovering results at altitude and existing theoretical performance-prediction methods. Values of thrust as high as 82 percent of the thrust calculated for an ideal rotor (that is, a rotor with zero profile-drag loss and uniform induced velocity) have been measured.

The power data obtained in the ground-effect region indicate that the most noticeable increase of power required with altitude occurs at the smallest ground clearances and that the effect becomes less marked with increasing altitude until little power change is felt above 30 feet. Preliminary data obtained at approximately 25 feet altitude indicate that the variation of power with speed between hovering and 10 miles per hour is probably not more than 2 to 3 percent.

Comparison of rotor shaft power in vertical climbs (at rates up to 650 feet per minute) with shaft power required in hovering shows that the increase in power actually required for climb is approximately half the rate of change of potential energy of the aircraft, indicating a corresponding increase in lifting efficiency in climb. Conversely, a similar comparison for rates of descent up to 450 feet per minute shows that the decrease in shaft power required is roughly half the rate of change of potential energy, indicating a corresponding decrease in lifting efficiency.

INTRODUCTION

As part of a general program of helicopter research requested by the Bureau of Aeronautics and the Air Technical Service Command, flight tests are being conducted at the LMAL with a Sikorsky HNS-1 (Army YR-4B) helicopter. The data thus obtained are being used to check existing performance theory and wind-tunnel measurements on powered lifting rotors and are being published as a series of reports covering the performance of the helicopter in various flight conditions. Level-flight performance is covered in Part I of the series.

The present report, Part II, deals with the vertical-flight performance including hovering in the ground-effect region and at altitude, and climb and descent conditions.

Following tests with the original main-rotor blades, an alternate set was tested in the hovering condition at altitude to determine whether significant changes in performance could be obtained with a rotor of different aerodynamic design and surface condition. This set, which was supplied by the Army Air Forces, was chosen from a group of five different sets of rotors because both theoretical considerations and full-scale tunnel tests indicated that it would yield the best performance in the conditions under which the tests were conducted. The results of these tests are compared with the data obtained for the original HNS-1 rotor and both sets of data are reduced to a nondimensional form and compared with the predictions of reference 1. In addition, the improved performance of the alternate rotor enabled vertical climb tests to be made so that rotor efficiency could be established in this condition as well as in hovering and vertical descent.

SYMBOLS

W	gross weight of helicopter, pounds
Ω	angular velocity of main-rotor blades, radians per second
R	radius of main-rotor blades, measured from axis of rotation to tip of blades, feet
v_c	rate of climb, feet per minute
V	true airspeed of helicopter
C_T	thrust coefficient $\left(\frac{W}{\rho(\Omega R)^2 \pi R^2} \right)$
C_P	power coefficient $\left(\frac{\text{main-rotor shaft power}/\Omega R}{\rho(\Omega R)^2 \pi R^2} \right)$

C_{P_c} power coefficient measured in climb

C_{P_o} power coefficient which would be required to hover at the thrust coefficient occurring at a given rate of climb

$C_{P.P.E.}$ that part of the power coefficient in climb represented by the rate of change of potential energy of the helicopter equal to

$$\frac{W(v_c)}{\rho(\Omega R)^2 \pi R^2 (\Omega R)}$$

σ solidity, $bc_e/\pi R$,

$$\text{where } c_e = \text{equivalent chord} = \frac{\int_0^R cr^2 dr}{\int_0^R r^2 dr}$$

and c = actual blade chord at a distance r from the axis of rotation

a slope of lift coefficient against section angle of attack (radian measure), assumed equal to 5.75 in this report

h altitude of helicopter referenced to a horizontal plane intersecting the main rotor at the blade $3/4$ radius, feet

V_{h6} wind speed measured at altitude of 6 feet (h_6), miles per hour

V_h wind speed at altitude as calculated from the relation

$$V_h = V_{h6} \left(\frac{h}{h_6} \right)^{1/5}, \text{ miles per hour}$$

ρ mass density of air, slugs per foot³

ρ_o mass density of air at sea level under standard conditions (0.002378 slug per foot³)

APPARATUS

Description of aircraft.- The dimensions and other details of the HNS-1 helicopter are given in Part I (reference 2). The plan form of the original and alternate main-rotor blades are shown in figure 1. In connection with the present series of tests, the following additional information is given:

Height of plane of main-rotor flapping hinges above ground (tires undeflected and shock struts extended), ft 9.0

	Original (HNS-1 production)	Alternate (twisted plywood)
--	-----------------------------------	-----------------------------------

Main rotor characteristics:

Radius, ft	19	19
Blade twist, deg (linear) . .	None	-8.5
Solidity, $bc_e/\pi R$	0.060	0.042
Blade area (total, three blades), sq ft	65.4	46.3
Blade section	NACA 0012	NACA 23015 (mod.)
Moment of inertia of blade about flapping axis, lb-ft-sec ² .	146	163
Blade weight (one blade), lb	53	59

The original HNS-1 main-rotor blades used in the flight tests were the production model YR-4B fabric-covered blades as described in reference 3. The forward 35 percent of the chord was contoured by spruce fairing strips and the trailing edge was formed by wire cable. The fabric surface was not aerodynamically smooth because of the waves formed by the failure of the dope finish to entirely fill the hollows formed by the fabric weave. Also, the comparatively widely spaced ribs which formed the blade contour permitted surface distortion under load. (See reference 4.) The blades were wiped clean before each flight, but no attempt was made to alter the contour or to improve the original surface condition. When necessary, however, the blade leading edge was touched up with dope to offset the effects of abrasion.

The alternate set of main-rotor blades were plywood-covered and were constructed with an 8° twist, the pitch decreasing linearly from root to tip. A brass abrasion strip extended for a length of 100 inches inboard from the tip. The blades were waxed prior to the first flight. Much of the blade surface was aerodynamically smooth, but at the extreme leading edge and various local areas pitting or grain was noticed. Inspection of the blade contour revealed flat spots and other lack of fairness at numerous points. Also, between the leading-edge strip and the plywood covering, there was a U-shape furrow approximately $1/64$ to $1/32$ inch wide and deep. In spite of the application of filler to the most pronounced discontinuities the contour of the blades as tested did not represent a true airfoil section. Chordwise slits caused by small trim tabs located at the outboard end of the blades near their trailing edges were sealed with scotch tape before flight.

Instrumentation and methods.- Part or all of the following quantities were measured during the hovering, climb, and descent tests:

- Airspeed
- Rotor rpm
- Engine manifold pressure
- Main-rotor shaft torque
- Tail-rotor shaft torque
- Free-air temperature
- Intake-air temperature
- Free-air static pressure
- Main-rotor pitch
- Tail-rotor pitch

The methods by which the above quantities were obtained are fully described in reference 2. A special procedure, however, was adopted to measure altitude and airspeed during the ground-effect tests. The altitude of the helicopter was obtained by means of 35-millimeter movie-camera observations of the difference in height of the craft while on the ground and in the air. Its ground speed was determined from a calibration of camera speed together with camera records showing the position of the helicopter referenced to fixed ground objects. Wind speed and direction at a height of 6 feet were periodically measured throughout the flight at two anemometer stations placed several hundred feet on either side of the flight path. The airspeed of the helicopter was

then obtained by a vector addition of ground and wind speeds. Yaw angles were calculated as the difference between the air-flow direction as given by this vector addition and the helicopter flight-path direction.

RESULTS

Ground-effect data.- A summary of the data obtained with the original HNS-I main-rotor blades in the ground-effect region is presented in table I. The effect of rpm on the power required for sustentation at various altitudes in the ground-effect region is shown in figure 2. A hovering point obtained at approximately 400 feet altitude and a point representing an average of data obtained in the ground-effect region in a later flight are included for comparison. The wind speeds shown on the figure start at the average measured value of 5.5 miles per hour (determined at 6 feet) and vary as the $1/5$ power of the altitude. This assumed variation of wind speed with altitude is an average of values suggested by several sources and is very similar to data presented in reference 5 as typical of velocity gradients above airports. The airspeeds given in table I were also obtained by use of this assumed gradient. Figure 3 indicates the effect of speed on power required at low altitudes in the near hovering condition.

In figures 2 and 3, the altitude of the helicopter is referenced to a horizontal plane in the rotor, intersecting the blades at their $3/4$ radius. The coning angles used in determining the reference plane were calculated by means of equations listed in reference 6.

Hovering at altitude.- Hovering data obtained at altitude with each set of main-rotor blades are presented in table II and are shown in terms of thrust and torque coefficients in figures 4 and 5. In the calculation of thrust coefficients, no allowance was made for the download on the fuselage; an estimate of the magnitude of this download indicated that it was of the order of 1 percent. Hovering data for the original rotor at 25 feet altitude, obtained from the faired curves of figure 2(a), are also shown in figure 4. The hovering performance of the two sets of rotors is then compared in figure 6.

Theoretical performance curves, as computed from Technical Note No. 626 (reference 1) for constant-chord blades, are plotted on the figures for purposes of comparison. The curve of ideal rotor performance, as represented by uniform induced velocity and zero profile-drag loss, was calculated on the basis of an ideal figure of merit equal to unity, that is,

$$M = 0.707 \frac{C_T^{3/2}}{C_Q} = 1$$

The performance curves for the nontwisted or "constant-incidence" blades are based on the semiempirical performance-prediction curves of figure 15 of reference 1. The performance of the ideally twisted or "constant pitch" rotor blade has been computed from the theoretical relations given by equations 13 and 16 in reference 1. The profile-drag terms used in equation 16 are based on the same profile-drag curve as that used for the constant-incidence case. The equation of this curve is

$$c_{d_o} = 0.01 + 0.3a^2$$

where a is the section angle of attack, referenced to the zero lift line and expressed in radians. At the thrust coefficients covered in these tests the use of this drag curve is approximately equivalent to the use of a mean drag coefficient of 0.012 in the calculations for solidity 0.06 (original blades) and 0.014 for solidity 0.042 (alternate blades).

Vertical climbs and descents.— Data obtained in vertical descent are listed in table II, and data obtained from continuous records in vertical climb are plotted in figure 7. The climb and descent data for the alternate rotor blades, plotted in coefficient form, are given in figure 8. The power coefficient C_{P_o} was calculated from the power required to hover at the thrust coefficient at which the rate of climb occurred. This hovering power was obtained from the measured values plotted in figure 5. The coefficient $C_{P.P.E.}$ represents the power corresponding to the rate of change of potential energy of the aircraft in the climb or descent condition, calculated

from the known gross weight and the measured rates of climb as follows:

$$C_{P.P.E.} = \frac{W(v_c)}{\rho (\Omega R)^2 \pi R^2 (\Omega R)}$$

Thus the curve labeled $\frac{C_{P_0} + C_{P.P.E.}}{C_{P_0}}$ represents the climb power required at various rates of climb that would be expected if there were no change in the induced or profile power losses due to the climb velocity, while the curve C_{P_c}/C_{P_0} indicates the actual climb power required.

DISCUSSION

Ground-effect data.- The effect of rpm on the power required for sustentation is clearly indicated by figure 2. A reduction in power required of approximately 9 horsepower in main-rotor power (fig. 2(a)) and 10 to 11 horsepower in total shaft power (fig. 2(b)) is shown for operation at 1910 rpm. Over the range of heights covered, the magnitude of the saving does not appear to be influenced by the amount of ground effect present. Theory and tunnel tests on full-scale rotors (reference 3) show these same trends over a wider rpm range.

It is evident that greater take-off thrusts would be obtained if the engine-rotor gear ratio were changed to permit operation at lower tip speeds while still drawing rated engine power. Theoretical considerations indicate, however, that if such low tip speeds were used in forward flight, tip stall and the associated instability and loss of power would result when operating at or near top speed; this view is confirmed by the pilot's observations that the aircraft became uncontrollable at rpm's below 1900 in level flight at full throttle and that control was already difficult at 1900 rpm. (See "Discussion," Part I.) Since the present top speed for 1900 rpm is quite low, the indication is that, if optimum or near-optimum hovering performance is desired without sacrifice in top speed, a gearshift will be necessary.

Theoretical treatments of ground effect in hovering in still air (reference 7) indicate changes in power required with altitude similar in character to those shown on figure 2. Although the presence of an indeterminate wind gradient in the tests preclude detailed comparison with theory, it is evident that under practical conditions the rotor height does have a critical effect on the power required to lift the aircraft from the ground and that most of this effect has been lost when an altitude of approximately 30 feet has been reached.

Figure 3 was included to provide some basis for estimating the effect of the outer limits of speed present during the measurements of figure 2. It indicates that approximately half of the power difference shown in figures 2(a) and 2(b) at 50 feet altitude as compared with 400 feet altitude is accounted for by the difference in the airspeed present in the tests at the two altitudes. The data of figure 3, which were obtained at heights of approximately 20 and 30 feet, also involve the estimation of the wind gradient; the average measured wind velocity at 6 feet was 6 miles per hour. Because the data do not extend quite to zero airspeed and because of the scatter shown by the test points, they should be viewed as preliminary. This figure is nevertheless felt to afford the best available indication of the effect of low airspeeds on power required under the conditions represented.

Hovering at altitude.— Inspection of figure 4 indicates that, at normal take-off power and rpm (full throttle, 2250 rpm, $C_Q^{2/3} \approx 0.0043$), the original blades will produce 72 percent of the thrust that would be generated by an ideal rotor (that is, one with zero profile-drag loss and with uniform induced velocity). The figure also shows that available performance theory for blades of constant chord and blade angle provides predictions in reasonable agreement with the experimental data. A comparison of the drag curve used in the theoretical treatment with experimental data obtained by two-dimensional tunnel tests on a practical-construction Sikorsky YR-4A specimen (reference 4) subjected to various internal pressures indicated that the actual profile-drag values for the original blade were probably somewhat higher than those assumed, but measurements of blade internal pressure in flight are needed before detailed conclusions can be drawn in this regard.

In a similar manner, the data shown in figure 5 reveals that the alternate rotor yielded 82 percent of the thrust produced by an ideal rotor and that reasonable agreement with theory is obtained. However, inasmuch as no wind-tunnel profile-drag data are available for practical-construction blade specimens of construction corresponding to that of the alternate blades, no detailed or precise comparison with theory can be made.

The curves for ideal blade twist (twist theoretically needed for uniform induced velocity) shown in figures 4 and 5 may be used to estimate the possible magnitude of the effects of the taper and twist present in the blades tested. The gap between these curves and the curves representing constant blade-angle performance represents the maximum savings in induced power that could be obtained by twist or taper.

The comparison of performance of the original and the alternate set of rotor blades afforded by figure 6 shows that, at normal take-off rpm and full throttle (2250 rpm, $C_Q^{2/3} \approx 0.0043$), the alternate rotor could produce 330 pounds more thrust than the original rotor. In attempting to judge the source of this difference in performance, the effects of the following factors must be weighed: (a) solidity; (b) twist; (c) plan form; (d) airfoil section, including both thickness and camber; (e) blade surface roughness, accuracy of contour, and surface deformation in flight; and (f) Reynolds number.

It is not possible to evaluate the individual effects of each of these variables on rotor performance from test data now available. However, it is believed that items (a), (b), and (e) are most important in the present case and that the following qualitative statements would be helpful in interpreting the test results:

(a) A study of figures 4 and 5 reveals that approximately one-half of the performance difference may be accounted for by the lower solidity of the alternate rotor. Although combinations of high solidities and low tip speeds are, in general, expected to be most efficient in the hovering condition, a reduction in solidity is advantageous when the tip speed is fixed and the blade sections are operating at an angle of attack below the optimum. Thus in the present case, the 0.042 solidity rotor operated at mean blade angles of

attack closer to the optimum than did the 0.060 solidity rotor with a consequent saving in profile-drag power.

(b) The alternate rotor would be expected to operate at a lower induced loss than the original rotor because of the incorporation of some twist in the alternate set of blades. Examination of the problem suggests, however, that in this connection other combinations of twist and plan form might be made to produce still better results.

(e) The blade surface condition affects the total rotor losses to a significant degree. This fact has been shown theoretically in figure 3 of reference 8, and demonstrated experimentally in reference 3. The plywood-covered set of rotor blades would therefore be expected to require less power because of their smoother and more rigid surface.

These considerations indicate that still better hovering performance can be achieved through further refinement in aerodynamic design and further improvement in surface condition. In connection with refinement of aerodynamic design it is believed that an extension of the theory of NACA Technical Note No. 626 (reference 1) to include the effects on hovering performance of various combinations of taper and twist would be desirable.

Vertical climbs and descents.- Vertical velocities are expected to result in pronounced changes in the power required to produce lift as contrasted with that required for the same purpose in hovering. An inspection of figure 8 reveals that over the range of climb velocities covered (from 0 to 650 feet per minute) a saving in power equal to 45 percent of the power corresponding to the rate of change of potential energy of the helicopter is realized because of changes in induced and profile power. From the small amount of data obtained in the descent condition, it appears that the percentage of the potential energy power that is not recovered varies from approximately 70 percent at small rates of descent (<200 feet per minute) to approximately 50 percent at 450 feet per minute. These power changes obtained in the climb and descent conditions are approximately equal to the changes in induced power loss predicted by simple momentum theory.

Figure 8 also indicates that interpolation of the climb and descent data predicts measured hovering power within the neighborhood of 1 percent. Thus, the extrapolation of vertical-descent data to zero descent velocity appears to offer promise as a method of predicting the power required to hover for an overloaded helicopter or one operating in rarified atmosphere. A check on the power required for hovering at altitude with the original set of blades was secured by this procedure. Descent data listed in table II for the original rotor were obtained at a rate of descent of 142 feet per minute and were extrapolated to the hovering condition by means of figure 8. The estimated hovering point thus obtained, together with actual hovering points, are shown in figure 4. However, before detailed use is made of this method, it would be desirable to determine the shape of the C_{p_c}/C_{p_o} curve for blades of several different aerodynamic designs.

CONCLUSIONS

Flight tests have been conducted on the HNS-1 helicopter as equipped with two different sets of main-rotor blades. From the hovering and vertical-flight performance data obtained thus far, the following conclusions may be drawn.

1. An increase in thrust available for hovering at altitude of more than 300 pounds has been obtained by replacing the original set of main-rotor blades by one of different aerodynamic design and surface condition.
2. As predicted by theory and by full-scale tunnel tests, appreciable power was saved by use of low tip speeds. A saving of 10 horsepower, which corresponds to an increase of thrust available for hovering of about 130 pounds, was obtained by reducing the rpm from 2260 ($C_T = 0.0037$) to 1910 ($C_T = 0.0052$).
3. The theory presented in NACA Technical Note No. 626 may be used to predict actual helicopter hovering performance with reasonable accuracy if the blade-section profile-drag polar is approximately known.

4. Values of thrust as high as 82 percent of the thrust produced by an ideal rotor (that is, a rotor with zero profile-drag loss and uniform induced velocity) have been obtained.

5. Power data obtained in the ground-effect region indicate that the most noticeable increase of power required with altitude occurs at the smallest ground clearances and that the effect becomes less marked with increasing altitude until little power change is felt above 30 feet.

6. Preliminary data obtained at approximately 25 feet altitude indicate that the variation of power with speed between hovering and 10 miles per hour is probably not more than 2 to 3 percent.

7. Comparison of rotor shaft power in vertical climbs (at rates up to 650 feet per minute) with shaft power required in hovering shows that the increase in power actually required for climb is approximately half the rate of change of potential energy of the aircraft, indicating a corresponding increase in lifting efficiency in climb. Conversely, a similar comparison for rates of descent up to 450 feet per minute shows that the decrease in shaft power required is roughly half the rate of change of potential energy, indicating a corresponding decrease in lifting efficiency.

Langley Memorial Aeronautical Laboratory
National Advisory Committee for Aeronautics
Langley Field, Va.

REFERENCES

1. Knight, Montgomery, and Hefner, Ralph A.: Static Thrust Analysis of the Lifting Airscrew. NACA TN No. 626, 1937.
2. Gustafson, F. B.: Flight Tests of the Sikorsky HNS-1 (Army YR-4B) Helicopter. I - Experimental Data on Level-Flight Performance with Original Rotor Blades. TED No. NACA 1301. NACA MR No. L5C10, 1945.
3. Dingeldein, Richard C., and Schaefer, Raymond F.: Static Thrust Tests of Six Rotor-Blade Designs on a Helicopter in the Langley Full-Scale Tunnel. NACA ARR No. L5F25b, 1945.
4. Tetervin, Neal: Airfoil Section Data from Tests of 10 Practical-Construction Sections of Helicopter Rotor Blades Submitted by the Sikorsky Aircraft Division, United Aircraft Corporation. NACA MR, Sept. 6, 1944.
5. Bradfield, F. B., and Cohen, J.: Wind Tunnel Tests of Lift and Drag Measured in a Velocity Gradient. R. & M. No. 1489, British A.R.C., 1932.
6. Bailey, F. J., Jr.: A Simplified Theoretical Method of Determining the Characteristics of a Lifting Rotor in Forward Flight. NACA Rep. No. 716, 1941.
7. Knight, Montgomery, and Hefner, Ralph A.: Analysis of Ground Effect on the Lifting Airscrew. NACA TN No. 835, 1941.
8. Gustafson, F. B.: Effect on Helicopter Performance of Modifications in Profile Drag Characteristics of Rotor-Blade Airfoil Sections. NACA ACR No. 14H05, 1944.

TABLE I

SUMMARY OF HOVERING DATA IN GROUND-EFFECT REGION;
HNS-1 HELICOPTER WITH ORIGINAL BLADES

Flight	Run	h_w (ft) (1)	h (ft)	V_{h6} (mph)	V (mph)	ρ/ρ_0	W (lb)	Rotor rpm	Engine rpm	Atmos. press. (in. Hg)	F.A.T. (°F) (2)	Manifold pressure (in. Hg)	Chart hp	Main rotor shaft hp	Tail rotor shaft hp	θ_m (deg) (3)	θ_t (deg) (4)	C_T	C_Q
11	1	15.3	27.0	5.5	7.0	0.990	2260	231	2160	30.30	68	24.4	152	127	11.2	8.2	4.1	0.0040	0.000270
	2	19.0	30.7	5.0	7.0	.986	2251	231	2160	30.30	70	25.2	158	130	11.0	8.5	4.8	.0040	.000278
	3	.8	12.3	5.0	6.0	.990	2254	241	2250	30.30	68	----	----	116	10.0	7.0	3.0	.0037	.000218
	4	1.1	12.7	5.5	6.5	.990	2254	241	2250	30.30	67	----	----	115	10.9	7.0	3.2	.0037	.000216
	5	4.1	15.7	5.0	6.0	.992	2254	239	2240	30.30	66	----	----	121	10.8	7.2	3.7	.0037	.000230
	6	6.6	18.1	5.5	7.0	.992	2254	244	2280	30.30	66	----	----	126	11.0	7.4	4.0	.0036	.000227
	7	13.8	25.4	5.5	7.5	.987	2254	242	2260	30.30	69	24.5	160	131	11.5	7.6	3.8	.0037	.000243
	8	27.6	39.1	6.0	8.5	.978	2248	245	2290	30.30	74	24.5	160	133	11.9	8.0	4.1	.0036	.000240
	9	1.3	13.5	7.0	8.5	.998	2302	204	1910	30.30	63	----	----	110	8.3	9.3	4.8	.0052	.000336
	10	2.3	14.5	6.5	8.0	.998	2302	205	1920	30.30	63	----	----	111	9.7	9.4	5.7	.0051	.000334
	11	6.6	18.8	6.0	8.0	.998	2302	204	1910	30.30	63	----	----	117	9.2	9.7	6.4	.0052	.000357
	12	7.6	19.8	6.0	7.5	.998	2302	204	1910	30.30	63	25.7	145	118	9.2	9.7	5.9	.0052	.000360
	13	12.0	24.2	6.0	7.5	.992	2299	204	1910	30.30	66	26.9	153	121	9.2	10.1	6.1	.0052	.000373
	14	18.2	30.4	5.5	7.5	.979	2299	205	1920	30.30	73	27.7	159	124	9.5	10.1	6.1	.0052	.000378

¹Altitude of helicopter referenced to bottom of wheels, struts extended and tires undeflected.

²Free-air temperature.

³Average main-rotor-blade pitch, uncorrected for play in linkage and for mean blade twist.

⁴Average tail-rotor-blade pitch, uncorrected for play in linkage and for mean blade twist.

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

MR No. L5D09a

TABLE II

SUMMARY OF DATA OBTAINED IN HOVERING AT ALTITUDE
AND IN VERTICAL DESCENT; HNS-1 HELICOPTER

Flight	Run	V_c (fpm)	W (lb)	V_{hor} (mph) (1)	Atmos. press. (in. Hg)	ρ/ρ_0	Rotor rpm	Engine rpm	F.A.T. (°F) (2)	Manifold pressure (in. Hg)	Chart hp	Main rotor shaft hp	Tail rotor shaft hp	θ_M (deg) (3)	θ_t (deg) (4)	C_T	C_Q	$C_Q^{2/3}$
Original main-rotor blades																		
12	32	0	2280	<5	29.75	0.972	228	2130	70	26.6	165	138	9.8	9.1	5.1	0.0042	0.000328	0.00475
19	3	-142	2418	1.	28.60	.961	238	2220	55	27.7	179	146	11.5	8.9	5.0	.0042	.000294	.00442
Alternate main-rotor blades																		
14	2	0	2369	4	29.65	1.026	222	2070	40	23.1	140	118	----	9.7	6.0	0.0044	0.000272	0.00420
	3	0	2363	5	29.65	1.026	225	2100	40	23.1	143	120	----	9.7	5.7	.0043	.000265	.00413
15	2	0	2508	4	26.89	.930	232	2160	40	26.1	166	138	10.0	---	7.0	.0047	.000310	.00458
	3	0	2506	4	26.87	.930	230	2150	40	26.1	166	136	9.7	---	6.9	.0048	.000311	.00460
	4	0	2504	5	26.88	.930	230	2170	40	26.1	166	139	9.5	---	6.5	.0047	.000308	.00456
	5	0	2502	4	26.96	.931	232	2160	41	26.2	166	139	9.7	---	6.8	.0047	.000311	.00460
	6	0	2500	4	26.93	.931	230	2150	40	26.2	166	137	11.0	---	7.1	.0047	.000313	.00461
	7	0	2490	4	27.01	.934	230	2150	40	26.3	166	137	9.7	---	6.9	.0047	.000312	.00461
	8	0	2484	4	27.19	.940	229	2140	40	26.4	164	135	10.4	---	7.1	.0047	.000309	.00456
	9	0	2478	0	26.97	.925	229	2130	44	26.3	164	138	9.6	---	7.1	.0048	.000324	.00472
	10	0	2475	0	26.92	.924	228	2130	44	26.2	164	137	9.6	---	6.9	.0048	.000323	.00471
	11	-208	2469	3	27.35	.941	229	2140	43	25.2	158	131	9.5	---	6.2	.0047	.000300	.00450
	12	-154	2460	4.	27.25	.936	230	2140	43	25.0	157	130	9.9	---	7.0	.0047	.000296	.00445
	13	-452	2448	4	27.44	.943	227	2120	43	22.7	141	116	10.3	---	7.0	.0047	.000271	.00421

¹Horizontal component of air velocity.

²Free-air temperature.

³Average main-rotor-blade pitch, uncorrected for play in linkage and for mean blade twist.

⁴Average tail-rotor-blade pitch, uncorrected for play in linkage and for mean blade twist.

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

MR No. 15D09a



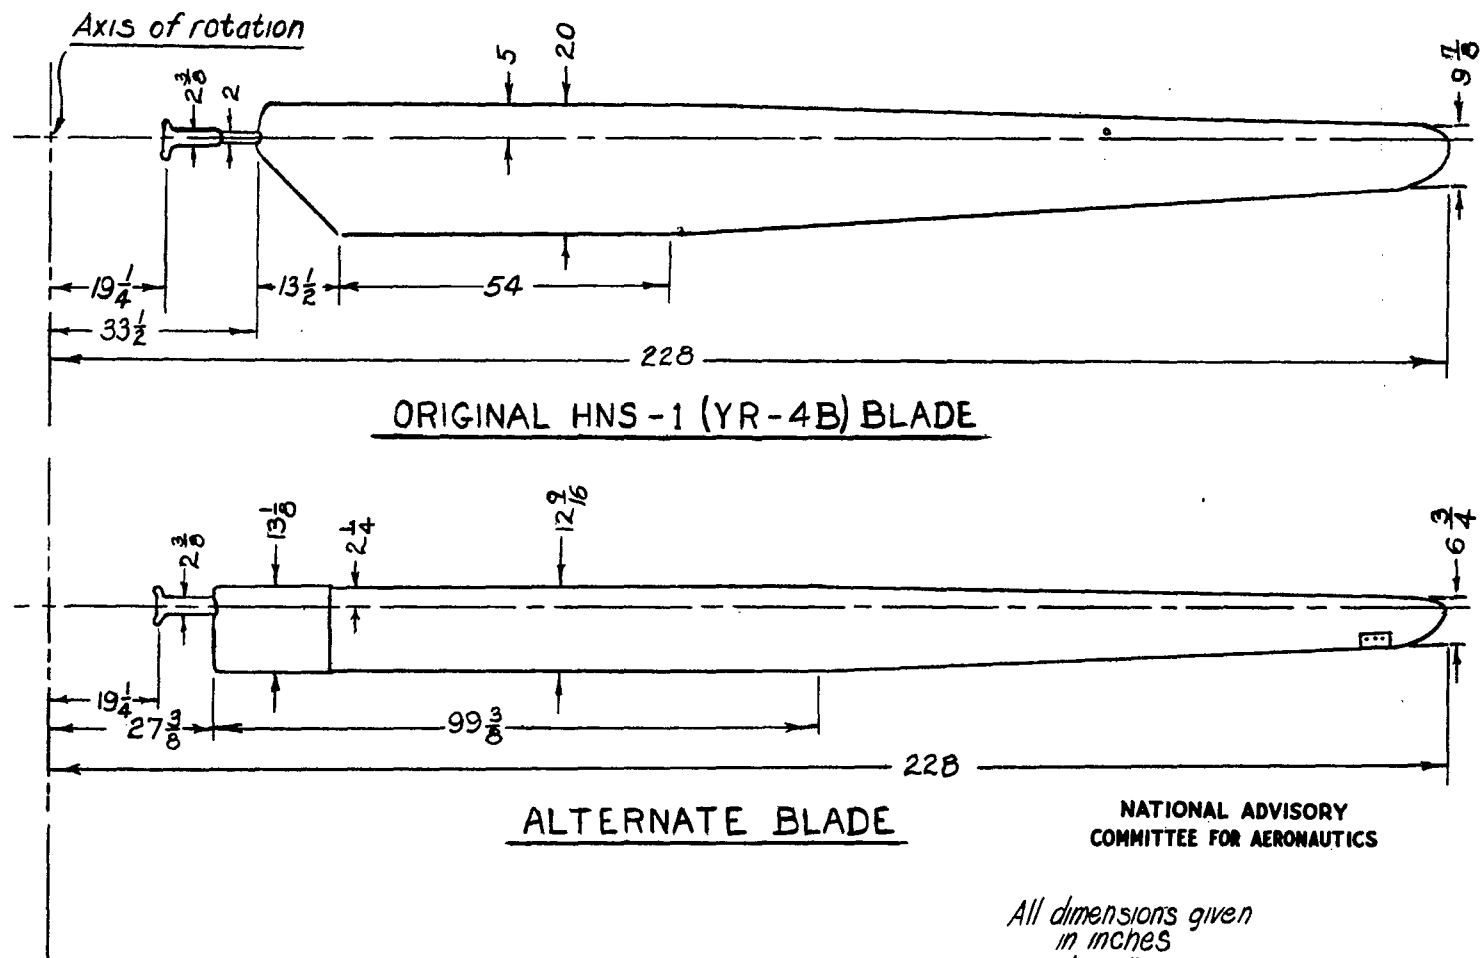


Figure 1.- Planform dimensions of original and alternate main-rotor blades; HNS-1 helicopter.

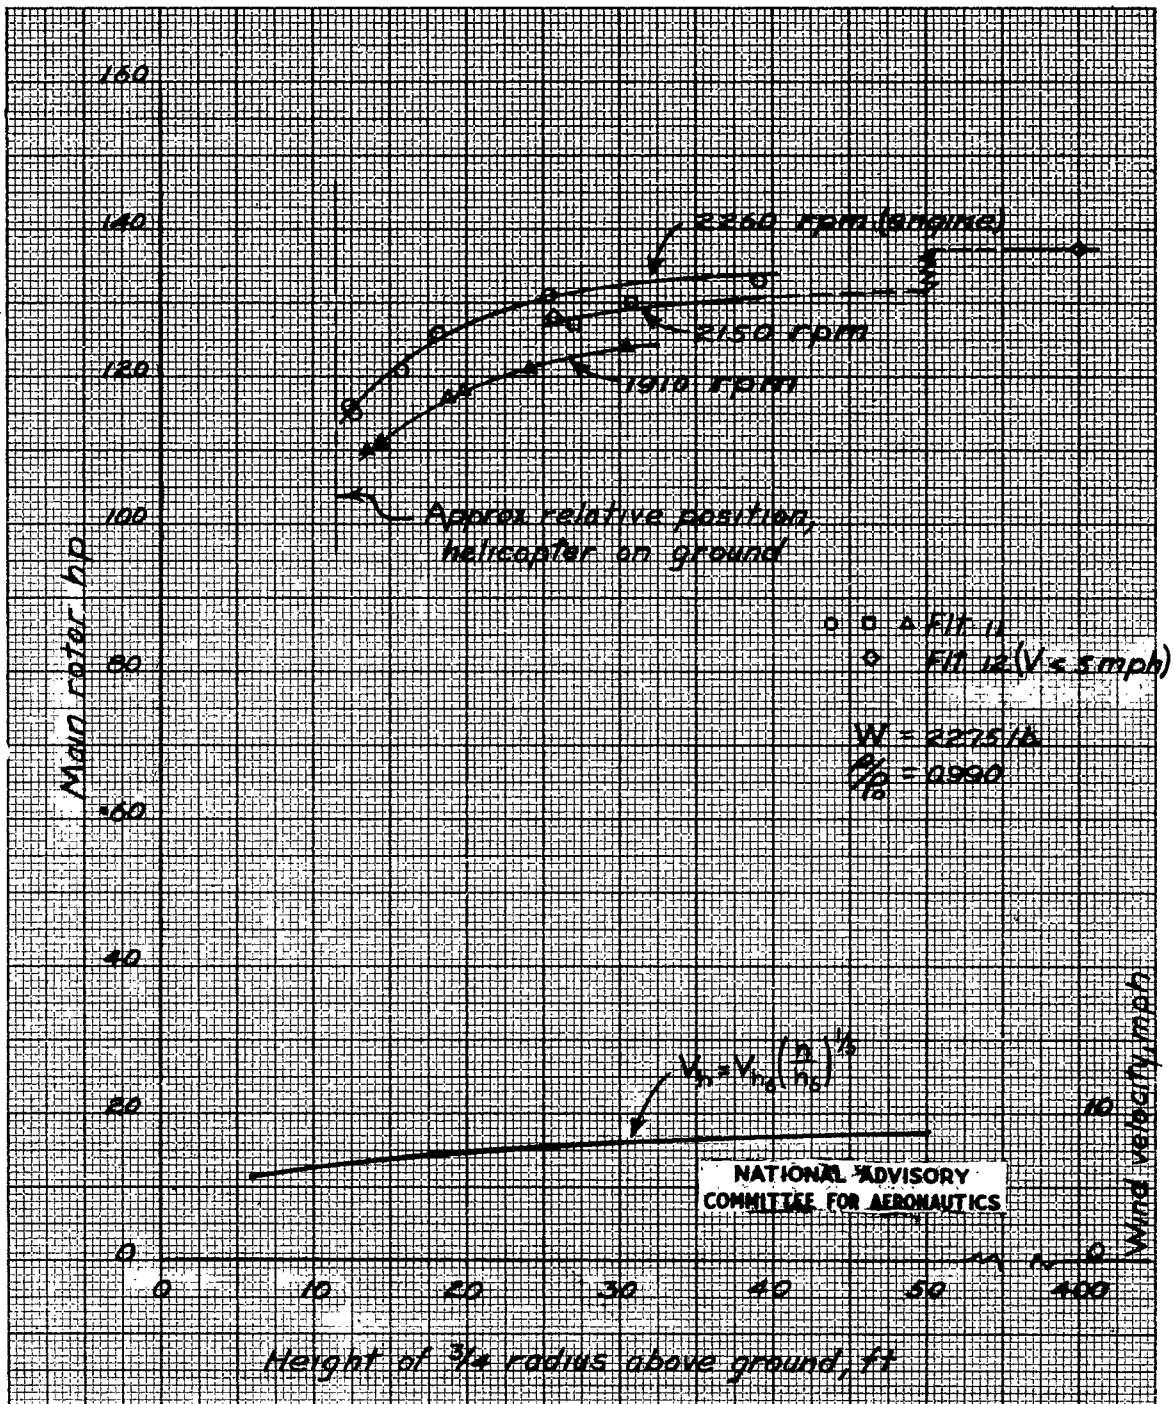

(a) Main rotor shaft power vs. height

Figure 2.- Effect of rpm on the power required to hover in the ground effect region; HNS-1 helicopter with original main rotor blades.

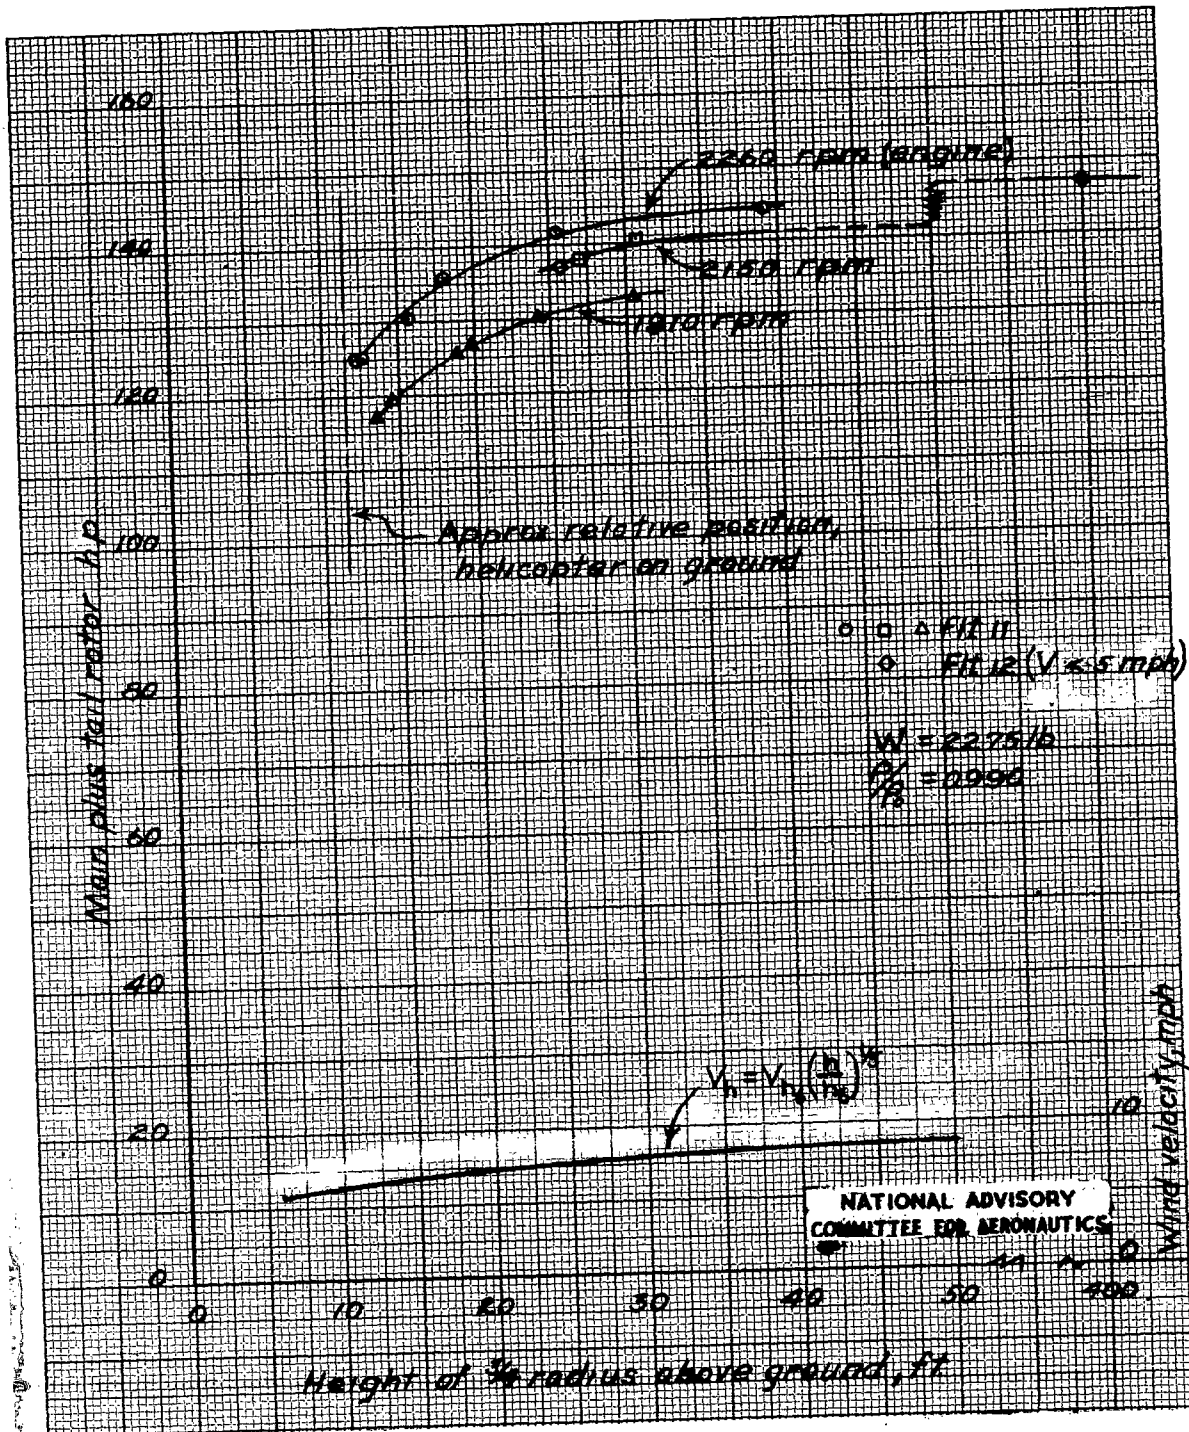

(b) Main plus tail rotor shaft power vs. height.

Figure 2.- Concluded.

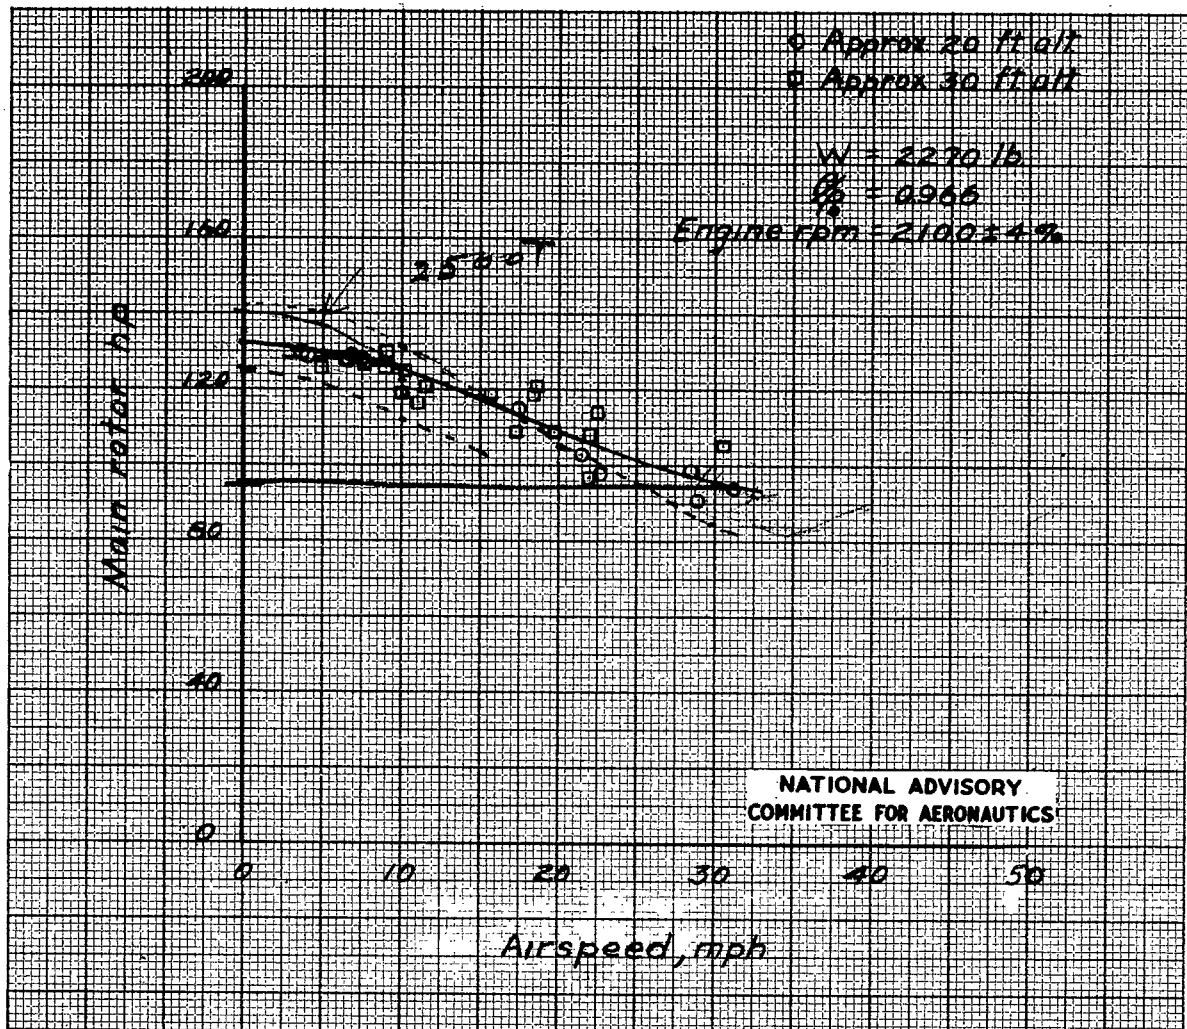


Figure 3.- Preliminary data indicating the effect of airspeed on the main rotor shaft power required by the HNS-1 helicopter in the near hovering condition.

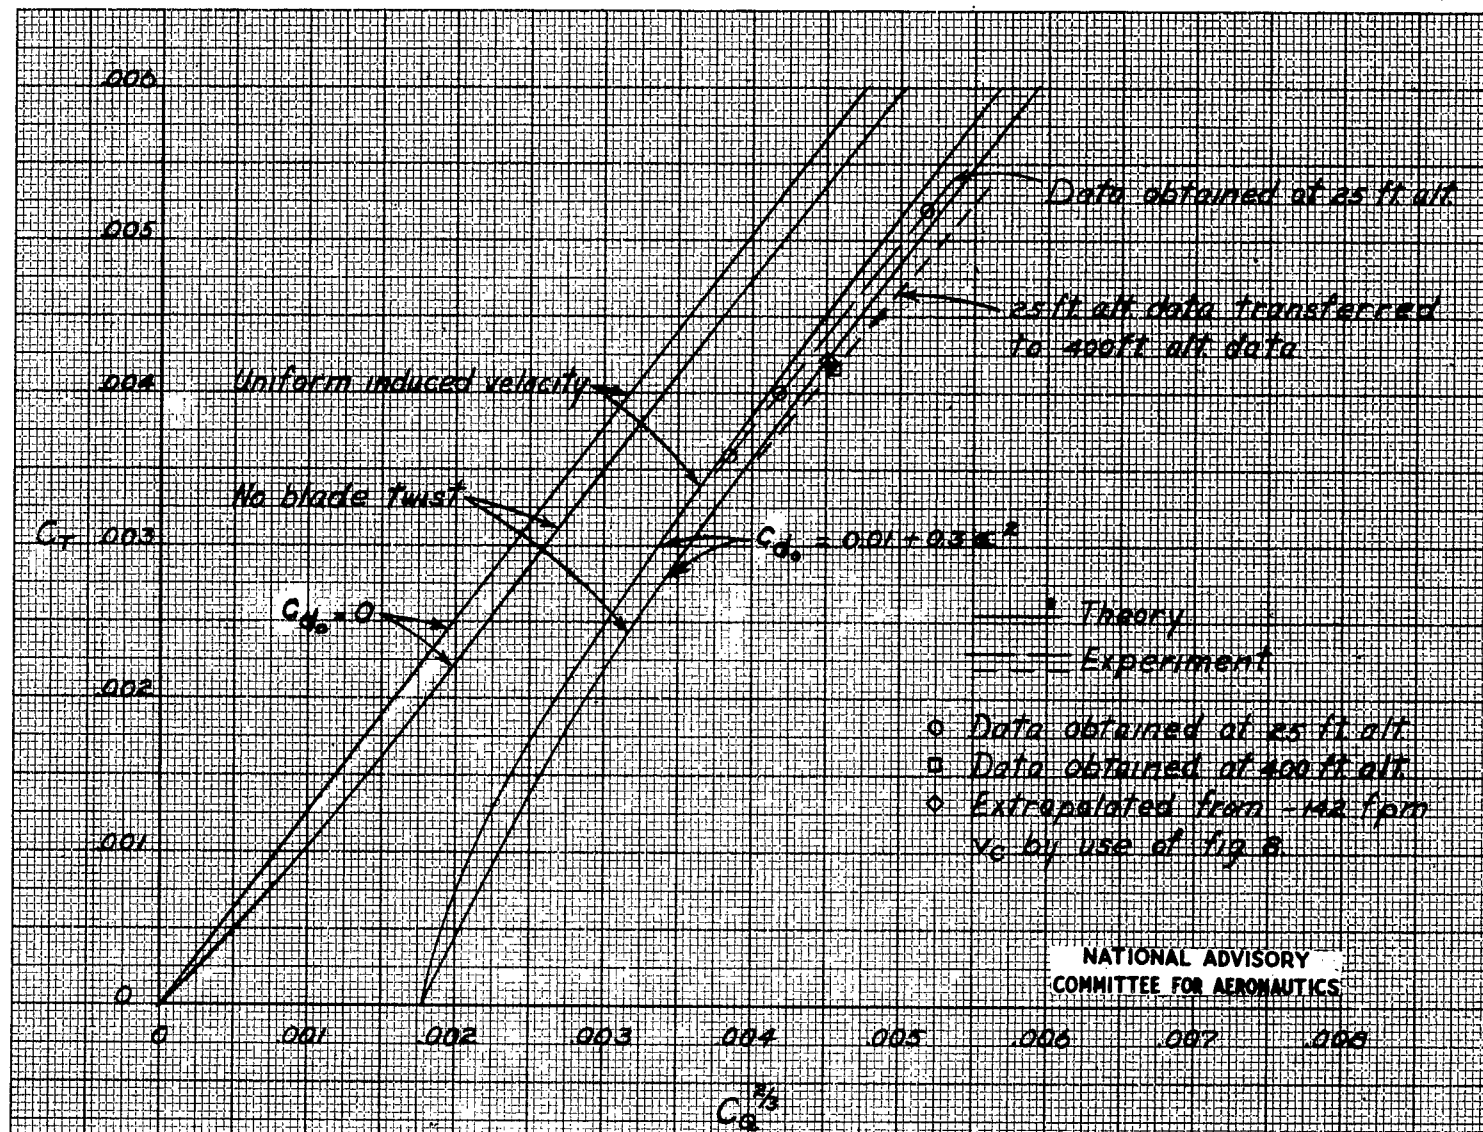


Figure 4.- Comparison of hovering performance of original main rotor blades with theory. Theory from NACA TN 626 (reference 1): $\sigma = 0.060$, constant chord; HNS-1 helicopter.

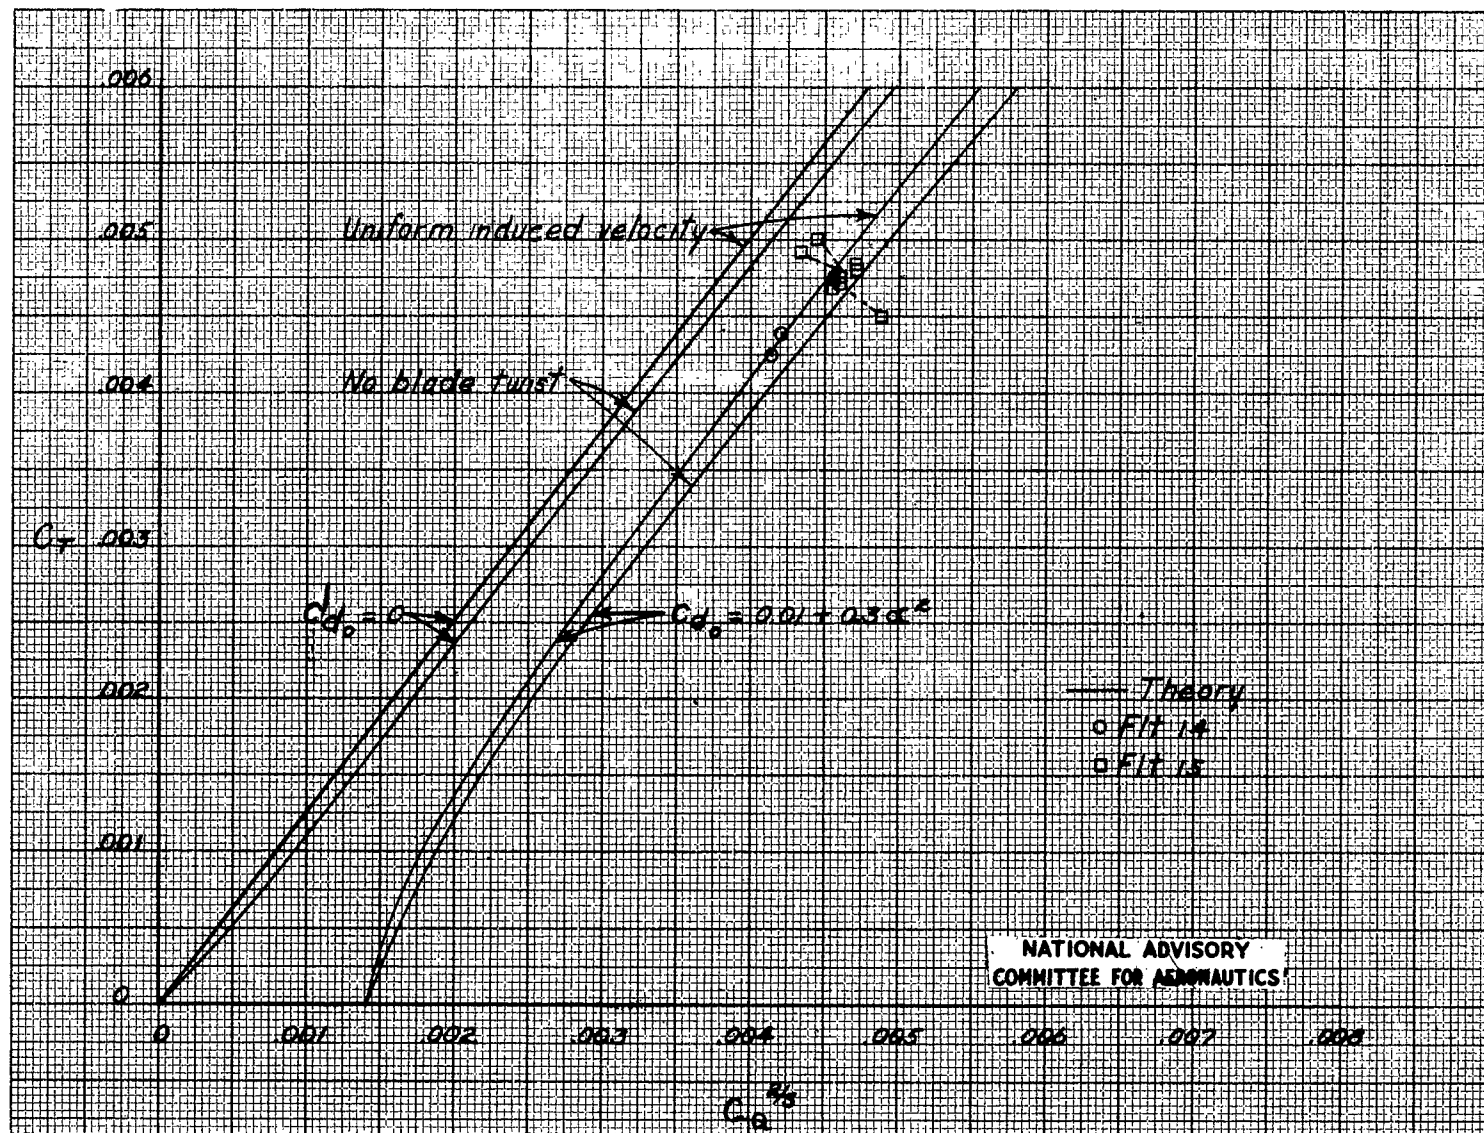


Figure 5.- Comparison of hovering performance of alternate main-rotor blades with theory. Theory from NACA 626 (reference 1): $\sigma = 0.042$, constant chord; HNS-1 helicopter.

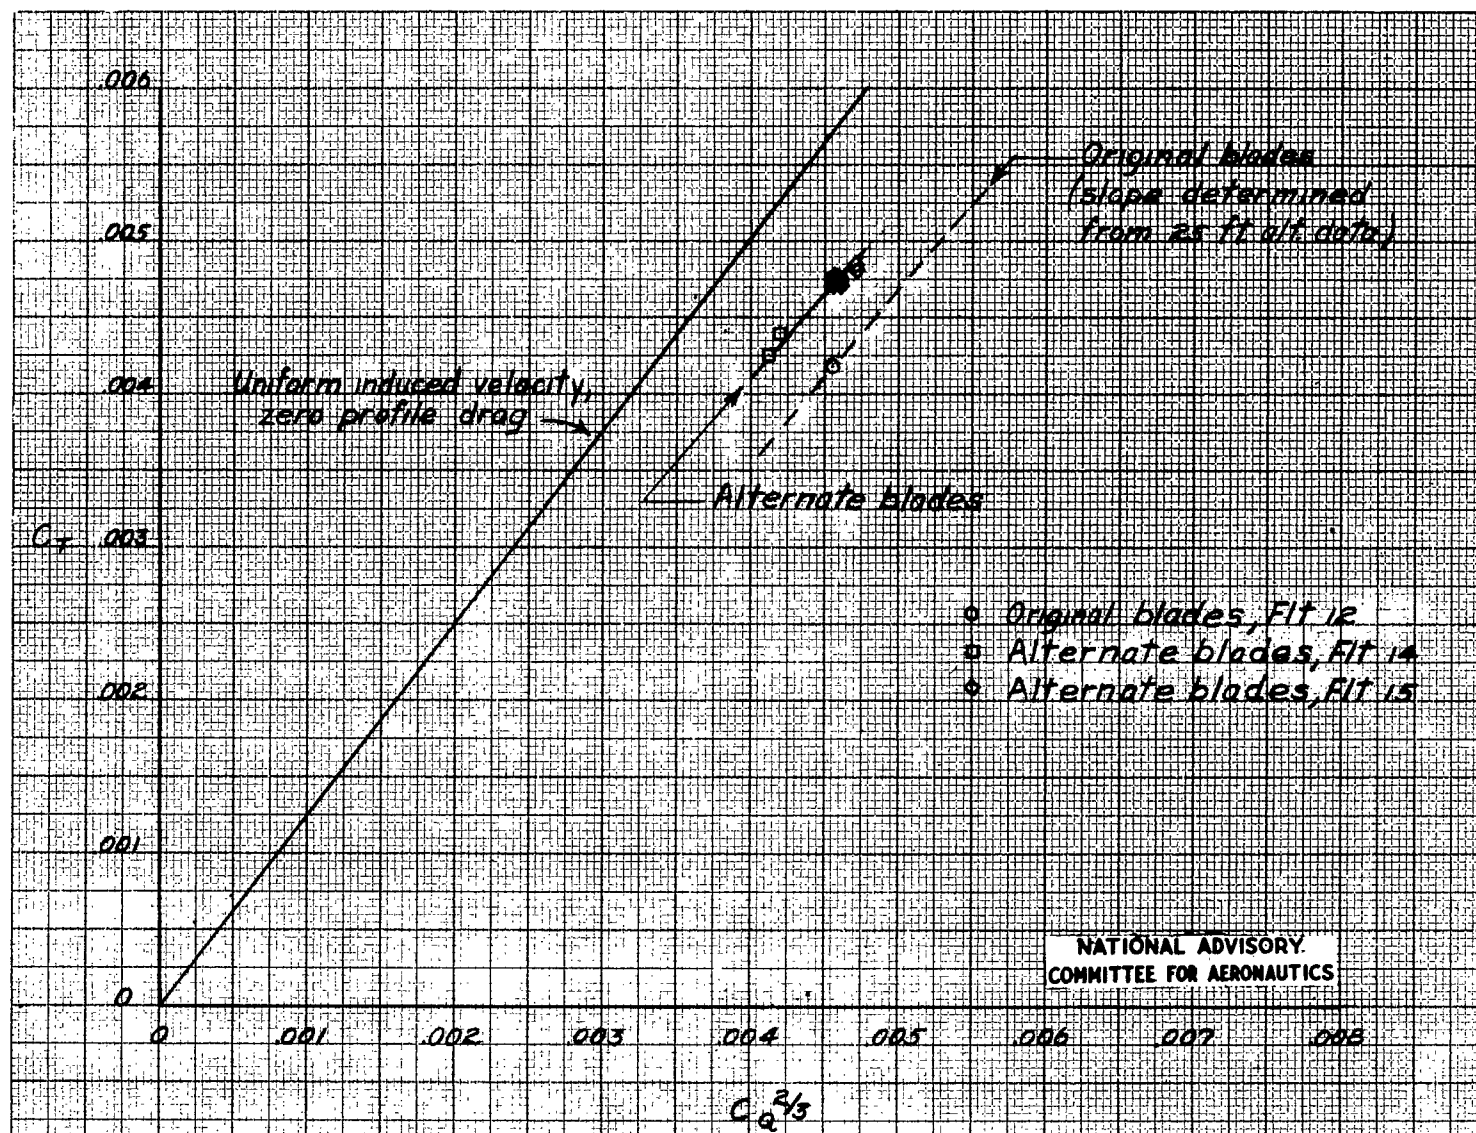


Figure 6.- Comparison of hovering performance of original main-rotor blades and alternate main-rotor blades; HNS-1 helicopter.

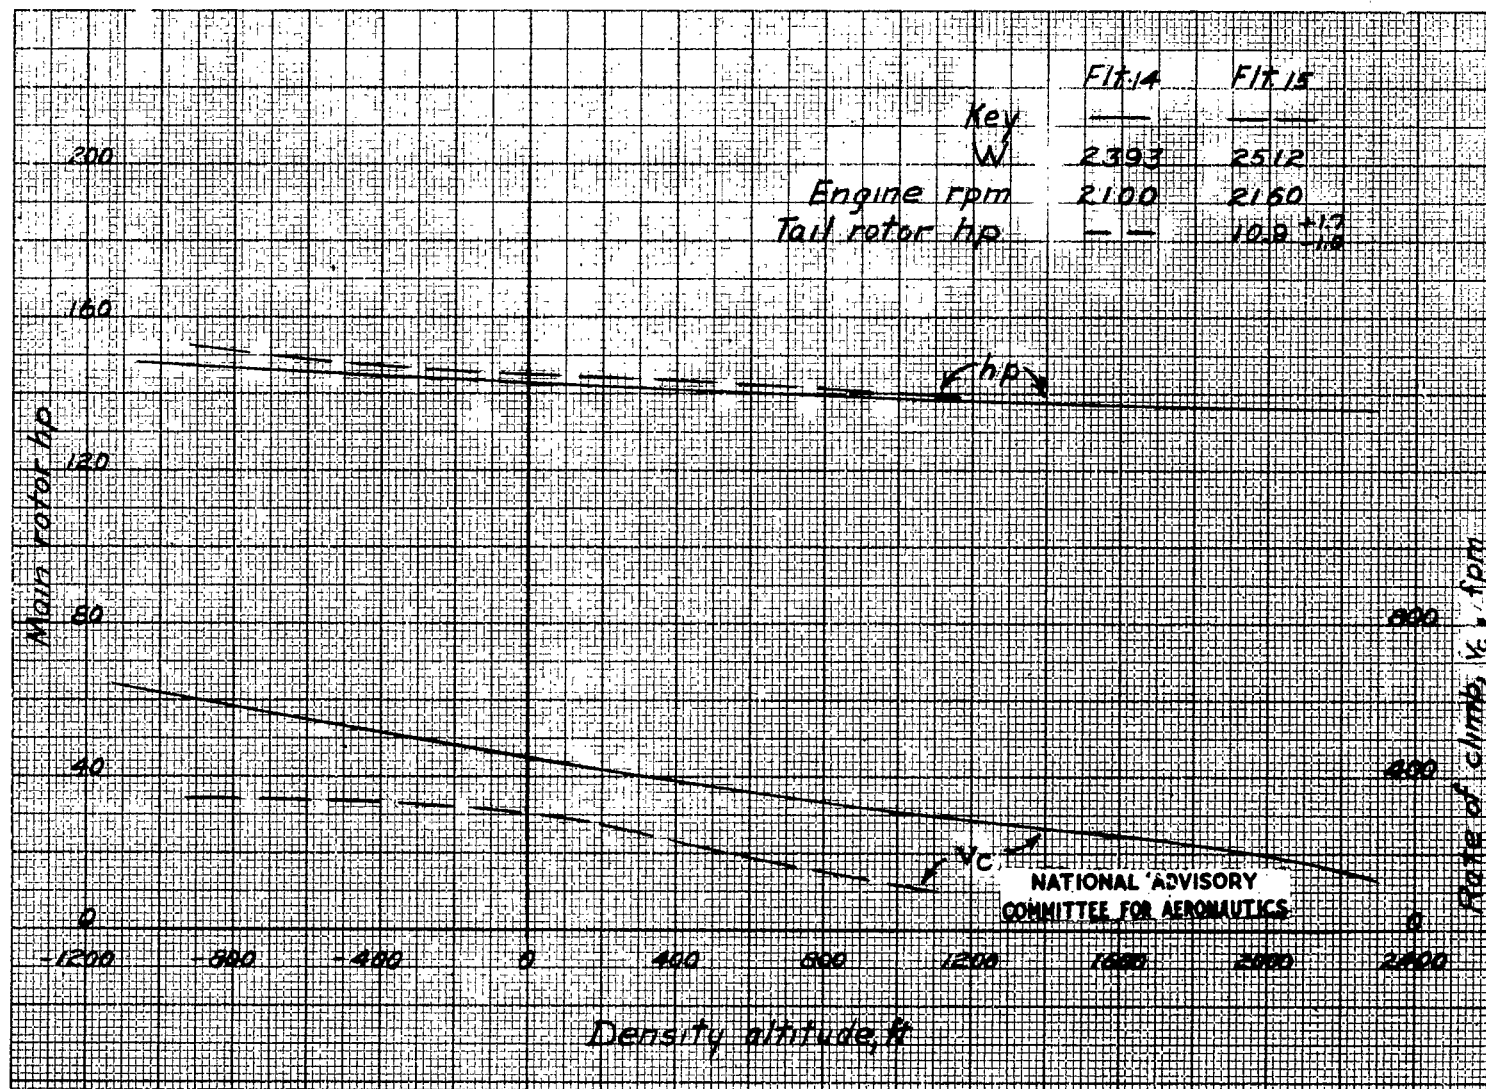


Figure 7.- Continuous climb records obtained with alternate main-rotor blades; HNS-1 helicopter.

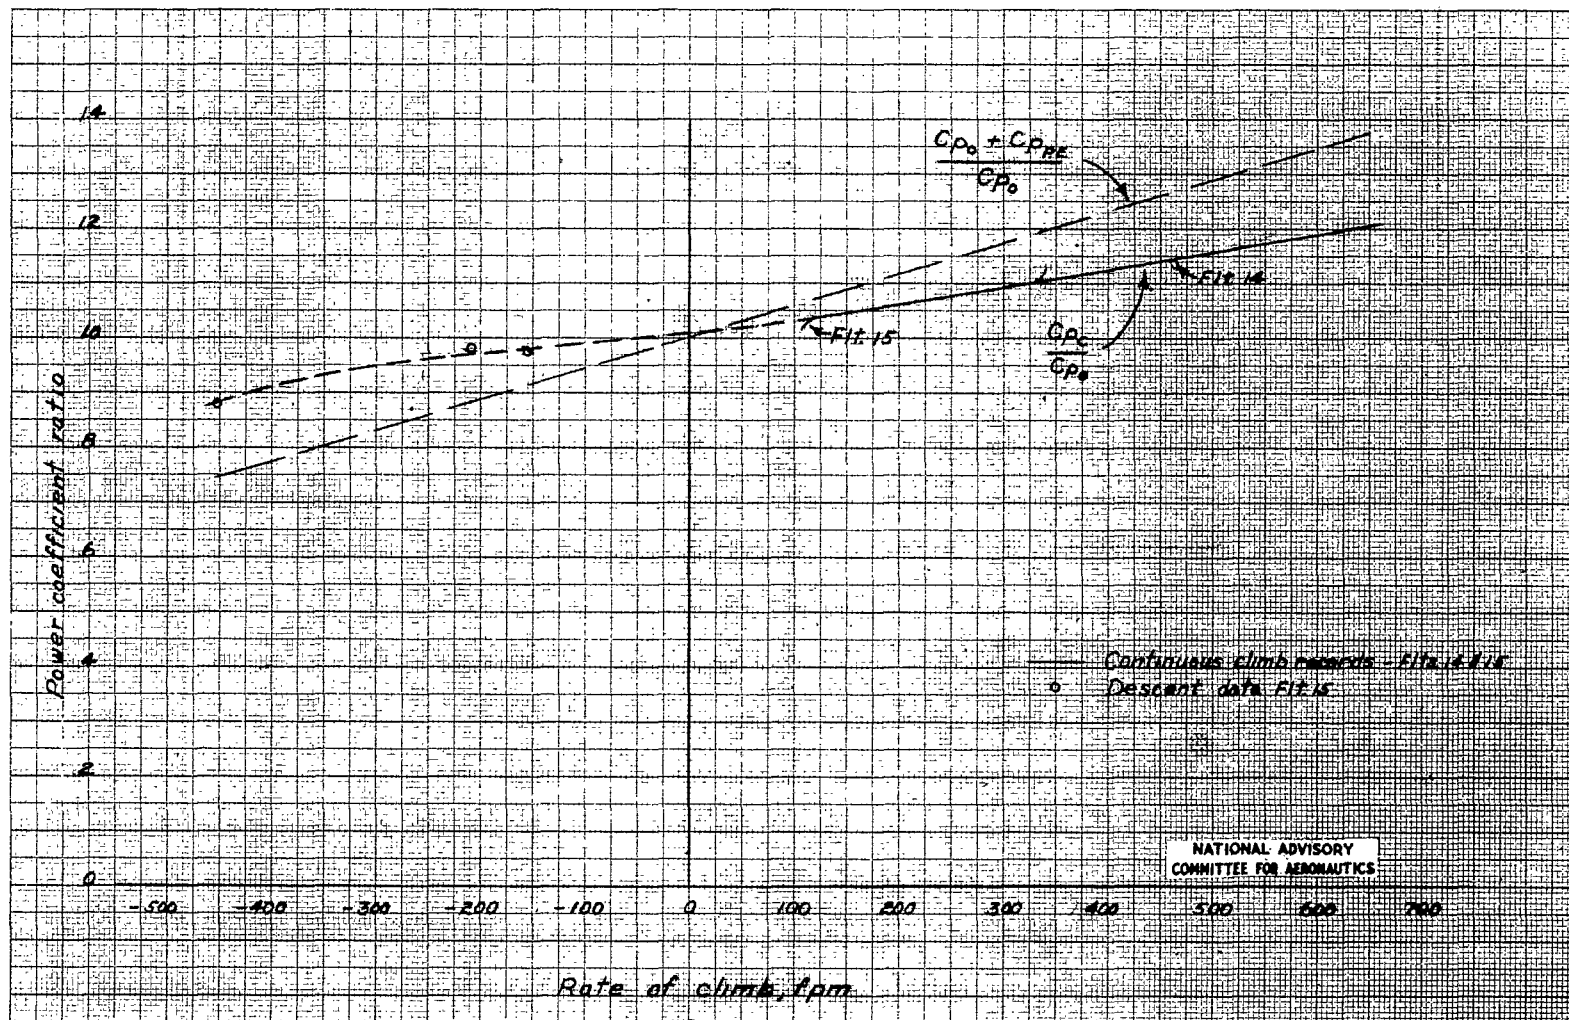


Figure 8.- Effect of rates of climb and descent on main rotor efficiency;
HNS-1 helicopter.

TITLE: Flight Tests of the Sikorsky HNS-1 Helicopter - II - Hovering and Vertical Flight Performance

AUTHOR(S) : Gustafson, F.B.; Gessow, Alfred

ORIG. AGENCY : Langley Memorial Aeronautical Lab., Langley Field, Va.

PUBLISHED BY : National Advisory Committee for Aeronautics, Washington, D.C.

ATI : 033

DIVISION

(None)

ORIG. AGENCY NO.

MR-L5D09a

PUBLISHING AGENCY NO.

(None)

DATE
April '45

DOC. CLASS.
Unclass.

COUNTRY
U.S.

LANGUAGE
English

PAGES
26

ILLUSTRATIONS
tables, diagrs, graphs

ABSTRACT:

Flight test results show that the HNS-1 helicopter performance was improved by replacing original rotor with another of different design and surface conditions. Low tip speeds also increase efficiency. Thrust values 82% of those of the ideal rotor have been accomplished. Ground effect on power is noticeable only to about 30 feet altitude. Rotor shaft measurements show an increase in lifting efficiency during climb. NACA theory for hovering performance is reasonably accurate.

DISTRIBUTION: SPECIAL. All requests for copies must be addressed to: Publishing Agency

DIVISION: Rotary Wing Aircraft (34)

SECTION: Aerodynamics and Performance (1)

SUBJECT HEADINGS: Helicopters - Flight tests (49241.42);
Helicopters - Hovering (49241.7); Helicopter rotors -
Ground effect (49232); H-4 (R-4) (47931.9)

ATI SHEET NO.: R-34-1-22

Central Air Documents Office
Wright-Patterson Air Force Base, Dayton, Ohio

AIR TECHNICAL INDEX