

AD A953109

Lockheed

A Division of Lockheed Corporation
P.O. Box 551, Burbank, California 91520 U.S.A.

TITLE AERODYNAMIC DATA FOR STRUCTURAL LOADS		
REPORT NO. LR 9062	DATE 3-2-53	MODEL NO. C-130
SUBMITTED UNDER (CONTRACT, SPEC., ETC.)		

Form 375-3

DTIC FILE COPY

This document has been approved
for public release and sale; its
distribution is unlimited.

84 03 20 001

DTIC
ELECTRONIC
APR 2 1984
A

UNCLASSIFIED

~~RESTRICTED~~
~~UNCLASSIFIED~~

LOCKHEED AIRCRAFT CORPORATION

Page 1

REPORT 9062

TABLE OF CONTENTS

Figure Index	iii
Introduction	1
General	2
Table I - Basic Data	4
Table II- Aerodynamic Sign Conventions	11
Longitudinal Aerodynamic Characteristics	12
Airfoil Section Data	12
Airplane Lift Characteristics	12
Airplane Drag Characteristics	13
Airplane Pitching Moment Characteristics	13
Elevator Characteristics	15
Directional Aerodynamic Characteristics	53
Side Force Characteristics	53
Yawing Moment Characteristics	53
Rudder Characteristics	54
Lateral Aerodynamic Characteristics	64
Dihedral Effect	64
Damping in Roll	64
Aileron Characteristics	64
Chordwise Pressure Distributions	71
Wing	71
Empennage	71

Accession For	
NTIS GRA&I	☒
DTIC TAB	☒
Unannounced	☐
Justification	☐
Distribution/	
Availability Codes	
Avail and/or	
Special	



UNANNOUNCED

UNCLASSIFIED

~~RESTRICTED~~
~~SECURITY INFORMATION~~

Page ii

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

Miscellaneous Air Loads	88
Cargo Door	88
Flap Load Coefficients	88
Engine Nacelle Pressure Distribution	88
Pylon Tank and Strut	88
Propeller Side Loads	89
Paratrooper Shield Door	90
Nose Landing Gear Door	90
Main Landing Gear Door	91
Control System Characteristics	100
Elevator System	100
Rudder System	101
Aileron System	103
Tab Hinge Moment	104
References	118

~~RESTRICTED~~

~~RESTRICTED~~

Page iii

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

FIGURE INDEX

<u>Fig. No.</u>	<u>Title</u>	<u>Page</u>
1	Airplane Three-View Drawing	3
2	Speed Summary	9
3	Military and Normal Rated Power at Several Altitudes	10
4	Wing Airfoil Section Characteristics	16
5	Wing Airfoil Section Lift Characteristics with Various Flap Extensions	17
6	Wing Airfoil Section Drag Characteristics with Various Flap Extensions	18
7	Wing Airfoil Section Pitching Moment Character- istics with Various Flap Extensions	19
8	Horizontal Tail Airfoil Section Character- istics	20
9	Horizontal Tail Airfoil Section Pitch Character- istics due to Elevator Deflection	21
10	Vertical Tail Airfoil Section Characteristics	22
11	Effect of Aileron Deflection on Wing Airfoil Section Characteristics	23
12	Effect of Airplane Components on Lift Character- istics	24
13	Airplane Lift Characteristics with Various Flap Extensions	25

~~RESTRICTED~~

RESTRICTED

Page iv

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

FIGURE INDEX (Cont'd.)

<u>Fig. No.</u>	<u>Title</u>	<u>Page</u>
14	Variation of Lift Curve Slope and Zero Lift Intercept with Mach No.	26
15	Effects of Power on Lift Characteristics of Airplane Less Horizontal Tail-Flaps Up	27
16	Effects of Power on Lift Characteristics of Airplane Less Horizontal Take-Off Flaps	28
17	Effects of Power on Lift Characteristics of Airplane Less Horizontal Tail-Landing Flaps	29
18	Power Effects on Airplane Lift Characteristics	30
19	Effect of Power on Airplane Lift Characteristics, Flaps Down	31
20	Airplane Drag Build-Up	32
21	Airplane Drag Characteristics	33
22	Wing Drag Rise with Fuselage and Nacelle Effects	34
23	Airplane Drag Rise	35
24	Effect of Airplane Components on Pitching Moments	36
25	Airplane-Less-Tail Pitching Moment for Various Flap Deflections	37
26	Airplane Pitching Moment Characteristics for Various Flap Positions	38
27	Pitching Moments at Several Mach Nos. for Wing	39
28	Pitching Moments at Several Mach Nos. for Wing plus Fuselage.	40

RESTRICTED

~~RESTRICTED~~
~~SECURITY INFORMATION~~

Page v

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

FIGURE INDEX (Cont'd.)

<u>Fig. No.</u>	<u>Title</u>	<u>Page</u>
29	Pitching Moment at Several Mach Nos. for Airplane Less Empennage	41
30	Pitching Moment at Several Mach Nos. for Airplane Less Horizontal Tail	42
31	Pitching Moments at Several Mach Nos. for Complete Airplane	43
32	Effects of Power on Pitching Characteristics of Airplane Less Horizontal Tail - Flaps Up	44
33	Effects of Power on Pitching Characteristics of Airplane Less Horizontal Tail - Take-off Flaps	45
34	Effects of Power on Pitching Characteristics of Airplane Less Horizontal Tail - Landing Flaps	46
35	Power Effects on Airplane Pitching Moment Co- efficients	47
36	Effects of Power on Pitch Characteristics of Air- plane - Flaps Down	48
37	Elevator Effectiveness	49
38	Variation of Elevator Effectiveness with Mach. No.	50
39	Elevator Hinge Moment Characteristics - Flaps Up	51
40	Elevator Hinge Moment Characteristics - Flaps Down	52
41	Side Force Characteristics	55
42	Effects of Power on Airplane Side Force Characteristics	56

~~RESTRICTED~~
~~SECURITY INFORMATION~~

~~RESTRICTED~~

~~SECURITY INFORMATION~~

Page vi

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

FIGURE INDEX (Cont'd.)

<u>Fig. No.</u>	<u>Title</u>	<u>Page</u>
43	Effects of Power on Airplane Side Force Characteristics - Landing Flaps	57
44	Yawing Moment Characteristics	58
45	Effects of Power on Characteristics in Yaw of Airplane with/without Tail	59
46	Effects of Power on Airplane Yawing Moment Characteristics - Landing Flaps	60
47	Variation of Airplane Yawing Characteristics with Mach No.	61
48	Rudder Effectiveness Characteristics	62
49	Rudder Hinge Moment Characteristics	63
50	Dihedral Effect	66
51	Variation of Airplane Roll Damping Character- istics with Mach No.	67
52	Aileron Effectiveness - Clean Configuration	68
53	Aileron Effectiveness - Landing Configuration	69
54	Estimated Aileron Hinge Moment Characteristics	70
55	Chordwise Pressure Distribution Over Inboard Wing Section - Upper Surface	73
56	Chordwise Pressure Distribution Over Inboard Wing Section - Lower Surface	74
57	Net Chordwise Pressure Distribution Over Inboard Wing Section	75

~~RESTRICTED~~

~~SECURITY INFORMATION~~

~~RESTRICTED~~

~~SECURITY INFORMATION~~

Page vii

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

FIGURE INDEX (Cont'd.)

<u>Fig. No.</u>	<u>Title</u>	<u>Page</u>
58	Chordwise Pressure Distribution Over Outboard Wing Section - Upper Surface	76
59	Chordwise Pressure Distribution Over Outboard Wing Section - Lower Surface	77
60	Net Chordwise Pressure Distribution Over Outboard Wing Section	78
61	Chordwise Pressure Distribution Over Wing Tip Section	79
62	Net Chordwise Pressure Distribution Increment Due to Aileron Deflection	80
63	Wing Chordwise Pressure Distribution With Fowler Flap Extended	81
64	Horizontal Tail Chordwise Pressure Distribution - Lower Surface	82
65	Horizontal Tail Chordwise Pressure Distribution - Lower Surface	83
66	Horizontal Tail Net Chordwise Pressure Distribution	84
67	Horizontal Tail Net Chordwise Pressure Distribution Due to Elevator Deflection	85
68	Vertical Tail Chordwise Pressure Distribution	86
69	Vertical Tail Net Chordwise Pressure Distribution Due to Rudder Deflection	87
70	Cargo Door Hinge Moments	92

~~RESTRICTED~~

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

FIGURE INDEX (Cont'd.)

<u>Fig. No.</u>	<u>Title</u>	<u>Page</u>
71	Flap Load Coefficients	93
72	Estimated Pressure Distribution on Nacelles	94
73	Pylon Tank Aerodynamic Characteristics	95
74	Pylon Tank Strut Aerodynamic Characteristics	96
75	Variation of Propeller Blade Angle with Speed	97
76	Paratrooper Shield Door Air Loads	98
77	Main Landing Gear Door Air Loads	99
78	Elevator Control Systems Mechanical Advantage	105
79	Elevator Boost Systems Characteristics	106
80	Variation of Pilot Force with Elevator Hinge Moment	107
81	Rudder System Characteristics	108
82	Pedal Force at Rudder Boost Cut-off	109
83	Rudder Hinge Moment at Boost Cut-off	110
84	Variation of Pedal Force with Rudder Hinge Moment	111
85	Aileron Angle Vs. Wheel Position	112
86	Aileron Control System Characteristics	113
87	Aileron Boost Characteristics	114
88	Aileron Hinge Moments	115
89	Aileron Wheel Force Vs. Wheel Position at Several Airspeeds	116
90	Control Surface Tab Hinge Moments	117

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

INTRODUCTION

This report presents the aerodynamic data necessary for a complete determination of the structural flight loads on the airplane. Included are the effects of compressibility, power and configuration changes such as pylon tanks on, ramp deflected, flaps extended, etc. Data specifically for this airplane are obtained from the results of extensive low- and high-speed wind tunnel tests conducted by Lockheed. Additional data as necessary are from NACA publications and other Lockheed investigations.

Many configurations were tested in the development of this airplane. Some were made necessary by the type of test to be run; others by design changes or by stability and/or control requirements. In each case, the data most applicable have been selected for presentation in this report.

~~RESTRICTED~~
~~SECURITY INFORMATION~~

Page 2

LOCKHEED AIRCRAFT CORPORATION


REPORT 9062





GENERAL

The C-130 is primarily a military cargo airplane of conventional arrangement. It is powered by four propeller-driving Allison T-56 gas turbine engines. The airplane is a high-wing design with standard empennage. It incorporates hydraulically boosted primary controls, Lockheed-Fowler flaps for landing and take-off. Loading and unloading are accomplished by means of a ramp at the rear of the fuselage which can be opened for airdrops. Paratroops may be dropped from personnel doors at the rear of the fuselage and are protected from air blast by means of shields immediately forward of the doors. Main landing gear is contained in fairings on each side of the fuselage.

Basic data applicable to the airplane and describing its geometric characteristics are presented on the following pages. A dimensioned three-view drawing of the airplane is presented in Fig. 1. Physical parameters necessary to the purpose of this report are summarized in Table I, along with those items of performance which affect structural flight loads determination. In Fig. 2 are presented curves showing military and normal rated power available at all speeds for several altitudes. Fig. 3 presents curves which summarize design speeds at all altitudes in level flight and dive.

~~RESTRICTED~~

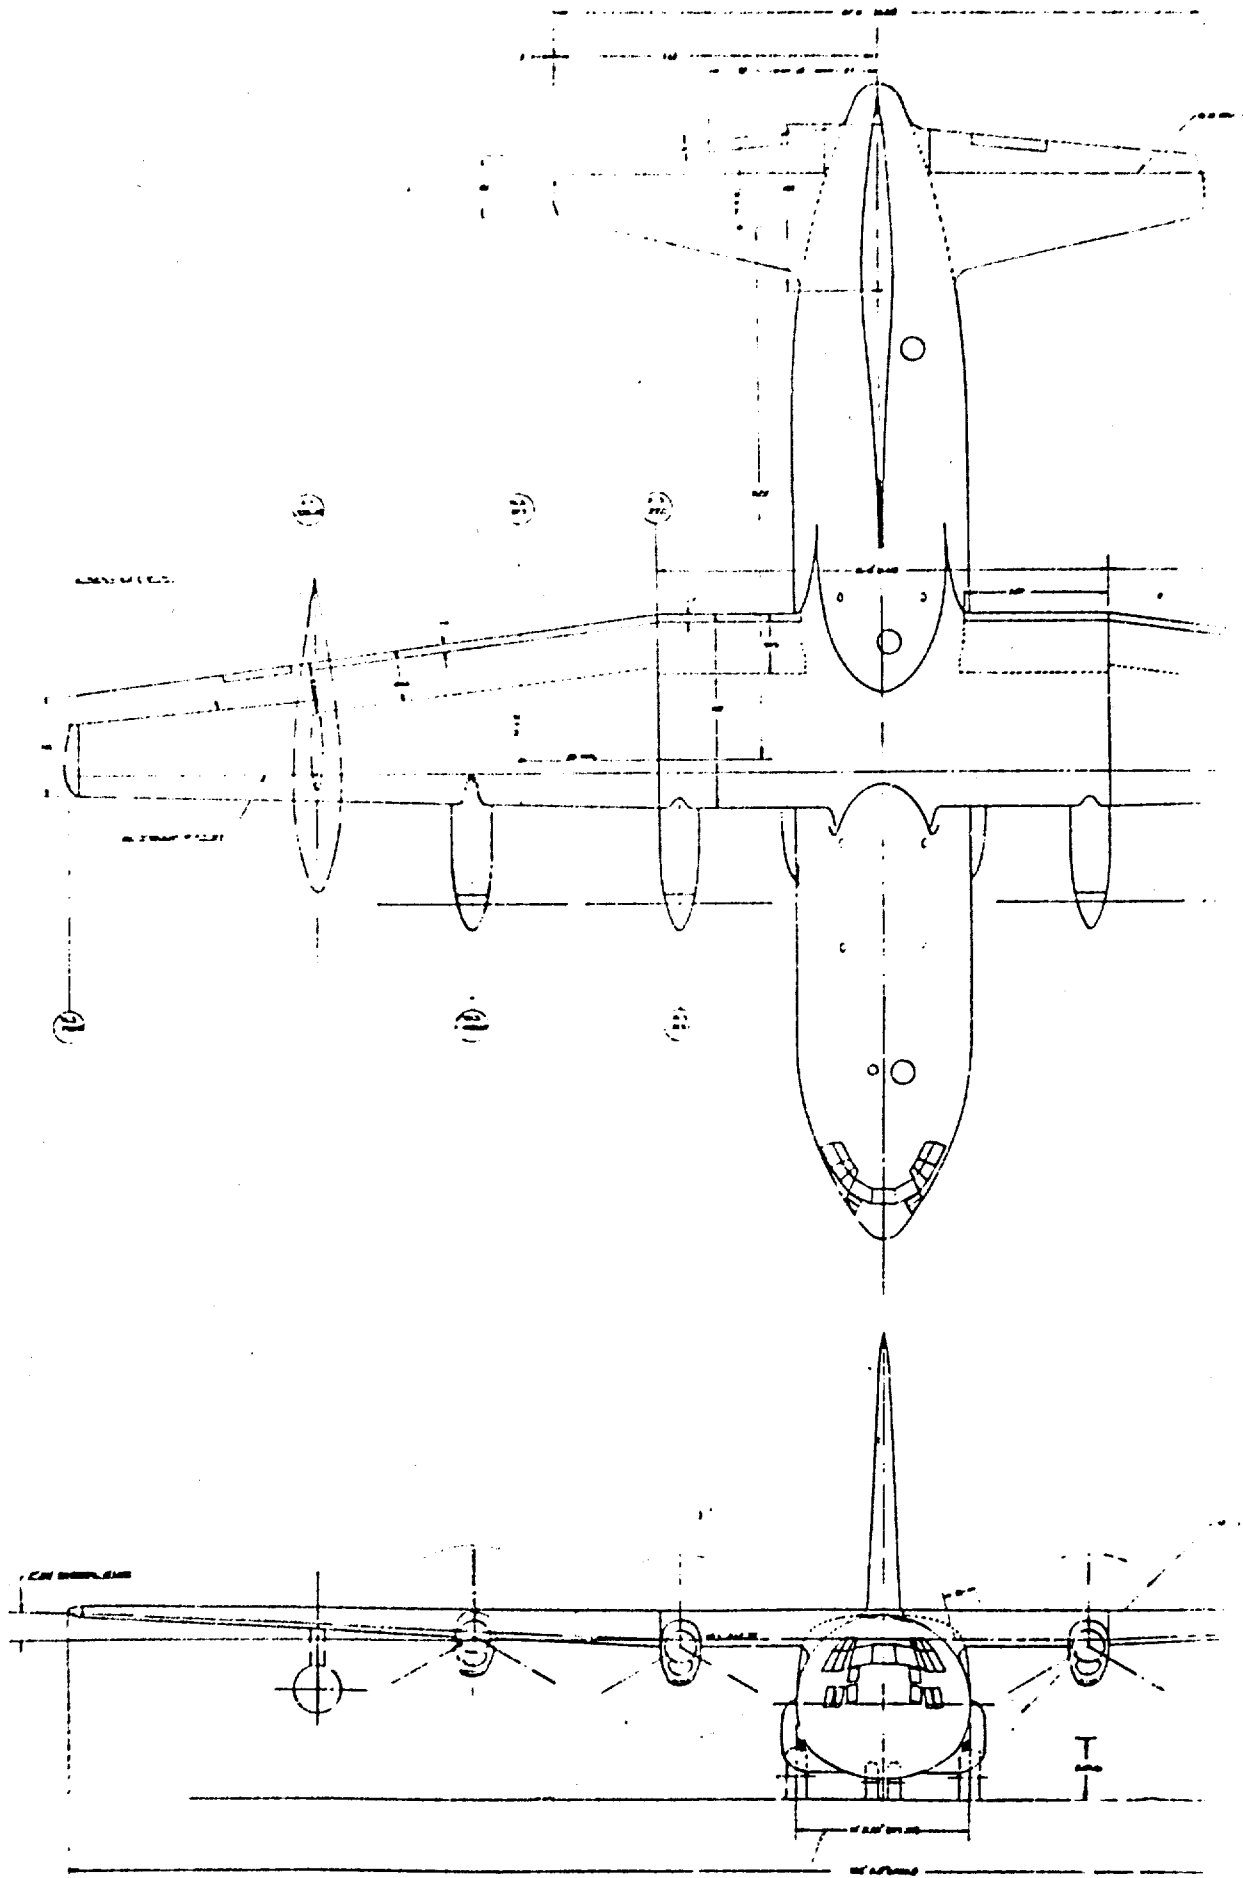

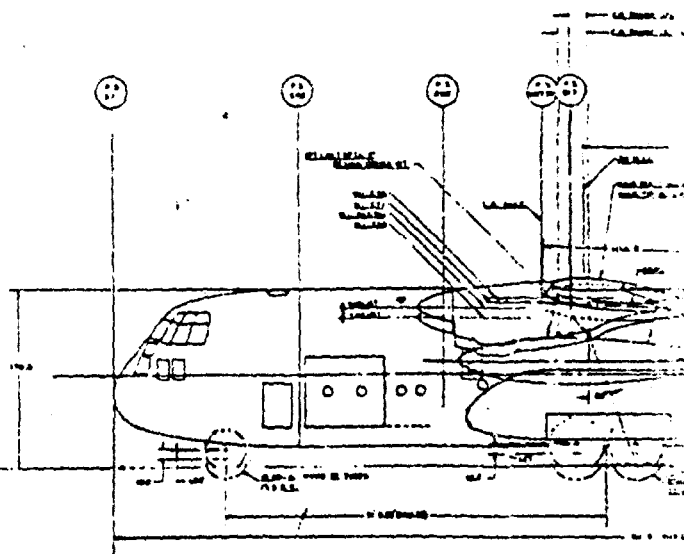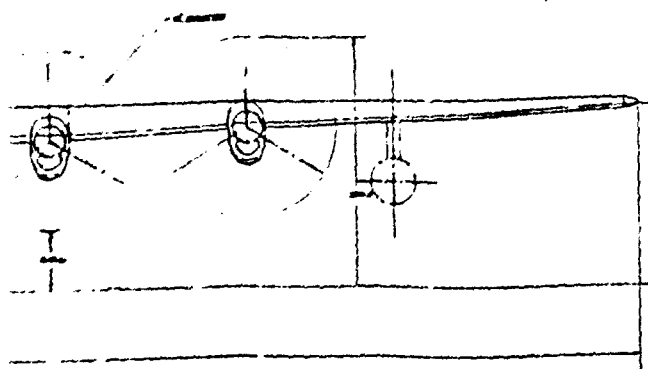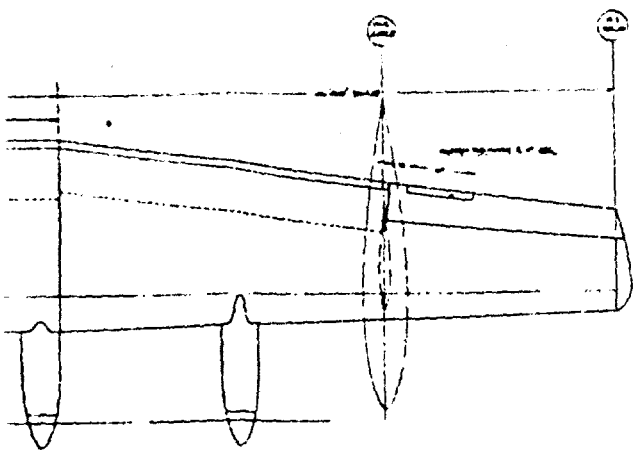

LR


DATA SECTION 101
 DATA SECTION 102
 DATA SECTION 103
 DATA SECTION 104
 DATA SECTION 105
 DATA SECTION 106
 DATA SECTION 107
 DATA SECTION 108
 DATA SECTION 109
 DATA SECTION 110

DATA SECTION 111
 DATA SECTION 112
 DATA SECTION 113
 DATA SECTION 114
 DATA SECTION 115
 DATA SECTION 116
 DATA SECTION 117
 DATA SECTION 118
 DATA SECTION 119
 DATA SECTION 120

DATA SECTION 121
 DATA SECTION 122
 DATA SECTION 123
 DATA SECTION 124
 DATA SECTION 125
 DATA SECTION 126
 DATA SECTION 127
 DATA SECTION 128
 DATA SECTION 129
 DATA SECTION 130

DATA SECTION 131
 DATA SECTION 132
 DATA SECTION 133
 DATA SECTION 134
 DATA SECTION 135
 DATA SECTION 136
 DATA SECTION 137
 DATA SECTION 138
 DATA SECTION 139
 DATA SECTION 140

DATA SECTION 141
 DATA SECTION 142
 DATA SECTION 143
 DATA SECTION 144
 DATA SECTION 145
 DATA SECTION 146
 DATA SECTION 147
 DATA SECTION 148
 DATA SECTION 149
 DATA SECTION 150

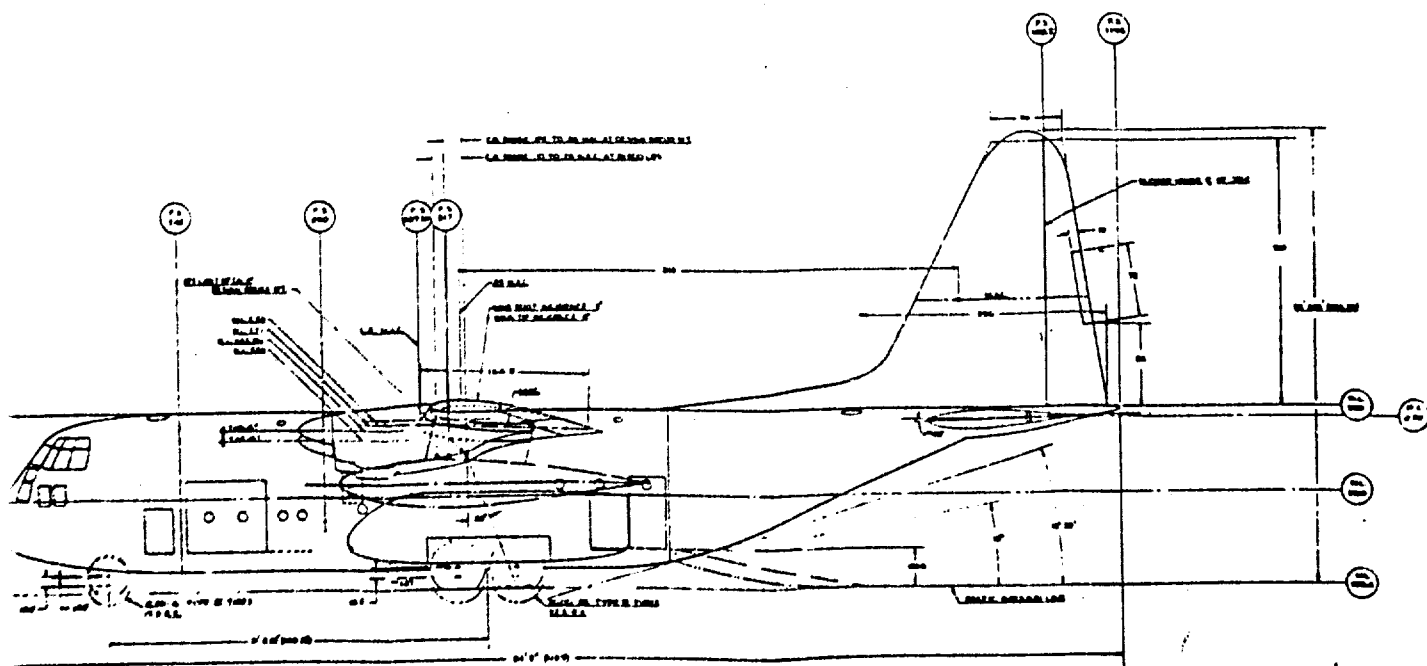

3

DATA SECTION 151
 DATA SECTION 152
 DATA SECTION 153
 DATA SECTION 154
 DATA SECTION 155
 DATA SECTION 156
 DATA SECTION 157
 DATA SECTION 158
 DATA SECTION 159
 DATA SECTION 160

FIG. 1


~~SECRET~~
~~NOFORN~~
REF ID: A68907
DATE: 10-12-2011
TIME: 10:10:10
PAGE: 10
FILE: 10-12-2011
10-12-2011

TWA - SOUTHERN AIRLINES - NEW YORK - MEMPHIS	
7/25/68	1745-1805
7/26/68	1745-1805
7/27/68	1745-1805
7/28/68	1745-1805
7/29/68	1745-1805
7/30/68	1745-1805
7/31/68	1745-1805
8/1/68	1745-1805
8/2/68	1745-1805
8/3/68	1745-1805
8/4/68	1745-1805
8/5/68	1745-1805
8/6/68	1745-1805
8/7/68	1745-1805
8/8/68	1745-1805
8/9/68	1745-1805
8/10/68	1745-1805
8/11/68	1745-1805
8/12/68	1745-1805
8/13/68	1745-1805
8/14/68	1745-1805
8/15/68	1745-1805
8/16/68	1745-1805
8/17/68	1745-1805
8/18/68	1745-1805
8/19/68	1745-1805
8/20/68	1745-1805
8/21/68	1745-1805
8/22/68	1745-1805
8/23/68	1745-1805
8/24/68	1745-1805
8/25/68	1745-1805
8/26/68	1745-1805
8/27/68	1745-1805
8/28/68	1745-1805
8/29/68	1745-1805
8/30/68	1745-1805
8/31/68	1745-1805
9/1/68	1745-1805
9/2/68	1745-1805
9/3/68	1745-1805
9/4/68	1745-1805
9/5/68	1745-1805
9/6/68	1745-1805
9/7/68	1745-1805
9/8/68	1745-1805
9/9/68	1745-1805
9/10/68	1745-1805
9/11/68	1745-1805
9/12/68	1745-1805
9/13/68	1745-1805
9/14/68	1745-1805
9/15/68	1745-1805
9/16/68	1745-1805
9/17/68	1745-1805
9/18/68	1745-1805
9/19/68	1745-1805
9/20/68	1745-1805
9/21/68	1745-1805
9/22/68	1745-1805
9/23/68	1745-1805
9/24/68	1745-1805
9/25/68	1745-1805
9/26/68	1745-1805
9/27/68	1745-1805
9/28/68	1745-1805
9/29/68	1745-1805
9/30/68	1745-1805
10/1/68	1745-1805
10/2/68	1745-1805
10/3/68	1745-1805
10/4/68	1745-1805
10/5/68	1745-1805
10/6/68	1745-1805
10/7/68	1745-1805
10/8/68	1745-1805
10/9/68	1745-1805
10/10/68	1745-1805
10/11/68	1745-1805
10/12/68	1745-1805
10/13/68	1745-1805
10/14/68	1745-1805
10/15/68	1745-1805
10/16/68	1745-1805
10/17/68	1745-1805
10/18/68	1745-1805
10/19/68	1745-1805
10/20/68	1745-1805
10/21/68	1745-1805
10/22/68	1745-1805
10/23/68	1745-1805
10/24/68	1745-1805
10/25/68	1745-1805
10/26/68	1745-1805
10/27/68	1745-1805
10/28/68	1745-1805
10/29/68	1745-1805
10/30/68	1745-1805
10/31/68	1745-1805
11/1/68	1745-1805
11/2/68	1745-1805
11/3/68	1745-1805
11/4/68	1745-1805
11/5/68	1745-1805
11/6/68	1745-1805
11/7/68	1745-1805
11/8/68	1745-1805
11/9/68	1745-1805
11/10/68	1745-1805
11/11/68	1745-1805
11/12/68	1745-1805
11/13/68	1745-1805
11/14/68	1745-1805
11/15/68	1745-1805
11/16/68	1745-1805
11/17/	

1-2-1971 12:00 PM
1-2-1971 12:00 PM

62,819.25
 49,042.50
 119,861.75

1. NAME
 2. DATE
 3. TIME

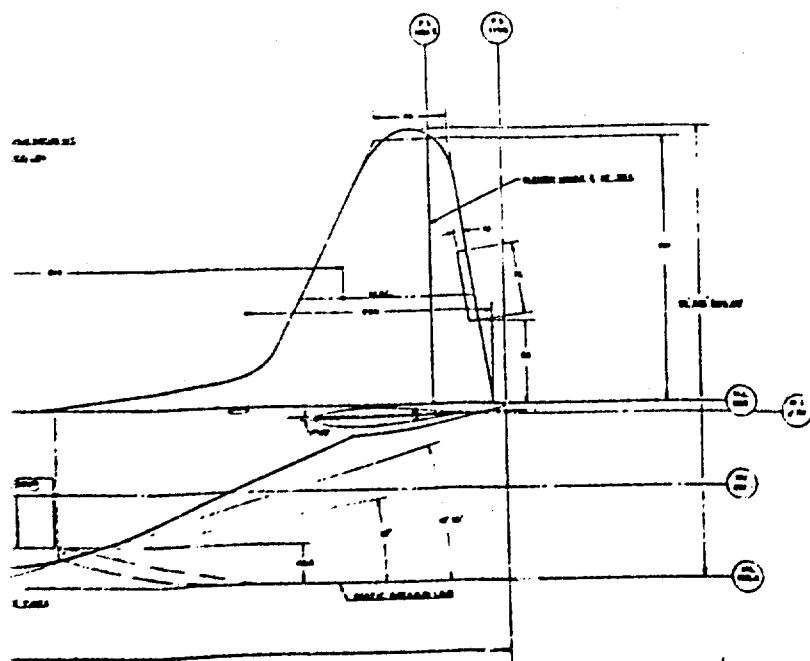

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

TABLE I
BASIC DATA

Wing

Area, S	1744.6 sq.ft.
Span, b	132.6 ft.
Mean Aerodynamic Chord, $\bar{c}$	164.5 in.
Aspect Ratio, A	10.09
Taper Ratio, λ	.52
Dihedral, Γ (Outer Panel)	2.50°
Incidence	
Root, i_r	3.0°
Tip, i_t	0°
Geometric Twist	-3.0°
Airfoil Sections	
Root	NACA 64A-318
Tip	NACA 64A-412
Chords,	
Root to W.S. 220	192 in.
Tip (W.S. 792)	100 in.
Straight Element, 18% c	F.S. 517
Location of .25 $\bar{c}$	F.S. 528.51

Aileron (Each Side)

Area, S_a	55.0 sq.ft.
Mean Chord, $\bar{c}_a$	33.5 in.
Deflection Limits, δ_a	+15°, -25°

~~RESTRICTED~~
~~SECURITY INFORMATION~~

Page 5

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

Tab Area, S_{at}	2.9 sq.ft.
Tab Mean Chord, $\bar{c}_{at}$	6.5 in.
Tab Deflection Limits, δ_{at}	$\pm 20^\circ$

Wing Flaps (Each Side)

Type	Lockheed-Fowler
Area, S_f	171.0 sq.ft.
Mean Chord	
Outboard Flap	49.5 in.
Center Section Flap	57.5 in.
Maximum Deflection, δ_f	36°

Horizontal Tail

Area, S_t	495.6 sq.ft.
Span, b_t	52.7 ft.
Mean Chord, $\bar{c}_t$	122. in.
Aspect Ratio, A_t	5.59
Taper Ratio, λ_t	.374
Airfoil Section	Inverted NACA 23012
Chords	
Root (Sta. 0)	166 in.
Tip (Sta. 313)	62 in.
Straight Element, 70% chord	F.S. 1107.0
Location of .25 $\bar{c}_t$	F.S. 1052.1
Stabilizer incidence, i_s	-1.75°
Tail Length, l_t (.25 $\bar{c}$ to .25 $\bar{c}_t$)	523.6 in.
Tail Volume, $\bar{V}_t$	.903

~~RESTRICTED~~

~~RESTRICTED~~

~~SECURITY INFORMATION~~

Page 6

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

Elevator

Area, S_e	114.9 sq.ft.
Mean Chord, $\bar{c}_e$	33.5 in.
Deflection Limits, δ_e	+15°, -40°
Tab Area, S_{e_t}	15.3 sq.ft.
Tab Mean Chord, $\bar{c}_{e_t}$	11.0 in.
Tab Deflection Limits, δ_{e_t}	+30°

Vertical Tail

Area, S_v	300.0 sq.ft.
Span, b_v	23.3 ft.
Aspect Ratio, A_v	1.81
Mean Chord, $\bar{c}_v$	177.8 in.
Taper Ratio, λ_v	.296
Airfoil Section	NACA 64 A-015
Chords	
Root	250. in.
Tip	74. in.
Straight Element, 75% Chord	F.S. 1128.5
Location of .25 $\bar{c}_v$	F.S. 1039.6
Tail Volume, $\bar{V}_v$	.0552

Rudder

Area, S_r	75.0 sq.ft.
Mean Chord, $\bar{c}_r$	44.5 in.
Deflection Limits, δ_r	+35.°
Tab Area, S_{r_t}	5.0 sq.ft.

~~RESTRICTED~~

~~RESTRICTED~~

~~SECURITY INFORMATION~~

Page 7

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

Tab Mean Chord, $\bar{c}_{r_t}$ 10.0 in.

Tab Deflection Limits, δ_{r_t} (for trim) $\pm 25^\circ$

Maximum Lift Coefficients

Clean Airplane 1.60

Take-off Flaps 2.00

Landing Flaps 2.60

Minimum Lift Coefficients

Clean Airplane -1.0

Design Weights and Load Factors

YC-130

Design Gross Weight 110,500 lbs.

Max. Load Factors, $V \leq V_H$ +3.0, -1.0

Max. Load Factors at V_D +2.5, -0.75

Max. Take-Off Weight 127,200 lbs.

Max. Load Factors 2.0

Design Landing Weight 99000#

Max. Alt. Land. Wt. (8 ft/sec. sink speed) 107500 lbs.

C-130A

Design Gross Weight 108,000 lbs.

Max. Load Factors, $V \leq V_H$ +3.0, -1.0

Max. Load Factors at V_D +2.5, -0.75

Max. Take-Off Weight 124,200 lbs.

Max. Load Factors 2.0

Design Landing Weight 96000#

Max. Alt. Landing Wt. 105,000 lbs.

(8 ft/sec. sinking speed)

~~RESTRICTED~~

~~SECURITY INFORMATION~~

~~RESTRICTED~~
~~SECURITY INFORMATION~~

Page 8

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

Design Velocities (Sea Level)

YC-130

Landing Flap Extension	168 knots
Take-Off Flap Extension	183 "
Landing Gear Door Opening	168 "
Cargo Door Opening	130 "
Level Flight	290 "
Dive	348 "

C-130A

Landing Flap Extension	145 knots
Take-Off Flap Extension	183 "
Landing Gear Door Opening	168 "
Cargo Door Opening	130 "
Level Flight	287 "
Dive	345 "

~~RESTRICTED~~
~~SECURITY INFORMATION~~

PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 9
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

SPEED SUMMARY

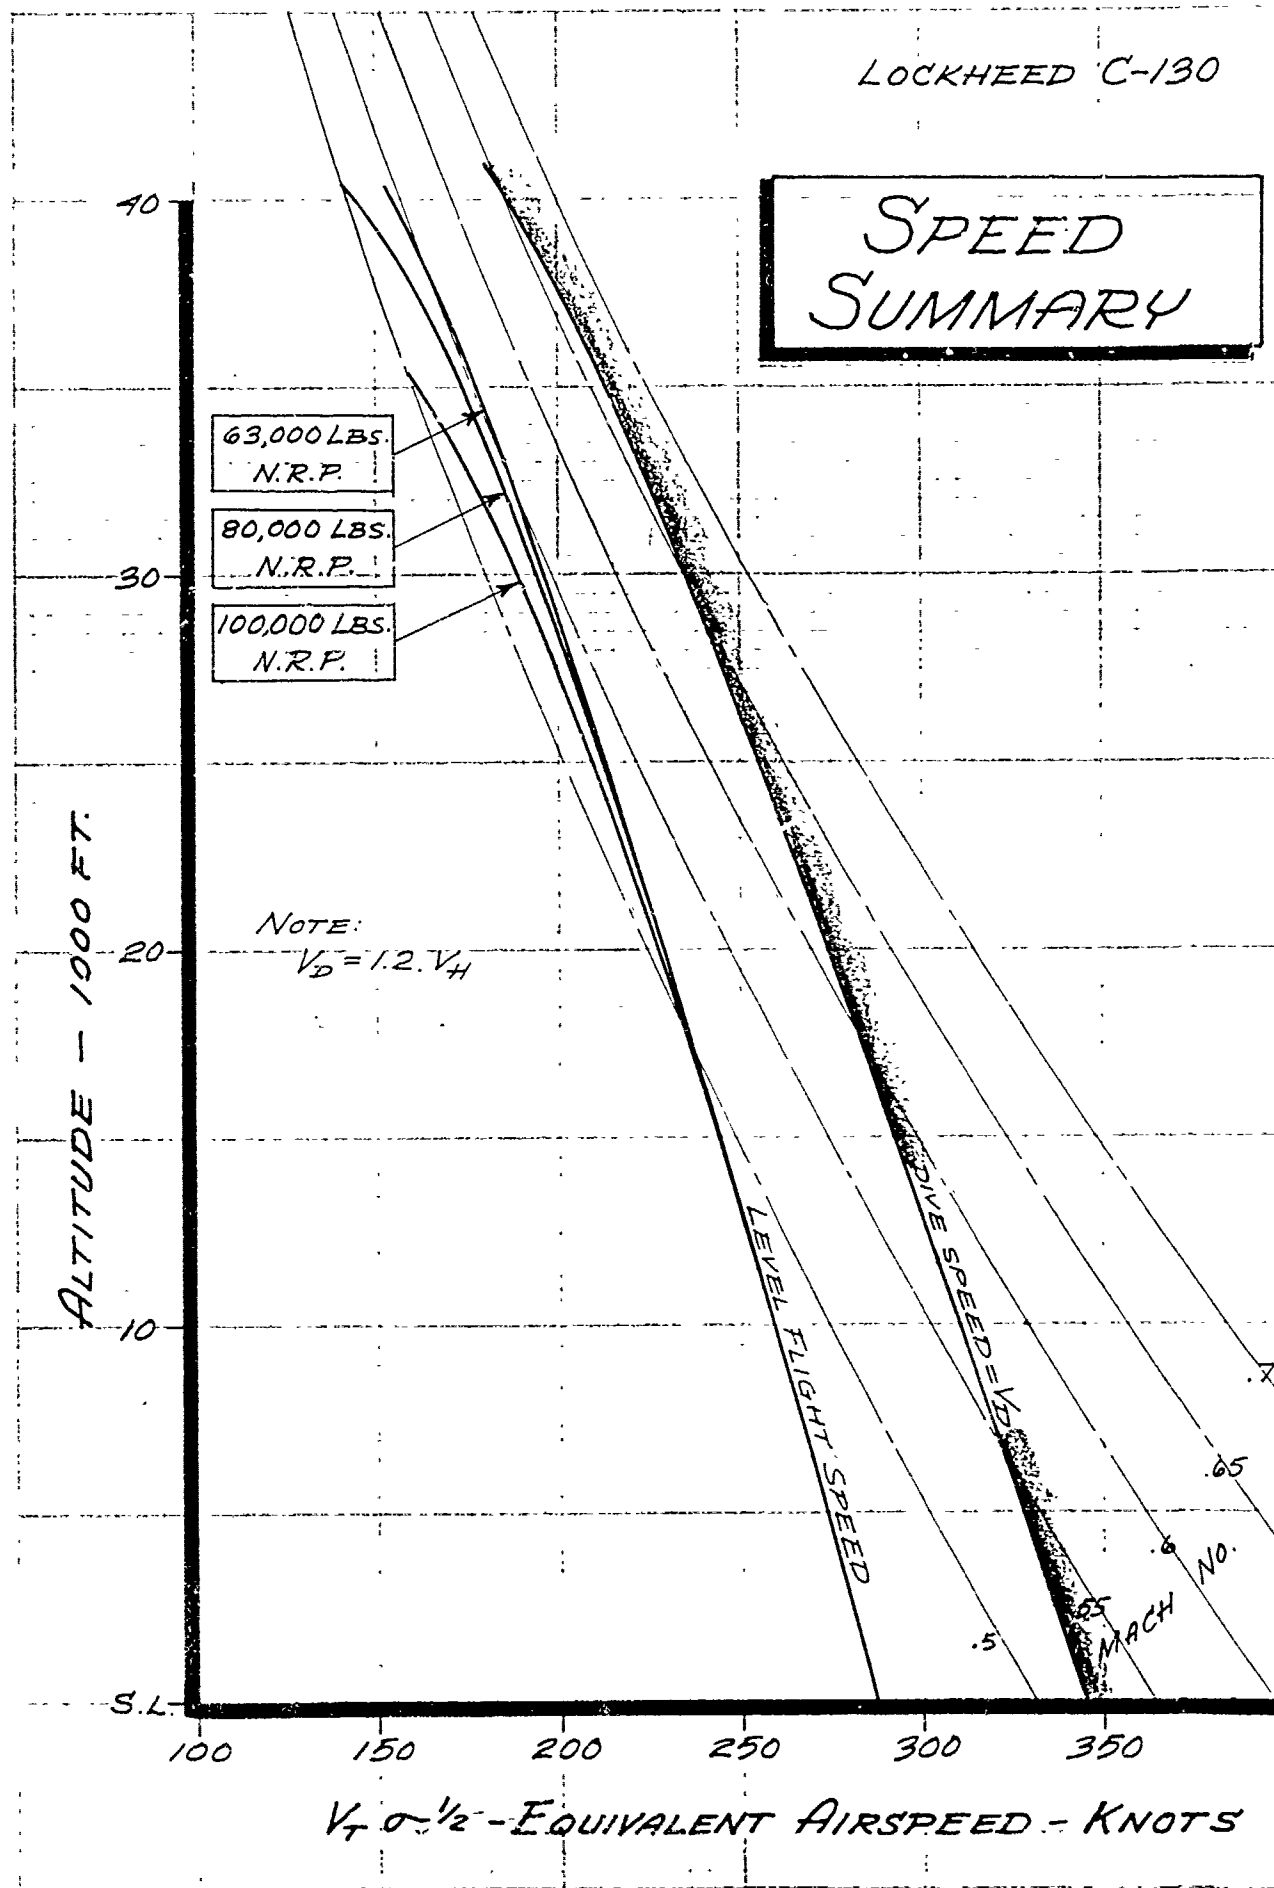


FIG. 2

LOCKHEED YC-130

MILITARY AND NORMAL
RATED POWER AT SEVERAL
ALTITUDES

FOUR ENGINES OPERATING

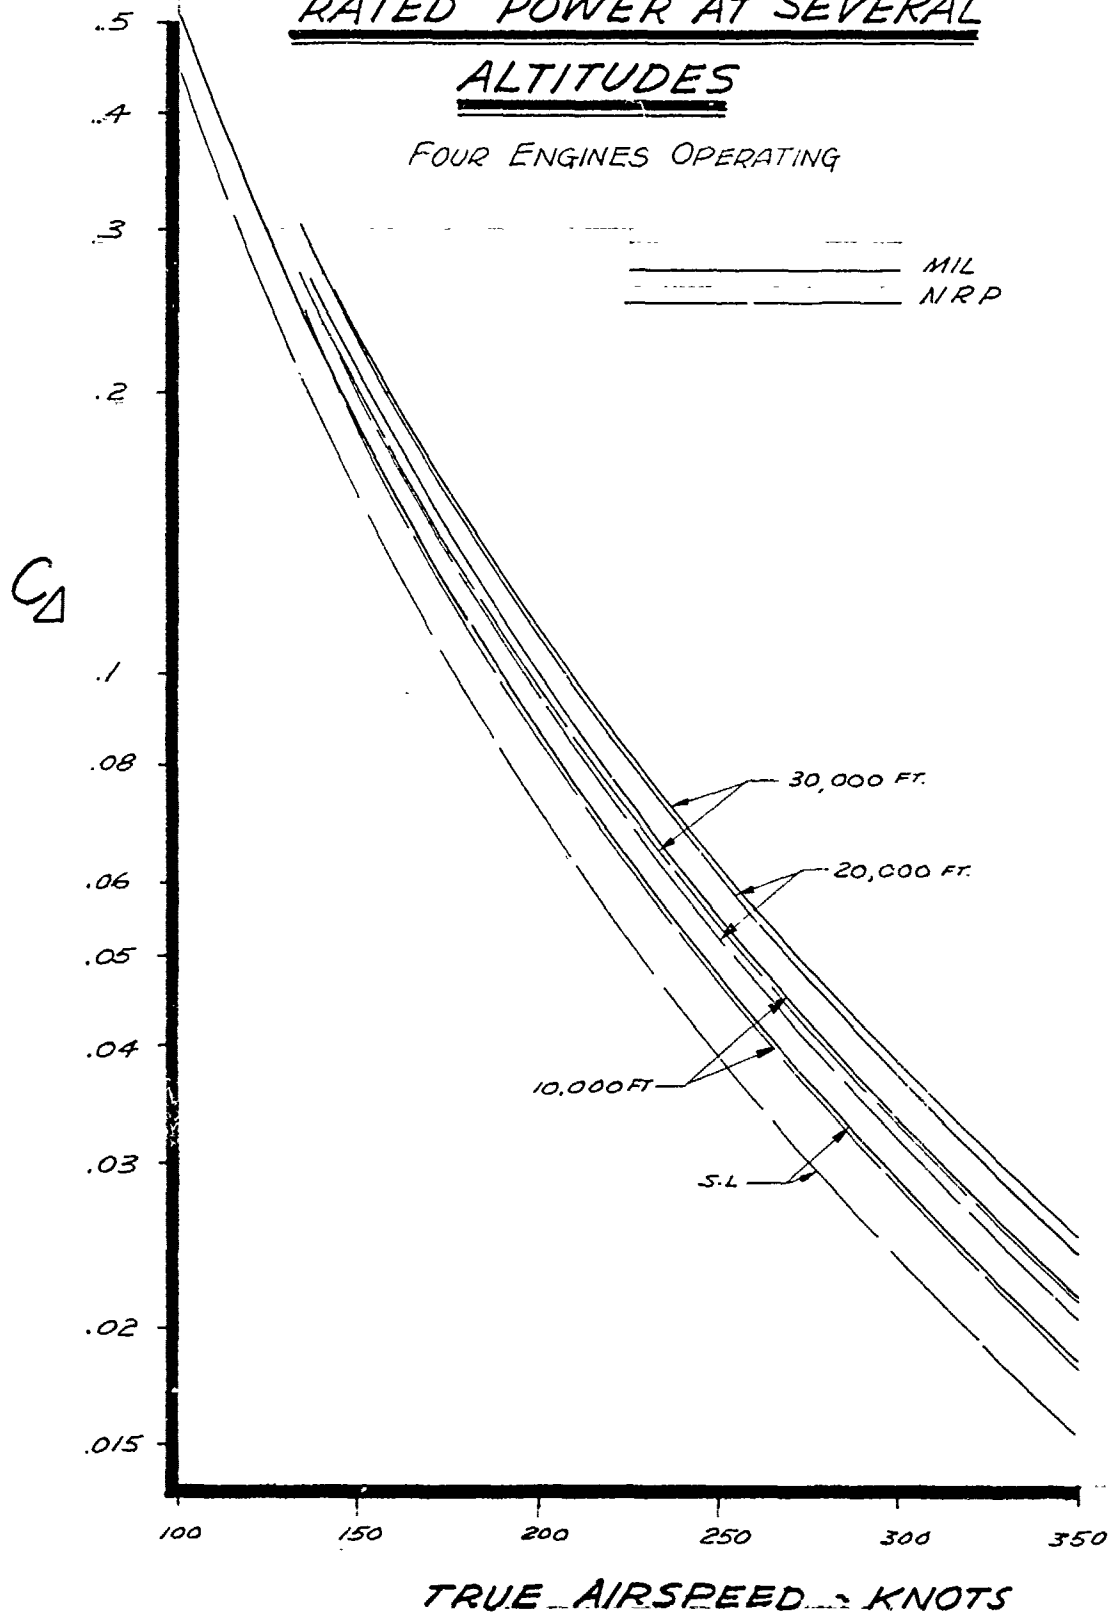


Fig 3

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

TABLE II

AERODYNAMIC SIGN CONVENTIONS

Item:	Positive When:
Lift, $L (C_L)$	Up
Drag, $D (C_D)$	Aft
Thrust, $T (C_A = \frac{\sum T}{q S})$	Forward
Pitching Moment, $M (C_m)$	Nose Up
Angle of Attack, α	Nose Up
Side Force, $Y (C_y)$	Right
Yawing Moment, $N (C_n)$	Nose Right
Angle of Yaw, ψ	Nose Right
Rolling Moment, $L (C_l)$	Right Wing Down
Elevator Angle, δ_e	Trailing Edge Down
Rudder Angle, δ_r	Trailing Edge Left
Aileron Angle, δ_a	Trailing Edge Down

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

LONGITUDINAL AERODYNAMIC CHARACTERISTICS

Aerodynamic data in pitch for the airplane and the airplane build-up are obtained principally from the low-and-high-speed wind tunnel tests of refs. 1, 2 and 3. Data on individual components not tested by Lockheed are obtained largely from publications of the NACA, specific references being noted as used. The airplane is conventional in all geometric and aerodynamic respects, presenting no unusual problems not capable of solution by standard methods.

AIRFOIL SECTION DATA

Airfoil section data for all lifting surfaces, together with effects of deflection of flaps or control surfaces are presented in figs. 4 through 11. These data are obtained from NACA publications, refs. 8, 9, 11-13, 15-21 and unpublished tests of the Lockheed XP2V-1.

AIRPLANE LIFT CHARACTERISTICS

Low Speed. -- Low speed lift characteristics for the airplane build-up are presented in figs. 12 and 13. These data are determined directly from the low speed wind tunnel tests, corrected for Reynold's No. effects.

Power Effects. -- Effects of power on the lift characteristics of the airplane with and without horizontal tail are given in figs. 15 through 19. These data are determined by interpolation and extrapolation from low speed wind tunnel tests. It will be noted that both lift curve slope and maximum attainable lift coefficient are increased with increasing power coefficient. The manner of obtaining

~~RESTRICTED~~
SECURITY INFORMATION

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

power effects is discussed in the section on pitching moment characteristics below.

Mach Effects. -- Effects of compressibility on airplane build-up lift characteristics are shown in fig. 14. High speed wind tunnel tests show that all configurations which include the wing have a lift curve slope variation with Mach No. which is identical on a percentage basis, and that the incremental change in zero lift angle of attack is the same. Thus, these two simple curves are sufficient to describe the Mach effects on lift. These curves apply only to power-off cases; power effects should be ascertained from the low speed curves and added unchanged.

AIRPLANE DRAG CHARACTERISTICS

Low Speed. -- Drag characteristics for the airplane build-up are presented in figs. 20 and 21. These data are determined from the low speed wind tunnel tests, corrected for effects of Reynold's No. on lift.

Mach Effects. -- Effects of compressibility on the drag of the airplane in four stages of build-up are shown in figs. 22 and 23. Data are presented in the form of drag coefficient increments at several values of lift coefficient, to be added to low speed drag. These curves are obtained from an analysis of the low and high speed wind tunnel data.

AIRPLANE PITCHING MOMENT CHARACTERISTICS

Low Speed. -- Pitching moment characteristics for the airplane build-up are presented in figs. 24, 25 and 26. It is noted that the addition of the vertical tail to the wing - fuselage combination adds

~~RESTRICTED~~

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

an appreciable and approximately constant, nose-down increment which will contribute to fuselage bending in the same manner as horizontal tail load. Additional configurations tested, for which no data are presented, include pylon tanks on and cargo doors in various positions. In testing with the complete airplane, addition of the pylon tanks caused a nose-down trim shift of $\Delta C_m = -.016$ while opening the upper cargo door caused a nose-up trim shift of $\Delta C_m = +.014$ and the lower, or ramp door caused a similar shift of approximately $\Delta C_m = +.0015$ per degree of door opening.

Mach Effects. -- Pitching moment coefficient curves are plotted for several Mach Numbers for each of several configurations in the airplane build-up, and presented in figs. 27 through 31.

Power Effects. -- Wind tunnel tests with power were made at very low tunnel speeds to enable attainment of large power coefficients with the model motors used. Due to the very low Reynold's Numbers of such tests, the absolute magnitude of the results are not deemed to be as trustworthy as those run at higher speeds. The incremental effects due to power are considered to be entirely reliable, and are used by adding them to proper basic power-off test results from normal tunnel speed runs. This procedure has been followed in the analysis of all power-on data presented herein.

Effects of power-on airplane pitching moment characteristics with and without horizontal tail and for various flap settings are presented in figs. 32 through 36. It will be noted that the effects of power are destabilizing for both configurations and all flap settings.

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

These power effects are absolute in value with respect to speed; to determine pitching moment at high speeds, the power-off value should first be ascertained for the proper Mach No. and an increment due to power obtained from these low speed curves to be added.

ELEVATOR CHARACTERISTICS

Elevator effectiveness is given in fig. 37, showing change in airplane pitching moment at constant lift coefficient. Values are presented for several lift coefficients and for flaps retracted and extended. Effects of Mach No. on elevator effectiveness are given in fig. 38.

Elevator hinge moment data are presented in figs. 39 and 40 for flaps extended and retracted. Values are given in each case for airplane angles of attack of zero and six degrees. From elevator floating characteristics, it has been ascertained that hinge moment for angles of attack greater than six degrees is the same as at six degrees; all variation of hinge moment with angle of attack is for angles less than six degrees, as noted on the figures, for all flap positions. Characteristics of the control and boost system are shown in figs. 77, 78 and 79, including a plot of the variation of pilot force with elevator hinge moment.

PREPARED BY R.L.D.
 DATE 11-7-51
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 16
 MODEL C-130
 REPORT NO. 9062

TR 824 8903

LOCKHEED C-130 WING AIRFOIL SECTION CHARACTERISTICS

ROOT G44318
 TIP G44412

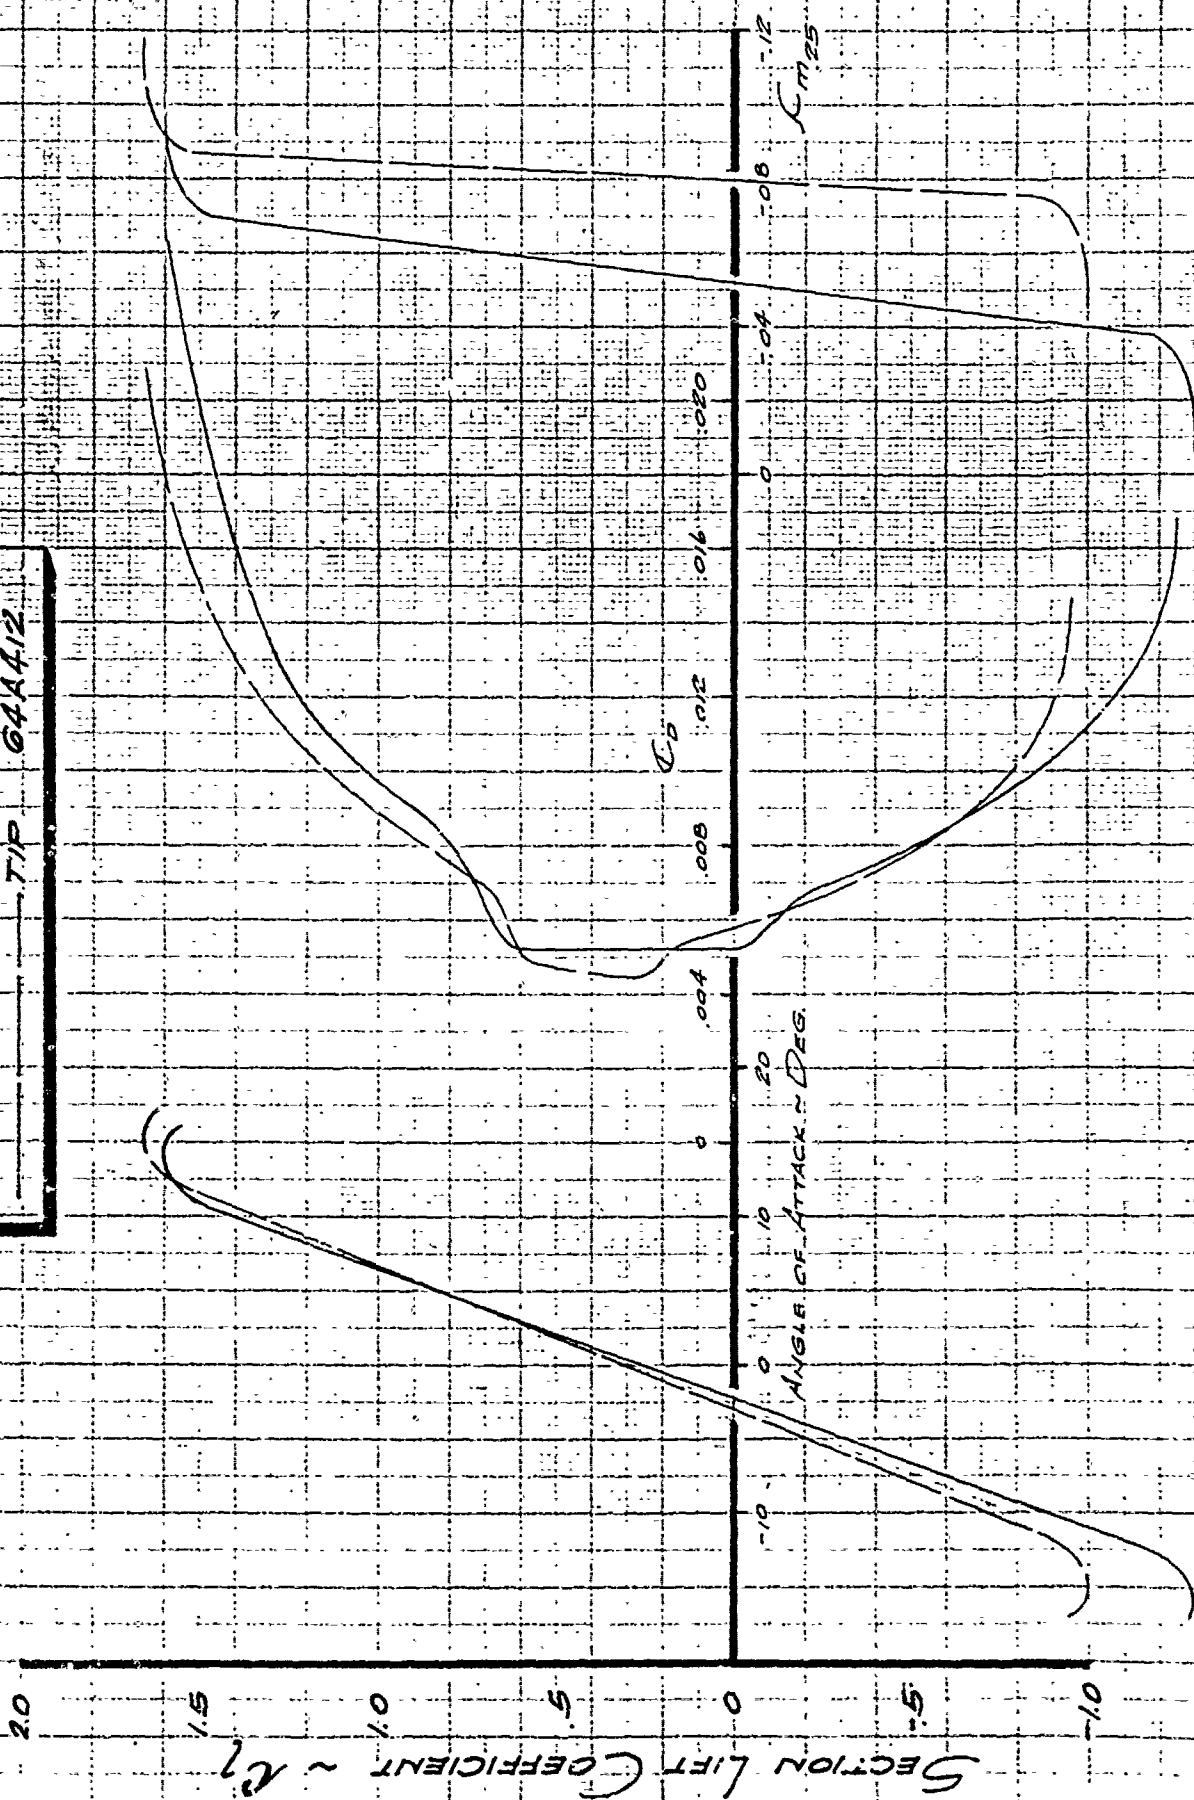


FIG. 4


PREPARED BY R.L.D.
DATE 2-7-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 17
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

WING AIRFOIL SECTION LIFT CHARACTERISTICS
WITH VARIOUS FLAP EXTENSIONS

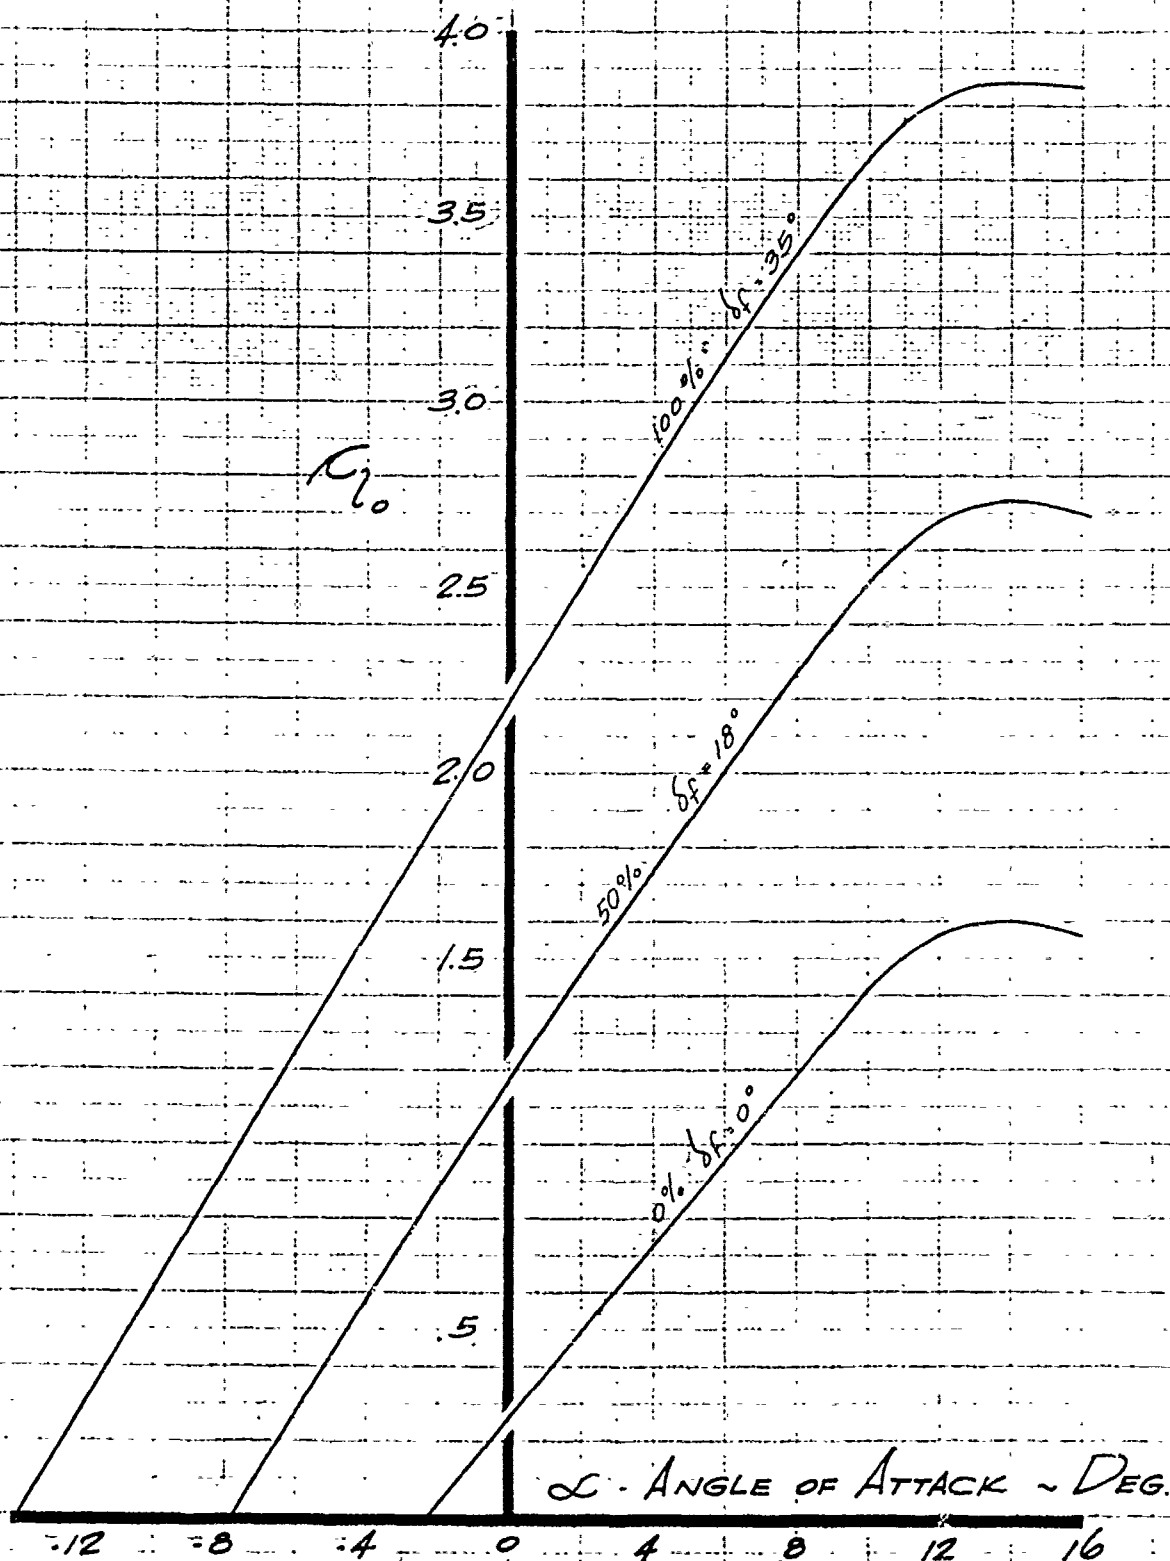

PREPARED BY R.L.D.
DATE 2-7-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 18
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130
WING AIRFOIL SECTION DRAG CHARACTERISTICS
WITH
VARIOUS FLAP EXTENSIONS

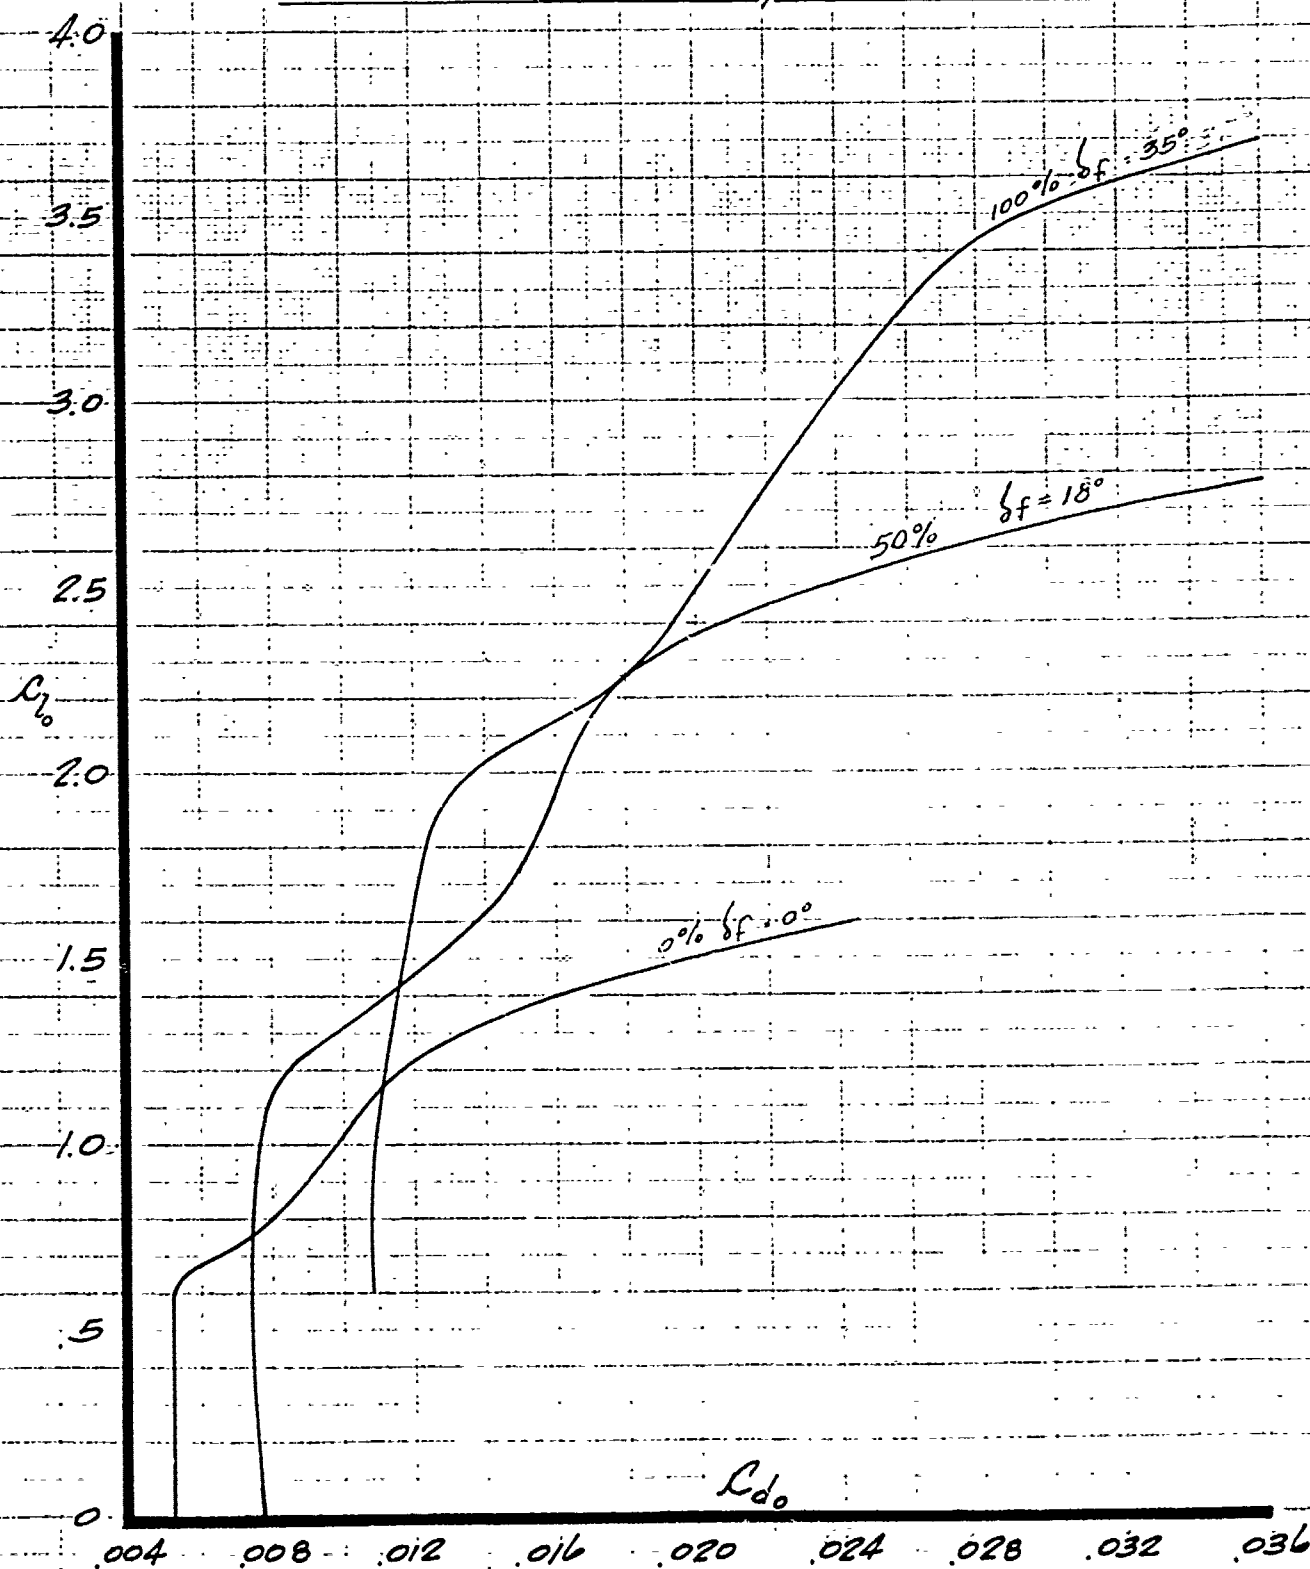


Fig. 6

PREPARED BY RLD
DATE 2-7-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 19
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

WING AIRFOIL SECTION PITCHING MOMENT
CHARACTERISTICS WITH VARIOUS FLAP
EXTENSIONS

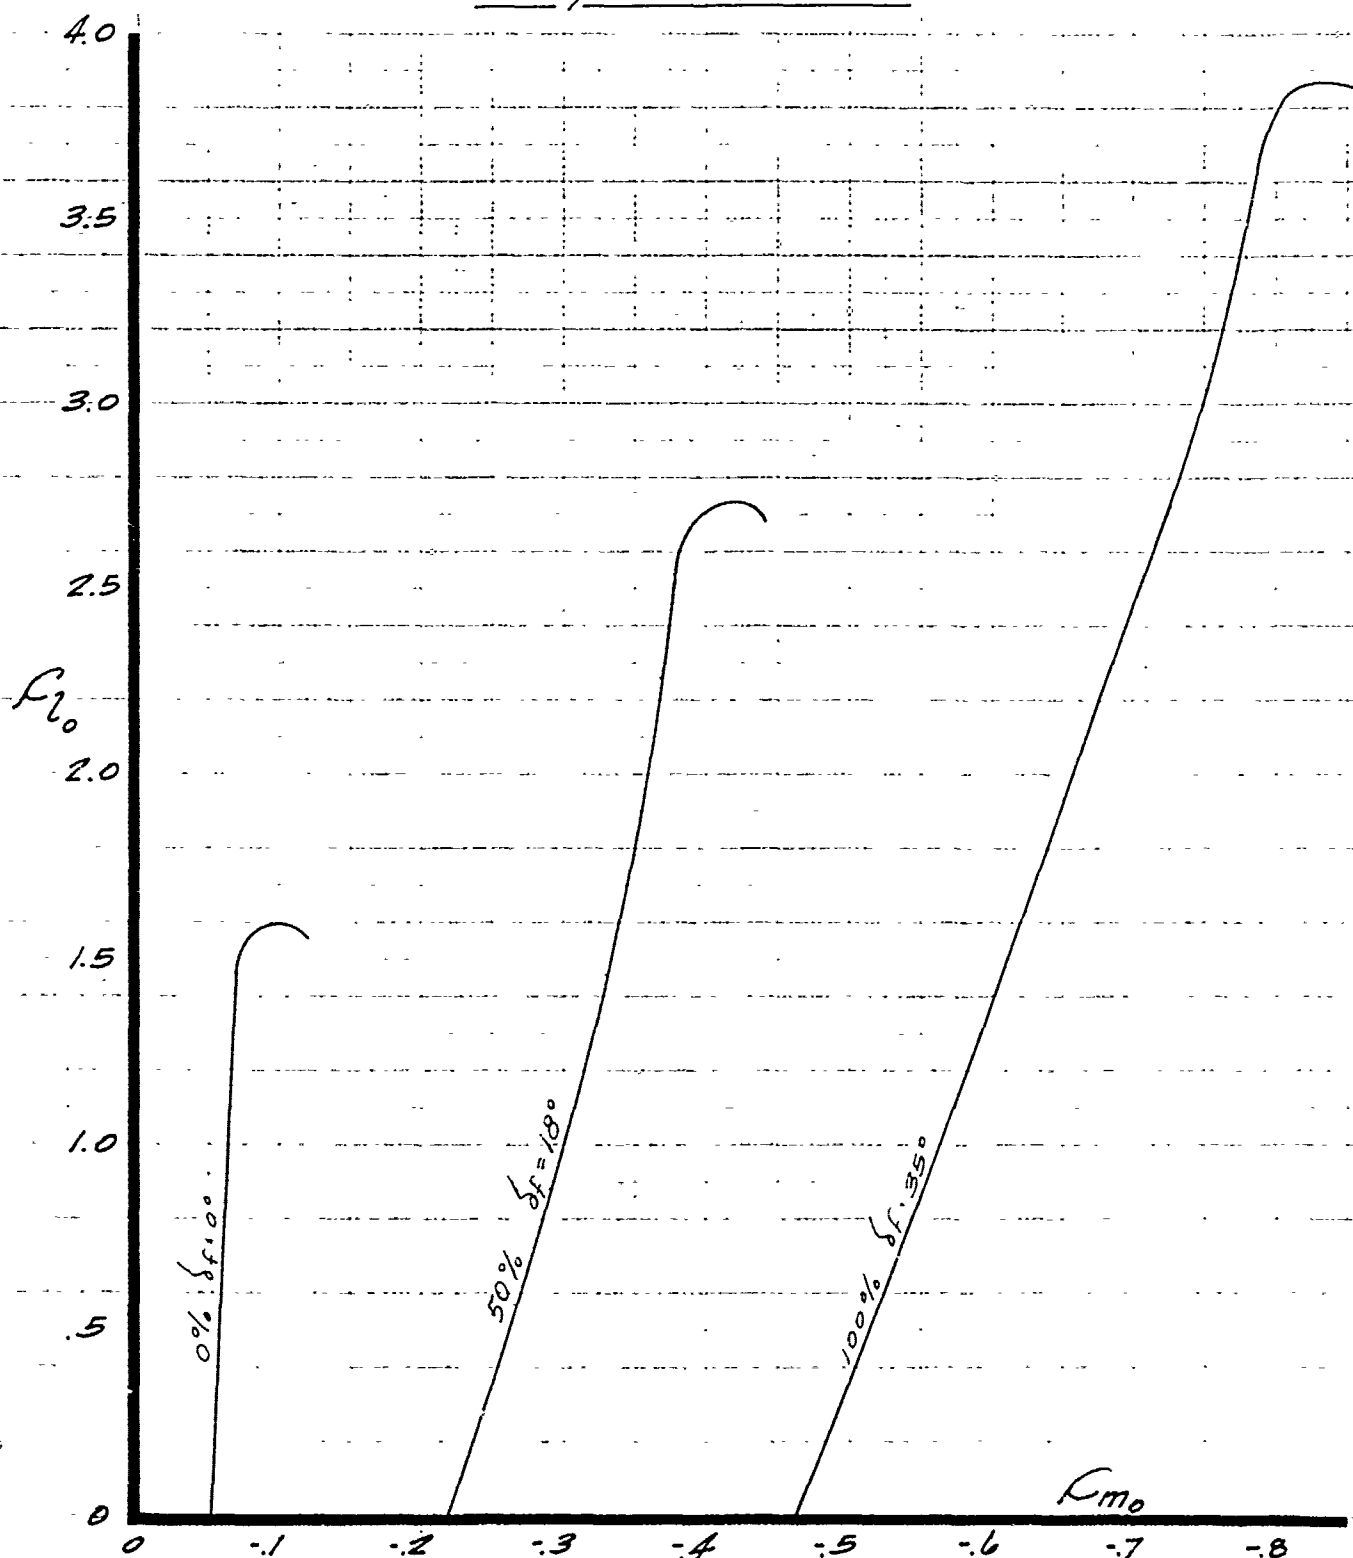


FIG. 7

PREPARED BY _____
DATE _____
CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION

PAGE 20
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

HORIZONTAL TAIL AIRFOIL SECTION CHARACTERISTICS

NACA 23012
INVERTED

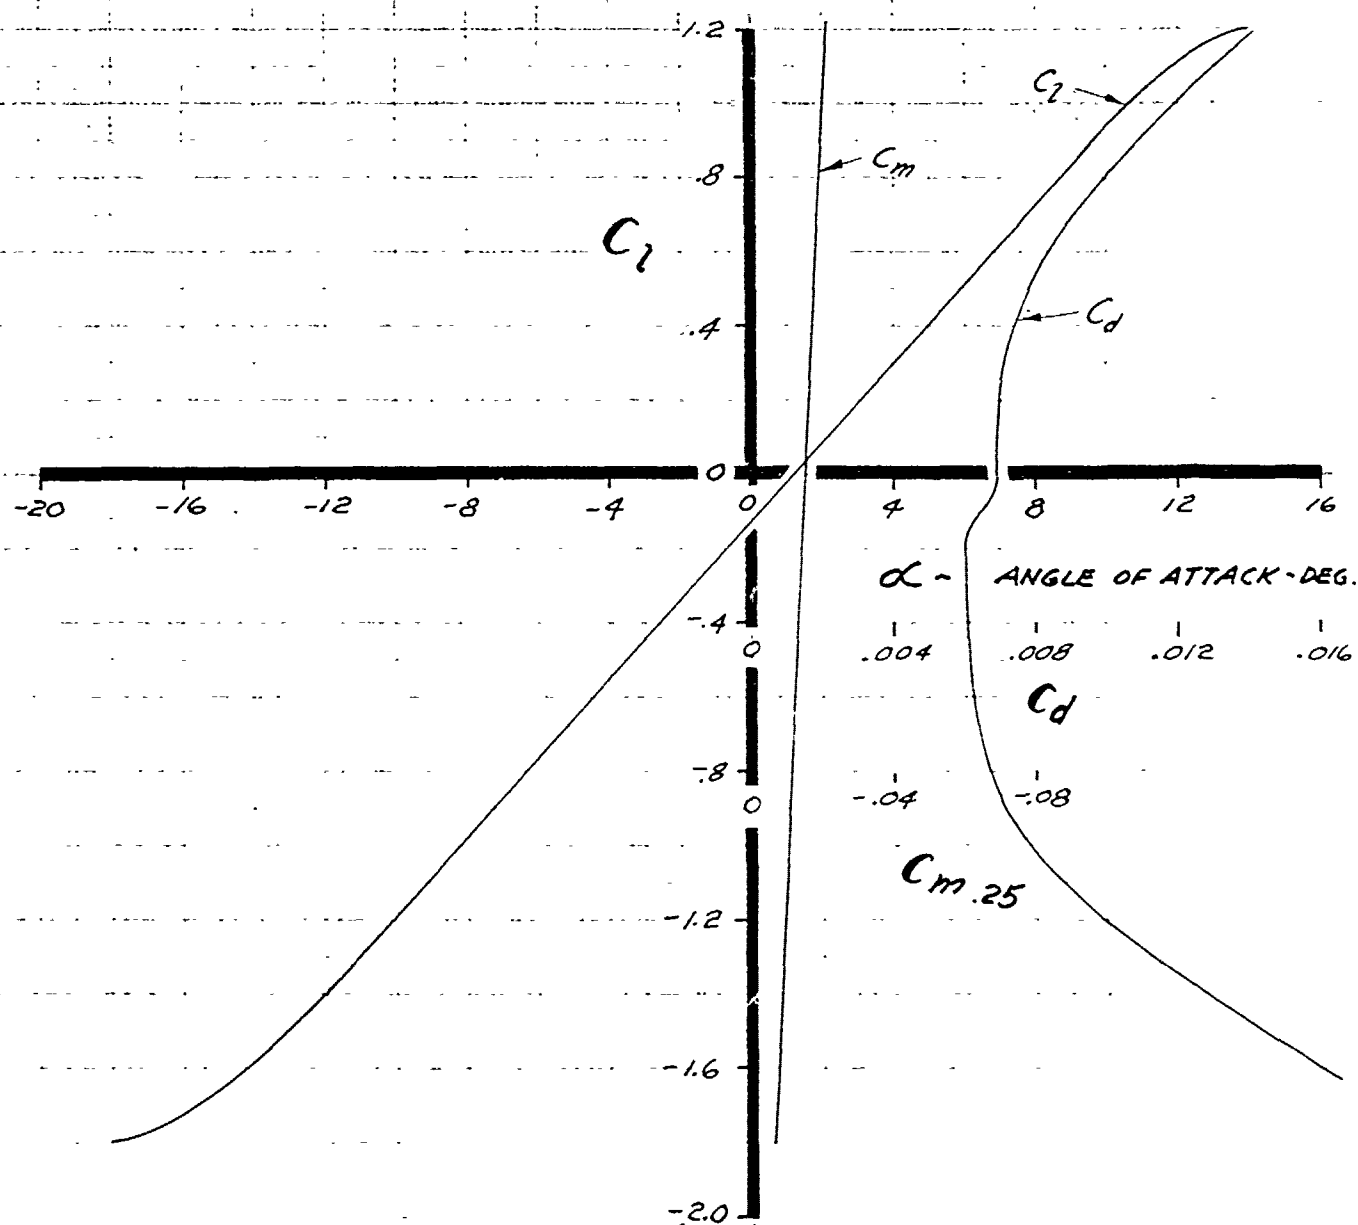


PREPARED BY W. H. F.
 DATE 11-1-55
 CHECKED BY W. H. F.

LOCKHEED AIRCRAFT CORPORATION

PAGE 21
 MODEL C-130
 REPORT NO 9062

LOCKHEED C-130
HORIZONTAL TAIL AIRFOIL SECTION
PITCH CHARACTERISTICS DUE TO
ELEVATOR DEFLECTION

LOW SPEED

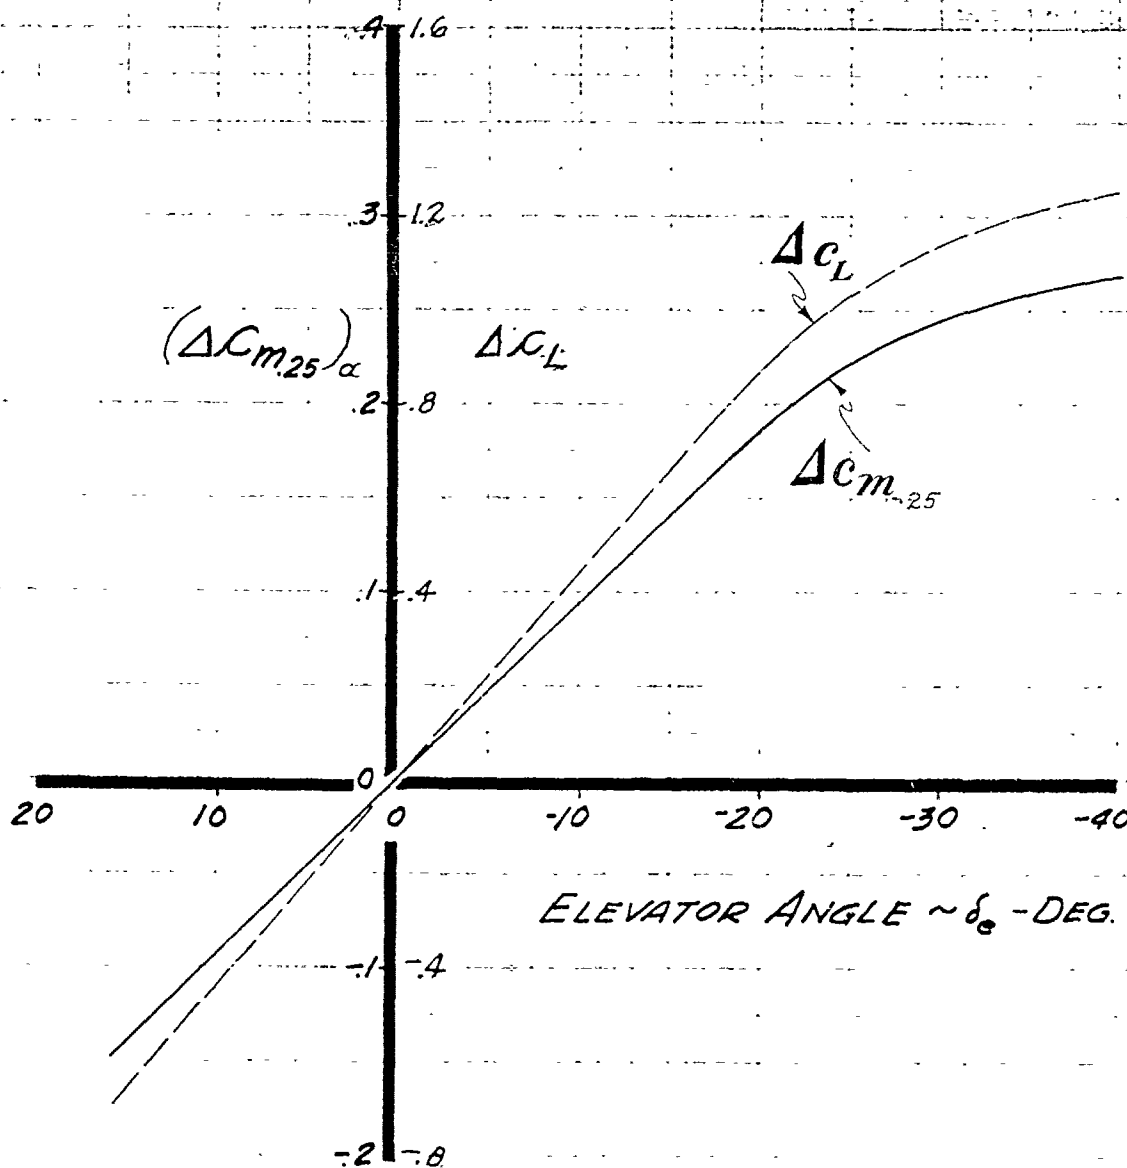

ELEVATOR ANGLE $\sim \delta_e$ - DEG.

PREPARED BY R.L.D.
 DATE 11-7-51
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 22
 MODEL C-130
 REPORT NO 9062

TR 824 11-903

LOCKHEED C-130

VERTICAL TAIL AIRFOIL

SECTION CHARACTERISTICS

NACA 64A015 AIRFOIL

$C_{m_{25}} = 0$

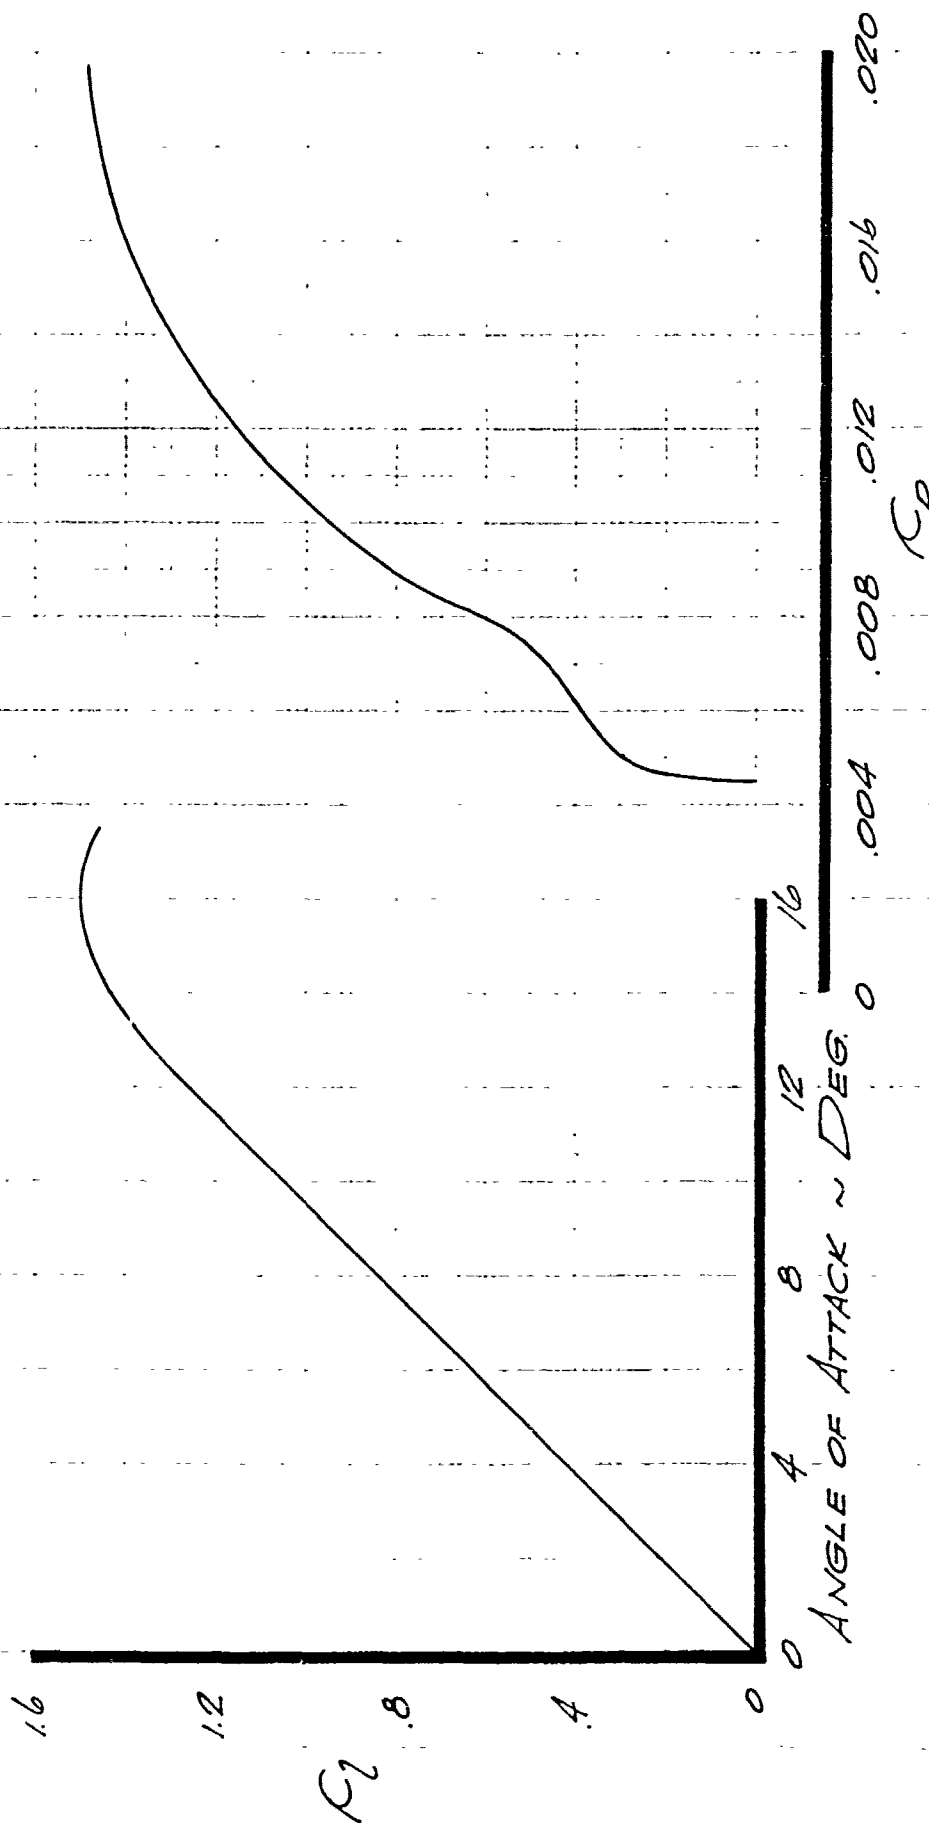


Fig. 10

PREPARED BY R.L.D.
 DATE 1-3-52
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 23
 MODEL C-130
 REPORT NO 9052

LOCKHEED C-130

EFFECT OF AILERON DEFLECTION ON WING AIRFOIL SECTION CHARACTERISTICS

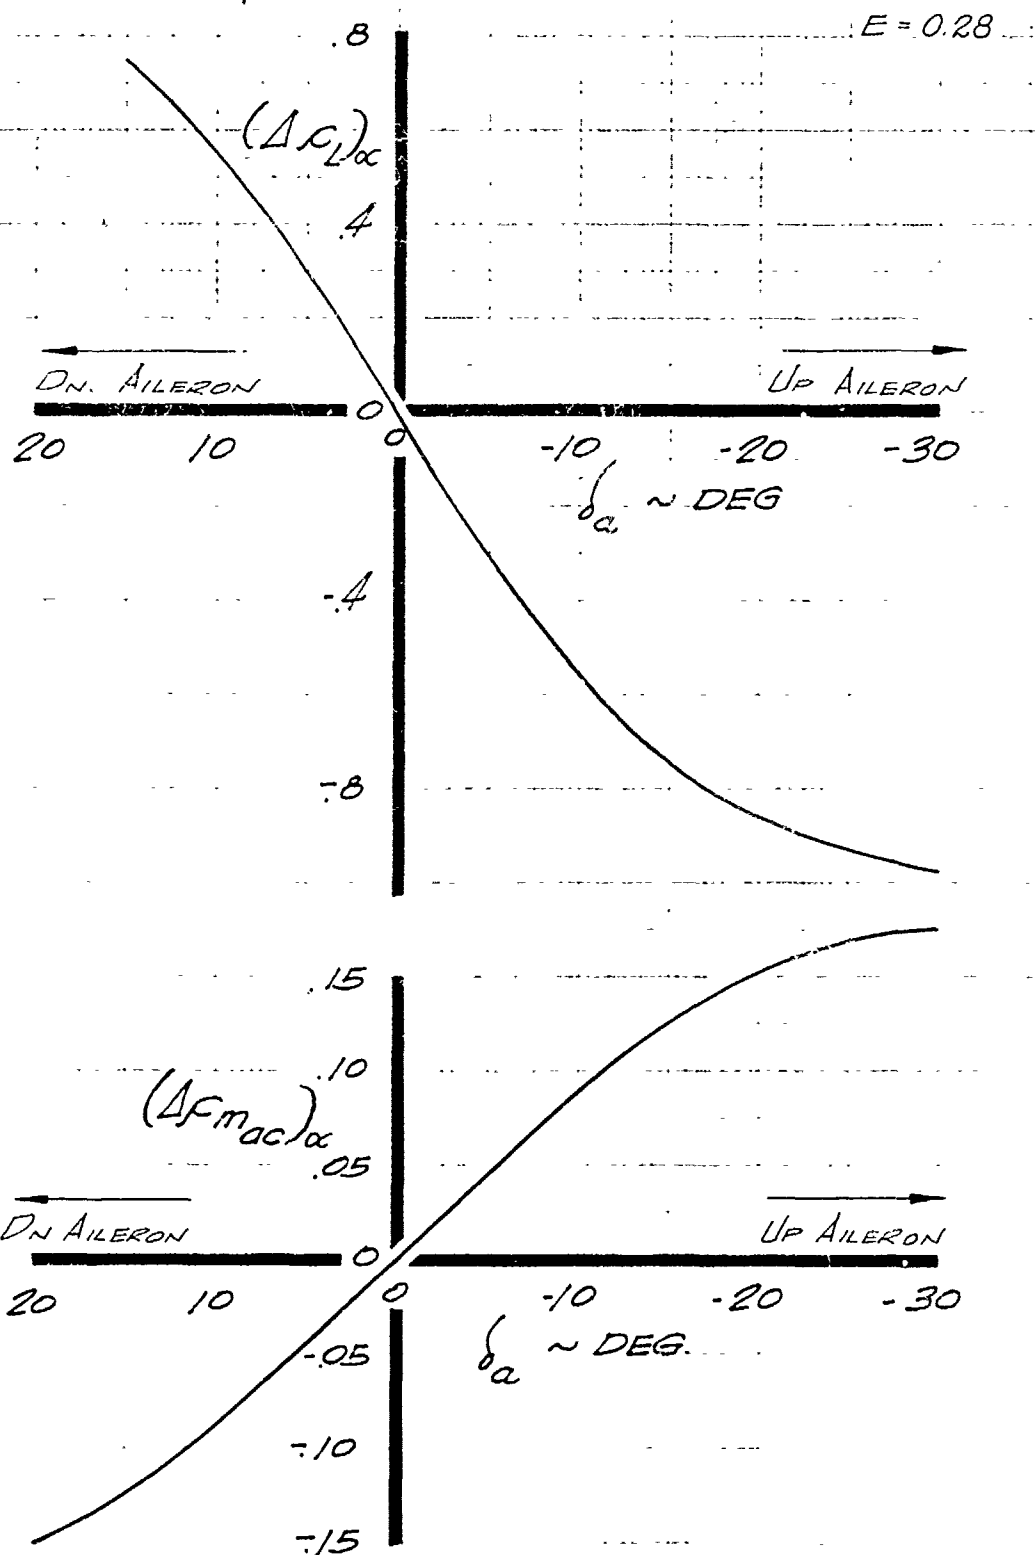


FIG. 11

RM 763

RM 632,

RM 103, 111, 174

PREPARED BY R.L.D.
 DATE 9-8-52
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 24
 MODEL C-130
 REPORT NO. 9262

LOCKHEED C-130

EFFECT OF AIRPLANE COMPONENTS ON LIFT CHARACTERISTICS

**LOW
SPEED**

$M = .23$

C_L

WING
 FUSELAGE
 WING AND FUSELAGE
 WING NACELLES AND FUSELAGE
 WITH AND WITHOUT VERTICAL
 AND DORSAL
 AIRPLANE (UNTRIMMED)

-8 -4 0 4 8 12 16 20 24

$\alpha_{FRL} \sim$ DEG

Fig. 12


PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 25
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

AIRPLANE LIFT CHARACTERISTICS WITH VARIOUS FLAP EXTENSIONS

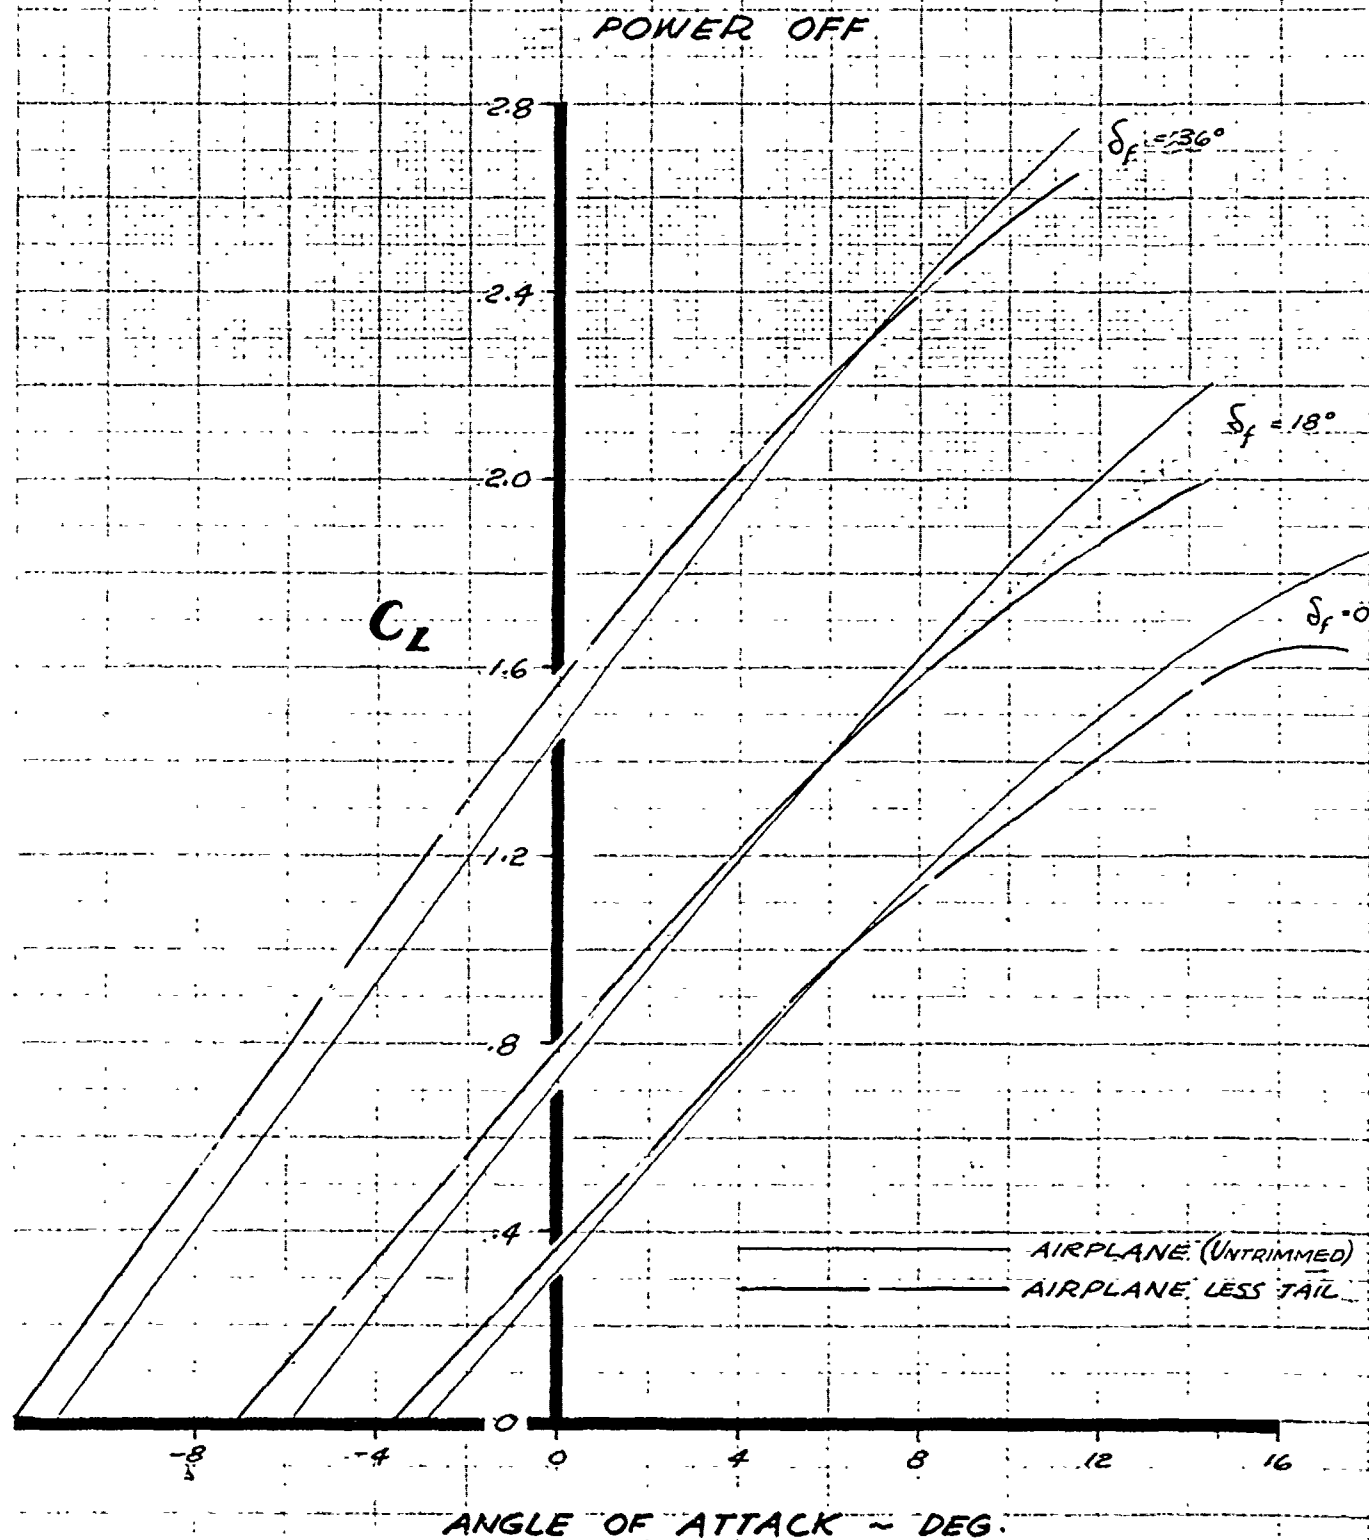

PREPARED BY R.L.D.
 DATE 9-8-52
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 26
 MODEL C-130
 REPORT NO. 9062

LOCKHEED C-130

VARIATION OF LIFT CURVE SLOPE AND ZERO LIFT INTERCEPT WITH MACH NO

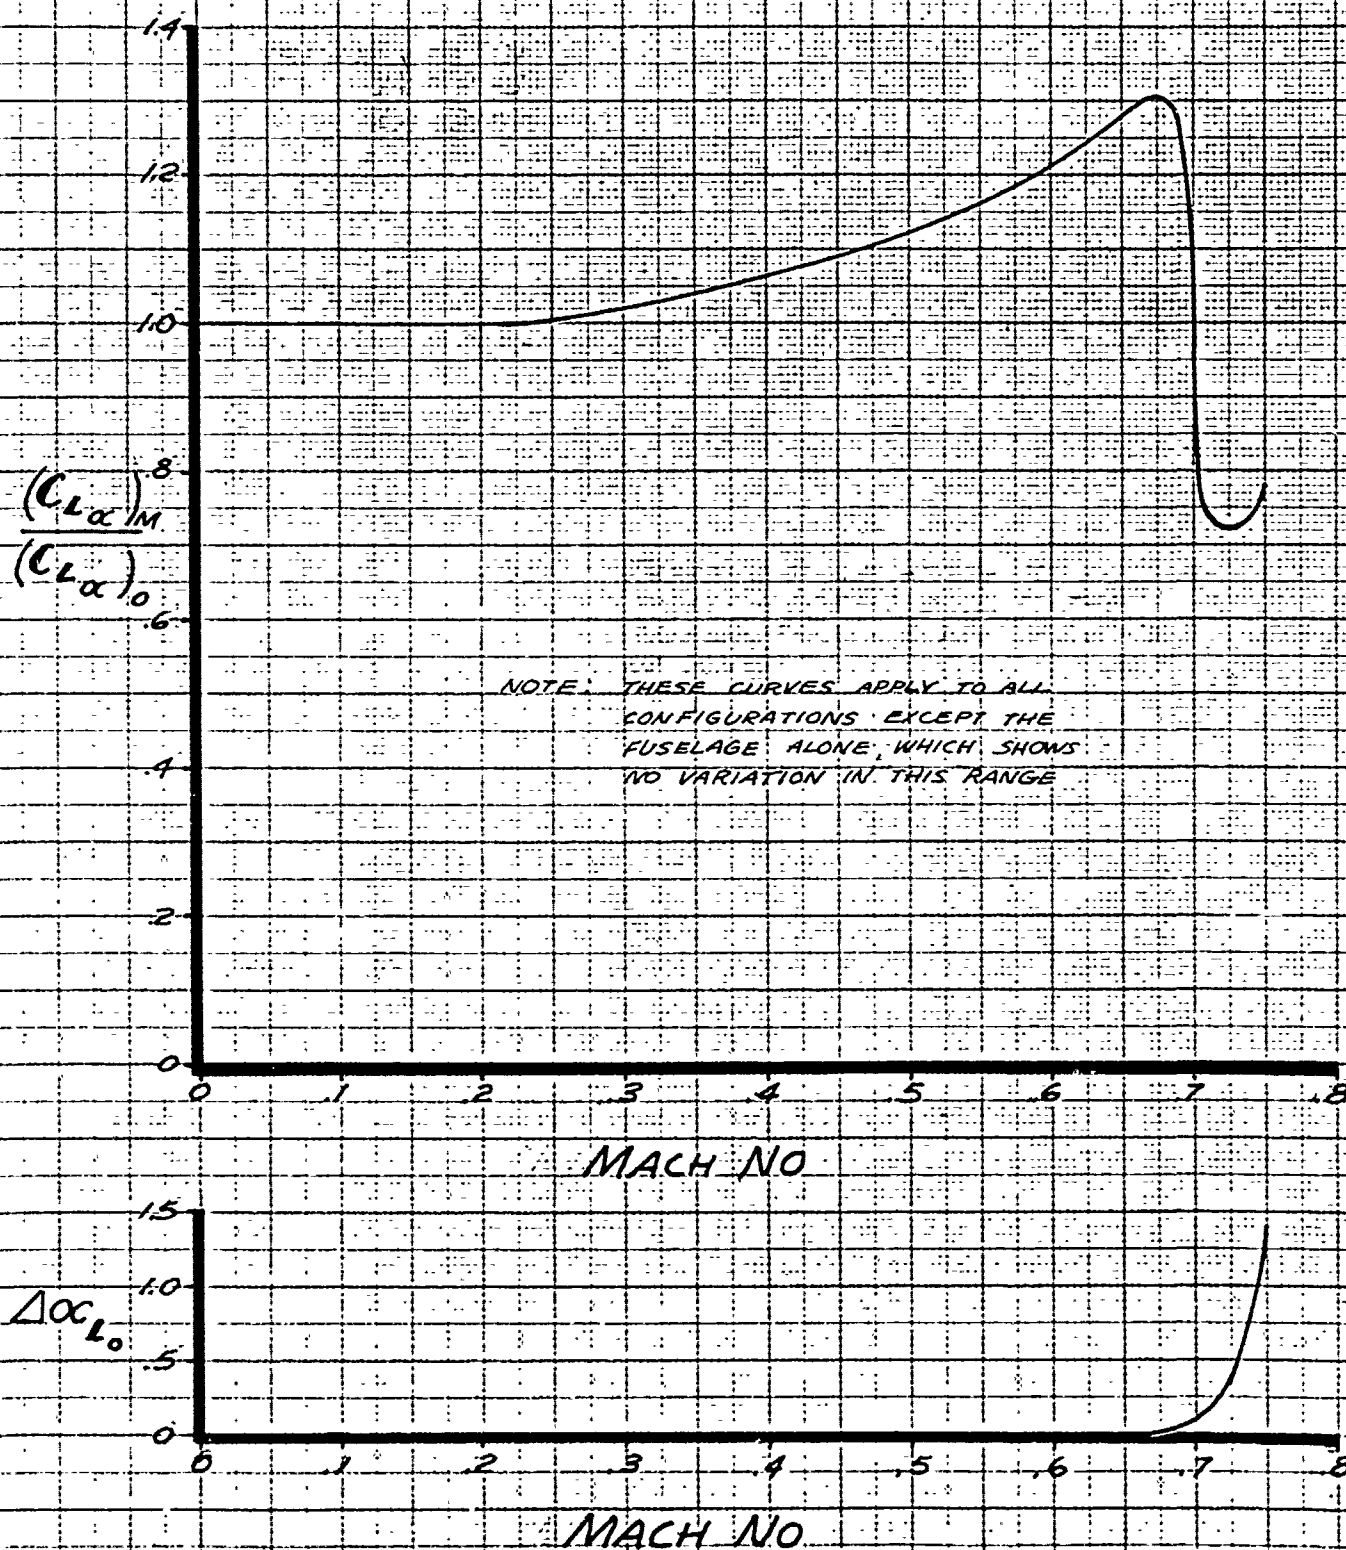


Fig. 14

PREPARED BY PLD
 DATE 11-25-52
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 27
 MODEL C-130
 REPORT NO 9062

LOCKHEED C-130
EFFECTS OF POWER ON LIFT
CHARACTERISTICS OF AIRPLANE
LESS HORIZONTAL TAIL

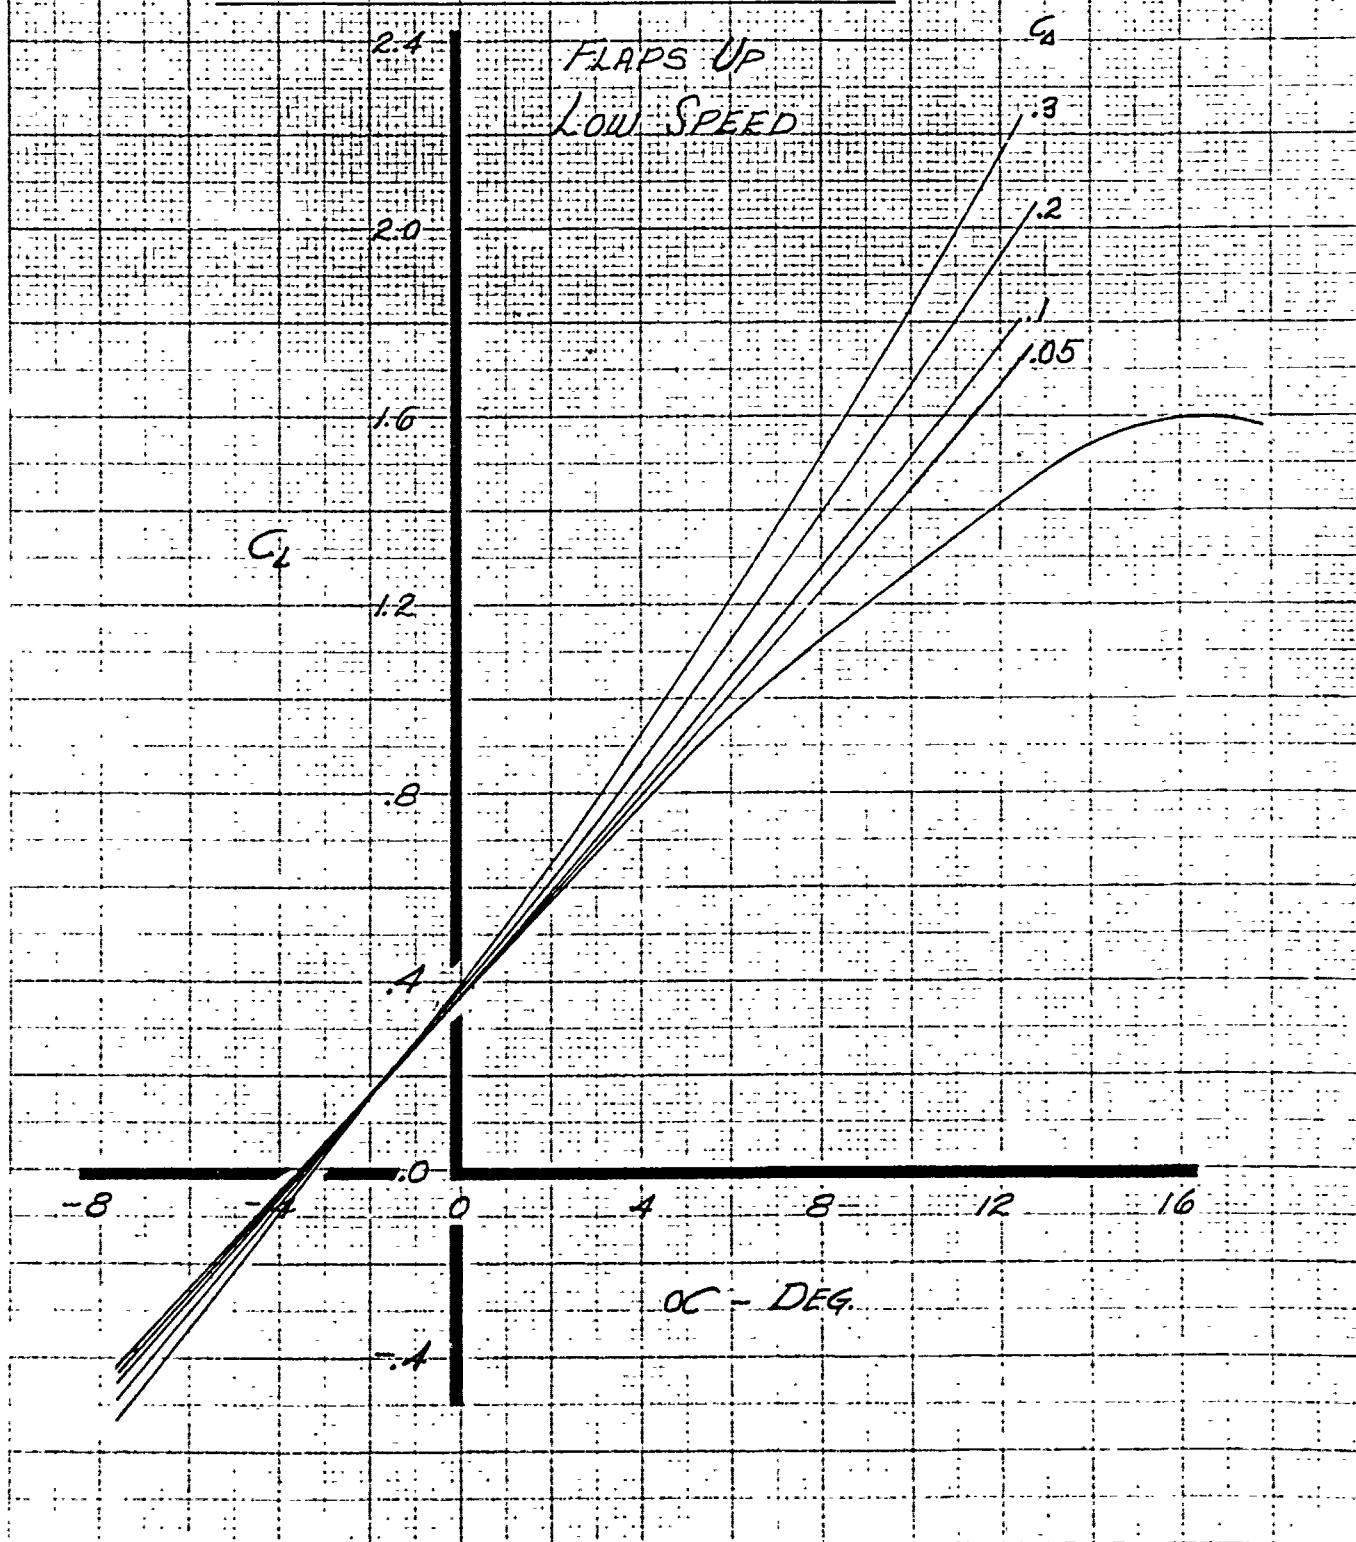


Fig. 15

PREPARED BY RLD
 DATE 11-25-58
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 28
 MODEL C-130
 REPORT NO 9062

LOCKHEED C-130
EFFECTS OF POWER ON LIFT
CHARACTERISTICS OF AIRPLANE
LESS HORIZONTAL TAIL

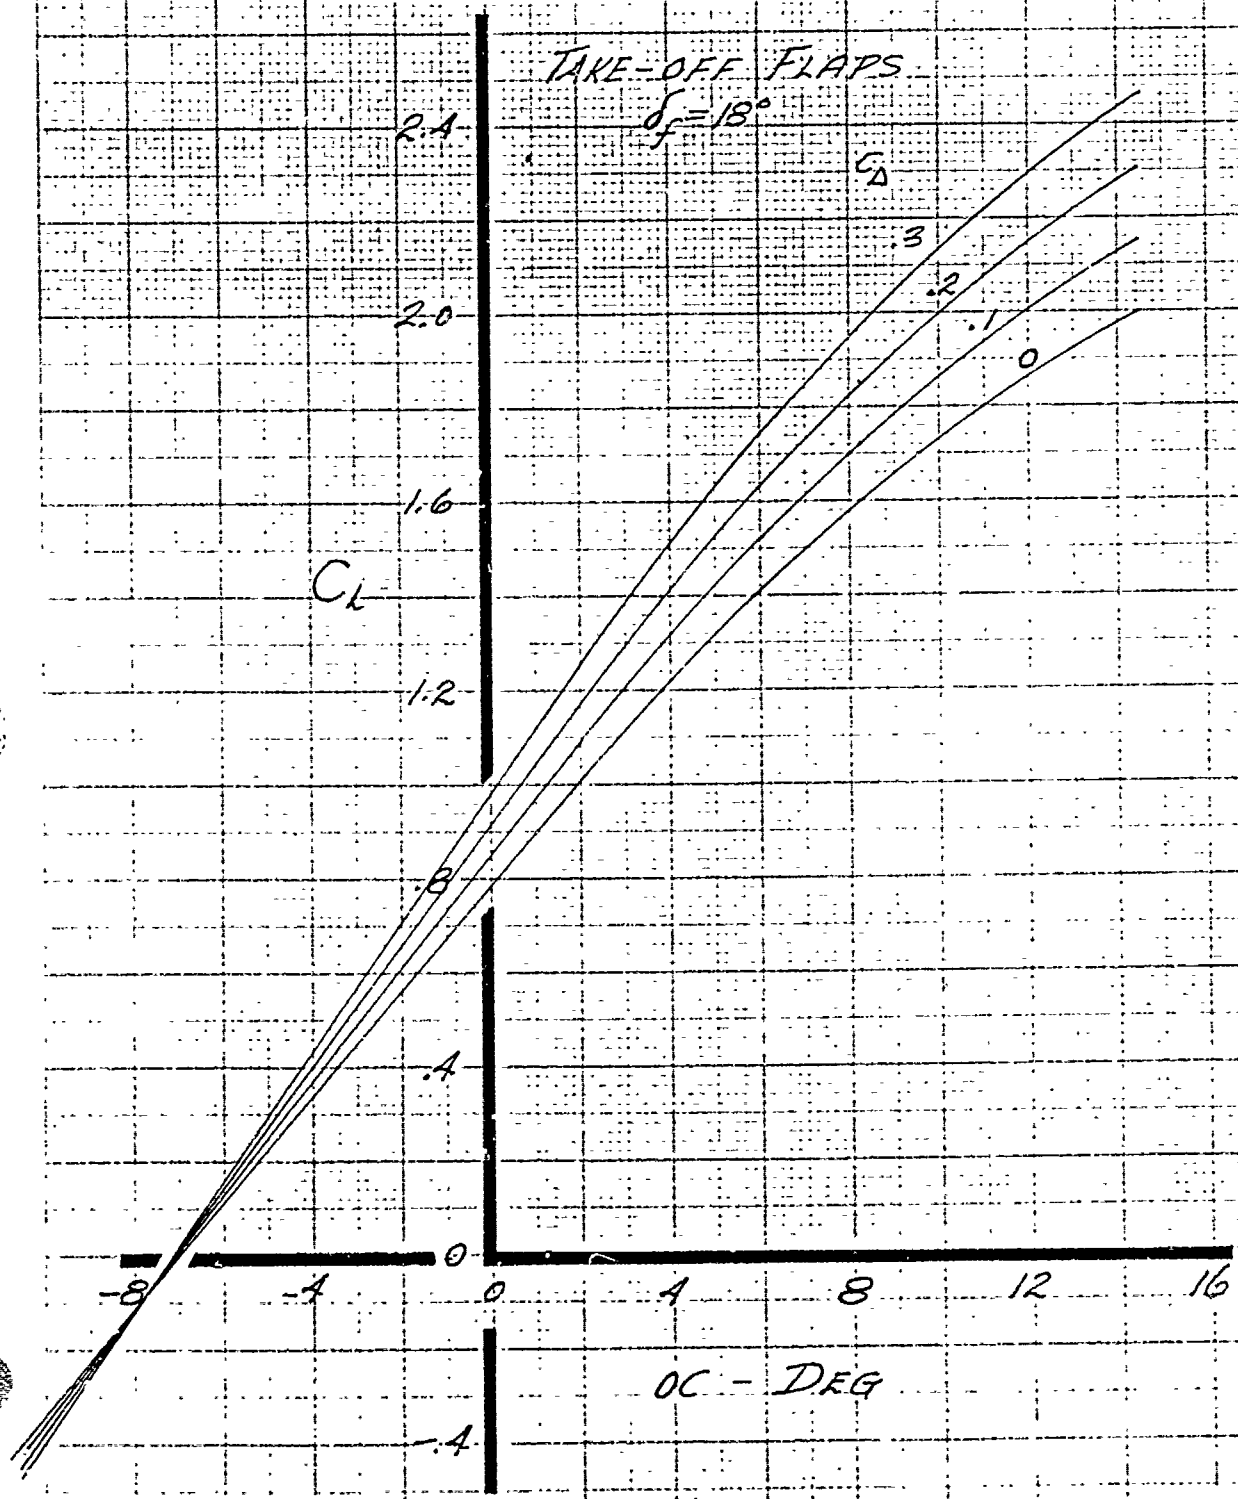


Fig. 16

PREPARED BY R.L.D.
DATE 11-25-52
CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION

PAGE 3
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

EFFECTS OF POWER ON LIFT
CHARACTERISTICS OF AIRPLANE
LESS HORIZONTAL TAIL

LANDING FLAPS - $\delta_f = 36^\circ$

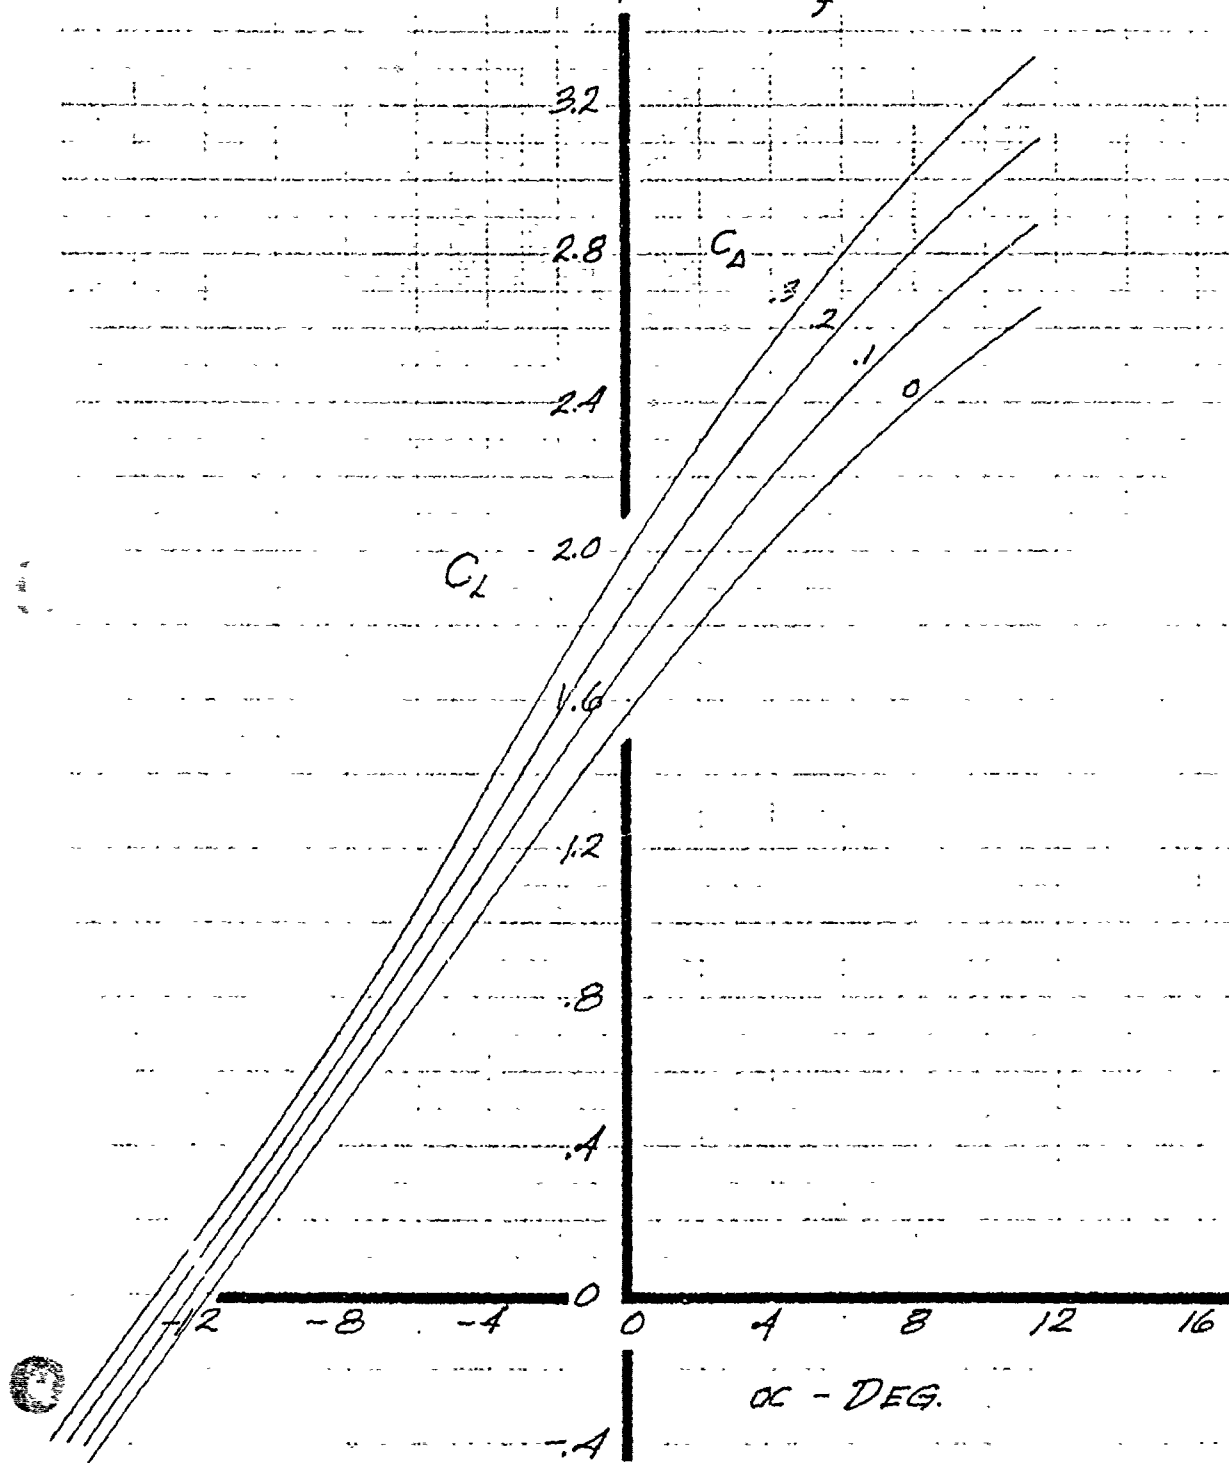

PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 30
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

POWER EFFECTS ON AIRPLANE

LIFT CHARACTERISTICS

LOW SPEED

$\delta_e = 0^\circ$

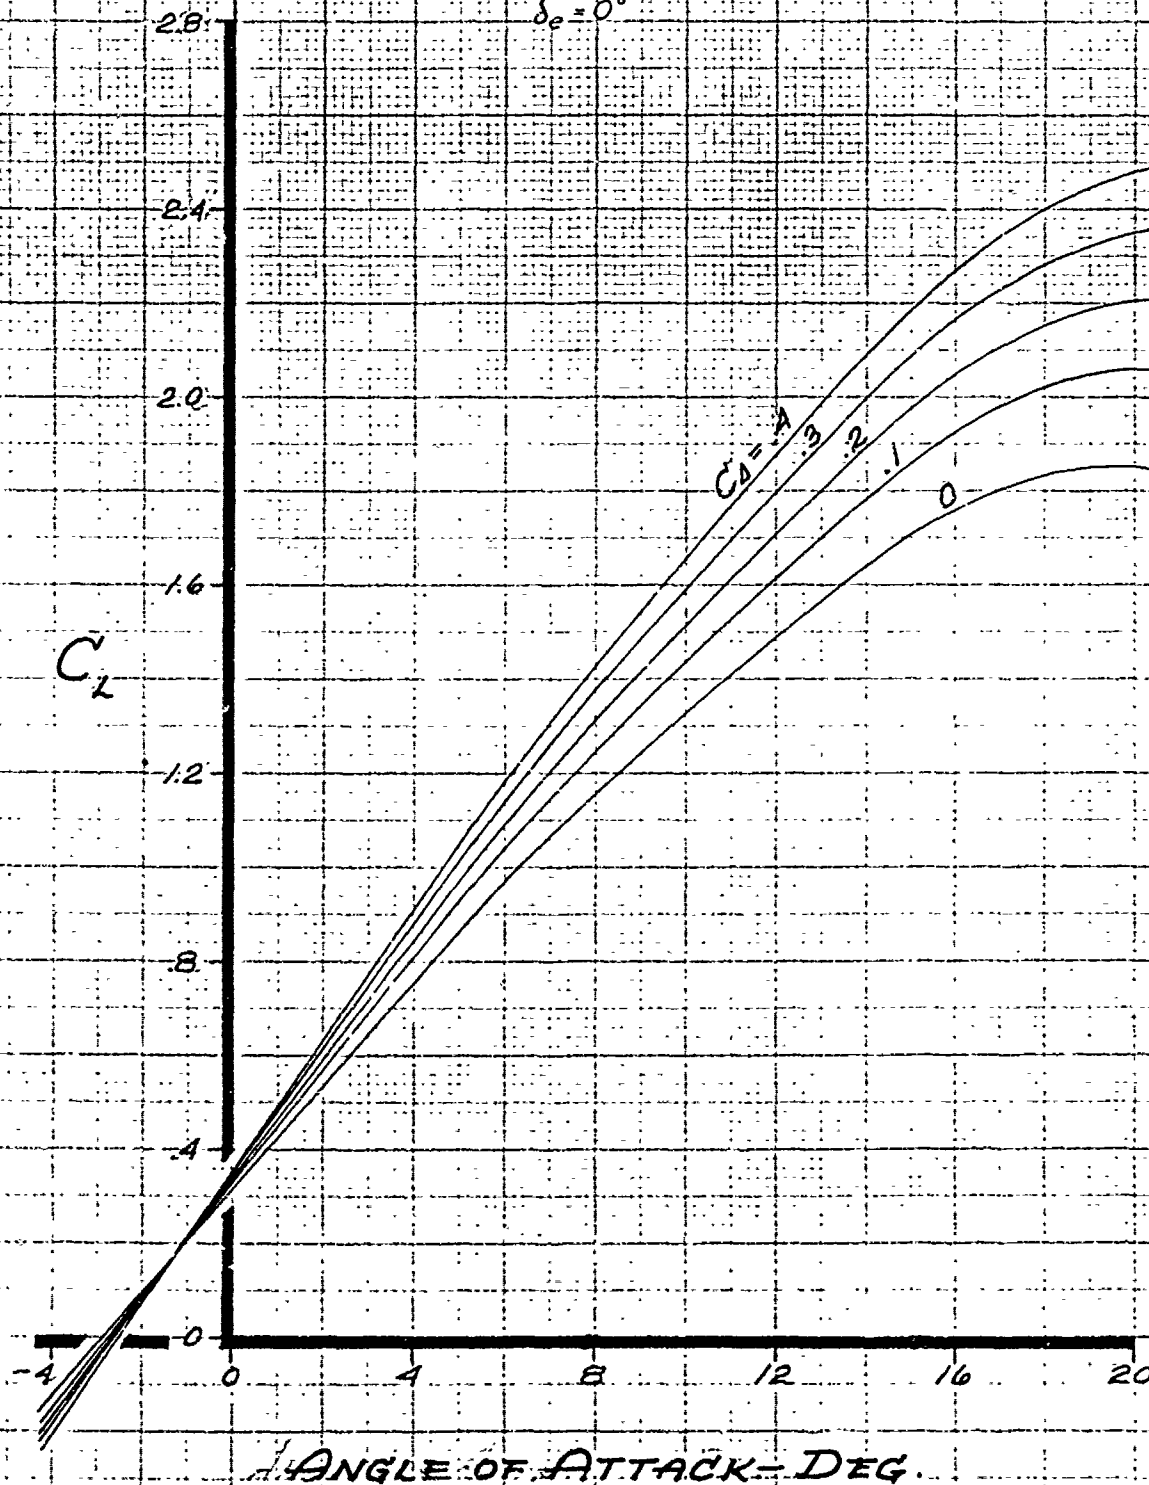


Fig. 18

PREPARED BY MLD
DATE 12-17-55
CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION

PAGE 31
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

EFFECT OF POWER ON AIRPLANE LIFT CHARACTERISTICS

FLAPS DOWN 36°

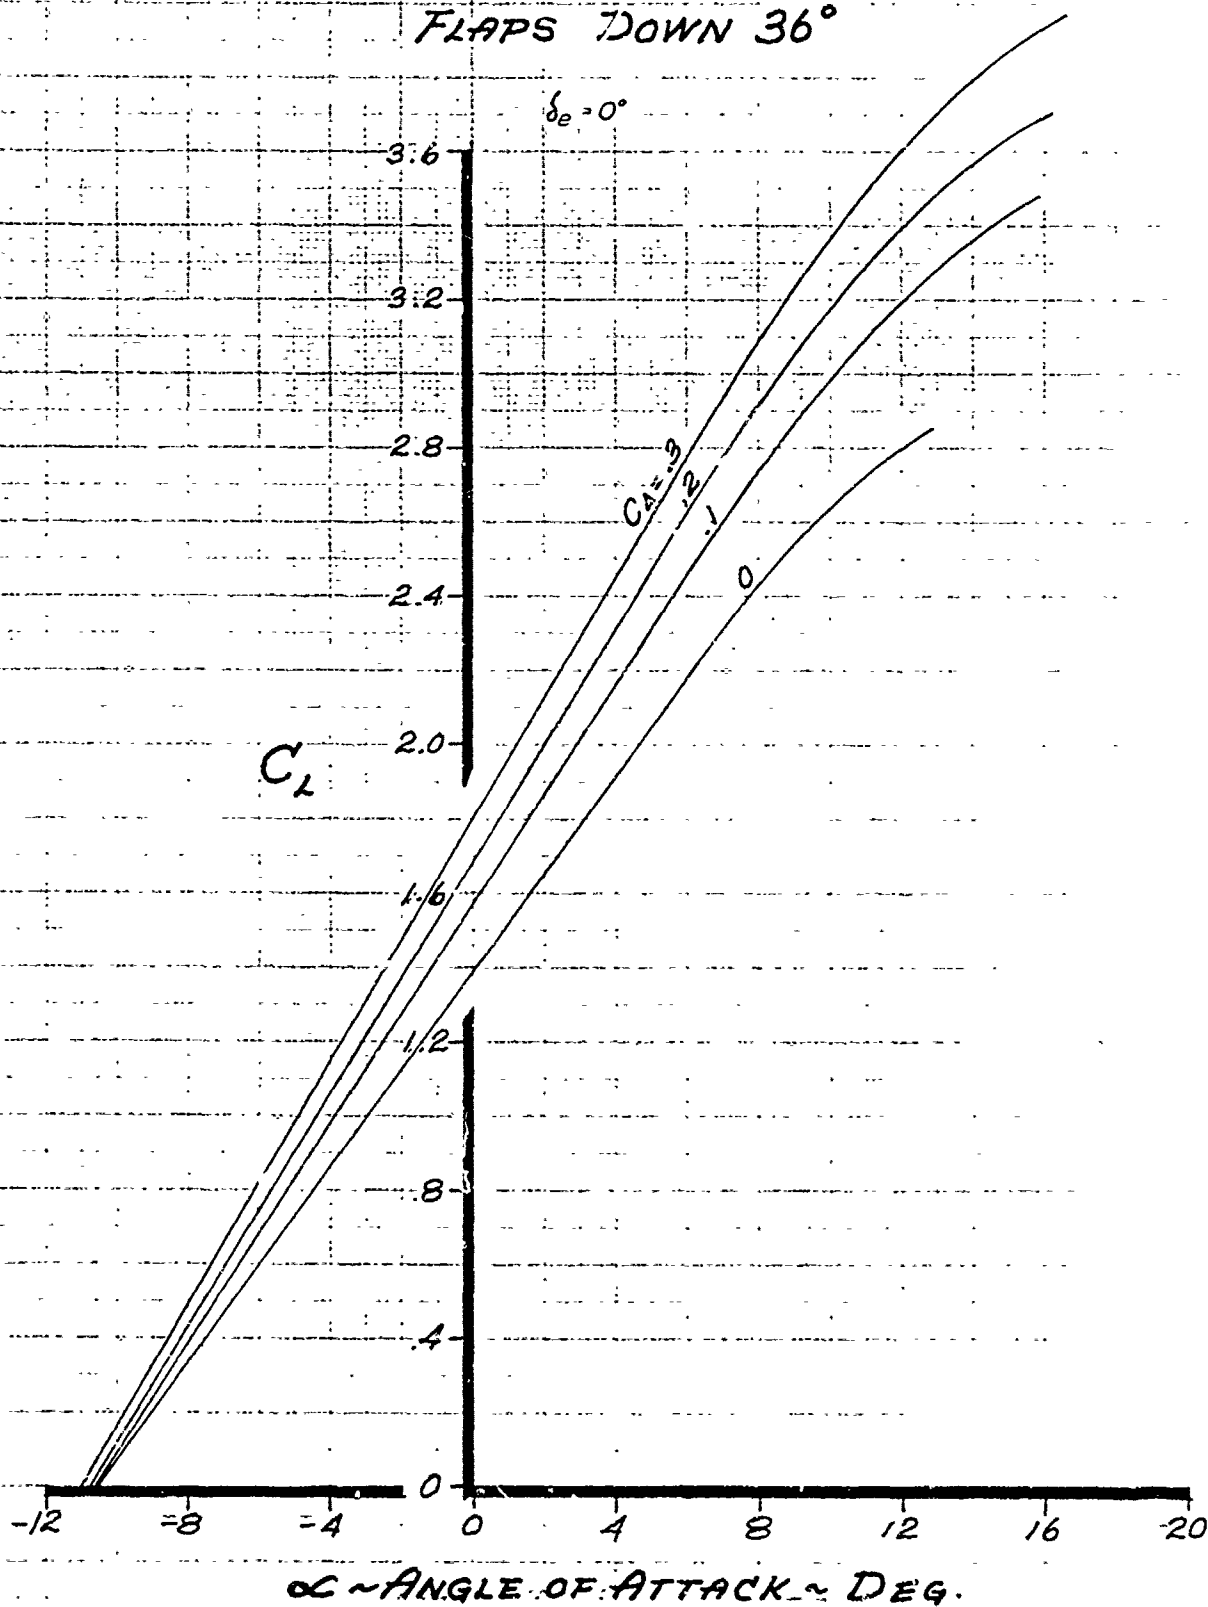

PREPARED BY S. L. D.
 DATE 9-25-52
 CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION

PAGE 32
 MODEL C-130
 REPORT NO 9062

LOCKHEED C-130 AIRPLANE DRAG BUILD-UP

WING
 FUSELAGE *
 WING PLUS FUSELAGE
 AIRPLANE LESS EMPENNAGE
 AIRPLANE PLUS EXTERNAL FUEL TANKS

* NOTE: FUSELAGE DRAG COEFFICIENTS
 ARE PLOTTED AGAINST LIFT
 COEFFICIENTS FOR THE WING-
 FUSELAGE COMBINATION

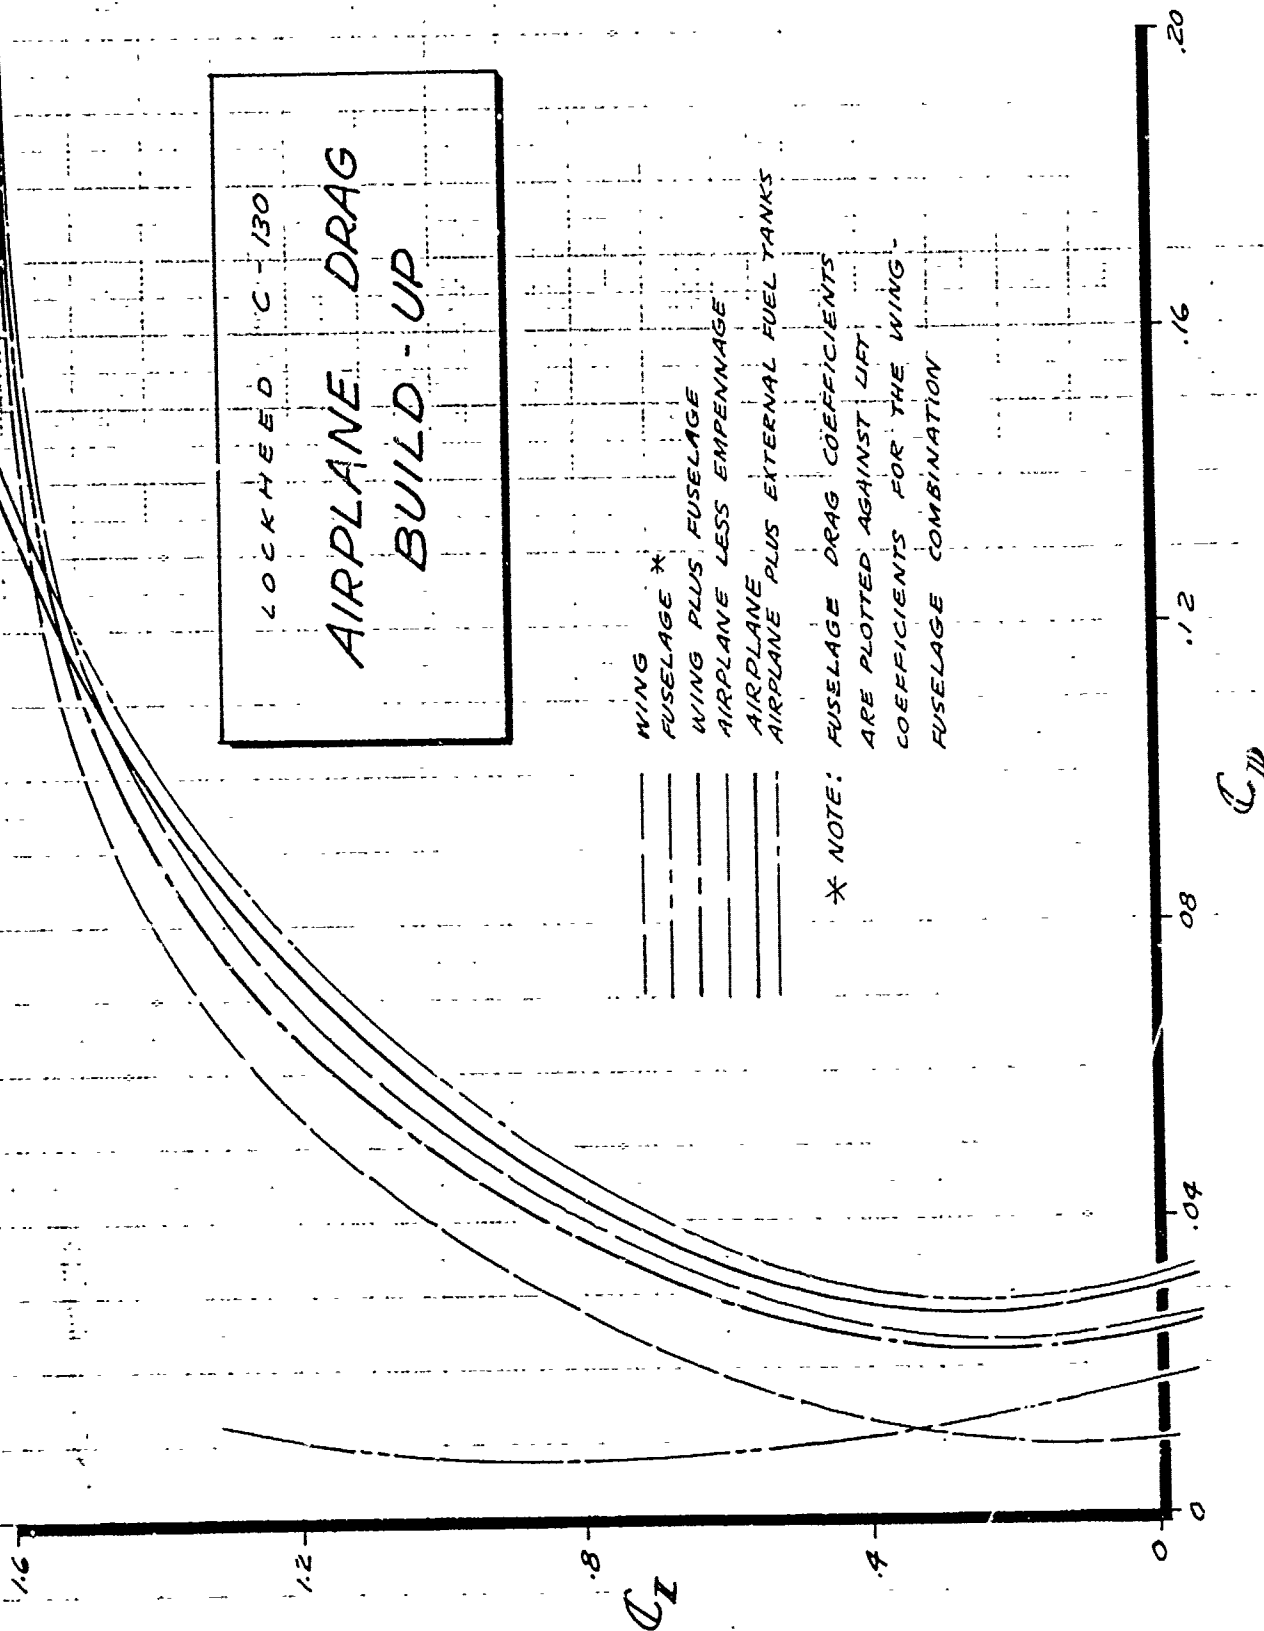

PREPARED BY _____
 DATE _____
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 33
 MODEL C-130
 REPORT NO. 9062

LOCKHEED C-130 AIRPLANE DRAG CHARACTERISTICS

LOW SPEED

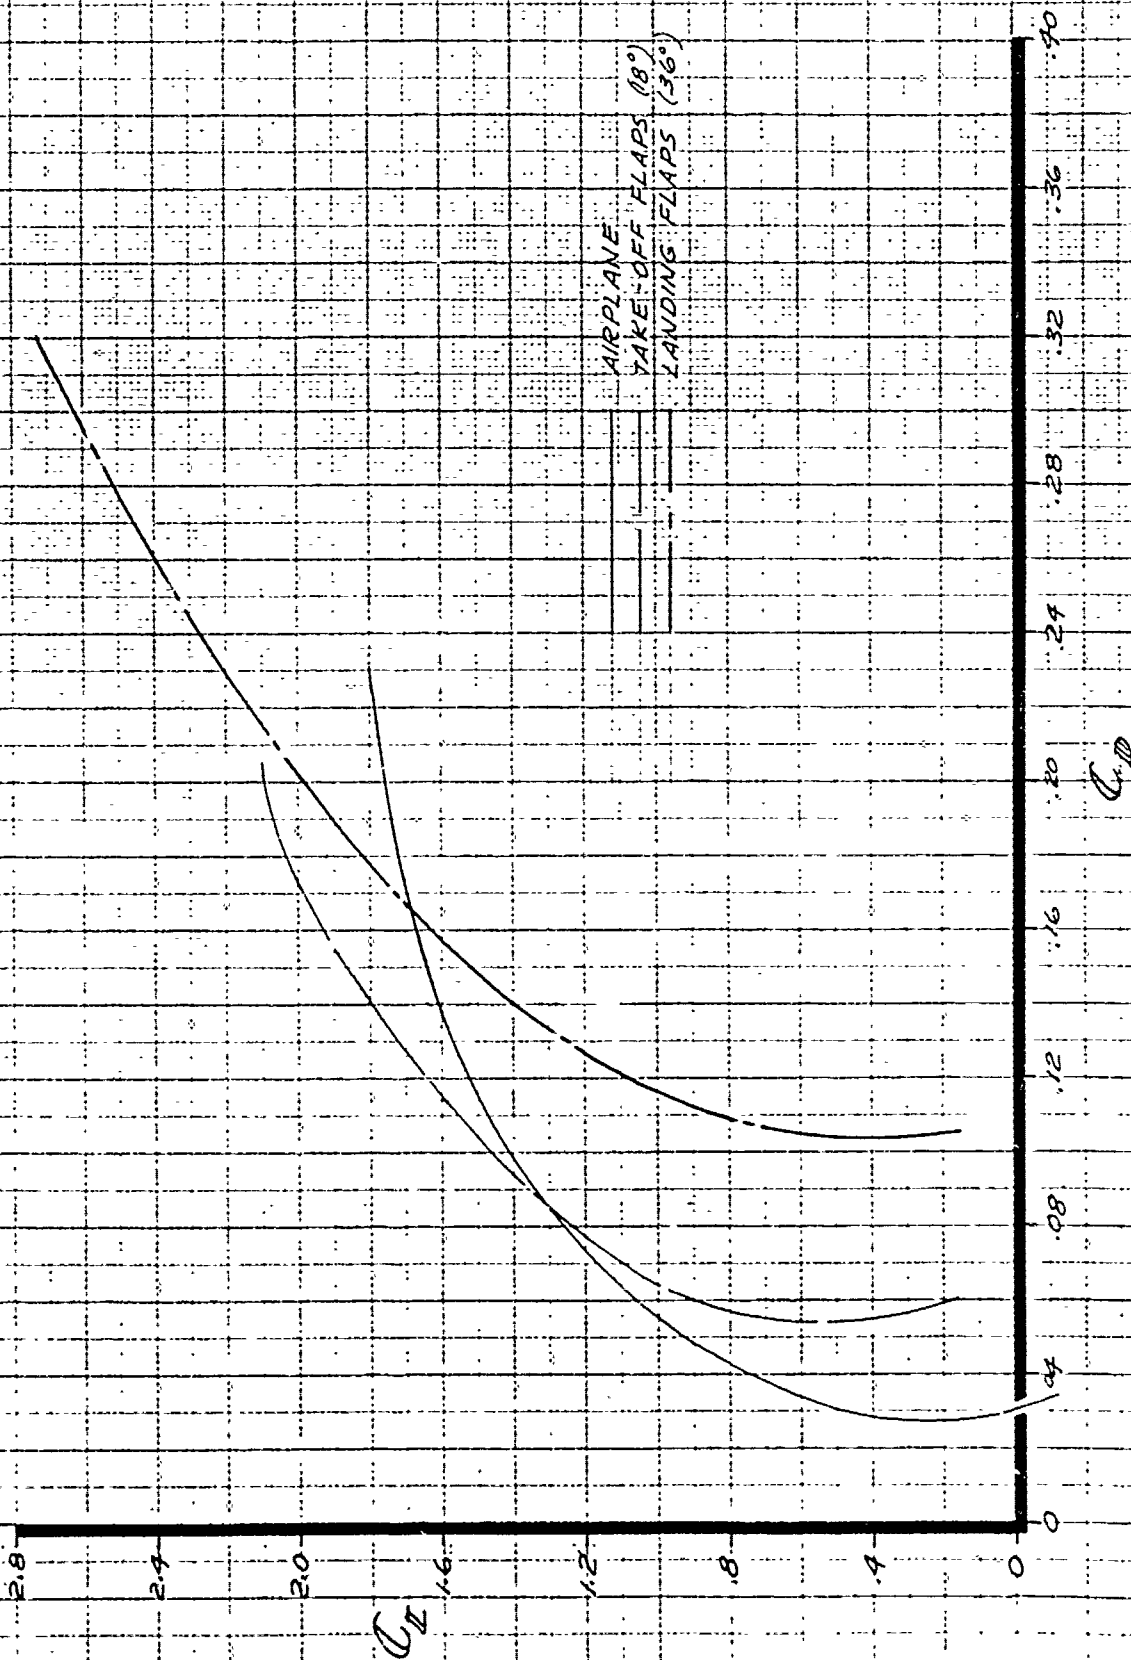


Fig. 21

PREPARED BY
DATE
CHECKED BY

LOCKHEED AIRCRAFT CORPORATION

PAGE 34
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

WING DRAG RISE
WITH FUSELAGE AND NACELLE EFFECTS

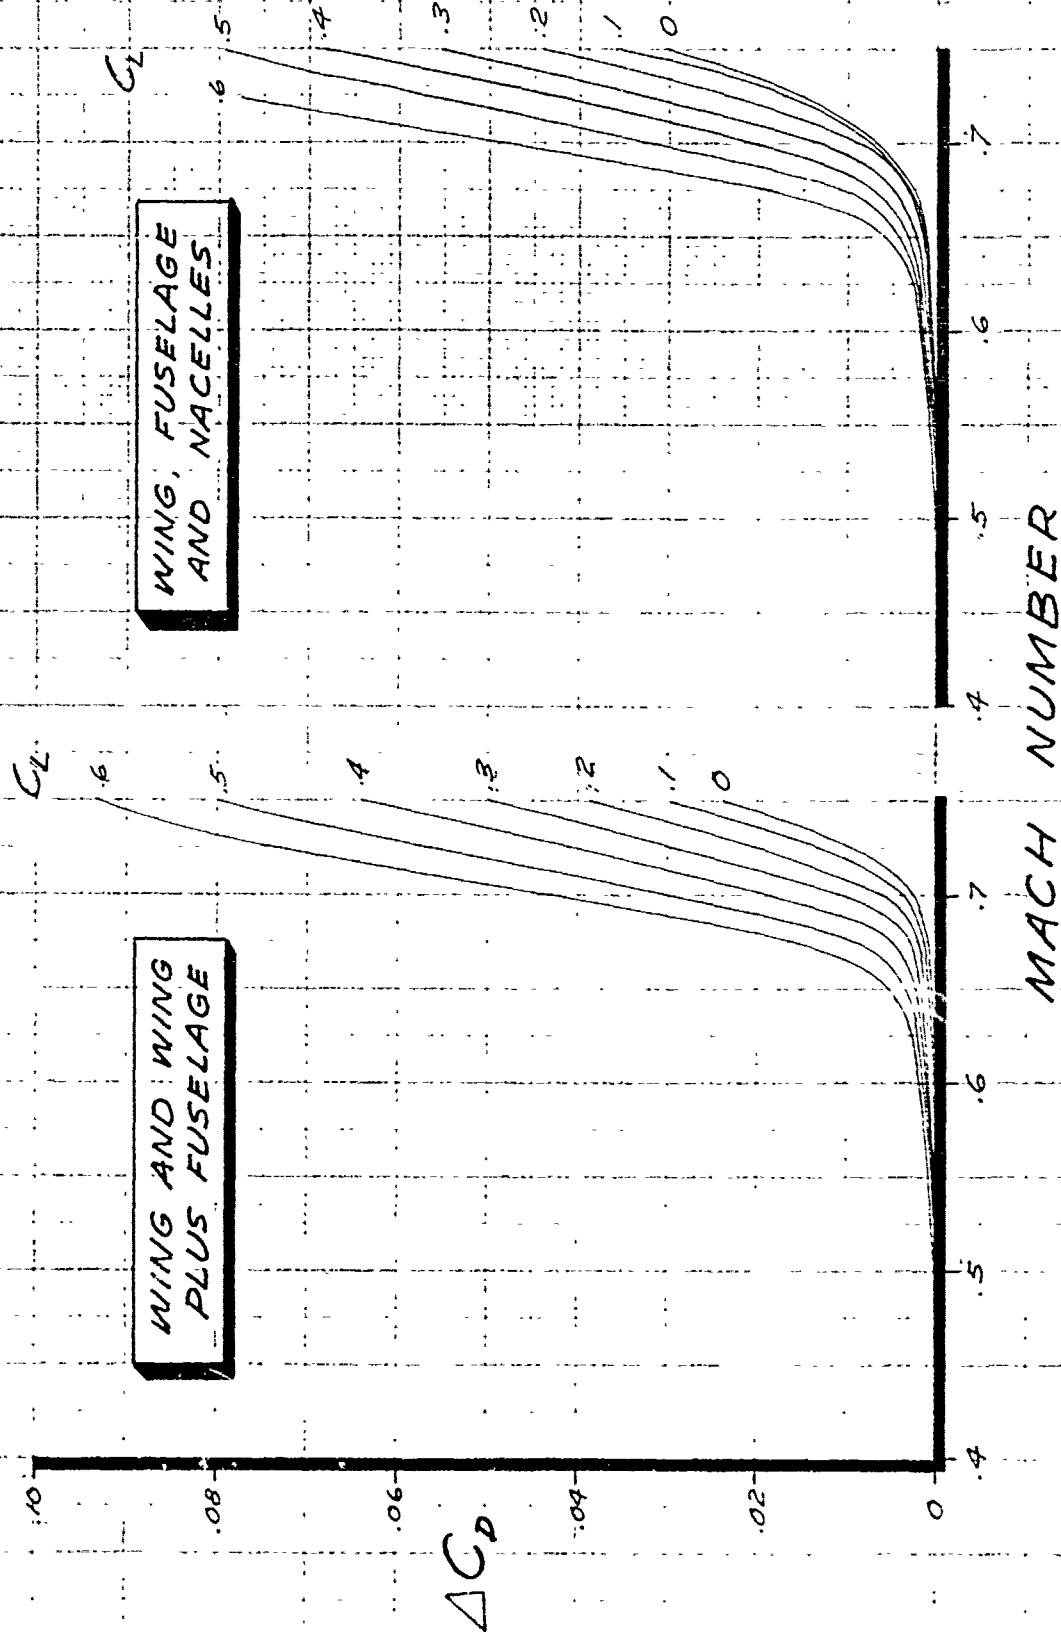


FIG. 22


PREPARED BY RAD
DATE 7-5-55
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 35
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

AIRPLANE DRAG RISE

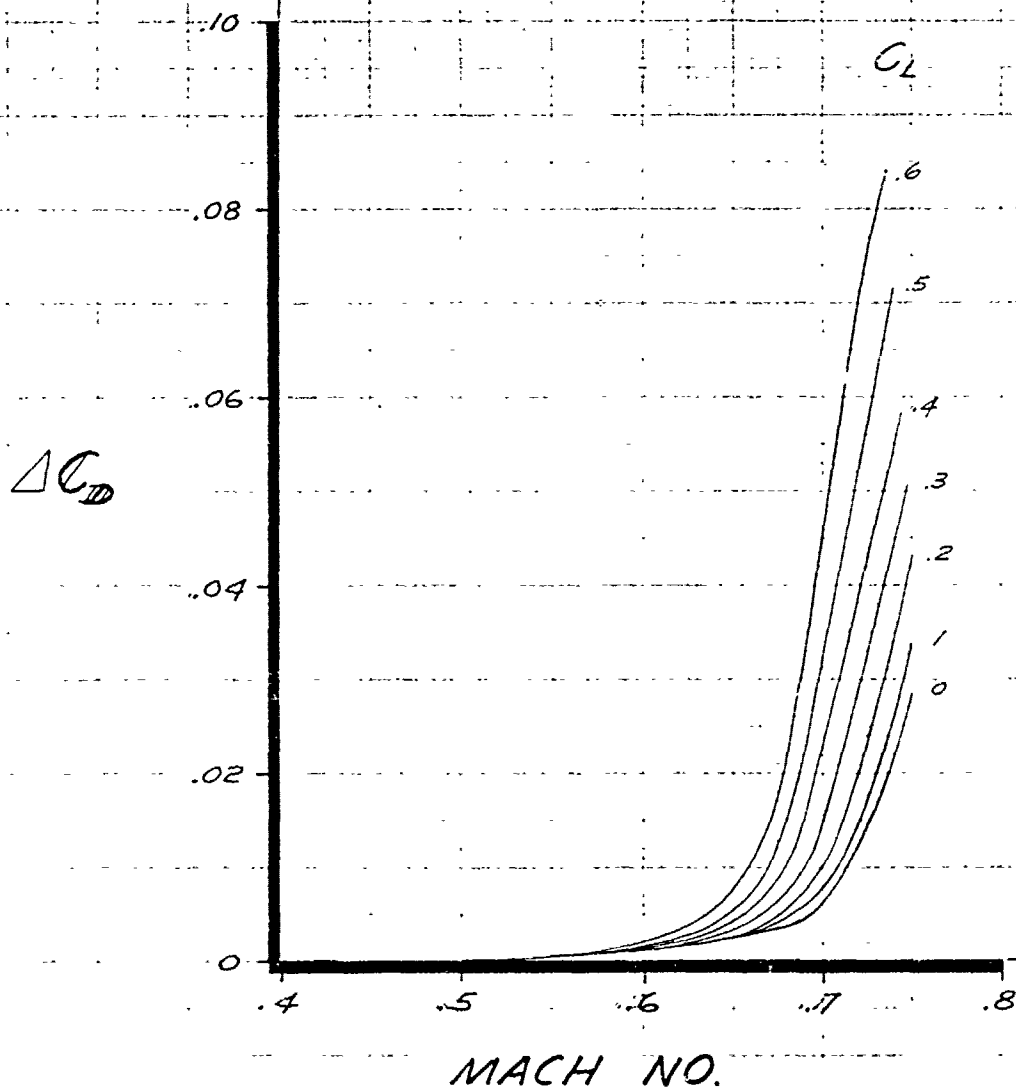


PREPARED BY PLD
 DATE 8-7-52
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

LOCKHEED C-130

PAGE 36
 MODEL C-130
 REPORT NO 9052

EFFECT OF AIRPLANE COMPONENTS ON PITCHING MOMENTS

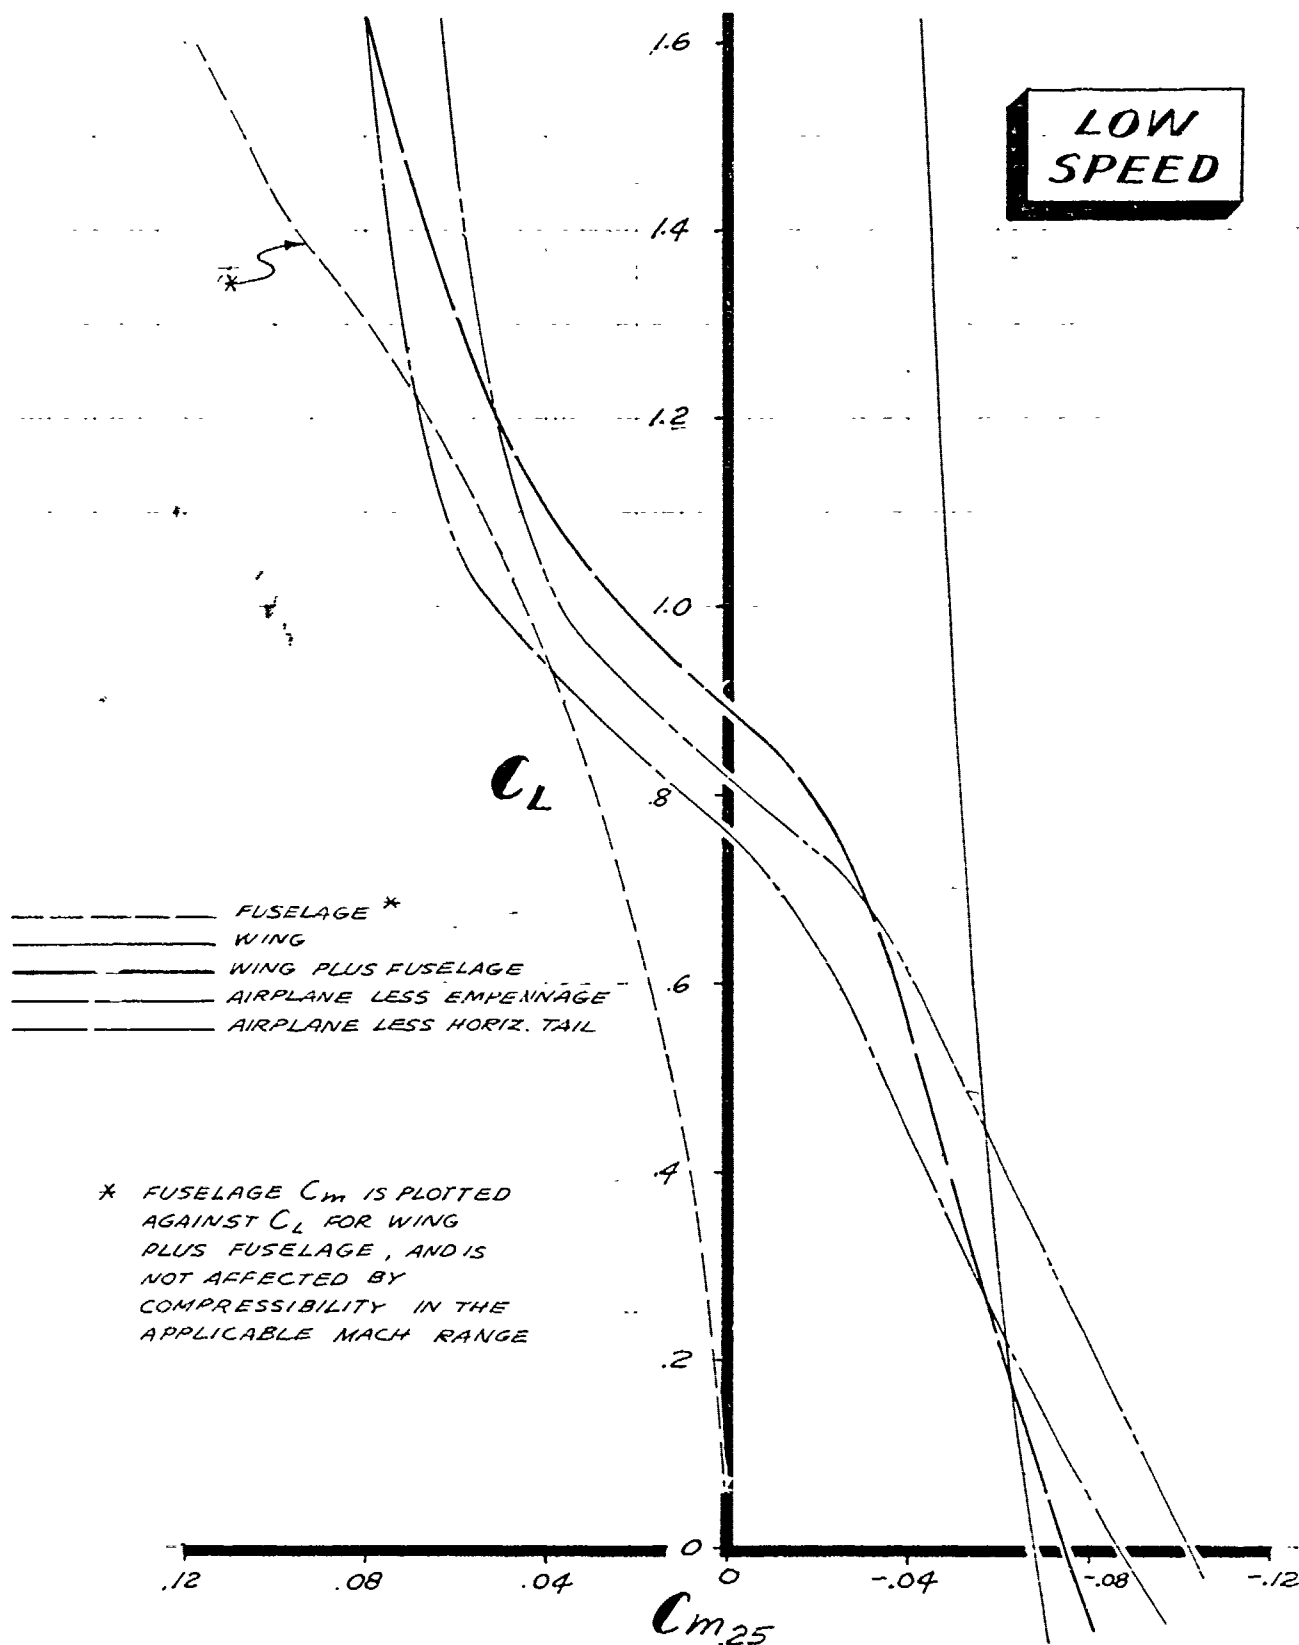

PREPARED BY R.L.D.
DATE 6-16-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION


PAGE 37
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

AIRPLANE - LESS - TAIL PITCHING

MOMENT FOR VARIOUS FLAP

DEFLECTIONS

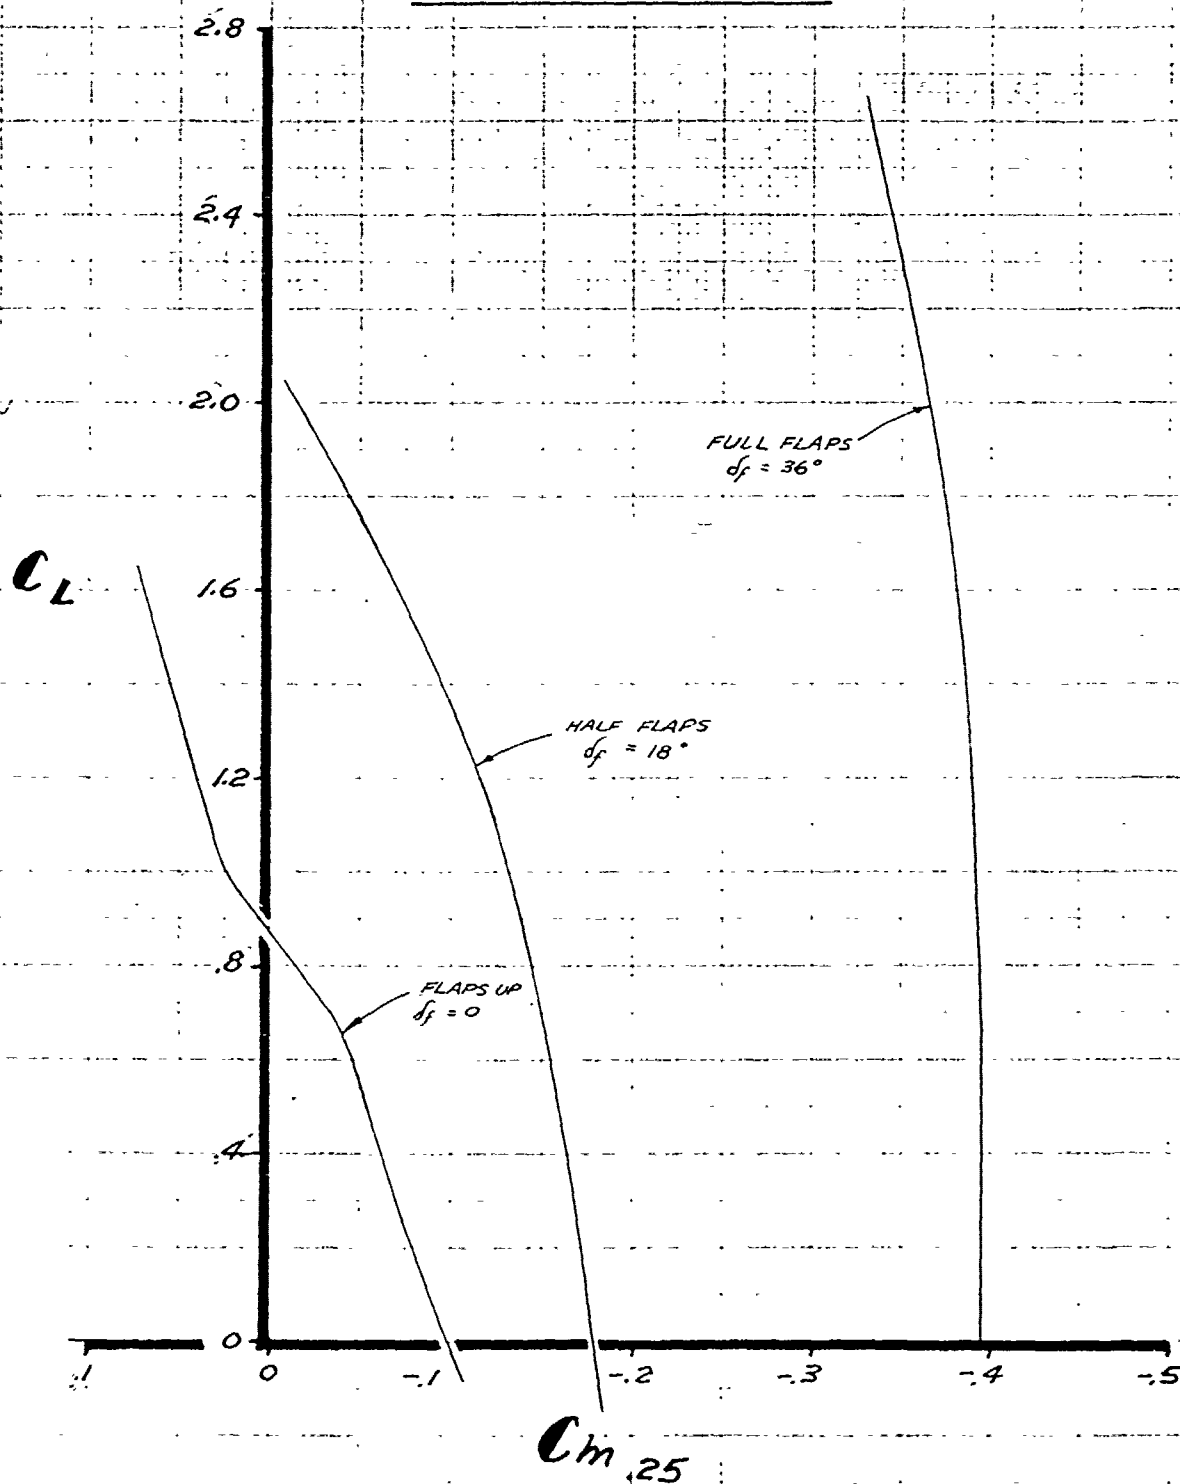


PREPARED BY _____
DATE 12-15-56
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

FIG. 26
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

AIRPLANE PITCHING MOMENT
CHARACTERISTICS FOR VARIOUS
FLAP POSITIONS

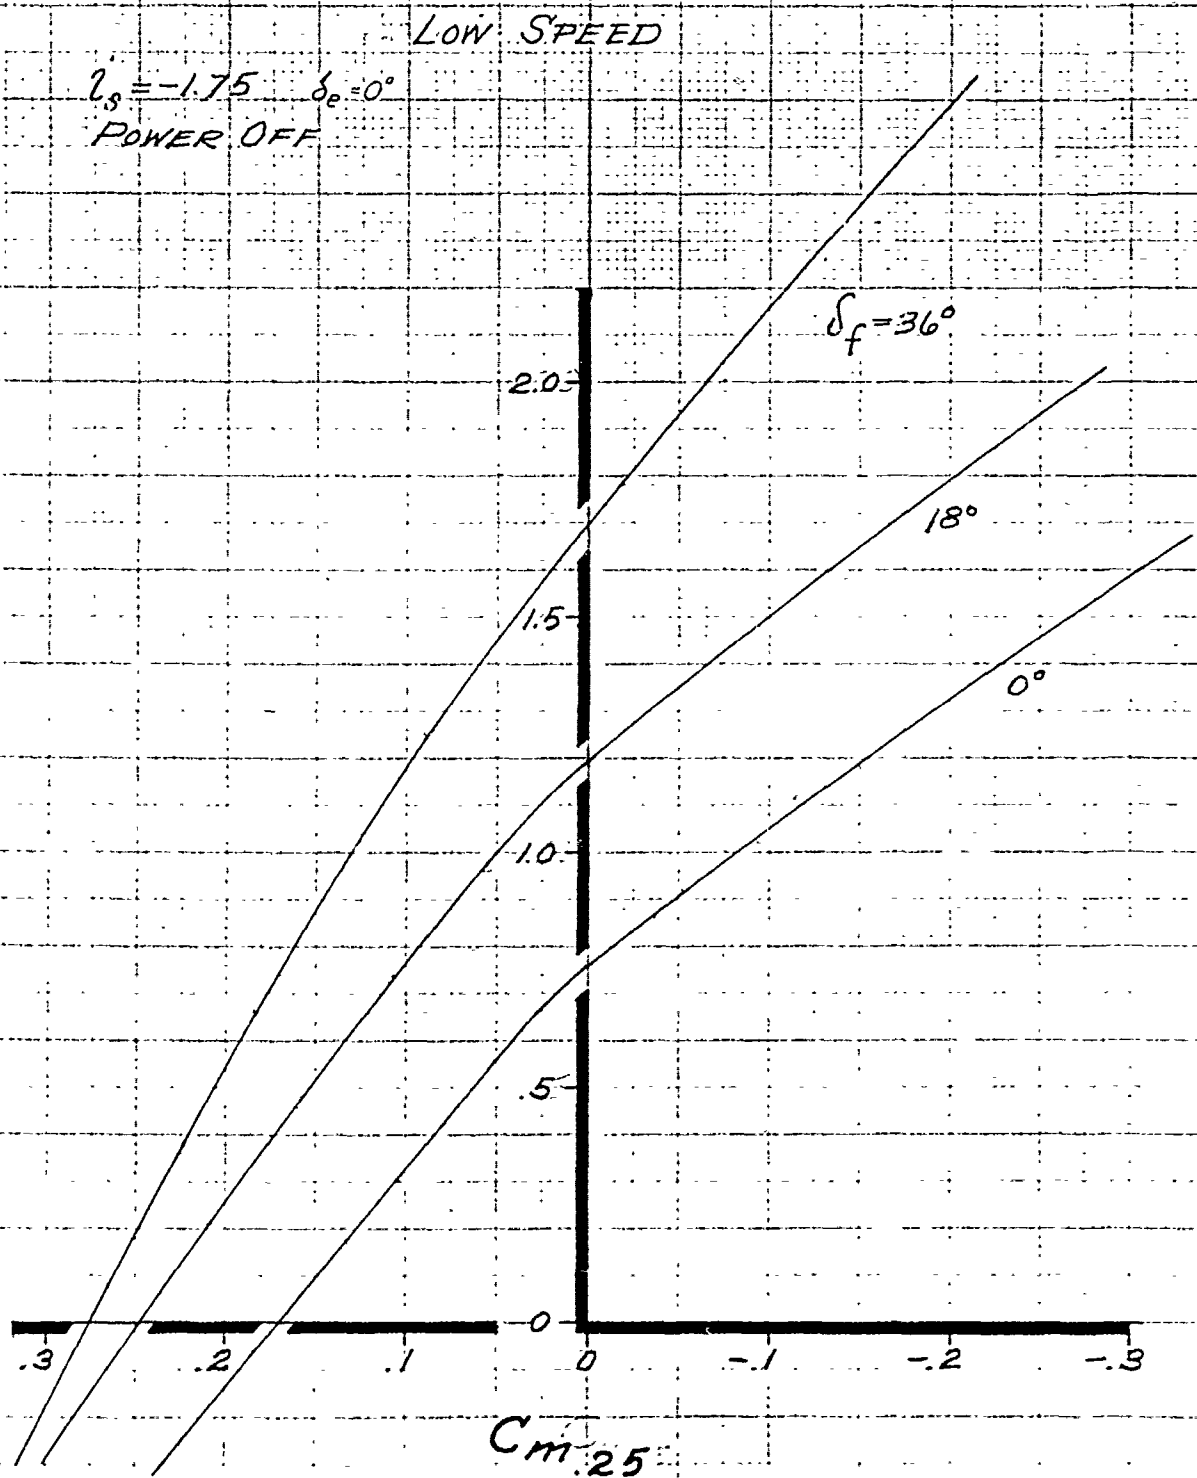


PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 39
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

PITCHING MOMENTS AT SEVERAL
MACH NOS. FOR WING

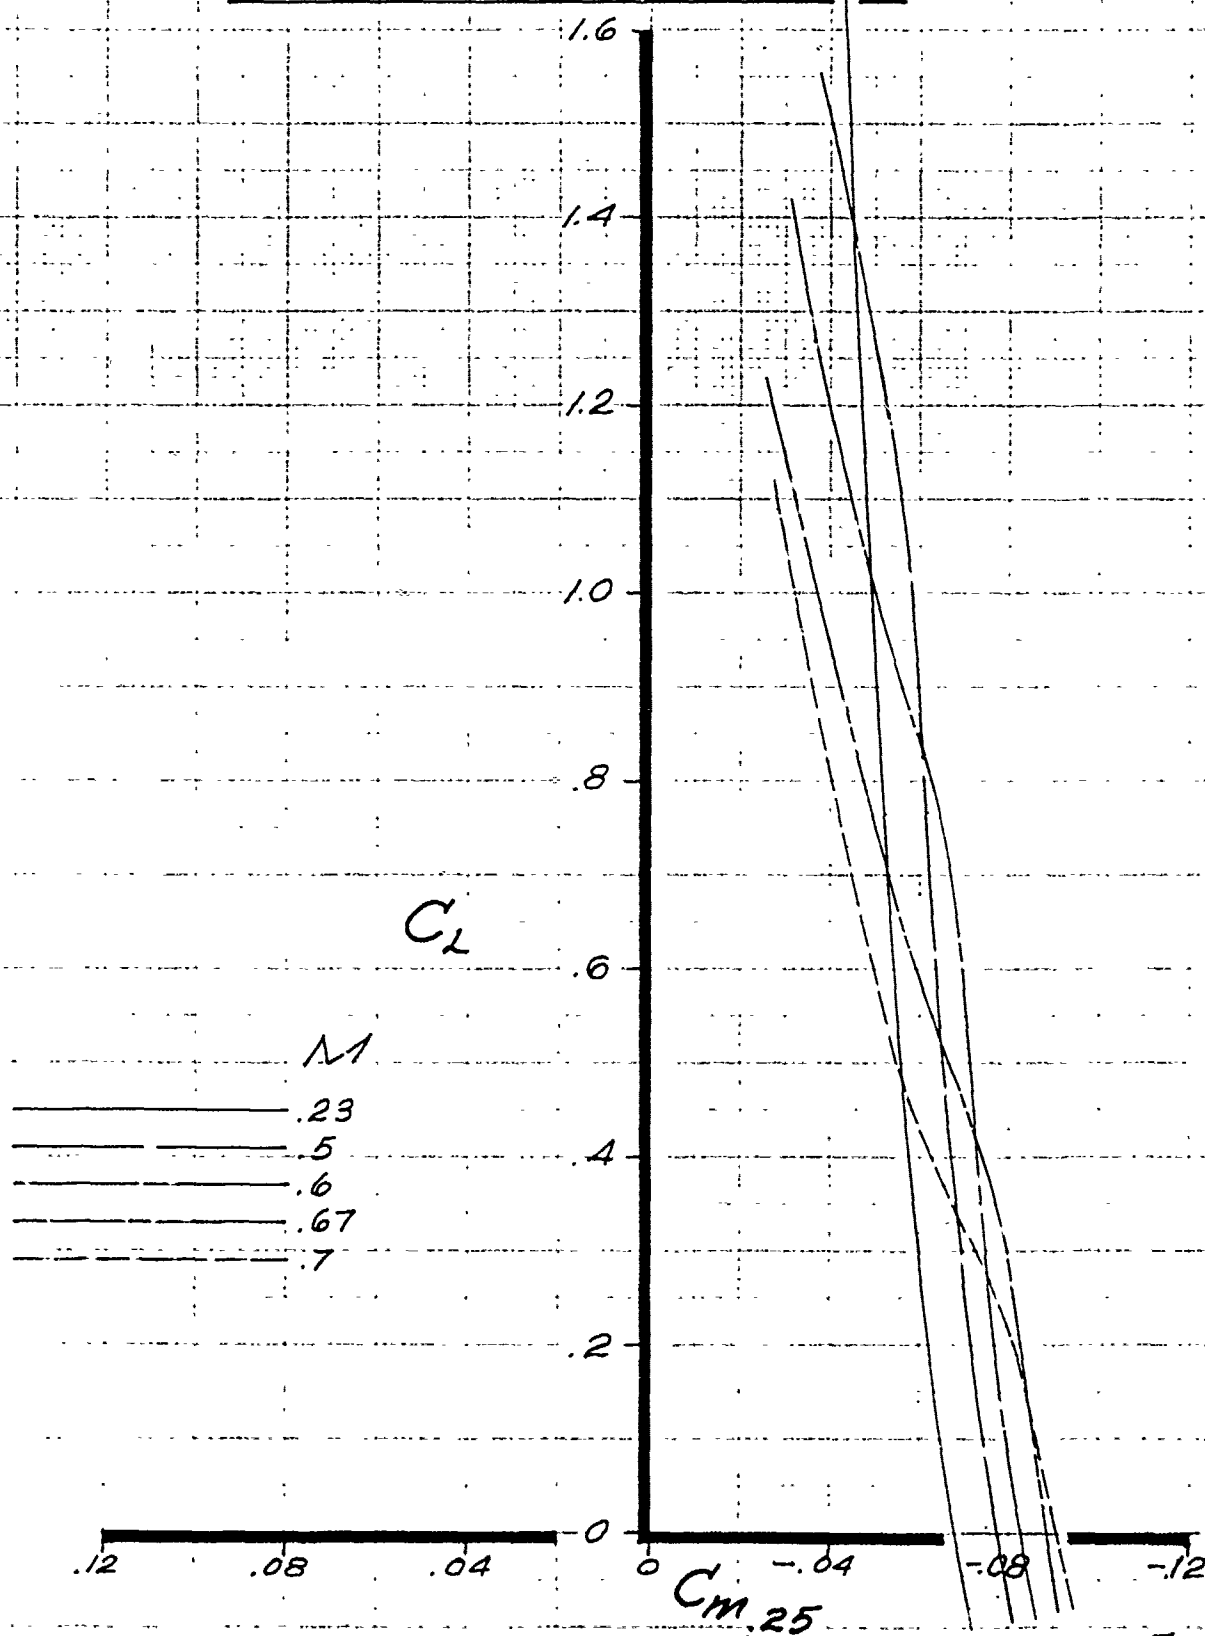


PREPARED BY _____
 DATE _____
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 40
 MODEL C-130
 REPORT NO 9062

LOCKHEED C-130 PITCHING MOMENT AT SEVERAL MACH NOS. FOR WING PLUS FUSELAGE

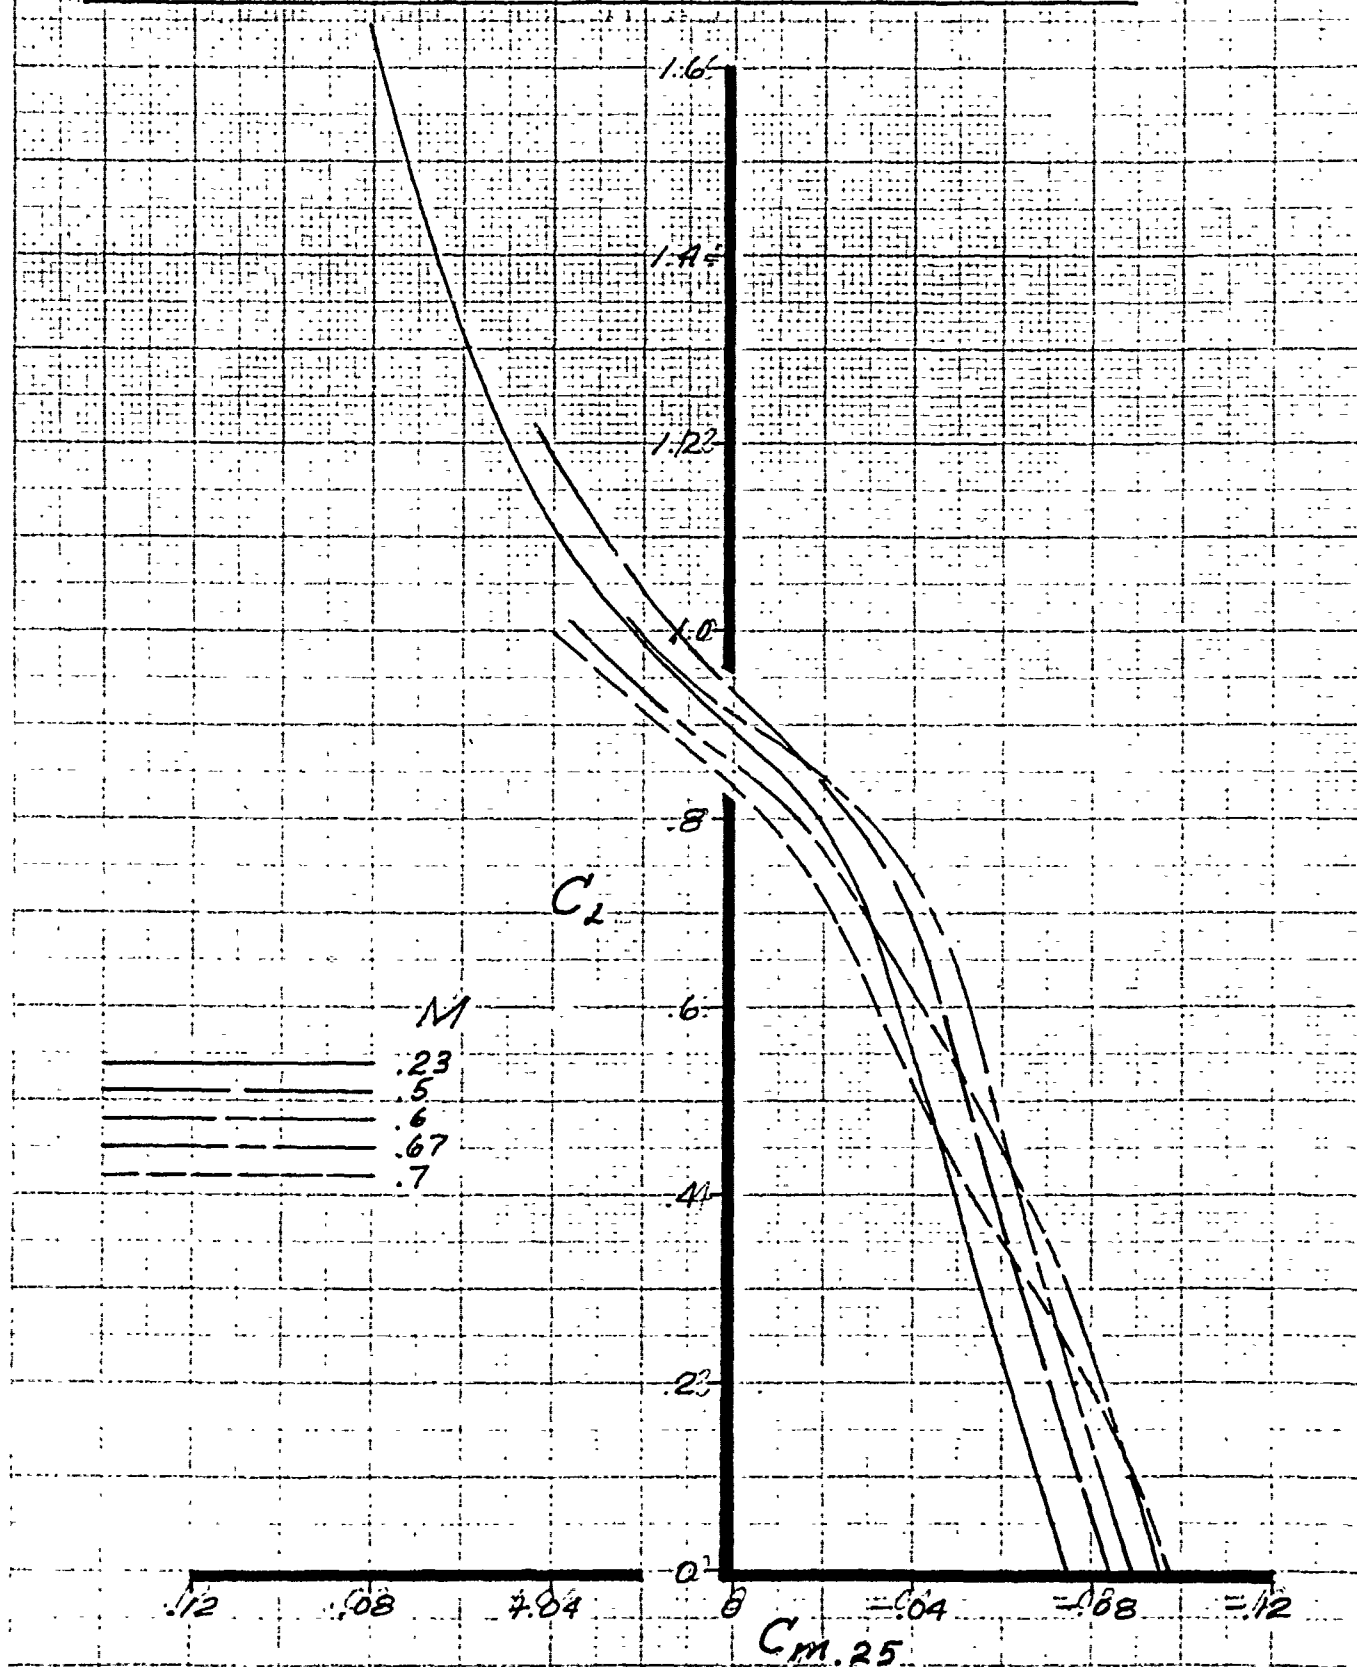

PREPARED BY R.L.D.
 DATE 7-4-32
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION
 LOCKHEED C-130

PAGE 41
 MODEL C-130
 REPORT NO 9062

PITCHING MOMENT AT SEVERAL MACH
NOS FOR AIRPLANE LESS EMPENNAGE

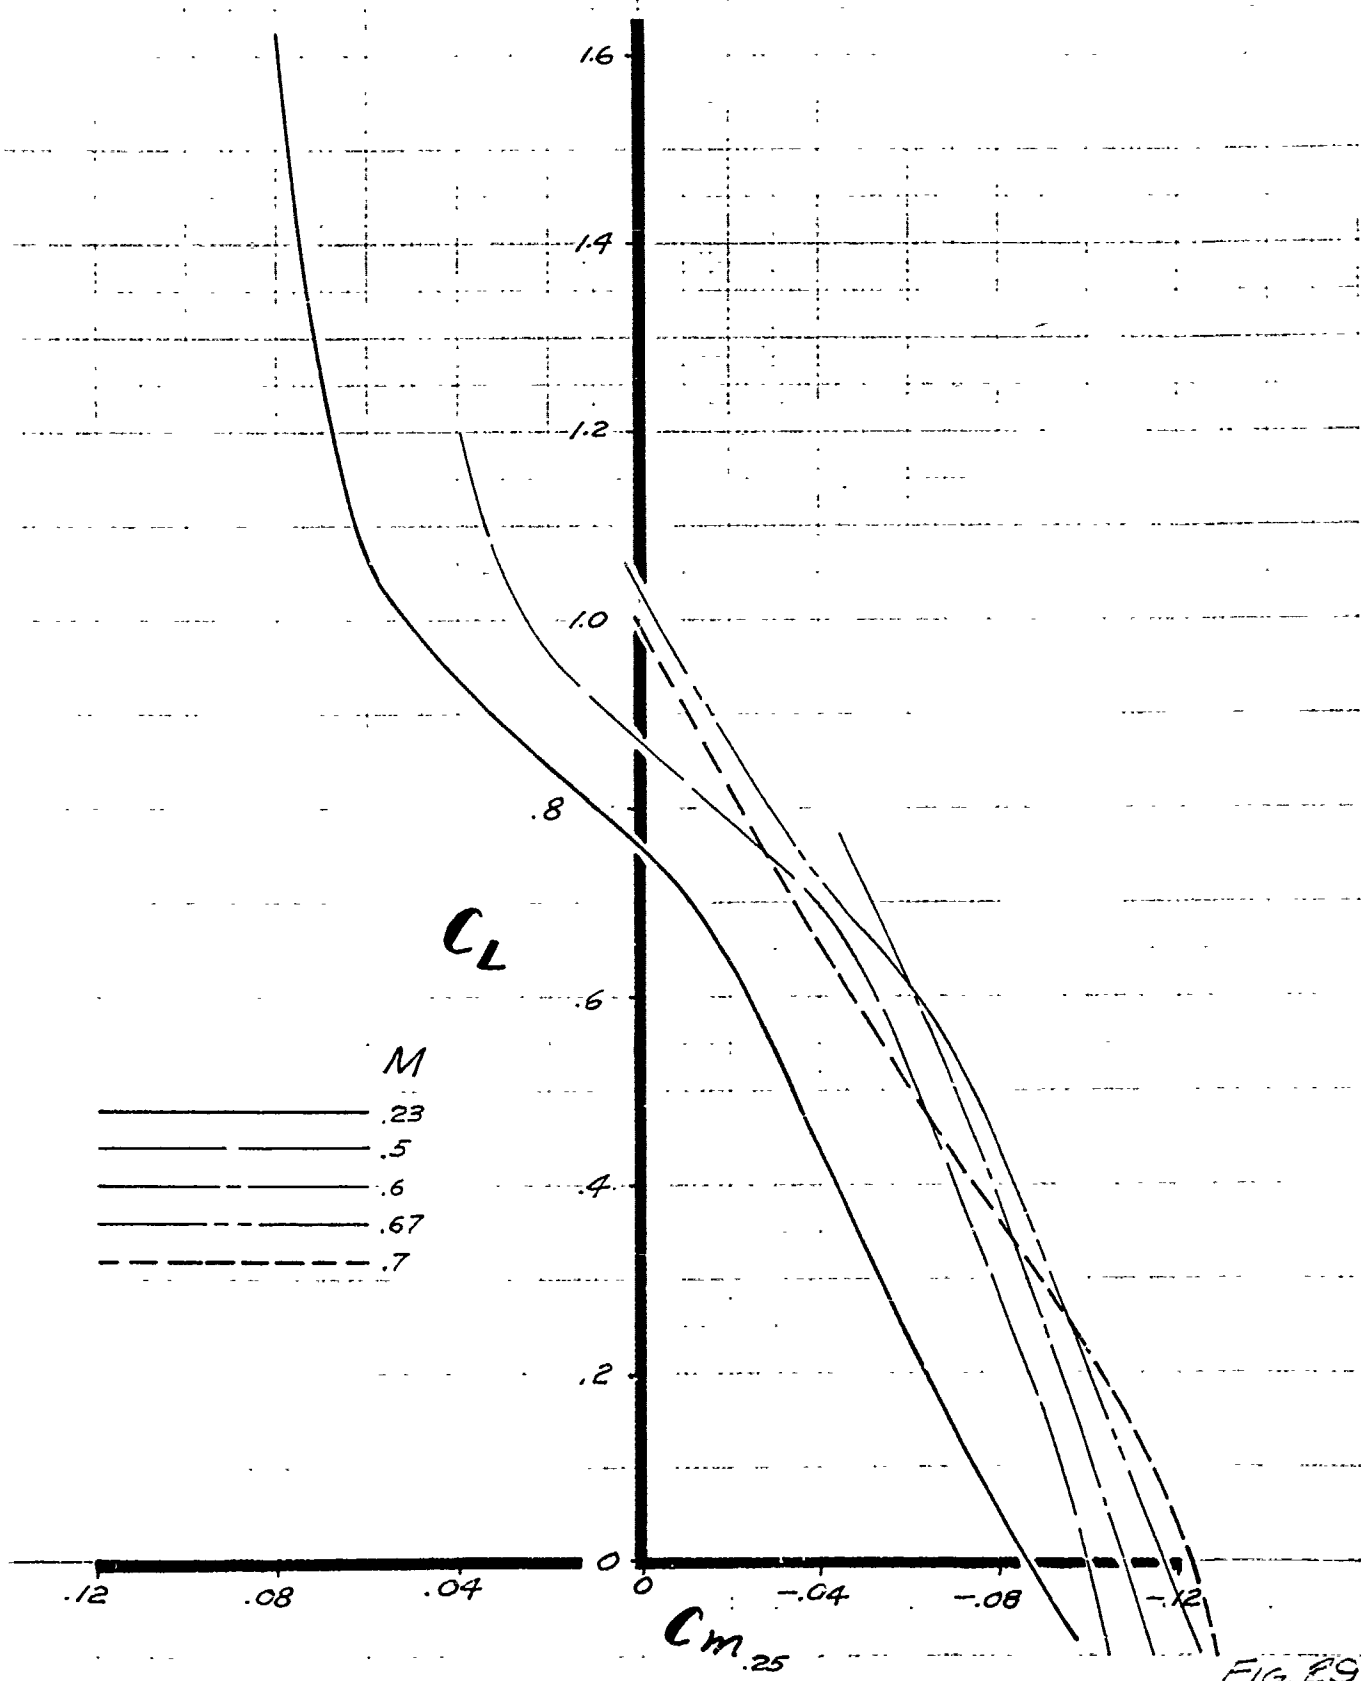


FIG. 29

PREPARED BY R.L.D.
 DATE 8-3-52
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 42
 MODEL C-130
 REPORT NO. 9062

LOCKHEED C-130

PITCHING MOMENT AT SEVERAL
MACH NOS. FOR AIRPLANE LESS
HORIZONTAL TAIL

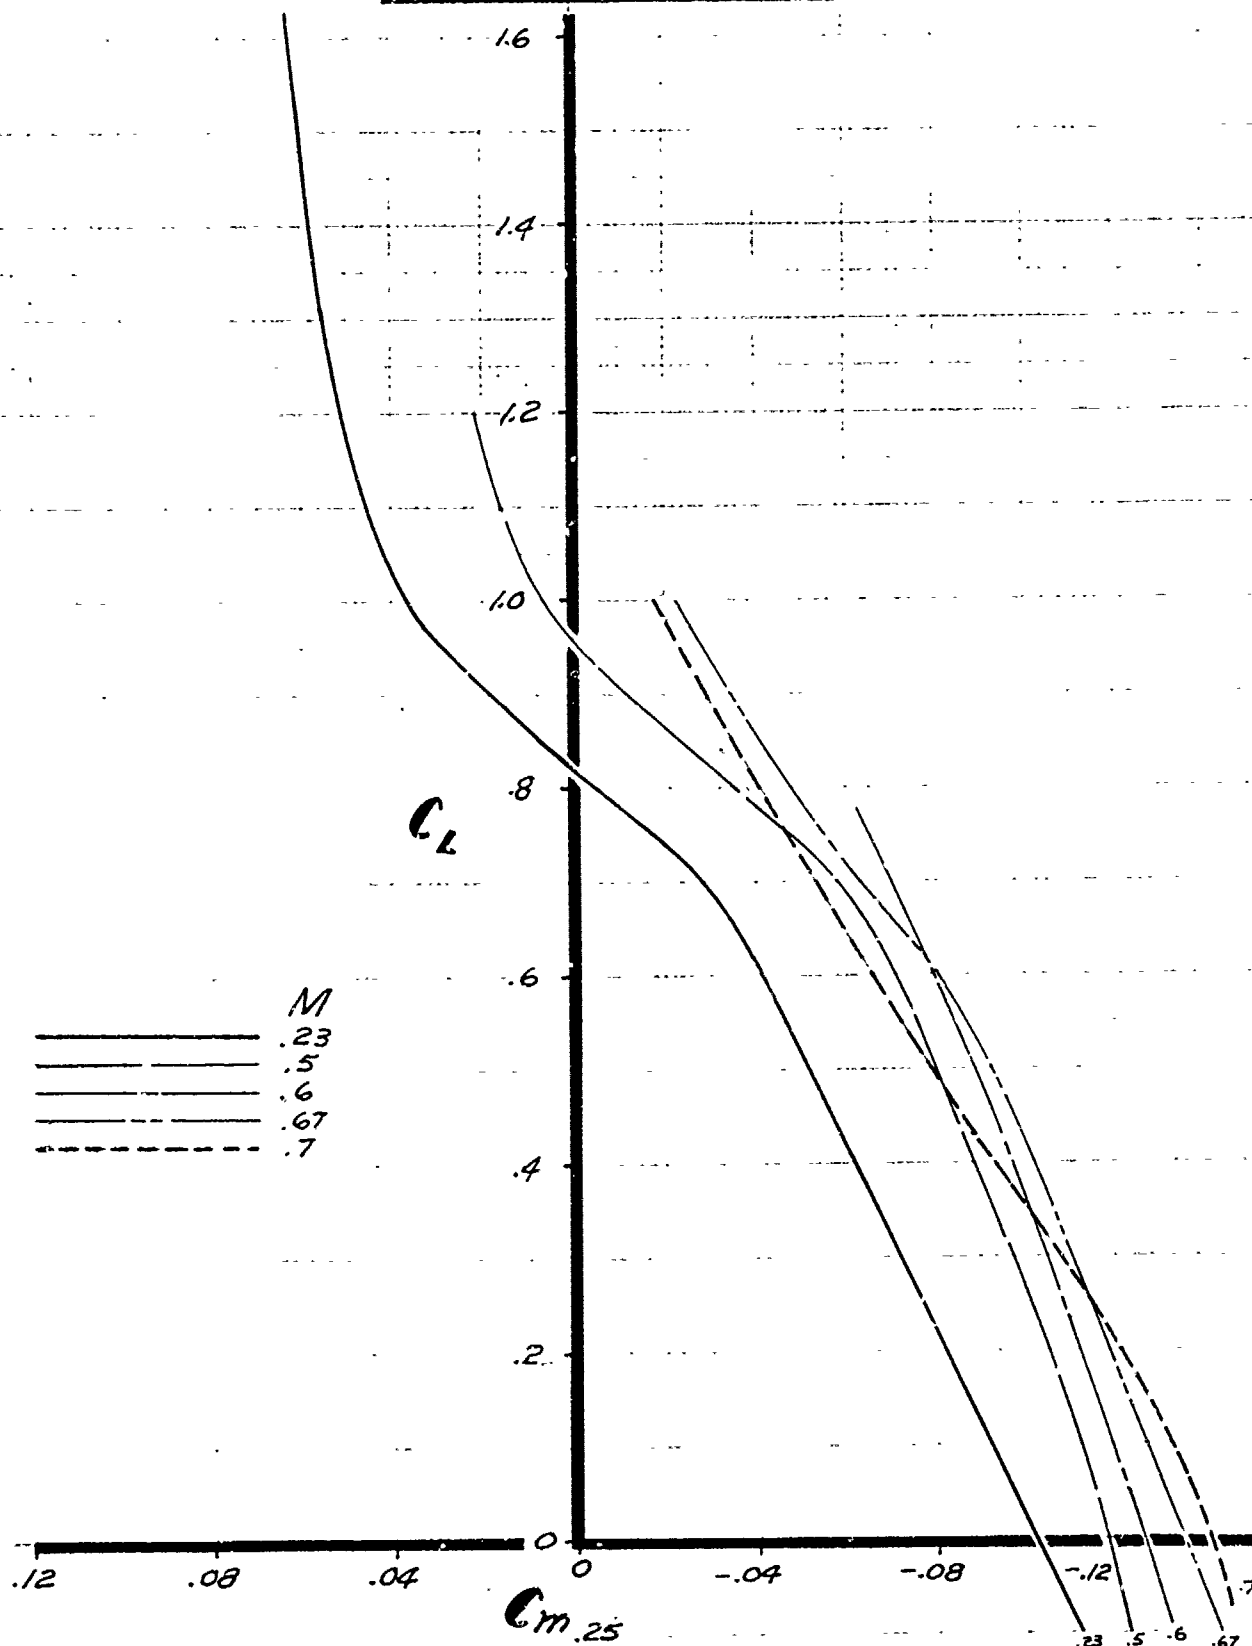


FIG. 30

PREPARED BY R.L.D.
 DATE 9-9-52
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 43
 MODEL C-130
 REPORT NO. 9062

LOCKHEED C-130 PITCHING MOMENTS AT SEVERAL MACH NOS FOR COMPLETE AIRPLANE

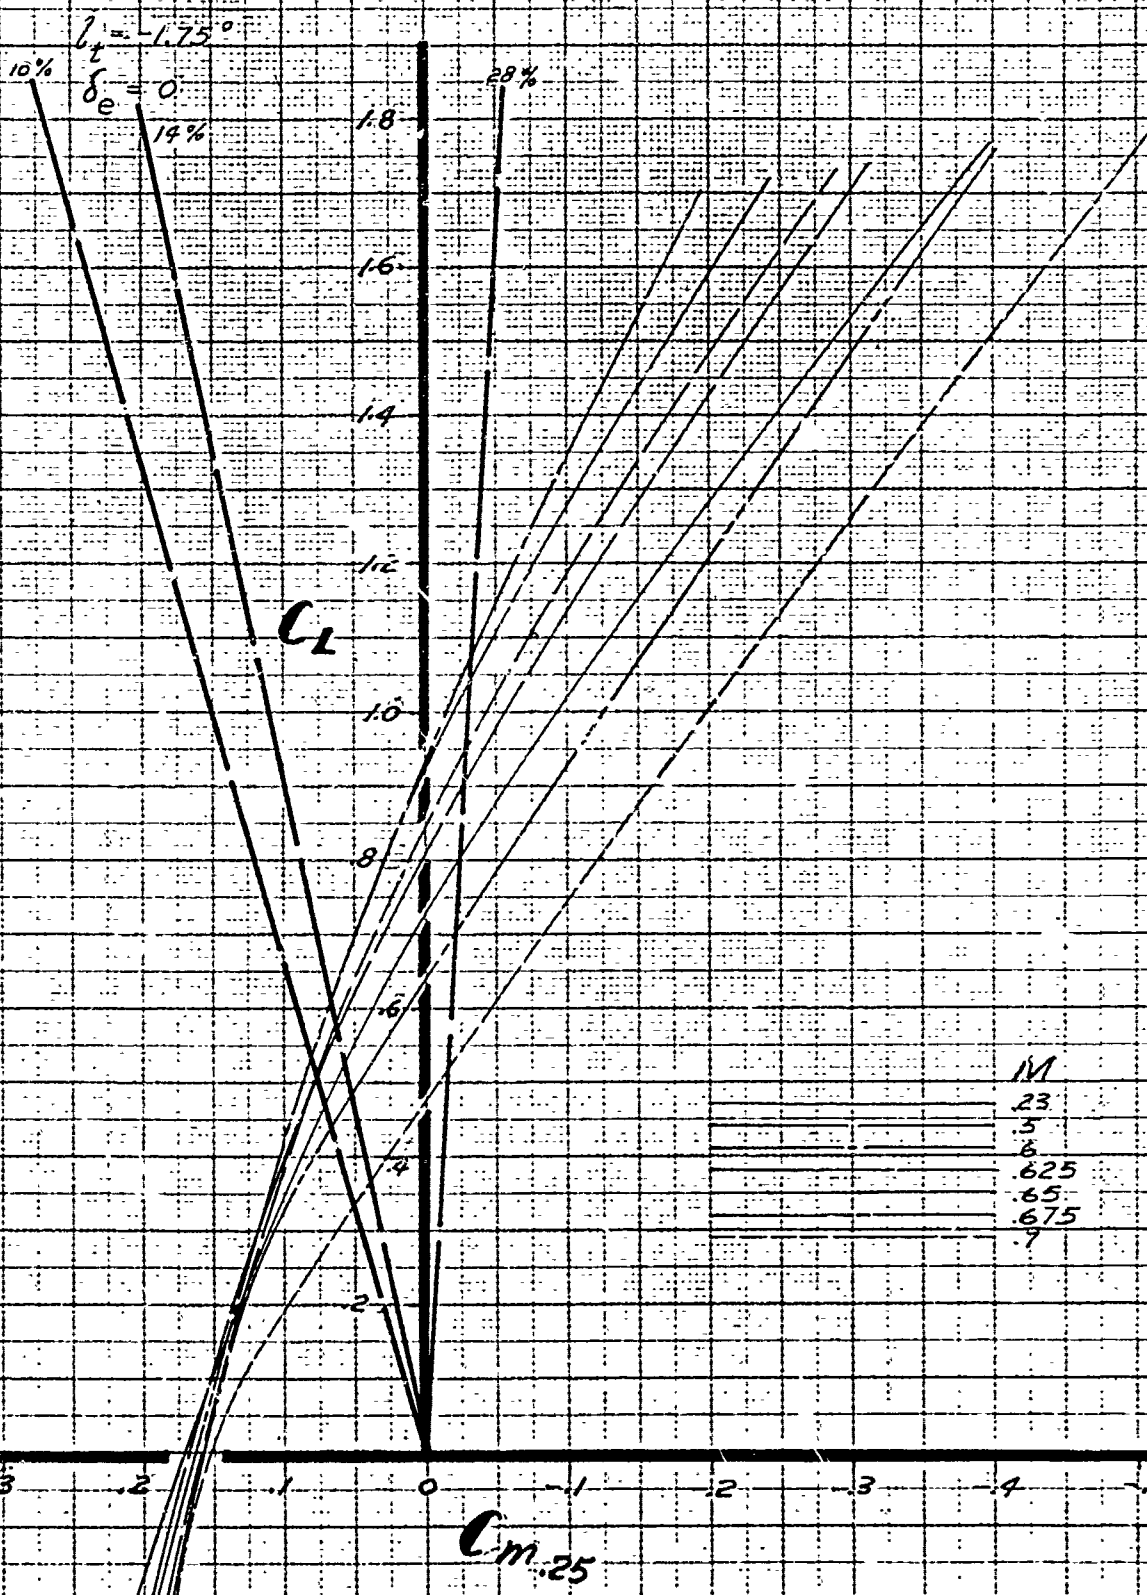


FIG. 31

PREPARED BY 66-12
DATE 11-28-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 44
MODEL C-130
REPORT NO 9062

LOCKHEED C-130
EFFECTS OF POWER ON PITCHING
CHARACTERISTICS OF AIRPLANE

LESS HORIZONTAL TAIL

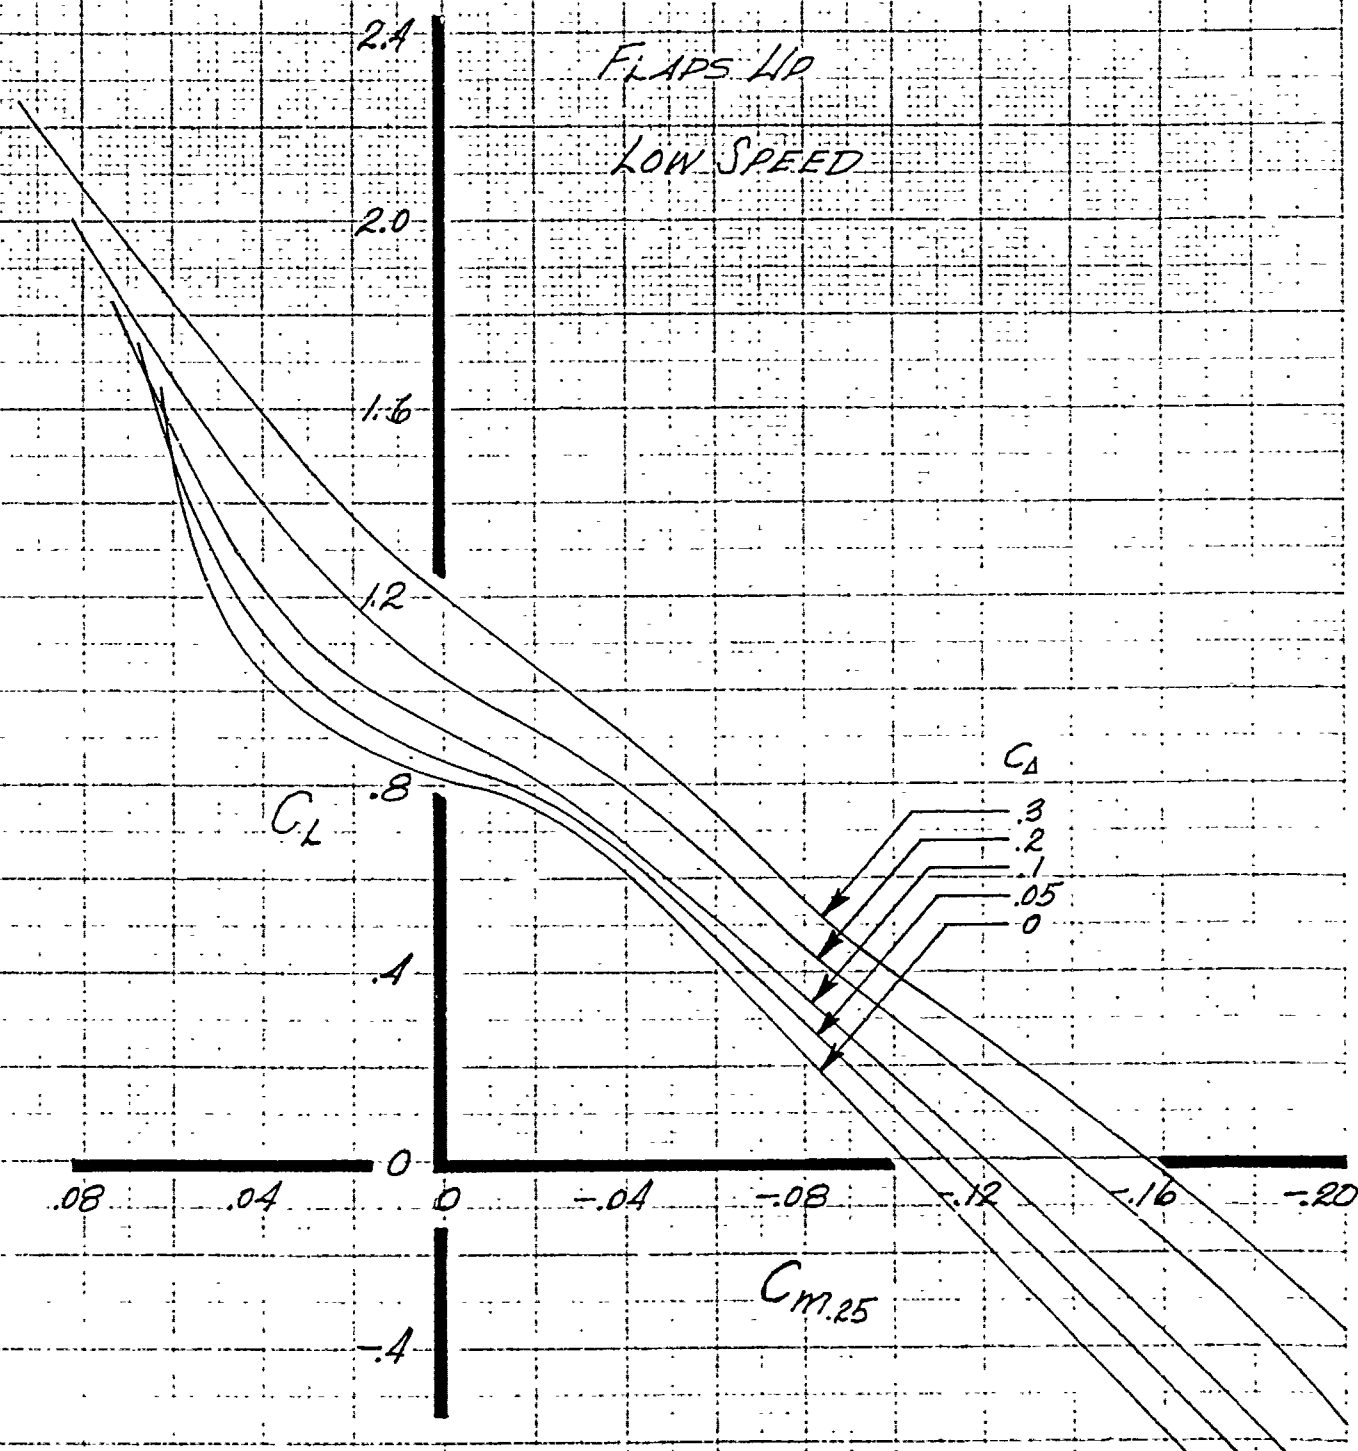


FIG. 32

LOCKHEED C-130
EFFECTS OF POWER ON PITCHING
CHARACTERISTICS OF AIRPLANE
LESS HORIZONTAL TAIL

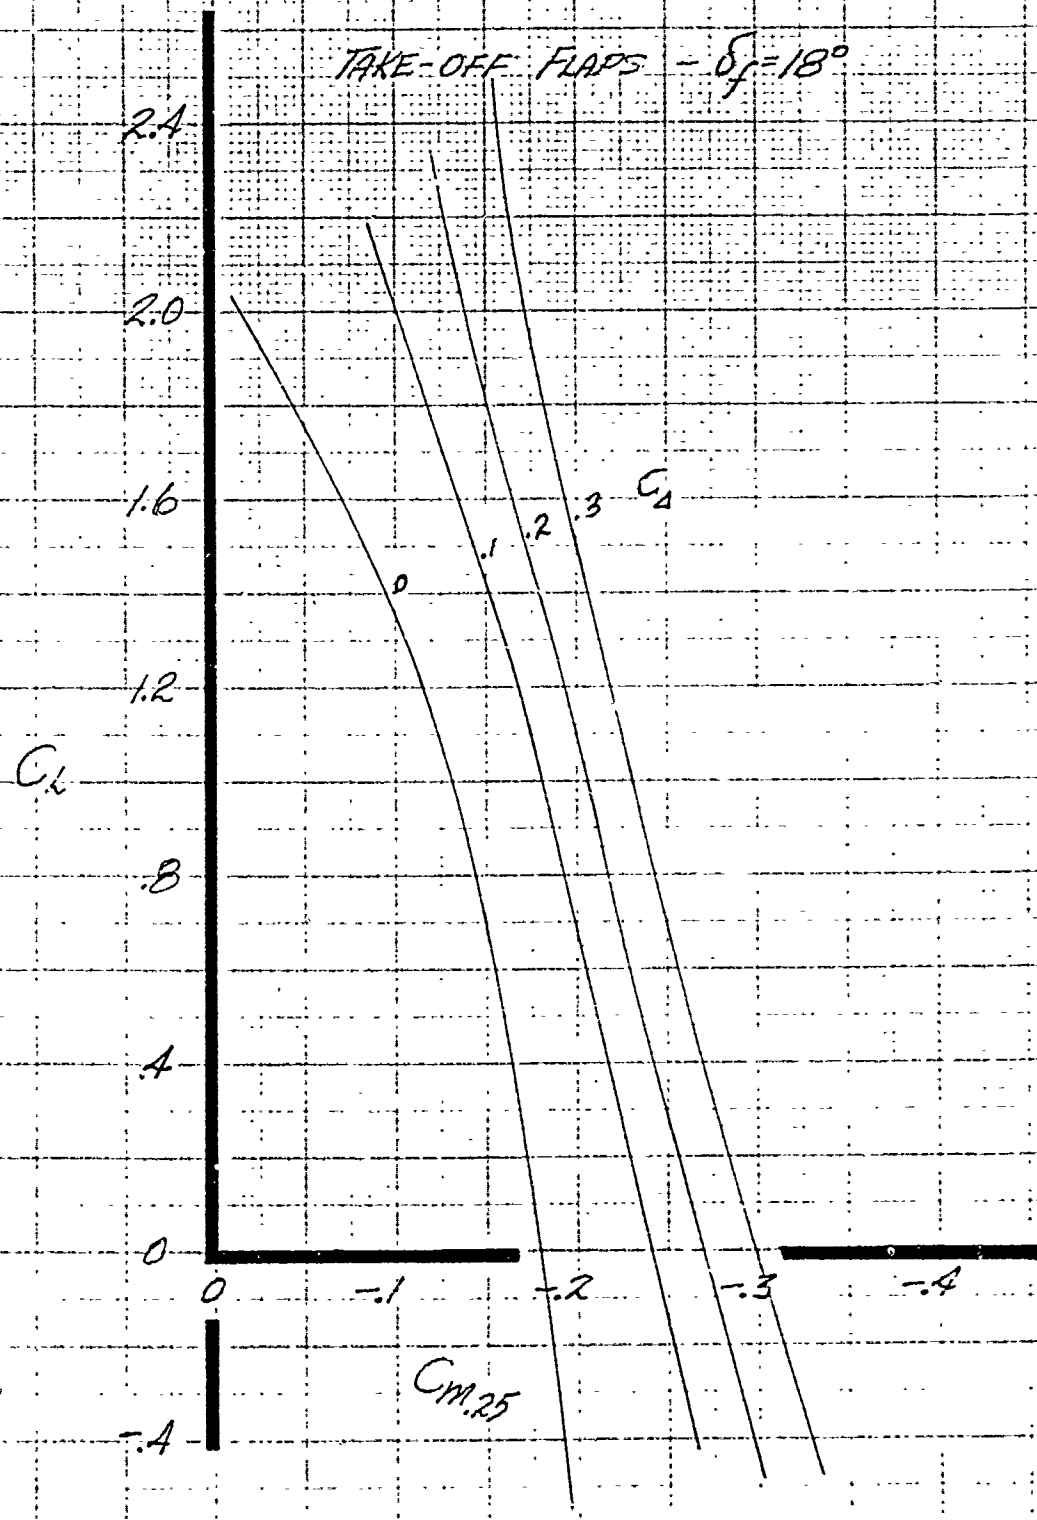



Fig 33

PREPARED BY R.L.D.
DATE 11-25-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 46
MODEL C-130
REPORT NO 9062

LOCKHEED C-130
EFFECTS OF POWER ON PITCHING
CHARACTERISTICS OF AIRPLANE
LESS HORIZONTAL TAIL

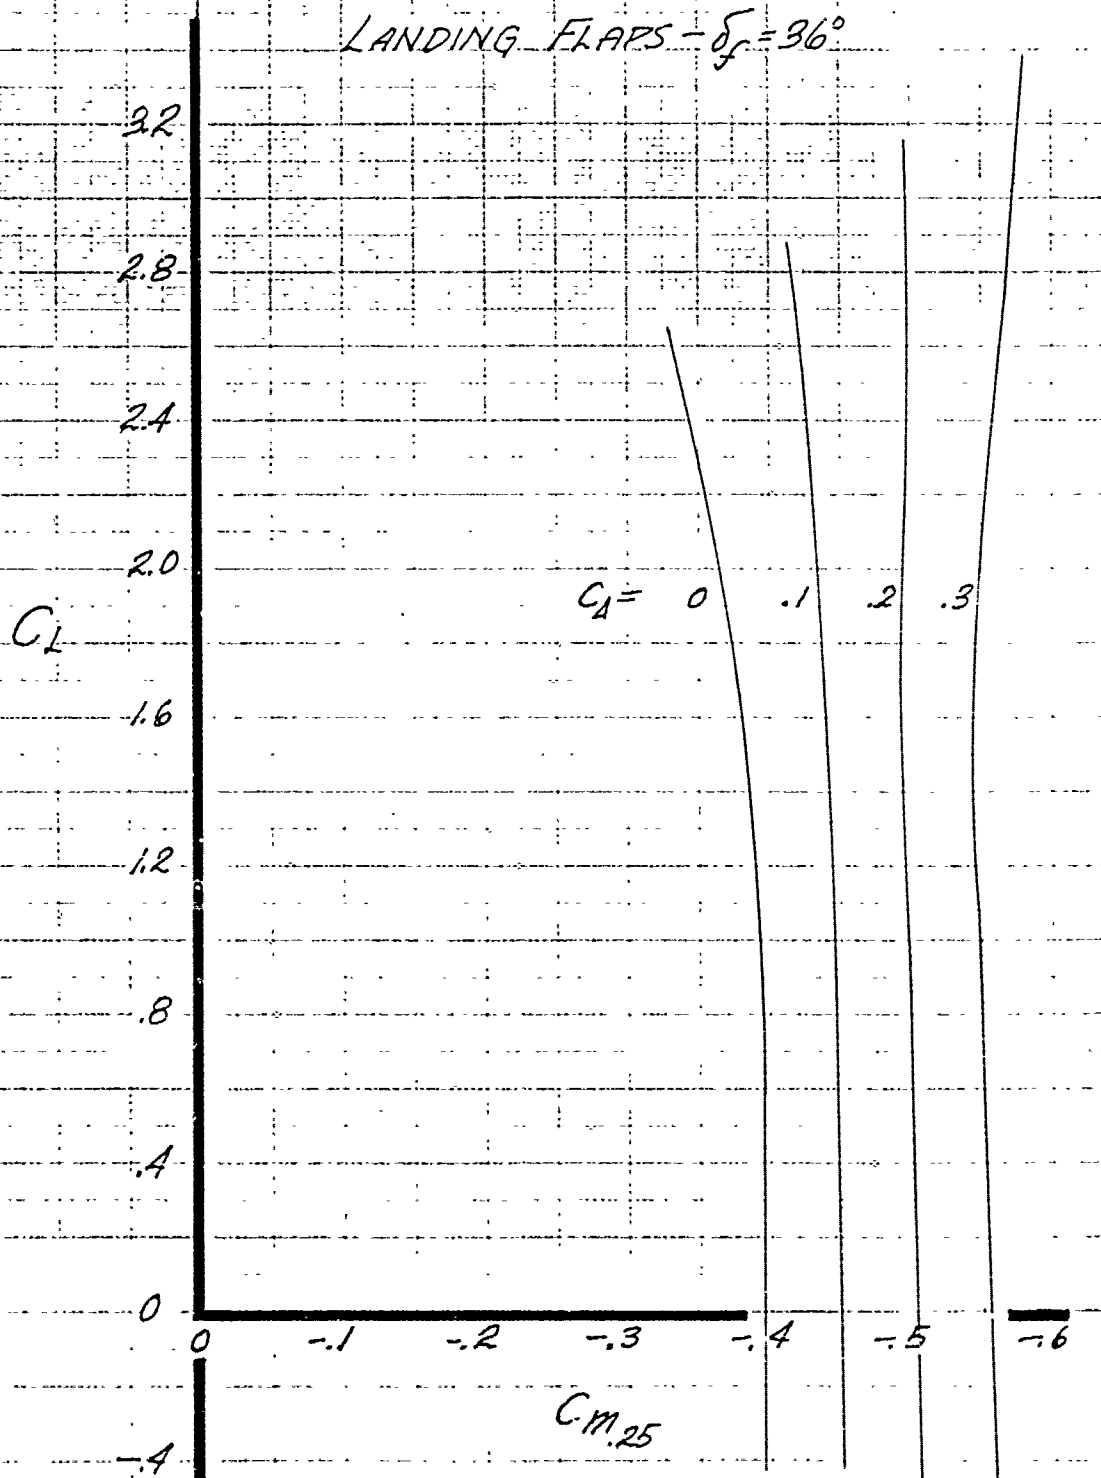


PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 47
MODEL C-30
REPORT NO 9062

LOCKHEED C-130

POWER EFFECTS ON AIRPLANE PITCHING MOMENT COEFFICIENTS

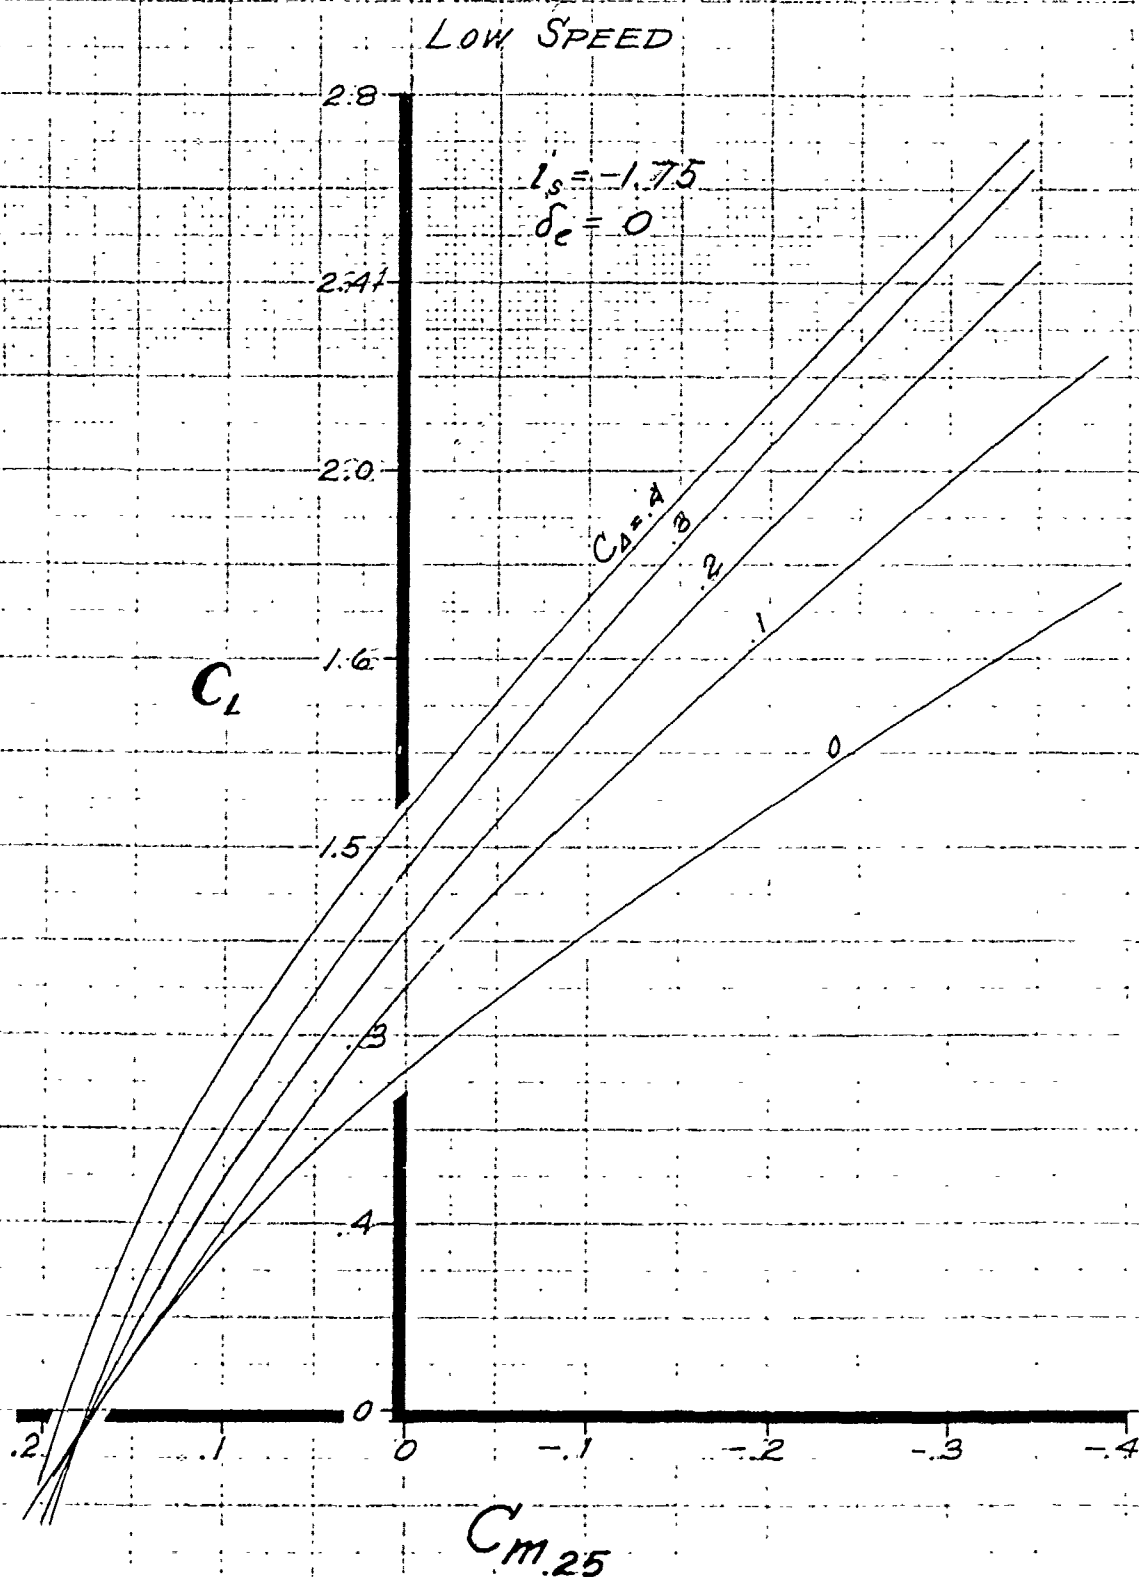


PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 48
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

EFFECTS OF POWER ON PITCH CHARACTERISTICS OF AIRPLANE

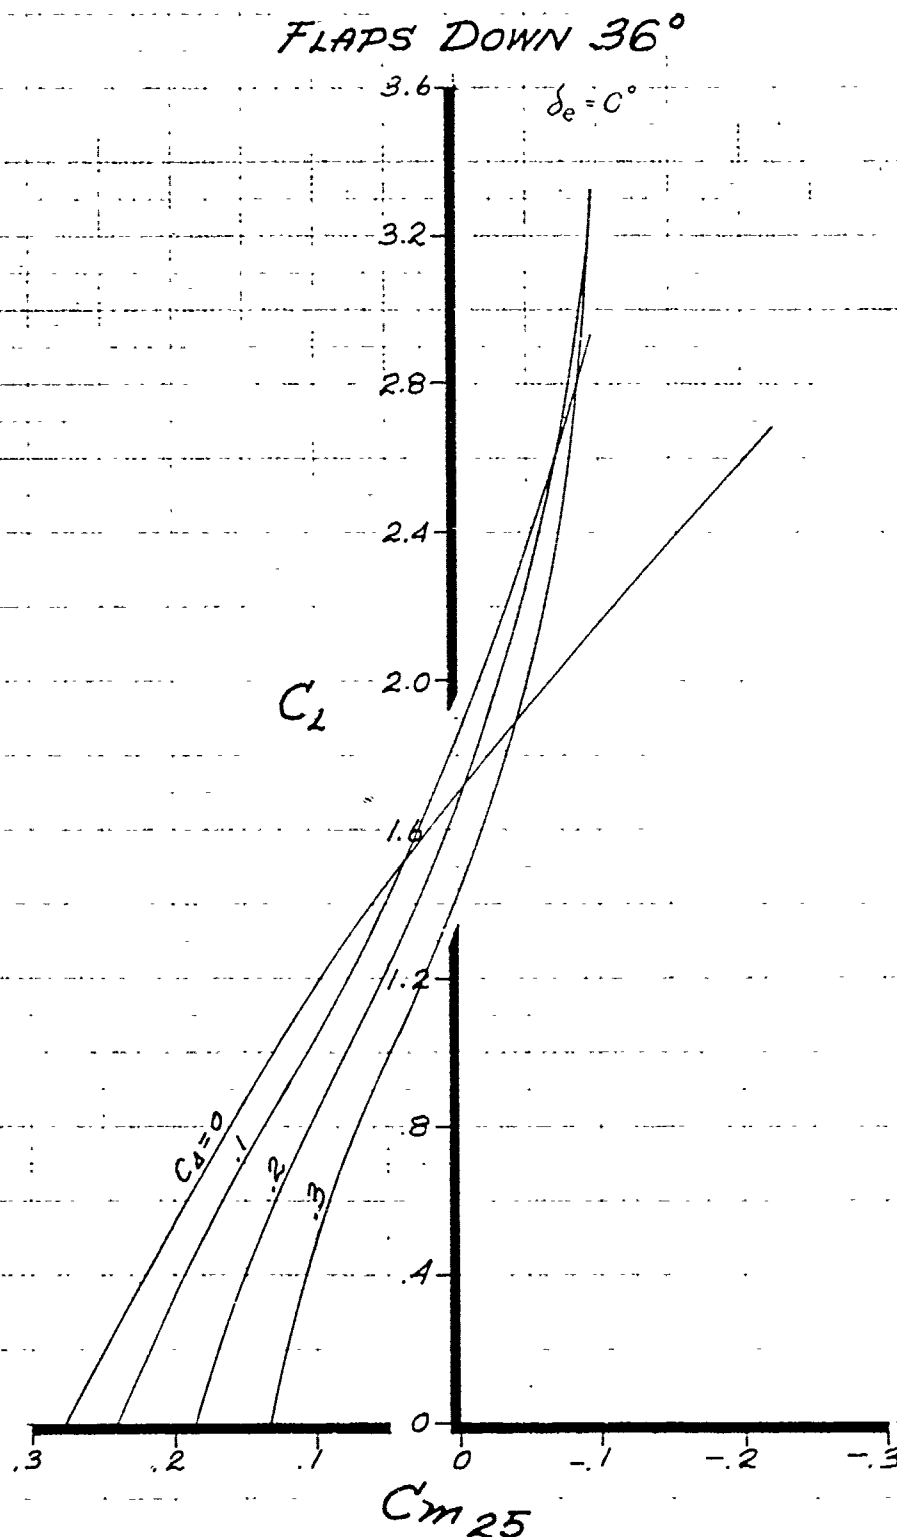

PREPARED BY _____
DATE _____
CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION

PAGE - 49
MODEL - C-130
REPORT NO. 9062

LOCKHEED C-130

ELEVATOR EFFECTIVENESS

LOW SPEED

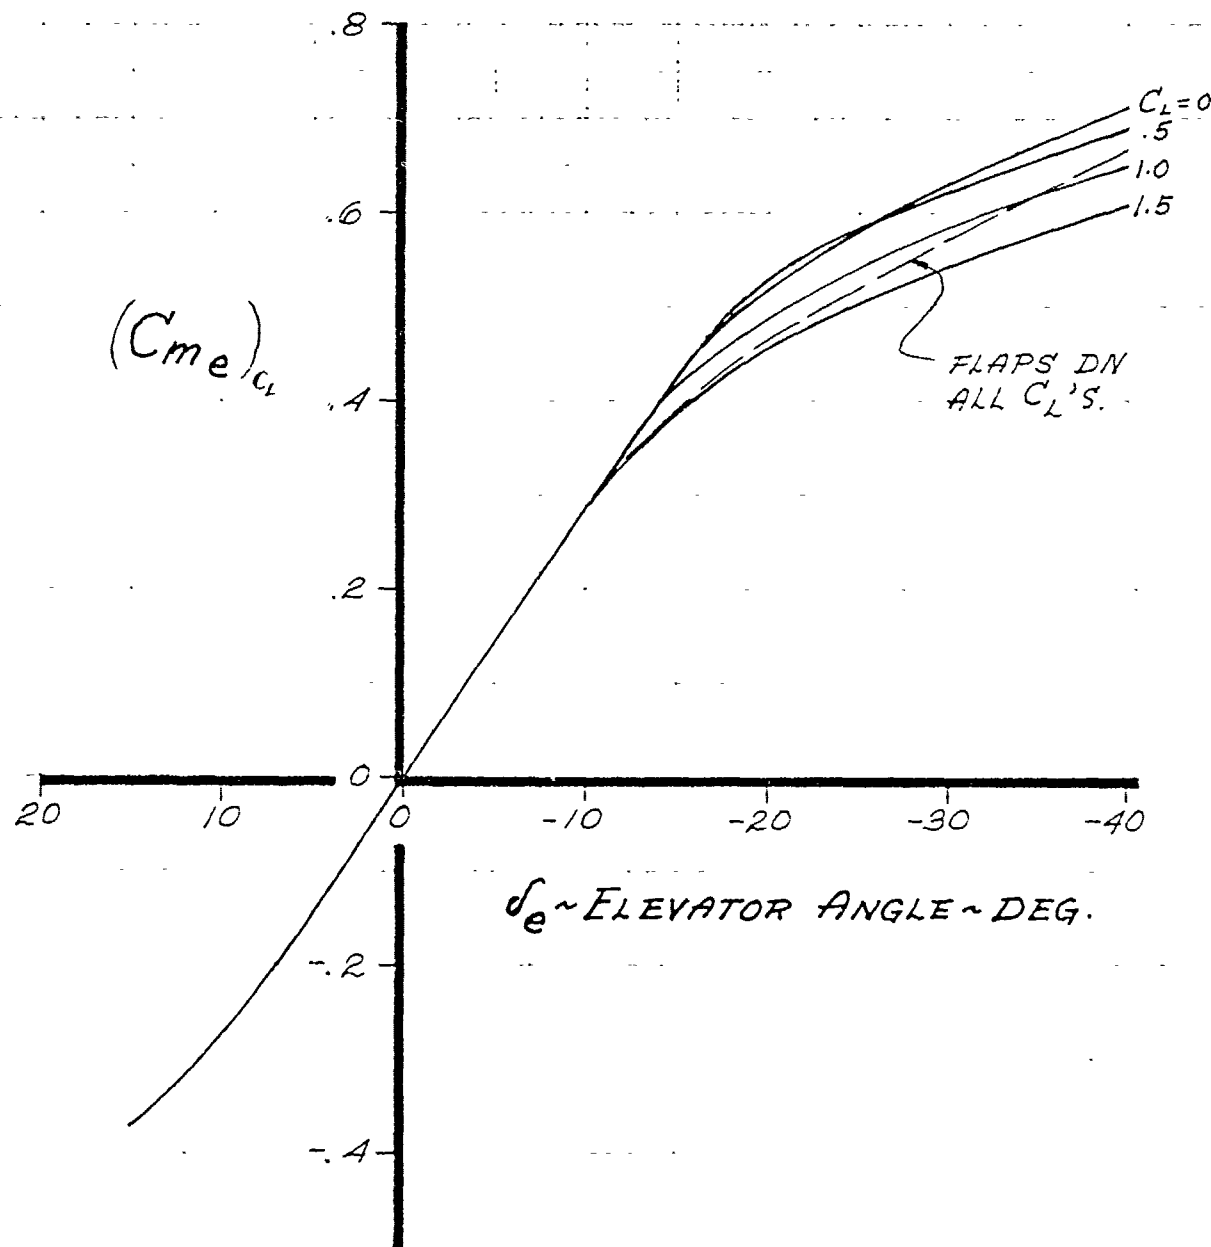


PREPARED BY RLD
DATE 9-9-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 50
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

VARIATION OF ELEVATOR
EFFECTIVENESS WITH MACH NO

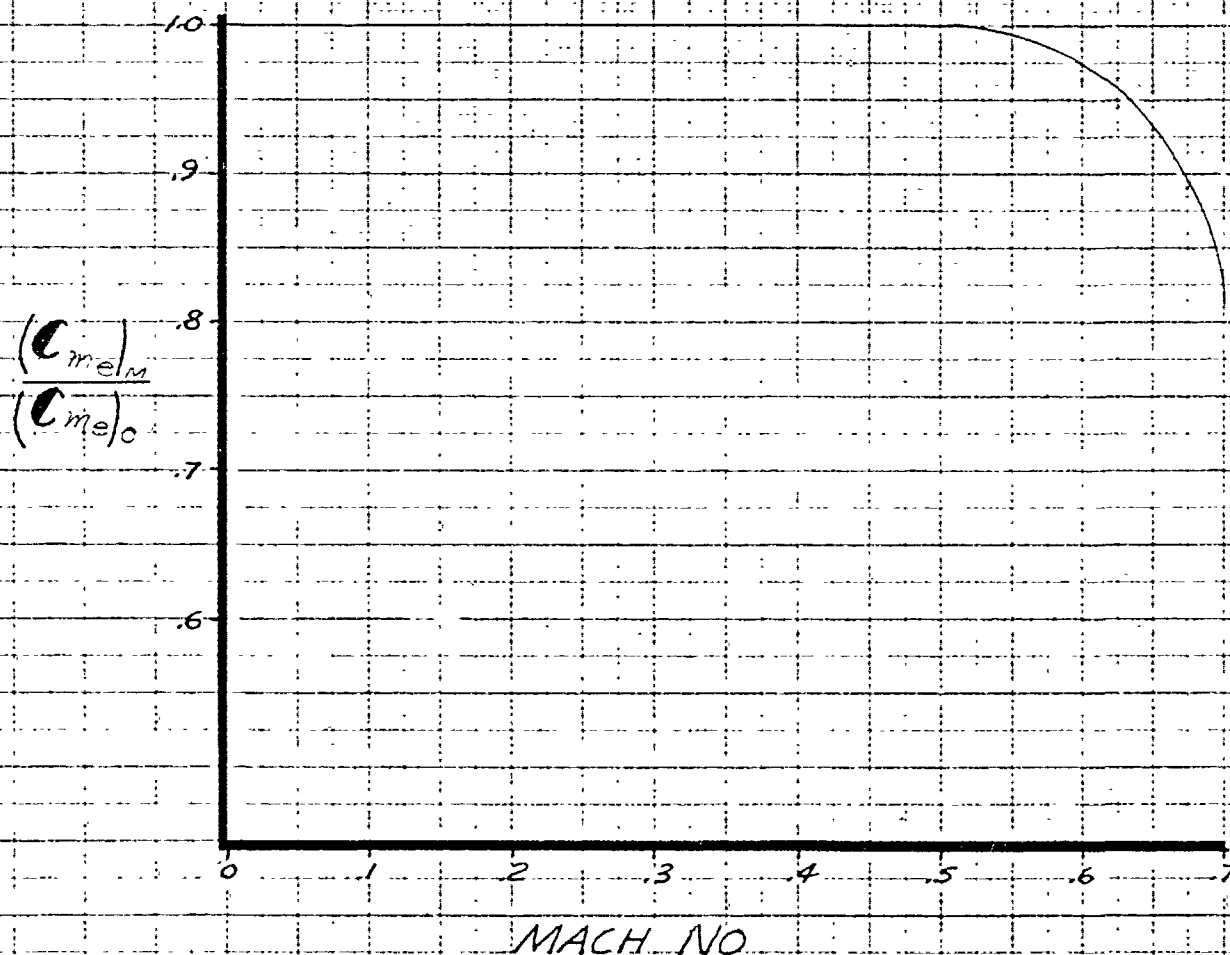

PREPARED BY _____
 DATE _____
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION


PAGE 51
 MODEL C-130
 REPORT NO. 9062

LOCKHEED C-130

ELEVATOR HINGE MOMENT

CHARACTERISTICS

LOW SPEED - FLAPS UP

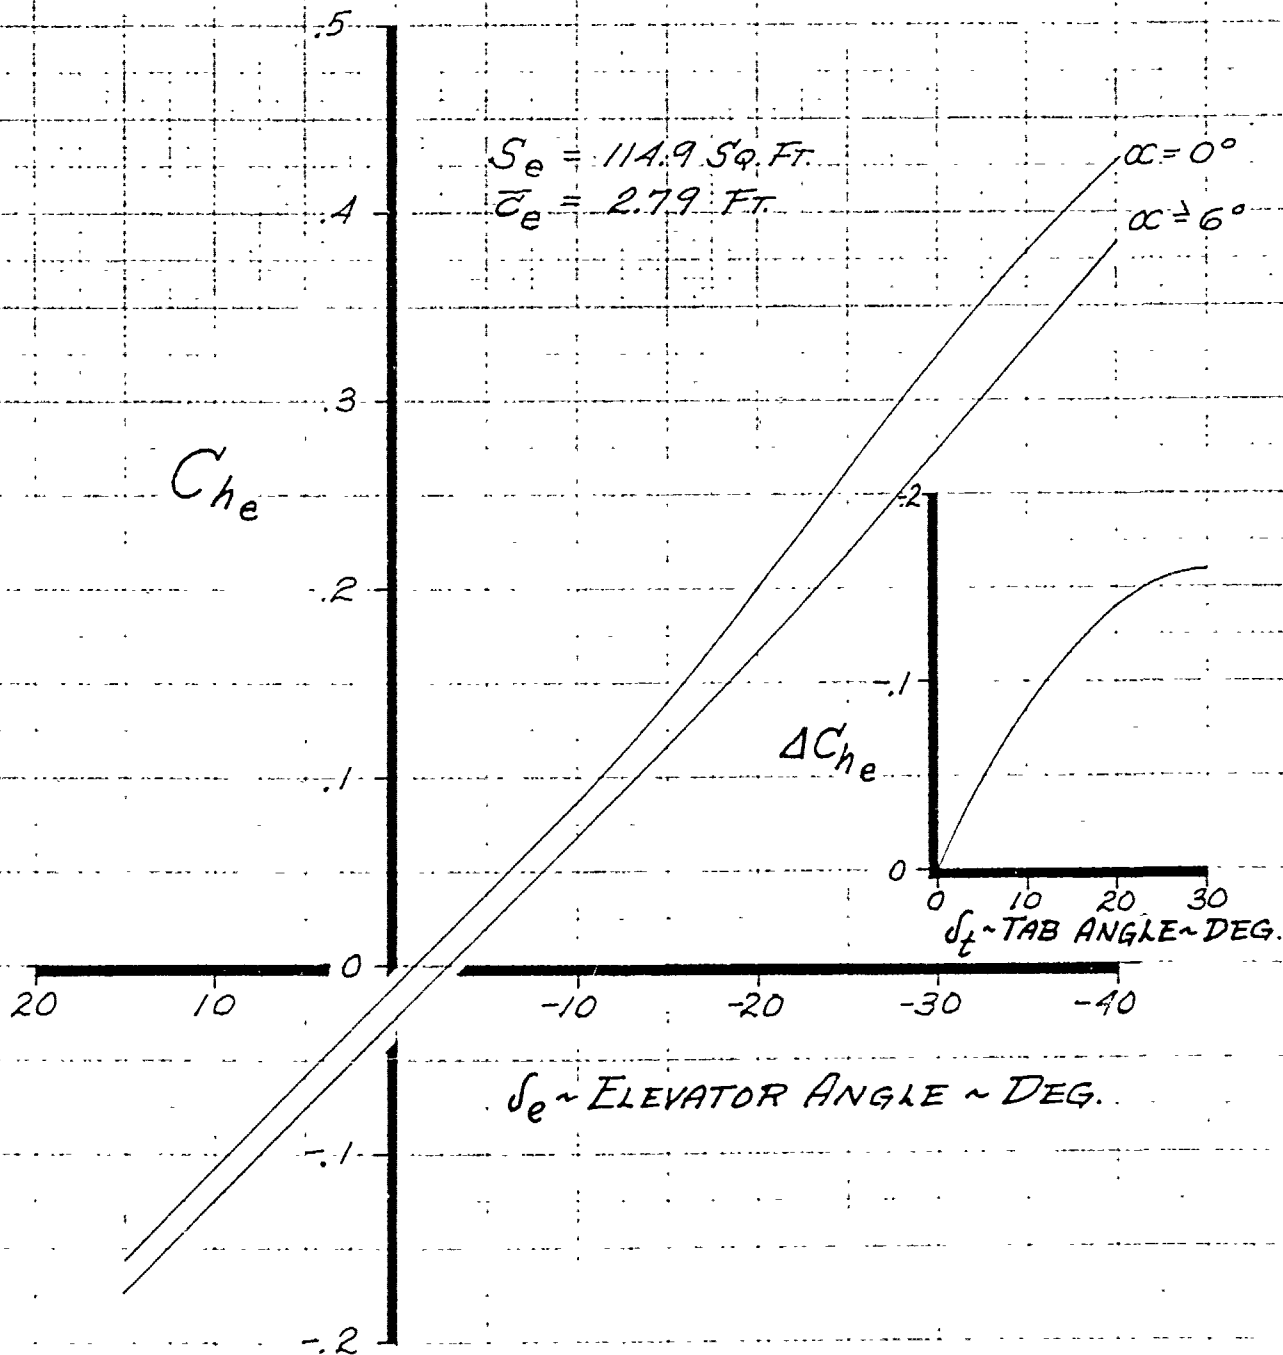

PREPARED BY _____
 DATE _____
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 52
 MODEL C-130
 REPORT NO 9062

LOCKHEED C-130 ELEVATOR HINGE MOMENT CHARACTERISTICS

LOW SPEED FLAPS DOWN

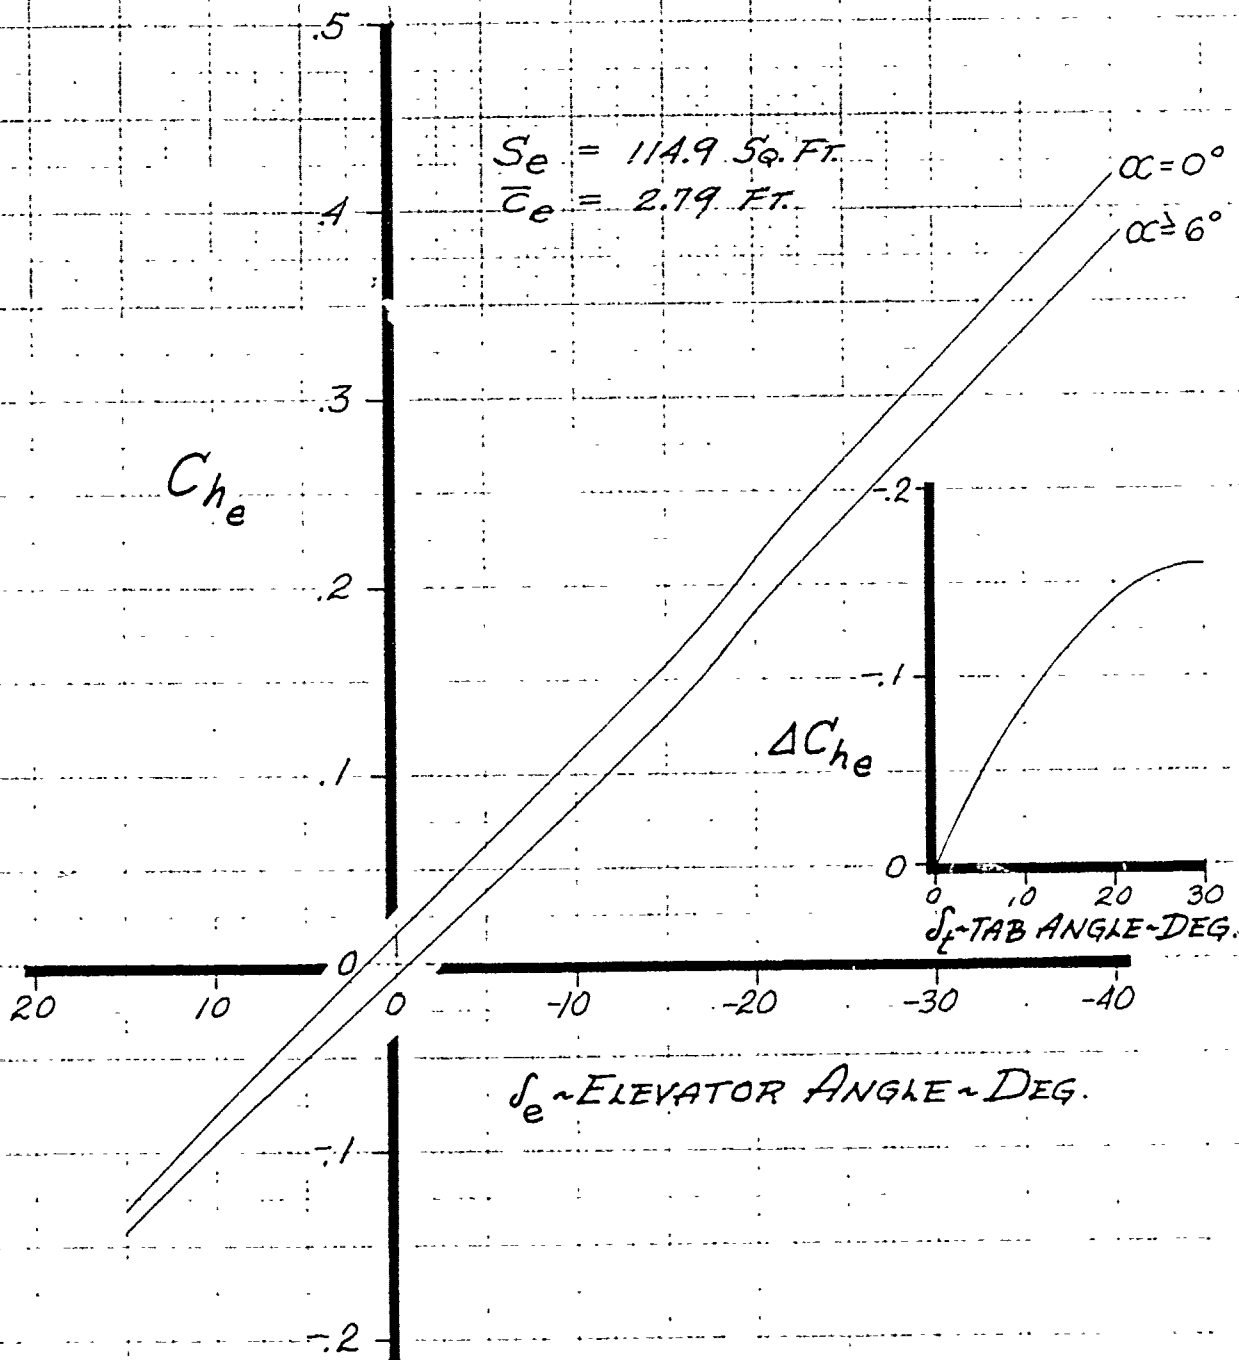


Fig. 40

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

DIRECTIONAL AERODYNAMIC CHARACTERISTICS

Directional aerodynamic characteristics for the airplane and airplane build-up are obtained principally from the test results of refs. 1, 2 and 3. Where data from any other source is used, proper reference is made in the test.

SIDE FORCE CHARACTERISTICS

Variations of side force coefficient with yaw angle for the airplane build-up for low speeds is given in fig. 41. From many test results it has been ascertained that airplane less tail side force characteristics do not change appreciably with increasing Mach No., but that the force on the vertical tail varies according to the Prandtl-Glauert relation. Effect of compressibility on airplane side force and vertical tail normal force has been determined on this basis, and is presented in fig. 47. Effects of power on airplane side force with and without the vertical tail are given in fig. 42 as obtained from wind tunnel test results. As with other power effects, these are not subject to compressibility correction but should be added as increments to corrected power-off values. The manner of determining power effects from tunnel test is discussed in the section on pitching moment characteristics on p. 14.

YAWING MOMENT CHARACTERISTICS

The variation of yawing moment coefficient with yaw angle for the airplane build-up is given in fig. 44 for low speeds. These curves are applicable to all flap settings. As is the case with side force, effects of compressibility are confined to the contribution of the vertical

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

tail, and the effects of Mach Number on airplane directional stability, power-off, presented in fig. 47 are determined on that basis. Power effects for flaps retracted and extended are presented in figs. 45 and 46 to be used as increments applied to data corrected for compressibility. See the discussion of power effects on pitching moment characteristics, pg. 14, for the manner of obtaining all power effects.

RUDDER CHARACTERISTICS

Rudder effectiveness, including tabs, is presented in fig. 48 for all flap settings. Rudder hinge moment coefficient characteristics are shown in fig. 49, including trim tab effects. The values for zero yaw angle are obtained directly from wind tunnel tests, while effects of yaw angle are inferred from rudder floating characteristics observed in the tunnel and comparison with other similar surfaces. For the range of Mach Numbers in which critical design air loads will be produced, there are no changes in any of the aerodynamic characteristics of the rudder. The characteristics of the rudder control and boost system are shown in figs. 80 through 83, including a plot of the variation of rudder pedal force with rudder hinge moment.

PREPARED BY R.L.D.
DATE 6-17-52
CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION

PAGE 55
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130-30

SIDE FORCE CHARACTERISTICS

LOW SPEED

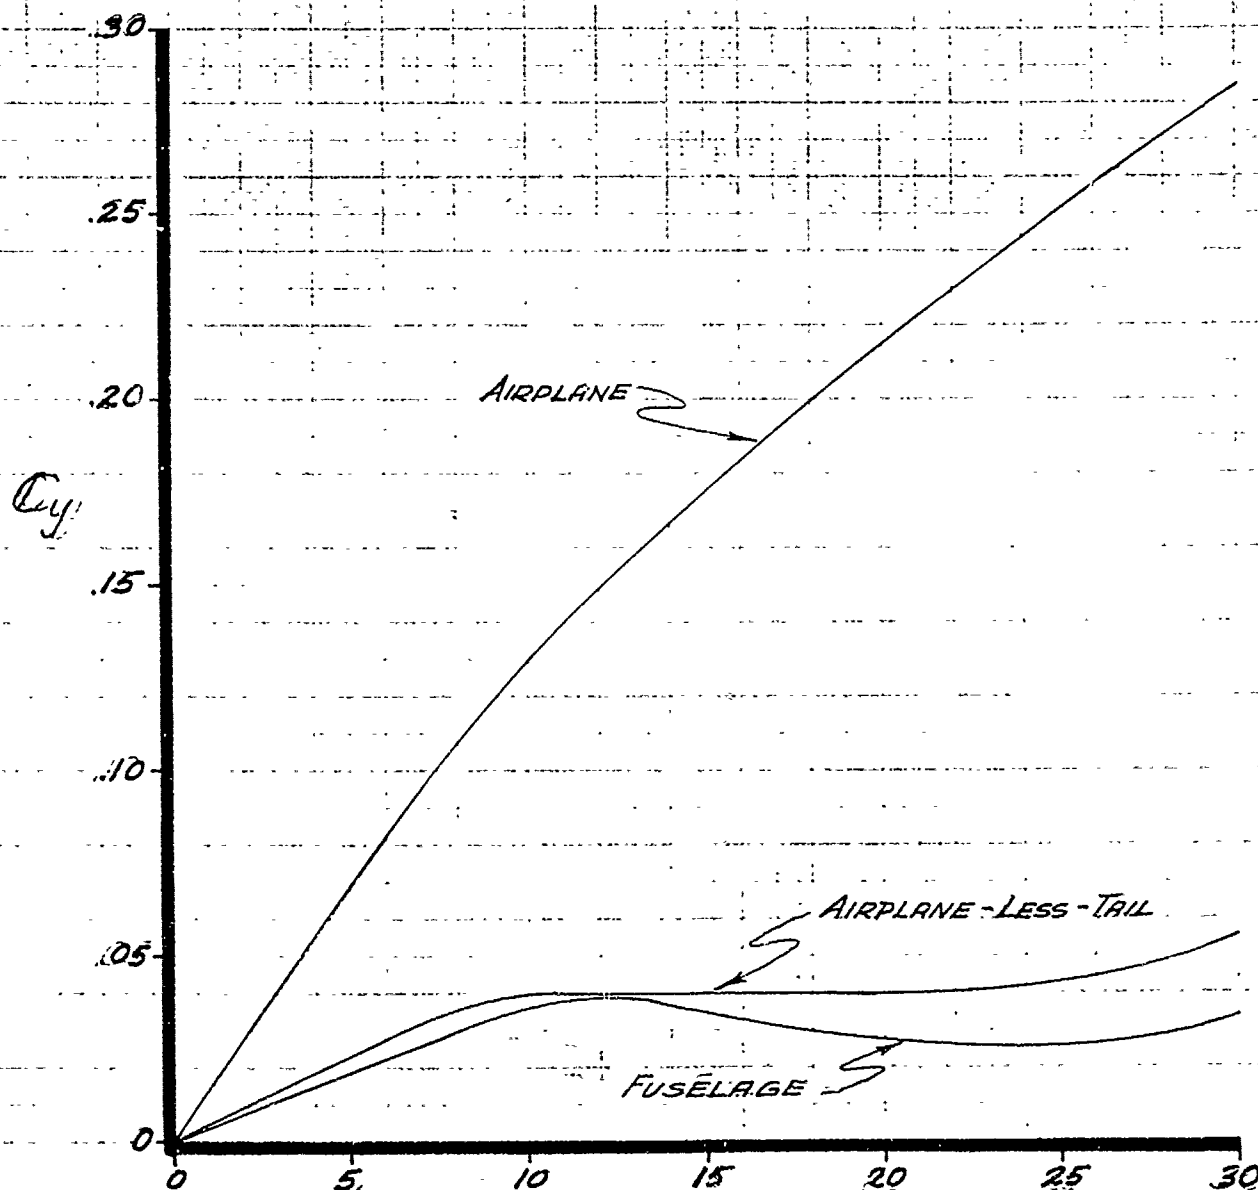

ψ - YAW ANGLE - DEG.


PREPARED BY R.L.D.
DATE 12-11-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 56
MODEL YC-130
REPORT NO 9062

LOCKHEED C-130

EFFECTS OF POWER ON AIRPLANE SIDE FORCE CHARACTERISTICS

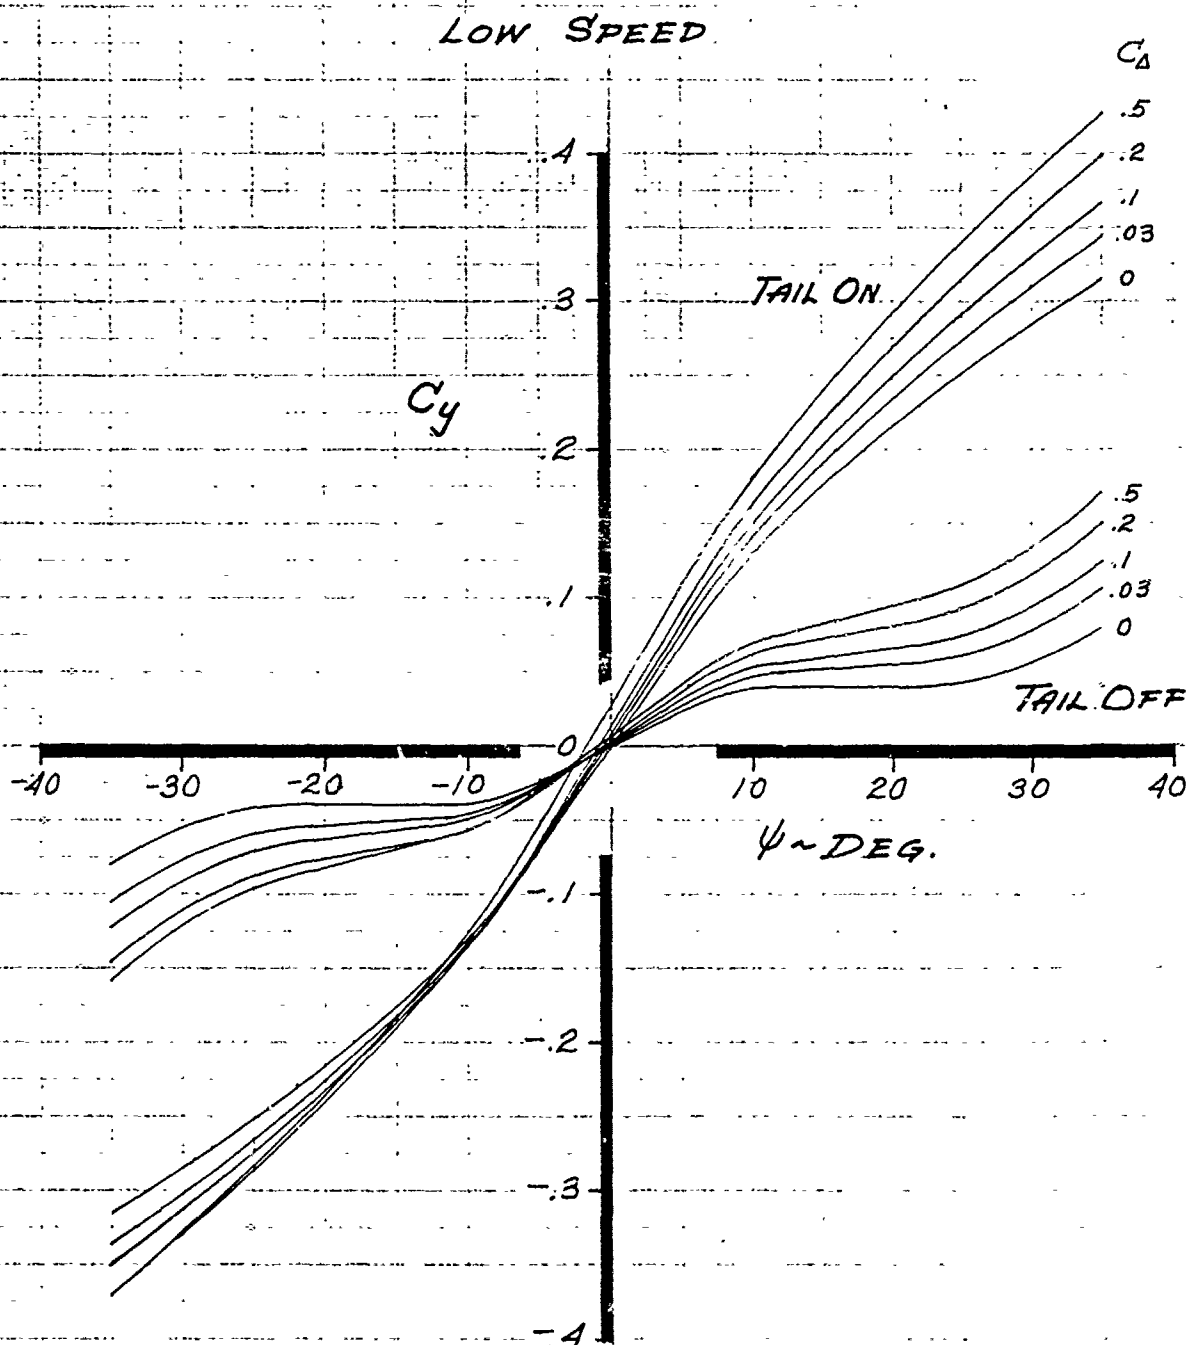

PREPARED BY _____
DATE _____
CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION

PAGE 57
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

EFFECTS OF POWER ON AIRPLANE SIDE FORCE CHARACTERISTICS

LANDING FLAPS

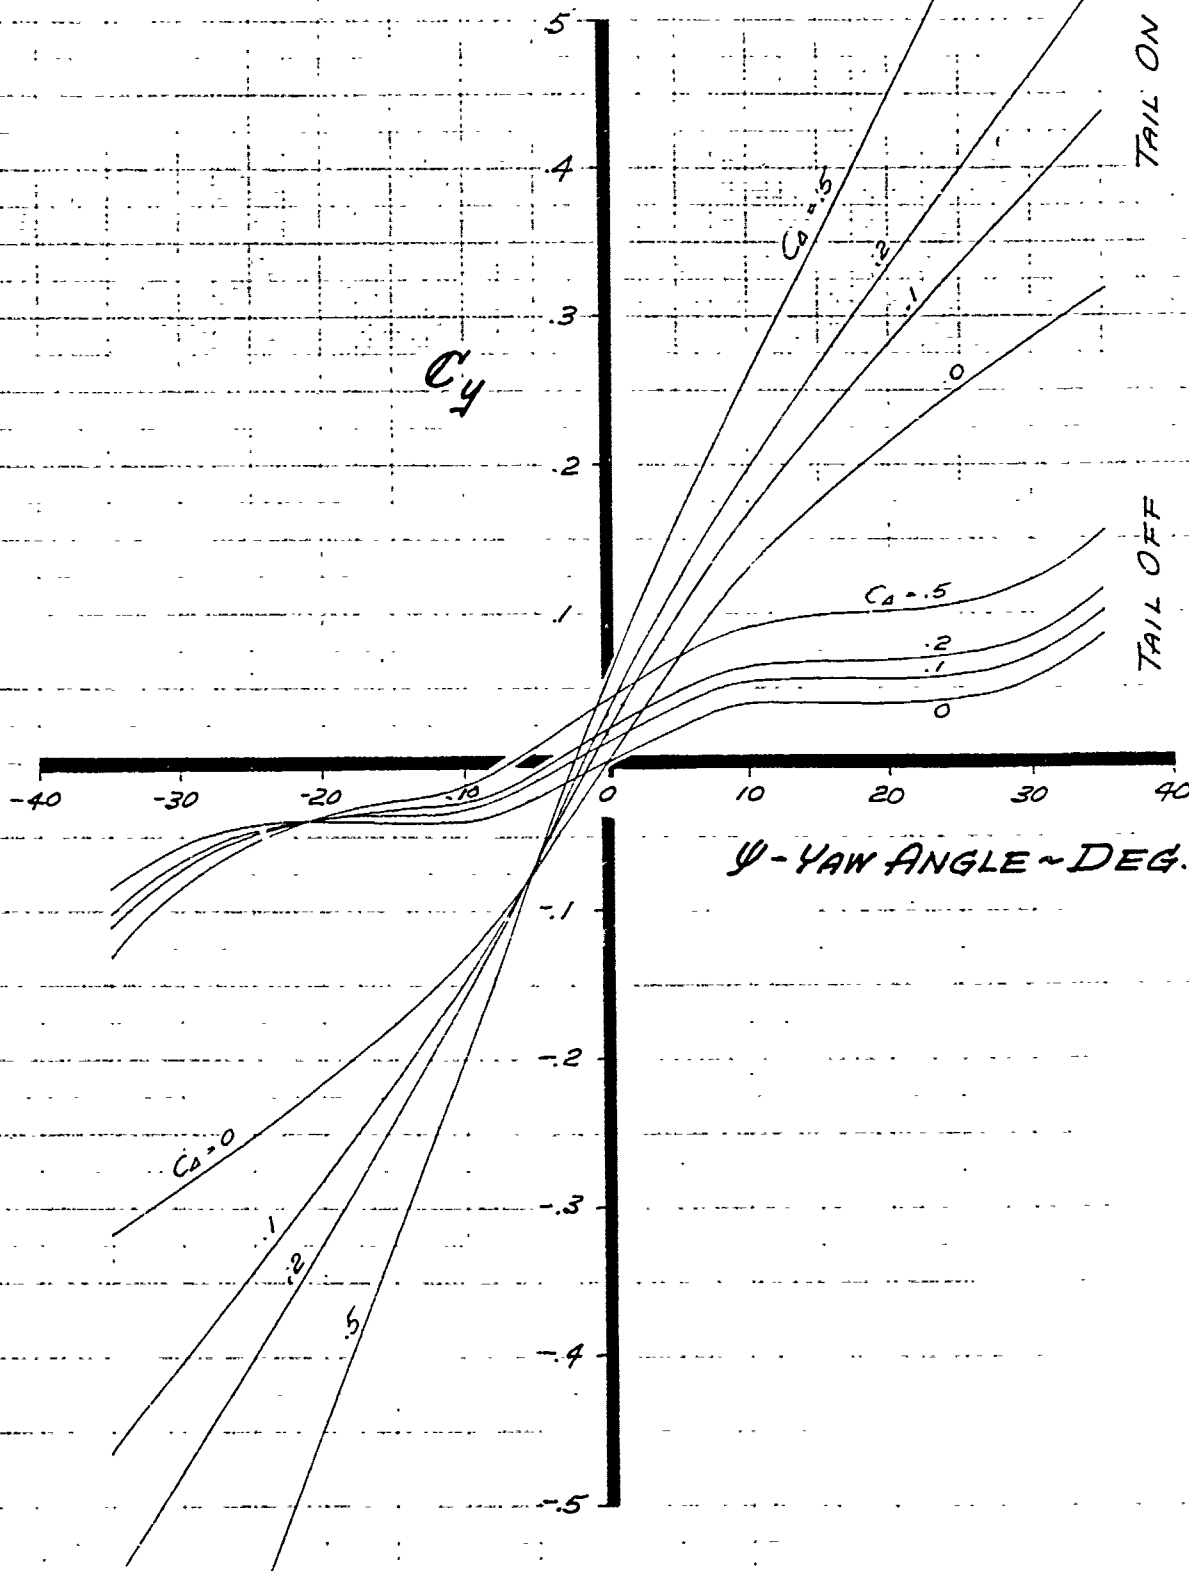

PREPARED BY R.L.D.
DATE 6-13-52
CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION

PAGE 58
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

YAWING MOMENT CHARACTERISTICS

LOW SPEED

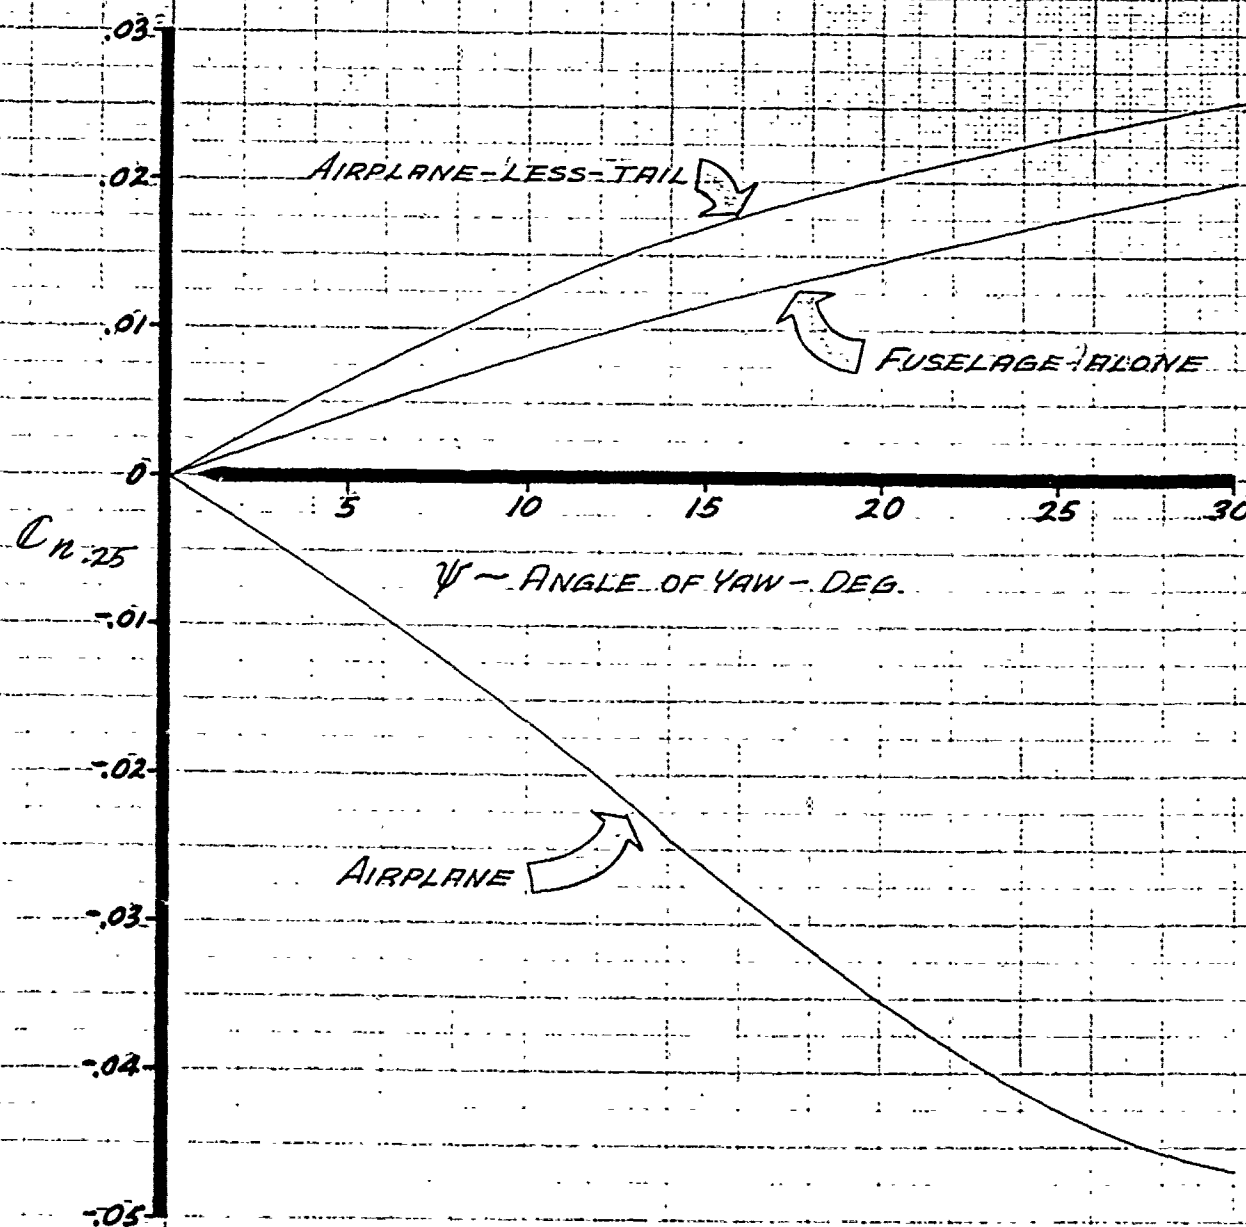

PREPARED BY RLD
DATE 12-8-52
CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION

PAGE 59
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

EFFECTS OF POWER ON CHARACTERISTICS IN YAW OF AIRPLANE WITH/WITHOUT TAIL

LOW SPEED

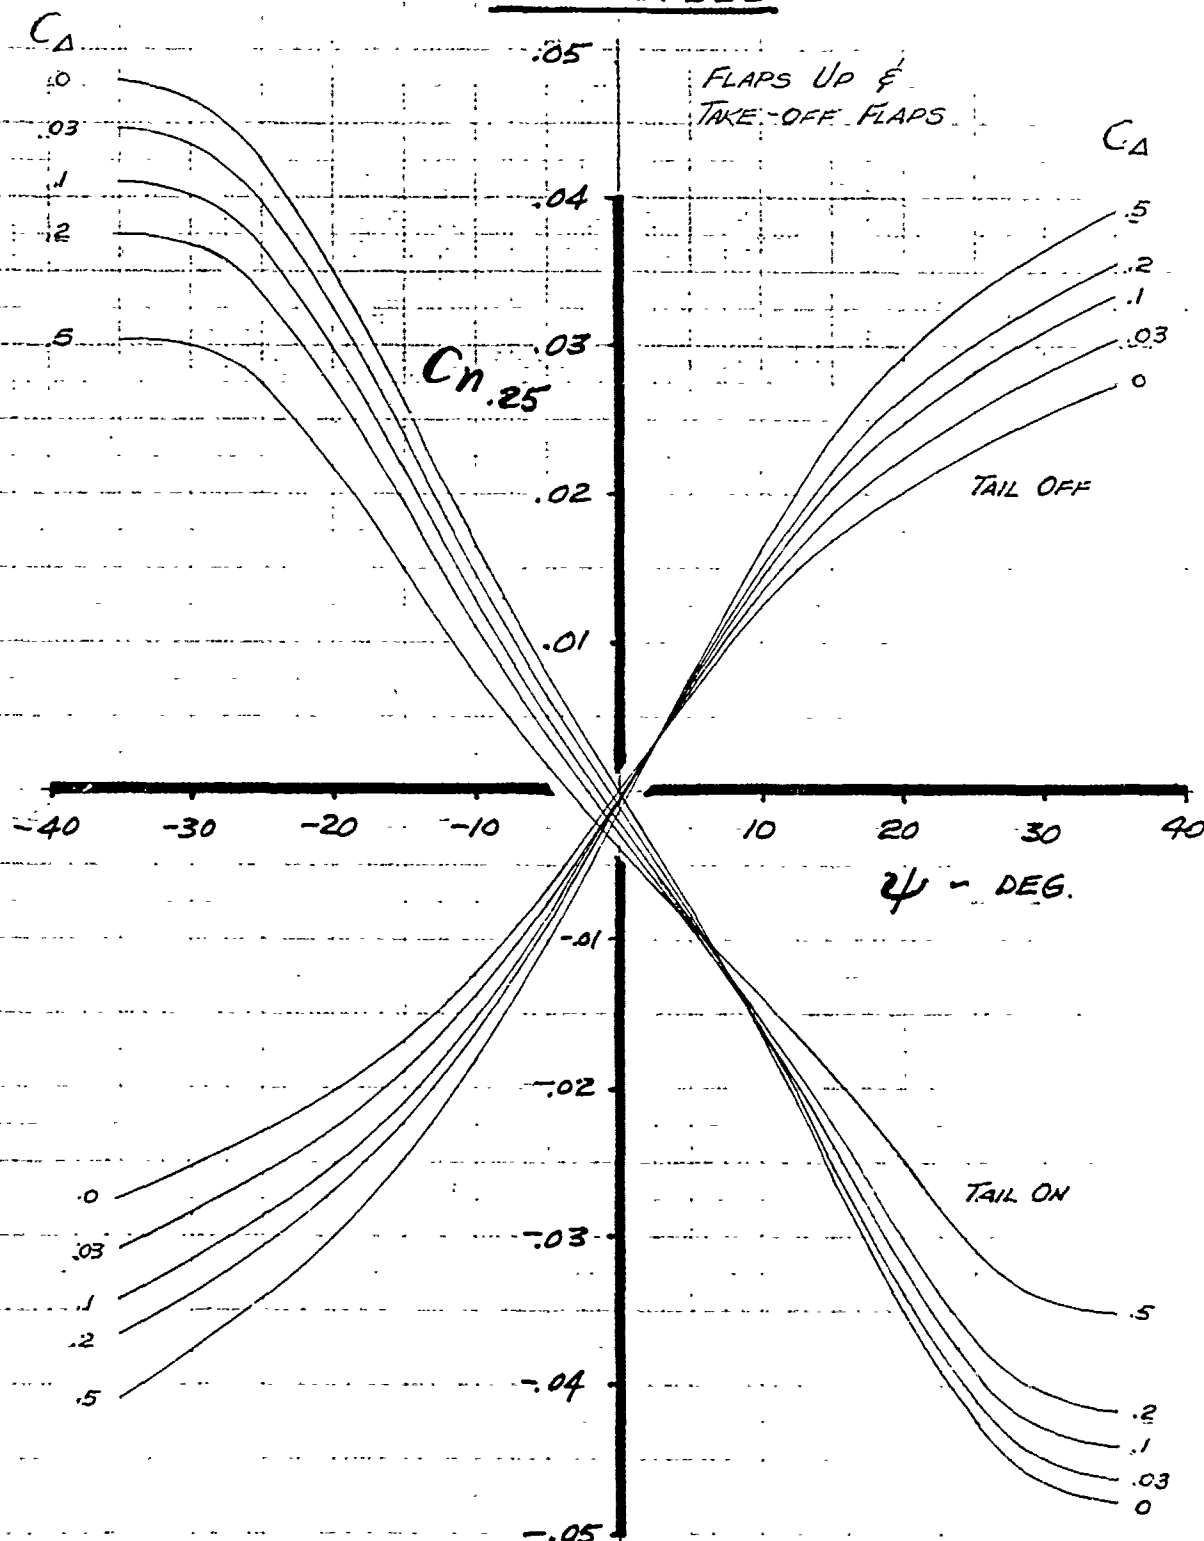


PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 60
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

EFFECTS OF POWER ON AIRPLANE YAWING MOMENT CHARACTERISTICS

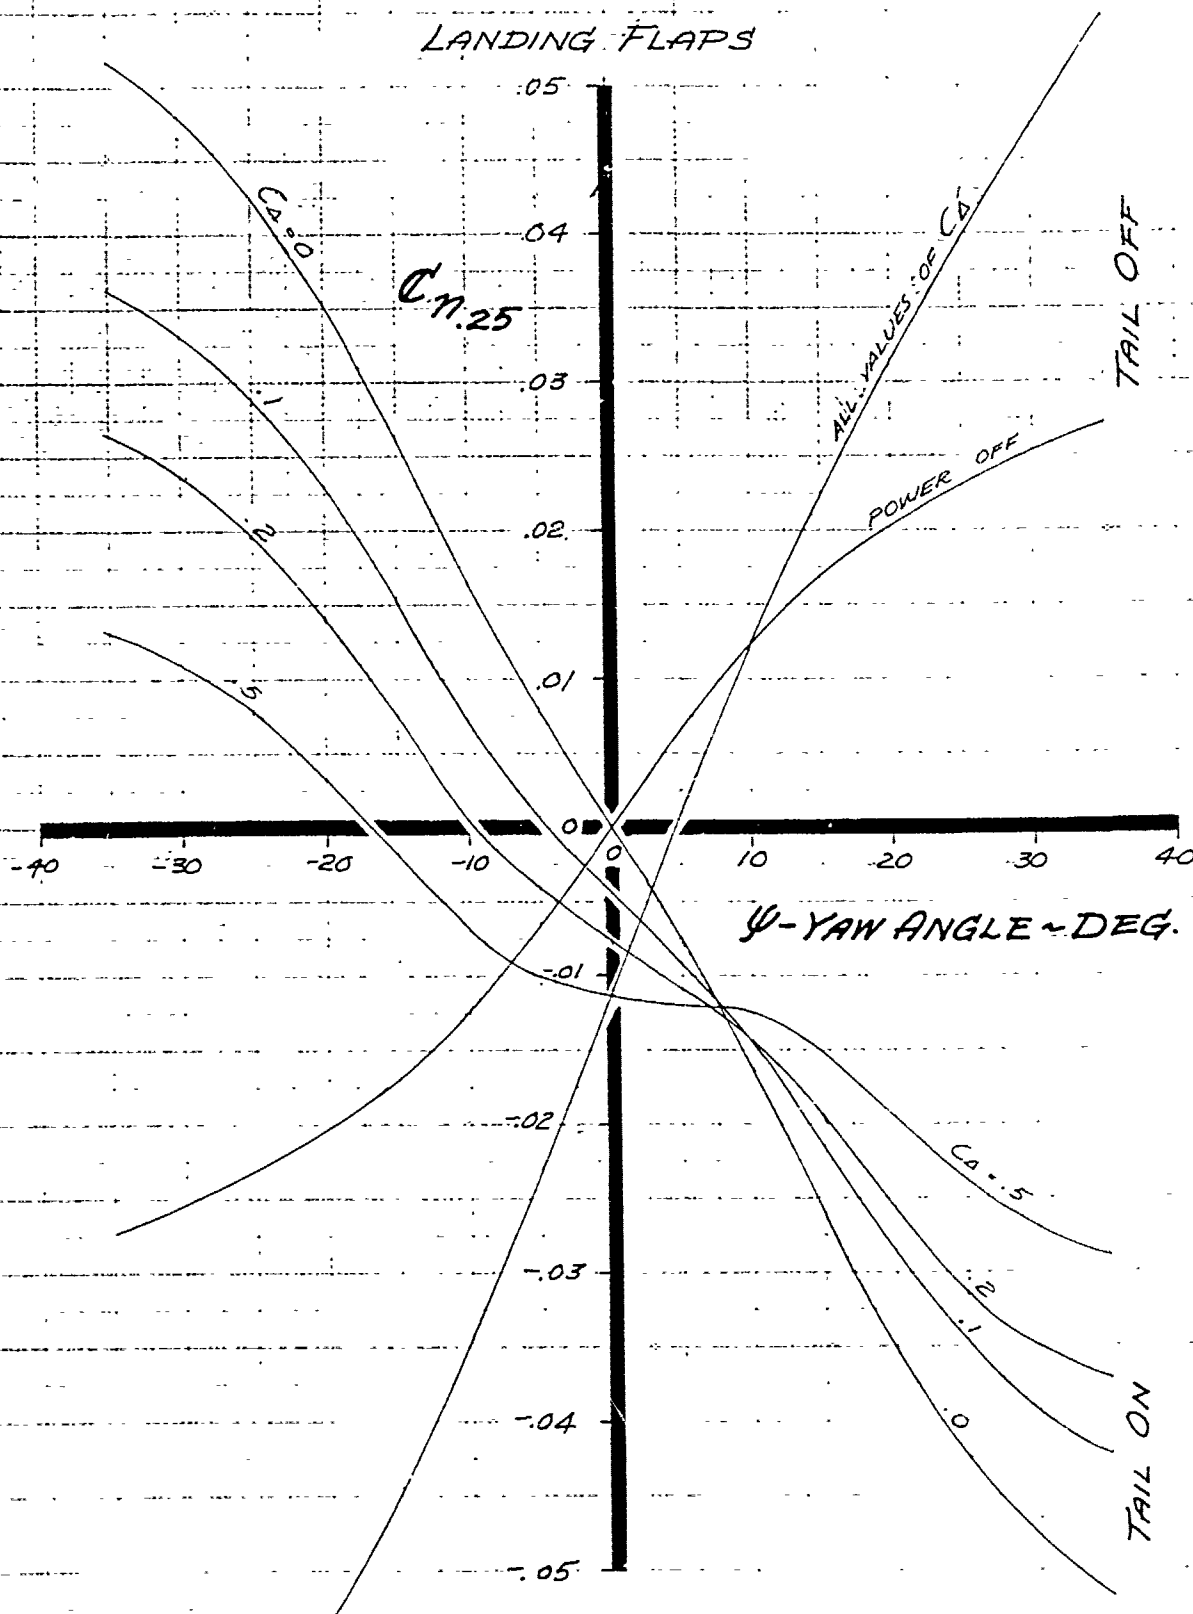



PREPARED BY R.L.D.
 DATE 10-8-52
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 61
 MODEL C-130
 REPORT NO. 9062

LOCKHEED C-130

VARIATION OF AIRPLANE YAWING CHARACTERISTICS WITH MACH NO.

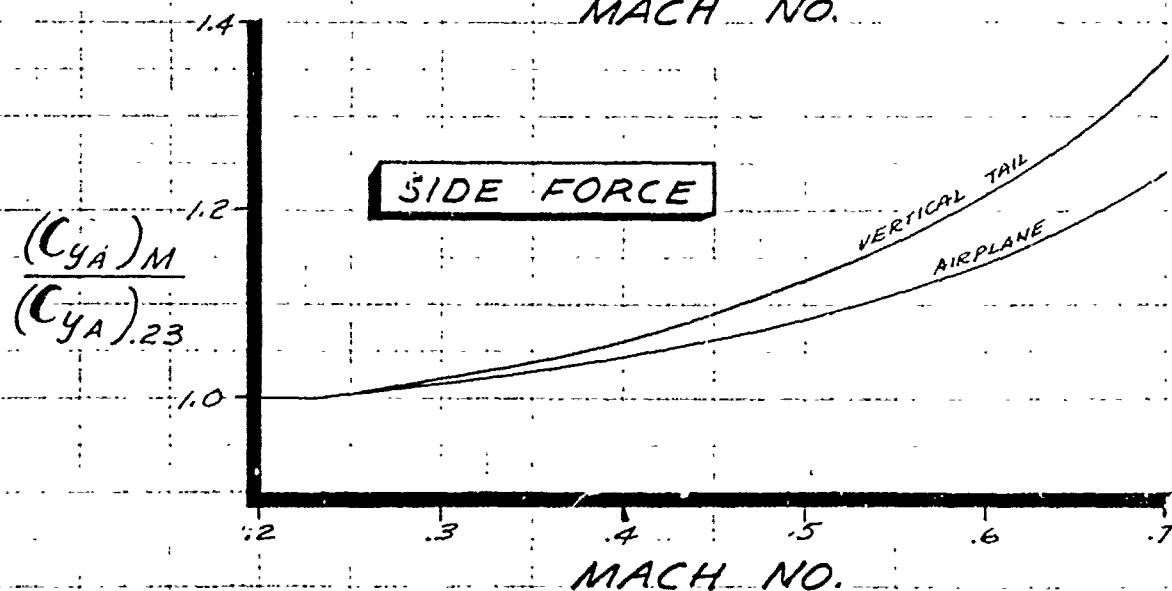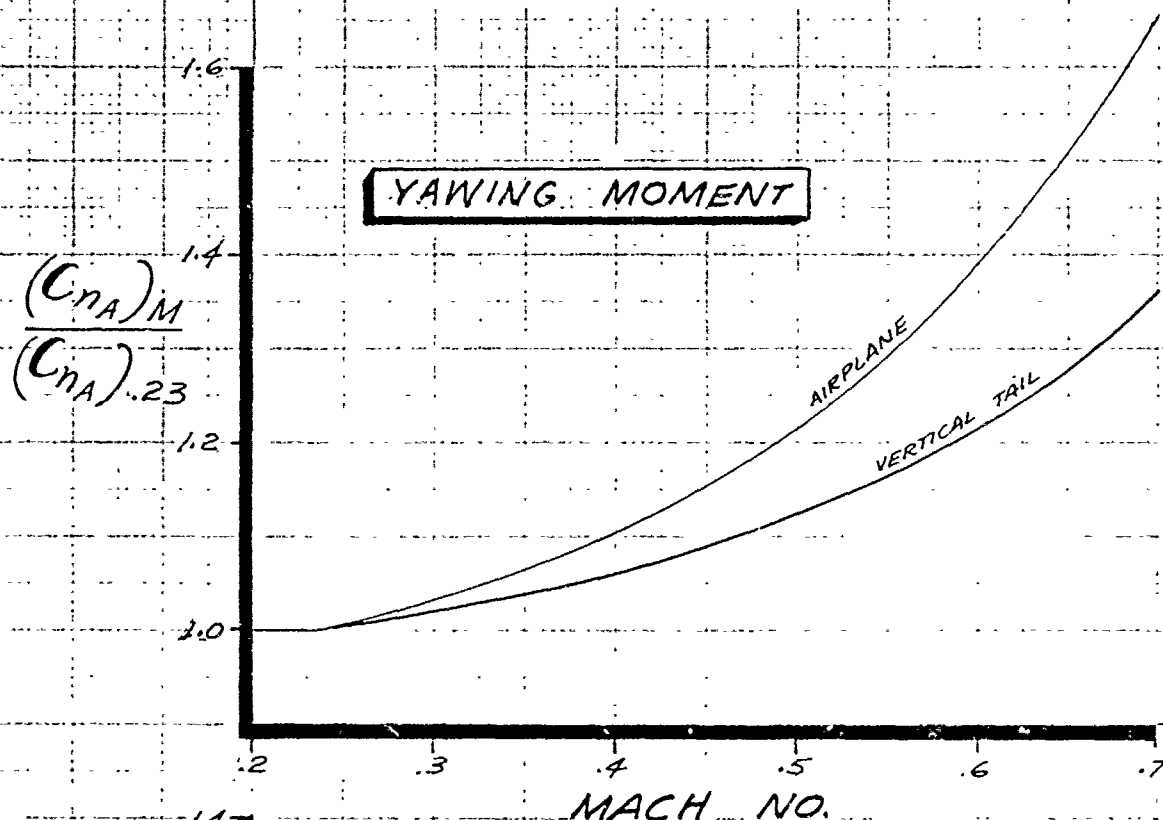

LOCKHEED C-130

RUDDER EFFECTIVENESS CHARACTERISTICS

LOW SPEED

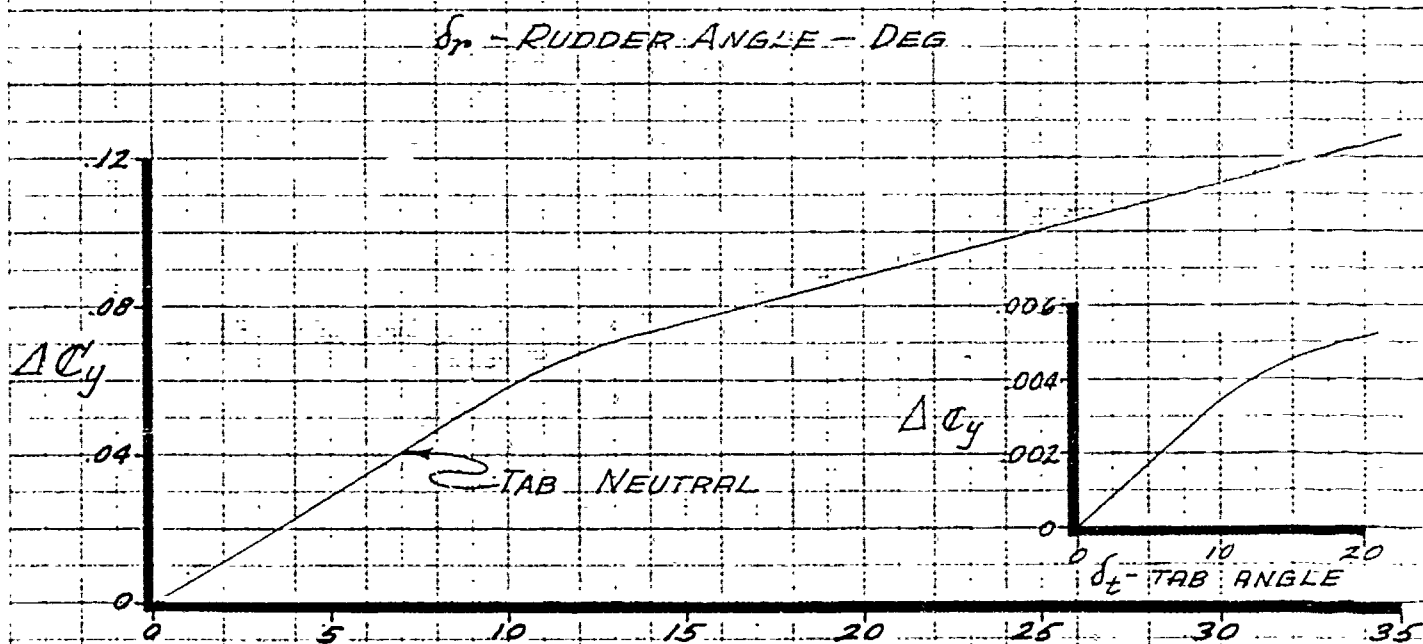
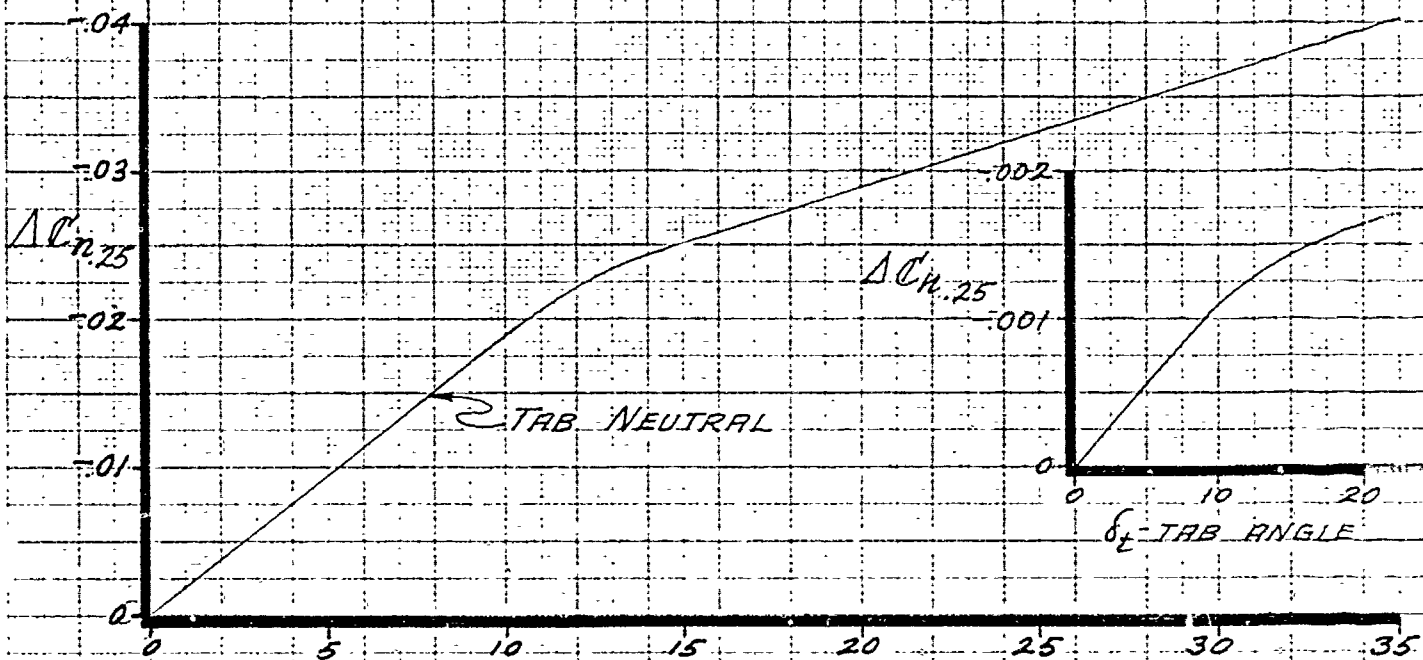


FIG. 48


PREPARED BY _____
 DATE _____
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 63
 MODEL C-130
 REPORT NO 9062

LOCKHEED C-130.

RUDDER HINGE MOMENT COEFFICIENTS

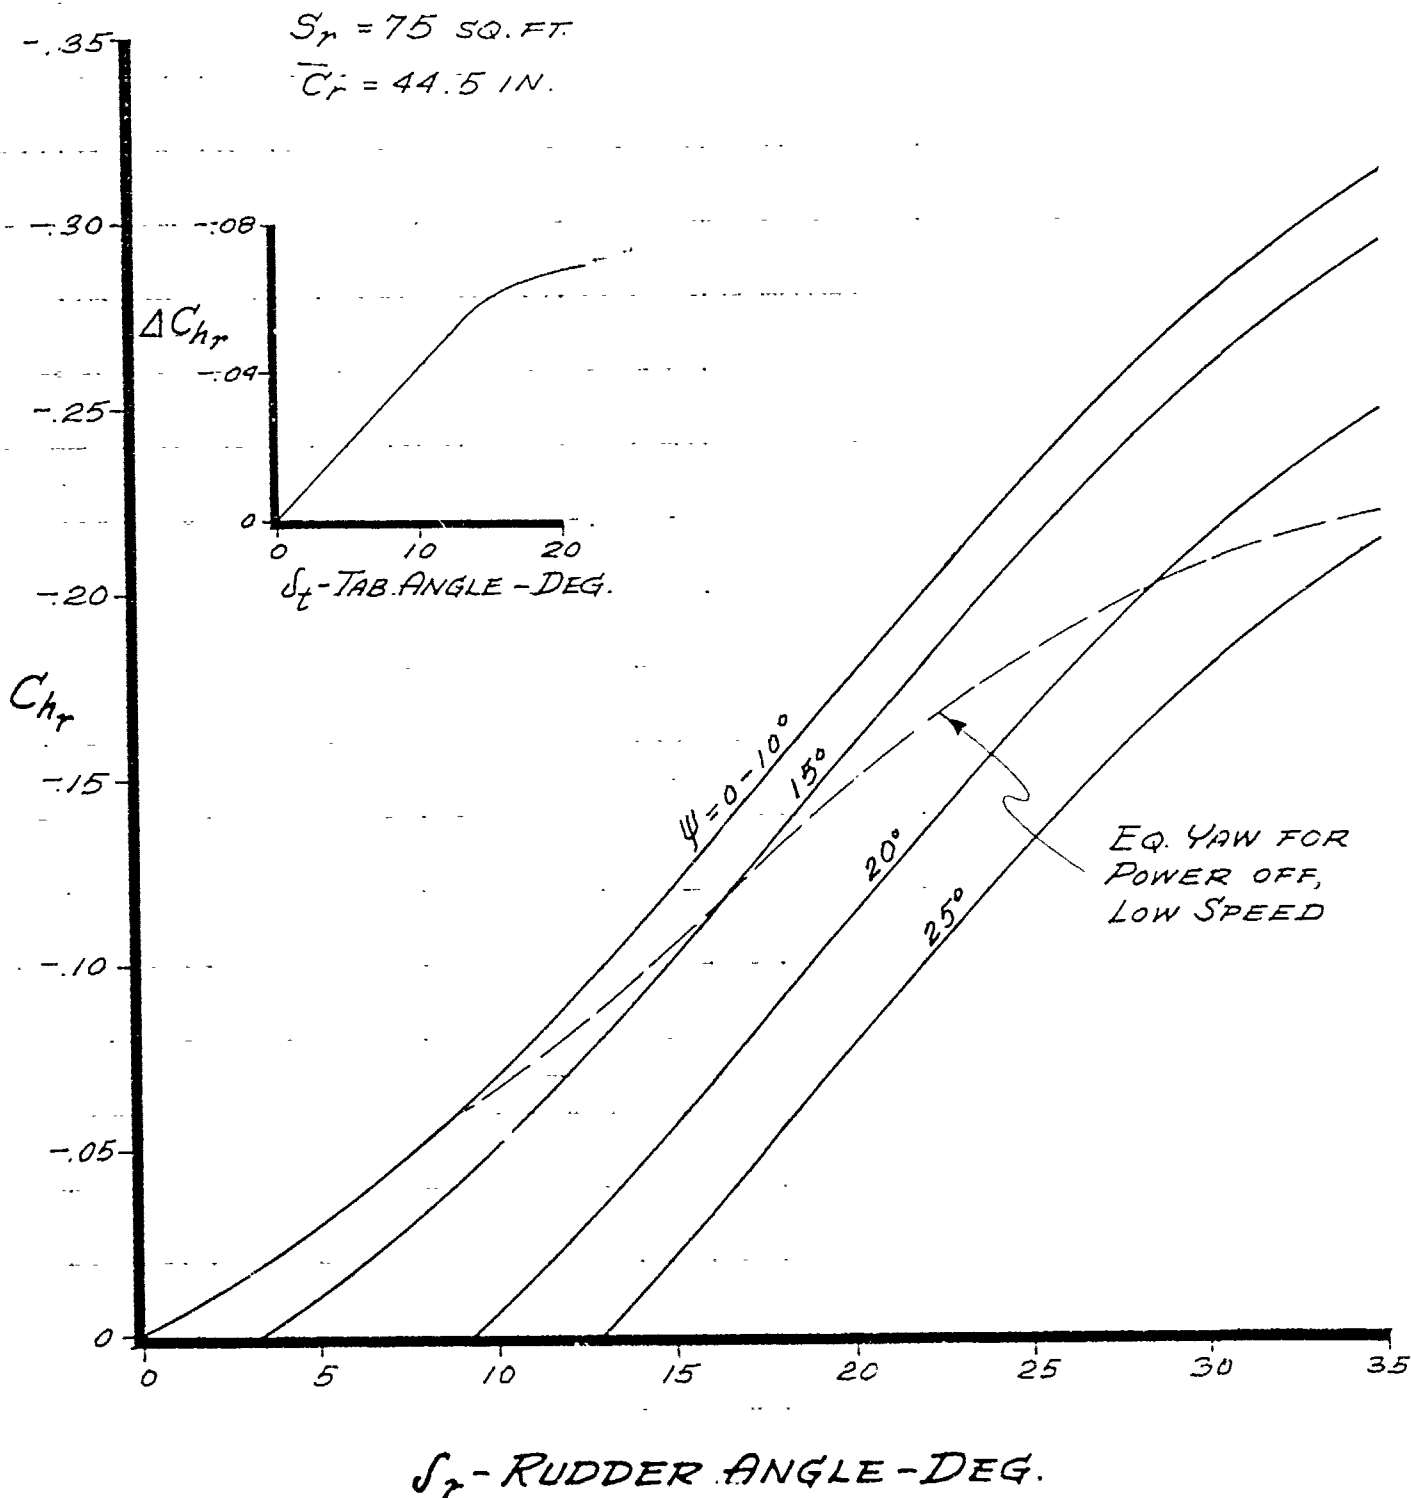

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

LATERAL AERODYNAMIC CHARACTERISTICS

DIHEDRAL EFFECT

Airplane roll due to yaw for all angles of attack and flap settings is given in fig. 50 for power off. Application of power tends to reduce the dihedral effect by approximately $C_{\Delta} \times 60\%$ for flaps up. At high speeds, the power off curve may be corrected by the Prandtl-Glauert factor to account for compressibility in the Mach No. range wherein critical loads will occur.

DAMPING IN ROLL

The low speed value of the roll damping coefficient is determined on the basis of geometric parameters from ref. 10. The variation of the coefficient with Mach Number above 0.2 is according to the Prandtl-Glauert relation, which is valid in the Mach Number range in which critical air loads will be acting. Fig. 51 presents this data.

AILERON CHARACTERISTICS

Aileron effectiveness for flaps retracted and extended for all speeds is given in figs. 52 and 53. Values are given for various lift coefficients; intermediate values of effectiveness may be obtained by interpolation and extrapolation. Aileron hinge moment coefficients are presented in fig. 54 for all flap settings and all speeds. Values of hinge moment coefficient are given for two airplane angles of attack, from which values for other angles may be determined by interpolation and extrapolation. These hinge moment coefficients have been estimated from the data of refs. 4, 7 and 10.

RESTRICTED
SECURITY INFORMATION

Page 65

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

Characteristics of the aileron control and boost system are given in figs. 84, 85 and 86. In figs 87 and 88 are shown plots of pilot force and aileron hinge moment versus wheel angle for several speeds, showing the effects of the boost ratio and boost cut-off and the relationship between pilot force and aileron hinge moment.

RESTRICTED
SECURITY INFORMATION


PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 66
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

DIHEDRAL EFFECT

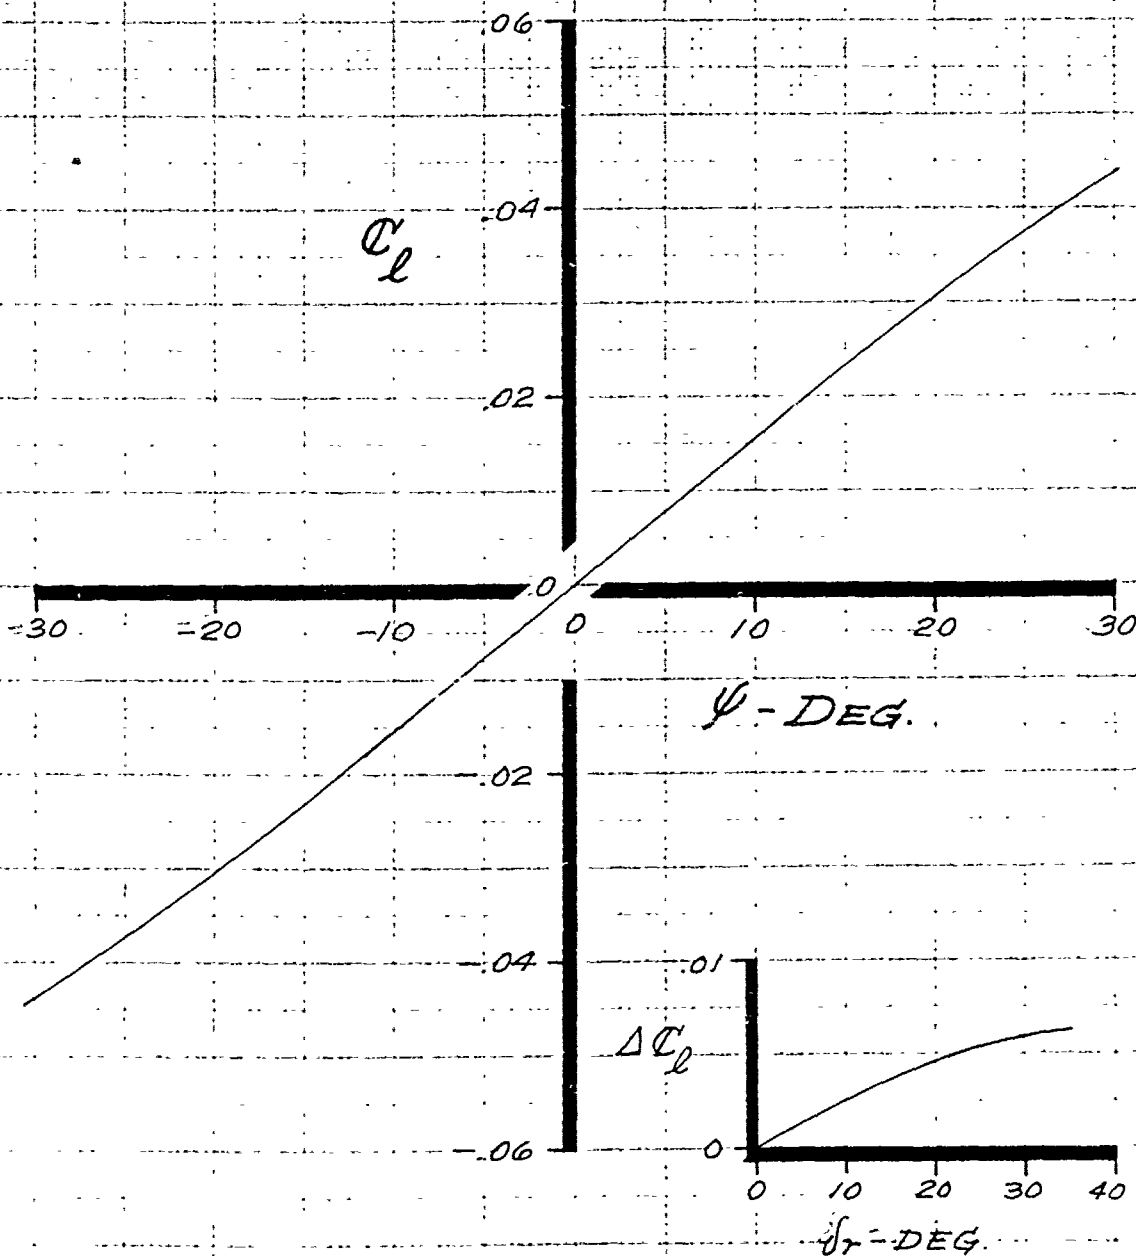

PREPARED BY R.L.D.
DATE 9-16-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 67
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

VARIATION OF AIRPLANE ROLL
DAMPING CHARACTERISTICS
WITH MACH NO.

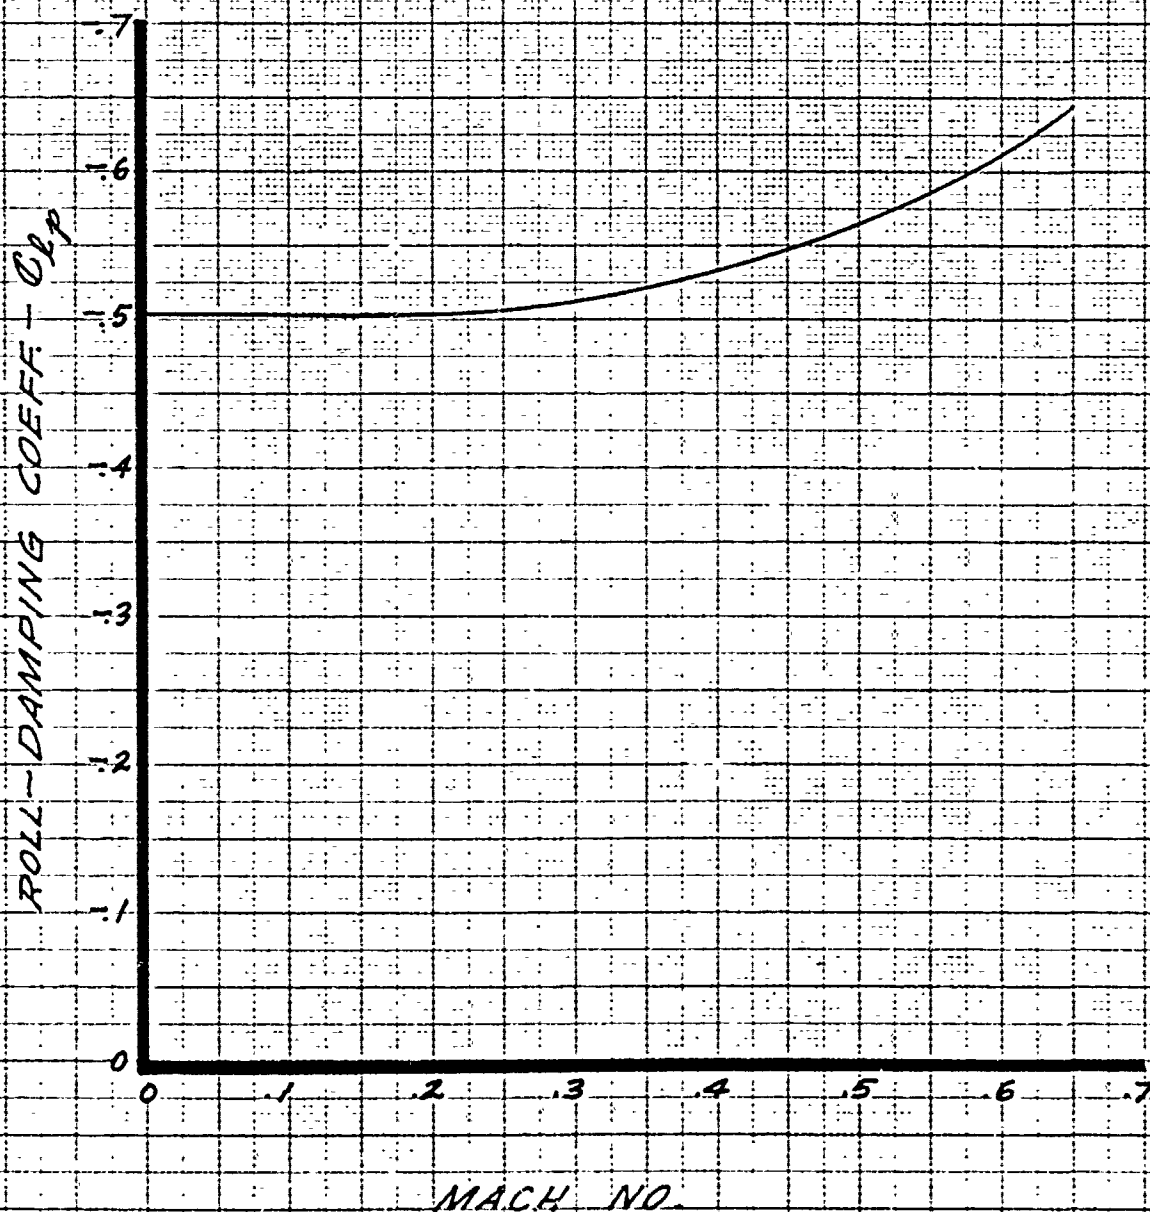


FIG. 51

PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION
CALIFORNIA DIVISION

PAGE 68
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

AILERON EFFECTIVENESS

CLEAN CONFIGURATION

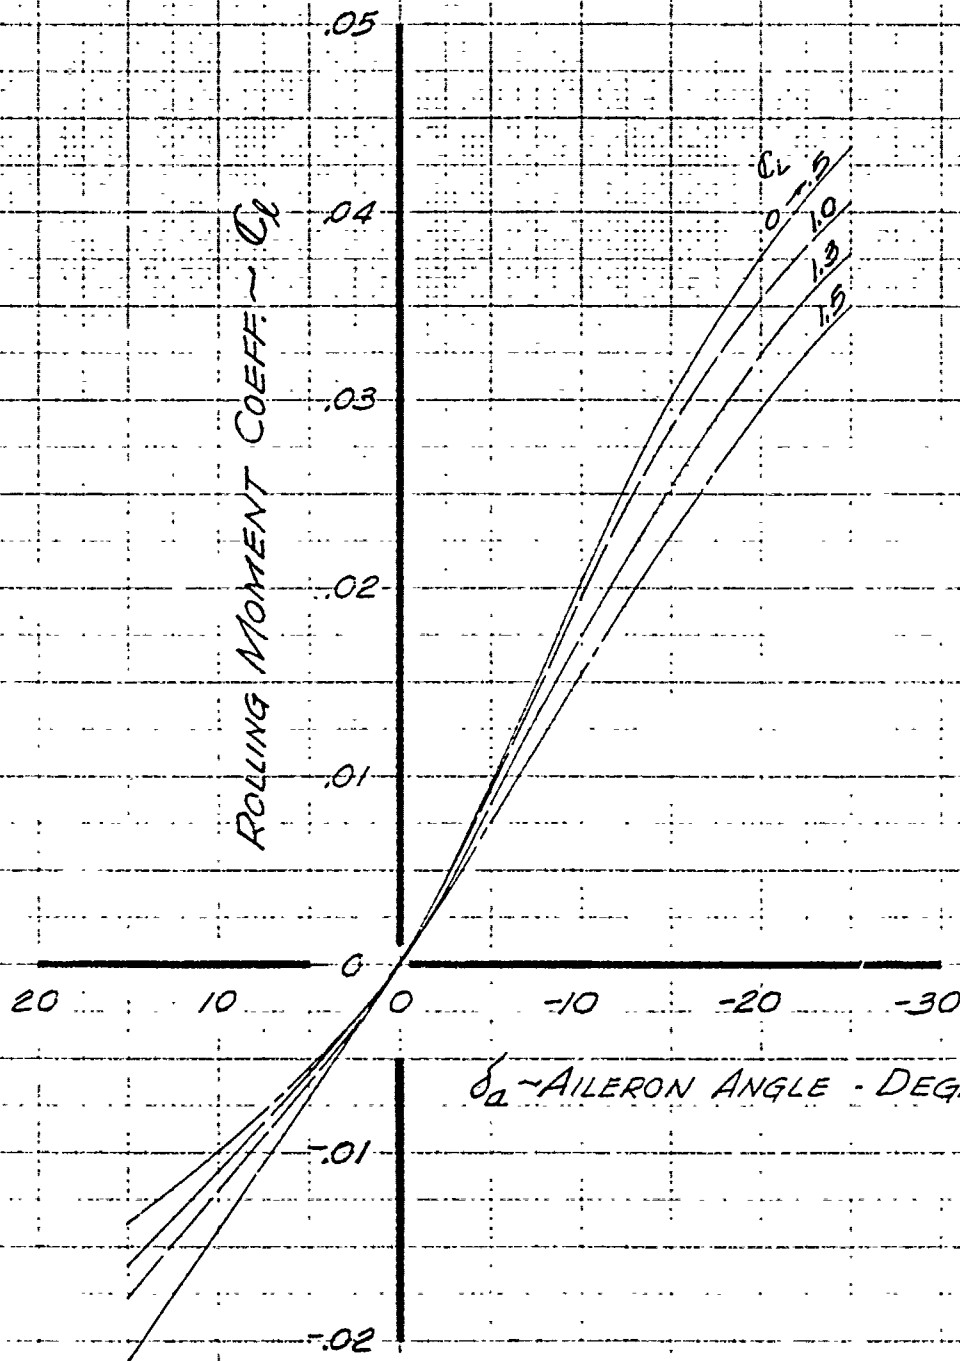


FIG. 52

PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION
CALIFORNIA DIVISION

PAGE 69
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

AILERON EFFECTIVENESS

LANDING CONFIGURATION

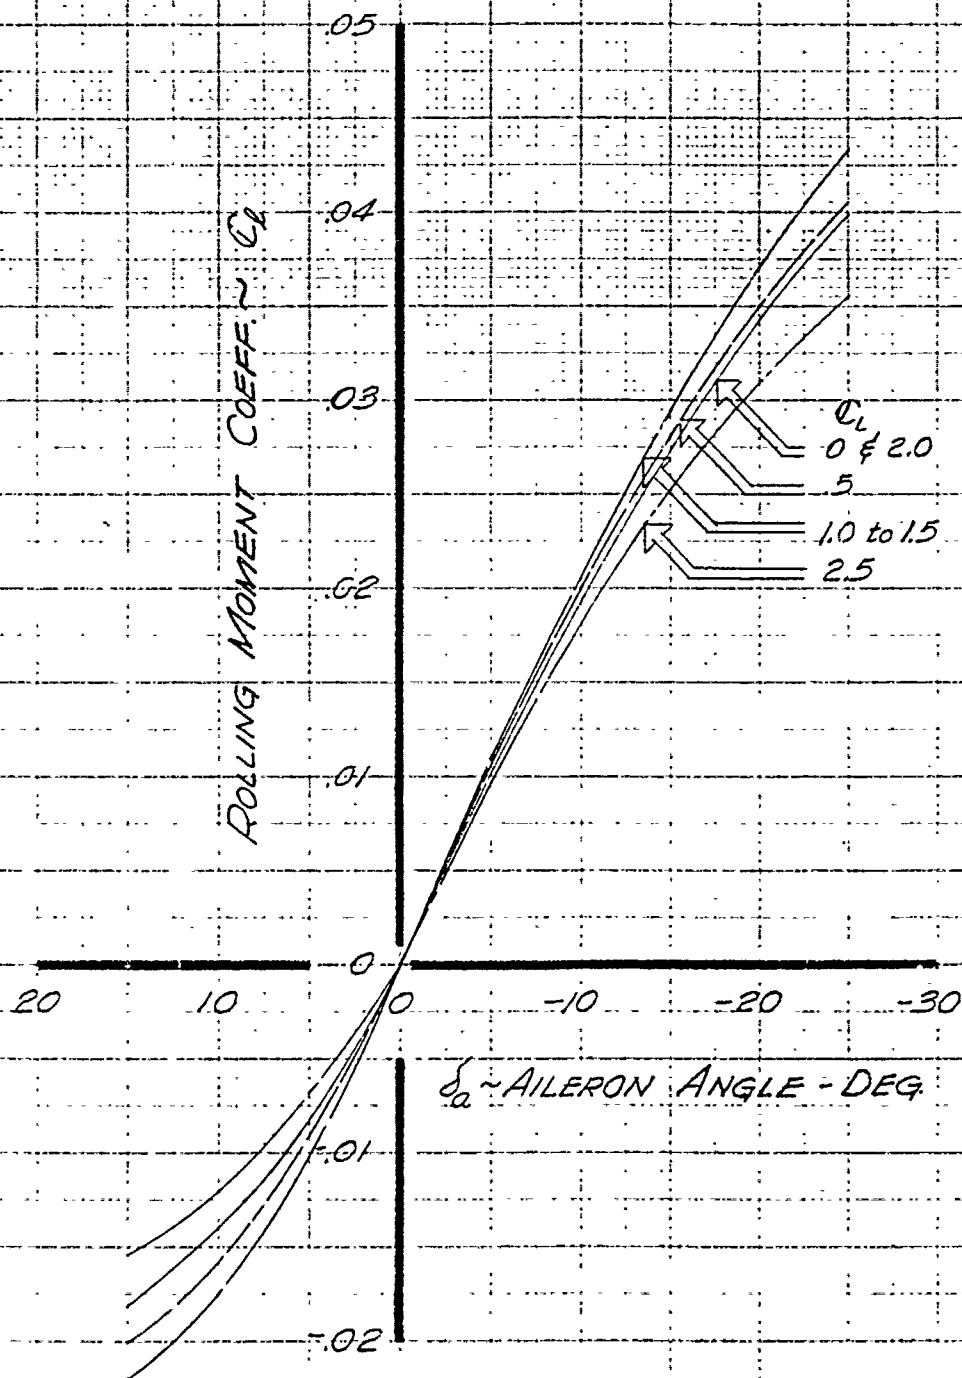


FIG. 53

PREPARED BY R.L.D.
DATE 11-12-51
CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION

PAGE 70
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

ESTIMATED AILERON HINGE MOMENT

CHARACTERISTICS

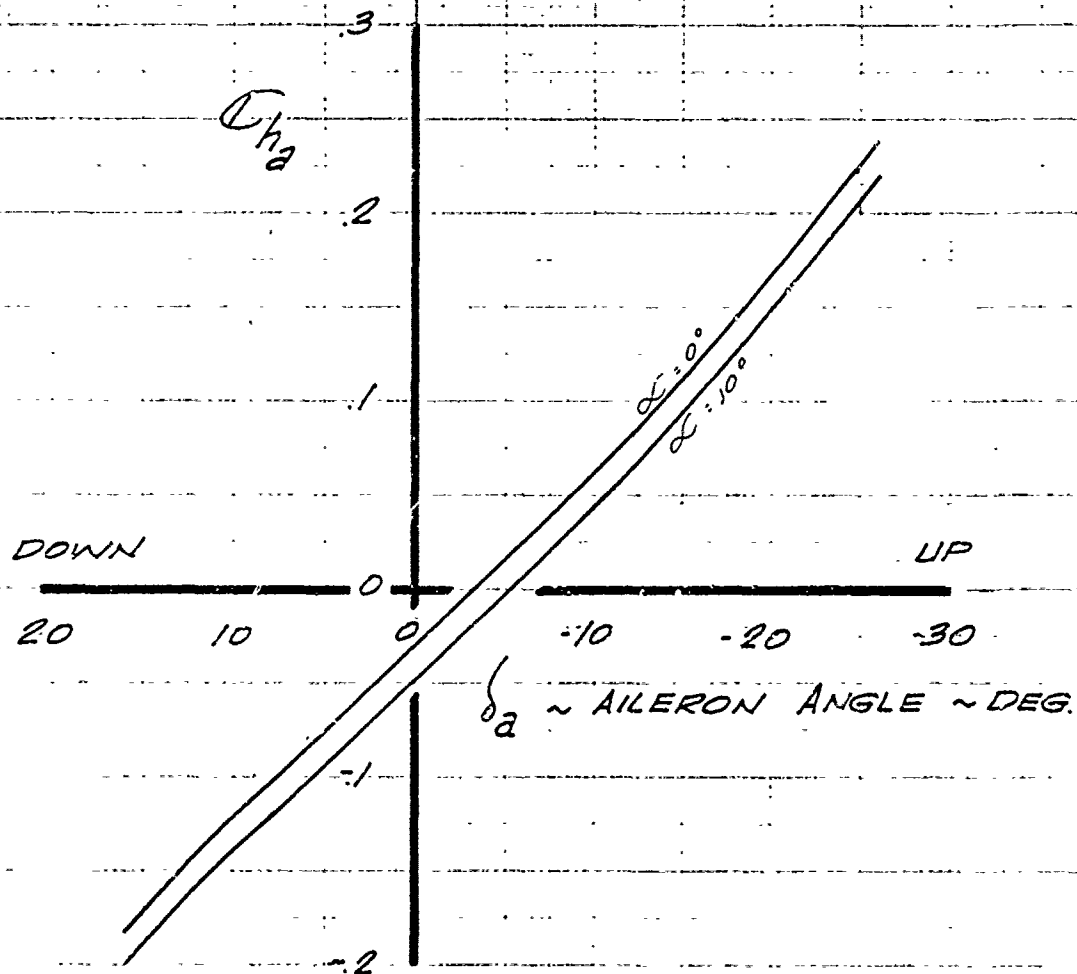

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

CHORDWISE PRESSURE DISTRIBUTIONS

All chordwise pressure distributions except that over the wing with Fowler flaps extended have been determined from the methods and data of refs. 8, 10 and 24. The curves for the wing section with Fowler flaps extended are obtained from unpublished wind tunnel test data on the Lockheed XP2V-1 and from flight test pressure measurements on the Lockheed Constellation airplane.

WING

Chordwise pressure distributions are presented for upper and lower surfaces at several lift coefficients for the inboard wing airfoil section, for a typical section in the outboard panel and for the wing tip section in figs. 55, 56, 58, 59 and 61. In addition, net unit and basic pressure distributions are shown for the inboard and typical outboard sections in figs. 57 and 60. The pressure distribution over the wing airfoil section ahead of the extended Fowler flap is presented in fig. 63. Flap load coefficients are shown in fig. 70 and discussed on page 88.

Net pressure distribution increment due to deflection of the aileron is given in fig. 62, determined from the data of ref. 25, using the section pitching moment data of fig. 11.

EMPENNAGE

The horizontal tail surface embodies an inverted NACA 23012 airfoil section. Chordwise pressure distributions are presented in figs. 64, 65 and 66 for the inverted airfoil (the normally lower surface now becoming

~~RESTRICTED~~
~~SECURITY INFORMATION~~

Page 72

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

the upper, and vice versa), for both surface pressures and the net unit and basic distributions. Fig. 67 shows the added net distribution due to elevator deflection. If necessary to determine local surface pressures with elevator deflected, this net distribution may be considered to apply approximately half to each surface. Figures 68 and 69 show the pressure distributions for the vertical tail and the added net contribution due to deflection of the rudder.

~~RESTRICTED~~

PREPARED BY R.L.O.
DATE 1-16-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 73
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

CHORDWISE PRESSURE
DISTRIBUTION OVER
INBOARD WING SECTION

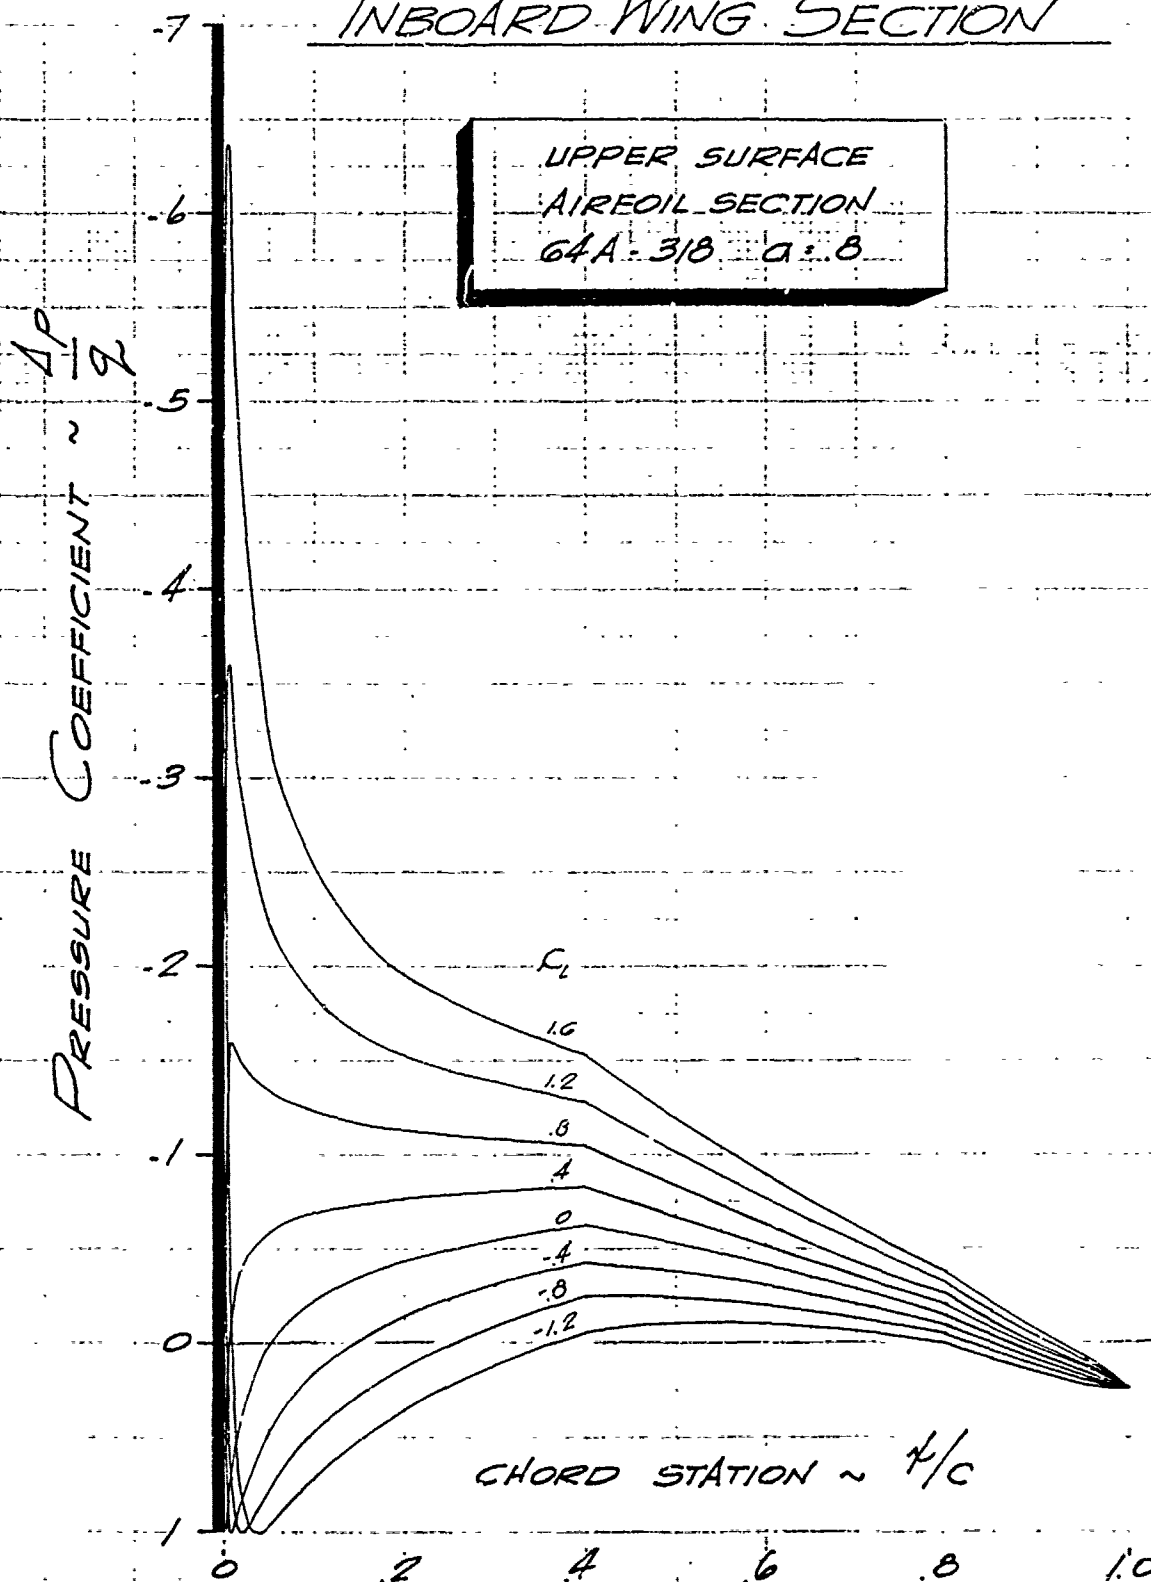


FIG. 55

PREPARED BY R.L.D.
DATE 1-16-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 74
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

CHORDWISE PRESSURE
DISTRIBUTION OVER
INBOARD WING SECTION

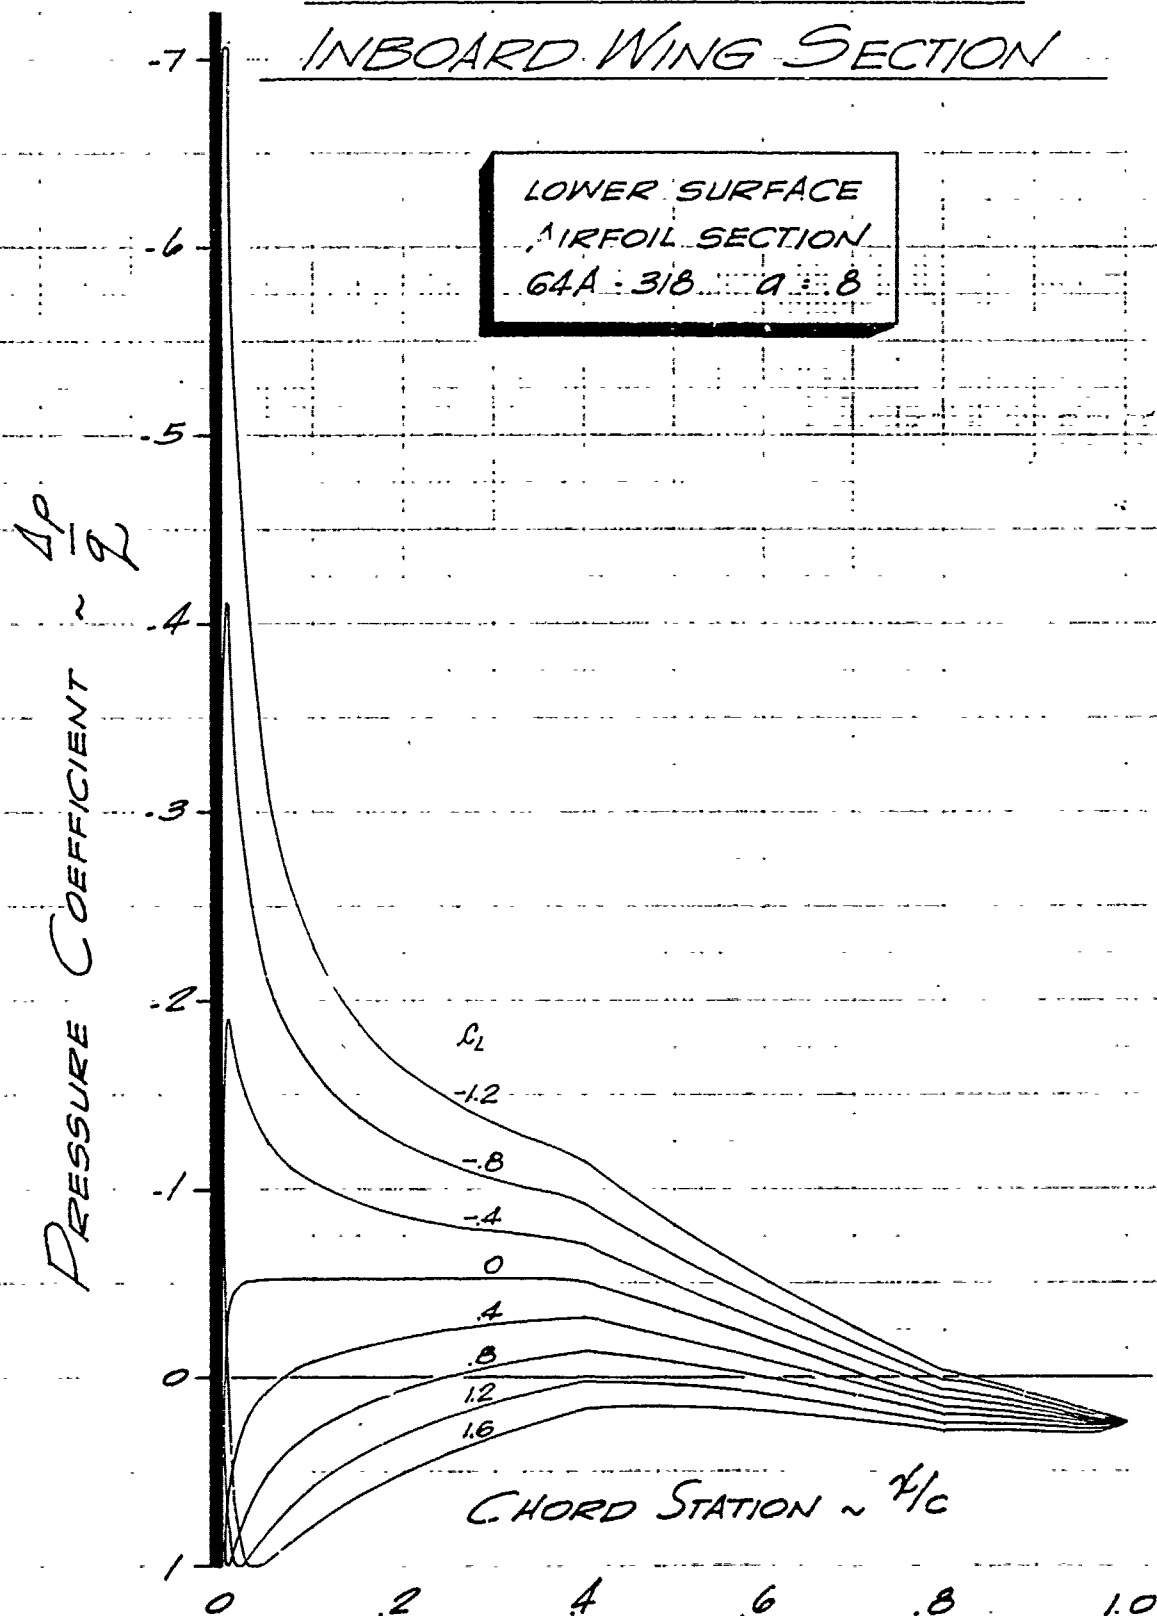


Fig. 56

PREPARED BY RLD
DATE 1-17-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 75
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

NET CHORDWISE PRESSURE
DISTRIBUTION OVER
INBOARD WING SECTION

AIRFOIL SECTION
64A-318 a-b

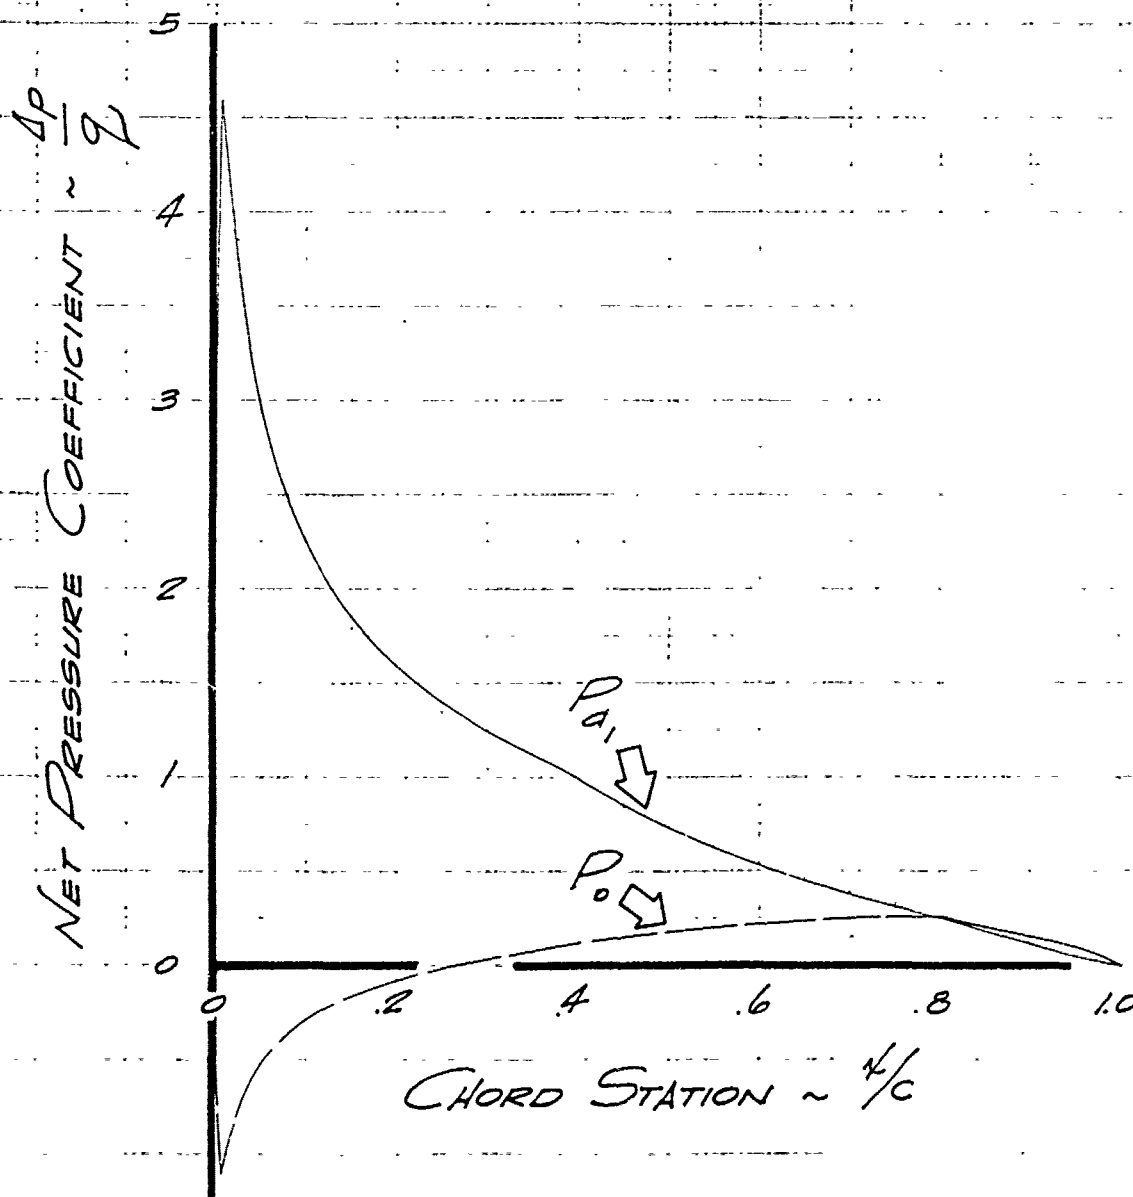


FIG. 57

LOCKHEED C-130 CHORDWISE PRESSURE DISTRIBUTION OVER OUTBOARD WING SECTION

UPPER SURFACE
 AIRFOIL SECTION
 64A-415 $\alpha = 8$

$\frac{C_p}{q}$

PRESSURE COEFFICIENT

7
6
5
4
3
2
1
0
-1
-2
-3
-4
-5
-6
-7

$\frac{L}{c}$
 1.6
 1.2
 .8
 .4
 0
 -.4
 -.8
 -1.2

CHORD STATION ~ $\frac{x}{c}$

0 2 4 6 8 10

Fig. 58

PREPARED BY RLD
 DATE 1-16-52
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 77
 MODEL C-130
 REPORT NO 9062

LOCKHEED C-130 CHORDWISE PRESSURE DISTRIBUTION OVER OUTBOARD WING SECTION

LOWER SURFACE
 AIRFOIL SECTION
 64A-415 a-b

$\frac{1}{2} \rho V^2$

PRESSURE COEFFICIENT $\sim \frac{1}{2}$

C_L

-12

-8

-4

0

4

8

12

16

CHORD STATION $\sim \frac{x}{c}$

Fig. 59

LOCKHEED C-130

NET CHORDWISE PRESSURE
DISTRIBUTION OVER
OUTBOARD WING SECTION

AIRFOIL SECTION
 64A-415 $CL = 8$

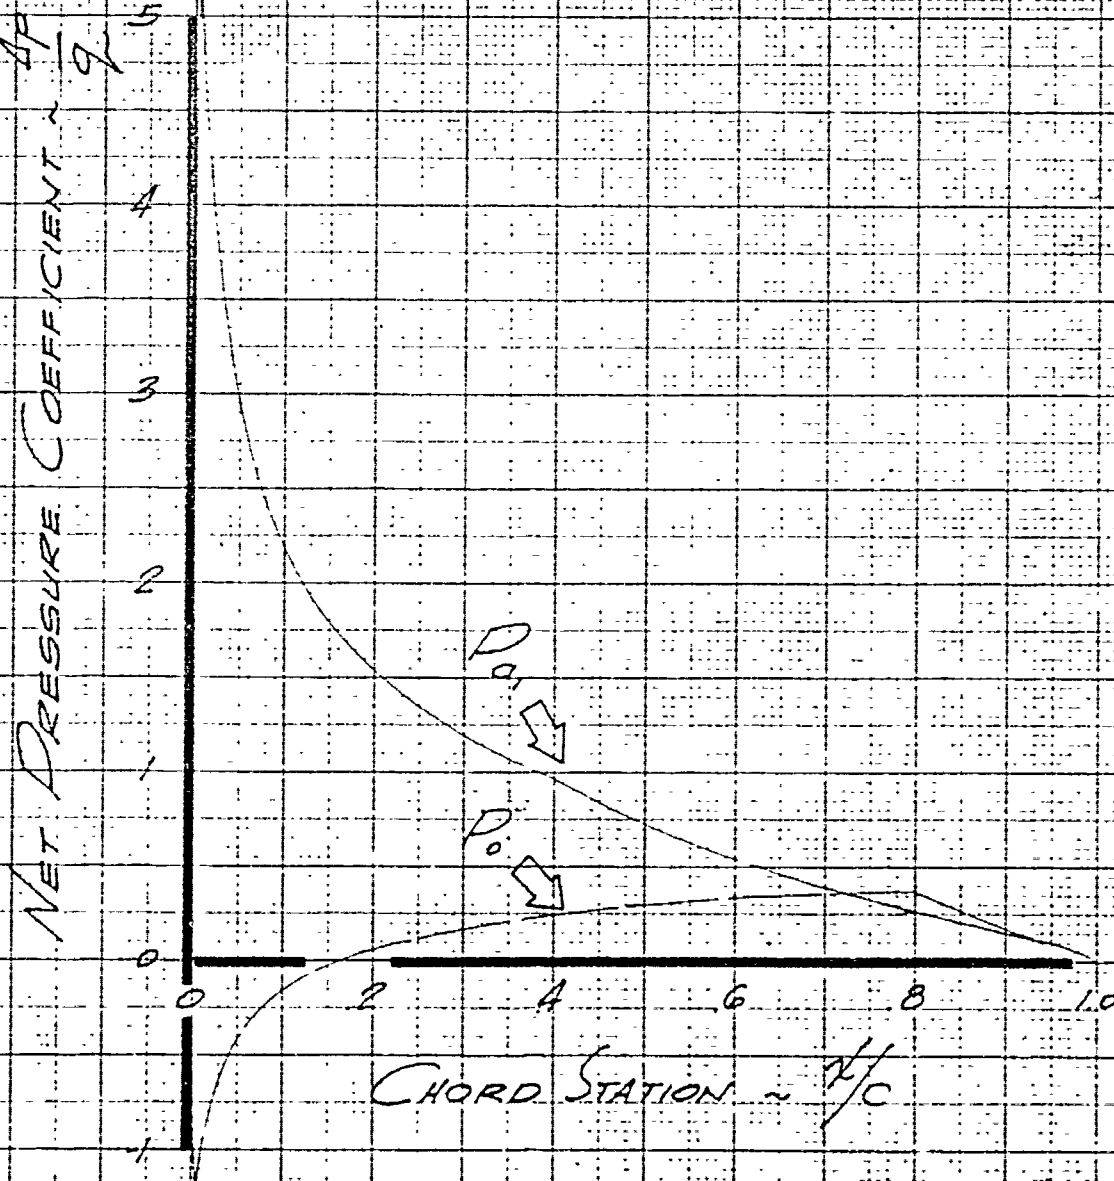


FIG. 60

PREPARED BY R.L.D.
 DATE 10-31-51
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 79
 MODEL C-130
 REPORT NO. 9062

LOCKHEED C-130

CHORDWISE PRESSURE DISTRIBUTION OVER WING TIP SECTION

AIRFOIL SECTION
 64A-412-0.0.8

— UPPER SURFACE
 — LOWER SURFACE

AP
 PRESSURE COEFFICIENT $\frac{C_p}{q}$

8
7
6
5
4
3
2
1
0
-1
-2
-3
-4
-5
-6
-7
-8

C_L

16
12
8
4
0
0
4
8
12
16

CHORD STATION $\sim \frac{x}{c}$

0 2 4 6 8 10

Fig. 61

PREPARED BY _____
 DATE _____
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION


PAGE 80
 MODEL C-130
 REPORT NO 9062

LOCKHEED C-130

NET PRESSURE DISTRIBUTION INCREMENT DUE TO AILERON DEFLECTION

LOW SPEED

FOR LOCAL SURFACE PRESSURES, DIVIDE THESE NET PRESSURES BY 2.0 AND APPLY TO EACH SURFACE, THEN ADDING BY PRINCIPLE OF SUPERPOSITION.

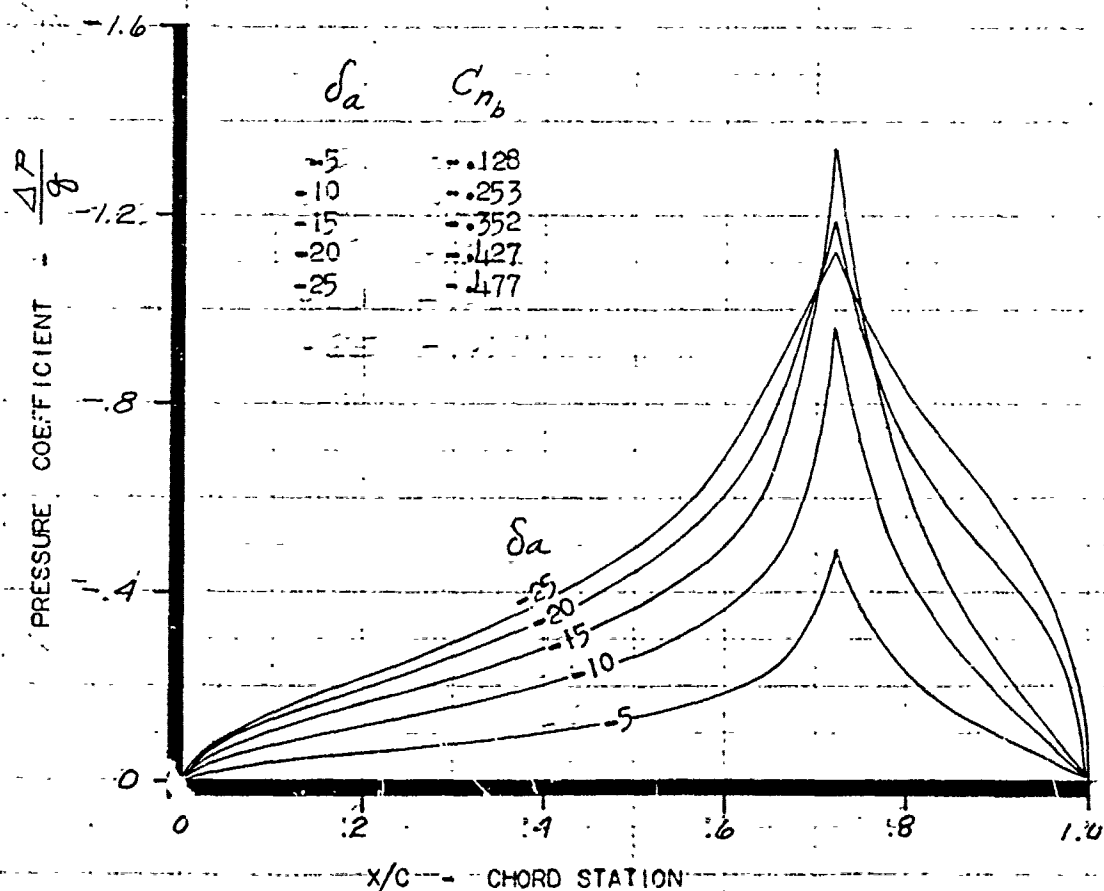

LOCKHEED C-130
WING CHORDWISE PRESSURE
DISTRIBUTION WITH FOWLER
FLAP EXTENDED


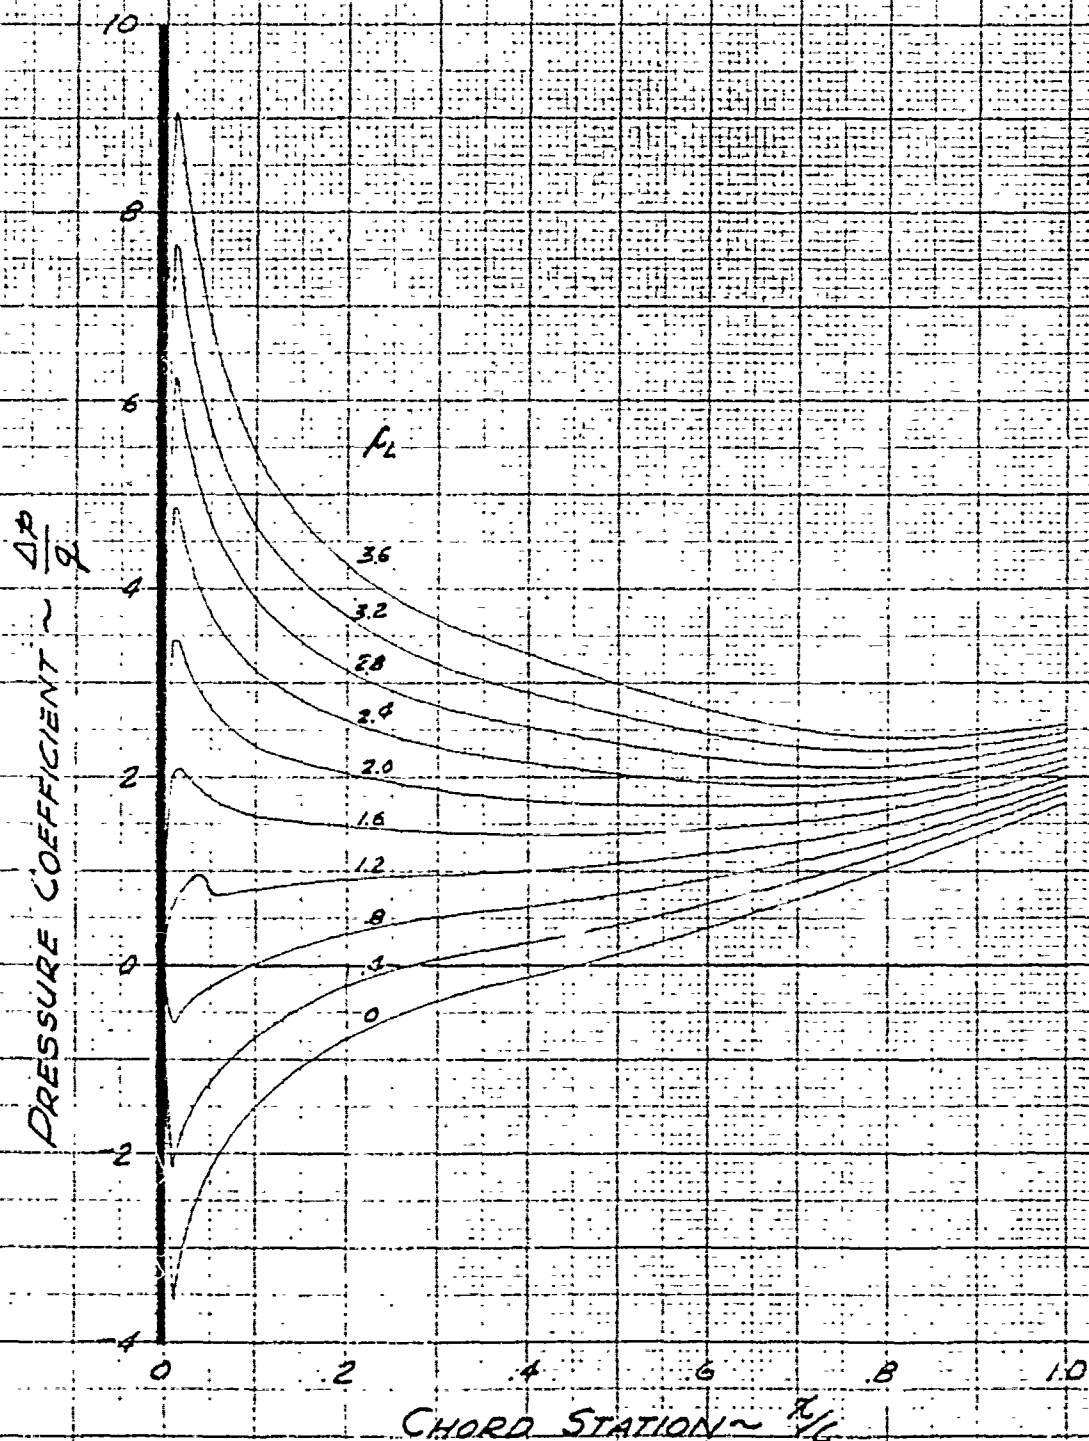


Fig. 63

LOCKHEED C-130


HORIZONTAL TAIL CHORDWISE
PRESSURE DISTRIBUTION

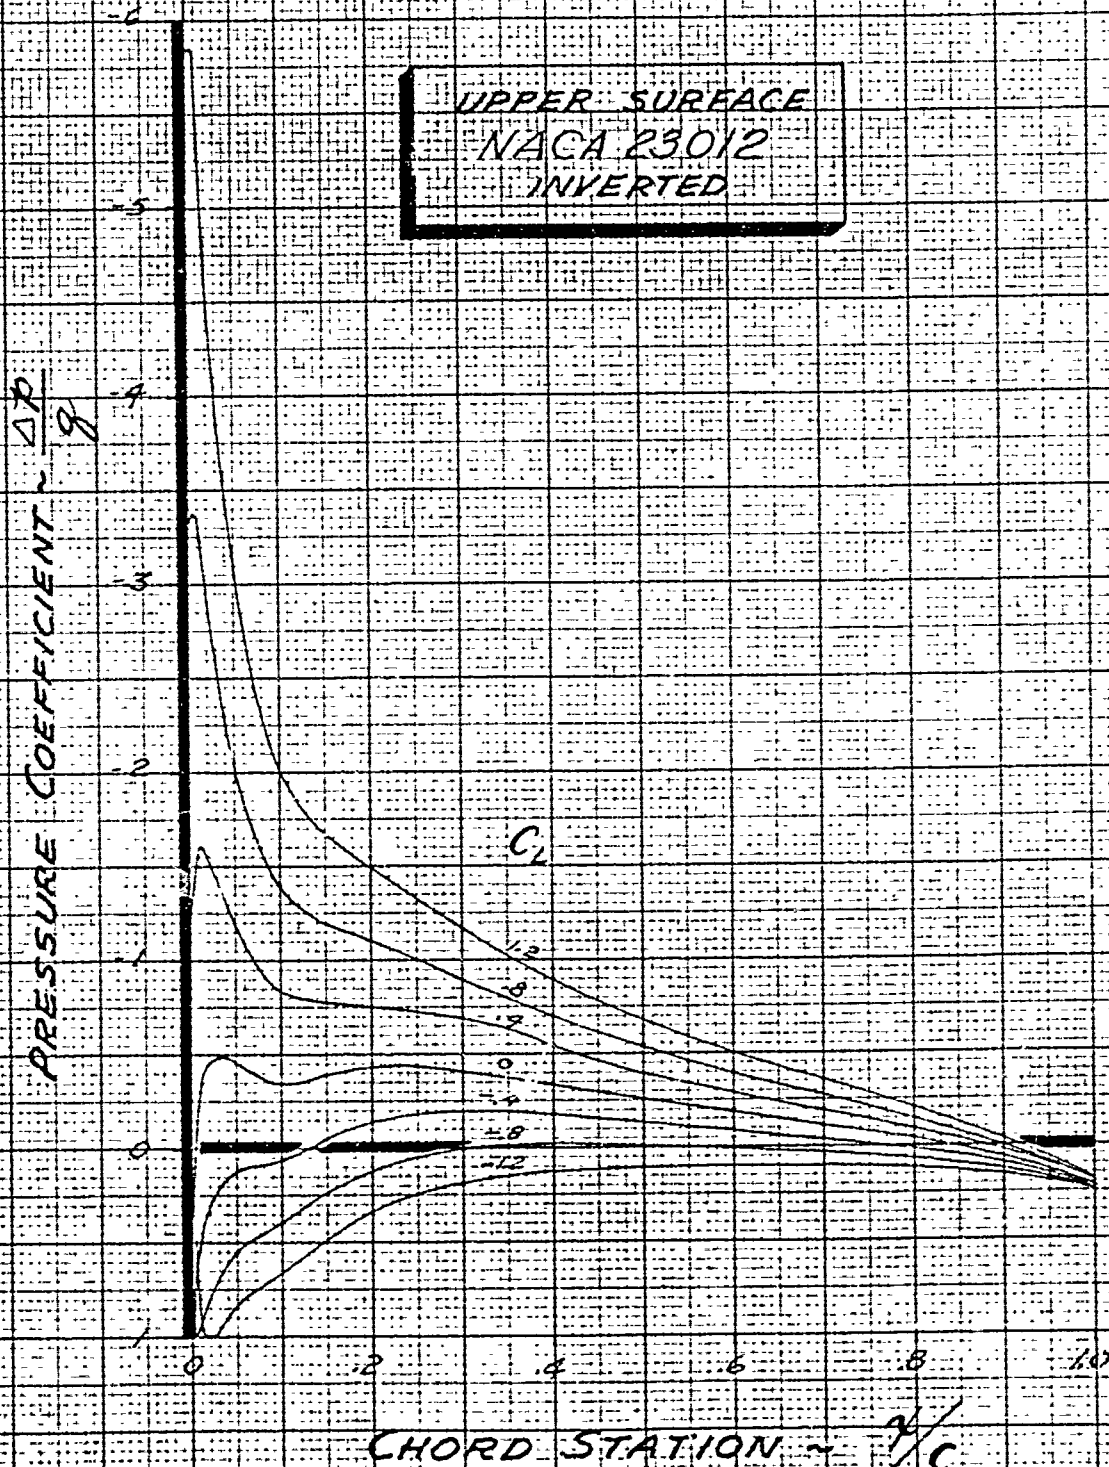

LOCKHEED C-130


HORIZONTAL TAIL CHORDWISE
PRESSURE DISTRIBUTIONS

LOWER SURFACE
NACA 23012
INVERTED

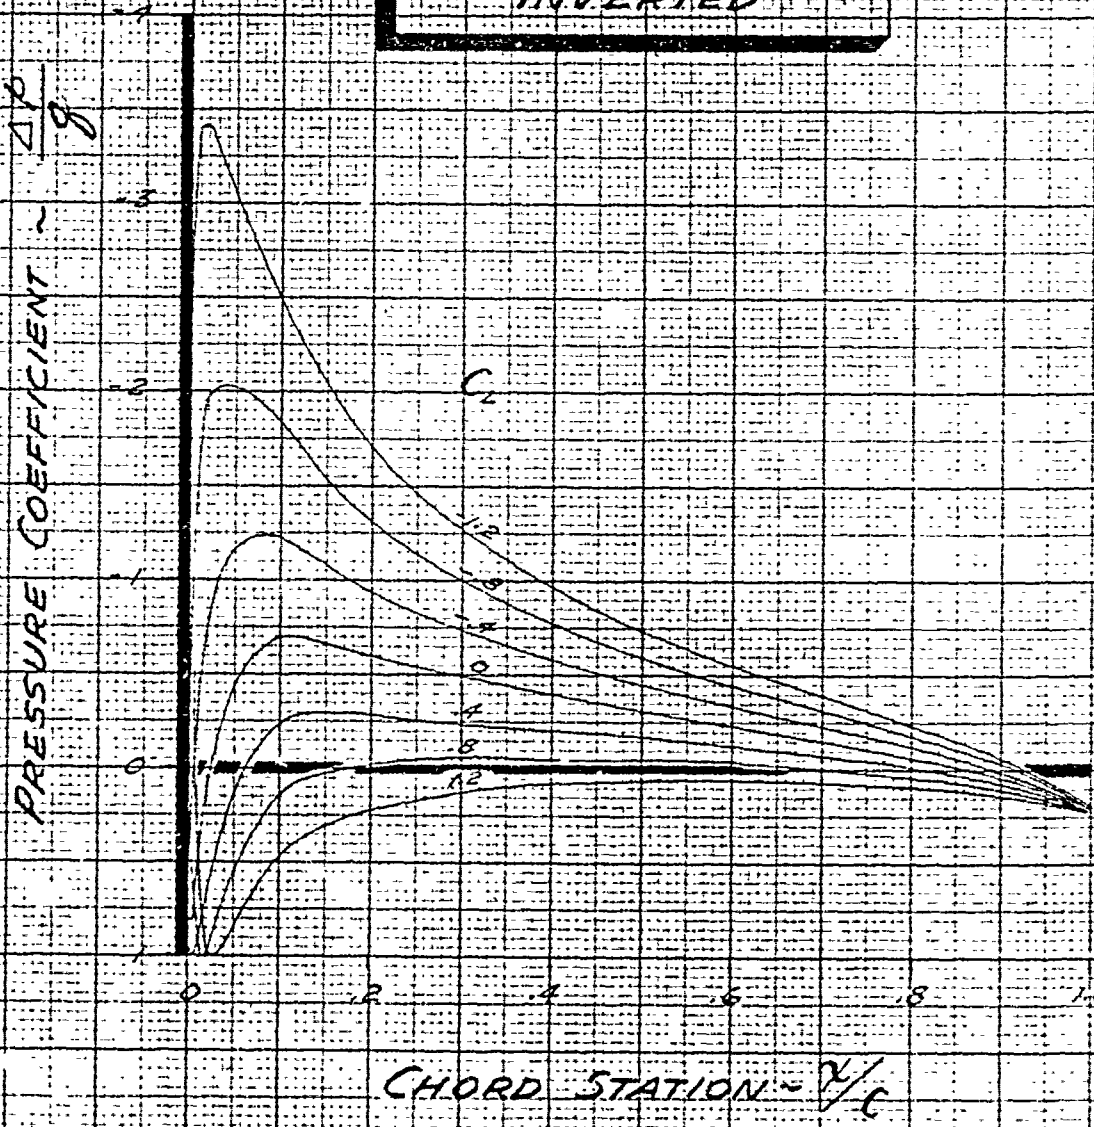

LOCKHEED C-130

HORIZONTAL TAIL NET CHORDWISE
PRESSURE DISTRIBUTION

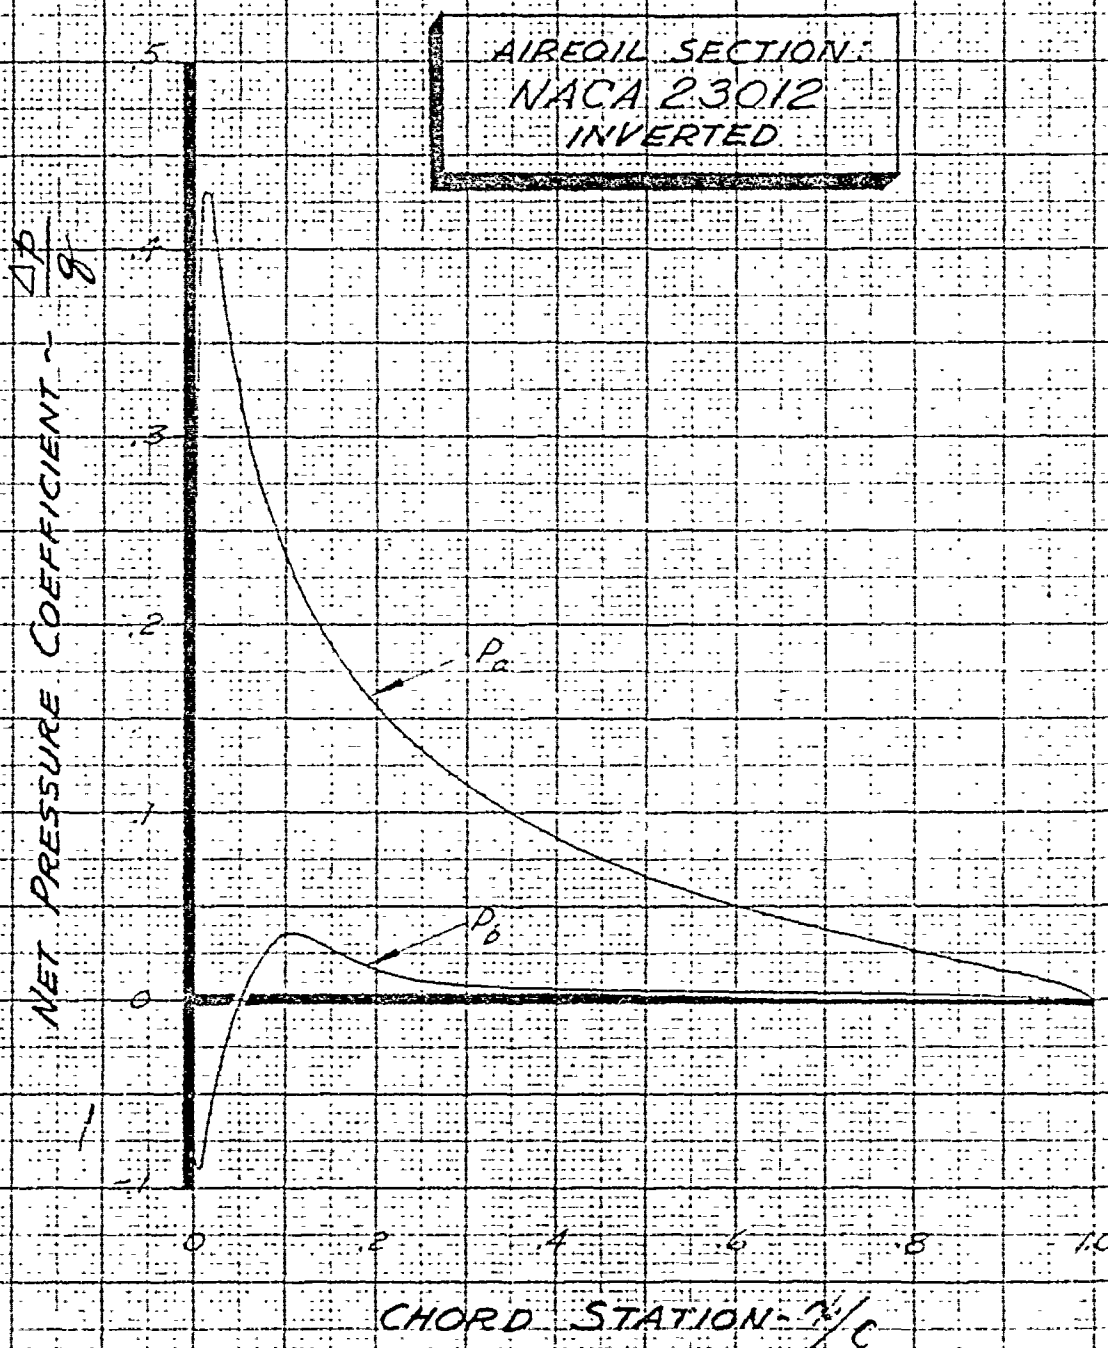

LOCKHEED C-130 HORIZONTAL TAIL NET CHORDWISE PRESSURE DISTRIBUTION DUE TO ELEVATOR DEFLECTION

LOW SPEED

FOR LOCAL SURFACE PRESSURES, DIVIDE THESE NET PRESSURES BY 2 AND APPLY TO EACH SURFACE, ADDING BY PRINCIPLE OF SUPERPOSITION TO PRESSURES DUE TO ANGLE OF ATTACK.

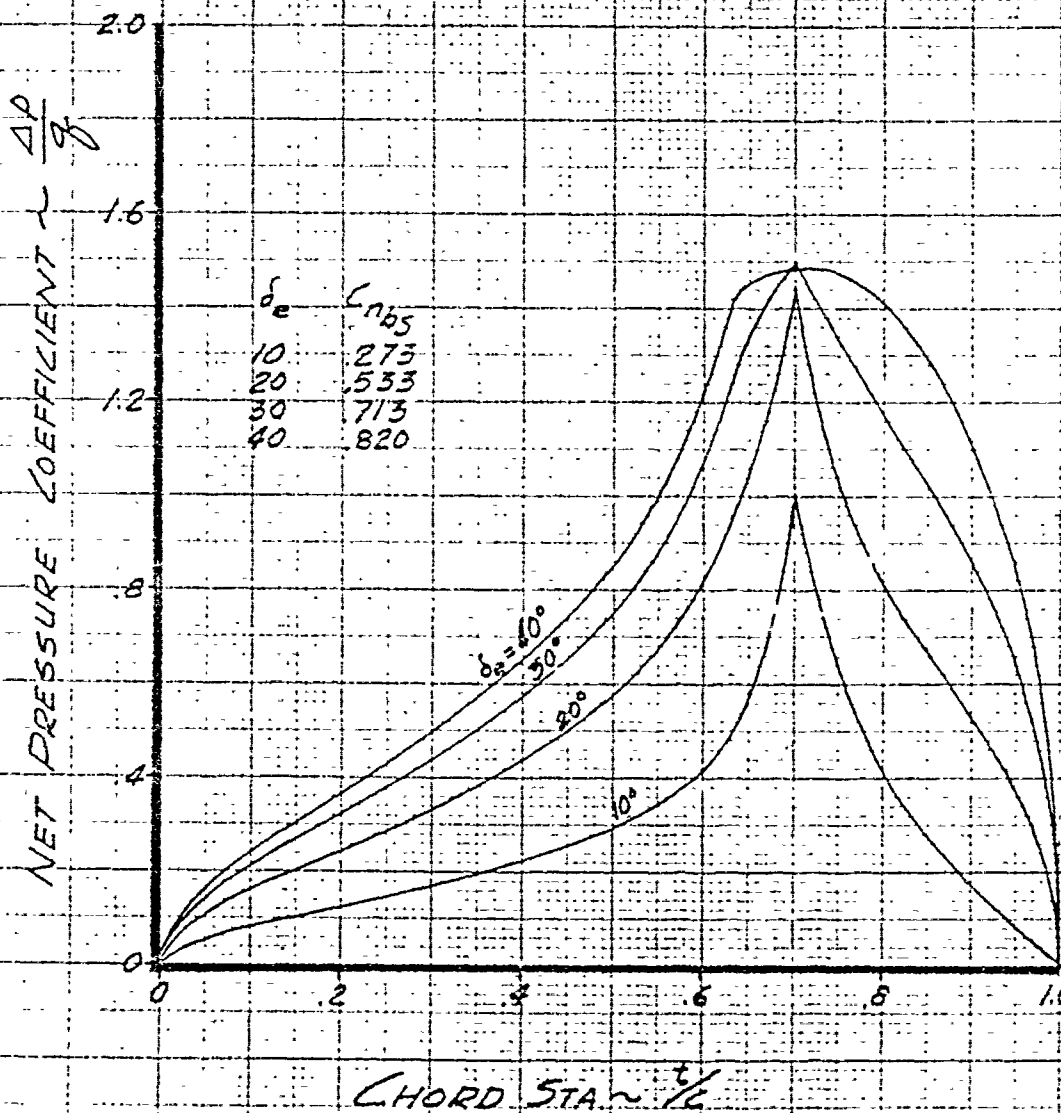


Fig. 67

PREPARED BY RLD
DATE 11-9-51
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 86
MODEL C-130
REPORT NO 9062


LOCKHEED C-130

VERTICAL TAIL CHORDWISE

PRESSURE DISTRIBUTION

ELEVATOR NEUTRAL

AIRFOIL SECTION
64A-015

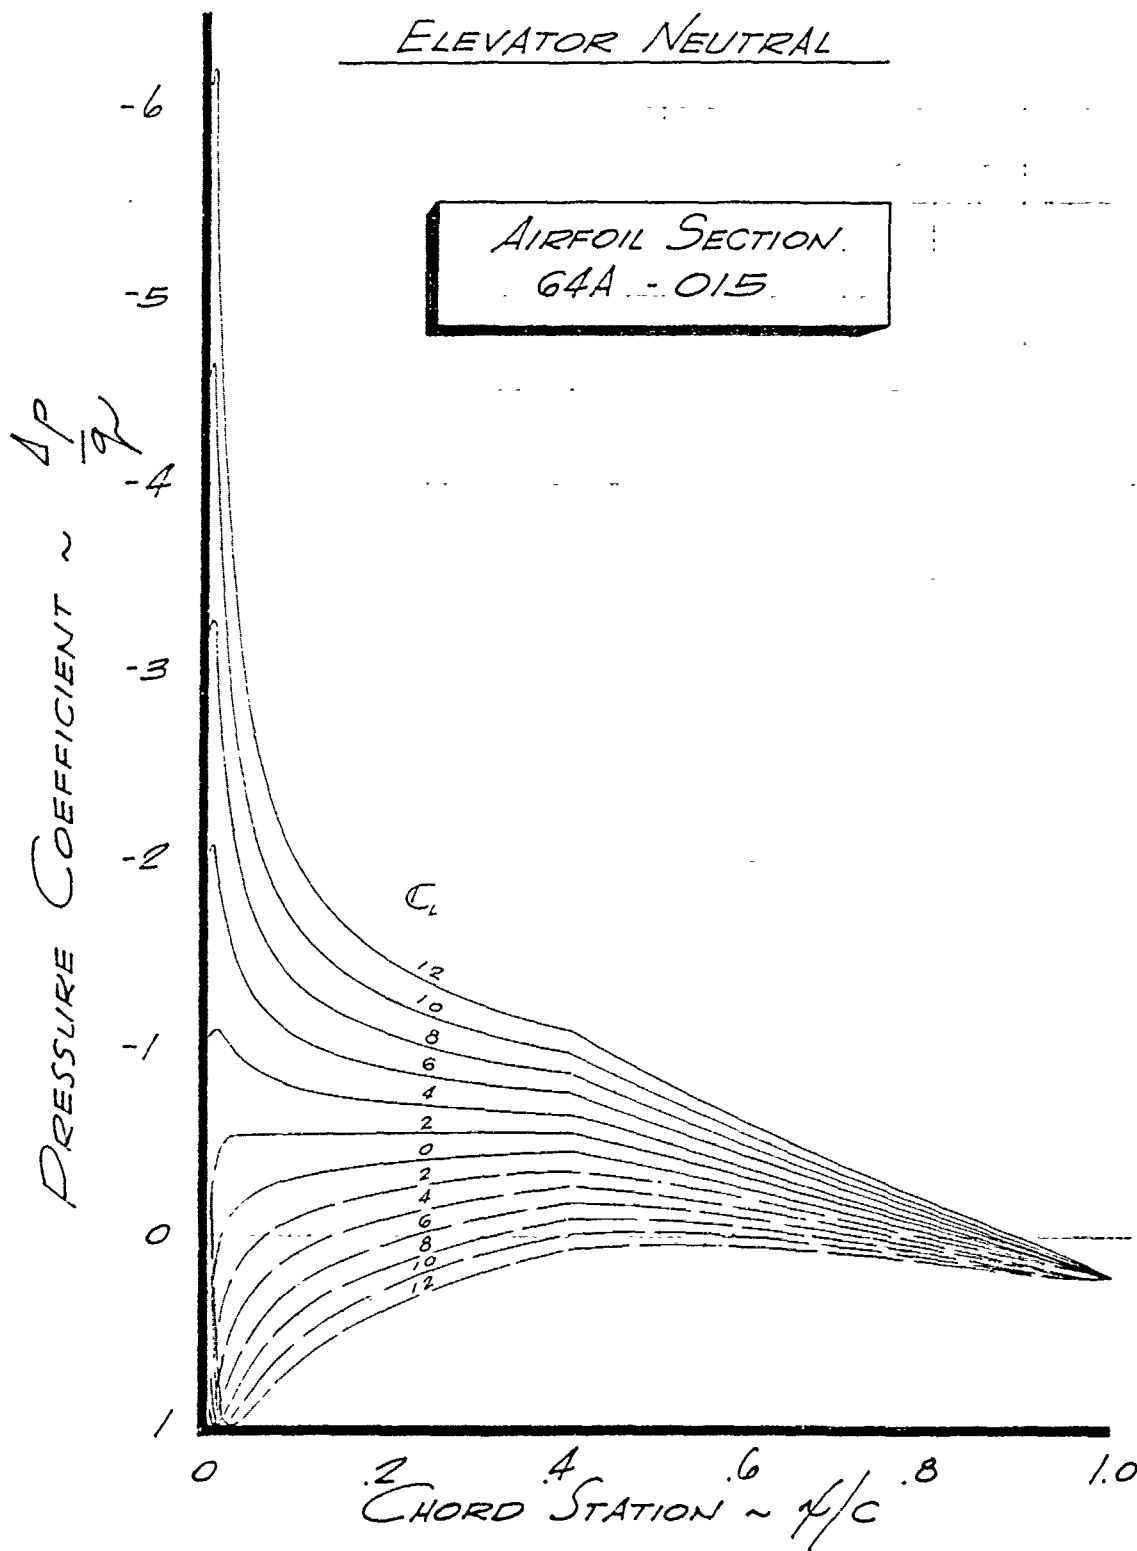

F.4.68

LOCKHEED C-130


VERTICAL TAIL NET CHORDWISE
PRESSURE DISTRIBUTION DUE TO
RUDDER DEFLECTION

LOW SPEED

FOR LOCAL SURFACE PRESSURES, DIVIDE
 THESE NET PRESSURES BY 2 AND APPLY
 TO EACH SURFACE, HAVING BY PRINCIPLE
 OF SUPERPOSITION TO PRESSURES DUE TO
 ANGLE OF ATTACK (YAW)

NET PRESSURE COEFFICIENT $-\frac{\Delta p}{q}$

δ_r	C_{m0}
5	.131
10	.262
15	.393
20	.525
30	.807
40	1.138

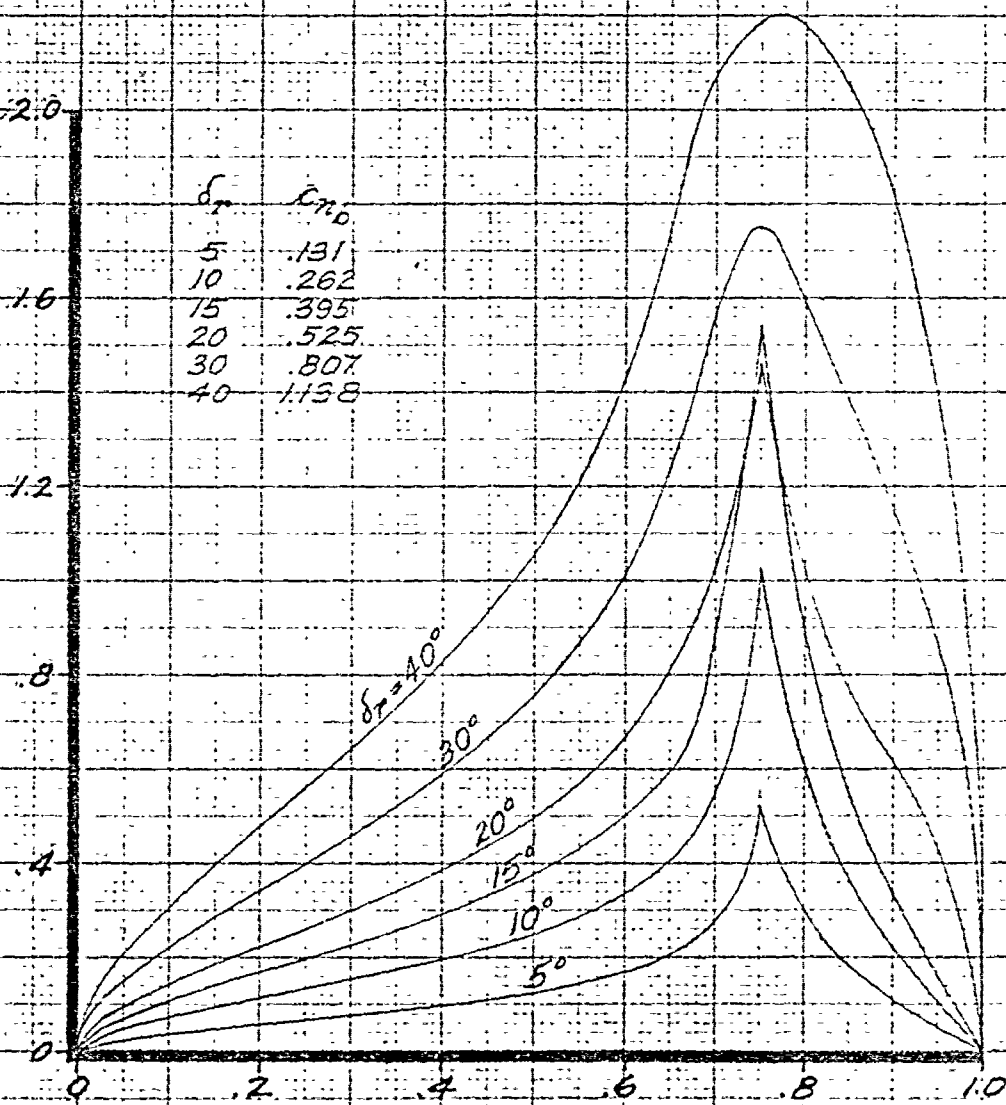

CHORD STATION $-x/c$

Fig. 69

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

MISCELLANEOUS AIR LOADS

CARGO DOOR

Hinge moment coefficients for both upper and lower cargo doors are shown in fig. 70 for several different positions of each door. These data were obtained from wind tunnel tests reported in ref. 1.

FOWLER FLAP LOAD COEFFICIENTS

Flap normal and chord force coefficients are presented in fig. 71. These data are determined from extensive two-dimensional wind tunnel tests conducted by Lockheed and summarized in ref. 6. The curves are presented as total force coefficients, although they are developed from pressure distribution measurements and are, therefore, section coefficients. Two curves of chord force coefficient are presented inasmuch as the tests revealed either might be attained, owing largely to gap and condition of the under surface of the wing exposed by extension of the flap. Wing chordwise pressure distributions with the flaps extended are presented in fig. 63.

ENGINE NACELLE PRESSURE DISTRIBUTION

Upper and lower centerline pressures for two airplane angles of attack are presented in fig. 72. These curves are estimated from wind tunnel test data on the nacelle of a Lockheed XP-58 airplane, reported in ref. 24.

PYLON TANK AND STRUT

Aerodynamic characteristics of the pylon tank are presented in fig. 73. These data are estimated from test data of ref. 14 on an

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

isolated body of similar geometry, with the angles of attack modified to account for the effects of wing upwash. Pylon tank strut aerodynamic properties are determined from simple theory, considering it as a swept-forward wing of low aspect ratio with the airplane wing acting as an end-plate and the pylon tank being a partially effective end-plate. Strut characteristics are shown in fig. 74.

PROPELLER SIDE LOADS

Propeller loads may be determined from the Hamilton Standard equation for propeller side force:

$$\frac{F}{\alpha_q \left(\frac{\pi D^2}{4} \right)} = \frac{.0256}{410} \left[A_F \right] \left[\frac{N}{4} \right] \left[\frac{4}{\pi} \right] \sin (\beta_{.75R} + 10^\circ)$$

where

F = propeller side load, lbs.;

α = angle of relative wind with respect to axis of rotation, degrees;

q = dynamic pressure, $\frac{V^2}{21}$ lbs. per sq. ft.;

D = propeller diameter, 15 ft.;

A_F = propeller activity factor, 150;

N = number of blades, 3;

$\beta_{.75R}$ = propeller blade angle at .75 radius, fig. 75.

Substituting the known values in the foregoing gives:

$$F = 1.58 \alpha' q \sin (\beta_{.75R} + 10^\circ)$$

The loads in pitch are computed for an angle of attack, α' , corrected for upwash induced by the presence of the wing such that

$$\alpha' = 1.32 [\alpha_{FRL} + 0.7^\circ]$$

~~RESTRICTED~~

~~SECURITY INFORMATION~~

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

For propeller loads in yaw, $\alpha' = \psi$.

PARATROOPER SHIELD DOORS

Paratrooper shield door normal force coefficient variation with door position is presented in fig. 76. A range of values is given to allow for effects of airplane yaw. The curves are estimated from wind tunnel test data on various airplane fuselage dive flaps, principally those of the Lockheed P-80 reported in ref. 5.

NOSE LANDING GEAR DOORS

The nose gear doors include three panels which, when closed, form part of the fuselage contour. The forward door is rectangular in shape and is hinged along its forward edge so that, in its extended position, it is similar to a fuselage dive-flap. The rear doors are also rectangular in shape and are arranged symmetrically on either side of the airplane centerline. Each of these doors operates from a linkage which, in opening, allows it to drop down from the fuselage a short distance, enough to clear and then to move sideways along the fuselage contour to clear the wheel well. In the closed position, the forward door is subject to fuselage pressure distribution, estimated to vary between limits of $\frac{\Delta p}{q} = -0.2$ to $+0.1$, accounting for angle of attack variations. When fully open, the forward door is subject to an airload equivalent to a pressure coefficient of $\frac{\Delta p}{q} = 1.2$ tending to close it. During extension, the loads are assumed to vary linearly between the foregoing values. The external face of the rear doors are subject to a pressure coefficient of $\frac{\Delta p}{q} = -0.2$ to 0 in any position. In addition, a ram pressure coefficient of $\frac{\Delta p}{q} = 0.5$ exists between the side of the fuselage and the inner face of the panel.

~~RESTRICTED~~

~~SECURITY INFORMATION~~

~~RESTRICTED~~

~~SECURITY INFORMATION~~

Page 91

LOCKHEED AIRCRAFT CORPORATION

REPORT 9002

MAIN LANDING GEAR DOORS

Air load coefficients for the main gear doors are presented in fig. 77. These data are determined from a survey of past design practice and wind tunnel and flight test results on bomb bay and landing gear doors of several Lockheed airplanes.

PREPARED BY R.L.D.
 DATE 9-11-52
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 92
 MODEL C-130
 REPORT NO 9062

LOCKHEED C-130

CARGO DOOR HINGE MOMENTS



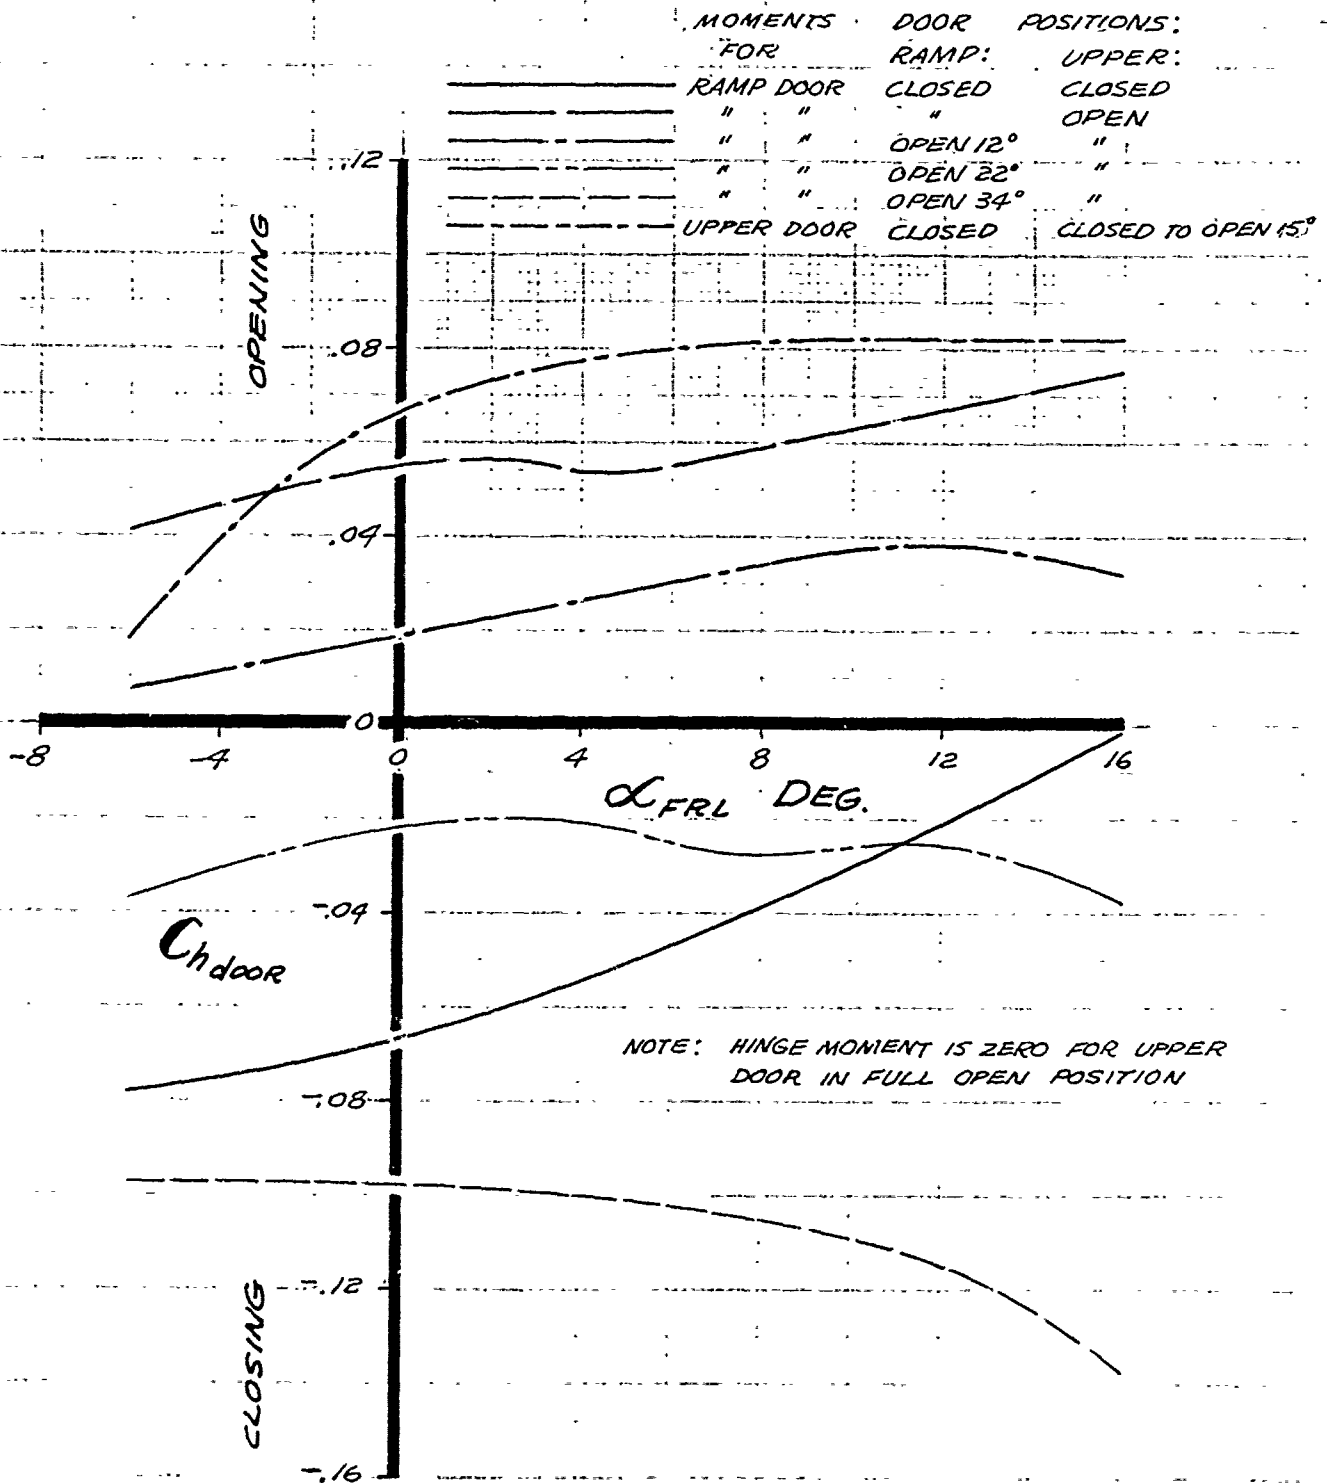



Fig. 70

LOCKHEED C-130

FLAP LOAD COEFFICIENTS

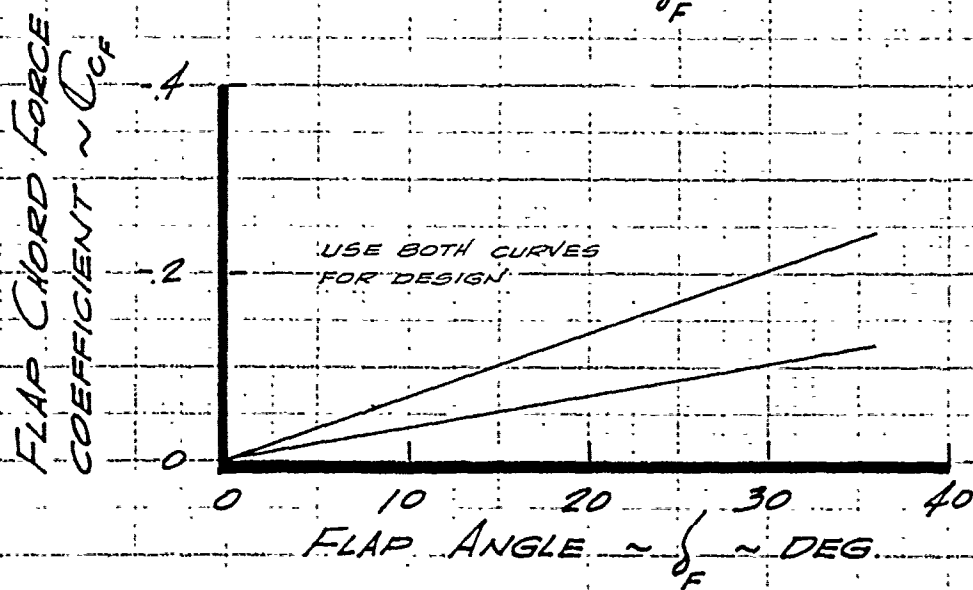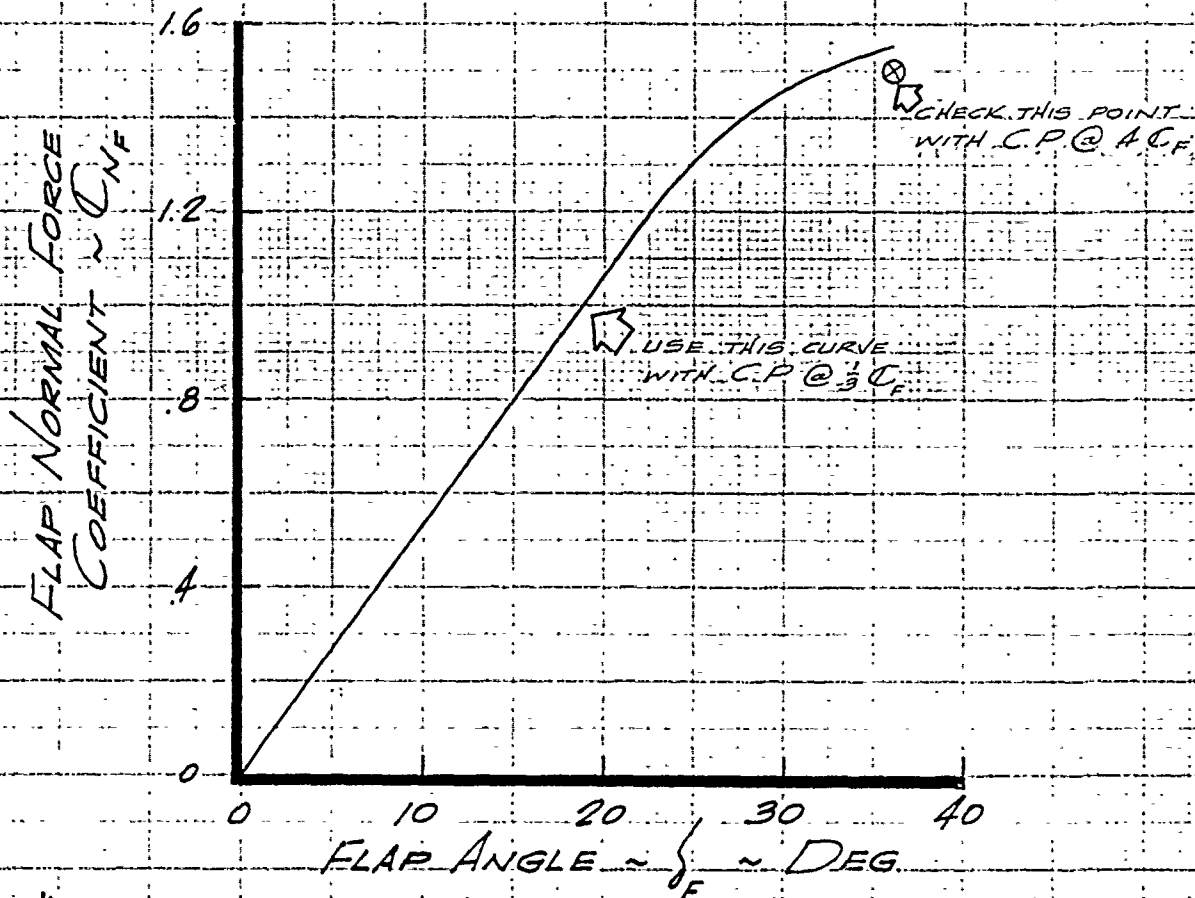

LOCKHEED C-130
ESTIMATED - PRESSURE
DISTRIBUTION ON NACELLES

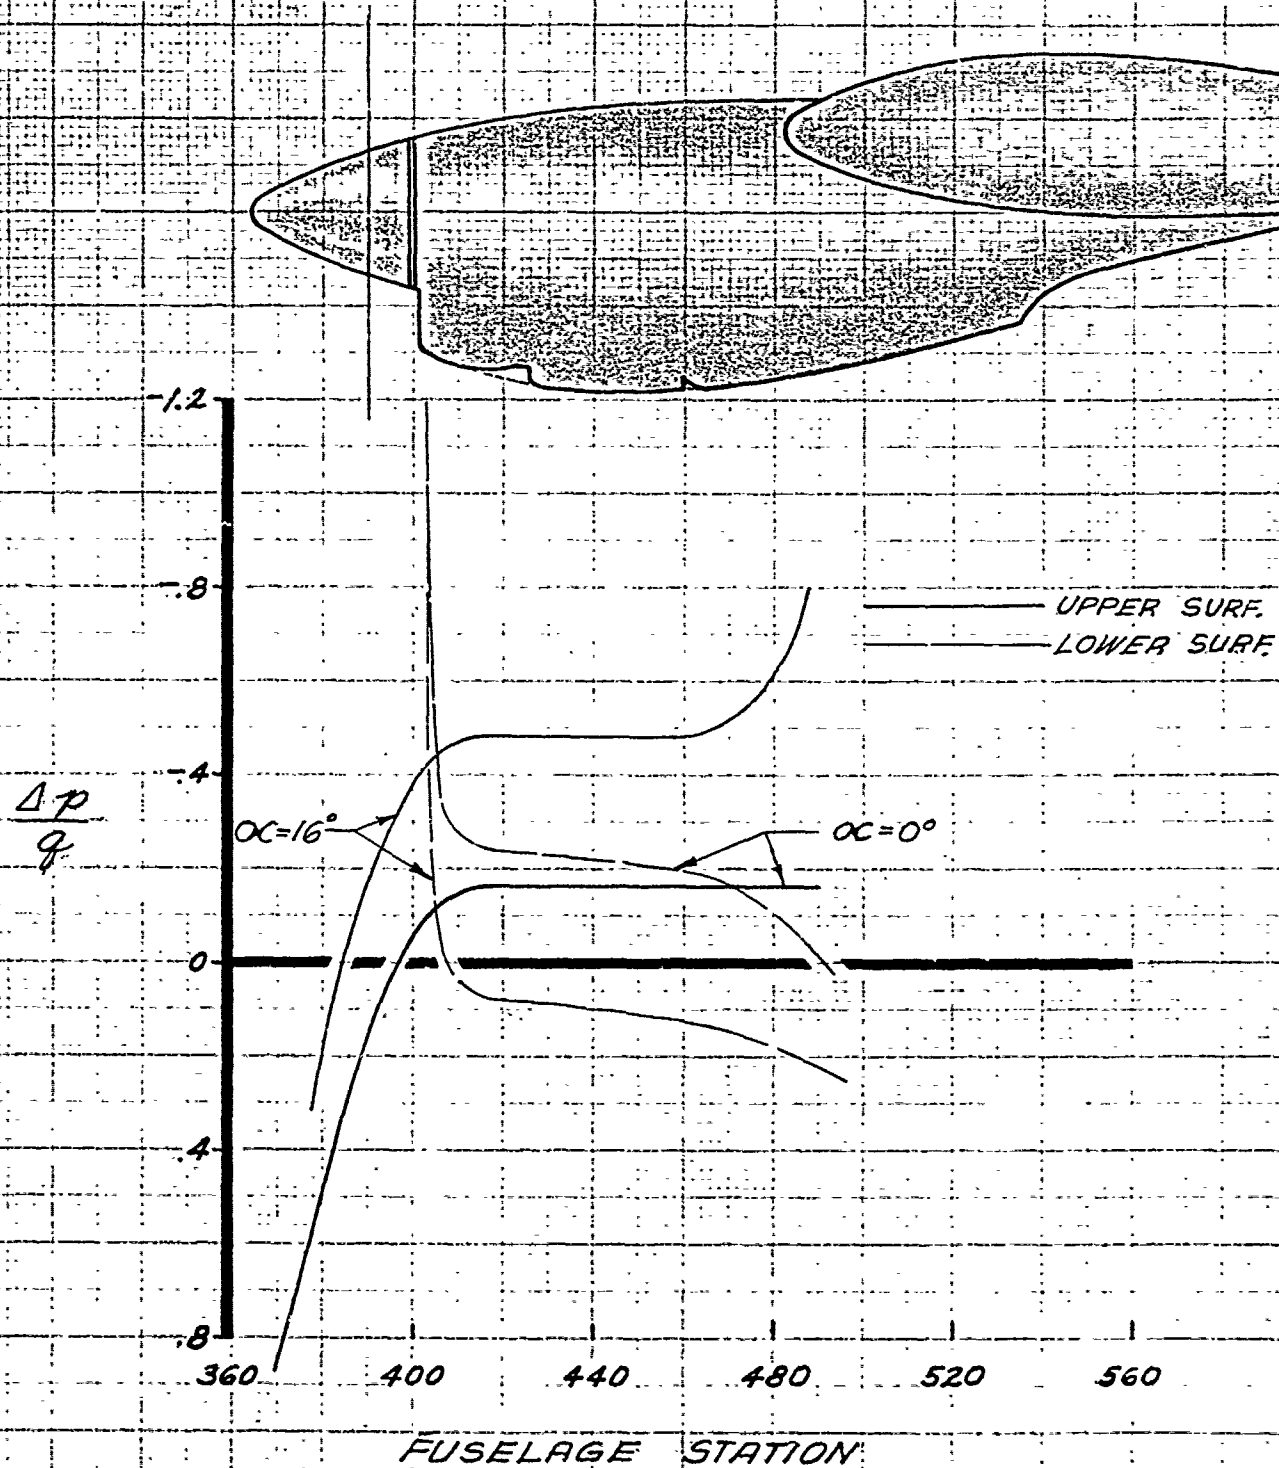

LOCKHEED C-130

PYLON TANK AERODYNAMIC
CHARACTERISTICS

$$C_L, C_D, C_e = \frac{(L, D, C)}{qA}$$

$$C_m, C_n = \frac{(M, N)}{qAL}$$

A = FRONTAL AREA L = TANK LENGTH

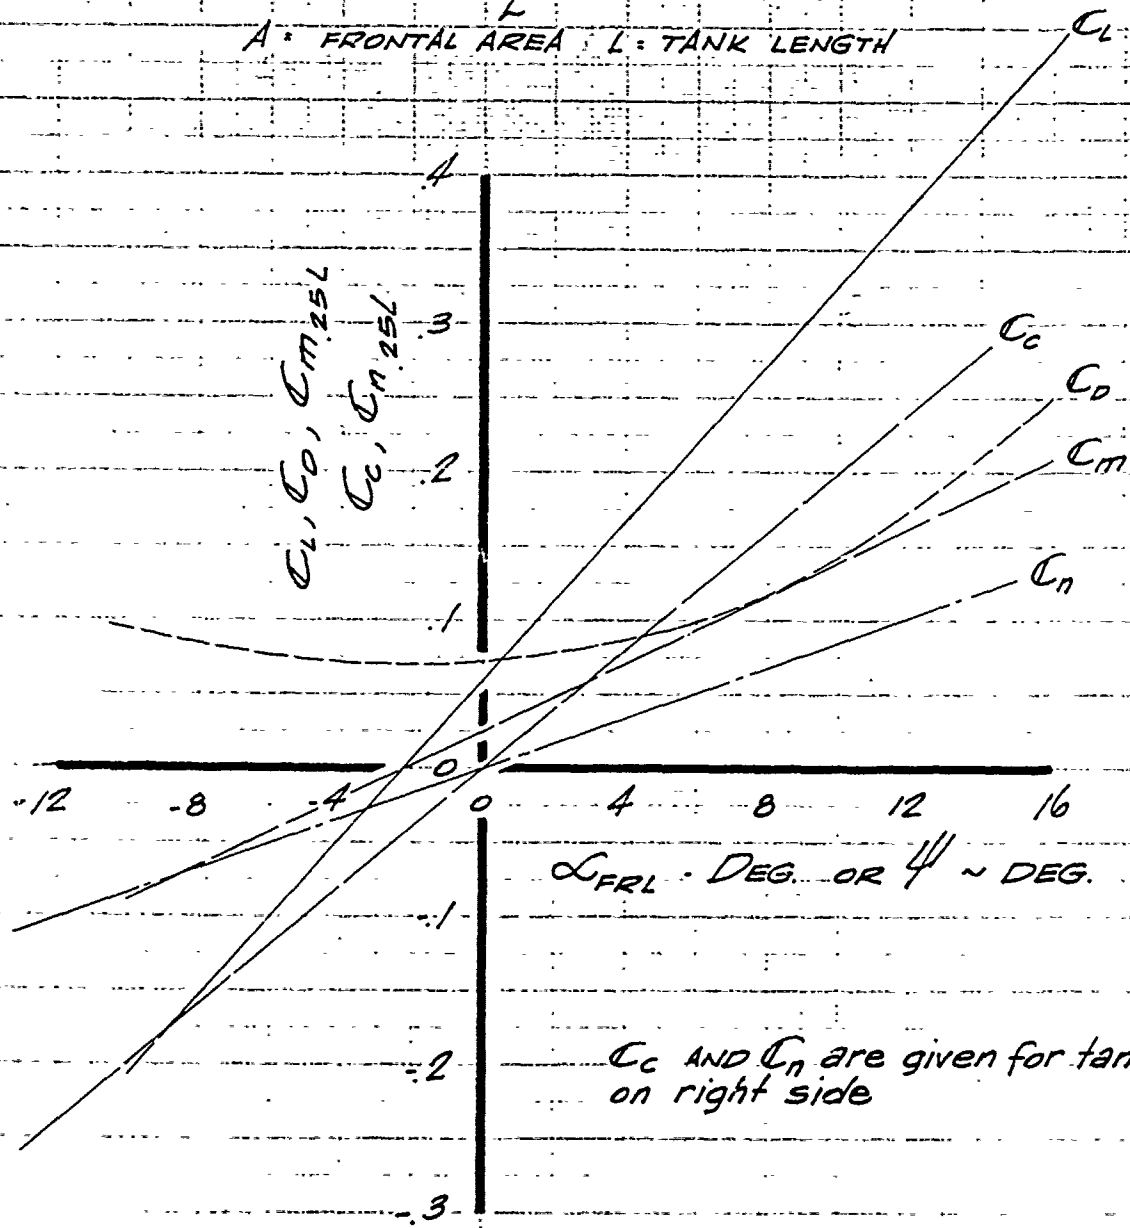


Fig. 7B

PREPARED BY R.L.O.
 DATE 2-18-52
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 96
 MODEL C-130
 REPORT NO 9062

Lockheed C-130

PYLON TANK STRUT AERODYNAMIC CHARACTERISTICS

coefficients are based on strut area.
 yawing moment about strut quarter-chord
 point is zero.

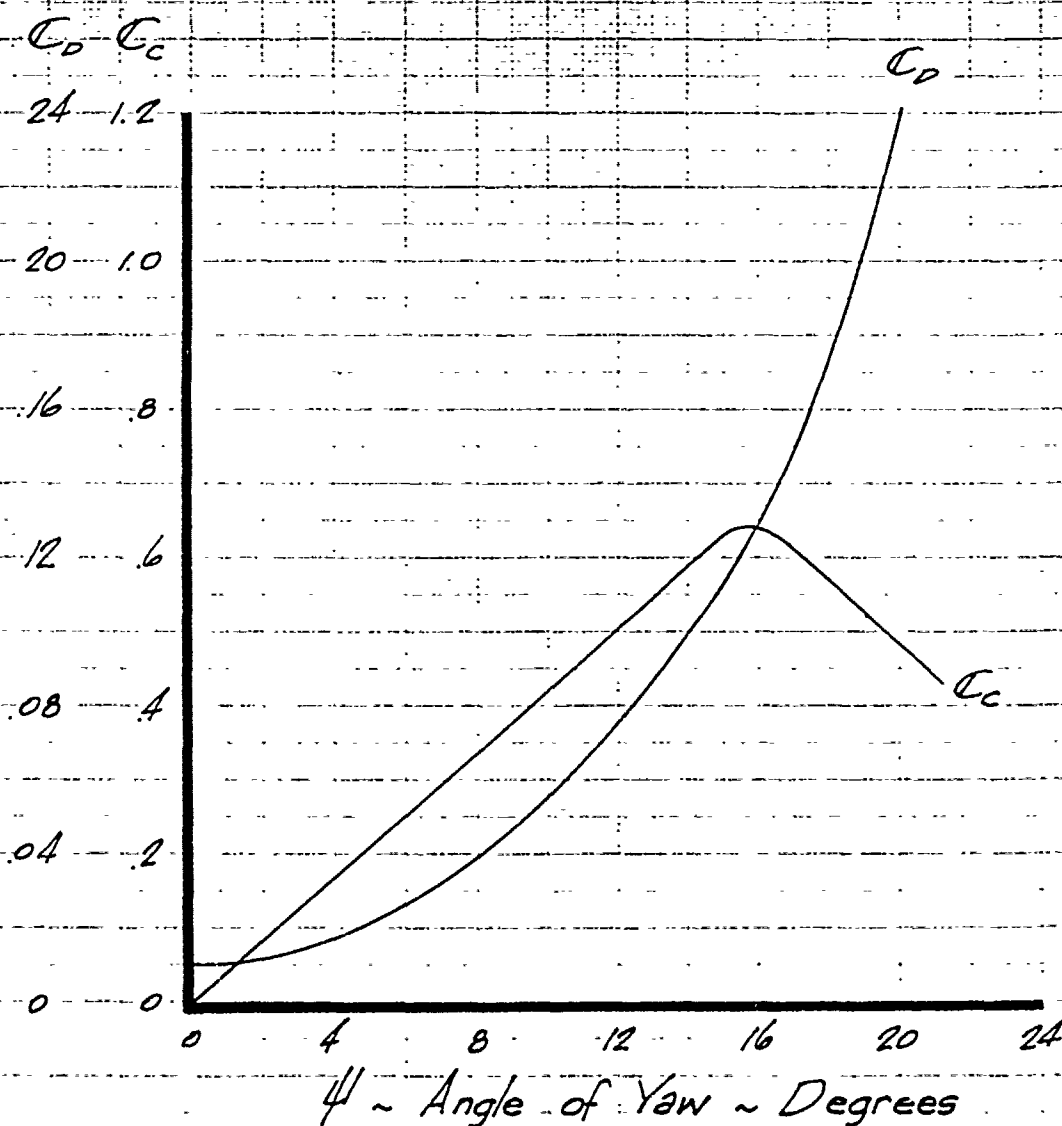


FIG. 74

PREPARED BY _____
DATE _____
CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION

PAGE 97
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

VARIATION OF PROPELLER BLADE ANGLE WITH SPEED

$\beta_{.75R}$ - BLADE ANGLE AT .75 RADIUS

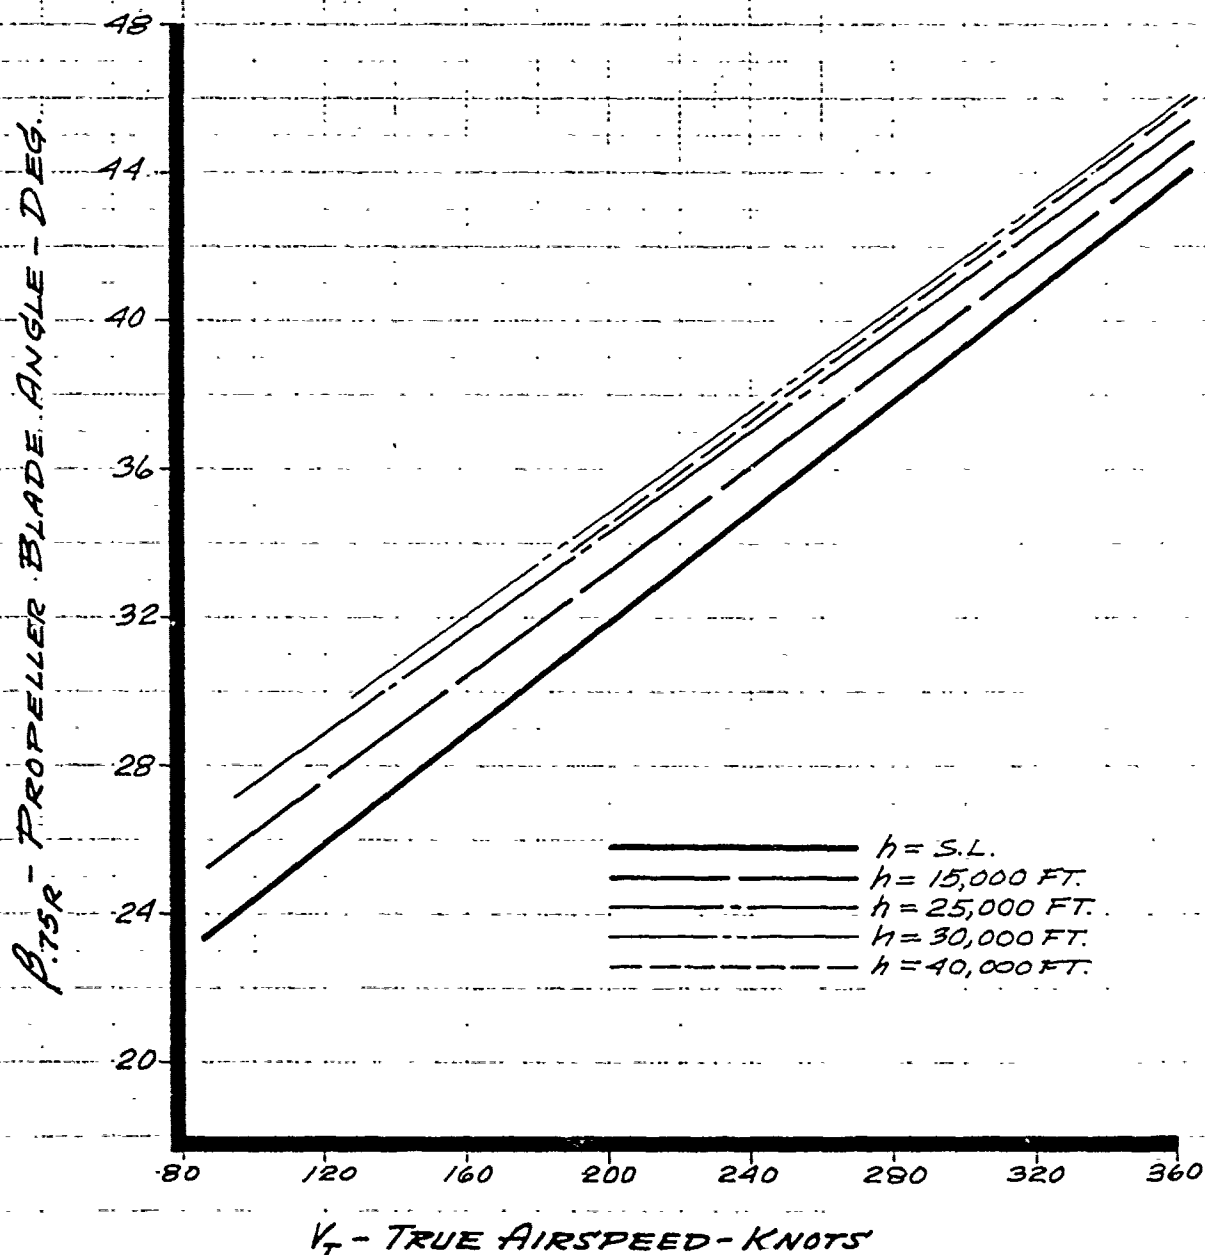

PREPARED BY _____
DATE _____
CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION

PAGE 98
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

PARATROOPER SHIELD DOOR
AIR LOADS

CENTER OF PRESSURE AT 45%
AFT OF FRONT EDGE

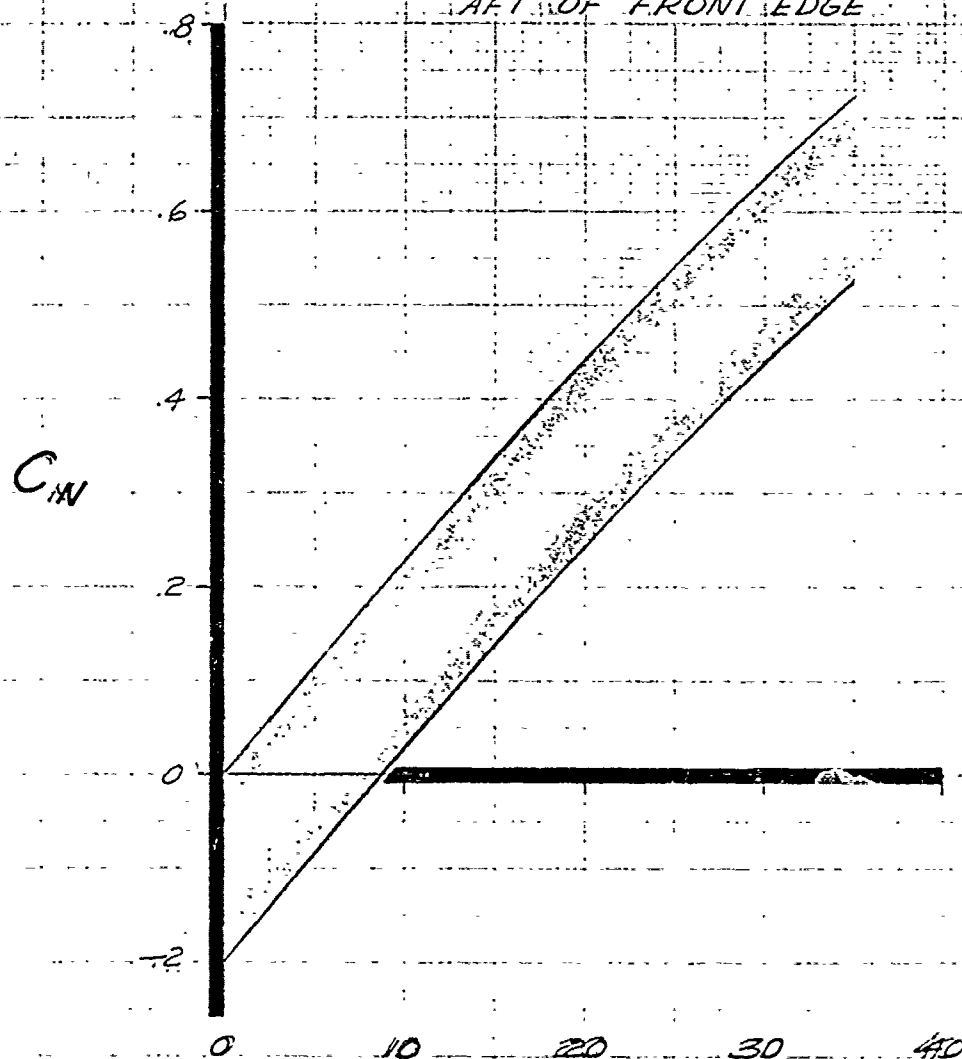

DOOR ANGLE - DEG

MEASURED FROM CLOSED POSITION



PREPARED BY 272
 DATE 1-12-53
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 99
 MODEL C-130
 REPORT NO 9062

LOCKHEED C-130 MAIN GEAR DOOR AIR LOADS

FOR USE WITH FULL DOOR CHORD AND AREA
 FOR HINGED SECTION; USE LOADS RESULTING
 FROM THESE CURVES, & ALSO FROM A UNIFORM
 PRESSURE EQUIVALENT TO $\Delta p/q = 0.10$

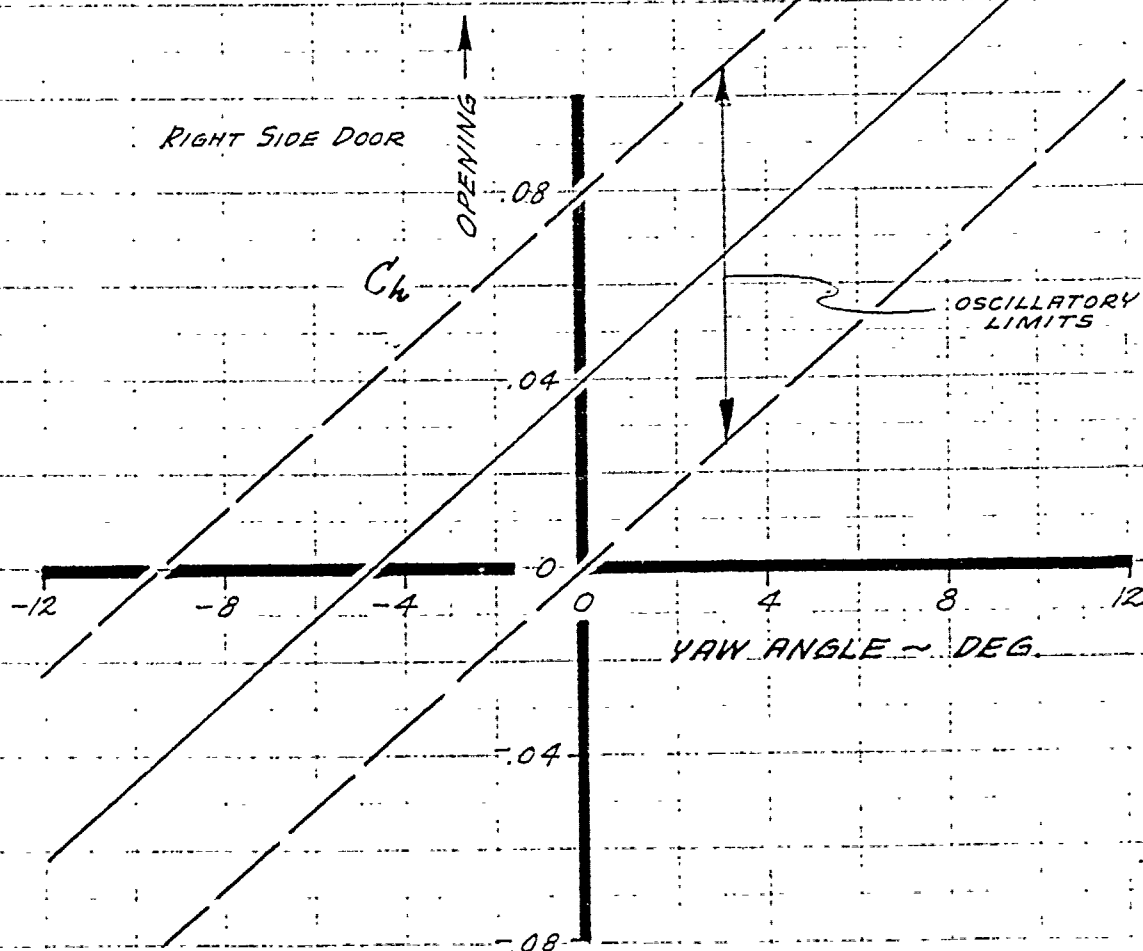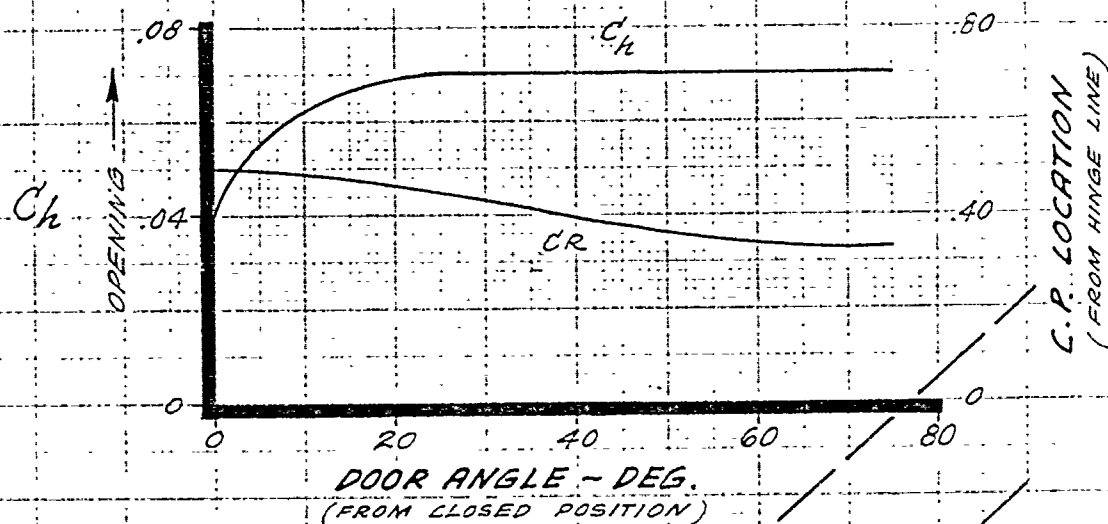

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

CONTROL SYSTEM CHARACTERISTICS

All three primary controls are actuated with the aid of hydraulic boosters. In each system, motion of the pilot's control is transmitted through suitable linkages to an arm which operates the booster valve. When this valve is bottomed, which requires only a small fraction of an inch of control movement, further motion is transmitted to the control surface, with the pilot's effort magnified by the action of the boost cylinder. On the prototype airplane, provision has been incorporated in the design for varying the boost ratio. Control system characteristics based on nominal settings are presented in the following pages and curves; final setting for both prototype and production airplanes will be determined during flight testing. The effect of changing boost ratio will, for practical purposes, affect only the magnitude of the pilot force at booster cut-off, decreasing it in the same proportion by which the boost ratio is increased and vice-versa. Mechanical advantage between the pilot's control and the control surface remain unchanged and the hinge moment available at booster cut-off is only negligibly affected. The following data summarize the design requirements of the control surfaces, the control systems and the power boosters.

Elevator System

The nominal boost ratio averages approximately 35:1, as shown in Fig. 79, and with the variable feature of the prototype

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

mentioned above, can be adjusted to any value between 27:1 and 80:1. Owing to the mechanical design of the system, the boost ratio and the other characteristics vary somewhat with control surface position; exact values of each are given in Figs. 78 and 79. The hydraulic supply to the cylinders has been made adequate to permit elevator movement rates of 40 degrees per second at one-third of the design hinge moment for short intervals and 10 full cycles per minute for continuous movement at approximately one-half of booster capacity.

The foregoing relationships have been crossplotted in Fig. 80 to show the variation of pilot effort with elevator hinge moment for several elevator angles. This plot illustrates the effectiveness of the boost system in aiding the pilot and shows that, for practical purposes, the hinge moment available at maximum booster output is the designing factor; further effort by the pilot produces only a negligible increase.

Rudder System

As with the elevator, the mechanical advantage of the rudder system is determined from the relation between the desired rudder pedal length and travel and the required rudder deflection. Hinge moment output capacity required has been determined to be critical for the case of an engine failure at take-off. A value of 3,450 ft.-lbs. with full rudder has been set, which allows sufficient margin of control for this case and which determines the design of the booster cylinder and linkage to the rudder. Maximum pilot effort associated with this output is approximately 180 lbs. which, with the other factors, sets

~~RESTRICTED~~
~~SECURITY INFORMATION~~

Page 102

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

the boost ratio. The nominal boost ratio, based on the foregoing, averages approximately 52:1 and, on the prototype, can be adjusted to any value between 26:1 and 78:1 as explained above. This system provides adequate control at low speeds, with vertical tail loads within reasonable limits. At small rudder angles, the system provides over 4,000 ft.-lbs. of hinge moment capacity which, coupled with the hinge moment coefficient and airplane stability characteristics, results in more than sufficient control and unduly large design vertical tail loads in high speed flight. These loads exceed 120 lbs. per sq. ft. of surface, as compared to less than 90 on comparable airplanes. It was ascertained that the penalties associated with the foregoing could be avoided by reducing the hinge moment output of the boost cylinders for all flight with flaps retracted. Thus, for all flight with flaps extended in any amount, the system is as described above while, with flaps retracted, pressure to the boost cylinder is reduced from 3,000 psi to 1,600 psi with a proportionate decrease in hinge moment output. The resulting system provides ample high speed control, and design vertical tail loads are maintained within reasonable limits. Actual values, based on the nominal boost ratio setting, of the several parameters discussed here are given in Figs. 81, 82 and 83. Certain of these relationships have been crossplotted in Fig. 84 to show the variation of rudder pedal force with rudder hinge moment. The effect of the dual output system, dependent on flap position, is clearly demonstrated here. Also, it is readily apparent that pilot effort beyond that for boost limit produces only negligible effects. The hydraulic supply to the boost cylinders has been made adequate to permit rudder movement rates of 40 degrees per second under one-half of the design hinge moment for short intervals and, for continuous movement, 10 full cycles per minute at approximately one-half of design hinge moment.

~~RESTRICTED~~
~~SECURITY INFORMATION~~

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

Aileron System

Design requirements of the aileron system were set to obtain full aileron travel at $V_T \pm 1/2 = 200$ knots. With the booster designed for this condition, it was found that appreciably greater hinge moments are available at lesser wheel throws, due to the mechanism of the system which produces dissymmetry between up and down aileron travel, so the nominal boost ratio of approximately 50:1 was set so that no more than 80 lbs. pilot effort would be required to attain full booster output at any wheel position consistent with the speed range of the airplane. On the prototype airplanes, the boost ratio may be adjusted to any value between 20:1 and 75:1 as found to be desirable during flight testing. The several parameters necessary to determine the relation between aileron hinge moment and wheel force are presented in Figs. 85, 86 and 87. Figs. 88 and 89 show variation of pilot force and aileron hinge moment with wheel angle for several speeds. The hinge moment data of Fig. 54 have been used with the control and boost system characteristics to determine these plots. The hydraulic supply to the cylinders has been made adequate to permit aileron movement ratio of 40 degrees per second at one-quarter of the design hinge moment for short intervals and 15 full cycles per minute for continuous movement at approximately one-half of design hinge moment.

Control Surfaces Tabs

All tabs are electrically driven and are used to trim pilot forces. Design loads are presented in the table below for conditions determined to be critical. These hinge moments may be regarded to result from a triangular pressure distribution with its

~~RESTRICTED~~

SECURITY INFORMATION

Page 104

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

peak at the tab hinge line. Tab hinge moment coefficients used are plotted in Fig. 90.

	Rudder	Aileron (One Side)	Elevator (Each Side)
Tab Area, Sq. Ft.	5.0	2.9	7.64
Tab. Chord, In.	10.0	6.5	11.0
Max. Tab Angle, Deg.	± 25	± 20	± 30
Max. Control Surface Angle, Deg.	± 35	+15, -25	+15, -40
Limit Design HM, $\max V_H$, In.-Lbs.	3140	1120	5750
Normal Operating HM, $= 10^\circ V_H$, In.-Lbs.	1430	700	2400
Minimum Operating Rate, Deg./Sec.	3.5	3.5	3.5

~~RESTRICTED~~

SECURITY INFORMATION


PREPARED BY W. L. B.
 DATE 12-13-57
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 1 105
 MODEL C-130
 REPORT NO. 9062

LOCKHEED C-130

ELEVATOR CONTROL SYSTEM
MECHANICAL ADVANTAGE

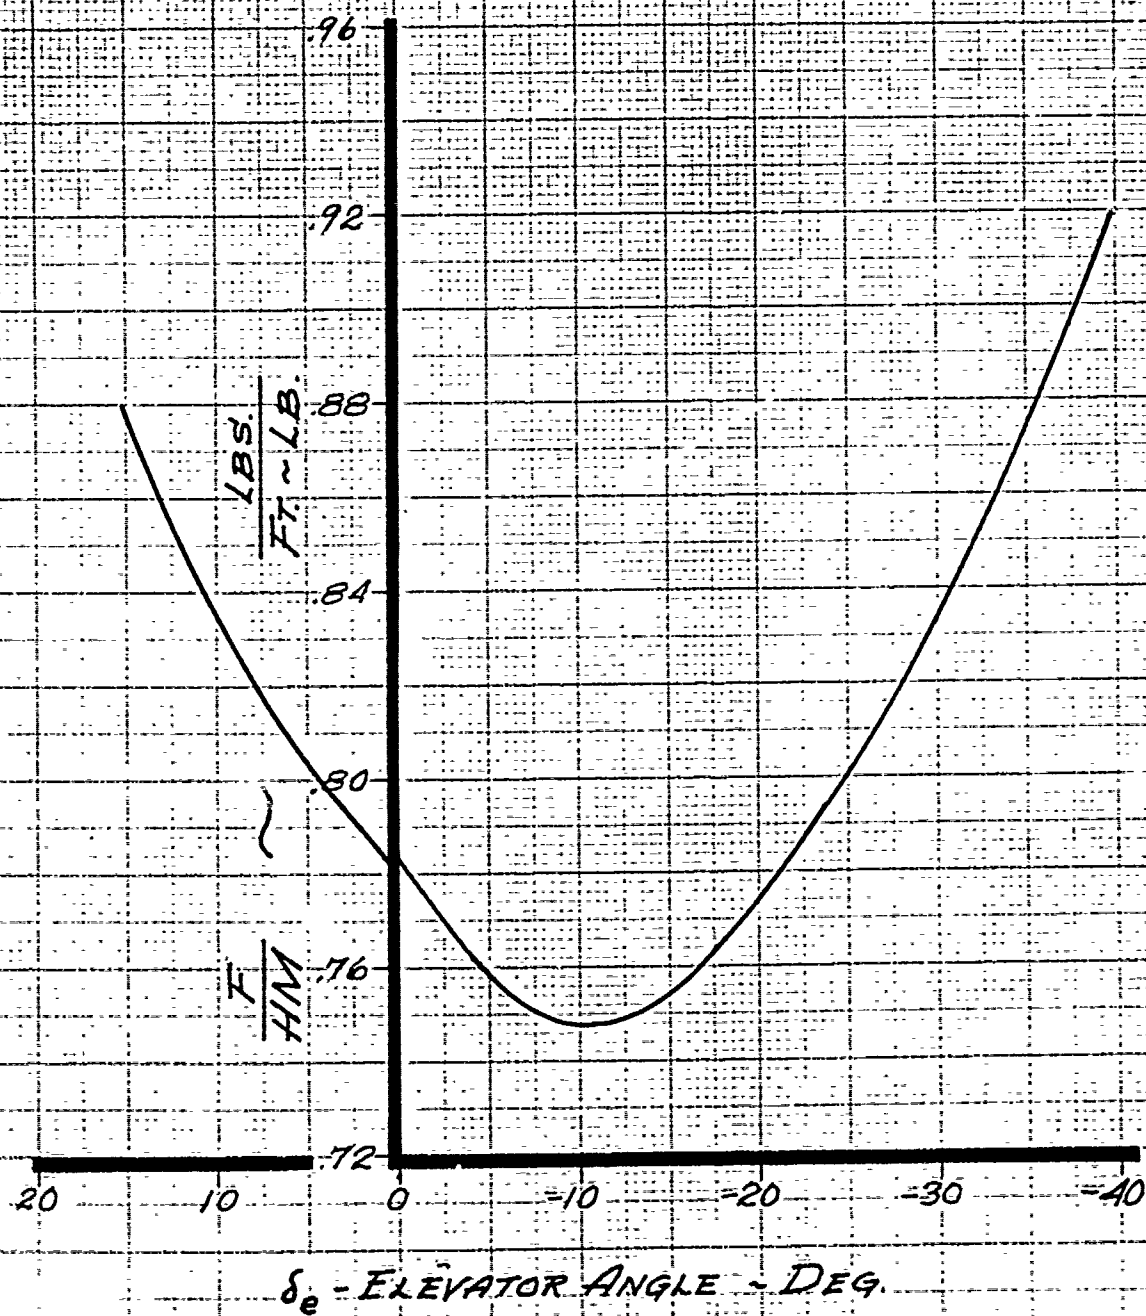


PREPARED BY _____
 DATE _____
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION
 CALIFORNIA DIVISION

PAGE 10106
 MODEL C-130
 REPORT NO. 9062

LOCKHEED C-130

ELEVATOR BOOST SYSTEM CHARACTERISTICS

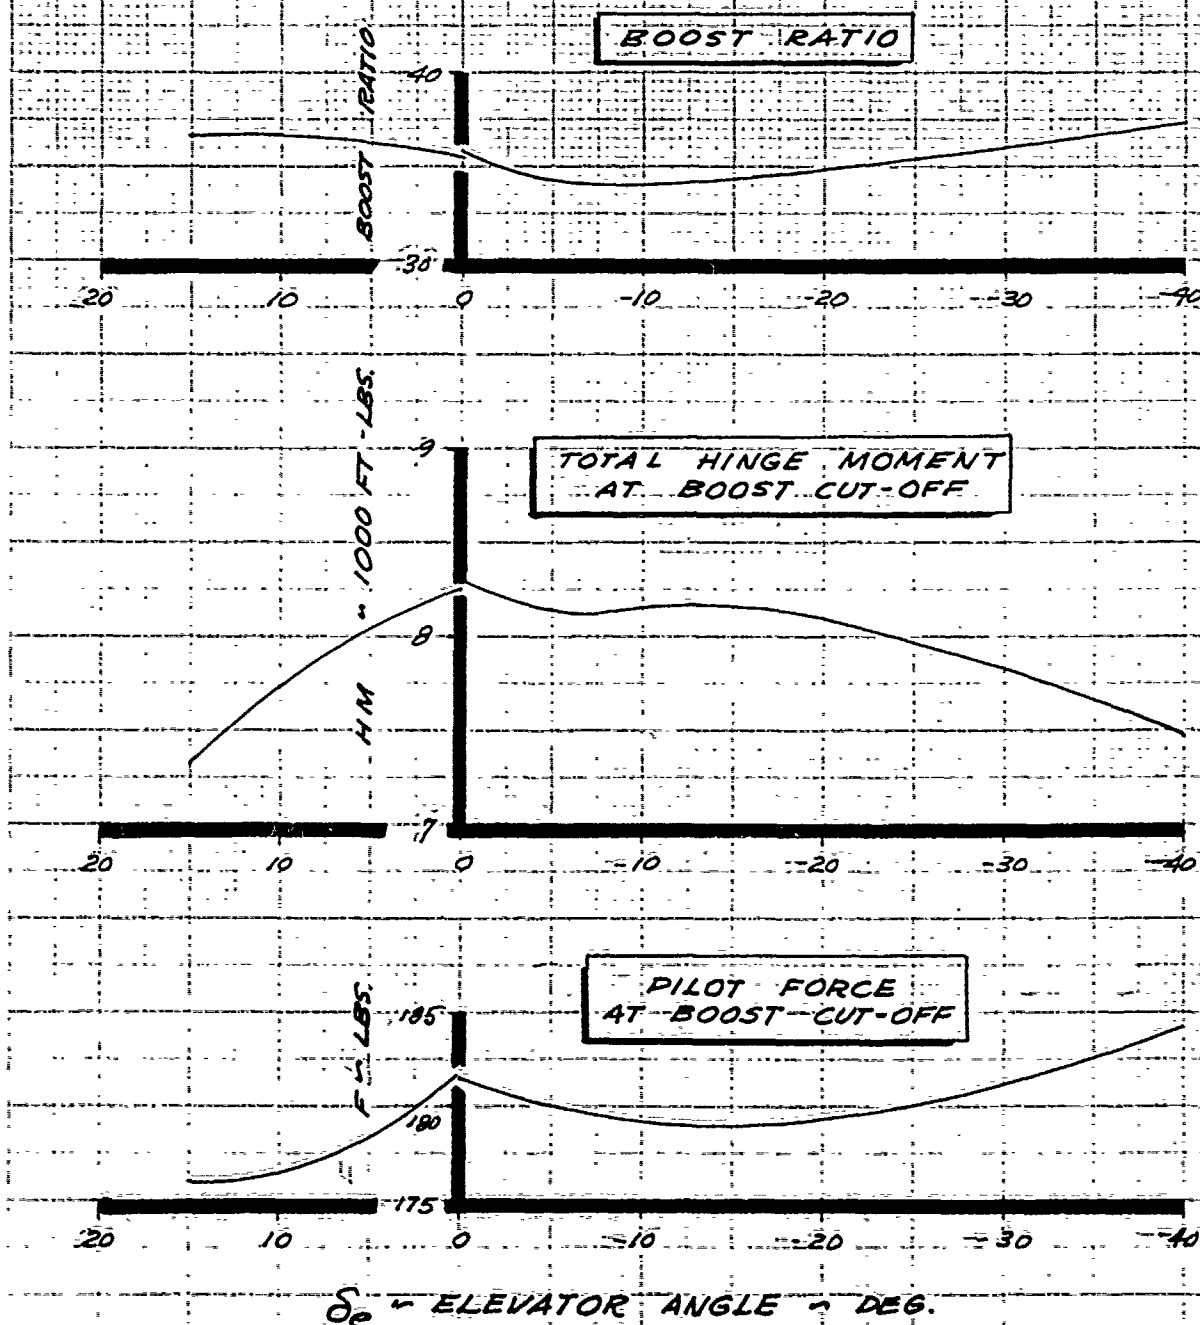


PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION
CALIFORNIA DIVISION

PAGE 107
MODEL C-130-130
REPORT NO. 9062

LOCKHEED C-130

VARIATION OF PILOT FORCE
WITH ELEVATOR HINGE
MOMENT

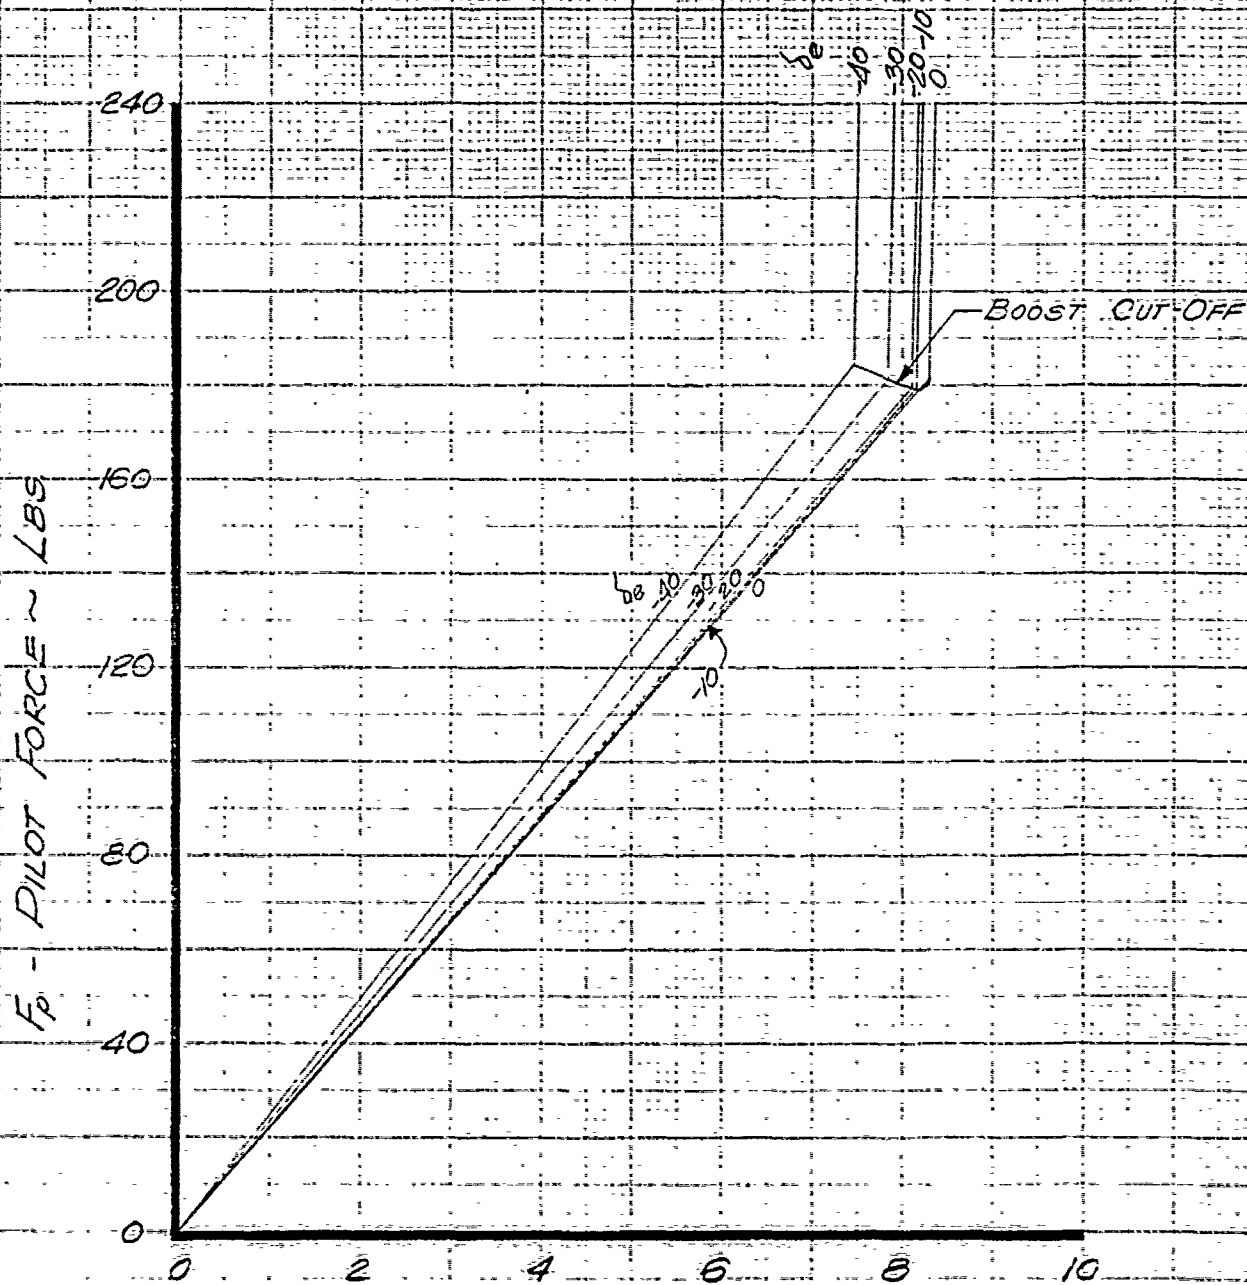

HINGE MOMENT ~ 1000 FT-LBS.

PREPARED BY R.D.
 DATE 12-2-52
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION



PAGE 108
 MODEL C-130
 REPORT NO. 9062

LOCKHEED C-130

RUDDER SYSTEM CHARACTERISTICS

A. ~ MECHANICAL ADVANTAGE

B. ~ BOOST RATIO

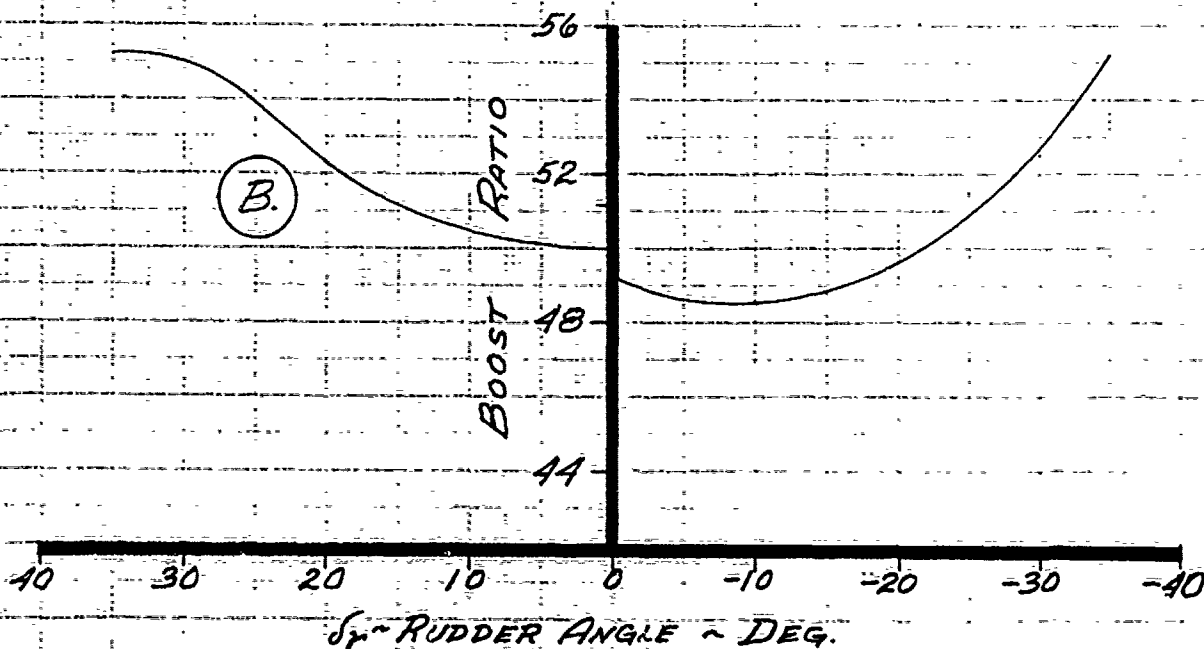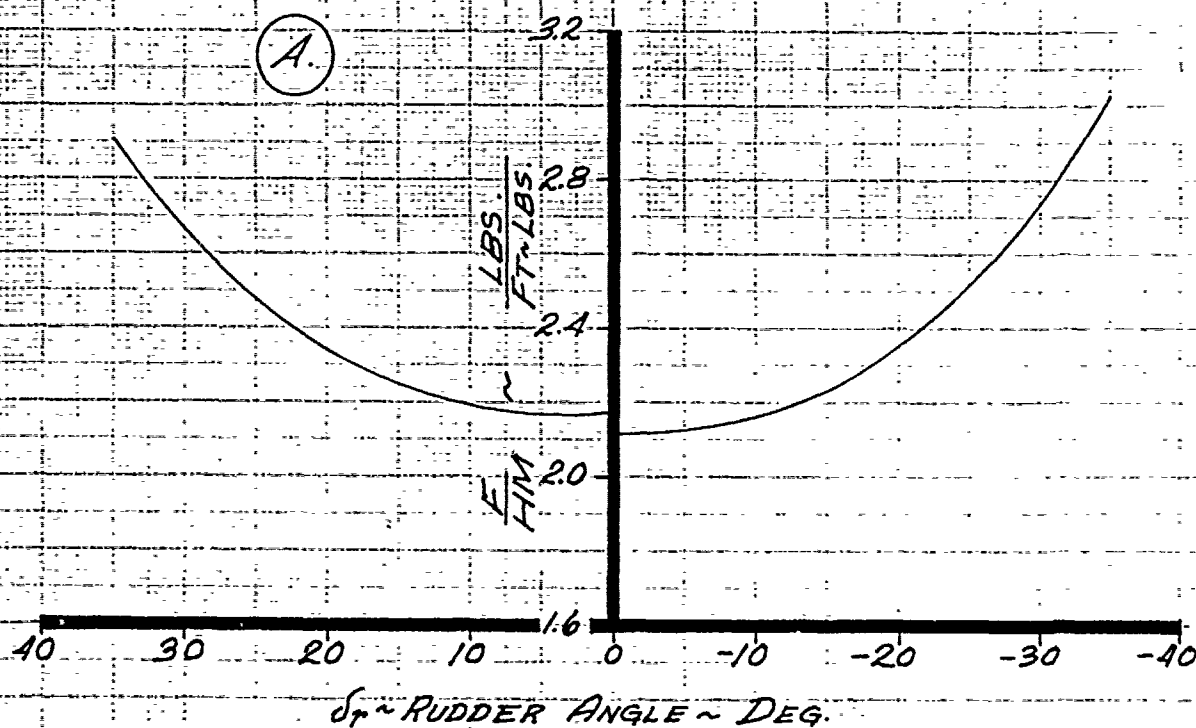


PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 109
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

PEDAL FORCE AT RUDDER BOOST CUT-OFF

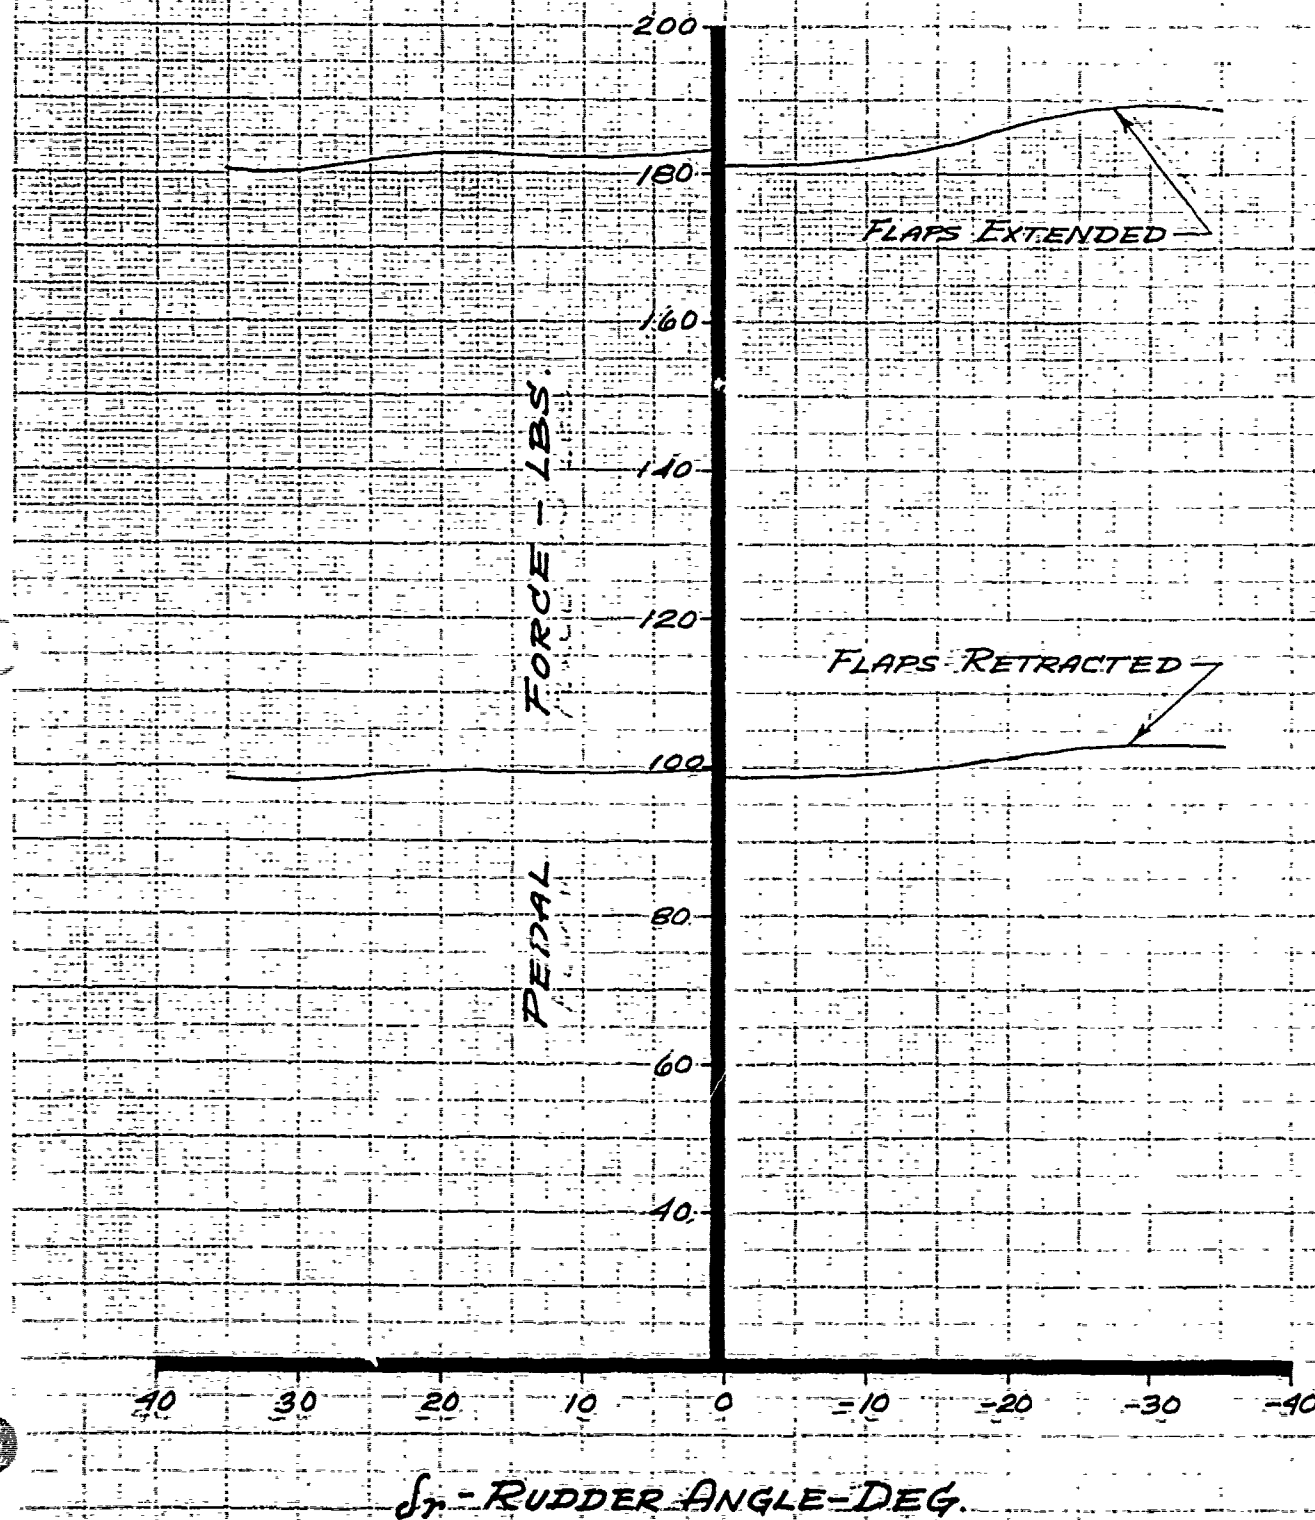


PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 110
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

RUDDER HINGE MOMENT
AT BOOST CUT-OFF

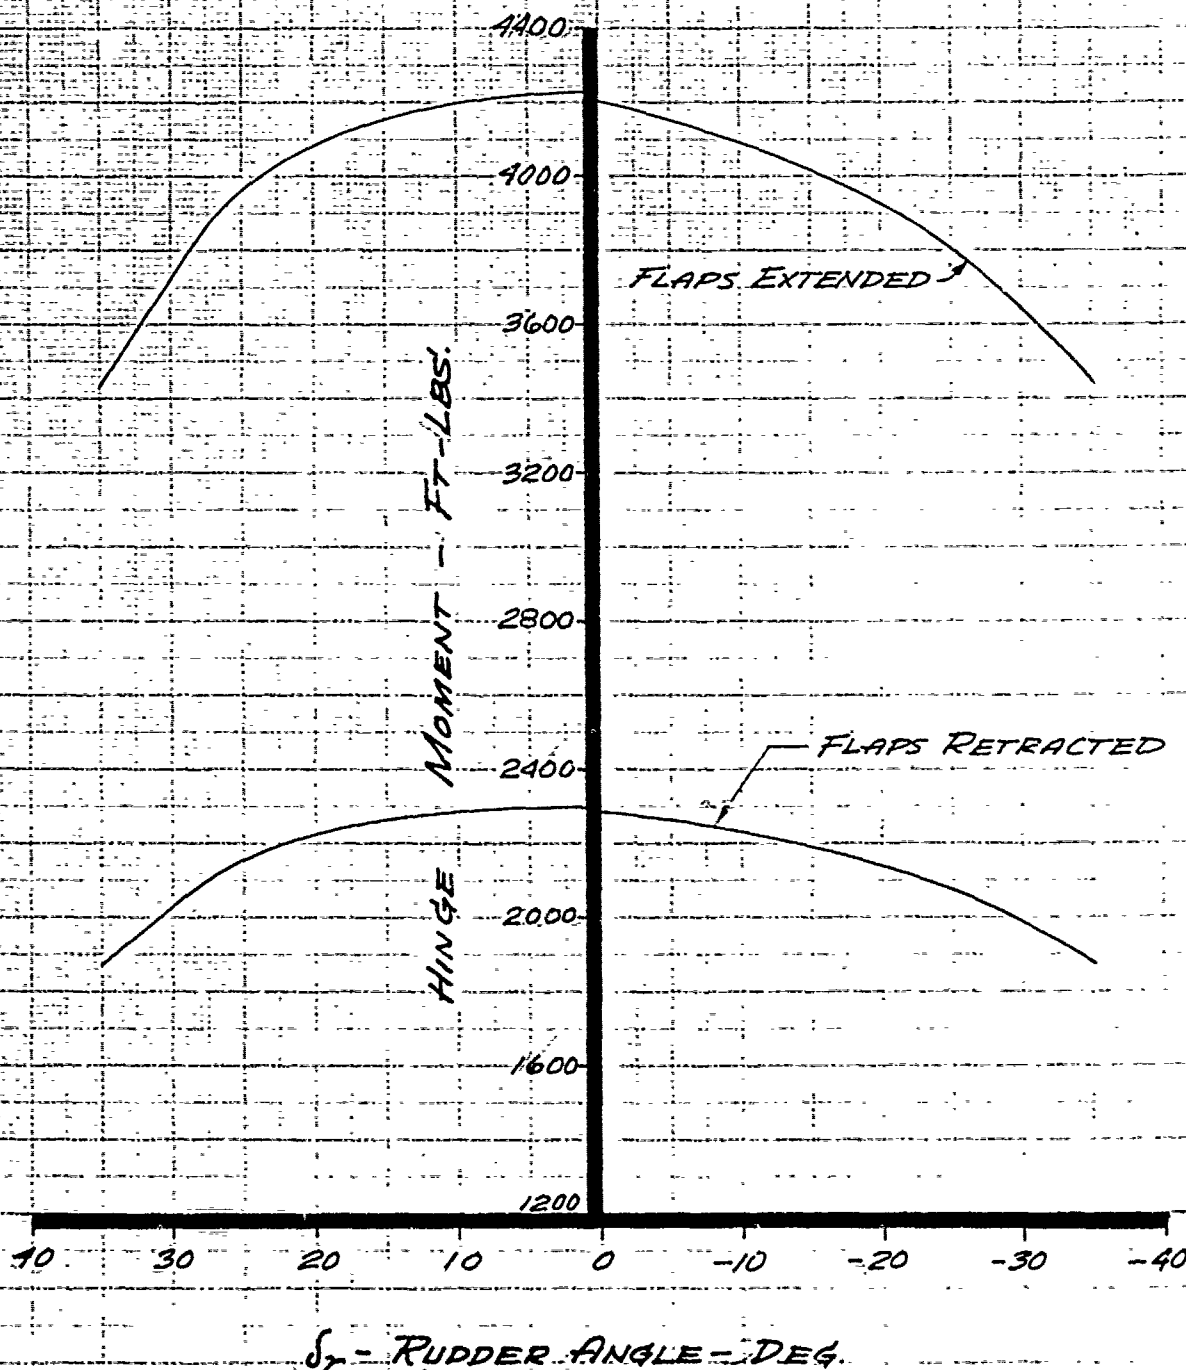

PREPARED BY _____
 DATE _____
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 111
 MODEL C-130
 REPORT NO 9062

LOCKHEED C-130

VARIATION OF PEDAL FORCE WITH RUDDER HINGE MOMENT

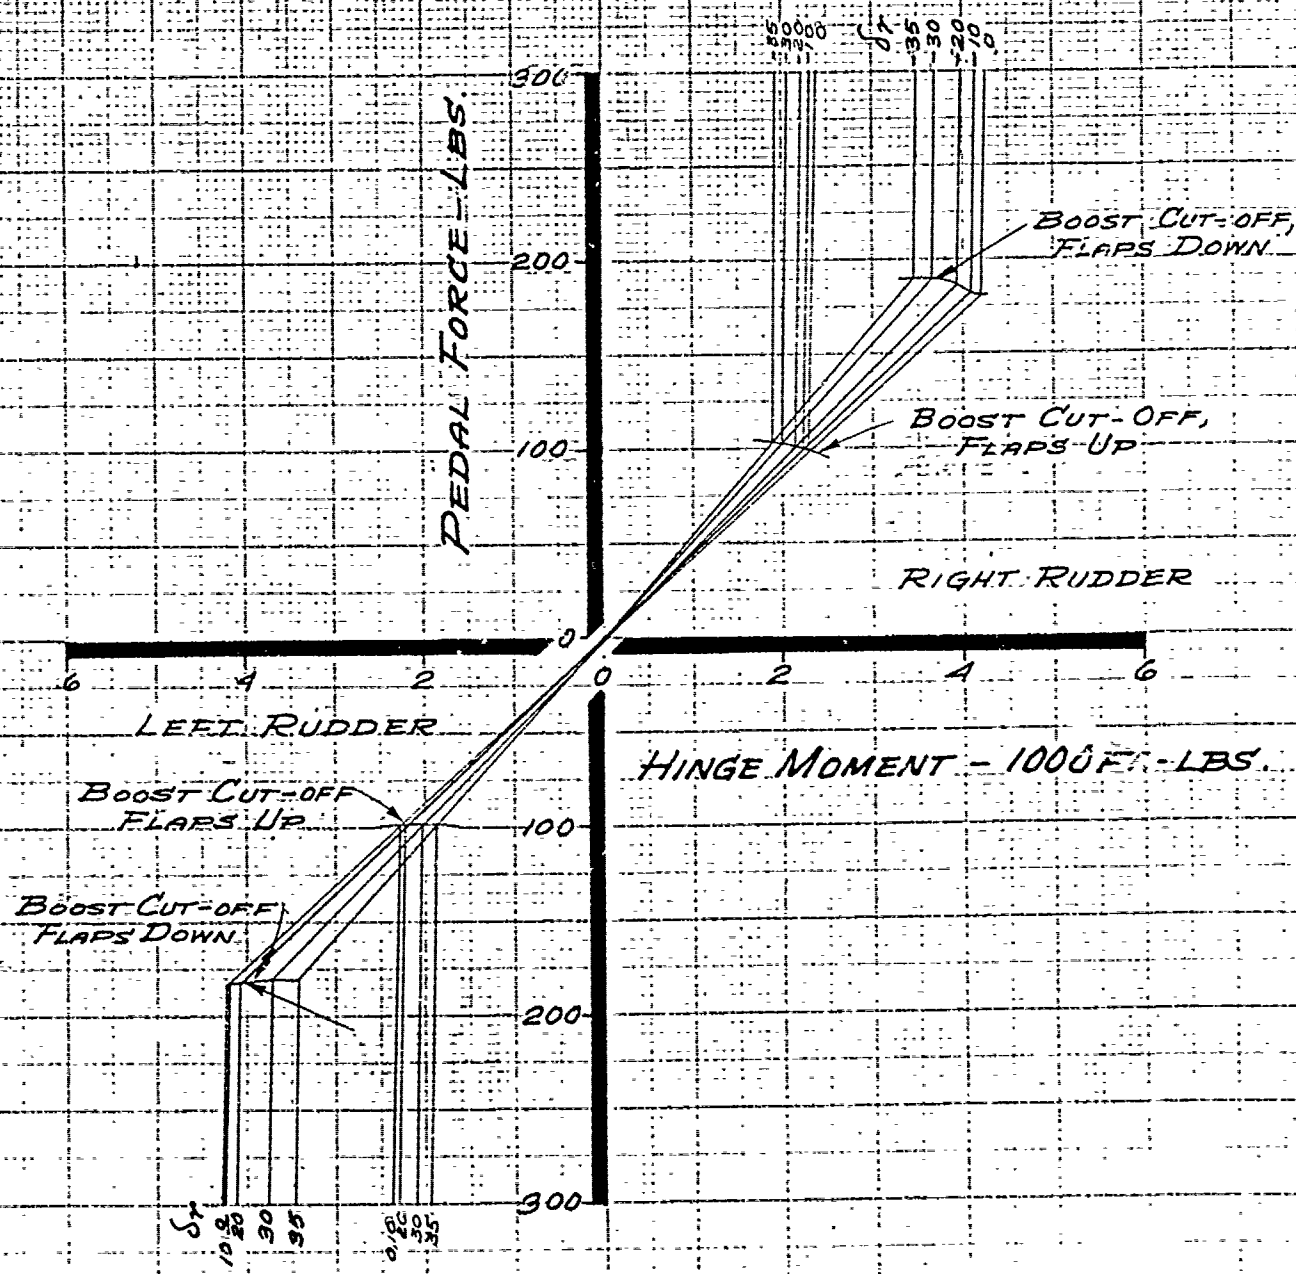


FIG. 84

PREPARED BY R. L. D.
DATE 7-16-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 112
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130
AILERON ANGLE VS. WHEEL POSITION

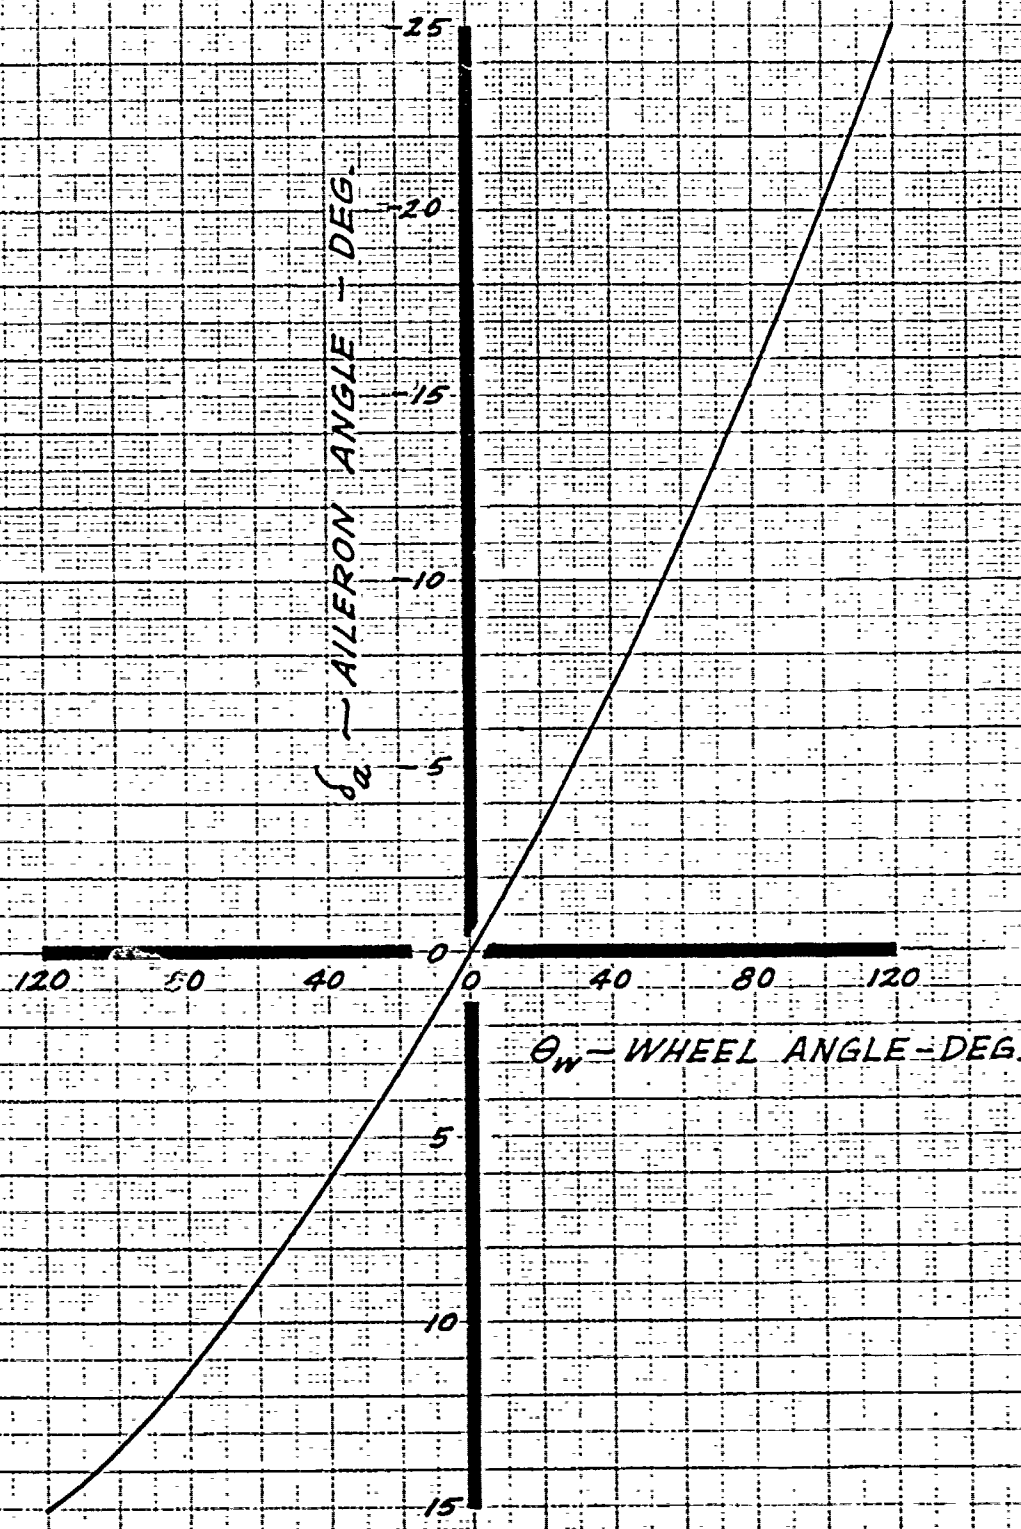


FIG. 85

PREPARED BY _____
 DATE _____
 CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION
 CALIFORNIA DIVISION

PAGE 113
 MODEL C-130
 REPORT NO. 9062

LOCKHEED C-130

AILERON CONTROL SYSTEM

CHARACTERISTICS

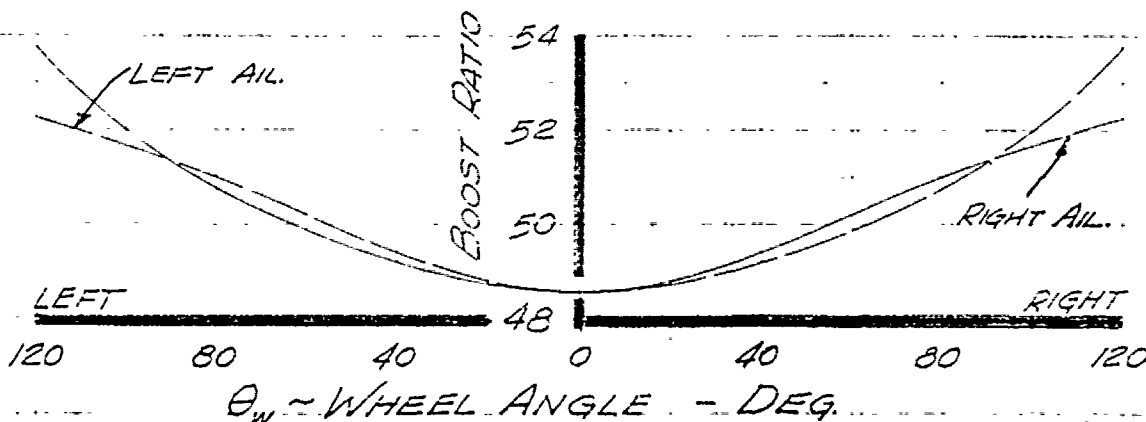
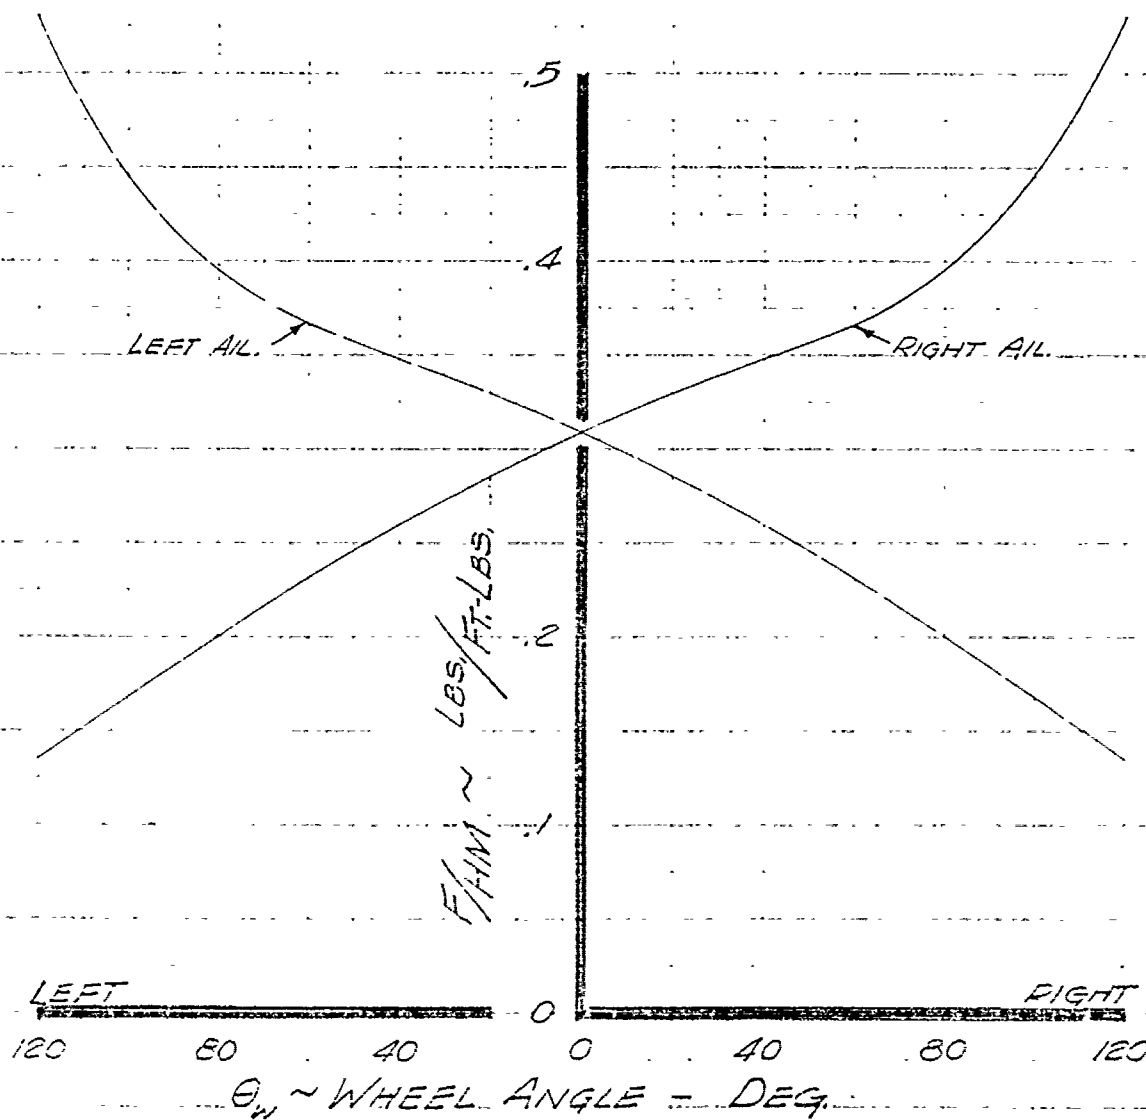


FIG. 86

PREPARED BY _____
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION
CALIFORNIA DIVISION

PAGE 114
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

WHEEL FORCE AT
BOOST CUT-OFF

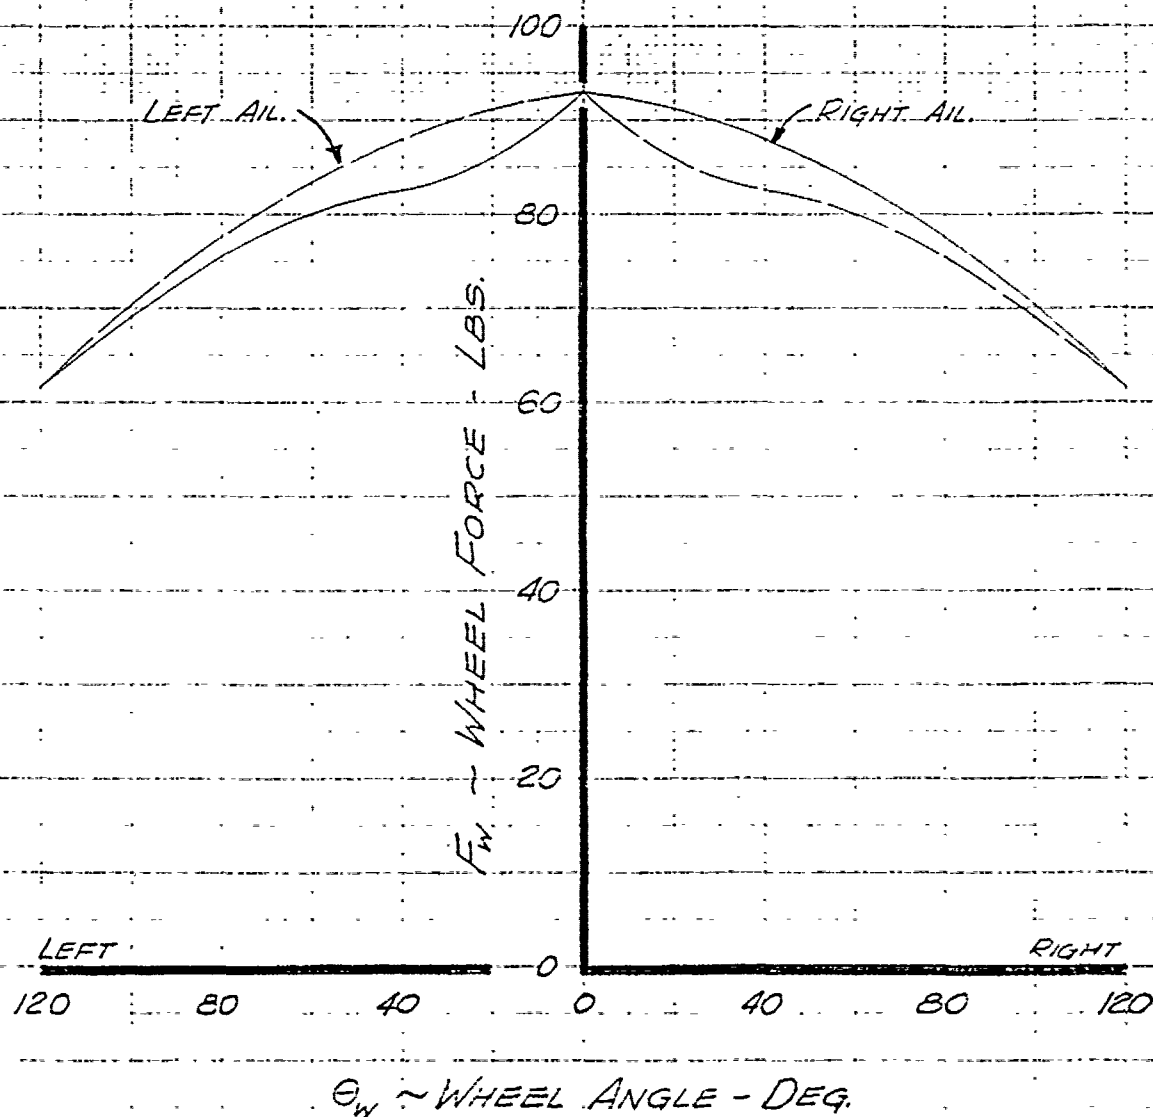


FIG. 87

PREPARED BY R.L.D.
DATE 12-19-52
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 115
MODEL C-130
REPORT NO 9062

LOCKHEED C-130

AILERON HINGE MOMENTS

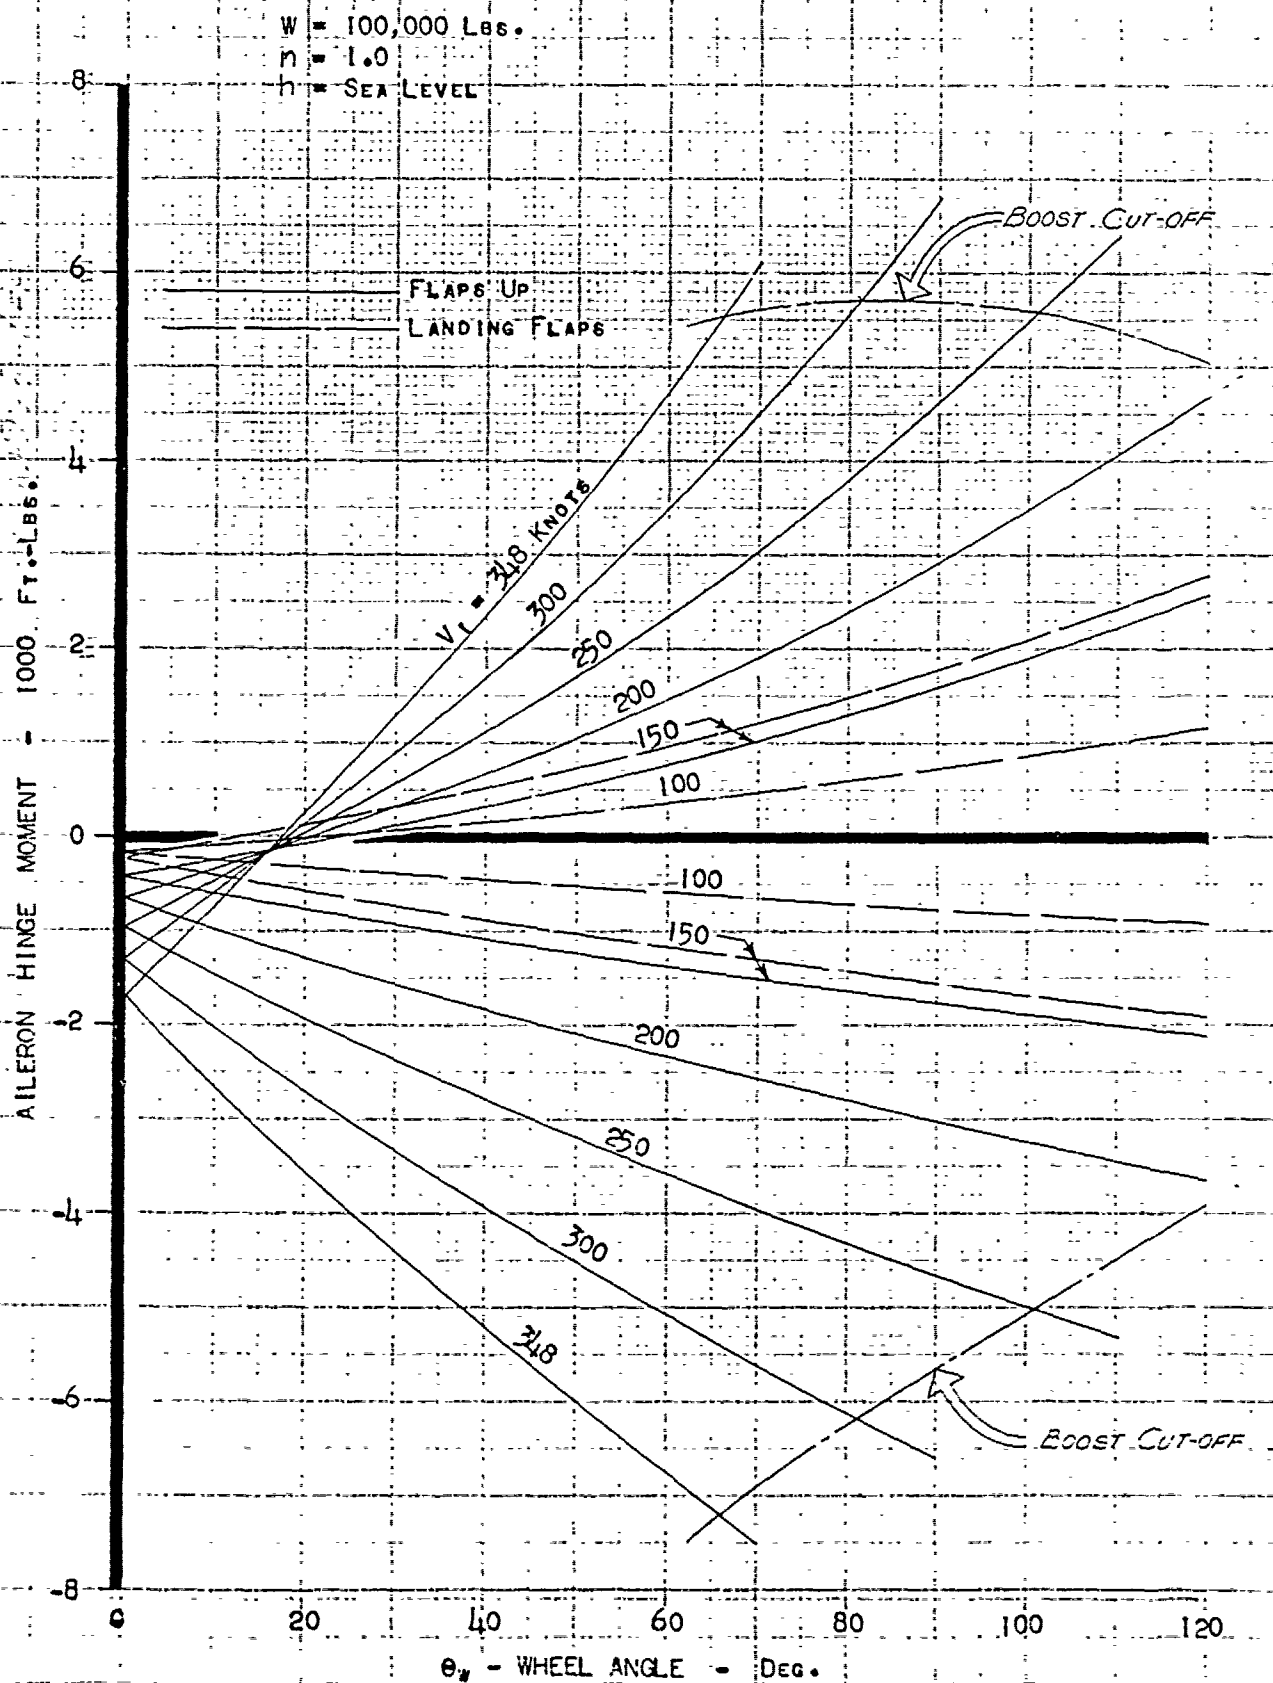


FIG. 88

PREPARED BY _____
DATE _____
CHECKED BY _____


LOCKHEED AIRCRAFT CORPORATION
CALIFORNIA DIVISION

PAGE 116
MODEL C-130
REPORT NO. 9062

LOCKHEED C-130

AILERON WHEEL FORCE VS WHEEL

POSITION AT SEVERAL AIRSPEEDS

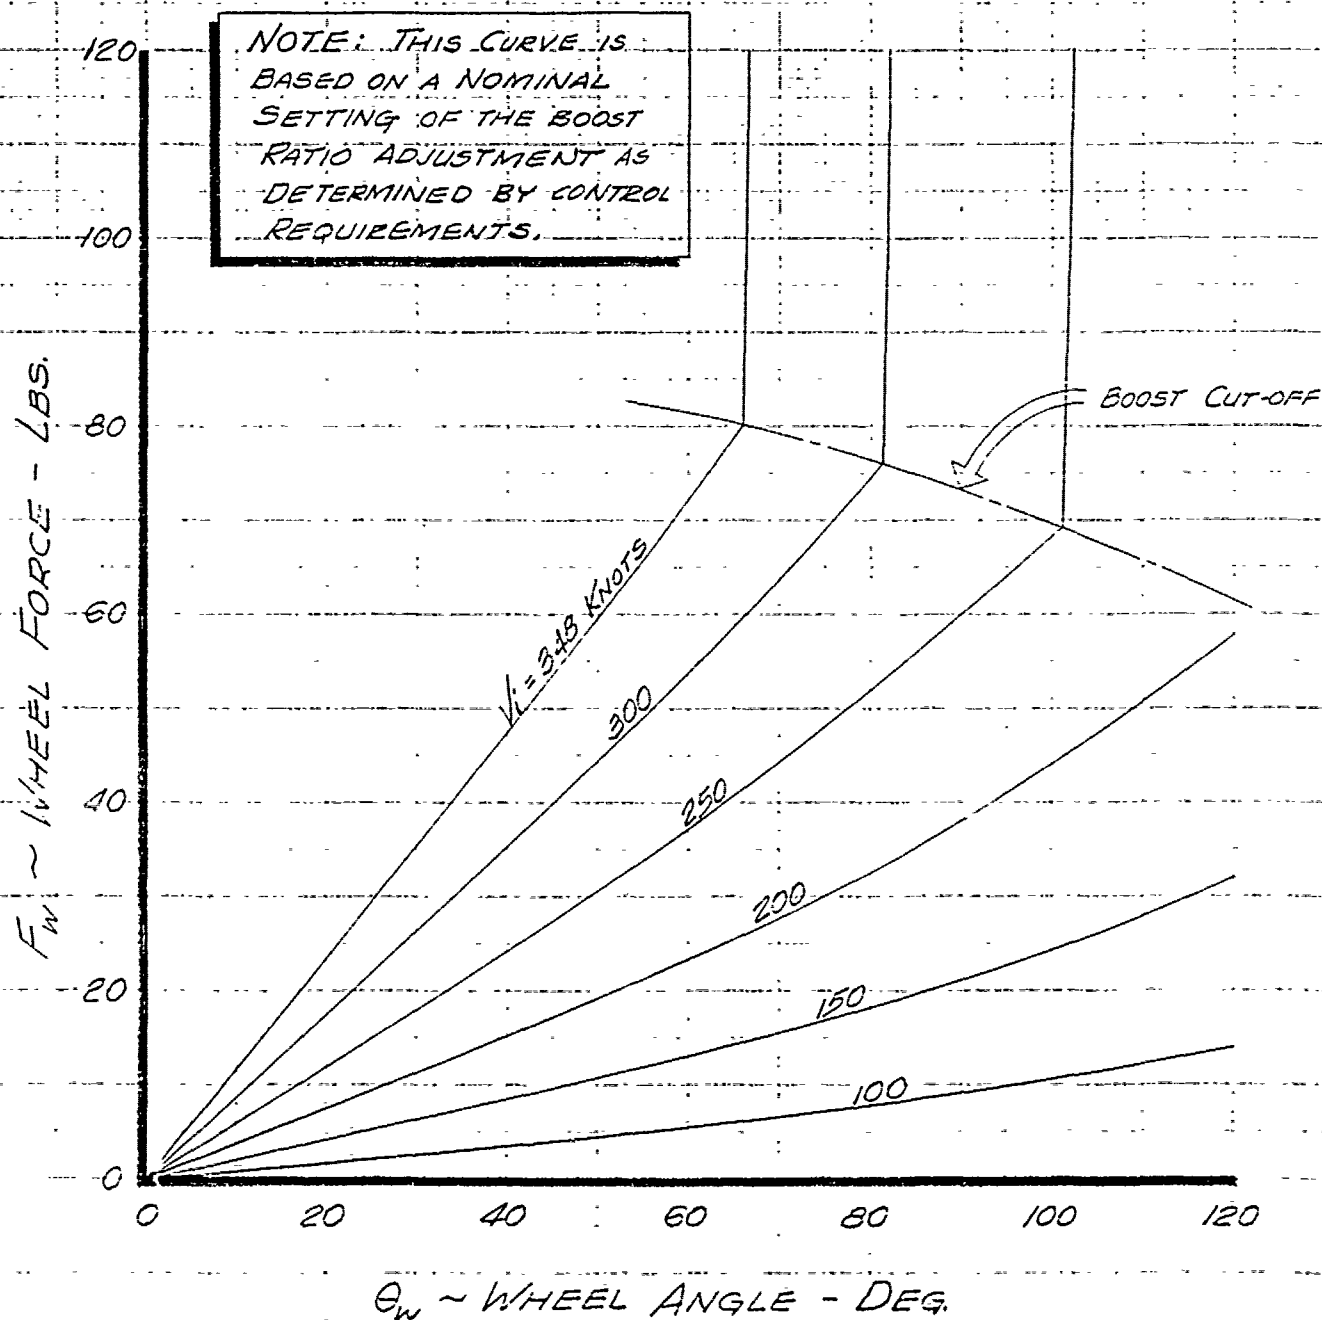

PREPARED BY RLD
DATE _____
CHECKED BY _____

LOCKHEED AIRCRAFT CORPORATION

PAGE 117
MODEL C-130
REPORT NO. 9062

~~LOCKHEED C-120~~
~~LOCKHEED C-130~~

CONTROL SURFACE TAB

HINGE MOMENTS

CONTROL SURFACE TAB

HINGE MOMENTS

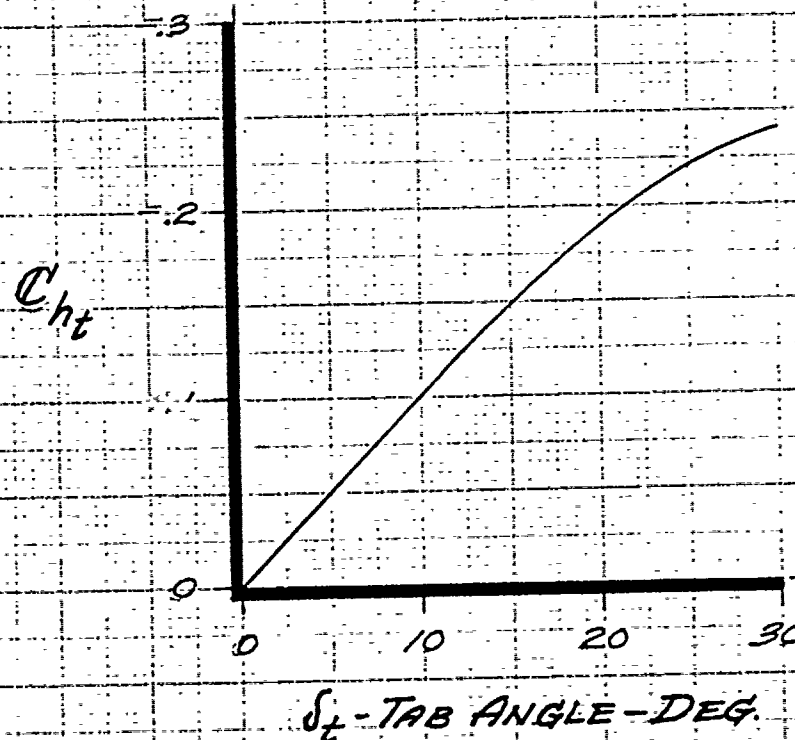


Fig. 90

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

UNCLASSIFIED

REFERENCES

Lockheed Publications

1. LAL 201 - Low Speed Wind Tunnel Tests of a 1/15-Scale Model of the YC-130 Airplane.
2. LAL 205 - High Speed Wind Tunnel Tests of a 1/15-Scale Model of the XC-130 Airplane.
3. LAL 216 - High Speed Wind Tunnel Tests of a 1/15-Scale Model of the O82 Airplane (XC-130):
4. LAL 35 - Wind Tunnel Tests of a 20th Scale Powered Model of the Lockheed C-89 Airplane.
5. LAL 140 - Wind Tunnel Tests of 1/6-Scale XF-90 Model.
6. LR 2576 - Aerodynamic Structural Data Handbook.
7. LR 4710 - Aerodynamic Handbook.

NACA Publications

8. TR 620 - Pressure Distribution over Airfoils with Fowler Flaps, by Carl J. Wenzinger and Walter B. Anderson.
9. TR 824 - Summary of Airfoil Data by Ira H. Abbott, Albert E. Von Doenhoff, and Louis S. Stivers, Jr.
10. TR 868 - Summary of Lateral - Control Research, by Thomas A. Toll.
11. TR 903 - Theoretical and Experimental Data for a Number of 6A-Series Airfoil Sections, by Laurence K. Loftin, Jr.

~~RESTRICTED~~
~~SECURITY INFORMATION~~

Page 119

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

REFERENCES (Continued)

12. TN 419 - Wind Tunnel Tests of the Fowler Variable - Area Wing,
by Fred E. Weick and Robert C. Platt.
13. TN 763 - Wind Tunnel Investigation of Two Airfoils with 25-
Percent-Chord Gwinn and Plain Flaps, by Milton
B. Ames, Jr.
14. TM 1194 - Force and Pressure Distribution Measurements on Eight
Fuselages, by G. Lange.
15. RM L7C05a - Tuft Studies of the Flow Over a Wing at Four Angles of
Sweep, by Gerald Hiesser (Lockheed RM 200).
16. RM A8B11 - Wind Tunnel Investigation of Horizontal Tails.
II - Unswept and 35° Swept-Back Plan Forms of Aspect
Ratio 4.5, by Jules B. Dods, Jr. (Lockheed RM 290).
17. RM A8H30 - Wind Tunnel Investigation of Horizontal Tails.
III - Unswept and 35° Swept-Back Plan Forms of Aspect
Ratio 6, by Jules B. Dods, Jr. (Lockheed RM 401).
18. RM A51C12a- Influence of Airfoil Trailing-Edge Angle and Trailing-
Edge Thickness Variation on the Effectiveness of a
Plain Flap at High Subsonic Mach Numbers, by Albert H.
Hemenover and Donald J. Graham (Lockheed RM 638).
19. RR - Wind Tunnel Investigation of Control-Surface
Characteristics. I - Effect of Gap on the Aerodynamic
Characteristics of an NACA 0009 Airfoil with a 30-
Percent-Chord Plain Flap, by Richard I. Sears (Lockheed
RR 103).

UNCLASSIFIED

LOCKHEED AIRCRAFT CORPORATION

REPORT 9062

UNCLASSIFIED


REFERENCES (Continued)




- 20. RR - Wind Tunnel Investigation of Control-Surface Characteristics - III - A small Aerodynamic Balance of Various Nose Shapes Used with a 30-Percent-Chord Flap on an NACA 0009 Airfoil by Milton B. Ames, Jr. (Lockheed RR 111).
- 21. RR - Wind Tunnel Investigation of Control Surface Characteristics. VI - A 30-Percent-Chord Plain Flap on the NACA 0015 Airfoil by Richard I. Sears and Robert B. Liddell (Lockheed RR 174).
- 22. ARR L4112a-Notes on the Propeller and Slipstream in Relation to Stability, by Herbert S. Ribner (Lockheed RR 455).
- 23. MR - Lift and Drag Tests of Three Airfoil Models with Fowler Flap, by Ira H. Abbott and Harold R. Turner, Jr. (Lockheed CM 153).

MISCELLANEOUS

- 24. University of Washington Aeronautical Laboratory
Report No. 153, Wind Tunnel Tests of a 1/4 Scale Model of the Lockheed XP-58 Airplane Boom.
- 25. ANC-1(2) - Chordwise Air-Load Distribution.

UNCLASSIFIED

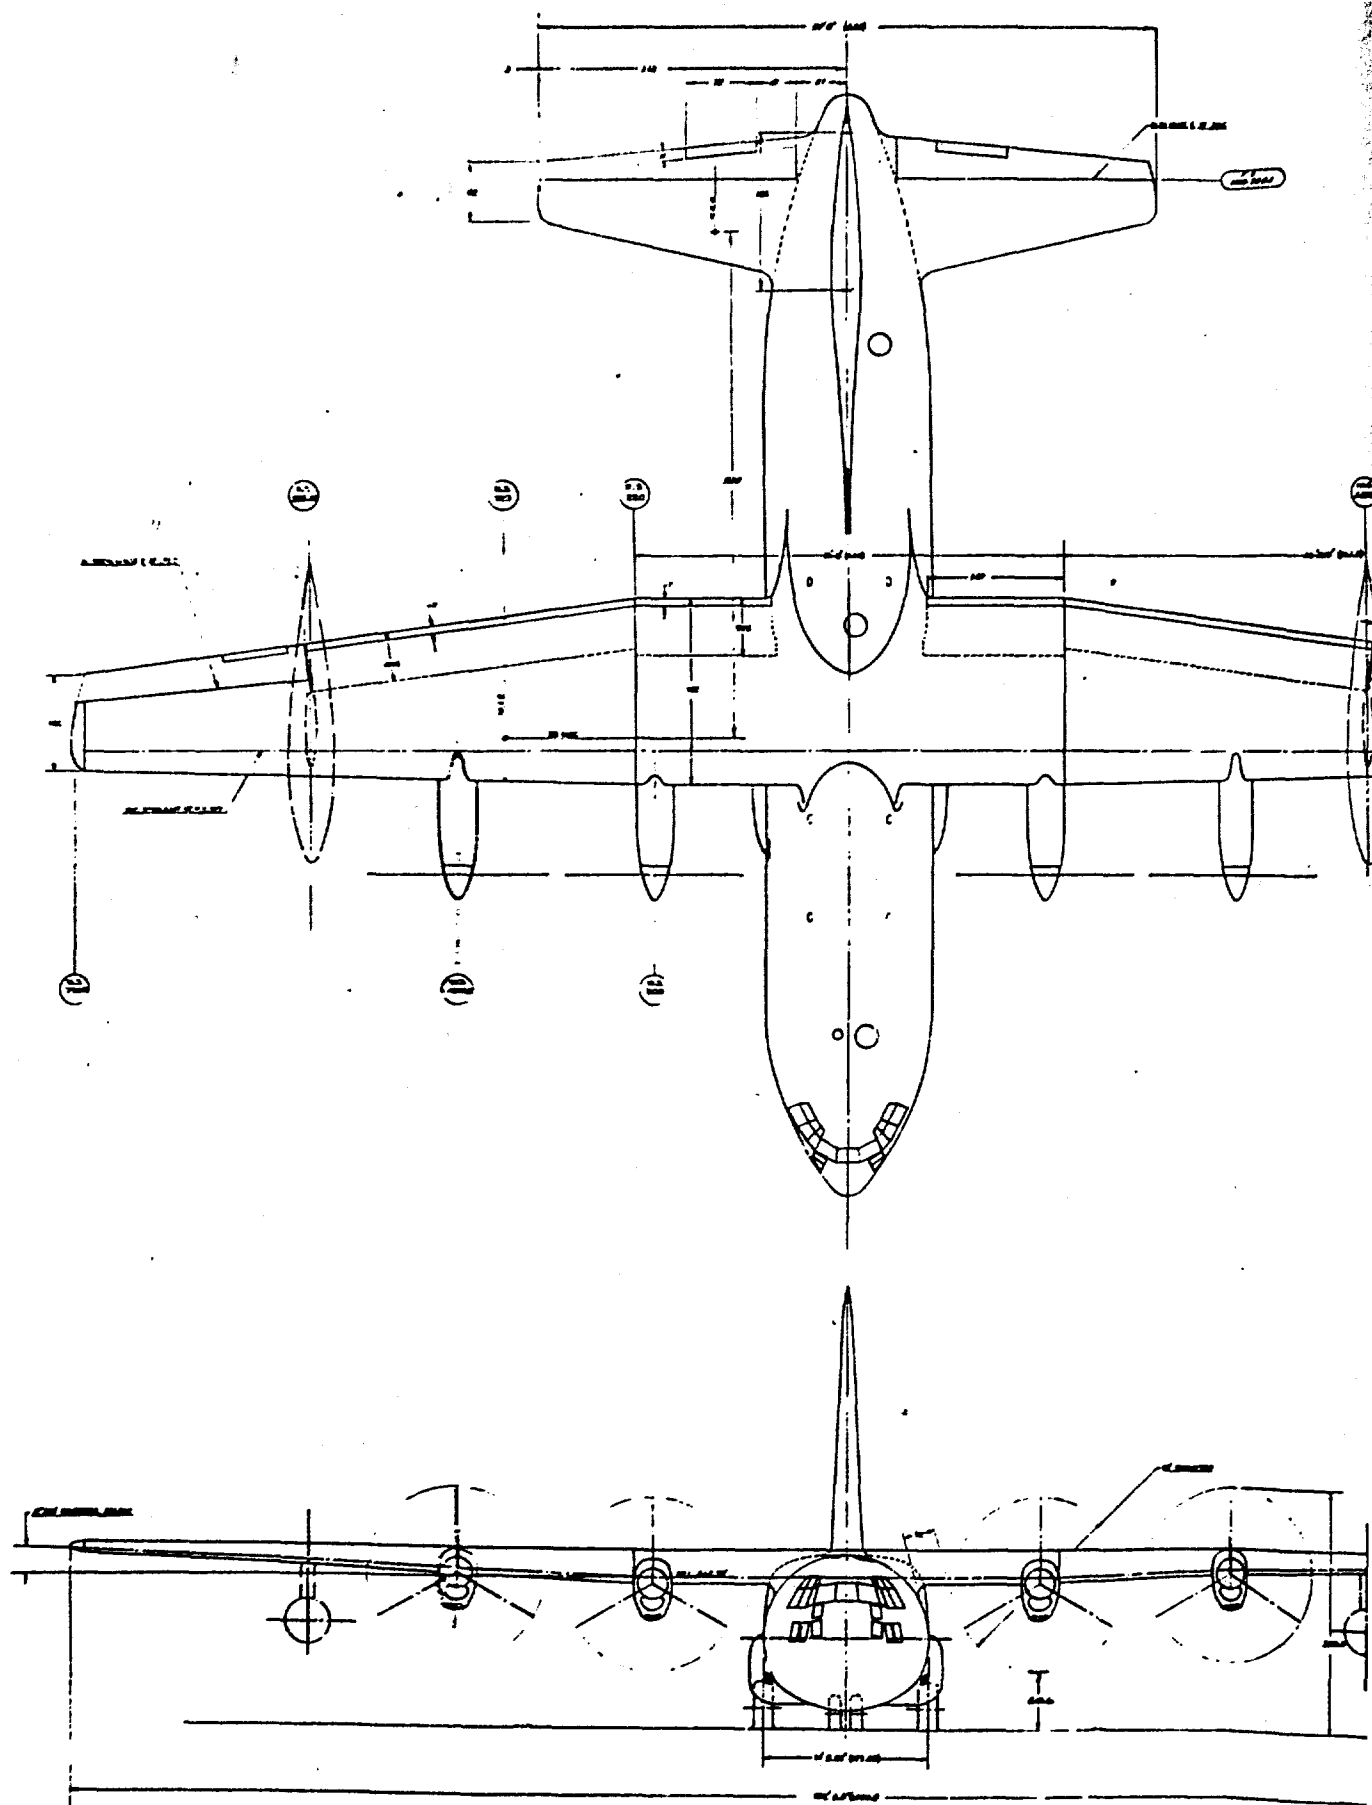

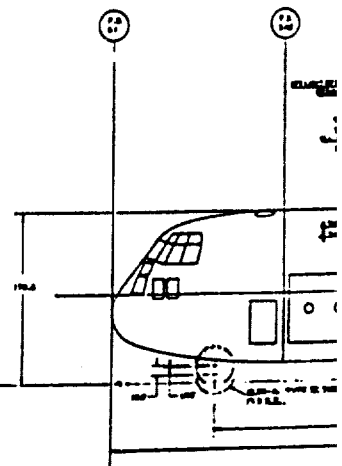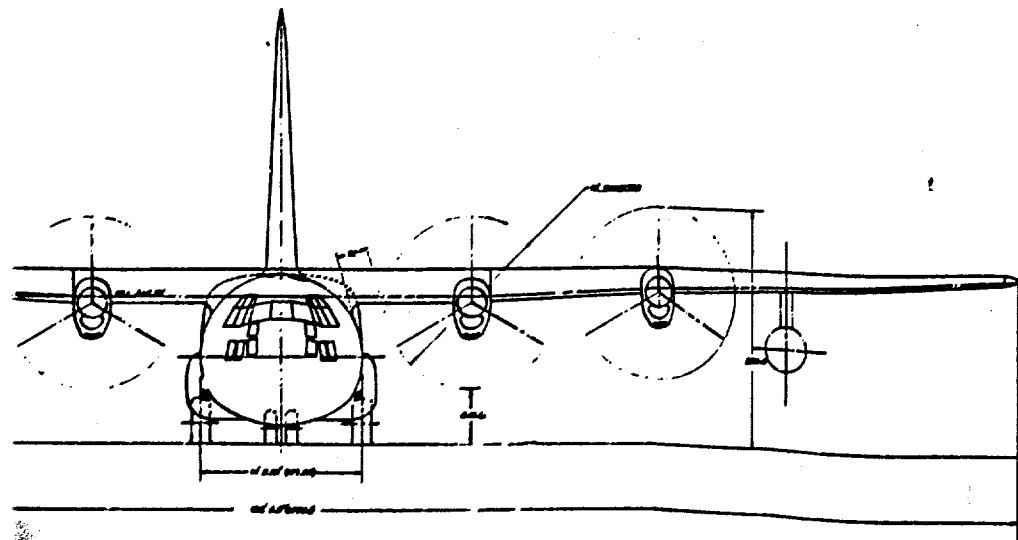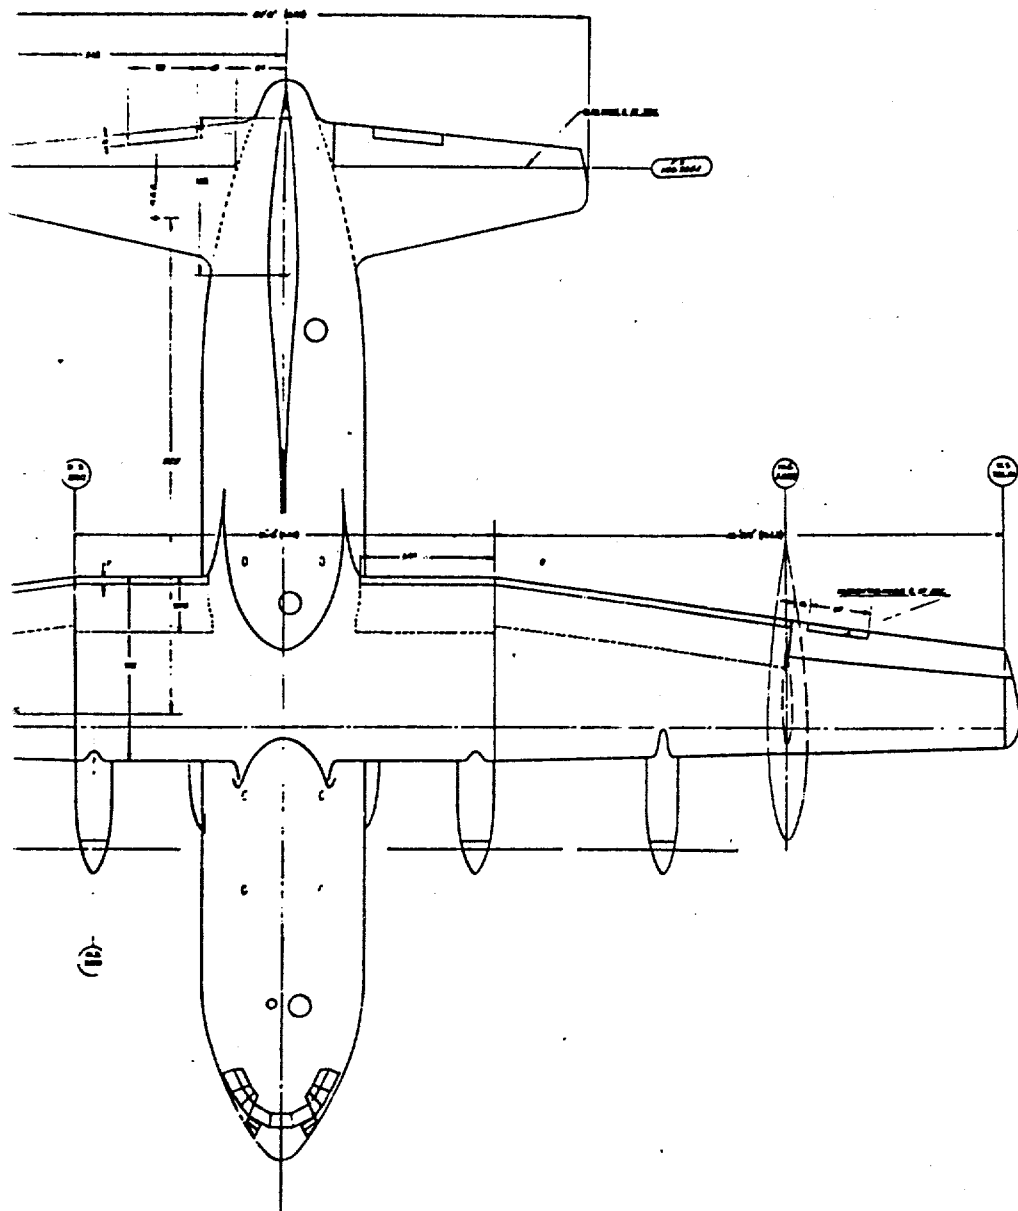

WHEEL SECTION AND VIEW
WHEEL HUB SECTION
WHEEL HUB TIP
WHEEL HUB
WHEEL SECTION
WHEEL SECTION
WHEEL SECTION


TOTAL SURFACE AREA AND WALL MOUNTMENTS	
ROSE HEDS	1746.50 FT. SURFACE MOUNT 100%
ROSE HEDS	102.50 FT. - 10% - 10%
CLUSTER TAKES	56.50 FT. - 10% - 10%
FLARE HEDS	362.50 FT. - 50%
HORIZONTAL TAIL	894.50 FT.
FLARE HEDS	486.50 FT. - 10% - 10%
FLARE HEDS	486.50 FT.
FLARE HEDS	301.50 FT.
FLARE HEDS	75.50 FT. - 10% - 10%
FLARE HEDS	30.50 FT. - 10% - 10%

LOC
+ LOCATES DOWN MOVEMENT
- LOCATES UP MOVEMENT

WEIGHT DATA

<u>QUARTER WEIGHT PARTY</u>	<u>61,875 LBS.</u>
<u>QUARTER WEIGHT LONG</u>	<u>49,043 LBS.</u>
<u>RESEAL WEIGHT PARTY</u>	<u>119,299 LBS.</u>

ALLISON TRUCKS, INC. TRUCKS
(TYPE J17 OR F70-4-8
ALLISON MODELS NO 300-02)

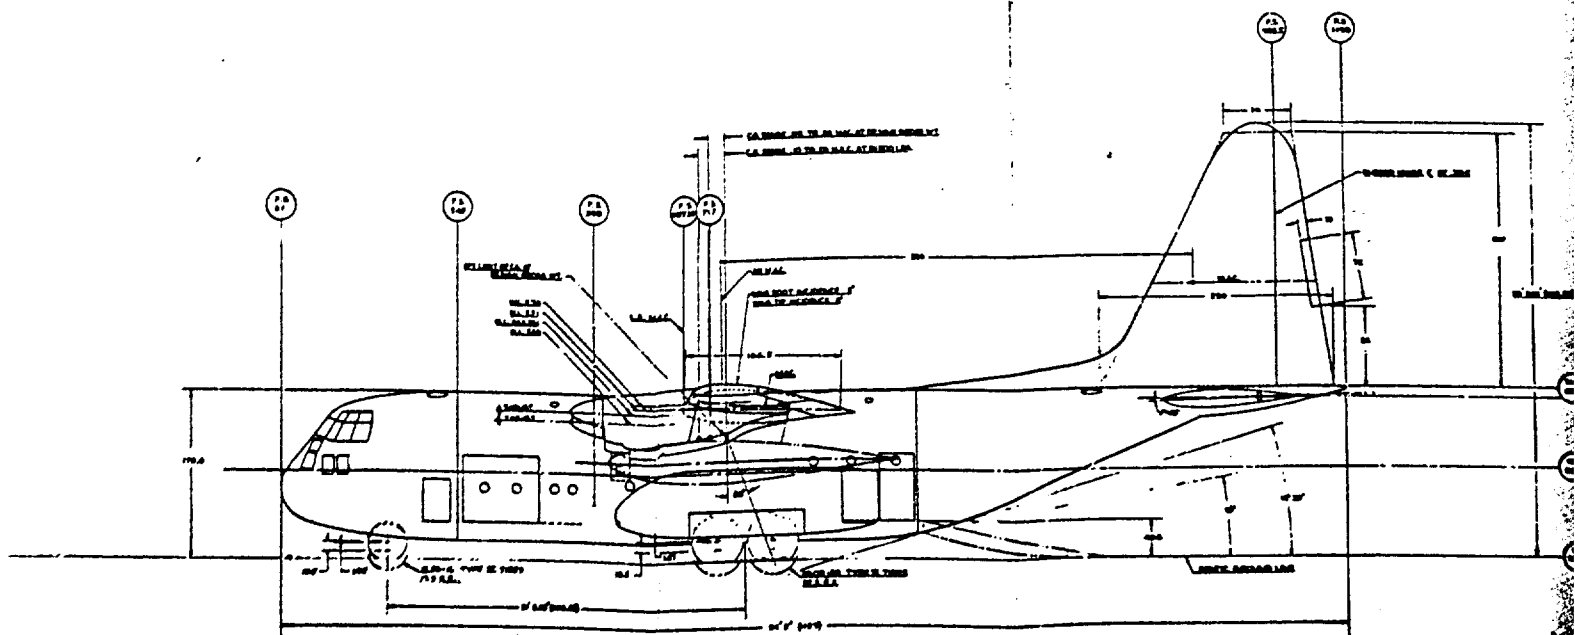

LR 9062

FIG. 1


SECTION AND DATA
 SECTION NAME: 1000
 SECTION TYPE: 1000
 SECTION NO.: 1000
 SECTION DATE: 1000
 SECTION BY: 1000

SECTION DATA AND MEASUREMENTS
 SECTION NAME: 1000
 SECTION TYPE: 1000
 SECTION NO.: 1000
 SECTION DATE: 1000
 SECTION BY: 1000
 SECTION MEASUREMENTS: 1000
 SECTION DATA: 1000
 SECTION TYPE: 1000
 SECTION NO.: 1000
 SECTION DATE: 1000
 SECTION BY: 1000

SECTION DATA AND MEASUREMENTS
 SECTION NAME: 1000
 SECTION TYPE: 1000
 SECTION NO.: 1000
 SECTION DATE: 1000
 SECTION BY: 1000

SECTION DATA AND MEASUREMENTS
 SECTION NAME: 1000
 SECTION TYPE: 1000
 SECTION NO.: 1000
 SECTION DATE: 1000
 SECTION BY: 1000

SECTION DATA AND MEASUREMENTS
 SECTION NAME: 1000
 SECTION TYPE: 1000
 SECTION NO.: 1000
 SECTION DATE: 1000
 SECTION BY: 1000

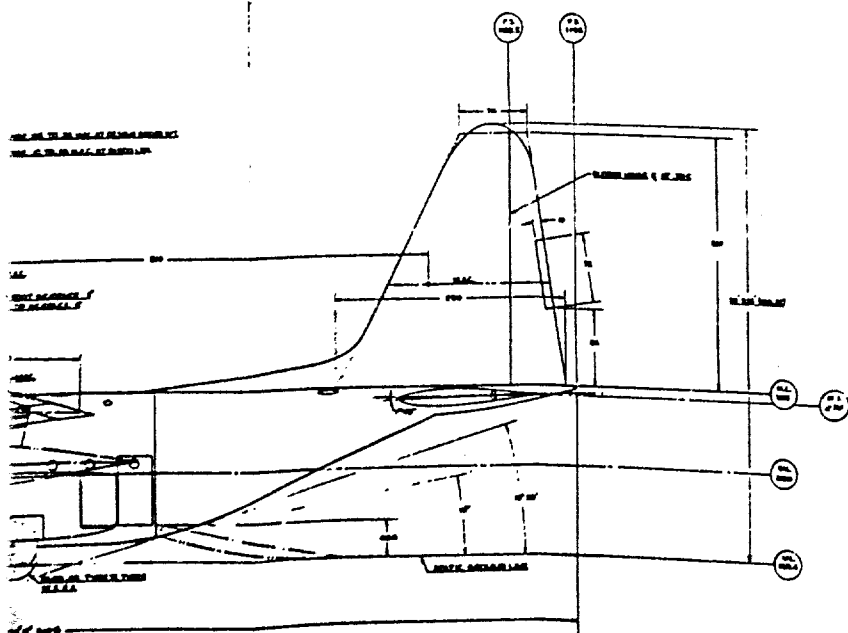

SECTION NAME: 1000
 SECTION TYPE: 1000
 SECTION NO.: 1000
 SECTION DATE: 1000
 SECTION BY: 1000

SECTION NAME: 1000
 SECTION TYPE: 1000
 SECTION NO.: 1000
 SECTION DATE: 1000
 SECTION BY: 1000

SECTION NAME: 1000
 SECTION TYPE: 1000
 SECTION NO.: 1000
 SECTION DATE: 1000
 SECTION BY: 1000

337000