

DTIC FILE COPY

1

AD-A955 384

ANTENNA DEVELOPMENT

FOR
OH-58A HELICOPTER
FINAL REPORT

206-099-212B



This document has been approved
for public release and may be
distributed in unlimited quantities.

DTIC
ELECTE
S 24 FEB 1989 D
*E



BELL
HELICOPTER COMPANY

HEADQUARTERS OFFICE BOX 482 • FORT WORTH, TEXAS 76101 A GATSON COMPANY

**Best
Available
Copy**

206-099-2128

ANTENNA DEVELOPMENT
FOR
OH-58A HELICOPTER (U)



Final Report

July 1969

By

J. G. Mast

R. C. Henschel

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	<i>per</i>
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

UNANNOUNCED

Prepared Under Contract DAAJ01-68-1699

For

U. S. Army Aviation Material Command
Department of The Army

By

BELL HELICOPTER COMPANY

Fort Worth, Texas 76101

A Division of Bell Aerospace Corporation

89 2 24 045

BY <u>J. Mast</u>	BELL HELICOPTER COMPANY POST OFFICE BOX 482 • FORT WORTH 1, TEXAS	MODEL <u>OH-58A</u> PAGE <u>i</u>
CHECKED <u>R. Henschel</u>		RPT <u>206-099-212B</u>

TABLE OF CONTENTS

<u>Paragraph</u>		<u>Page</u>
	PART I	
1.0	Purpose	2
2.0	General Factual Data	3
3.0	Detail Factual Data	14
4.0	Weight Control Data	17
5.0	Conclusions	18
	PART II	
6.0	Recommendations	20
	PART III	
	Data Sheets	22

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 2

CHECKED R. Henschel

RPT. 206-099-212B

1.0 PURPOSE

The objective of the task described in this report was to design, develop, and manufacture an antenna system for use with the Standard Lightweight Avionics Equipment (SLAE) on OH-58A helicopters. This final report is submitted pursuant to paragraph 3.3.6.4 of MIL-A-7772B and paragraph 3.1.15 of Bell Helicopter Detail Specification 206-947-031, Appendix VI.

The antenna system consists of the following functionally independent components:

- a. A communications antenna for use with the Number One AN/ARC-114 VHF/FM transceiver over the frequency range of 30 to 75.95 megahertz. BHC P/N 206-075-518.
- b. A communications antenna for use with the Number Two AN/ARC-114 transceiver over the frequency range of 30 to 75.95 megahertz. AS-2485/ARC-114, BHC P/N 206-075-543.
- c. A communications antenna for use with the AN/ARC-115 VHF/AM transceiver over the frequency range of 116 to 149.975 megahertz. BHC P/N 206-075-518.
- d. A communications antenna for use with the AN/ARC-116 UHF/AM transceiver over the frequency range of 225 to 399.95 megahertz. AS-2487/ARC-116, BHC P/N 206-075-551.
- e. A homing antenna for use with the AN/ARC-114 VHF/FM radio. AS-2486/ARC-114, BHC P/N 206-075-523.

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 3

CHECKED R. Henschel

RPT 206-099-212B

2.0 GENERAL FACTUAL DATA

2.1 Summary

During the period covered by this report extensive testing of the antenna system described in BHC Reports 206-099-212 and 206-099-212A was accomplished. The results of this testing serve to confirm that the design of the antenna system will provide the OH-58A helicopter with clear and reliable communications and FM Homing.

In the course of this testing it was noted that severe tail rotor modulation of received and transmitted UHF signals was taking place. Therefore, the UHF element has been deleted from the vertical stabilizer antenna assembly and has been replaced by a lightweight blade type antenna mounted under the nose of the helicopter. Figure 1, page 4 illustrates the final location of all antennas, and photographs of the individual antennas may be found in Figures 2 thru 5, pages 5 thru 8.


Moving the UHF antenna to this forward location has the farther desirable effect of reducing the required transmission line run by a considerable amount, thus reducing line loss by approximately 2.5 db.

It was also determined during flight testing that the FM Homing system exhibited excessive sensitivity to the roll attitude of the aircraft. A slight modification to the tip loading of the FM Homing dipoles resulted in completely successful homing throughout the 30 to 76 MHz band.

BY J. Mast
CHECKED R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 4
RPT. 206-099-212B

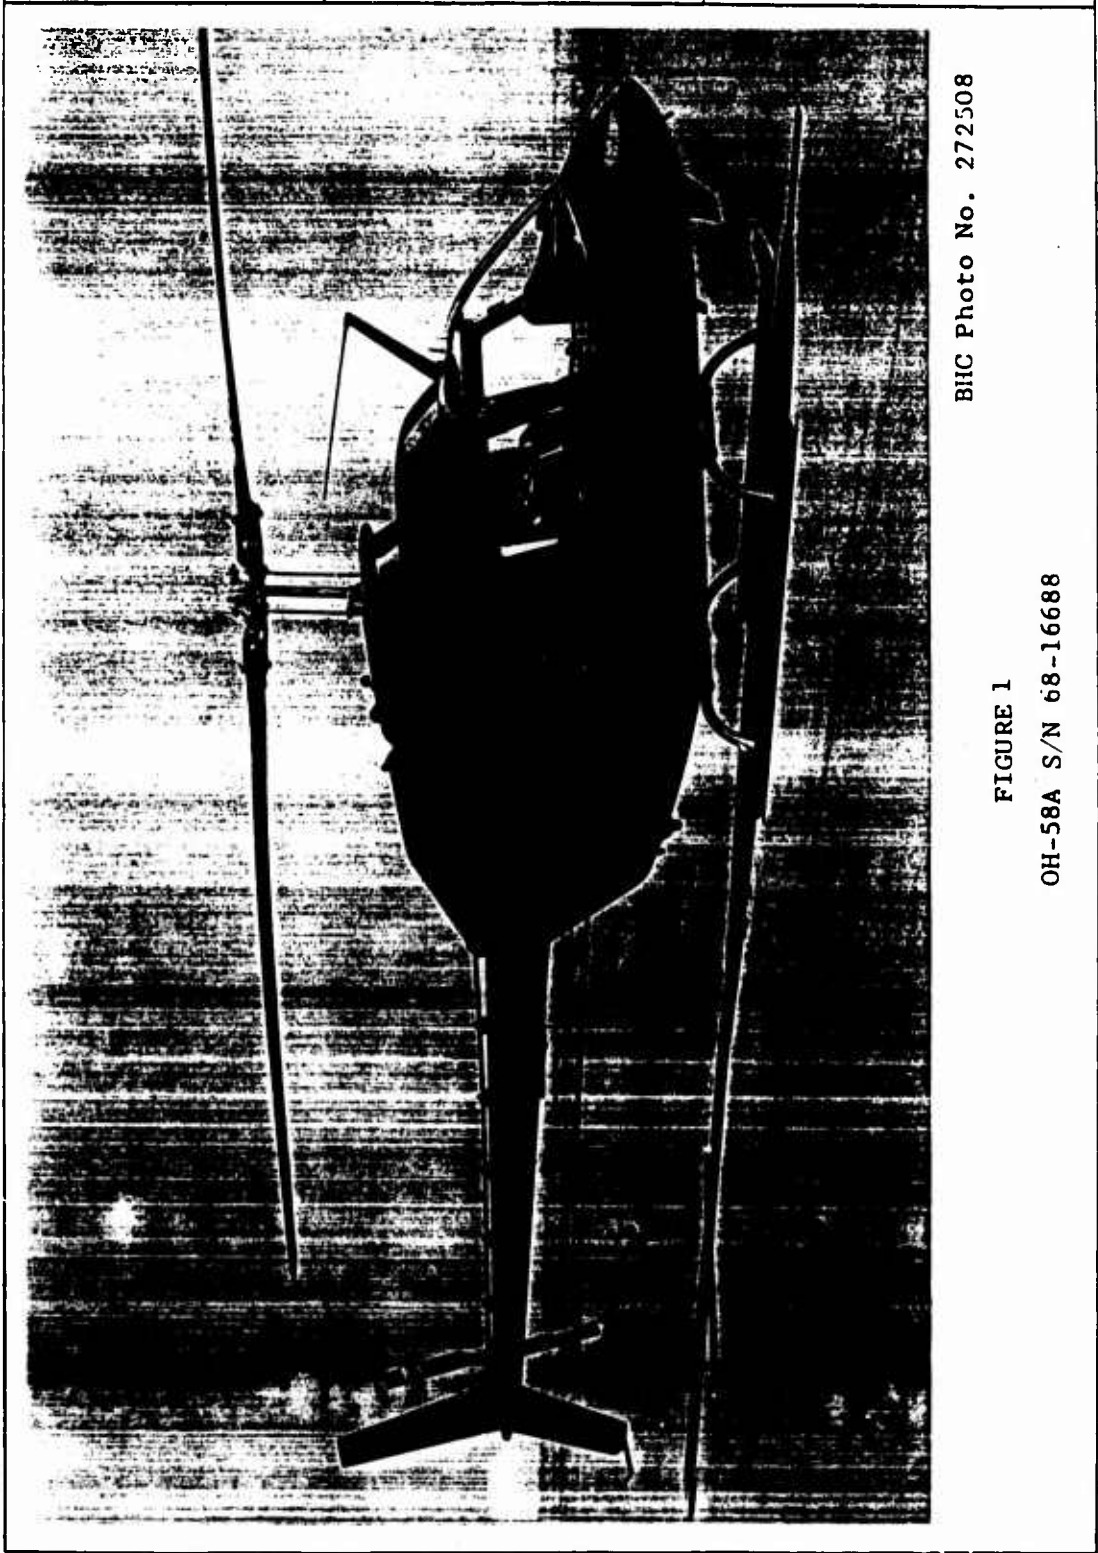

BHC Photo No. 272508

FIGURE 1

OH-58A S/N 68-16688

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 5

CHECKED R. Henschel

RPT 206-099-212B



BHC Photo No. 004985

FIGURE 2

NUMBER ONE VHF/FM AND VHF/AM COMMUNICATION ANTENNA
BHC P/N 206-075-518

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 482 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 6

CHECKED R. Henschel

RPT 206-099-212B



BHC Photo No. 004980

FIGURE 3

NUMBER TWO VHF/FM COMMUNICATION ANTENNA
AS-2485/ARC-114 BHC P/N 206-075-543

BY J. Mast

CHECKED R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 FORT WORTH, TEXAS

MODEL OH-58A PAGE 7

RPT 206-099-212B



BHC Photo No. 004973

FIGURE 4
UHF/AM COMMUNICATION ANTENNA
AS-2487/ARC-116 BHC P/N 206-075-551


BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 8

CHECKED R. Henschel

RPT 206-099-212B

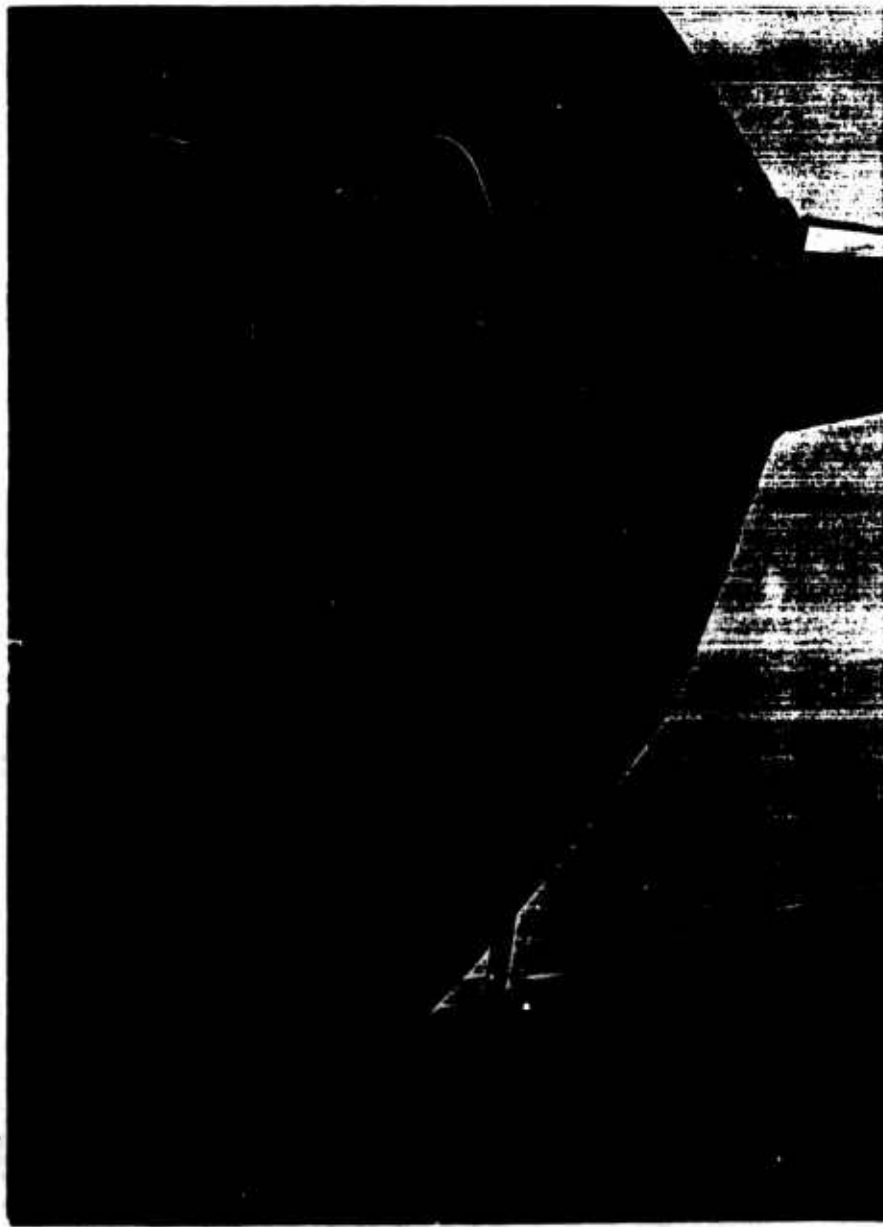

BHC Photo No. 004979

FIGURE 5

VHF/FM HOMING ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-523

BY J. Mast
CHECKED R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 9
RPT. 206-099-212B

2.1 Summary (Continued)

FM retransmission tests performed confirm that isolation between the numbers one and two FM communication antennas is sufficient to permit successful two-way retransmission between two ground stations separated by 80 miles.

2.2 Formula

Measured antenna pattern field strengths were corrected to free space values by the methods given by Bailey in TV & OTHER RECEIVING ANTENNAS, Chapter 5, pp. 214-220. Correction factors thus developed for the test frequencies used are given in Table I, page 10.

SAMPLE CALCULATION:

$$\frac{h}{h + h_0} = \frac{h}{1320 \frac{D^2 984}{h_1 F} + \frac{D^2}{2}}$$

h = ground antenna height above terrain = 10 ft

h_1 = aircraft altitude above terrain = 1000 ft

h_0 = height of ground antenna first pattern maximum above terrain at aircraft location.

D = distance between aircraft and ground station = 18 mi.

F = frequency = 30.5 MHz

$$\frac{h}{h + h_0} = .01095$$

Referring to Figure 6, page 11

(from Bailey, P. 218)

Free Space Correction = 41 db

BY J. MastBELL HELICOPTER COMPANY
POST OFFICE BOX 482 • FORT WORTH, TEXASMODEL OH-58A PAGE 10CHECKED R. HenschelRPT 206-099-212B

TABLE I

PROPAGATION CORRECTIONS

<u>FREQUENCY MHz</u>	<u>CORRECTION FACTOR db</u>
30.50	41.0
40.10	37.0
46.65	35.0
49.80	34.5
54.50	33.5
57.80	33.0
60.00	32.5
65.95	32.0
72.05	31.0
75.60	30.5
126.45	26.00
128.65	25.95
132.60	25.90
134.65	25.85
138.05	25.80
141.45	25.75
143.85	25.70
148.00	25.65
148.80	25.60
149.90	25.55
225.3	23.5
242.5	23.4
265.5	23.3
278.5	23.2
299.9	23.1
321.5	23.0
356.5	22.9
374.4	22.8
386.6	22.7
399.8	22.6

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 11

CHECKED R. Henschel

RPT. 206-099-212B

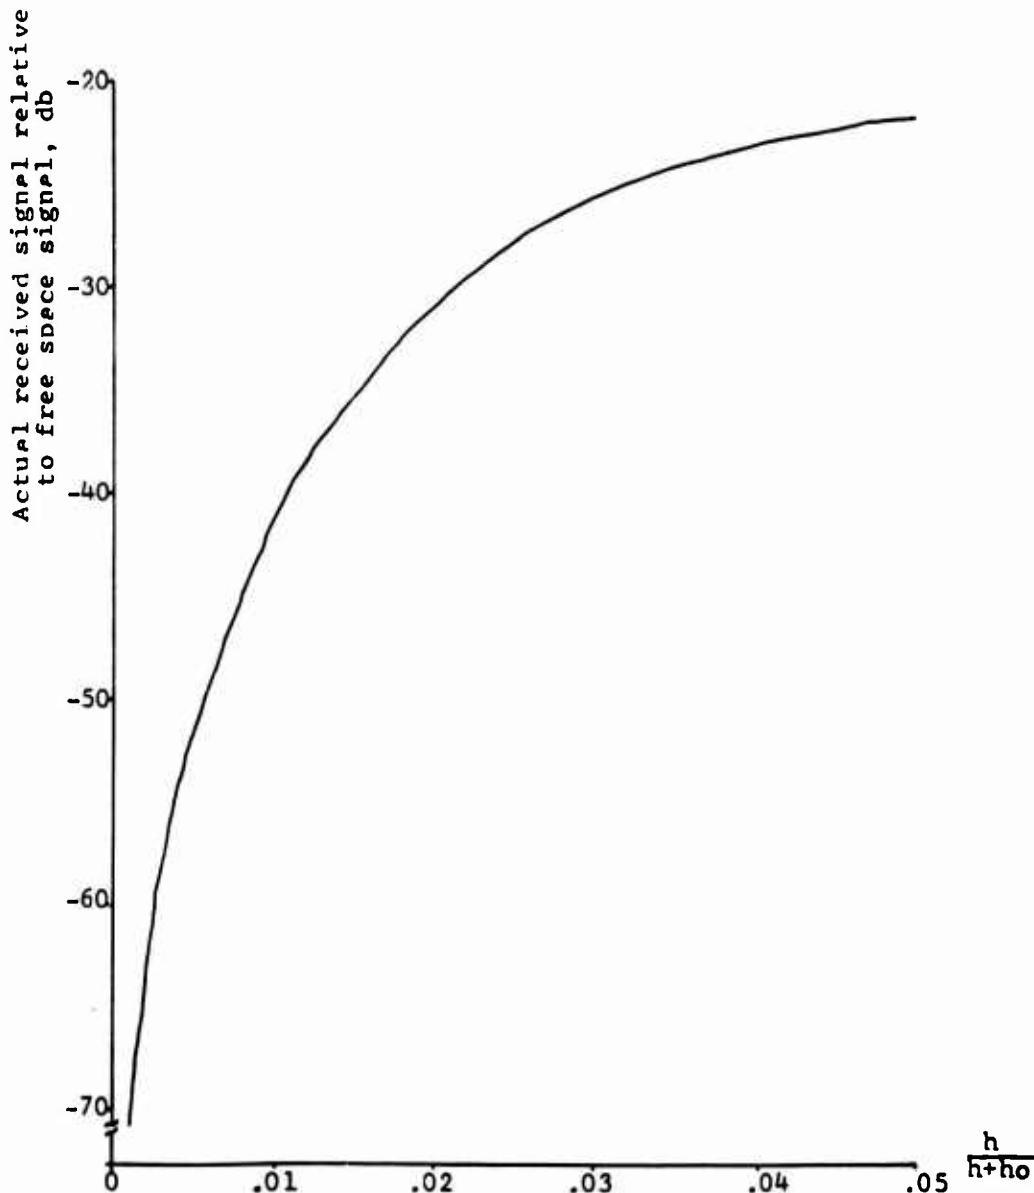


FIGURE 6

ACTUAL RECEIVED FIELD STRENGTH RELATIVE TO FREE
SPACE FIELD VS RECEIVING ANTENNA HEIGHT FACTOR

(Redrawn from Bailey, P. 218)

BY <u>J. Mast</u>	BELL HELICOPTER COMPANY POST OFFICE BOX 402 • FORT WORTH, TEXAS	MODEL <u>OH-58A</u> PAGE <u>12</u>
CHECKED <u>R. Henschel</u>		RPT. <u>206-099-212B</u>

2.3 Measurement Procedures

FM Homing antenna patterns were measured using the methods described in BHC Report No. 206-099-212, page 5. The radiation pattern of all other antennas described in this report were measured in flight using the method shown in the block diagram of Figure 7, page 13.

VSWR of the FM Homing Antennas were measured using a Hewlett-Packard Model 4815A RF Vector Impedance Meter. VSWR of the other antennas was measured with a Bird Model 4311 Directional Wattmeter.

2.4 Applicable Documents

206-947-031 R-4	Detail Specification for Model 206A (MOD) Light Observation Helicopter	11 March 69
MIL-A-7772B	Antenna Systems, Airborne; General Specification for the Design, Location, and Installation of	27 June 56
EL-CP1000- 0007A(1)	FM Communications Antenna for LOH	26 Oct 67
EL-CP1000- 0008A(1)	FM Homing Antenna for LOH	26 Oct 67
EL-CP1000- 0009A(1)	VHF Antenna for LOH	26 Oct 67
EL-CP1000- 0010A(1)	UHF Antenna for LOH	26 Oct 67
MIL-E-5400J	Electronic Equipment, Aircraft, General Specification for	7 Dec 66

TV and Other Receiving Antennas
by Arnold B. Bailey,
John F. Rider, Publisher

BY J. Mast

CHECKED R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 487 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 13

RPT 206-099-212B

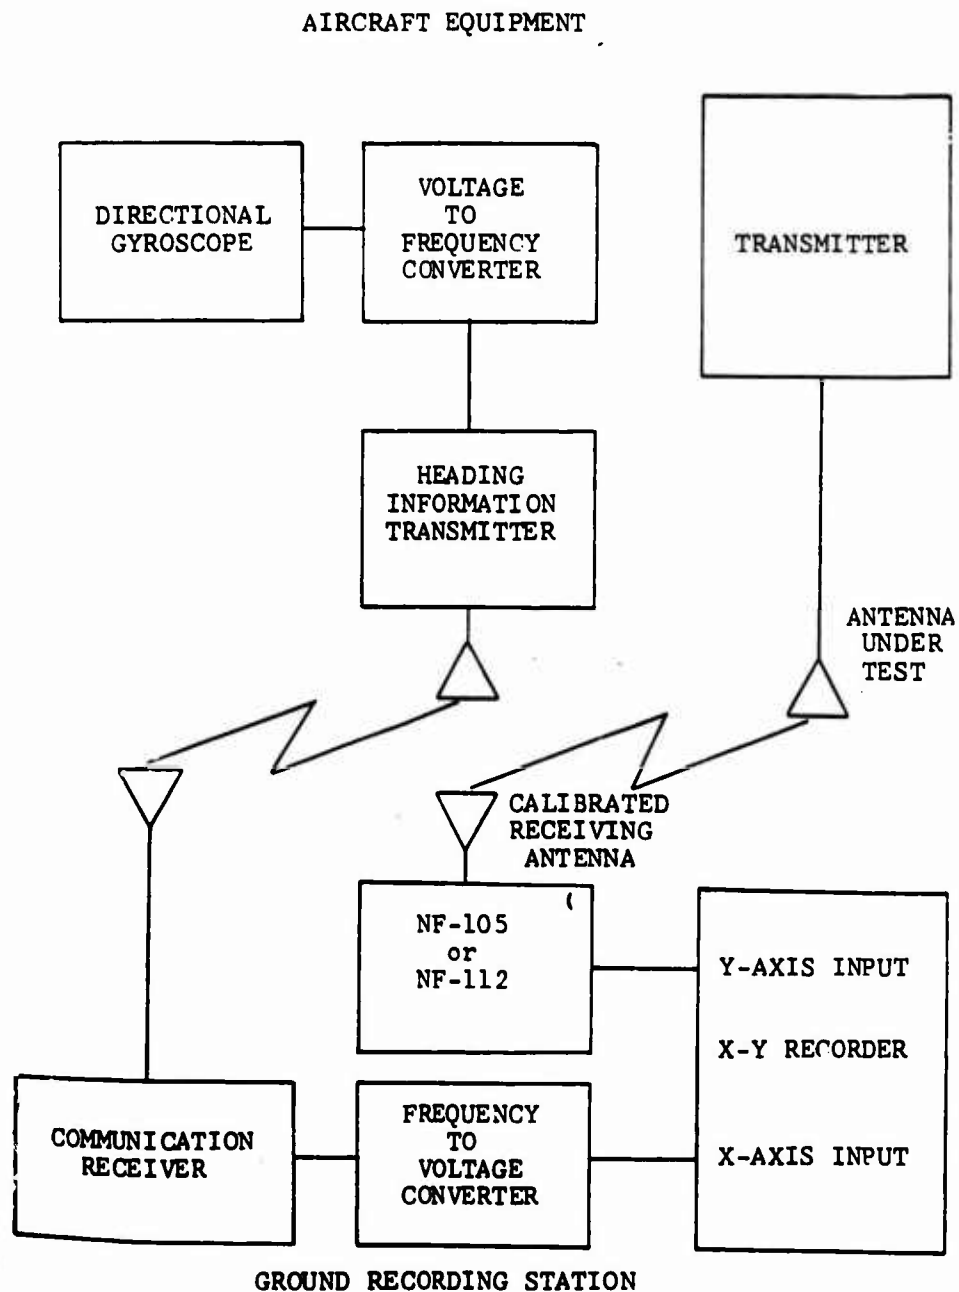


FIGURE 7

ANTENNA PATTERN RECORDING SCHEME

BY <u>J. Mast</u>	BELL HELICOPTER COMPANY POST OFFICE BOX 402 FORT WORTH 1, TEXAS	MODEL <u>OH-58A</u> PAGE <u>14</u>
CHECKED <u>R. Henschel</u>		RPT <u>206-099-212B</u>

3.0 DETAIL FACTUAL DATA

3.1 Number One FM Communication Antenna BHC P/N 206-075-518

The number one FM communication antenna is a folded radiator enclosed within the upper half of the OH-58A vertical stabilizer. The radiating elements of the antenna are grounded for direct current and static charges and all matching circuitry is passive. The frequency range is 30 thru 76 MHz. The antenna provides vertically polarized radiation. VSWR in a 50 ohm system is 5:1 maximum, radiation efficiency varies from more than 25% at 30 MHz to better than 75% at 76 MHz, and pattern symmetry is generally better than 10 db. Final performance results of the 206-075-518 FM communication antenna S/N 002 are given in tabular form on Data Sheet 1, page 22, part III of this report. Radiation pattern polar plots may be found on Data Sheets 2 thru 11, pp 23 thru 32 of part III.

3.2 FM Homing Antenna, AS-2486/ARC-114 BHC P/N 206-075-523

The FM homing antenna consists of two short vertical radiators, one mounted on each side of the helicopter. Each of the two elements is center fed via a balun and tip loaded at each end to provide the proper characteristics. The antenna provides vertical polarization and a VSWR not exceeding 2.5:1 in a 50 ohm system over the frequency range of 30 thru 76 MHz. Homing capability when tested in conjunction with a vertical whip six feet above the ground fed with four watts, is better than 20 statute miles with a maximum angular error of 10 degrees and no false indications

BY <u>J. Mast</u>	BELL HELICOPTER COMPANY POST OFFICE BOX 482 • FORT WORTH 1, TEXAS	MODEL <u>OH-58A</u> PAGE <u>15</u>
CHECKED <u>R. Henschel</u>		RPT. <u>206-099-212B</u>

3.2 Continued

across the 30 thru 76 MHz band. Test results on the AS-2486/ARC-115 S/N 001 are presented on Data Sheet 12, page 33 and polar radiation patterns on Data Sheets 13 thru 22, pp 34 thru 42, part III.

3.3 Number Two FM Communications Antenna AS-2485/ARC-114 BHC P/N 206-075-543

The number two FM communications antenna consists of a 22 inch vertical member extending up and forward at an angle of approximately 60 degrees from the horizontal, topped by a 44 in whip extension extending aft nearly horizontally. The antenna provides vertically polarized radiation with an efficiency exceeding 25% at 30 MHz to 75% at 76 MHz, and pattern symmetry of generally better than 10 db. A passive network in the antenna base matches the antenna to 50 ohm with a VSWR of less than 5:1. The AS-2485/ARC-114 is mounted on the roof of the OH-58A between the upper edge of the windshield and the forward edge of the boost cylinder cowl. Tabulated test results for the AS-2485/ARC-114 S/N 001 are presented on Data Sheet 23, page 44 and polar radiation patterns on Data Sheets 24 thru 33, pages 45 thru 54, part III.

3.4 VHF Communication Antenna BHC P/N 206-075-518

Like the number one FM Communication antenna, the VHF communication antenna is integral to the OH-58A Vertical Stabilizer. The antenna is a vertical radiator which is shunt fed against a portion of the FM element in the 206-075-518 combination antenna. Matching in a 50 ohm

BY J. Mast
CHECKED R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 16
RPT 206-099-212B

3.4 Continued

system to better than 2.5:1 VSWR over the 116 to 150 MHz band is provided by a passive network. Radiation is vertically polarized at an efficiency of better than 75% and pattern symmetry is better than 10 db. Tabulated test results of the 206-075-518 VHF communication antenna S/N 002 are given on Data Sheet 34, page 55 and radiation pattern polar plots on Data Sheets 35 thru 44, pages 56 thru 65, part III.

3.5 UHF Communication Antenna AS-2487/ARC-116, BHC P/N 206-075-551

The AS-2487/ARC-116 is a blade type antenna 5.8 inches high, 11 inches long, and 2.25 inches wide at its base. The antenna is mounted underneath the OH-58A with its leading edge approximately 18 inches aft of the helicopter's nose. Passive matching provides a VSWR of better than 2.5:1 in a 50 ohm system over a frequency range of 225 to 400 MHz. A vertically polarized radiation efficiency of better than 75% with pattern symmetry better than 10 db is realized with this antenna. Test results of AS-2487/ARC-116 S/N 001 are presented in tabular form on Data Sheet 45, page 66 and polar radiation plots are on Data Sheets 46 thru 55, pages 67 thru 76, part III.

BY <u>J. Mast</u>	BELL HELICOPTER COMPANY POST OFFICE BOX 402 • FORT WORTH 1, TEXAS	MODEL OH-58A PAGE <u>17</u>
CHECKED <u>R. Henschel</u>		RPT <u>206-099-212B</u>

4.0 WEIGHT CONTROL DATA

4.1 Summary

<u>Total Weight of OH-58A Antenna System</u>	<u>Total Allowable Antenna System Weight</u>
4.08 lb	18.0 lb

4.2 Number One VHF/FM and VHF/AM Communication Antennas

* Difference between weights
of standard vertical fin and
fin including 206-075-518

<u>VHF/FM-VHF/AM Antenna Assembly</u>	<u>Specification Weight</u>
Minus 0.95 lb	VHF/FM - 4 lb
	VHF/AM - 3 lb
	7 lb

*Standard Vertical fin -13.4 lb
OH-58A Vertical fin including Antennas -12.45 lb

4.3 VHF/FM Homing Antenna

<u>AS-2486/ARC-114 BHC P/N 206-075-523</u>	<u>Specification Weight</u>
2.3 lb	4.0 lb

4.4 Number Two VHF/FM Communication Antenna

<u>AS-2485/ARC-114 BHC P/N 206-074-543</u>	<u>Specification Weight</u>
1.96 lb	6.0 lb

4.5 UHF/AM Communication Antenna

<u>AS-2487/ARC-116 BHC P/N 206-075-551</u>	<u>Specification Weight</u>
0.77 lb	1.0 lb

BY <u>J. Mast</u>	BELL HELICOPTER COMPANY POST OFFICE BOX 402 • FORT WORTH 1, TEXAS	MODEL <u>OH-58A</u> PAGE <u>18</u>
CHECKED <u>R. Henschel</u>		RPT <u>206-099-212B</u>

5.0 CONCLUSIONS

Based upon the work discussed in the preceding sections and the data presented in Part III of this report it is concluded that the final antenna configuration of the OH-58A provides performance which meets or exceeds the respective minimum requirements for each system.

BY J. Mast

CHECKED R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 FORT WORTH, TEXAS

MODEL 206-099-212B PAGE 20

RPT. 206-099-212B

6.0 RECOMMENDATIONS

No recommendations will be made at this time.

PREVIOUS PAGE
IS BLANK

BY J. Mast
CHECKED R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 22
RPT 206-099-212B

DATA SHEET NO. 1

NUMBER ONE FM COMMUNICATION ANTENNA
BHC P/N 206-075-518
S/N 002

Range 18 Miles

Altitude 1000 feet

<u>FREQ</u> <u>(MHz)</u>	<u>VSWR</u>	<u>MAX</u> <u>(uv/M)</u>	<u>MIN</u> <u>(uv/M)</u>	<u>MIN</u> <u>REQ</u> <u>(uv/M)</u>	<u>db Above</u> <u>Min Req.</u>
30.50	4.0:1	1200	380	302	12.0
40.10	4.3:1	680	110	348	5.8
46.65	2.8:1	1600	610	380	12.5
49.80	2.0:1	2175	880	395	14.8
54.50	1.3:1	1500	710	417	11.2
57.80	1.3:1	1250	690	433	9.2
60.00	1.0:1	1950	1150	444	13.0
65.95	1.2:1	2600	1410	472	14.8
72.05	1.2:1	1800	900	501	11.0
75.60	1.4:1	2050	910	518	11.7

PREVIOUS PAGE
IS BLANK

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 482 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 23

CHECKED R. Henschel

RPT. 206-099-212B


DATA SHEET NO. 2

NUMBER ONE FM COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 feet

30.5 MHz

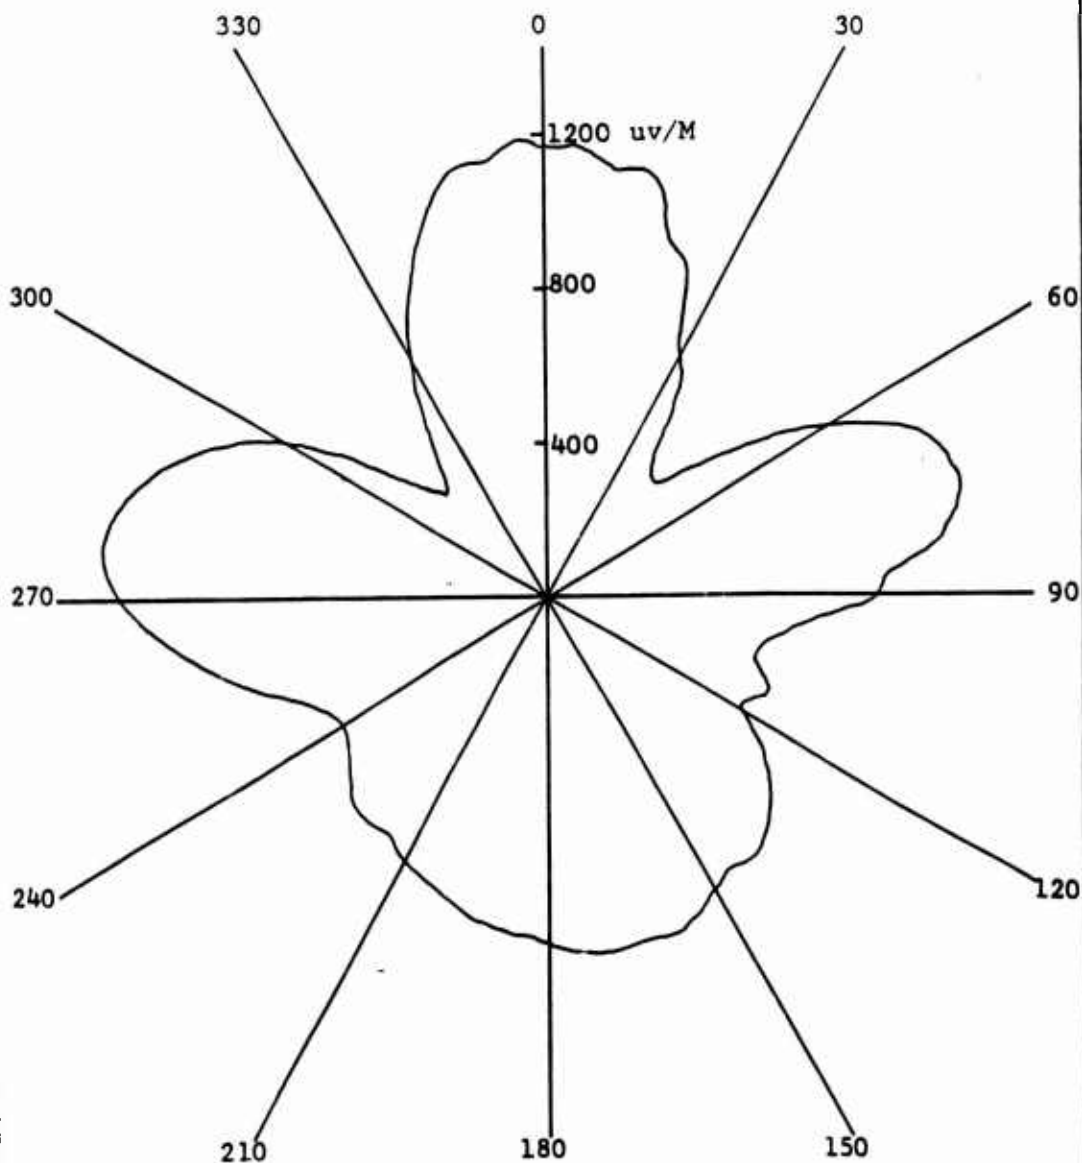

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 407 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 24

CHECKED R. Henschel

RPT. 206-099-212B


DATA SHEET NO. 3

NUMBER ONE FM COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 feet

40.1 MHz

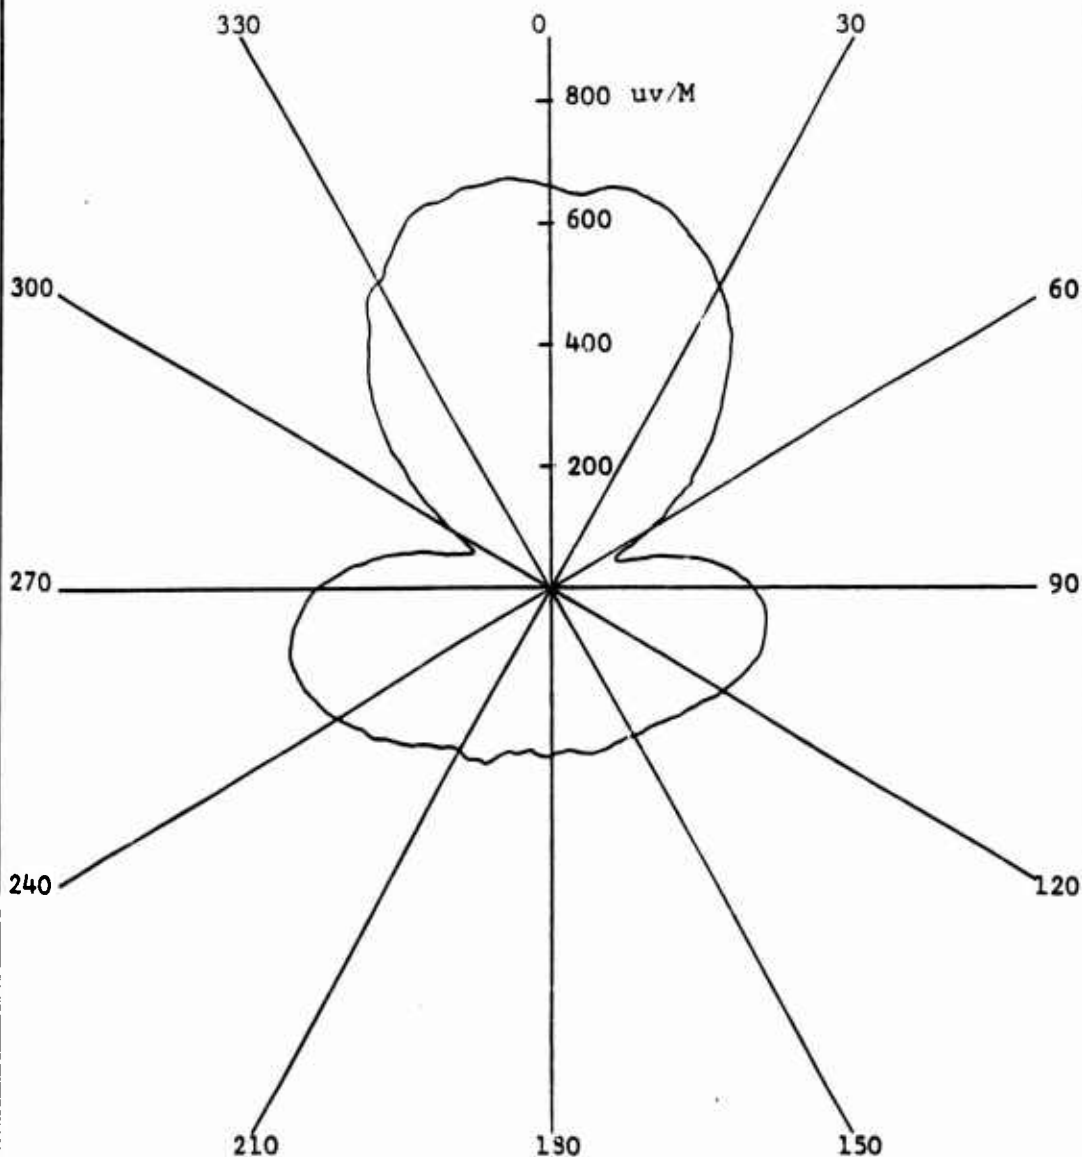

BY <u>J. Mast</u>	BELL HELICOPTER COMPANY POST OFFICE BOX 407 • FORT WORTH 1 TEXAS	MODEL <u>OH-58A</u> PAGE <u>25</u>
CHECKED <u>R. Henschel</u>		RPT <u>206-099-212B</u>


DATA SHEET NO. 4

NUMBER ONE FM COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 feet

46.65 MHz

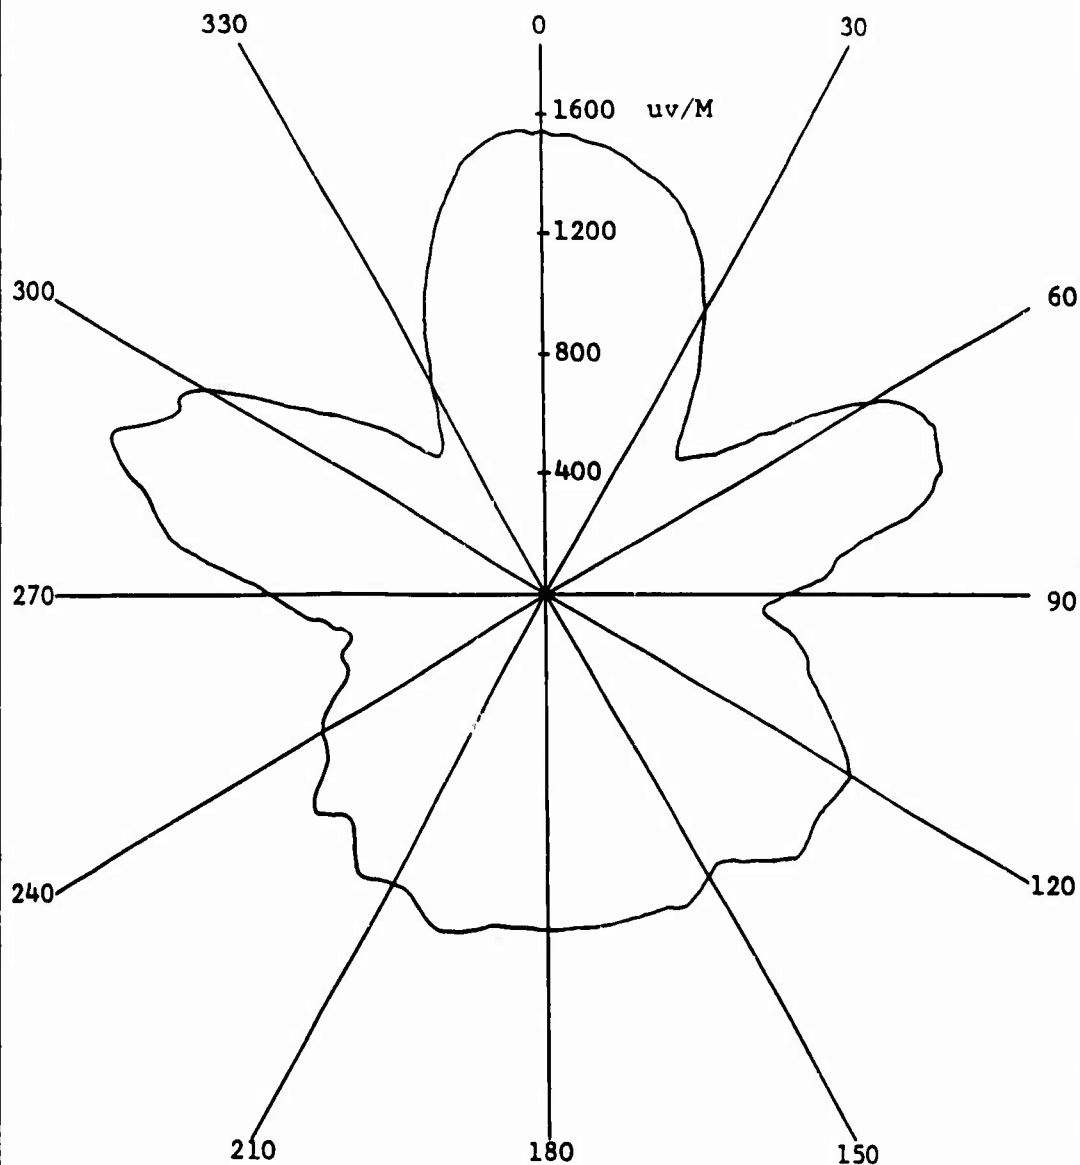

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 26

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 5

NUMBER ONE FM COMMUNICATION ANTENNA
BHC P/N 206-075-518

Rnage 13 Miles

Altitude 1000 feet

49.80 MHz

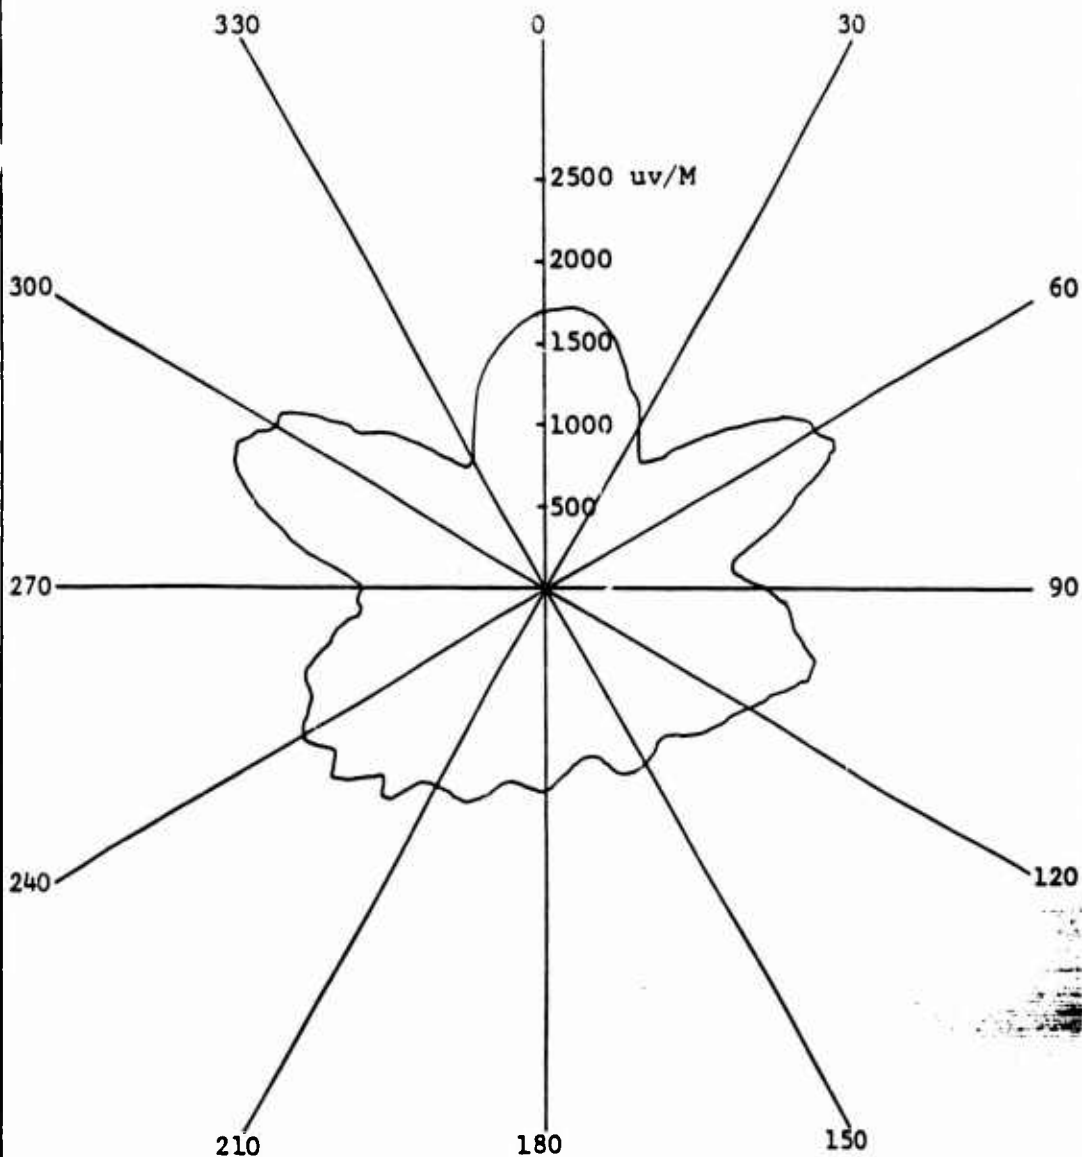

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1 TEXAS

MODEL OH-58A PAGE 27

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 6

NUMBER ONE FM COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 feet

54.5 MHz

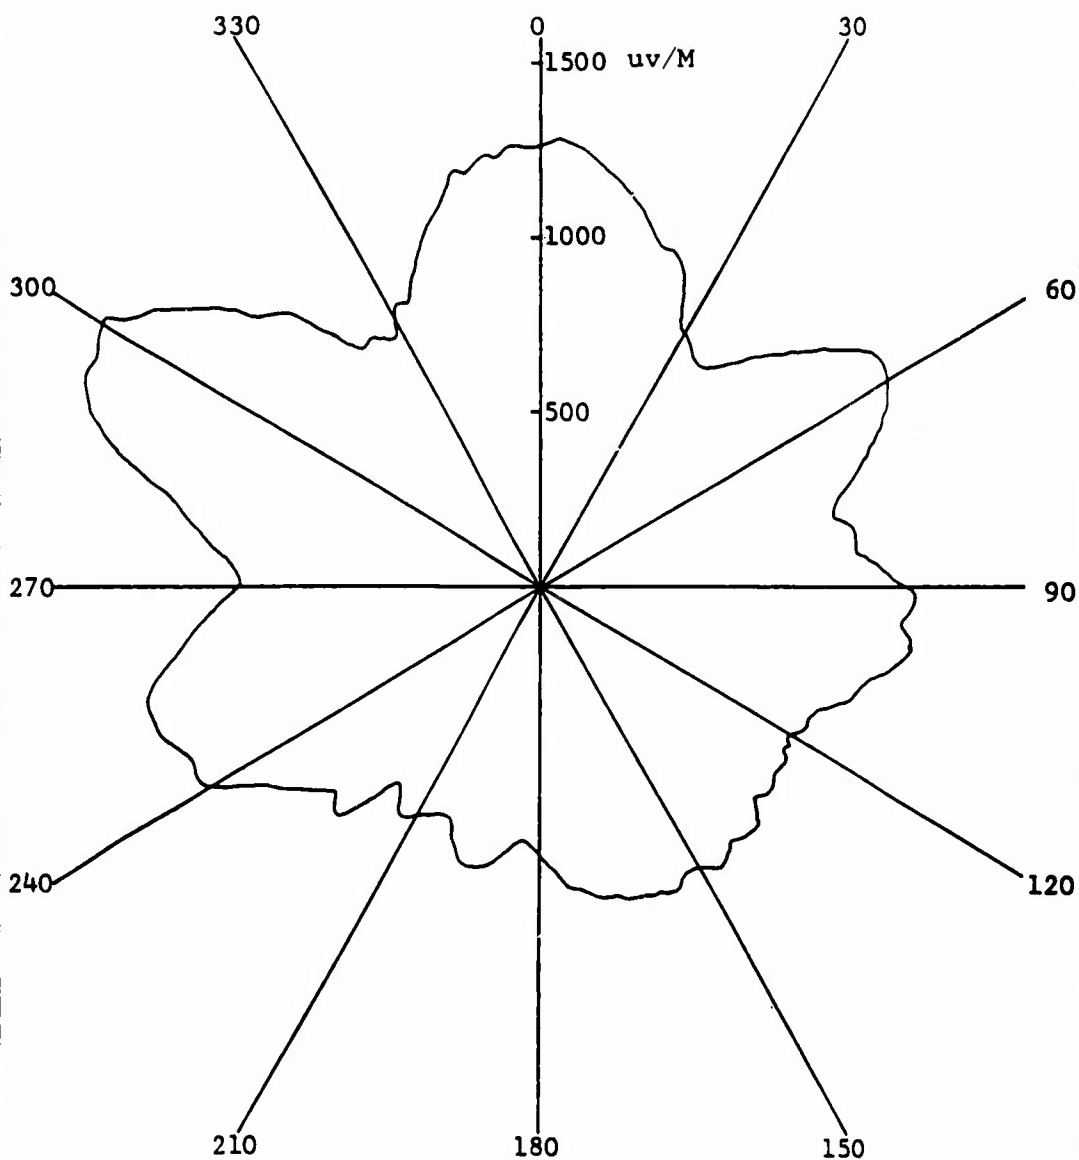

BY J. Mast

SELL HELICOPTER COMPANY
POST OFFICE BOX 412 FORT WORTH 1 TEXAS

MODEL OH-58A PAGE 28

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 7

NUMBER ONE FM COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 feet

57.80 MHz

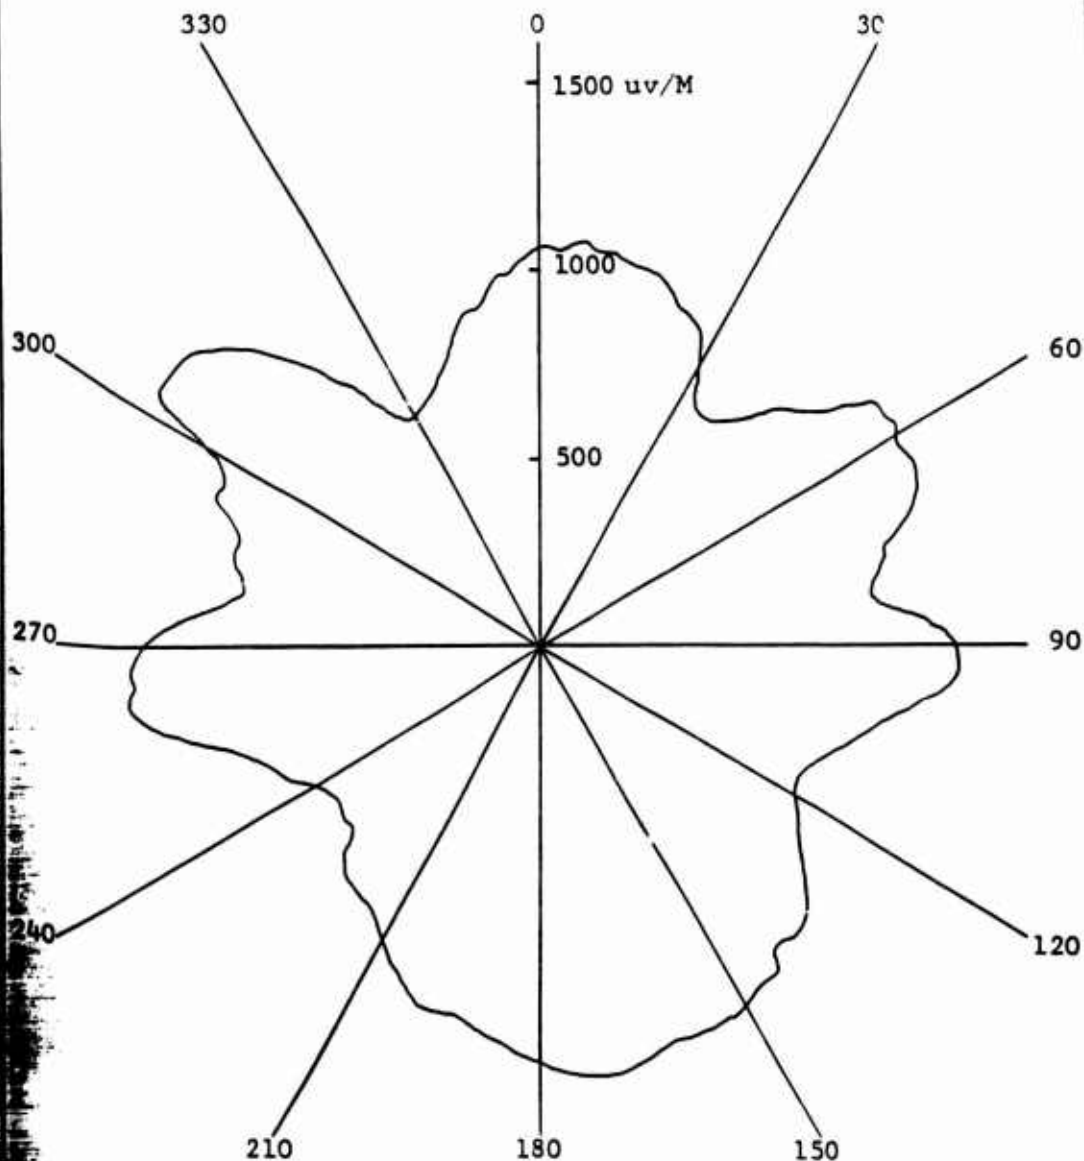

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1 TEXAS

MODEL OH-58A PAGE 29

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 8

NUMBER ONE FM COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 feet

60.00 MHz

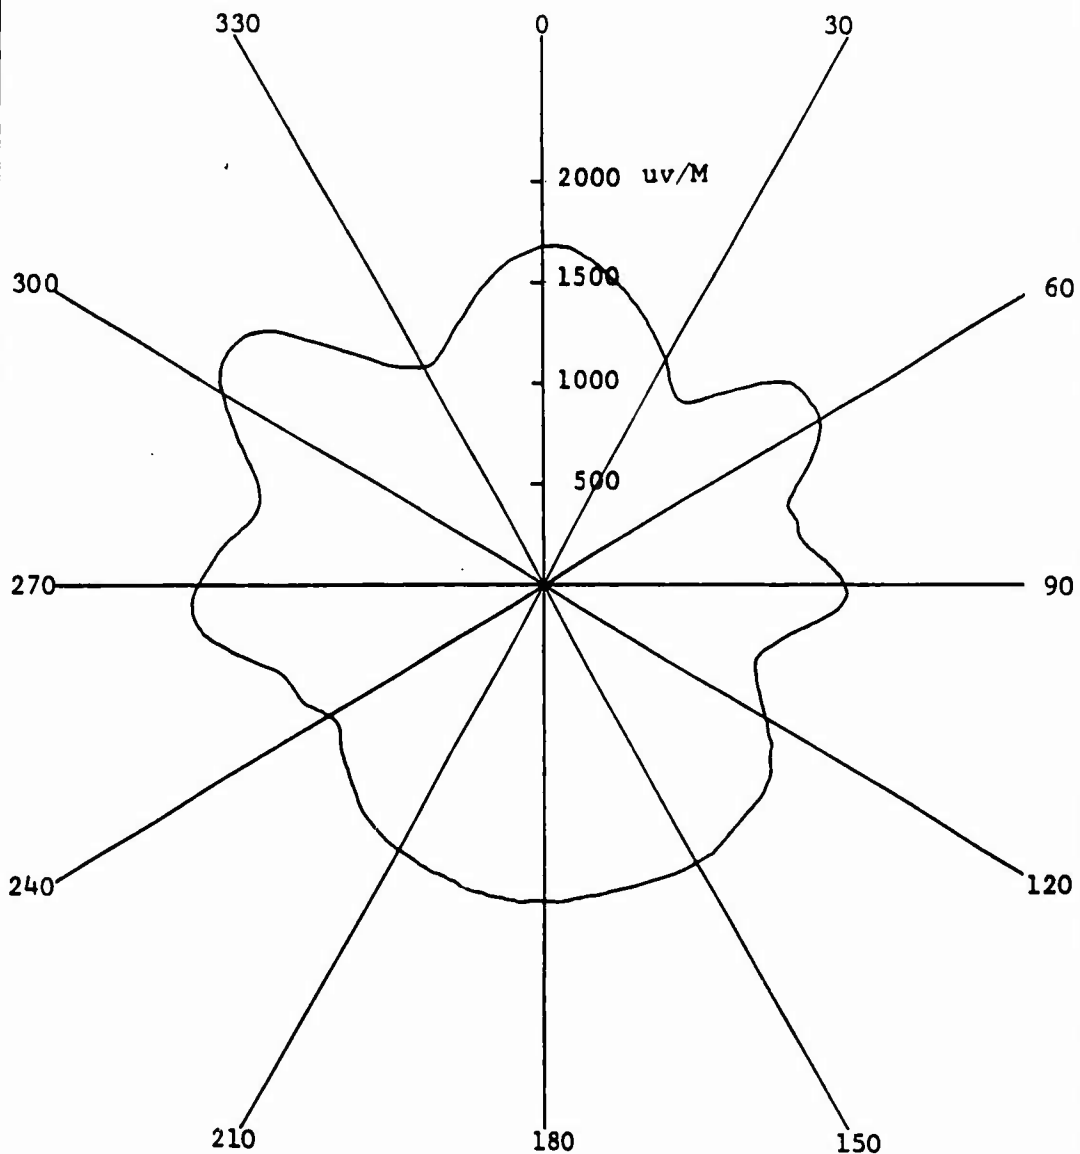

BY J. Mast

BELL HELICOPTER COMPANY
FORT WORTH, TEXAS

MODEL OH-58A PAGE 30

CHECKED R. Henschel

RPT. 206-099-212B


DATA SHEET NO. 9

NUMBER ONE FM COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 feet

65.95 MHz

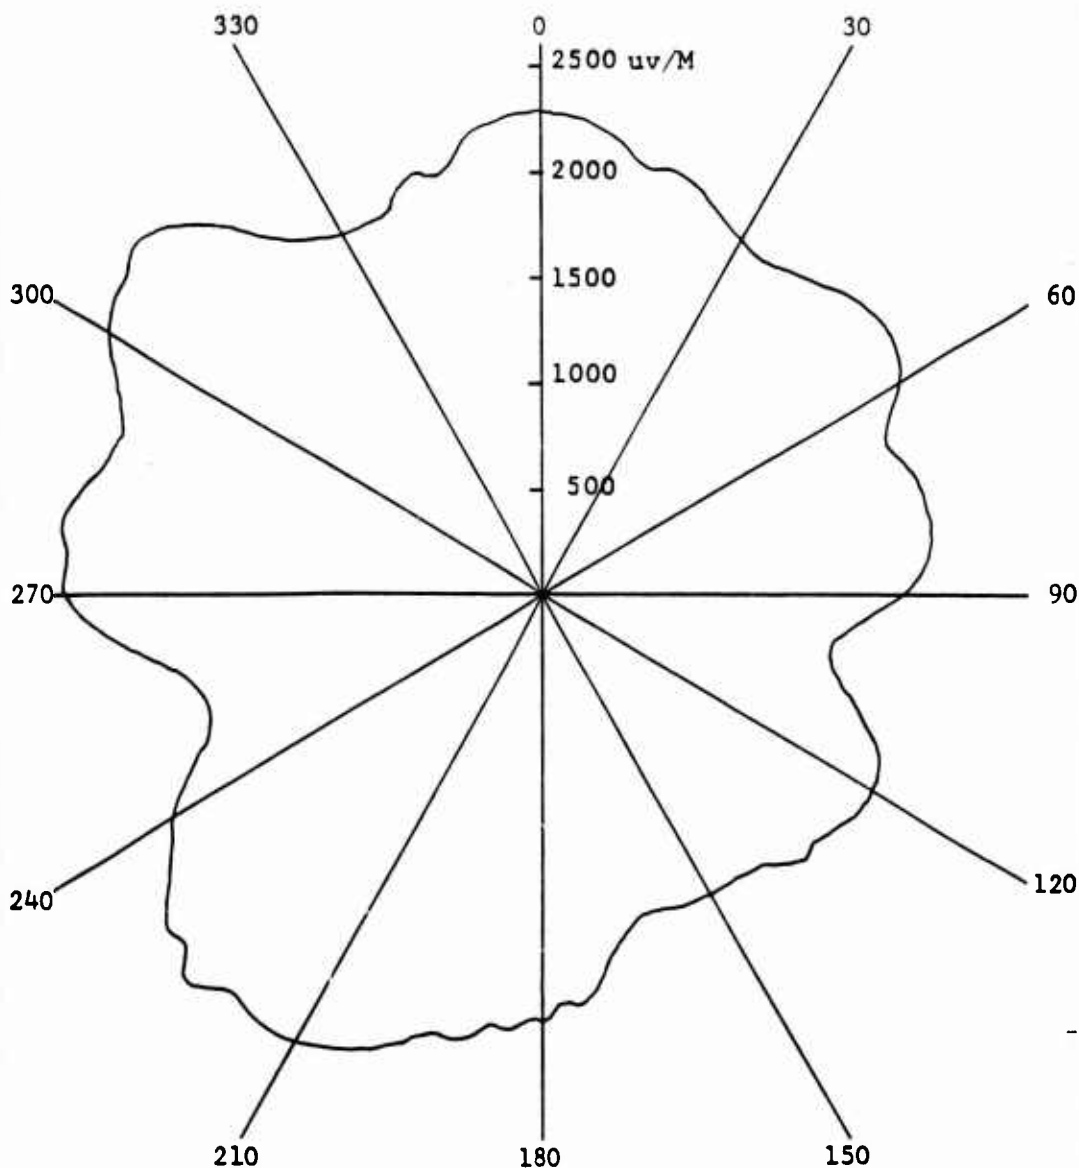

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 31

CHECKED R. Henschel

RPT. 206-099-212B


DATA SHEET NO. 10

NUMBER ONE FM COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 feet

72.05 MHz

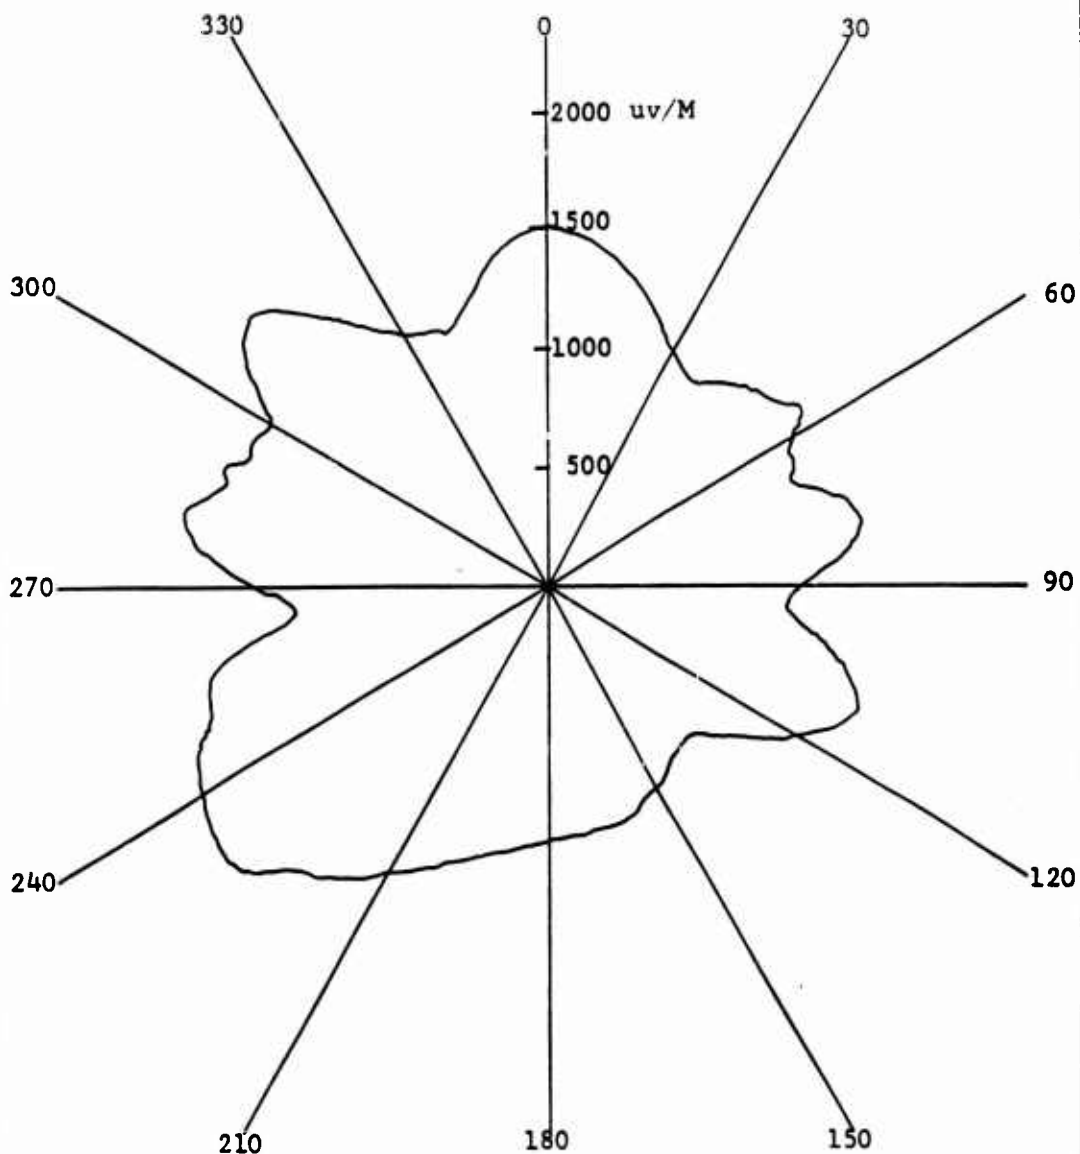

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 FORT WORTH 1 TEXAS

MODEL OH-58A PAGE 32

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 11

NUMBER ONE FM COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 feet

75.6 MHz

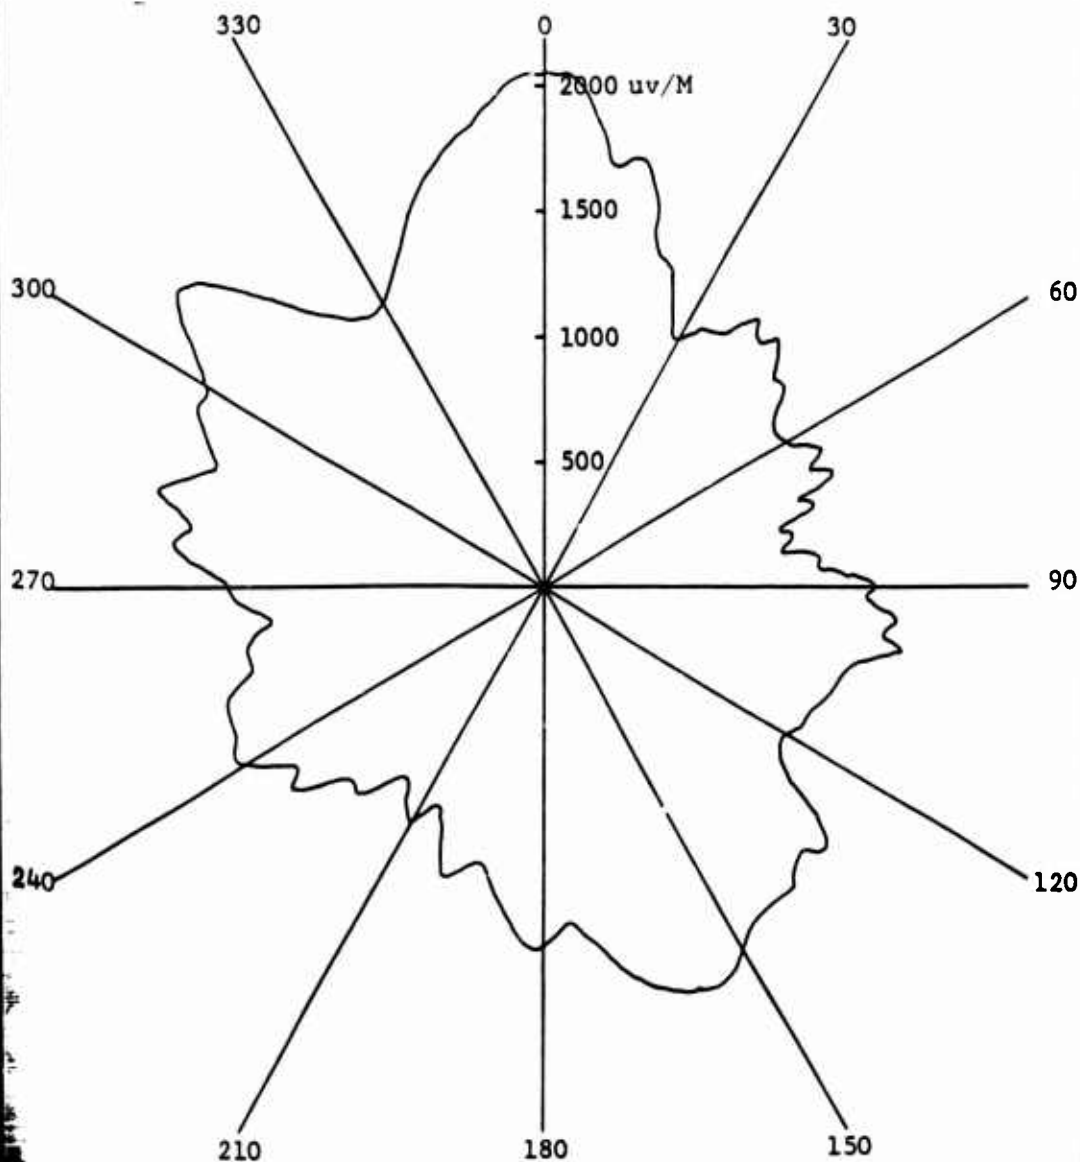

BY J. MastBELL HELICOPTER COMPANY
POST OFFICE BOX 482 • FORT WORTH 1, TEXASMODEL OH-58A PAGE 33CHECKED R. HenschelRPT 206-099-212B

DATA SHEET NO. 12

FM HOMING ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-523
S/N 001

FREQ (MHz)	VSWR		COURSE ERROR	
	-1(L/H)	-2(R/H)	at 20 miles, On Course	1000 feet Reciprocal
30.00	1.74:1	1.66:1		
30.50			-5°	+5°
35.00	1.62:1	1.52:1		
40.00	1.56:1	1.56:1		
40.10			-5°	+5°
45.00	1.56:1	1.56:1		
46.65			0°	+5°
49.80			-5°	+5°
50.00	1.64:1	1.6:1		
54.50			0°	0°
55.00	1.66:1	1.66:1		
57.80			-5°	0°
60.00	1.6:1	1.56:1	-3°	+5°
65.00	1.5:1	1.48:1		
65.95			-5°	+10°
70.00	1.5:1	1.5:1		
72.05			+5°	+5°
75.60			0°	+7°
76.00	1.58:1	1.6:1		

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 FORT WORTH, TEXAS

MODEL OH-58A PAGE 34


CHECKED R. Henschel

RPT 206-099-212B

DATA SHEET NO. 13

FM HOMING ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-523

30.00 MHz

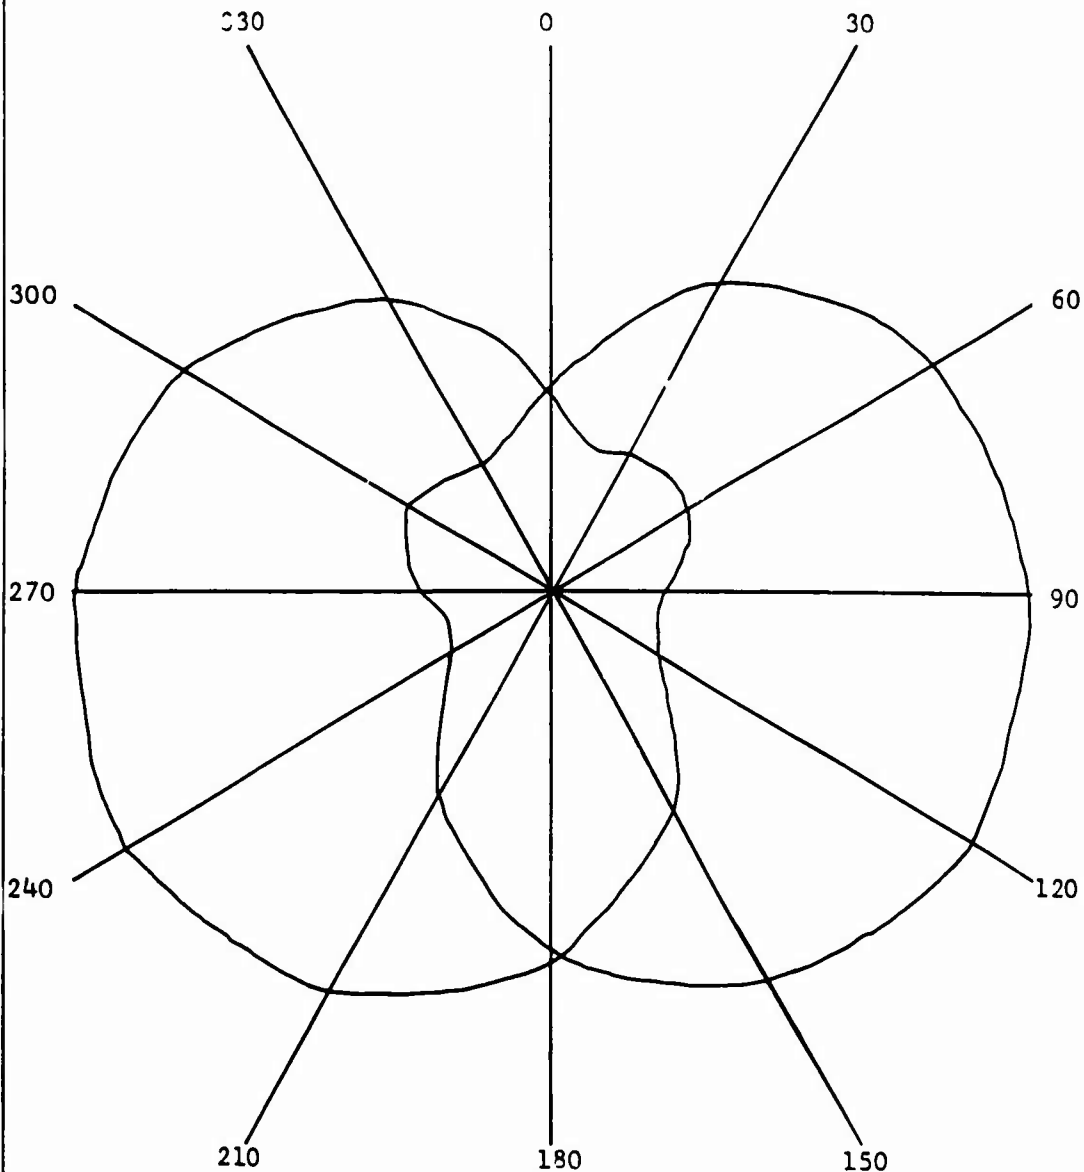

Plotted in Relative Voltage

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 482 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 35


CHECKED R. Henschel

RPT. 206-099-212B

DATA SHEET NO. 14

FM HOMING ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-523

36.00 MHz

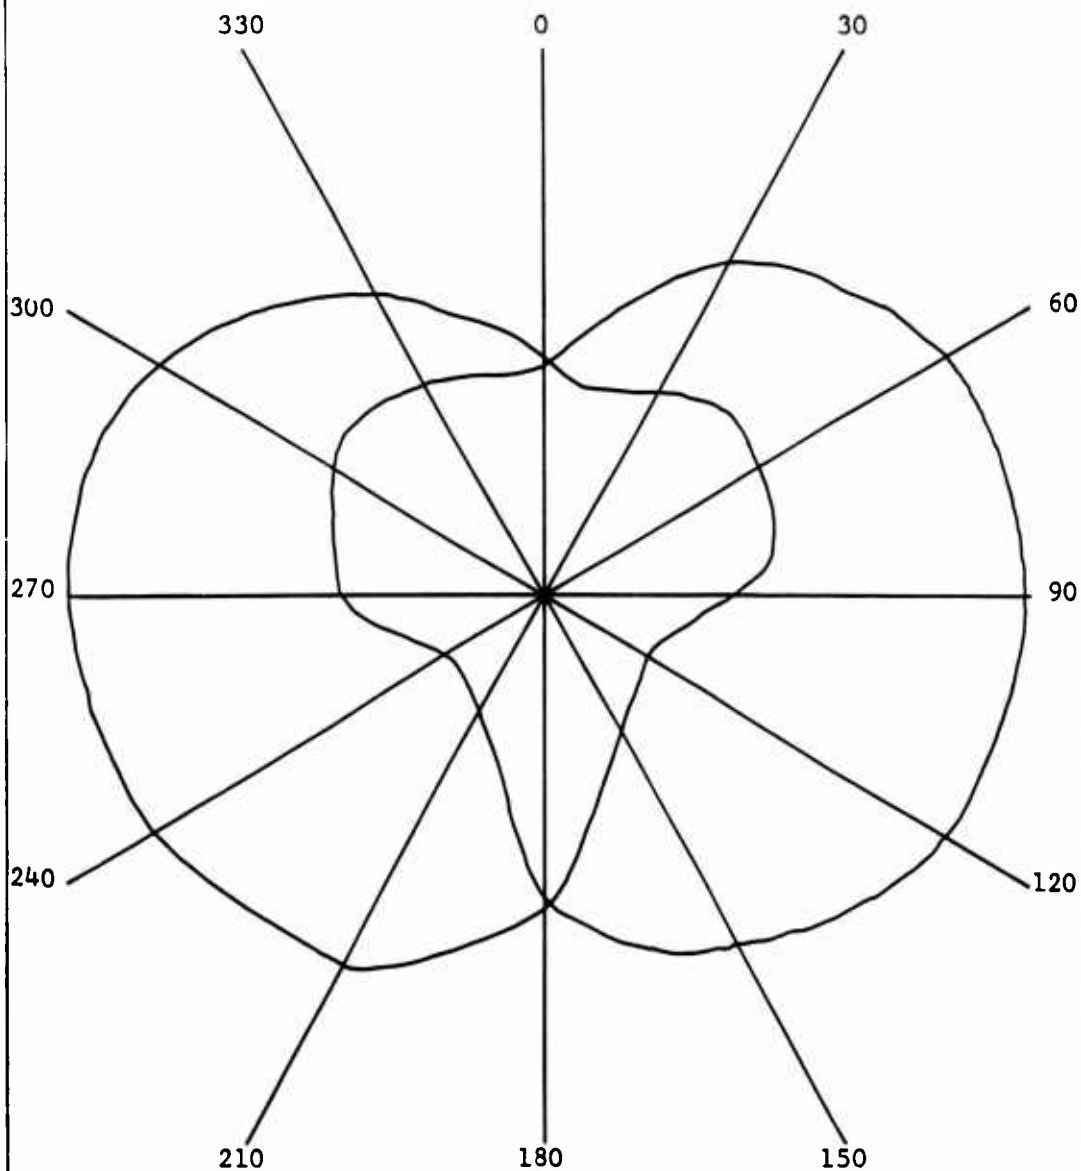

Plotted in Relative Voltage

BY J. Mast

CHECKED R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1, TEXAS


MODEL OH-58A PAGE 36

RPT 206-099-212B

DATA SHEET NO. 15

FM HOMING ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-523

40.00 MHz

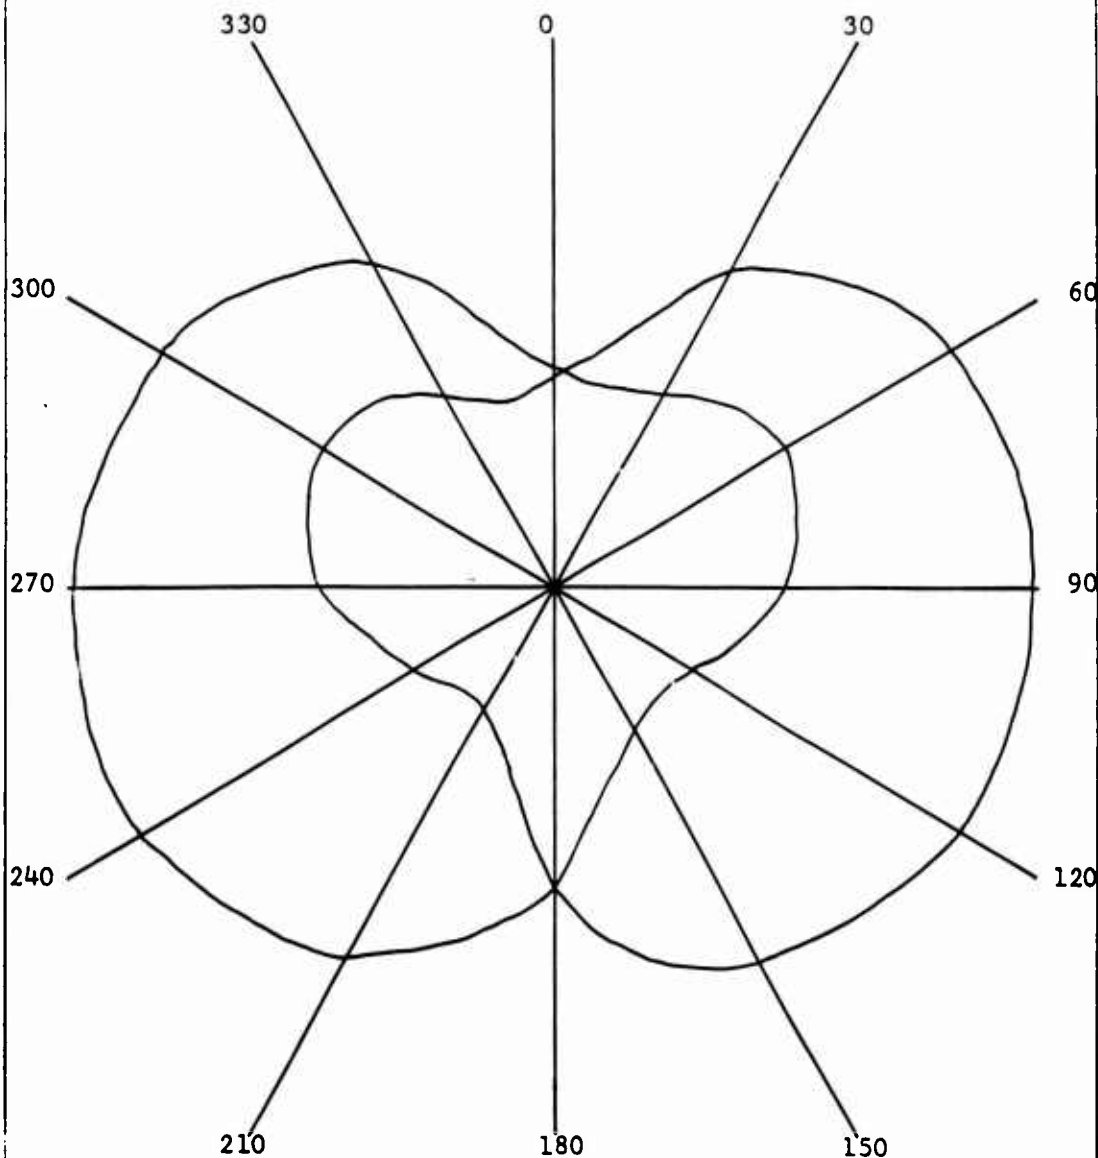

Plotted in Relative Voltage

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 37


CHECKED R. Henschel

RPT 206-099-212B

DATA SHEET NO. 16

FM HOMING ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-523

45.00 MHz

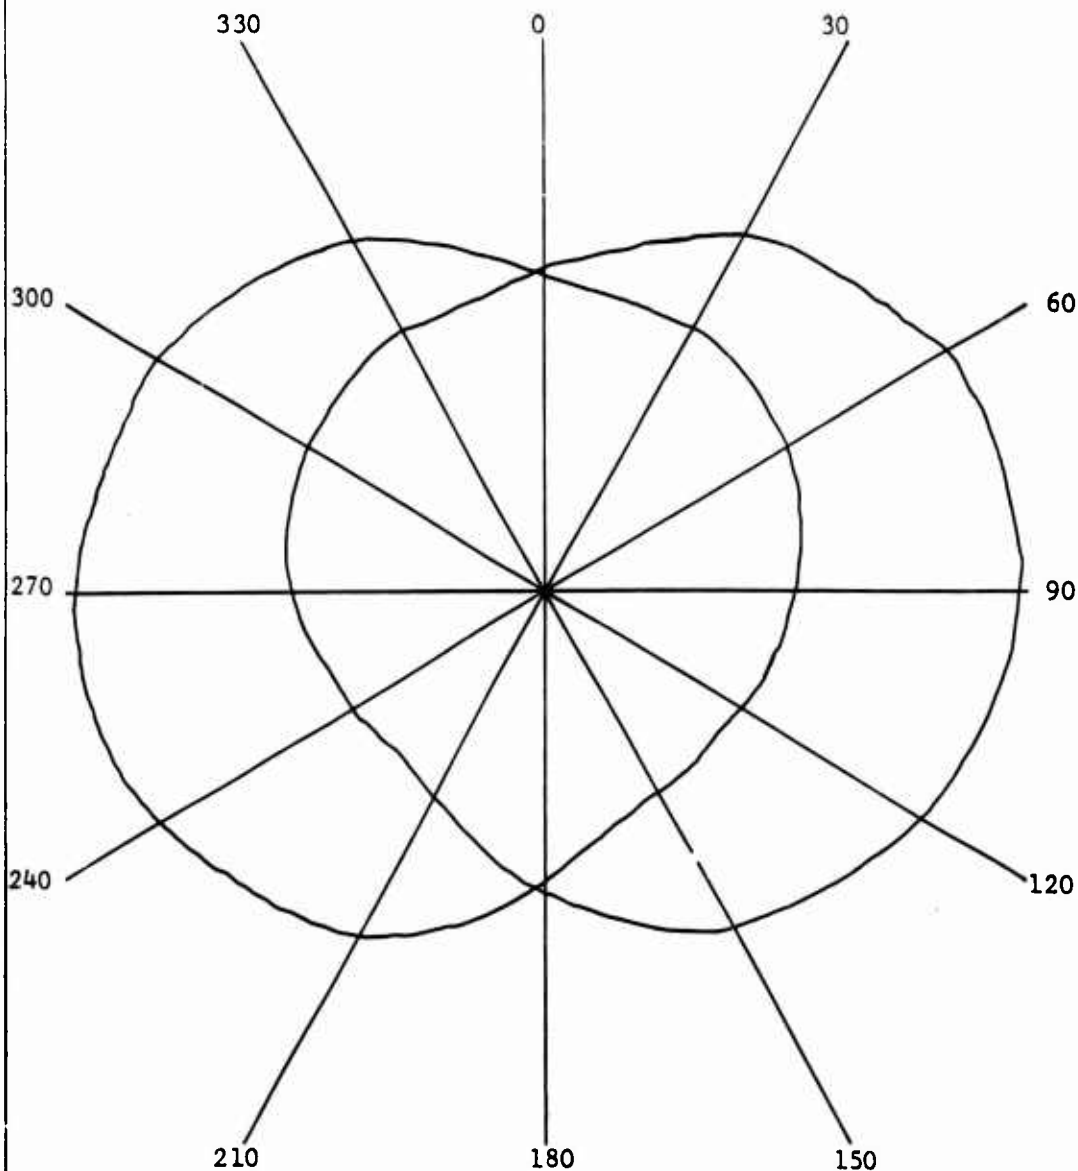

Plotted in Relative Voltage

J. Mast

R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1, TEXAS


MODEL OH-58A PAGE 38

RPT 206-099-212B

DATA SHEET NO. 17

FM HOMING ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-523

50.00 MHz

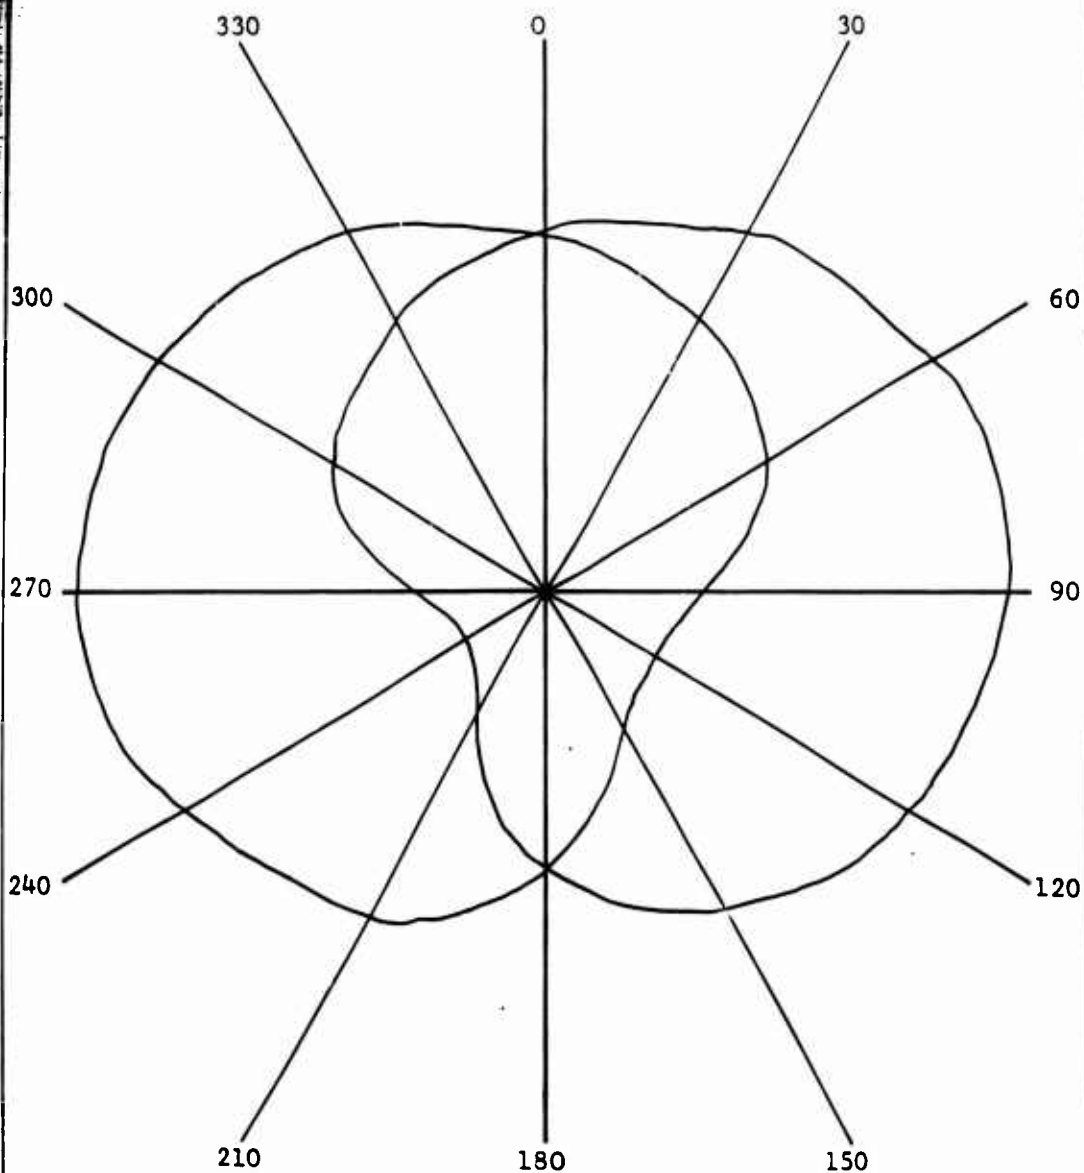

Plotted in Relative Voltage

J. Mast

BELL HELICOPTER COMPANY

MODEL OH-58A PAGE 39

CHECKED R. Henschel


POST OFFICE BOX 402 FORT WORTH, TEXAS

RPT 206-099-212B

DATA SHEET NO. 18

FM HOMING ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-523

55.00 M Hz

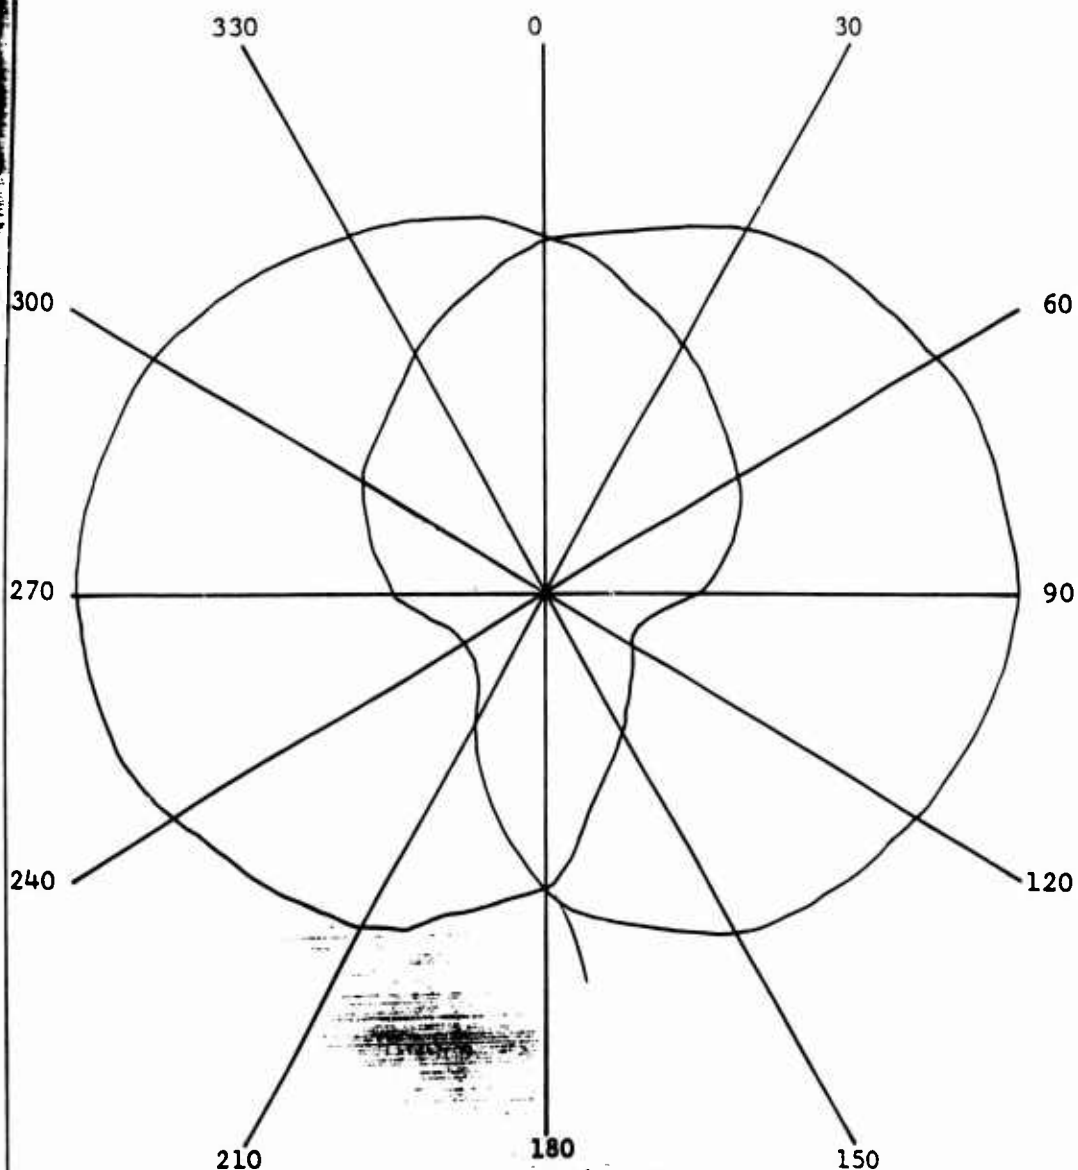

Plotted in Relative Voltage

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 FORT WORTH, TEXAS

MODEL OH-58A PAGE 40


CHECKED R. Henschel

RPT 206-099-212B

DATA SHEET NO. 19

FM HOMING ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-523

60.00 MHz

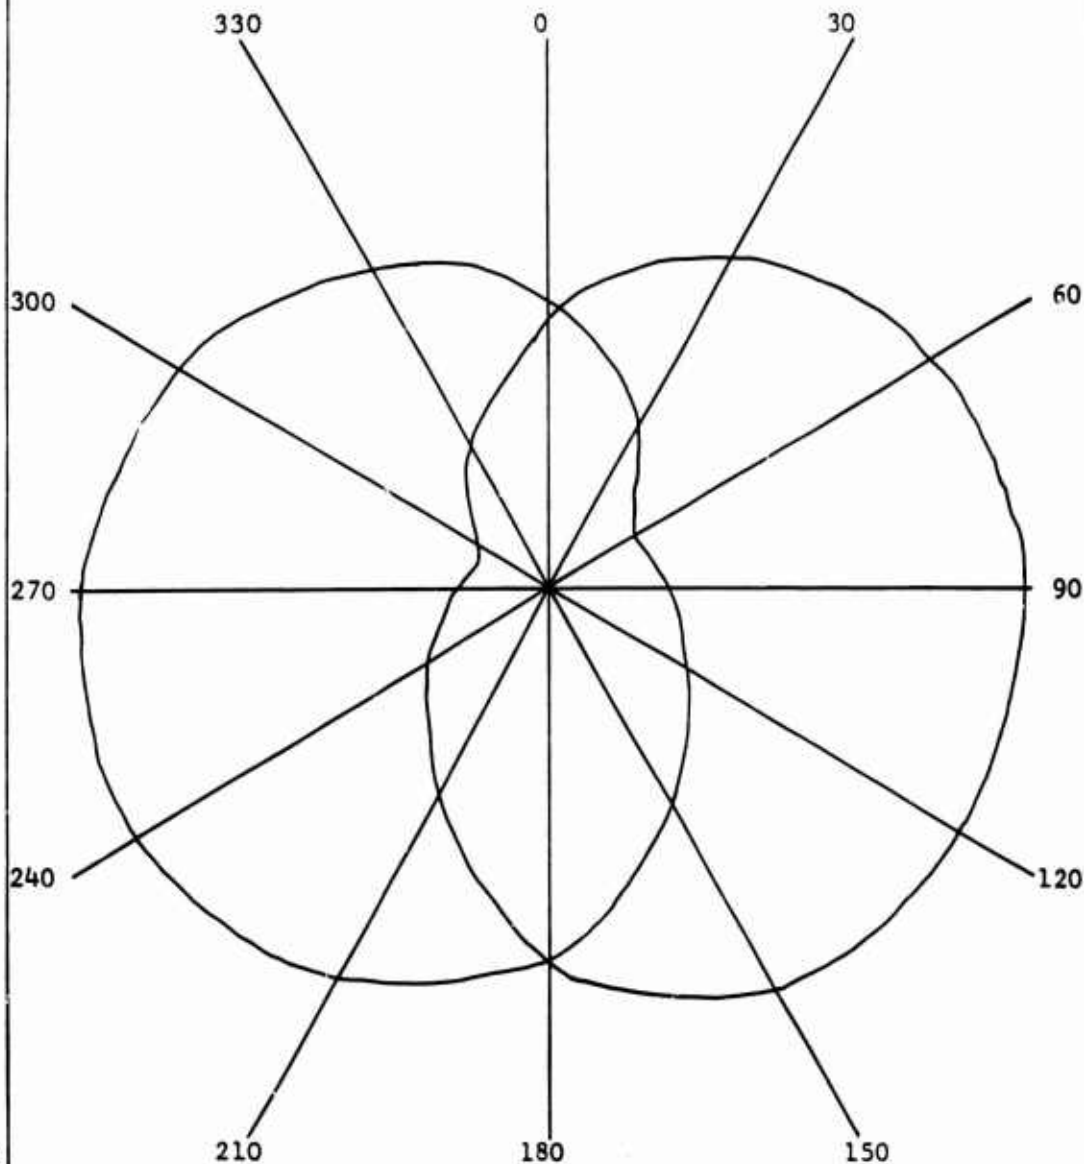

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 FORT WORTH, TEXAS

MODEL OH-58A PAGE 41


CHECKED R. Henschel

RPT. 206-099-212B

DATA SHEET NO. 20

FM HOMING ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-523

65.00 MHz

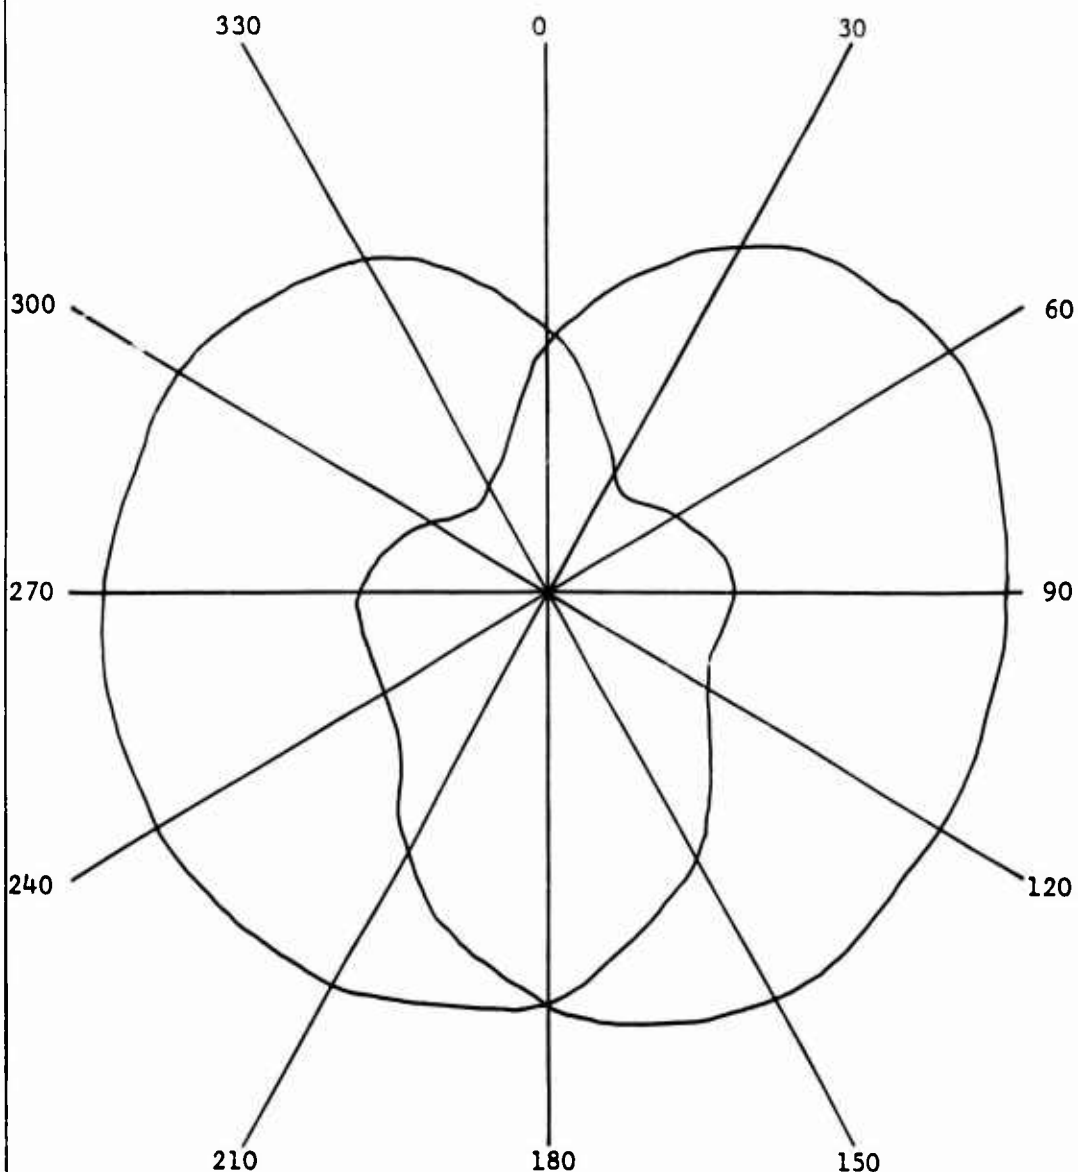

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 42


CHECKED R. Henschel

RPT 206-099-212B

DATA SHEET NO. 21

FM HOMING ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-523

70.00 MHz

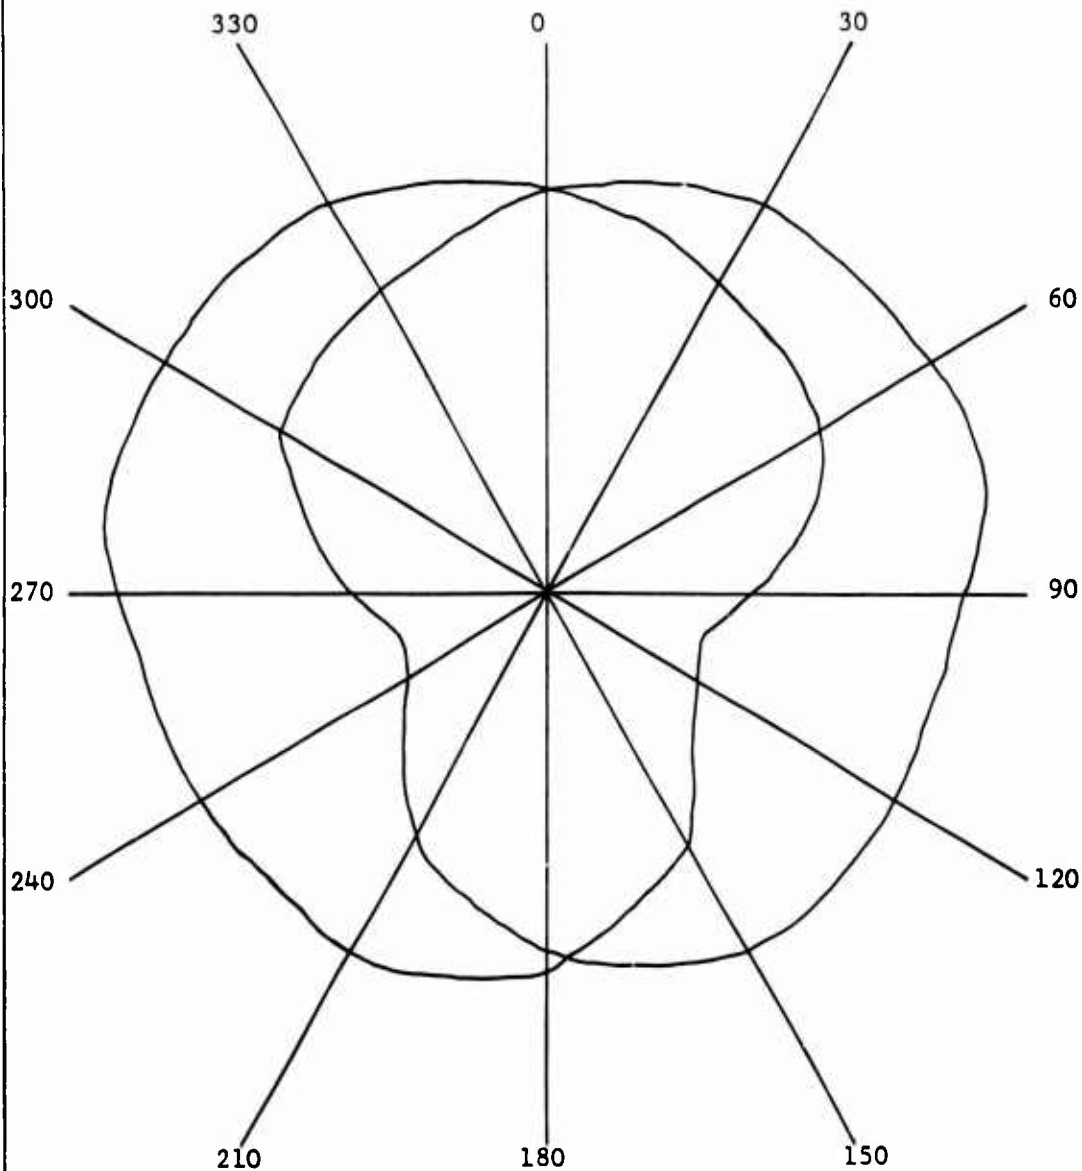

Plotted in Relative Voltage

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 487 • FORT WORTH 1 TEXAS

MODEL OH-58A PAGE 43


CHECKED R. Henschel

RPT. 206-099-212B

DATA SHEET NO. 22

FM HOMING ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-523

76.00 MHz

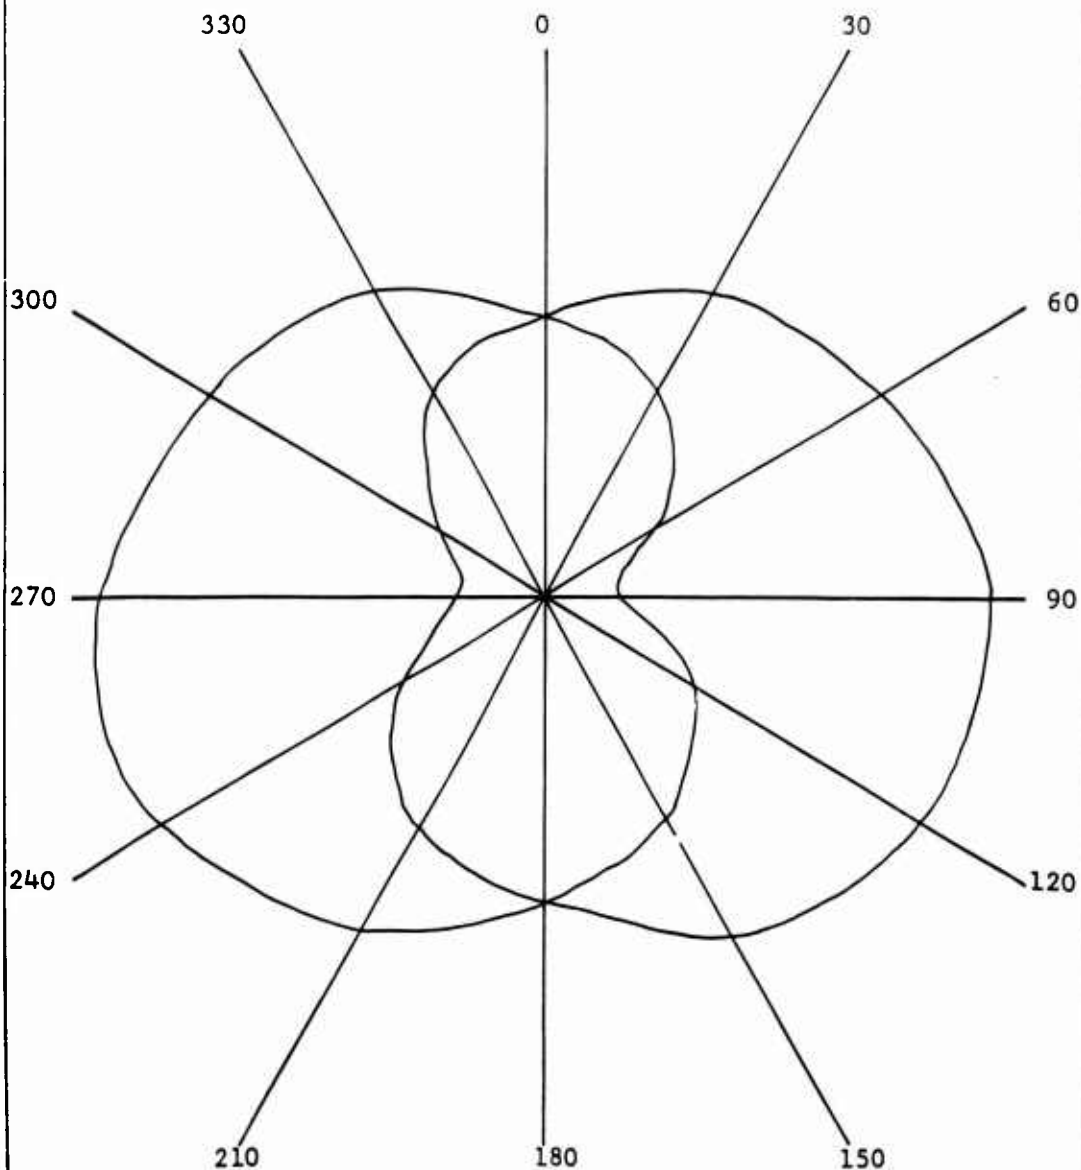

Plotted in Relative Voltage

BY <u>J. Mast</u>	BELL HELICOPTER COMPANY POST OFFICE BOX 402 FORT WORTH, TEXAS	MODEL <u>OH-58A</u> PAGE <u>44</u>
CHECKED <u>R. Henschel</u>		RPT <u>206-099-212B</u>

DATA SHEET NO. 23

NUMBER TWO FM COMMUNICATION ANTENNA
AS-2485/ARC-114 BHC P/N 206-075-543
S/N 001

Range 18 Miles

Altitude 1000 feet

<u>FREQ</u> <u>(MHz)</u>	<u>VSWR</u>	<u>MAX</u> <u>(uv/M)</u>	<u>MIN</u> <u>(uv/M)</u>	<u>MIN</u> <u>REQ</u> <u>(uv/M)</u>	<u>db Above</u> <u>Min Req.</u>
30.50	2.7:1	2100	1650	302	16.8
40.10	2.6:1	1160	630	348	10.5
46.65	2.9:1	870	440	380	7.2
49.80	2.9:1	910	400	395	7.3
54.50	3.3:1	760	340	417	5.3
57.80	2.7:1	1260	575	433	9.2
60.00	2.8:1	1130	292	444	8.1
65.95	2.0:1	1340	440	472	9.1
72.05	1.7:1	1440	600	501	9.1
75.60	1.8:1	640	205	518	1.6

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 45

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 24

NUMBER TWO FM COMMUNICATION ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-543

Range 18 Miles

Altitude 1000 feet

30.50 MHz

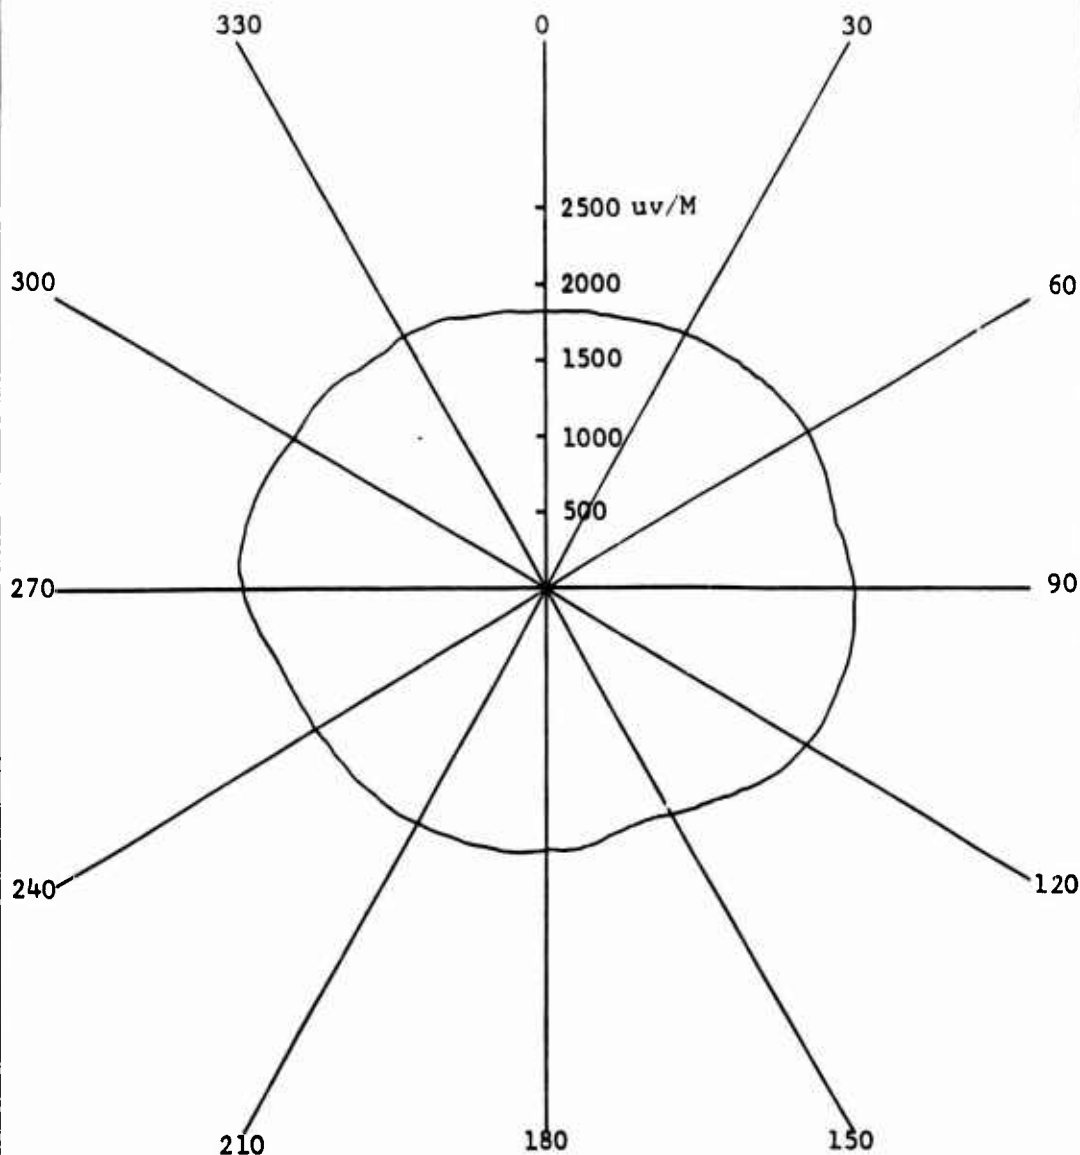

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 487 • FORT WORTH 1 TEXAS

MODEL OH-58A PAGE 46

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 25

NUMBER TWO FM COMMUNICATION ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-543

Range 18 Miles

Altitude 1000 feet

40.1 MHz

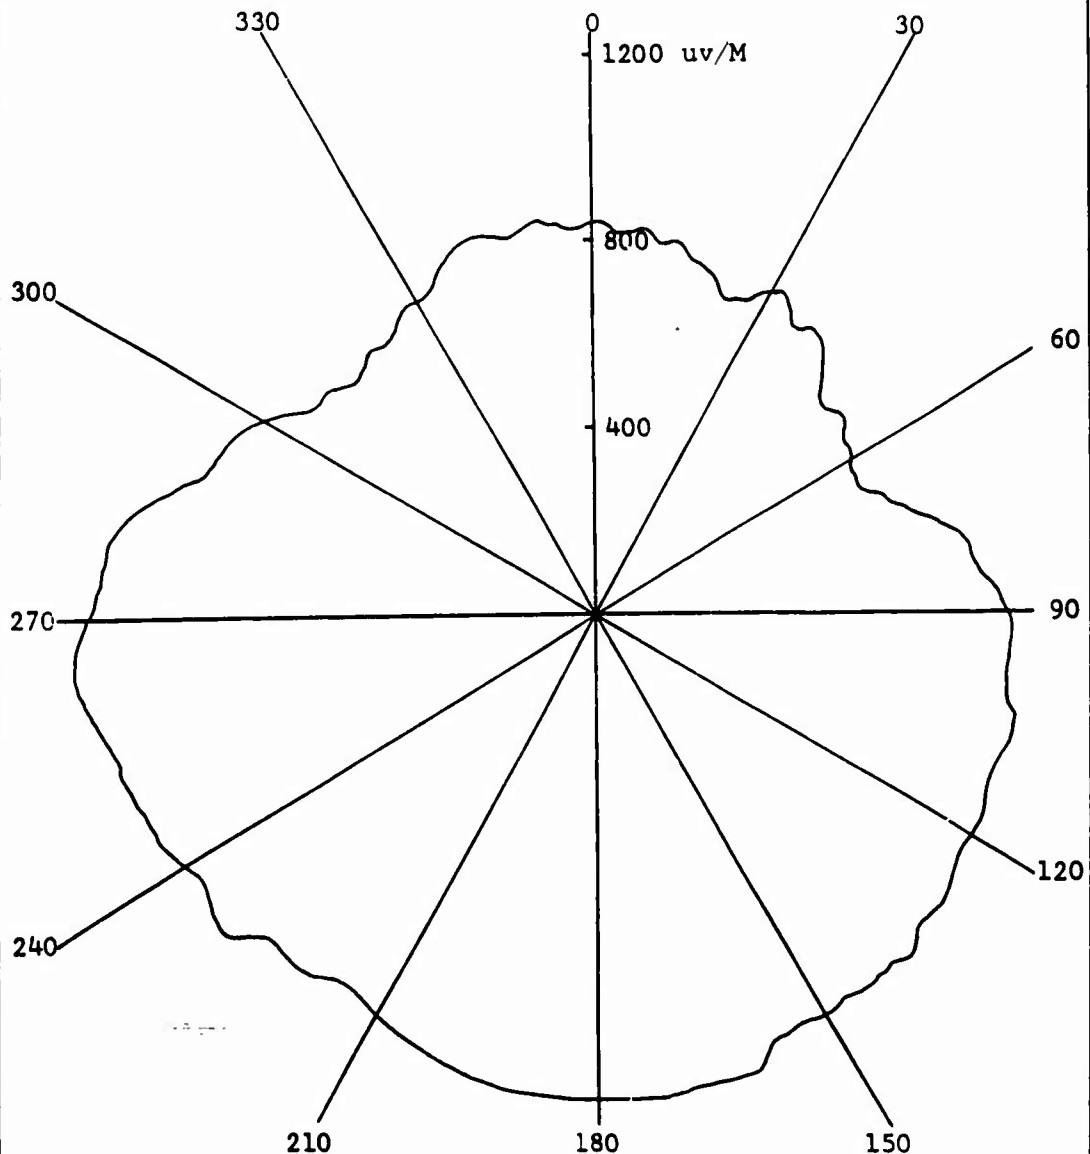

BY J. Mast

BELL HELICOPTER COMPANY

MODEL OH-58A PAGE 47

CHECKED R. Henschel

POST OFFICE BOX 457 • FORT WORTH, TEXAS

RPT 206-099-212B


DATA SHEET NO. 26

NUMBER TWO FM COMMUNICATION ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-543

Range 18 Miles

Altitude 1000 feet

46.65 MHz

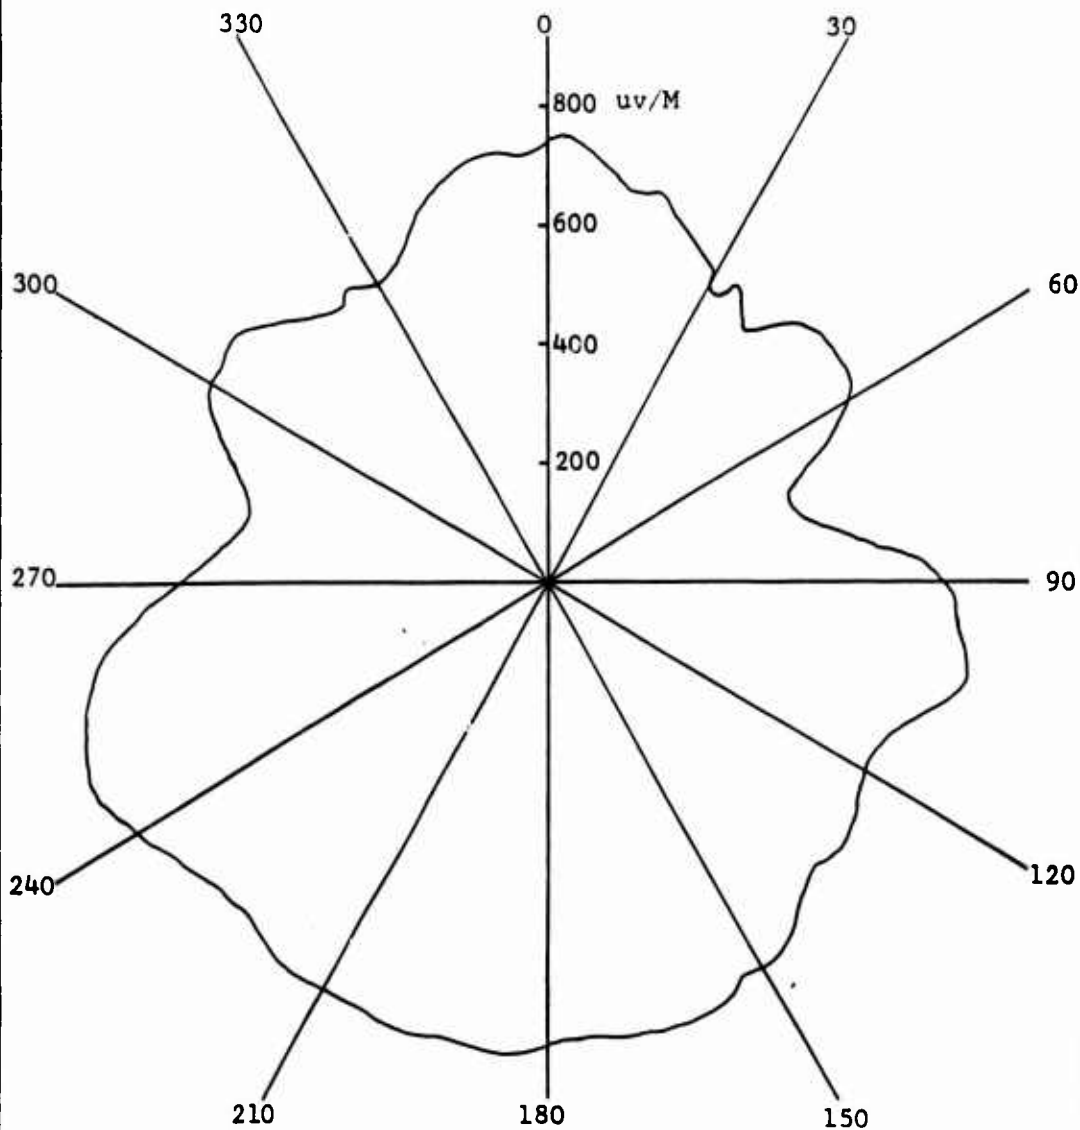

J. Mast

R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 48

RPT 206-099-212B


DATA SHEET NO. 27

NUMBER TWO FM COMMUNICATION ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-543

Range 18 Miles .

Altitude 1000 feet

49.80 MHz

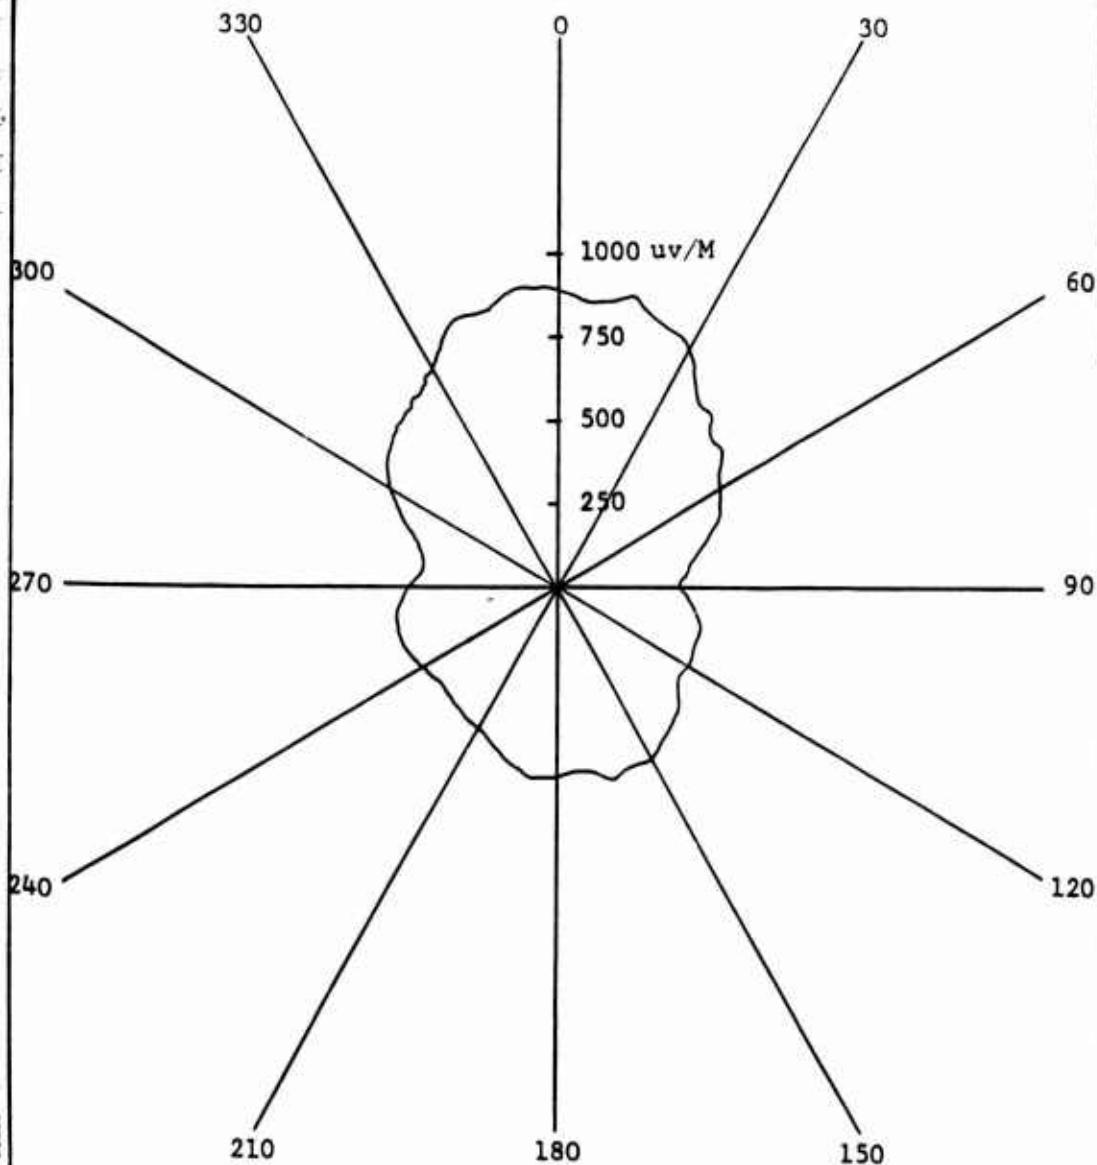

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 49

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 28

NUMBER TWO FM COMMUNICATION ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-543

Range 18 Miles

Altitude 1000 feet

54.50 MHz

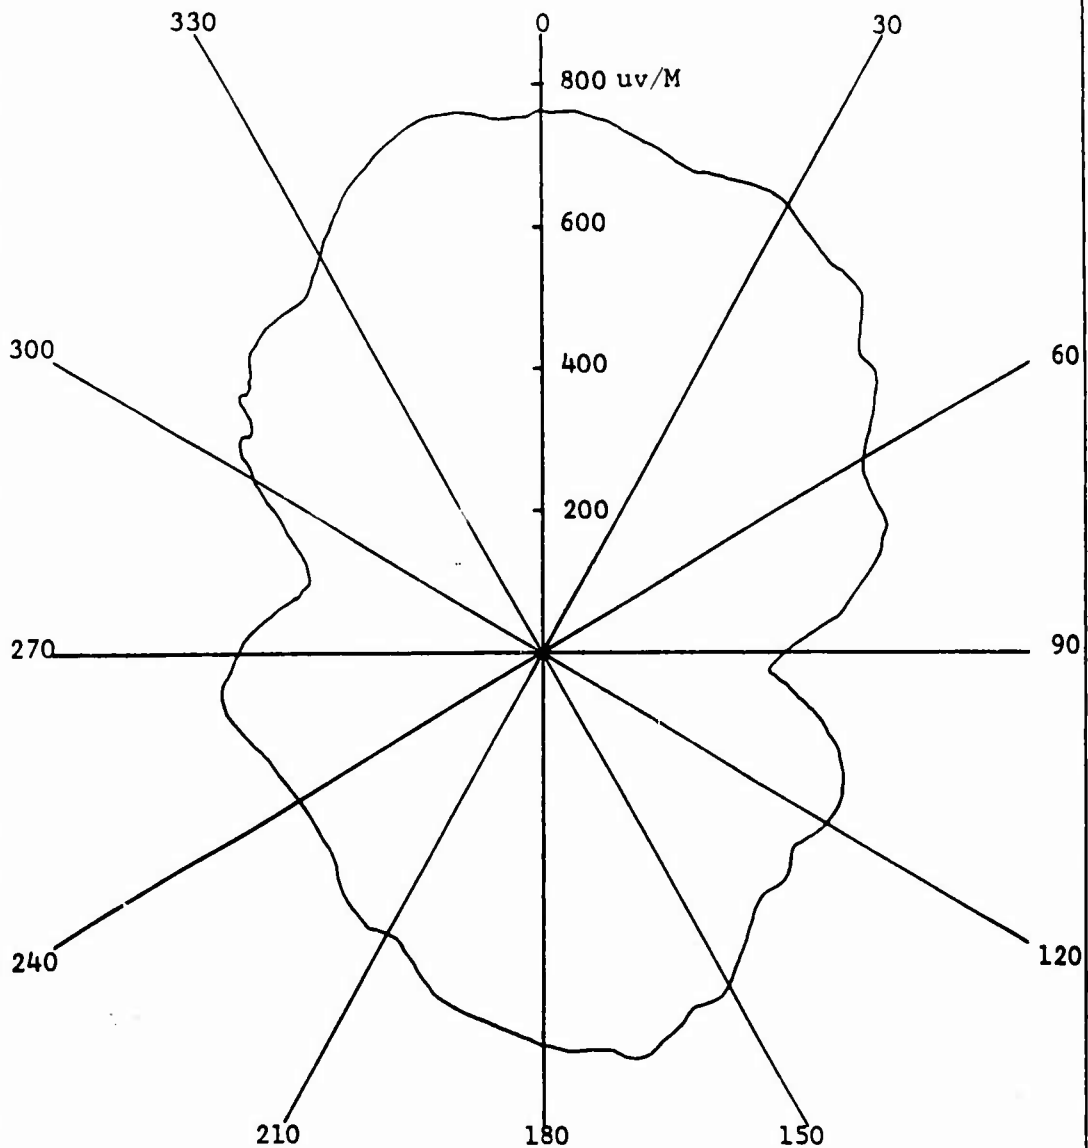

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 107 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 50

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 29

NUMBER TWO FM COMMUNICATION ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-543

Range 18 Miles

Altitude 1000 feet

57.80 MHz

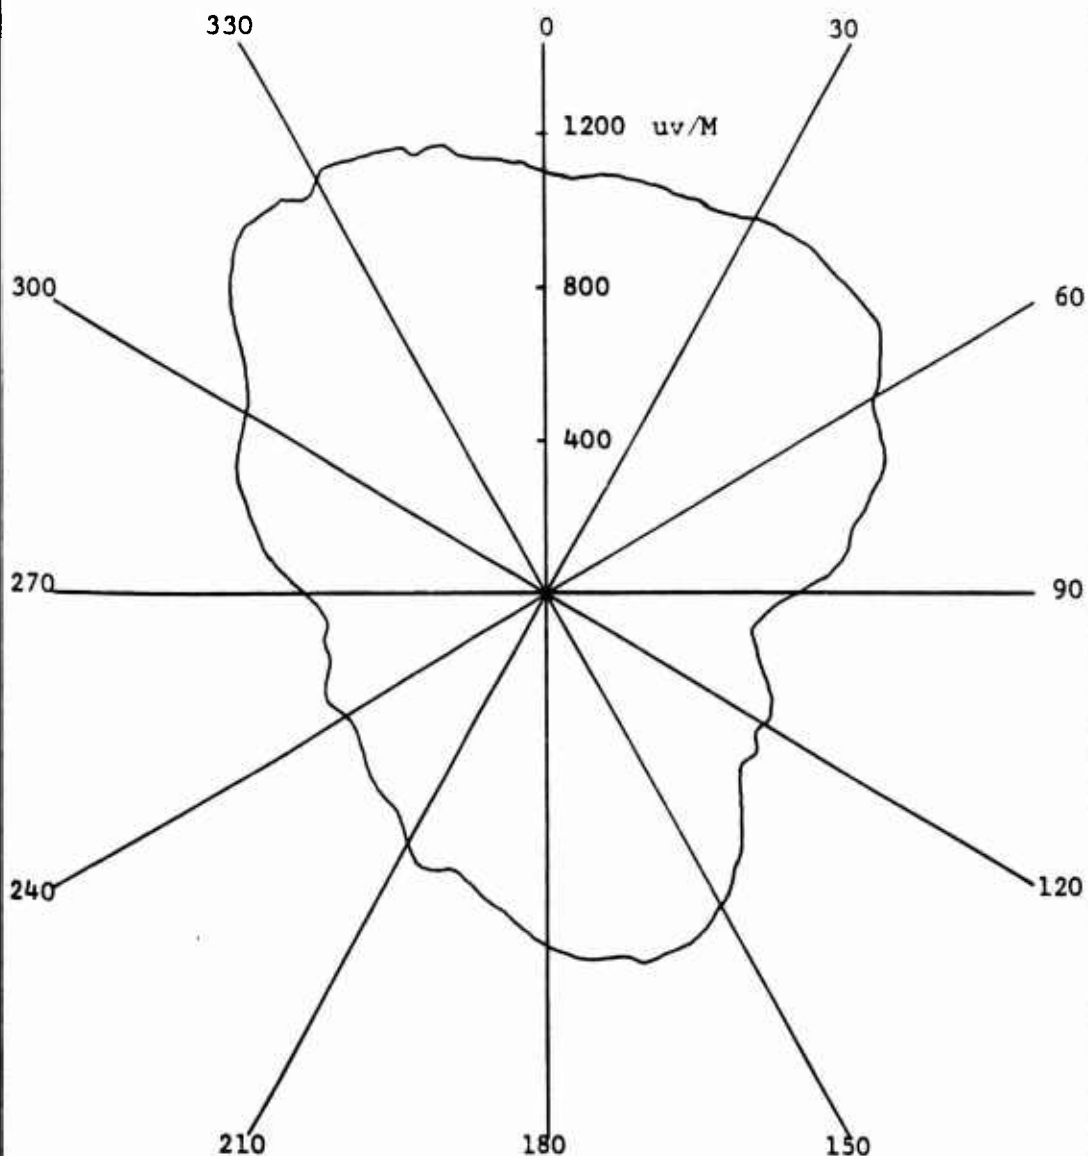

BY J. Mast
CHECKED R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 51
RPT 206-099-212B


DATA SHEET NO. 30

NUMBER TWO FM COMMUNICATION ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-543

Range 18 Miles

Altitude 1000 feet

60.00 MHz

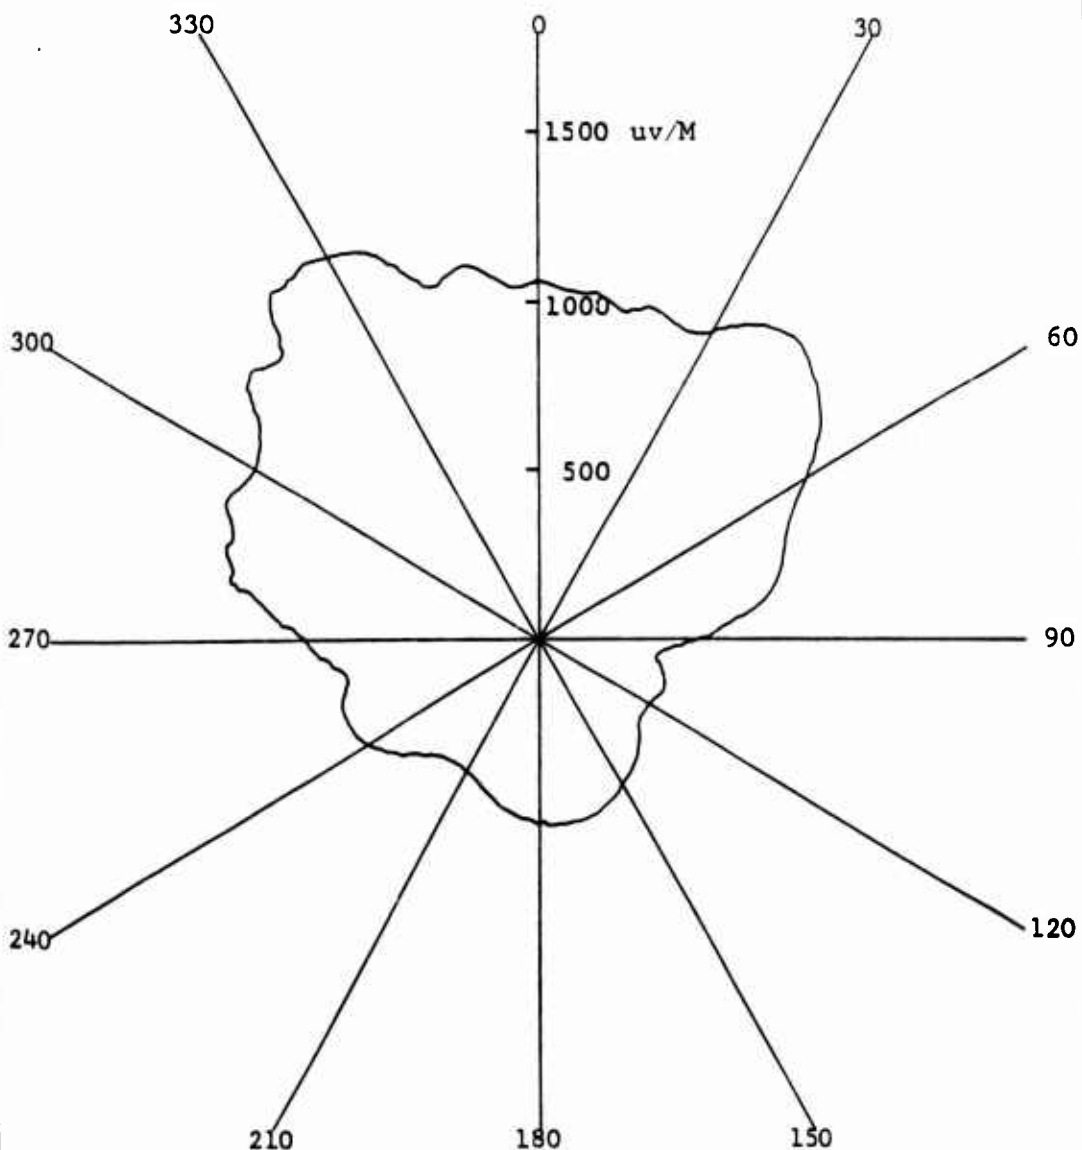

Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 400 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 52
RPT 206-099-212B


DATA SHEET NO. 31

NUMBER TWO FM COMMUNICATION ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-543

Range 18 Miles

Altitude 1000 feet

65.95 MHz

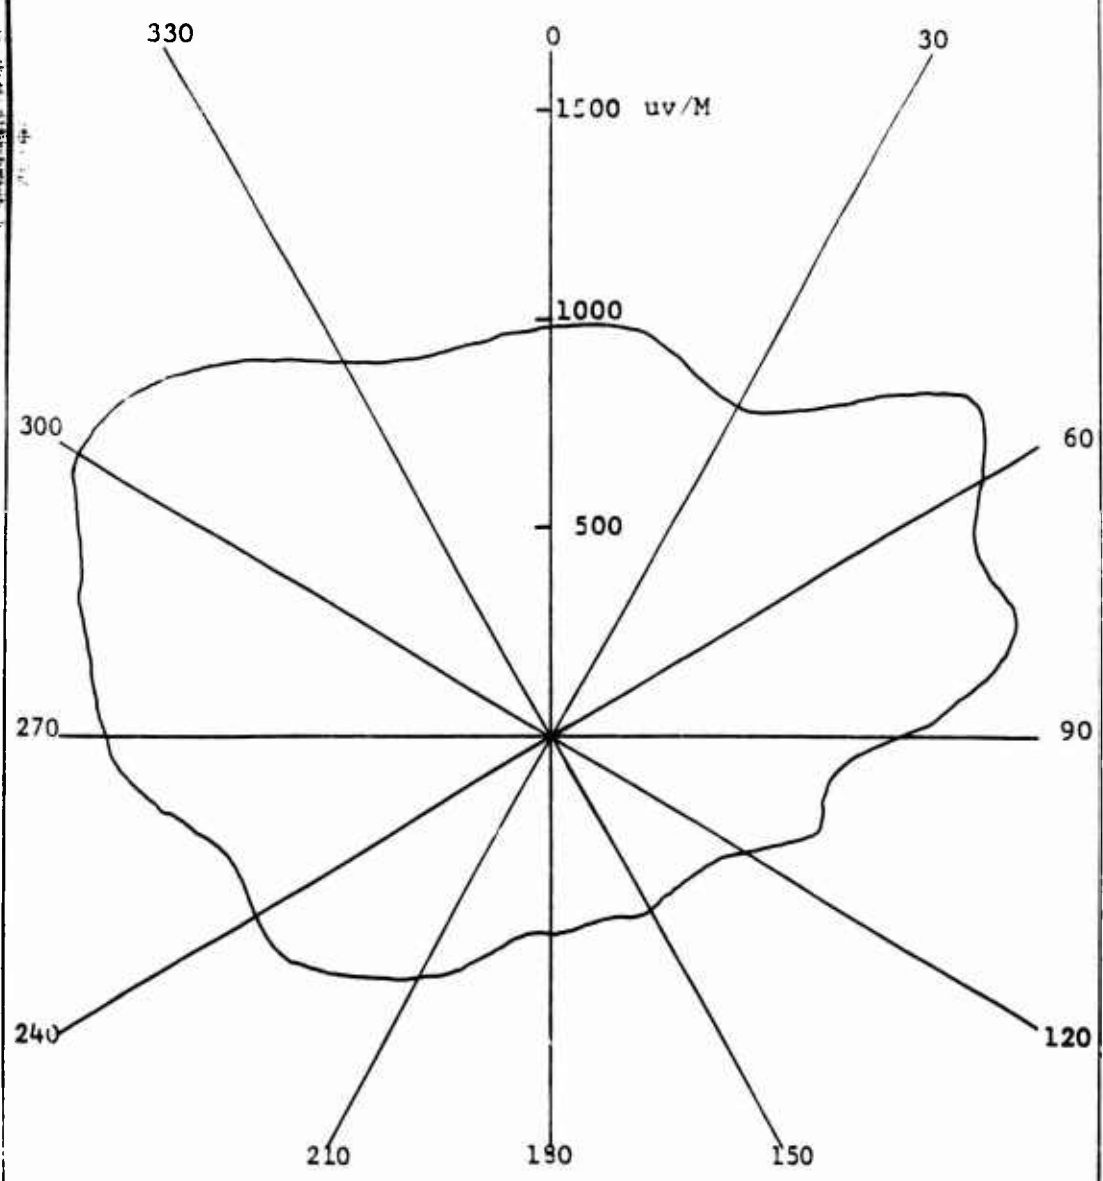

7072 93420

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 482 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 53

CHECKED R. Henschel

RPT. 206-099-212B


DATA SHEET NO. 32

NUMBER TWO FM COMMUNICATION ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-543

Range 18 Miles

Altitude 1000 feet

72.05 MHz

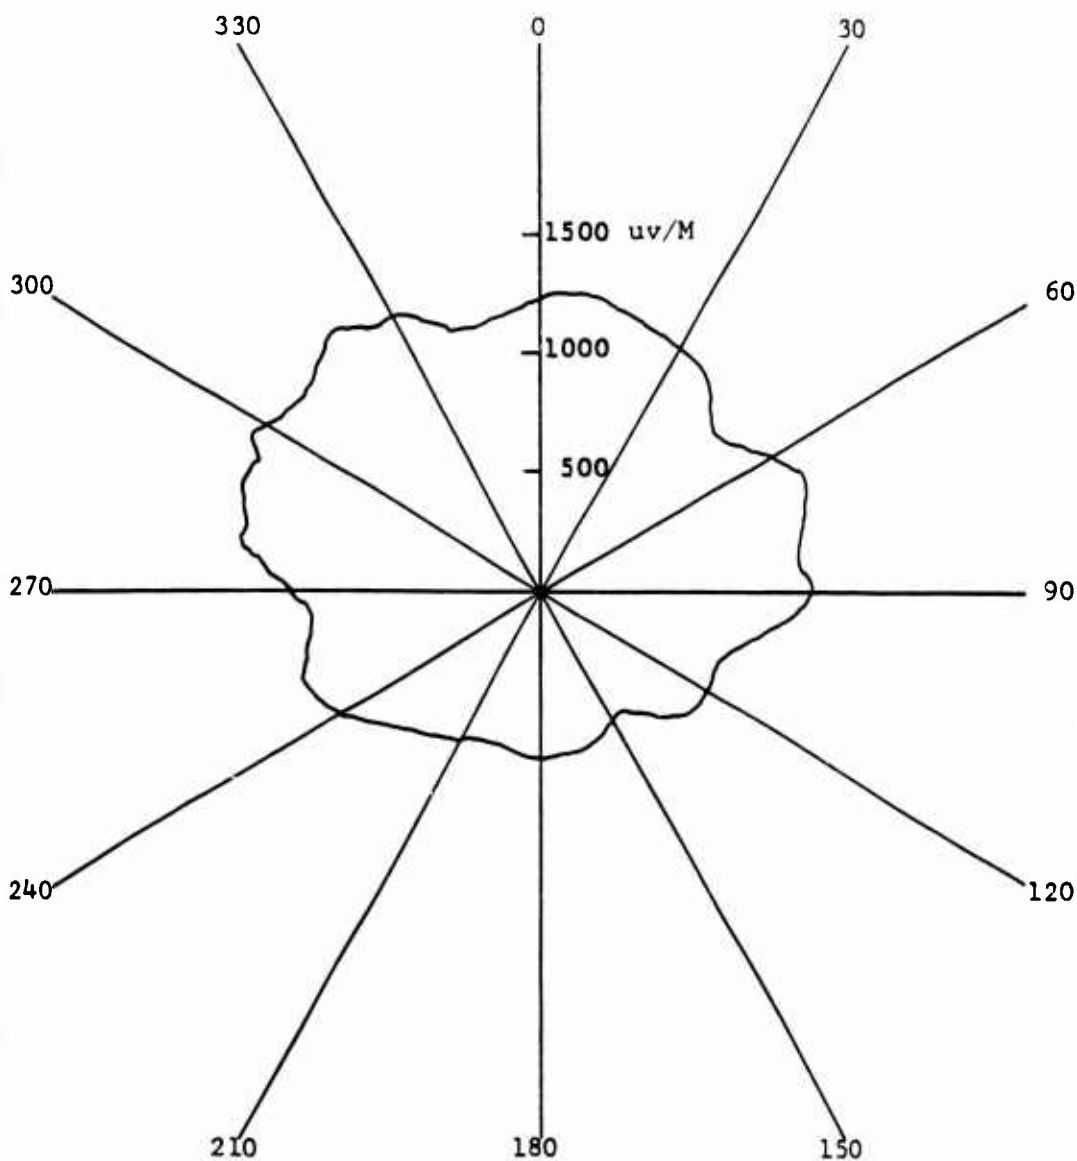

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 487 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 54

CHECKED R. Henschel

RPT. 206-099-212B


DATA SHEET NO. 33

NUMBER TWO FM COMMUNICATION ANTENNA
AS-2486/ARC-114 BHC P/N 206-075-543

Range 18 Miles

Altitude 1000 feet

75.60 MHz

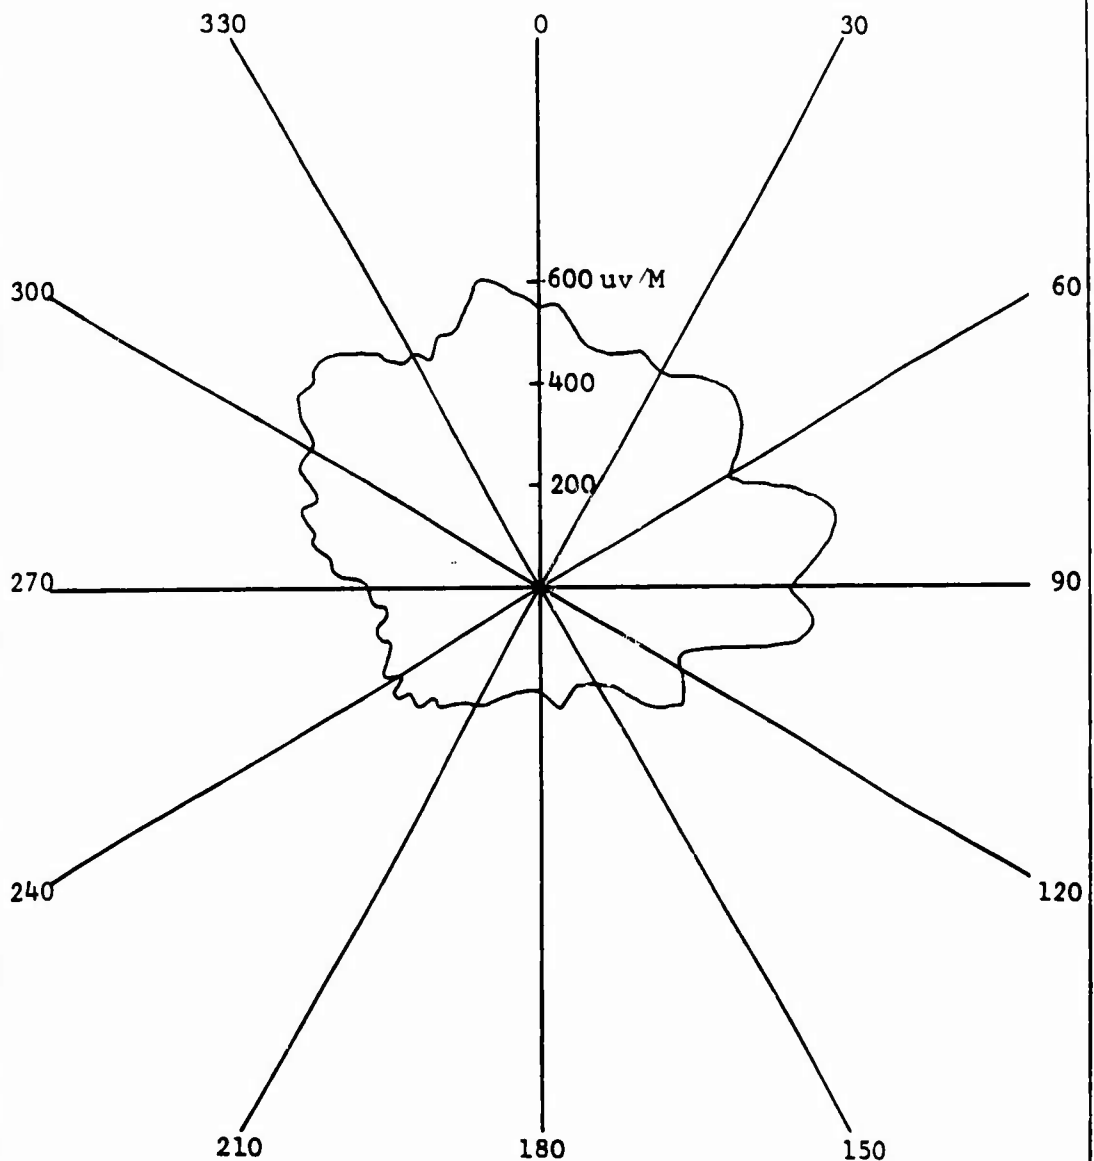

BELL HELICOPTER COMPANY
1000 OFFICE BLDG 402 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 55

RPT 206-099-212B

DATA SHEET NO. 34

VHF COMMUNICATION ANTENNA
BHC P/N 206-075-518
S/N 002

Range 18 Miles

Altitude 1000 feet

<u>FREQ</u> <u>(MHz)</u>	<u>VSWR</u>	<u>MAX</u> <u>(uv/M)</u>	<u>MIN</u> <u>(uv/M)</u>	<u>MIN</u> <u>REQ</u> <u>(uv/M)</u>	<u>db Above</u> <u>Min Req.</u>
126.45	1.4:1	1750	940	520	10.6
128.65	1.5:1	2250	930		12.8
132.60	1.7:1	1260	475		7.7
134.65	2.0:1	1050	555		6.1
138.05	1.4:1	880	405		4.6
141.45	1.4:1	1050	550		6.1
143.85	1.0:1	1340	690		8.2
148.00	1.8:1	1350	805		8.3
148.80	1.8:1	670	440		2.2
149.90	1.9:1	1125	655	520	6.7

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 407 • FORT WORTH 6, TEXAS

MODEL OH-58A PAGE 56

CHECKED R. Henschel

RPT. 206-099-212B


DATA SHEET NO. 35

VHF COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 feet

126.45 MHz

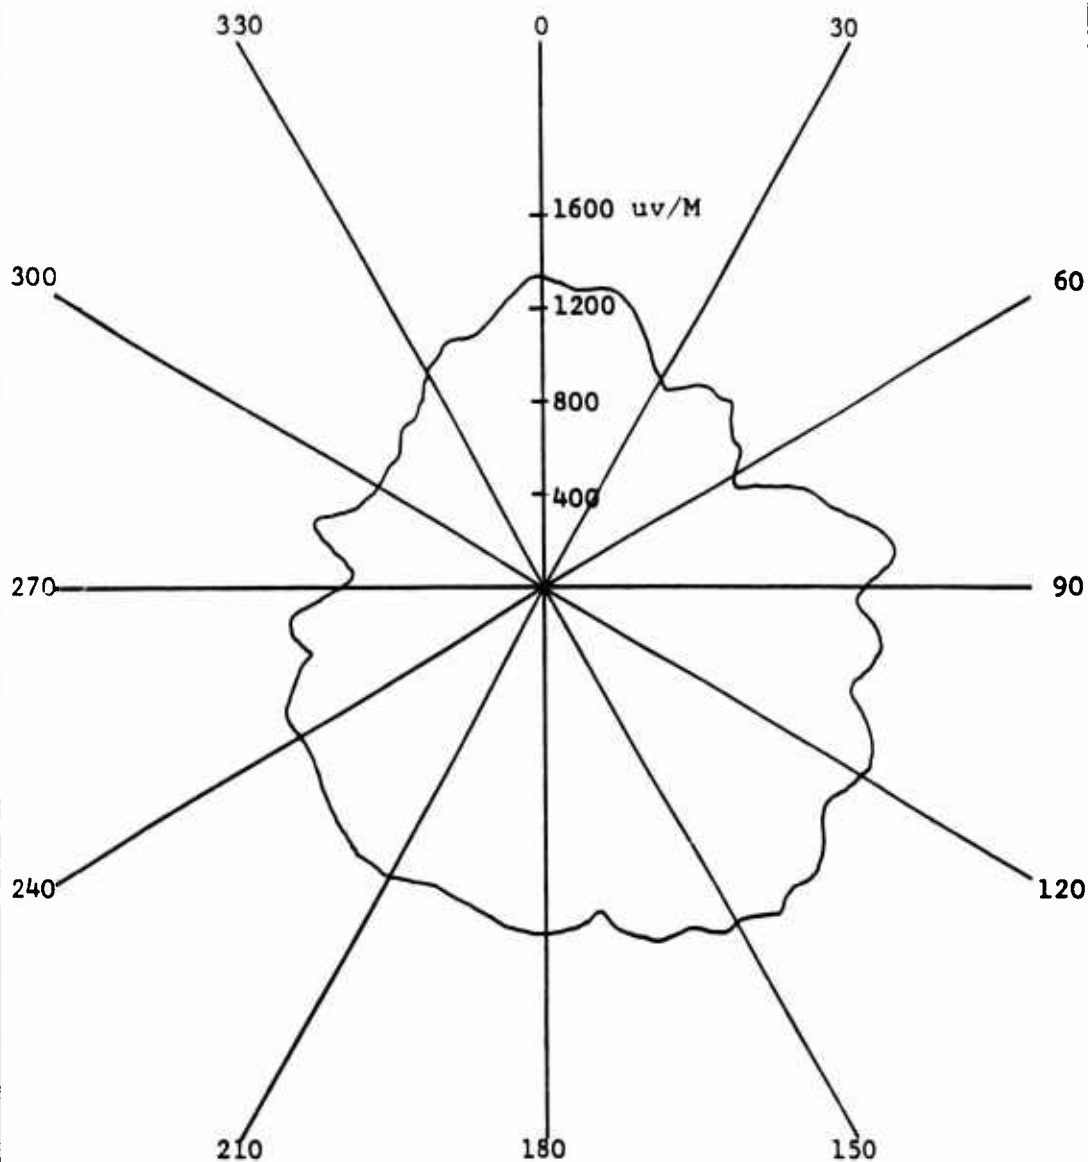

BY J. Mast

CHECKED R. Henschel

BELL HELICOPTER COMPANY

POST OFFICE BOX 402 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 57

RPT 206-099-212B

DATA SHEET NO. 36


VHF COMMUNICATION ANTENNA

BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 Feet

128.65 MHz

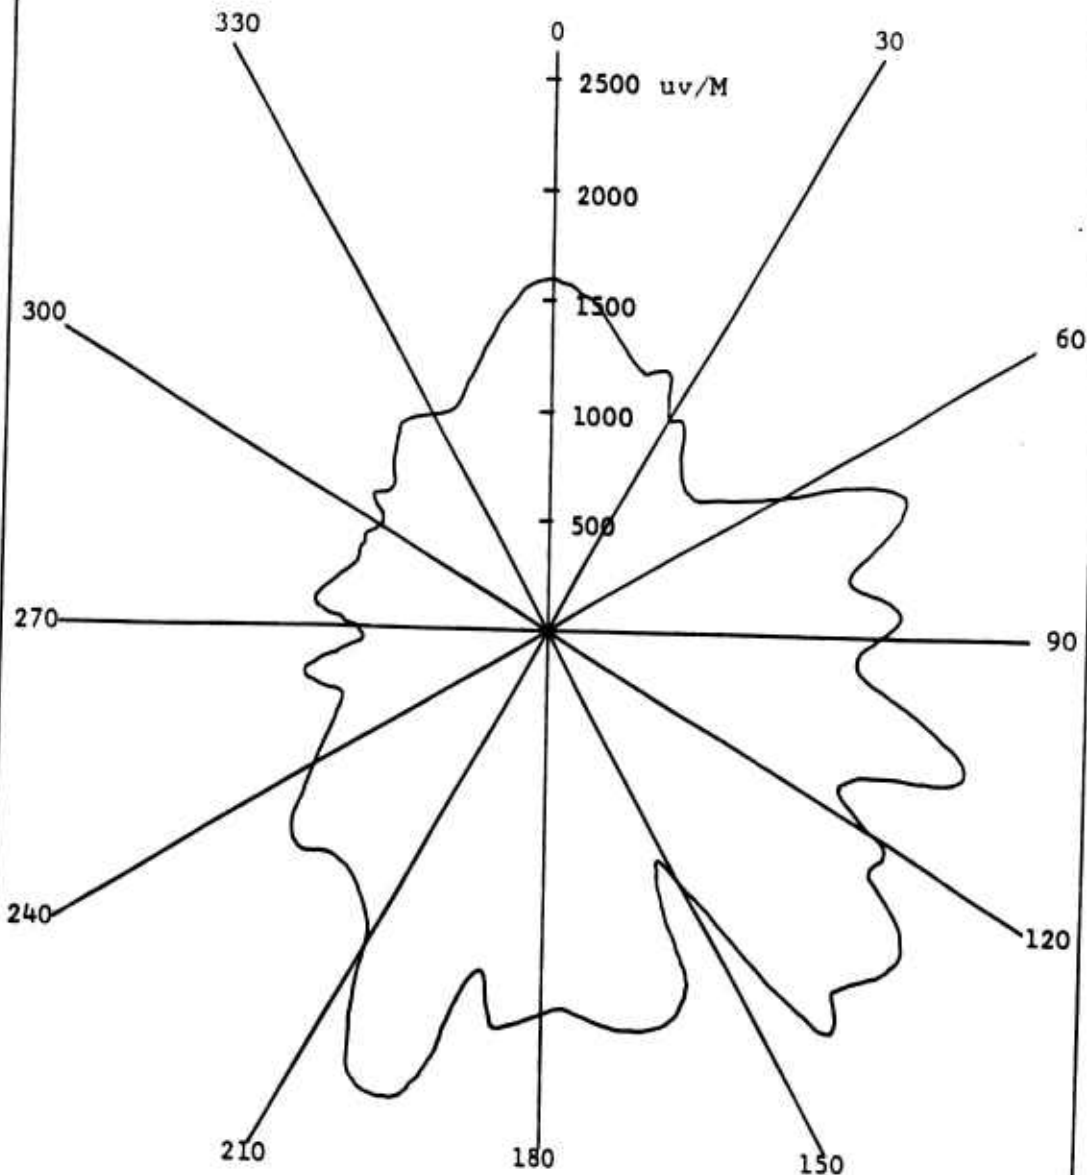

BY J. Mast

CHECKED R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 487 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 58

RPT. 206-099-212B


DATA SHEET NO. 37

VHF COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 Feet

132.60 MHz

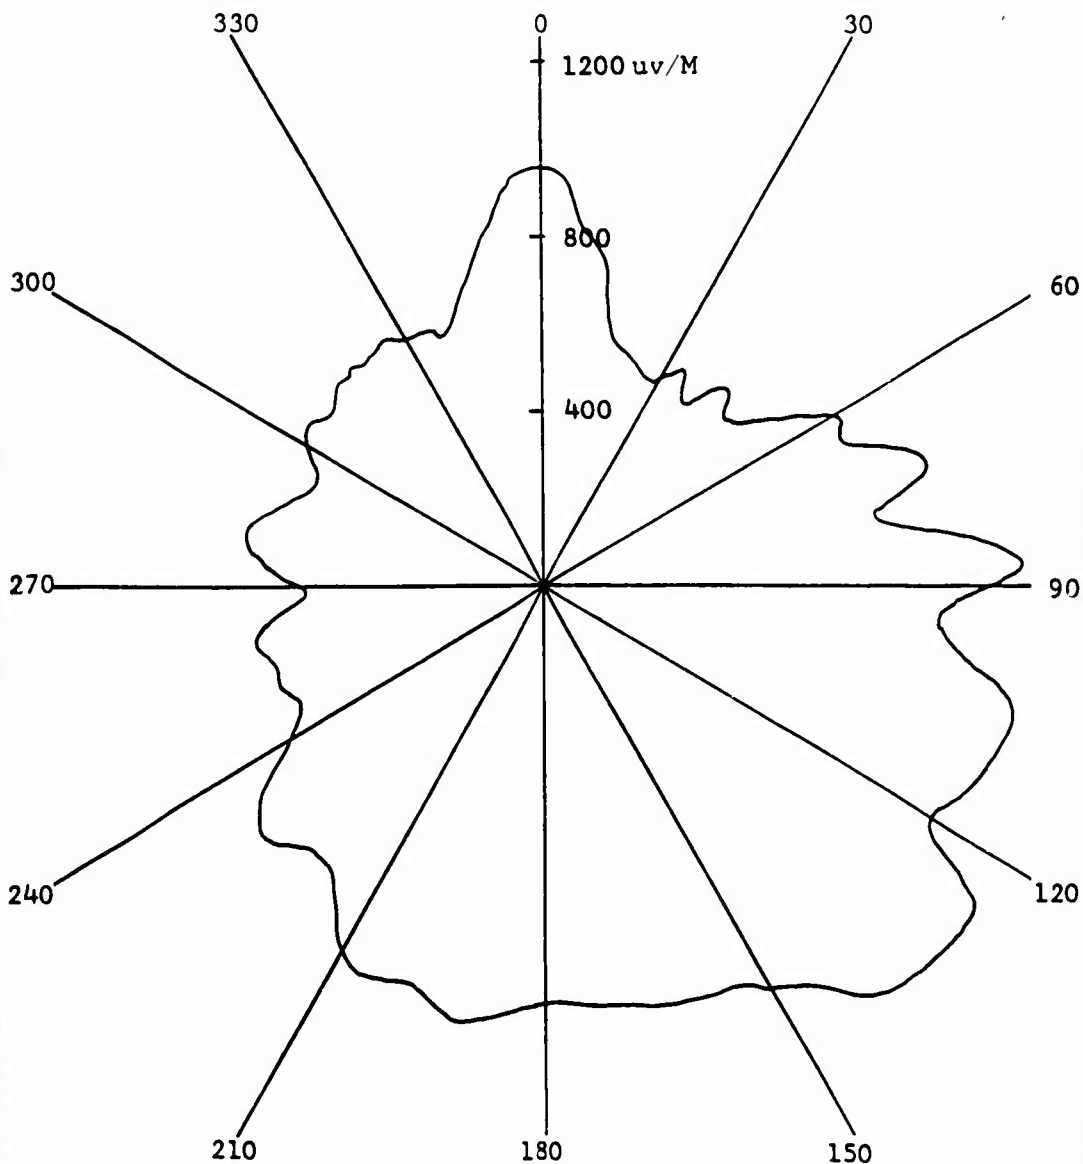

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 59

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 38

VHF COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 Feet

134.65 MHz

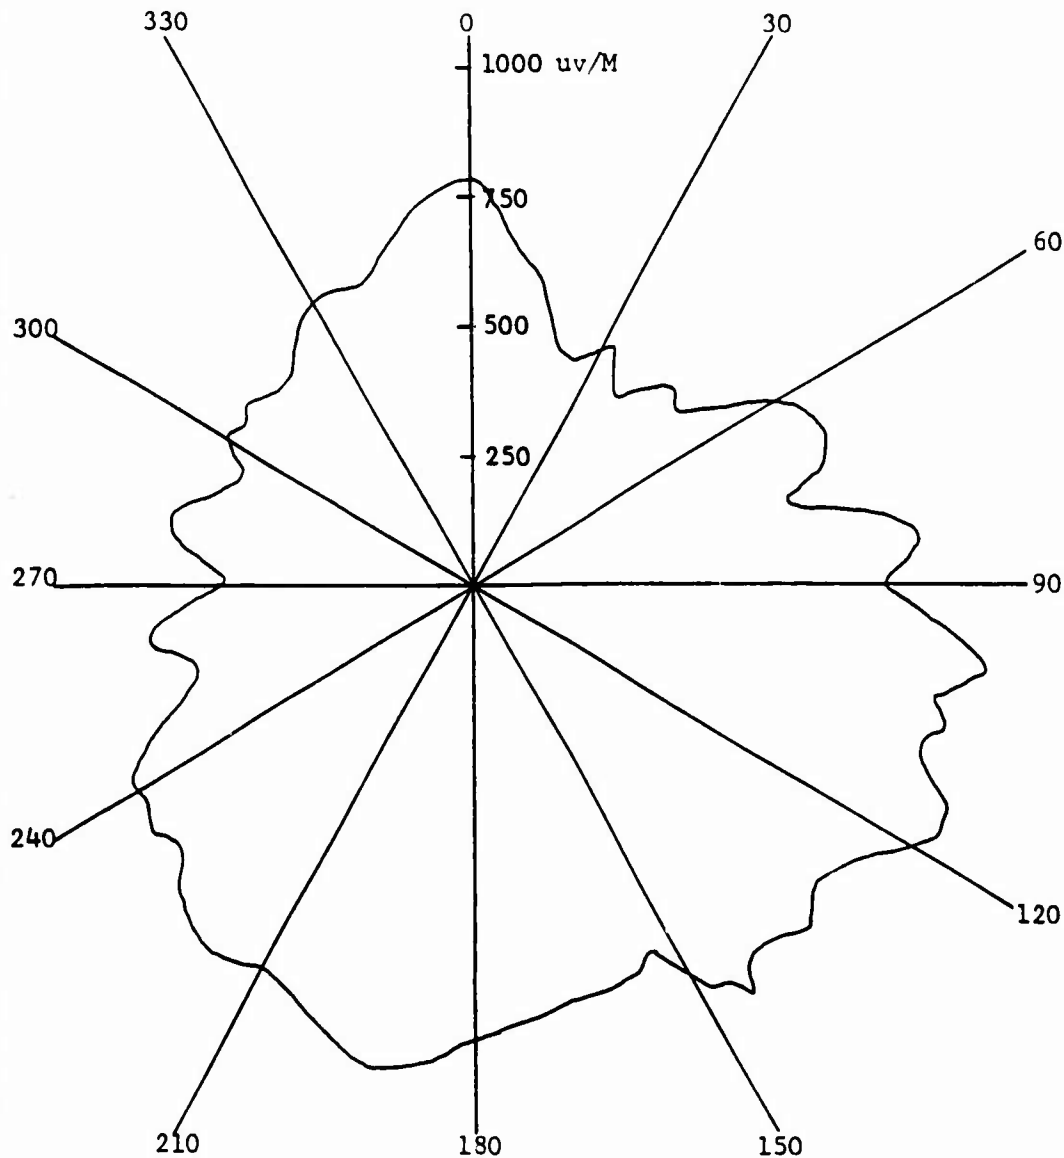

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 60

CHECKED R. Henschel

RPT. 206-099-212B


DATA SHEET NO. 39

VHF COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 Feet

138.05 MHz

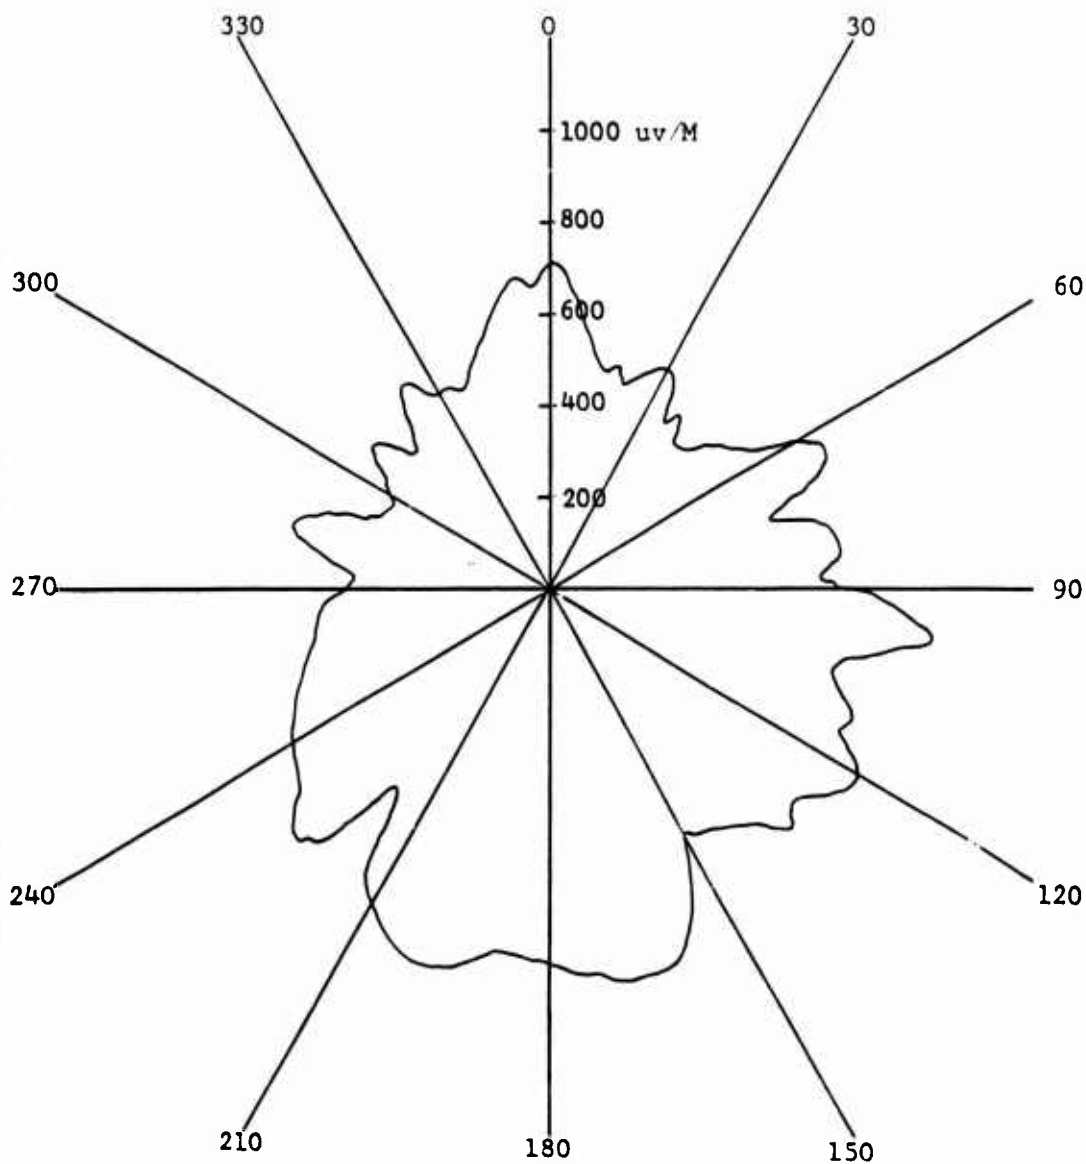

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1 TEXAS

MODEL OH-58A PAGE 61

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 40

VHF COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 Feet

141.45 MHz

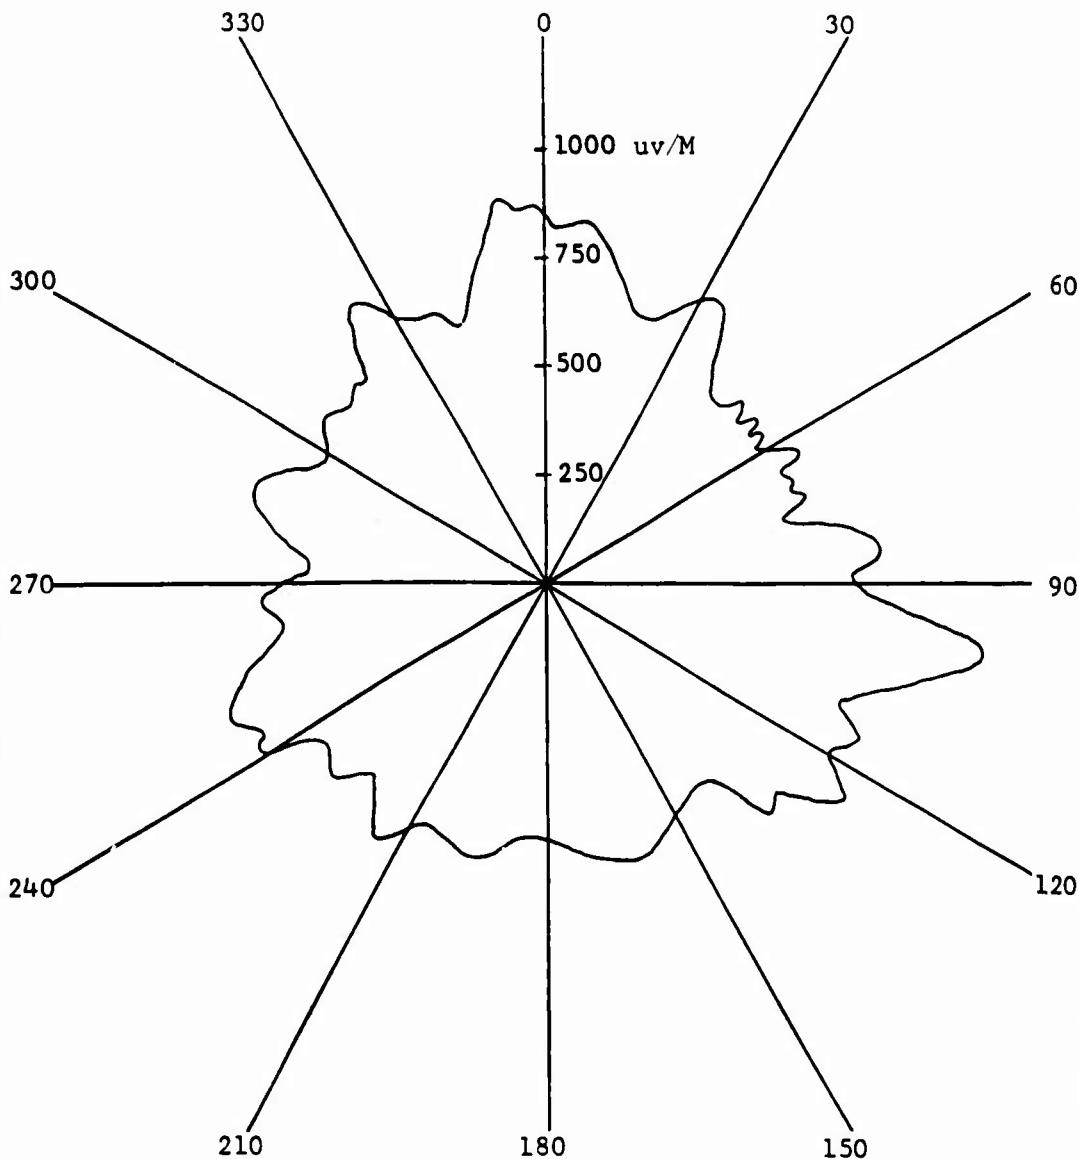

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 FORT WORTH 1 TEXAS

MODEL OH-58A PAGE 62

CHECKED R. Henschel

RPT. 206-099-212B


DATA SHEET NO. 41

VHF COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 Feet

143.85 MHz

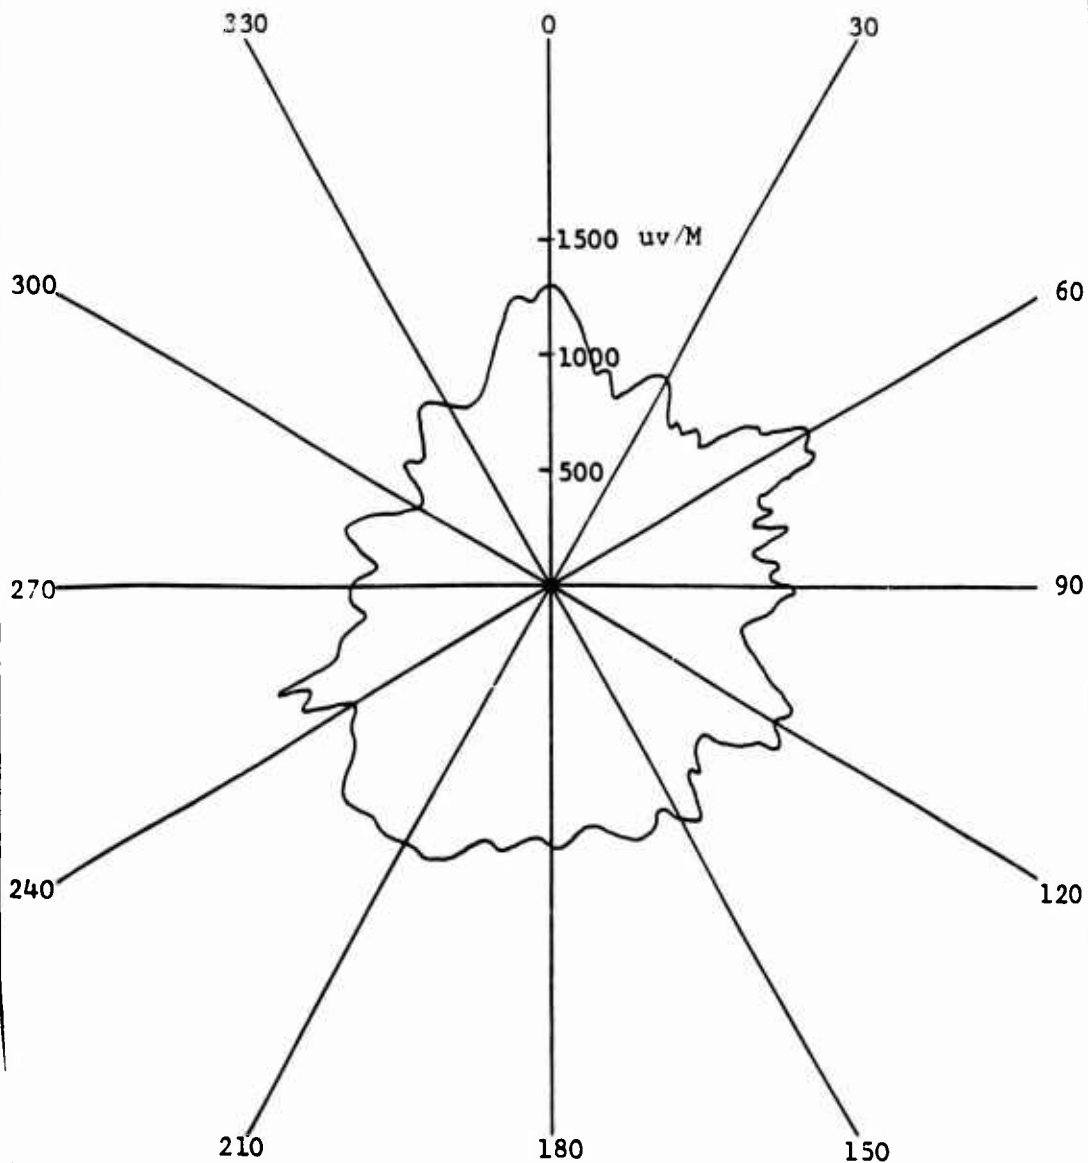

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 407 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 63

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 42

VHF COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 Feet

148.00 MHz

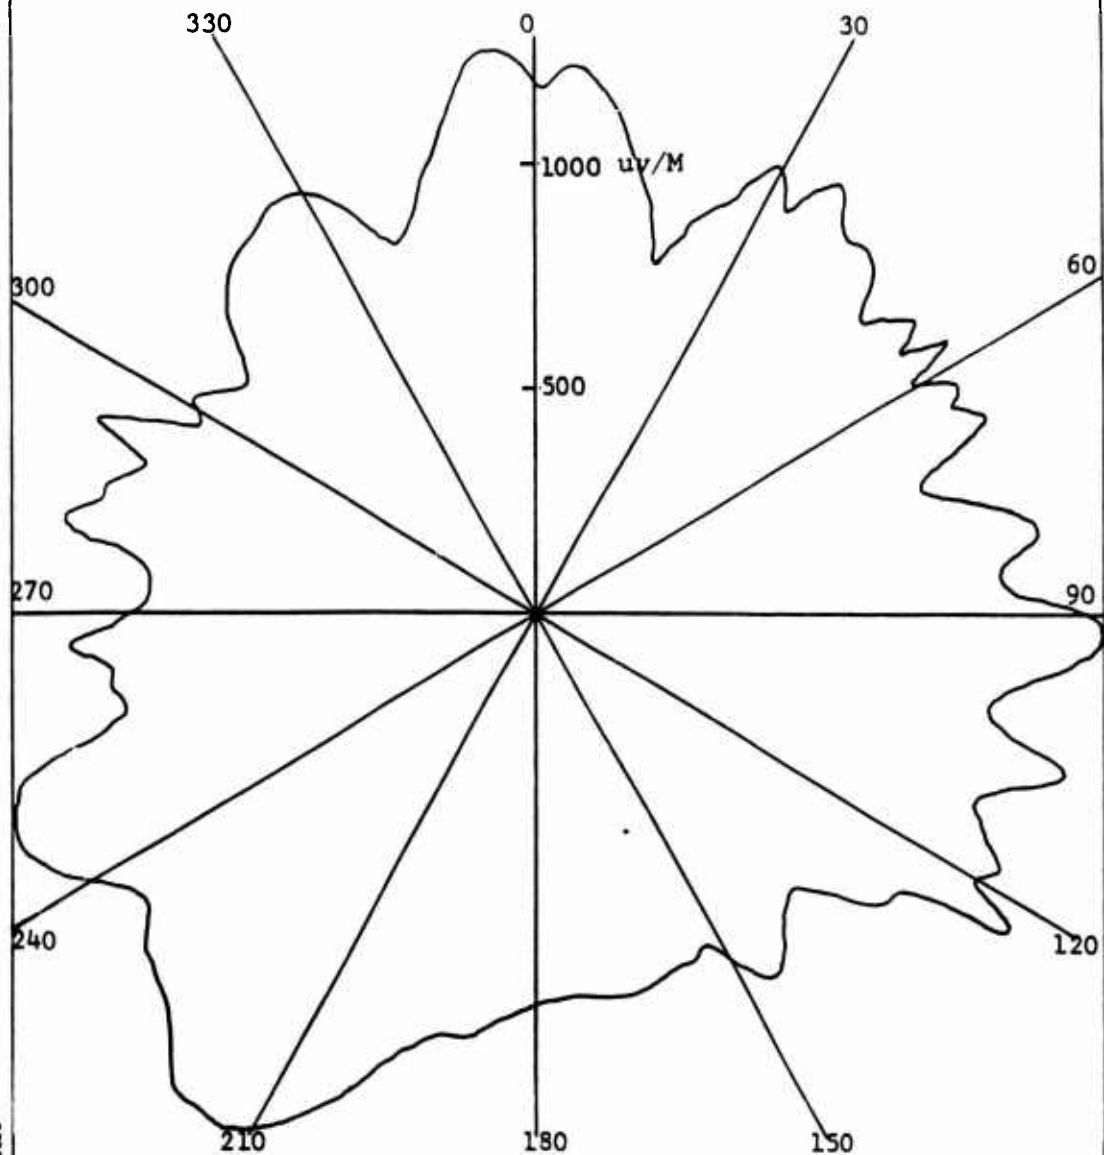

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 FORT WORTH, TEXAS

MODEL OH-58A PAGE 64

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 43

VHF COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 Feet

148.80 MHz

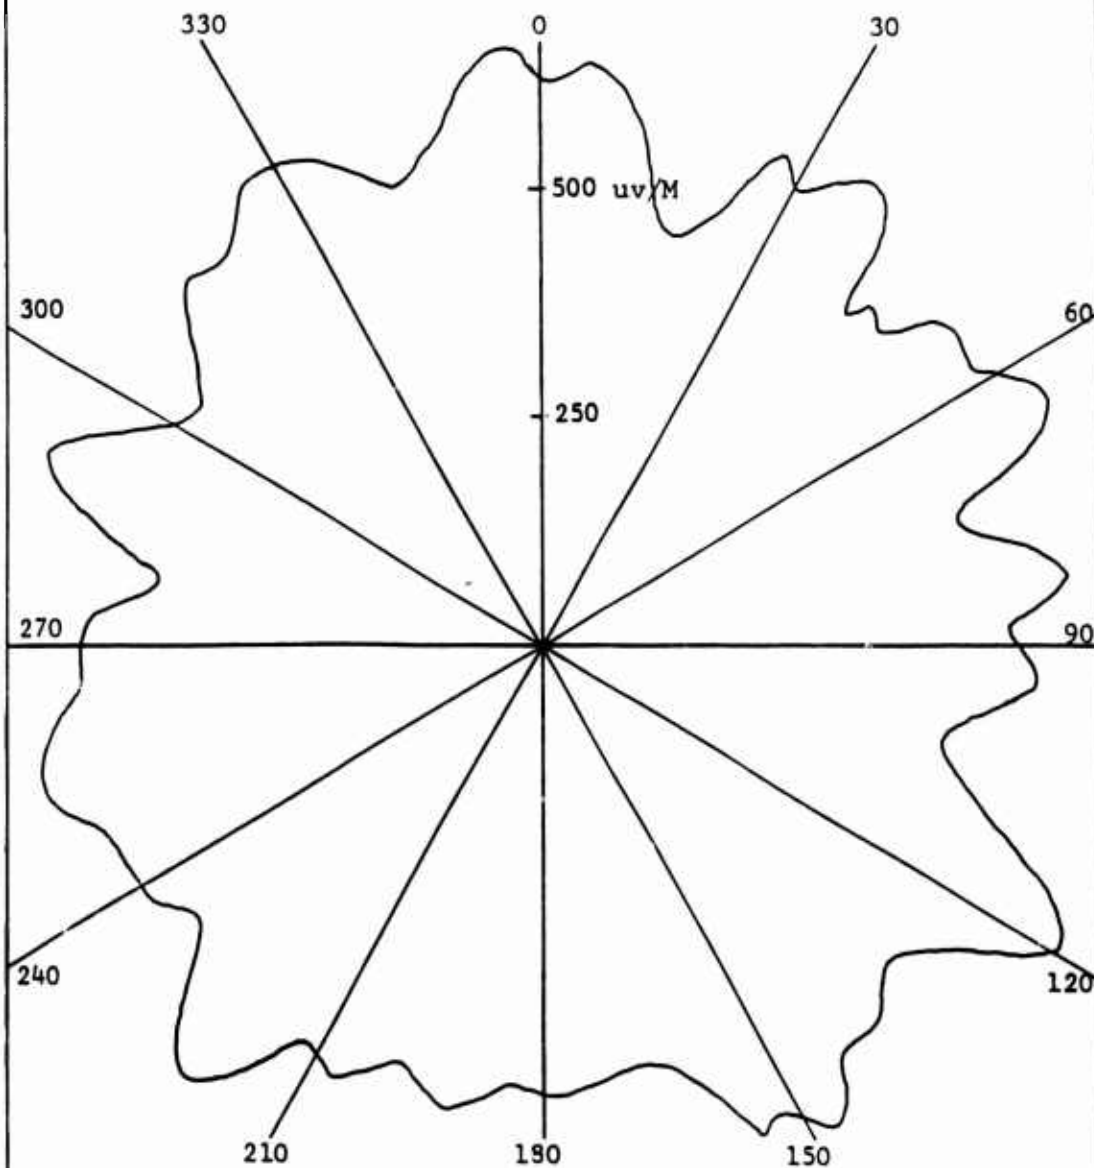

BY J. Mast

CHECKED R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 65

RPT 206-099-212B


DATA SHEET NO. 44

VHF COMMUNICATION ANTENNA
BHC P/N 206-075-518

Range 18 Miles

Altitude 1000 Feet

149.90 MHz

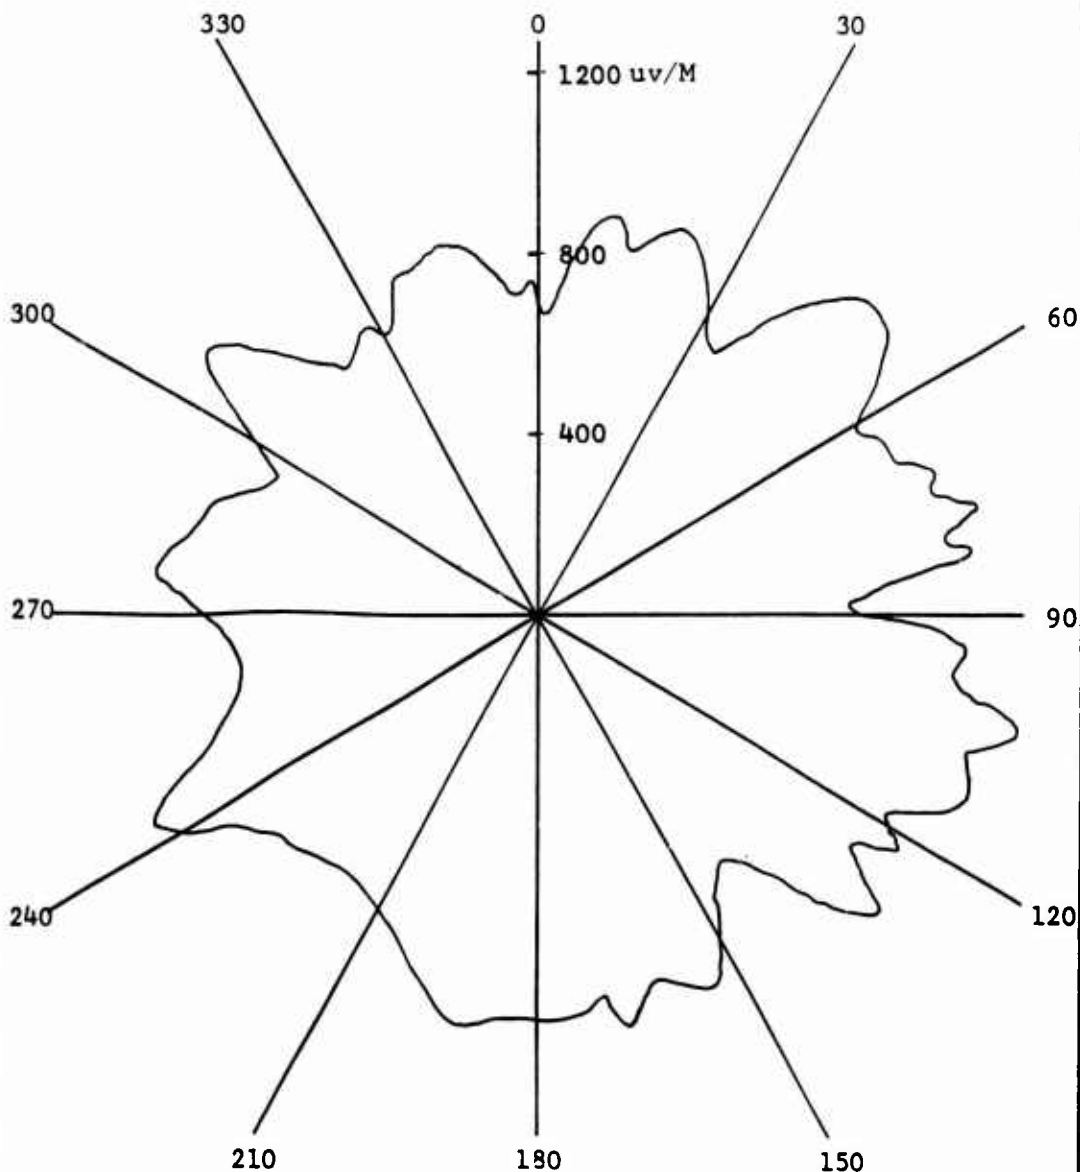

BY <u>J. Mast</u>	BELL HELICOPTER COMPANY POST OFFICE BOX 482 • FORT WORTH 1, TEXAS	MODEL <u>OH-58A</u> PAGE <u>66</u>
CHECKED <u>R. Henschel</u>		RPT <u>206-099-212B</u>

DATA SHEET NO. 45

UHF COMMUNICATION ANTENNA
AS-2487/ARC-116 BHC P/N 206-075-551
S/N 001

Range 18 Miles

Altitude 1000 feet

<u>FREQ</u> <u>(MHz)</u>	<u>VSWR</u>	<u>MAX</u> <u>(uv/M)</u>	<u>MIN</u> <u>(uv/M)</u>	<u>MIN</u> <u>REQ</u> <u>(uv/M)</u>	<u>db Above</u> <u>Min Req.</u>
225.3	1.4:1	5500	2850	520	20.5
242.5	2.0:1	3900	2780		17.4
265.5	2.0:1	8300	4300		24.0
278.5	2.2:1	3500	2300		16.6
299.9	1.8:1	6300	3500		21.6
321.5	1.5:1	6500	3750		22.0
356.5	1.9:1	5500	3450		20.5
374.4	1.9:1	7800	3950		23.5
386.6	1.7:1	5800	4400		21.0
399.8	1.4:1	4500	2000	520	18.8

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 67

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 46

UHF COMMUNICATION ANTENNA
AS-2487/ARC-116 BHC P/N 206-075-551

Range 18 Miles

Altitude 1000 Feet

225.30 MHz

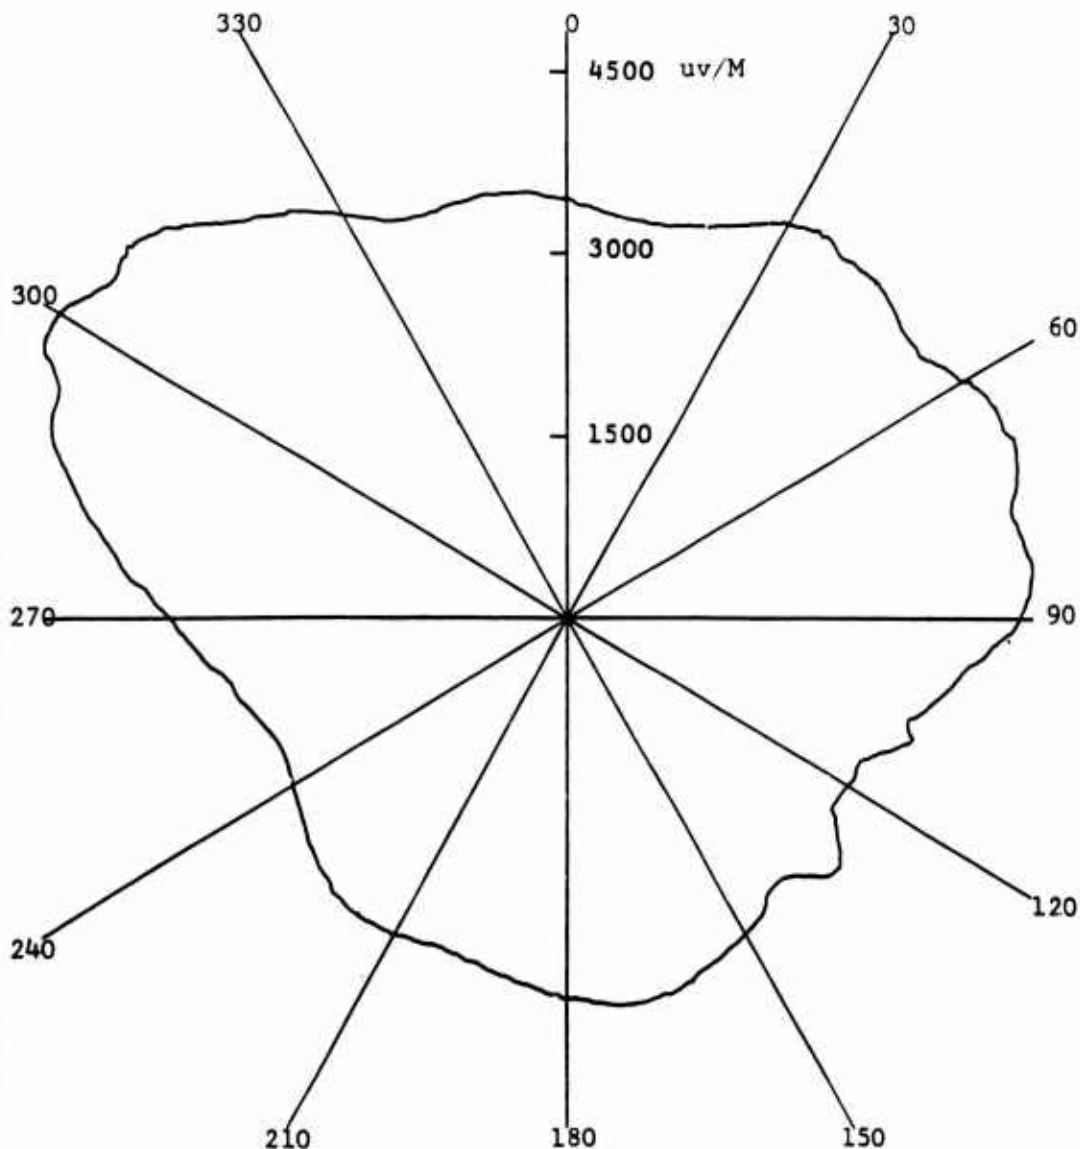

BY <u>J. Mast</u>	BELL HELICOPTER COMPANY POST OFFICE BOX 402 FORT WORTH 1 TEXAS	MODEL <u>OH-58A</u> PAGE <u>68</u>
CHECKED <u>R. Henschel</u>		RPT. <u>206-099-212B</u>


DATA SHEET NO. 47

UHF COMMUNICATION ANTENNA
AS-2487/ARC-116 BHC P/N 206-075-551

Range 18 Miles

Altitude 1000 Feet

242.50 MHz

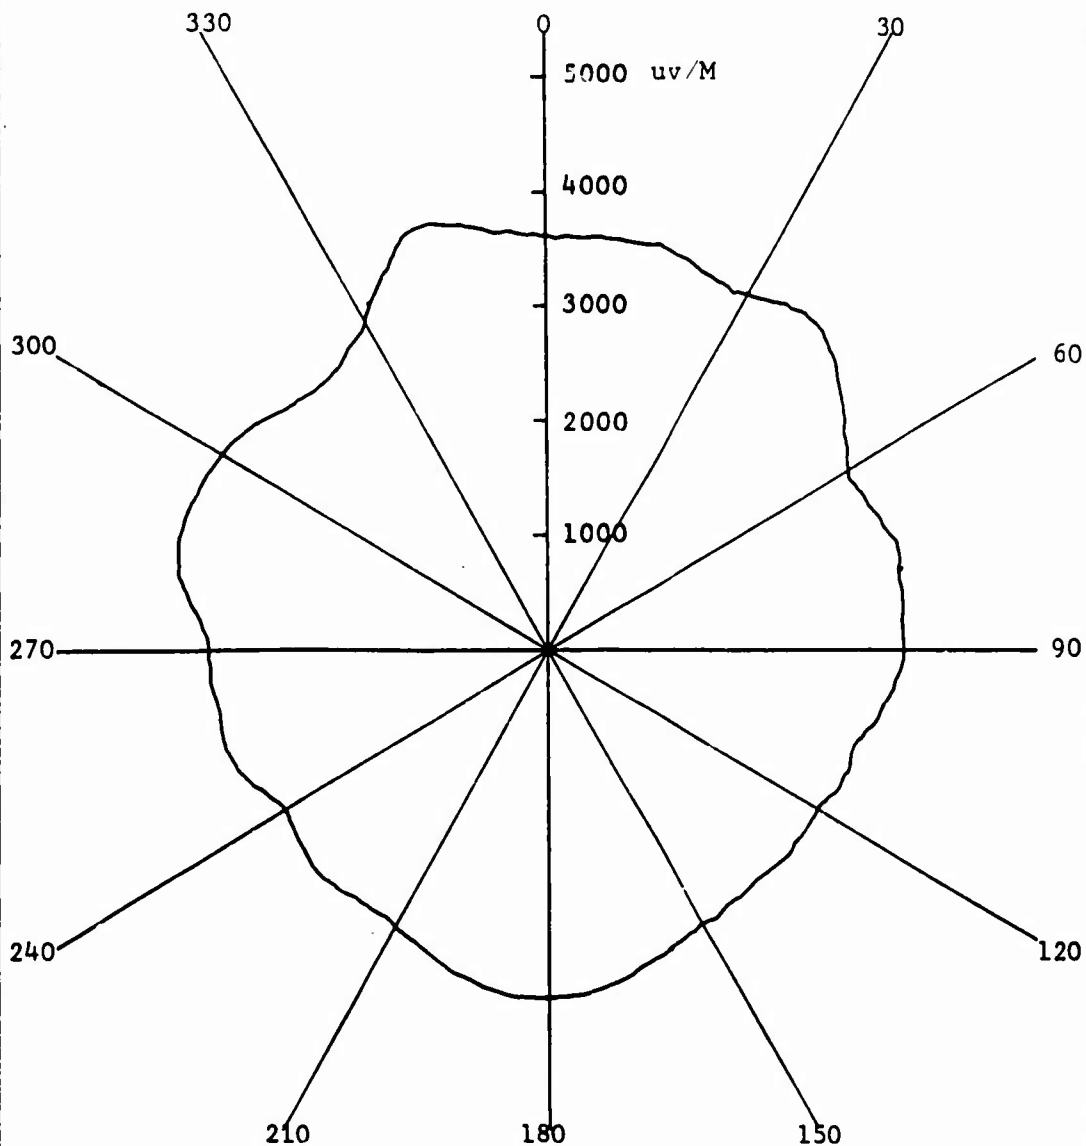

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 481 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 69

CHECKED R. Henschel

RPT. 206-099-212B


DATA SHEET NO. 48

UHF COMMUNICATION ANTENNA
AS-2487/ARC-116 BHC P/N 206-075-551

Range 18 Miles

Altitude 1000 Feet

265.50 MHz

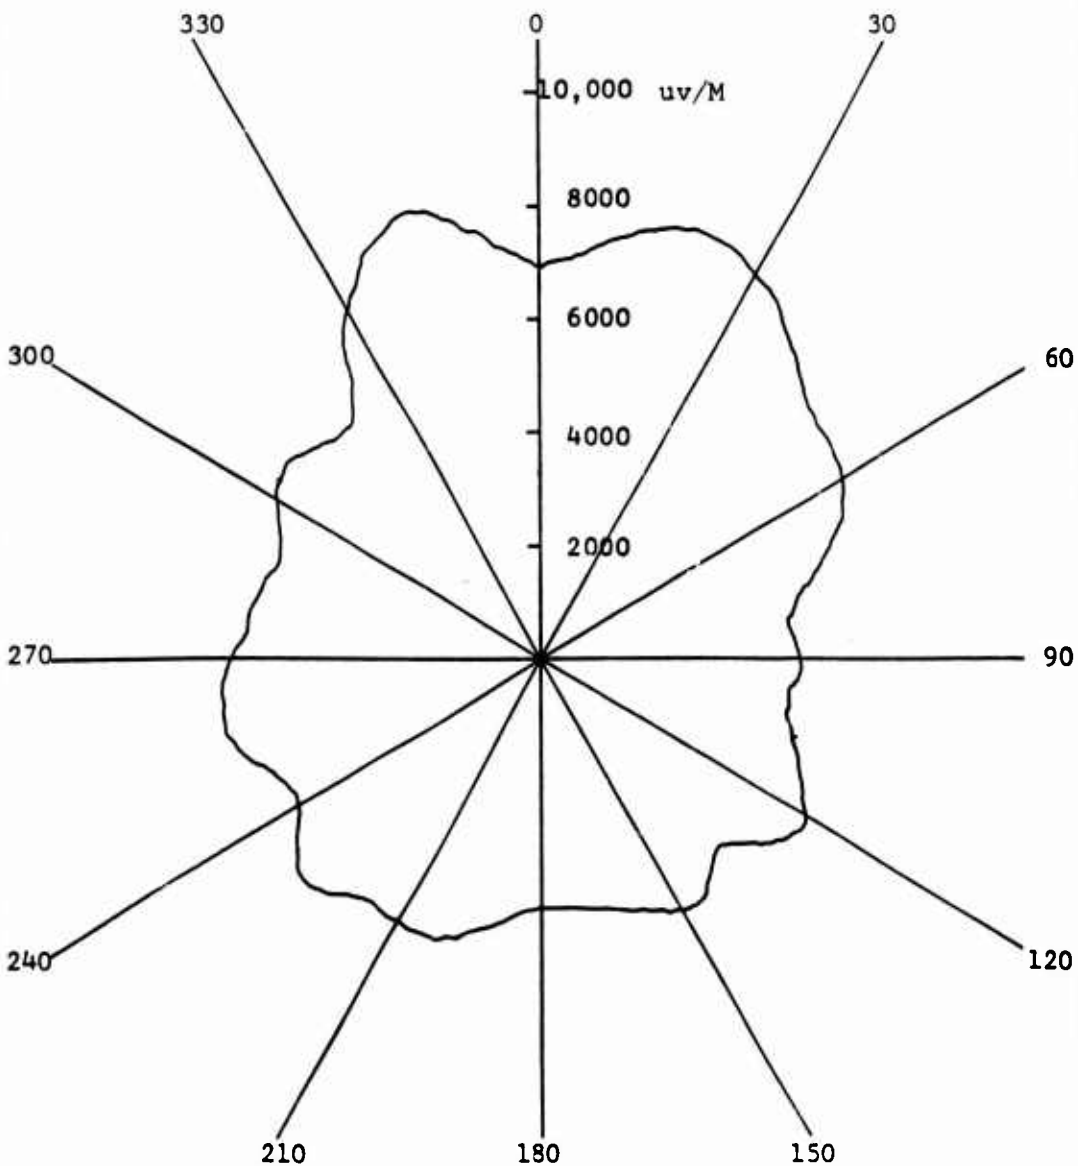

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 407 • FORT WORTH 1, TEXAS

MODEL QH-58A PAGE 70

CHECKED R. Henschel

RPT. 206-099-212B


DATA SHEET NO. 49

UHF COMMUNICATION ANTENNA
AS-2487/ARC-116 BHC P/N 206-075-551

Range 18 Miles

Altitude 1000 Feet

278.50 MHz

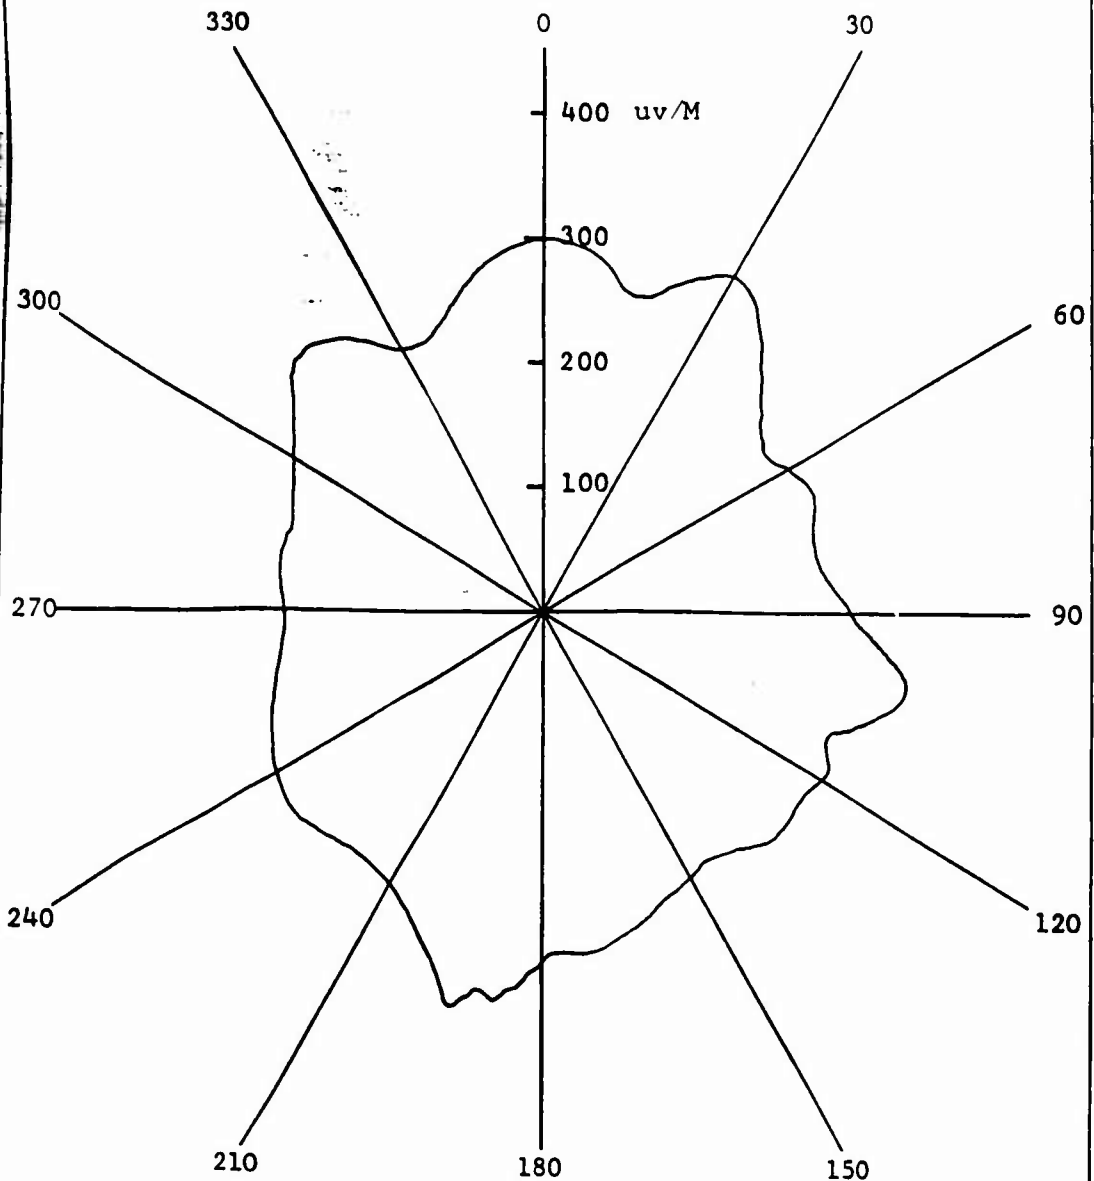

BY J. Mast

BELL HELICOPTER COMPANY

MODEL OH-58A PAGE 71

CHECKED R. Henschel

POST OFFICE BOX 402 • FORT WORTH 1, TEXAS

RPT 206-099-212B


DATA SHEET NO. 50

UHF COMMUNICATION ANTENNA
AS-2487/ARC-116 BHC P/N 206-075-551

Range 18 Miles

Altitude 1000 Feet

299.90 MHz

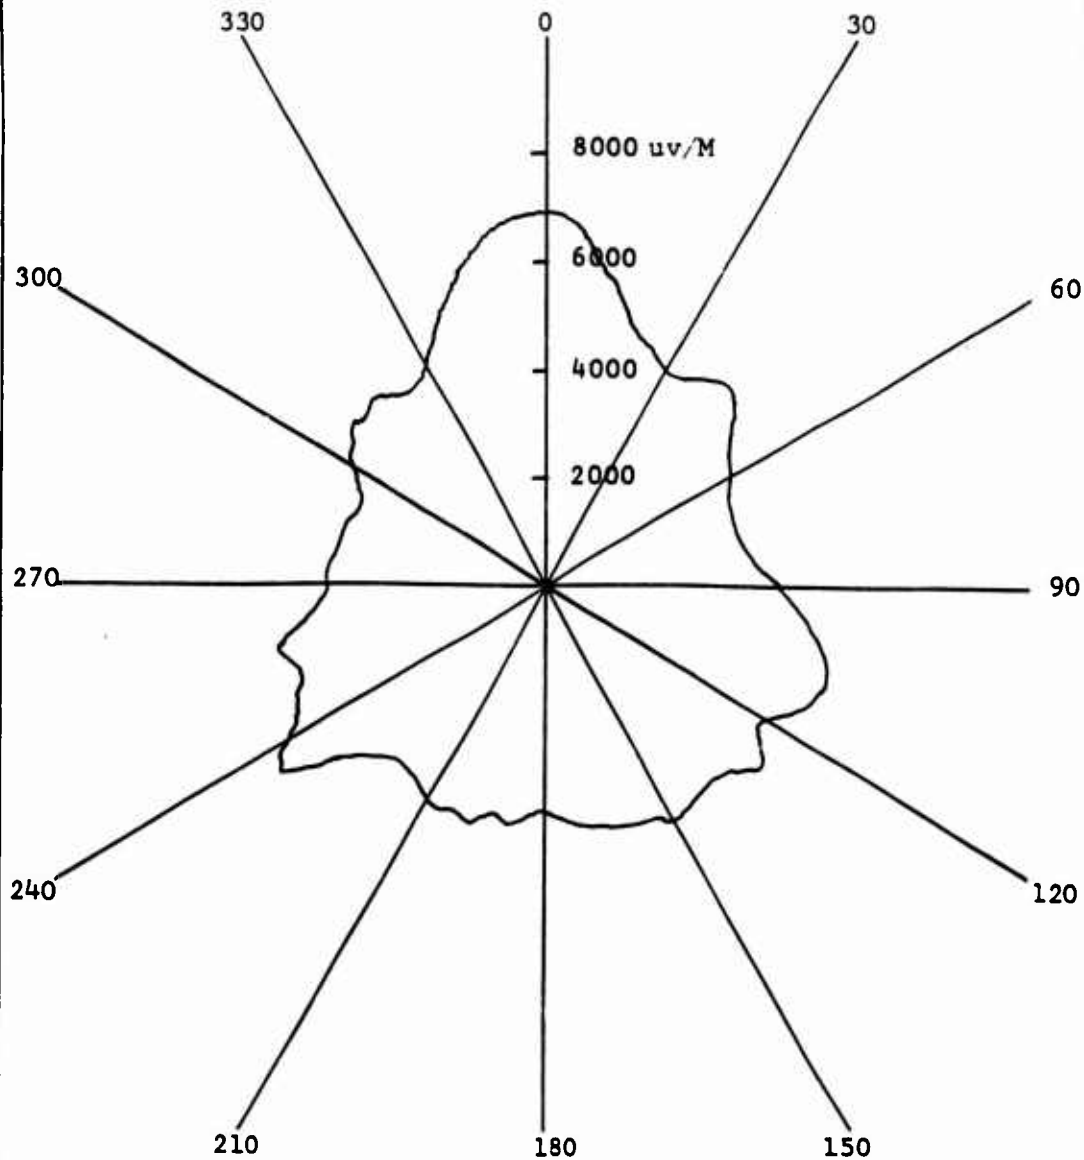

BY J. Mast

CHECKED R. Henschel

BELL HELICOPTER COMPANY
POST OFFICE BOX 400 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 72

RPT 206-099-212B


DATA SHEET NO. 51

UHF COMMUNICATION ANTENNA
AS-2487/ARC-116 BHC P/N 206-075-551

Range 18 Miles

Altitude 1000 Feet

321.50 MHz

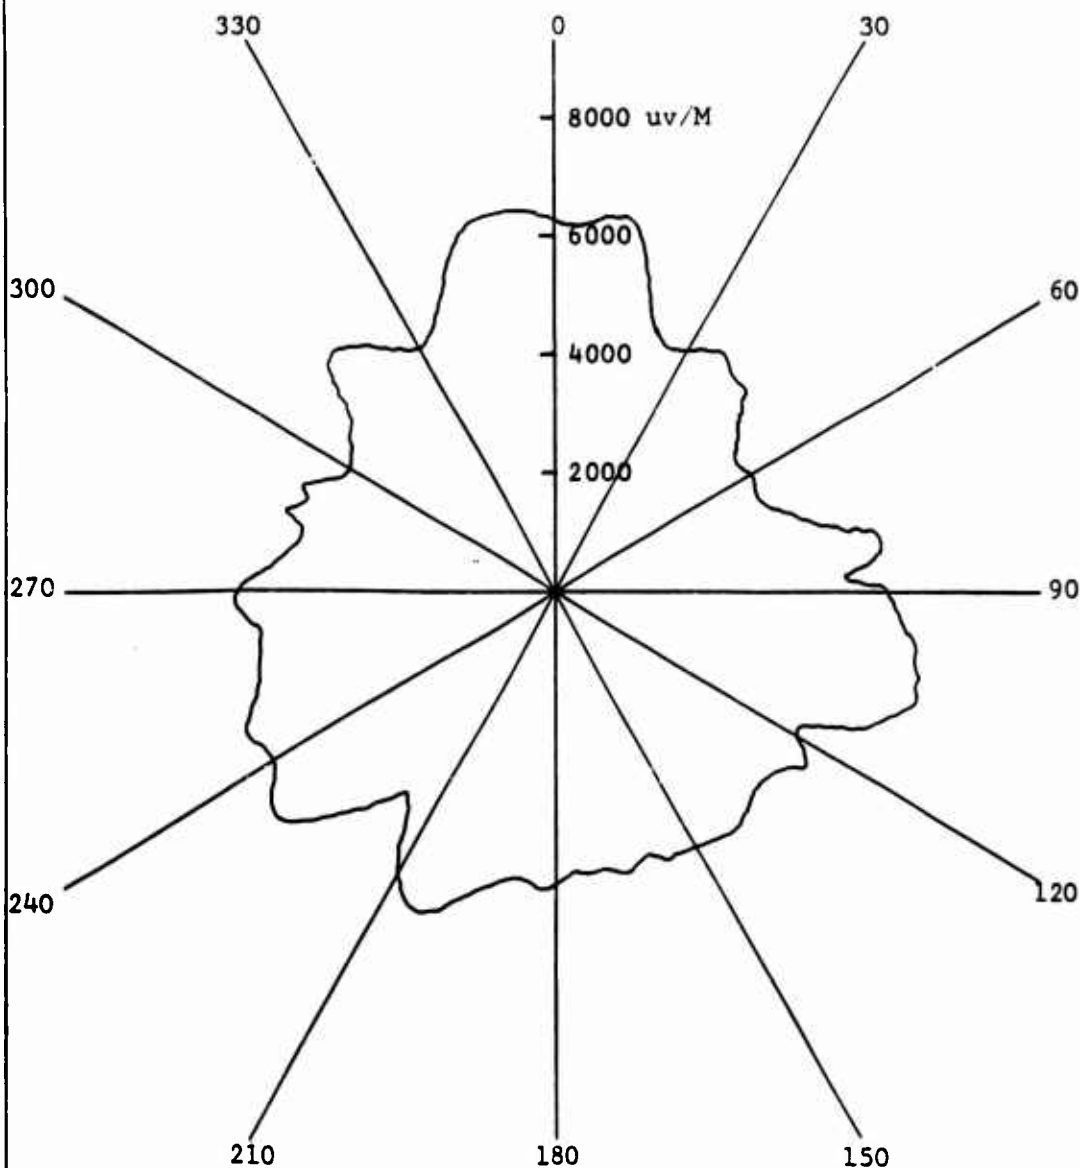

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 482 • FORT WORTH 1, TEXAS

MODEL OH-58A PAGE 73

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 52

UHF COMMUNICATION ANTENNA
AS-2487/ARC-116 BHC P/N 206-075-551

Range 18 Miles

Altitude 1000 Feet

356.50 MHz

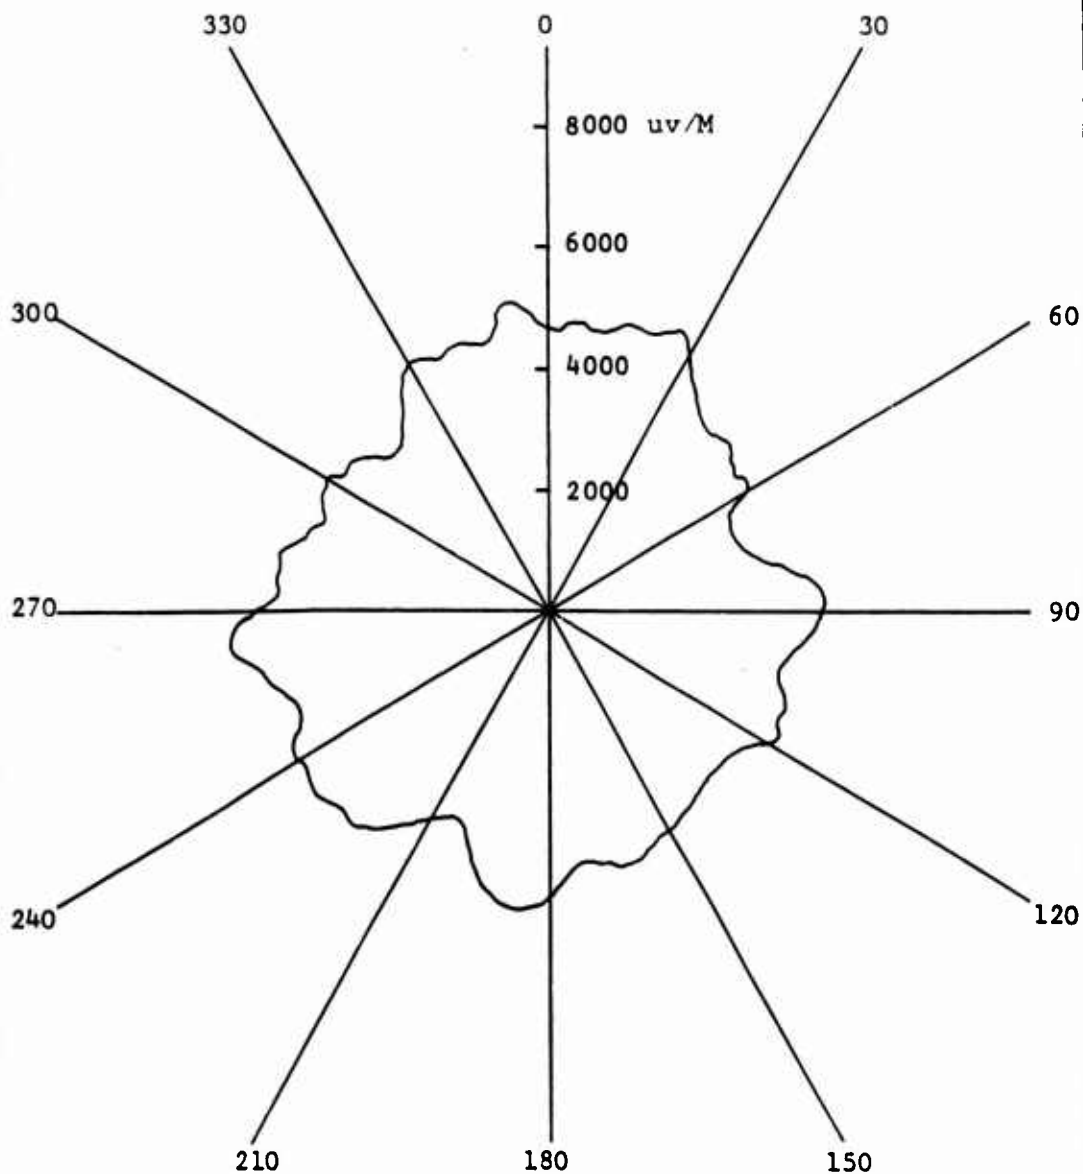

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 407 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 74

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 53

UHF COMMUNICATION ANTENNA
AS-2487/ARC-116 BHC P/N 206-075-551

Range 18 Miles

Altitude 1000 Feet

374.40 MHz

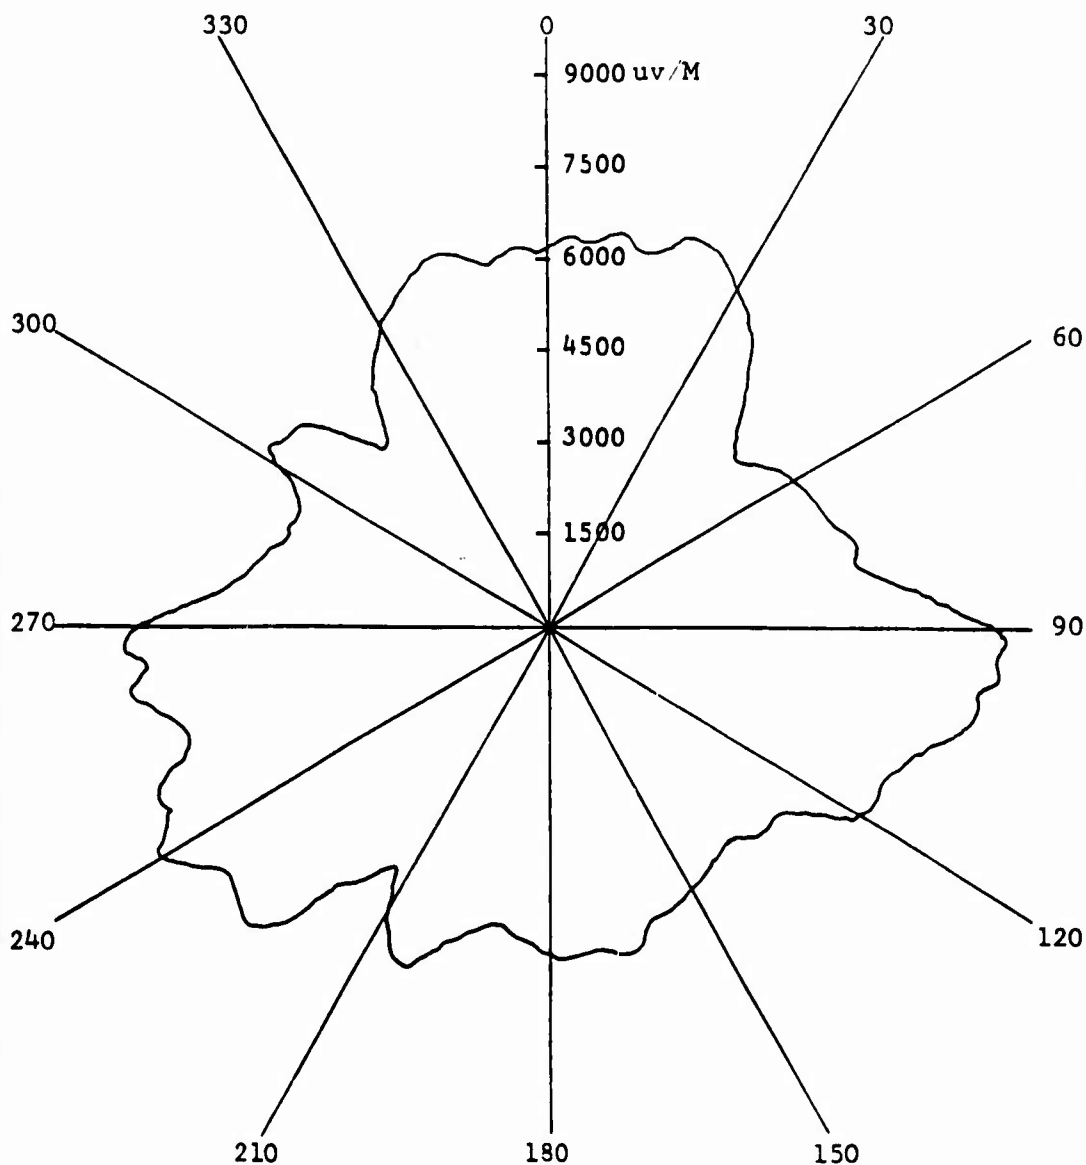

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 FORT WORTH, TEXAS

MODEL OH-58A PAGE 75

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 54

UHF COMMUNICATION ANTENNA
AS-2487/ARC-116 BHC P/N 206-075-551

Range 18 Miles

Altitude 1000 Feet

386.60 MHz

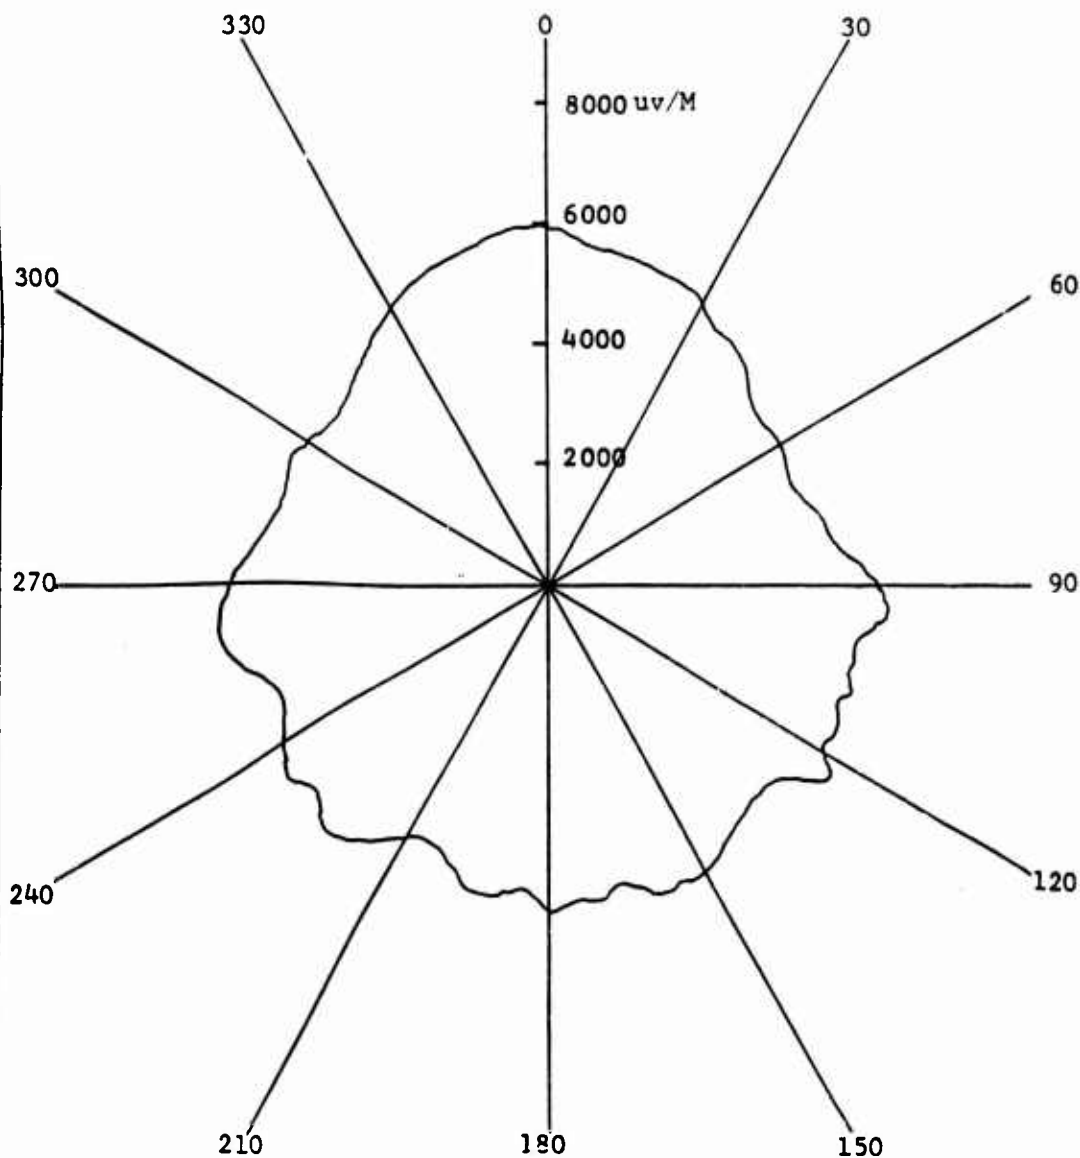

BY J. Mast

BELL HELICOPTER COMPANY
POST OFFICE BOX 402 • FORT WORTH, TEXAS

MODEL OH-58A PAGE 76

CHECKED R. Henschel

RPT 206-099-212B


DATA SHEET NO. 55

UHF COMMUNICATION ANTENNA
AS-2487/ARC-116 BHC P/N 206-075-551

Range 18 Miles

Altitude 1000 Feet

399.80 MHz

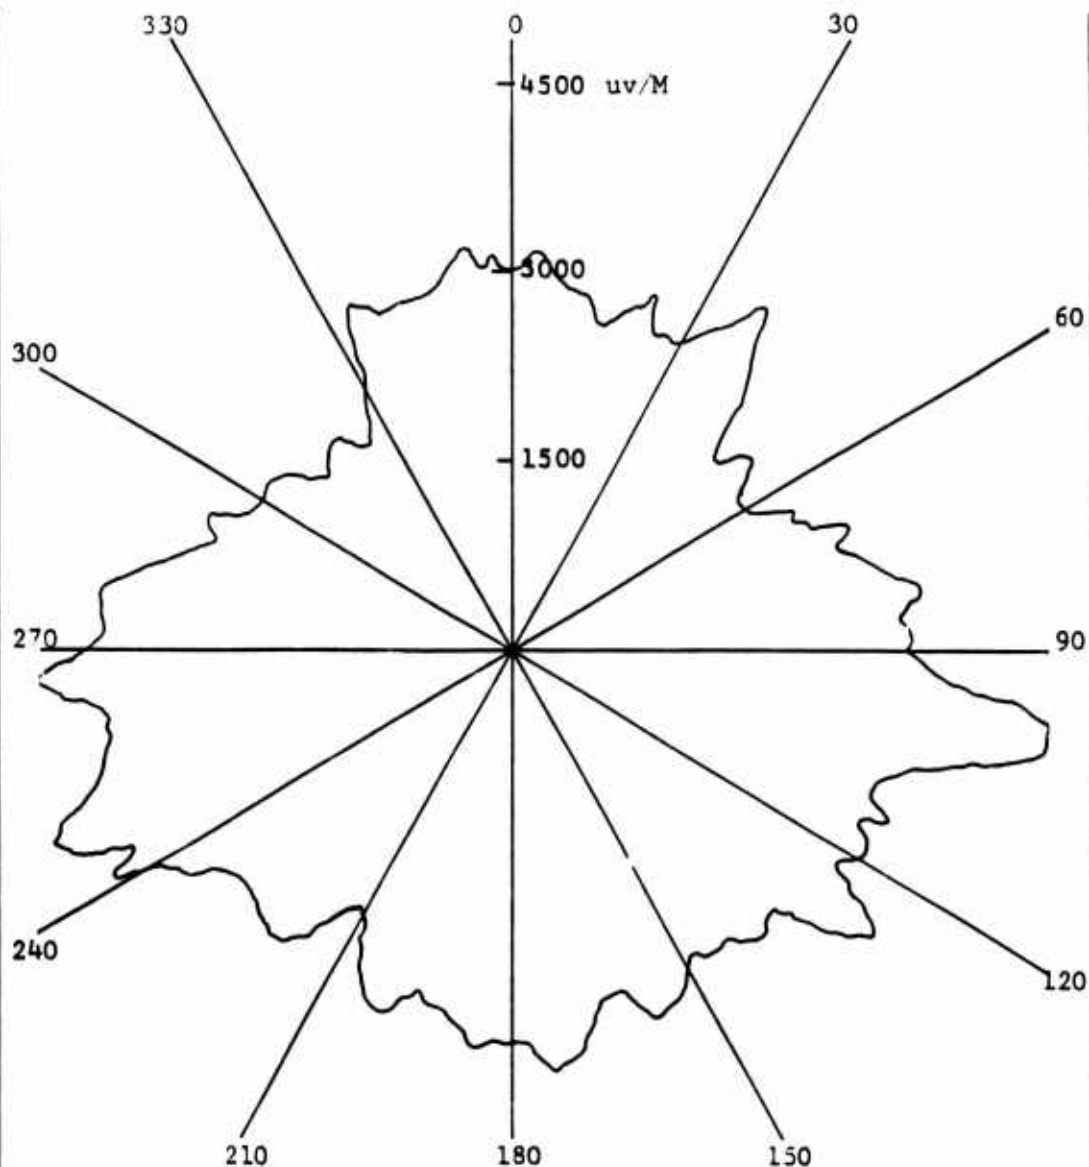

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Bell Helicopter Company P.O. Box 482, Ft. Worth, Texas 76101		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b. GROUP	
3. REPORT TITLE ANTENNA DEVELOPMENT FOR OH-58A HELICOPTER (U)			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Final Report November 1968 to June 1969			
5. AUTHOR(S) (Last name, first name, initial) Mast, J. G.; Henschel, R. C.			
6. REPORT DATE July 1969		7a. TOTAL NO. OF PAGES 77	7b. NO. OF REFS 8
8a. CONTRACT OR GRANT NO. DAAJ01-68-C-1699		8a. ORIGINATOR'S REPORT NUMBER(S) 206-099-212B	
a. PROJECT NO.		8b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
c.			
d.			
10. AVAILABILITY/LIMITATION NOTICES			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY U.S. Army Aviation Material Command Dept. of the Army, St. Louis, Mo.	
13. ABSTRACT The OH-58A Communication Antenna System consists of a 30-76 MHz antenna and a 116-150 MHz antenna, both integral to the helicopters vertical stabilizer, a combination blade and whip 30-76 MHz antenna mounted on the cabin roof and a 225-400 MHz antenna mounted under the nose of the helicopter. FM homing is provided by a pair of vertical dipoles, one mounted on each side of the helicopter. All antenna utilize completely passive matching. Extensive testing has shown that this system provides excellent performance in all respects. Radiated field strengths exceed minimum requirements by as much as 24 db and pattern symmetry is generally better than 10 db. There are no false FM homing indications across the 30-76 MHz band. Isolation between the two 30-76 MHz communication antennas is sufficient to allow retransmission between two ground stations separated by 80 miles.			

BY <u>J. Mast</u>	BELL HELICOPTER COMPANY POST OFFICE BOX 482 FORT WORTH 1, TEXAS	MODEL <u>OH-58A</u> PAGE <u>77</u>
CHECKED <u>R. Henschel</u>		RPT <u>206-099-212B</u>

DISTRIBUTION LIST

Electrical Group	8
Kelley/Mackenzie/Library	1
OH-58A Project Office	1
AMCPM-LH-T	5+1 reproducible
AMSEL-PP-EA-3	5
BFA	1

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Antennas, Helicopter						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parentheses immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical content. The assignment of links, roles, and weights is optional.