

UNCLASSIFIED

AD NUMBER

ADB009421

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; FEB 1976. Other requests shall be referred to Ballistic Research Laboratories, Aberdeen Proving Ground, MD 21005.

AUTHORITY

USAARDC ltr dtd 23 Aug 1978

THIS PAGE IS UNCLASSIFIED

File Copy

BRL MR 2581

BRL

AD B0094214

MEMORANDUM REPORT NO. 2581

(Supersedes IMR No. 450)

EFFECT OF LARGE HIGH-FREQUENCY ANGULAR
MOTION OF A SHELL ON THE ANALYSIS OF ITS
YAWSONDE RECORDS

Charles H. Murphy

February 1976

Approved for public release; distribution unlimited.

USA BALLISTIC RESEARCH LABORATORIES
ABERDEEN PROVING GROUND, MARYLAND

Destroy this report when it is no longer needed.
Do not return it to the originator.

Secondary distribution of this report by originating
or sponsoring activity is prohibited.

Additional copies of this report may be obtained
from the Defense Documentation Center, Cameron
Station, Alexandria, Virginia 22314.

The findings in this report are not to be construed as
an official Department of the Army position, unless
so designated by other authorized documents.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER BRL Memorandum Report No. 2581	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) EFFECT OF LARGE HIGH-FREQUENCY ANGULAR MOTION OF A SHELL ON THE ANALYSIS OF ITS YAWSONDE RECORDS		5. TYPE OF REPORT & PERIOD COVERED Final
7. AUTHOR(s) Charles H. Murphy		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Ballistic Research Laboratories Aberdeen Proving Ground, Maryland 21005		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Materiel Development & Readiness Command 5001 Eisenhower Avenue Alexandria, Virginia 22333		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS RDT&E 1W161102AH43
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE FEBRUARY 1976
		13. NUMBER OF PAGES 36
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES THIS MEMORANDUM REPORT SUPERSEDES BRL INTERIM MEMORANDUM REPORT NO. 450		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Yawsonde Roll Rate Analysis Sun Sensor Angular Motion of a Shell Sun Angle Analysis		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The usual data analysis of yawsonde records assumes that the sun angle is constant during one revolution of the shell and uses three successive sightings of the sun to yield sun angle and ϕ , the roll rate with respect to the plane containing the sun and the missile's axis. An improved analysis technique is described which assumes a linear variation of the sun angle and uses five successive sun sights to obtain sun angle and ϕ . For large high-frequency yawing motion, ϕ has a periodic component which is usually at the frequency of the yawing motion. An expression for this periodic component is derived and it is		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

Block 20. ABSTRACT (continued)

shown that the average of $\dot{\phi}$ is very close to the spin rate of the shell.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

	Page
TABLE OF CONTENTS.	3
LIST OF FIGURES.	5
I. INTRODUCTION	7
II. CONSTANT SUN ANGLE ANALYSIS.	7
III. VARYING SUN ANGLE ANALYSIS	10
IV. EFFECT OF MOVING COORDINATE SYSTEM	11
V. DISCUSSION	13
REFERENCES	21
LIST OF SYMBOLS.	23
APPENDIX A	27
DISTRIBUTION LIST.	31

LIST OF FIGURES

Figure		Page
1A	Sun Angle versus Time for Eight-Inch Shell Computed from Sets of Three Sun Sights	15
1B	$\dot{\phi}$ versus Time for Eight-Inch Shell Computed from Sets of Three Sun Sights	16
2A	Sun Angle versus Time for Eight-Inch Shell Computed from Sets of Five Sun Sights ($\sigma_T \neq 90^\circ$; $\sigma_n \neq 0$)	17
2B	$\dot{\phi}$ versus Time for Eight-Inch Shell Computed from Sets of Five Sun Sights ($\sigma_T \neq 90^\circ$; $\sigma_n \neq 0$)	18
3A	Sun Angle versus Time for Eight-Inch Shell Computed from Sets of Five Sun Sights ($\sigma_T = 90^\circ$; $\sigma_n = 0$)	19
3B	$\dot{\phi}$ versus Time for Eight-Inch Shell Computed from Sets of Five Sun Sights ($\sigma_T = 90^\circ$; $\sigma_n = 0$)	20

I. INTRODUCTION

A yawsonde is a device developed to give a continuous record of the angle between a shell's axis of rotation and the line of sight to the sun¹⁻⁶. It consists of two light sensors located behind two inclined slits on the shell body and a telemetry unit. The instant each sensor sees the sun, a discrete pulse is transmitted to a ground station and recorded versus time. The resulting pulse train can then be analyzed to yield sun angles to an accuracy of 0.1° and the spin rate. The usual reduction, however, assumes the sun angle to be constant for a single revolution of the shell. If the shell is performing large high-frequency angular motion, this assumption can be invalid and erroneous data can be produced. It is the purpose of this report to develop a valid data analysis system to handle yawsonde data without assuming the constancy of the sun angle during a single revolution of the shell.

II. CONSTANT SUN ANGLE ANALYSIS

We will make use of a solar fixed-plane coordinate system which can be described in terms of three unit vectors. $\vec{e}_1$ is along the missile's axis, $\vec{e}_{3s}$ is in the plane determined by the sun and the

-
1. I. Amery, H. Henning, K. Lawrie, and E. Wlatnig, "A Telemetry System for the Measurement of the Yaw of a Projectile Throughout the Major Part of Its Trajectory (U)," RARDE Report 1/65, March 1965. AD 359250. (Confidential Report)
 2. W. R. Haseltine, "Yawing Motion of 5.0" MK 41 Projectile Studied by Means of Yaw Sondes," Naval Weapons Center Report NWC TP 4779, August 1969. AD 862065.
 3. W. H. Mermagen, "Measurements of the Dynamical Behavior of Projectiles over Long Flight Paths," Journal of Spacecraft and Rockets, Vol. 8, April 1971, pp. 380-385. (See also BRL MR 2079. AD 717002)
 4. W. H. Clay, "A Precision Yawsonde Calibration Technique," BRL MR 2263, January 1973. AD 758158.
 5. R. H. Whyte and W. H. Mermagen, "A Method for Obtaining Aerodynamic Coefficients from Yawsonde and Radar Data," Journal of Spacecraft and Rockets, Vol. 10, June 1973, pp. 384-388. (See also BRL MR 2280. AD 759482)
 6. W. H. Mermagen and W. H. Clay, "The Design of a Second Generation Yawsonde," BRL MR 2368, April 1974. AD 780064.

missile's axis and points toward the sun's side of the missile's axis, while $\vec{e}_{2s}$ is $\vec{e}_{3s} \times \vec{e}_1$.

Each sun sensor unit emits a pulse at the instant that the sun is in the plane of its inclined slit. Let γ_a be the inclination of the first slit with respect to the missile's axis and let ϕ_a be the missile's roll angle with respect to the vector $\vec{e}_{2s}$ when the line-of-sight from the first sensor to the sun lies in the $\vec{e}_1\vec{e}_{3s}$ plane. Then the vector normal to the plane of the first sun sensor is

$$\vec{N}_a = \vec{e}_1 \sin \gamma_a + [\vec{e}_{2s} \cos (\phi - \phi_a) + \vec{e}_{3s} \sin (\phi - \phi_a)] \cos \gamma_a \quad (1)$$

where ϕ is the roll angle of the missile. The sun line-of-sight can be specified by the unit vector

$$\vec{s} = \vec{e}_1 \cos \sigma + \vec{e}_{3s} \sin \sigma \quad (2)$$

where σ is the angle between the sun's rays and the missile's axis. When the sun is in the plane of the first sensor

$$\vec{N}_a \cdot \vec{s} = 0 \quad (3)$$

or

$$\sin (\phi - \phi_a) = - \tan \gamma_a \operatorname{ctn} \sigma \quad (4)$$

A similar relation applies to the second sun sensor:

$$\sin (\phi - \phi_b) = - \tan \gamma_b \operatorname{ctn} \sigma \quad (5)$$

We now consider a triple of time pulses consisting of two sightings of the sun by the first sensor at $t = t_1, t_3$ and one by the second sensor at $t = t_2$. The pairs of ϕ_i, σ_i 's for these three times satisfy the relations:

$$\sin (\phi_i - \phi_a) = - \tan \gamma_a \operatorname{ctn} \sigma_i \quad i = 1, 3 \quad (6)$$

$$\sin (\phi_2 - \phi_b) = - \tan \gamma_b \operatorname{ctn} \sigma_2 \quad (7)$$

We now assume that $\sigma_1 = \sigma_2 = \sigma_3 = \sigma$ and that $\dot{\phi}$ is a constant. Then

$$\sin (\phi_1 - \phi_a) = \sin (\phi_3 - \phi_a) \quad (8)$$

so that*

$$\phi_3 - \phi_1 = 2\pi \quad (9)$$

or

$$\dot{\phi} = \frac{2\pi}{t_3 - t_1} \quad (10)$$

Now

$$\begin{aligned} \phi_2 - \phi_1 &= \dot{\phi} (t_2 - t_1) \\ &= 2\pi (t_2 - t_1) (t_3 - t_1)^{-1} \end{aligned} \quad (11)$$

Let

$$\delta = \phi_2 - \phi_1 - (\phi_b - \phi_a) \quad (12)$$

Then

$$\begin{aligned} \sin (\phi_2 - \phi_b) &= \sin (\phi_1 - \phi_a + \delta) \\ &= \sin (\phi_1 - \phi_a) \cos \delta + \sin \delta \cos (\phi_1 - \phi_a) \end{aligned} \quad (13)$$

Equations (6-7) can now be substituted in Equation (13) and the result simplified to yield

$$\tan \sigma = [\tan^2 \gamma_a - 2 \tan \gamma_a \tan \gamma_b \cos \delta + \tan^2 \gamma_b]^{1/2} (\sin \delta)^{-1} \quad (14)$$

This equation gives the sun angle in terms of the three times, (t_1, t_2, t_3) and three parameters of the sensors ($\gamma_a, \gamma_b, \phi_b - \phi_a$) and is valid for idealized sun sensors. Actual sun sensors will not exactly satisfy Equations (4-5) but roll angles for each sun sensor can be measured as functions of the sun angle⁴.

$$\phi_i = f_a (\sigma_i) + (i-1) \pi \quad i = 1, 3 \quad (15)$$

$$\phi_2 = f_b (\sigma_2) + 2\pi \ell \quad (16)$$

* Since the sun sensor plane is really a half plane, the root $\phi_3 - \phi_1 = \pi$ is not appropriate.

where ℓ is an integer selected so that

$$\phi_1 < \phi_2 < \phi_3$$

Once again we assume that $\sigma_1 = \sigma_2 = \sigma_3 = \sigma$ and that $\dot{\phi}$ is a constant. Equations (10-11) are still valid and

$$\phi_2 - \phi_1 = f_b(\sigma) - f_a(\sigma) + 2\pi j \equiv g(\sigma) \quad (17)$$

or

$$\sigma = g^{-1}(\phi_2 - \phi_1) \quad (18)$$

where $\phi_2 - \phi_1$ is given by Equation (11).

III. VARYING SUN ANGLE ANALYSIS

We assume that the sun angle is a linear function of time and that the roll angle is a quadratic function of time and hence we need five successive sightings of the sun to determine the five parameters:

$$\sigma_i = \dot{\sigma}_3 (t_i - t_3) + \sigma_3 \quad i = 1, 2, 3, 4, 5 \quad (19)$$

$$\phi_i = \ddot{\phi}_3 (t_i - t_2)^2 / 2 + \dot{\phi}_3 (t_i - t_2) + \phi_3 \quad (20)$$

If three of the sightings are by the first sensor and two by the second, then

$$\phi_i = f_a(\sigma_i) + (i-1)\pi \quad i = 1, 3, 5 \quad (21)$$

$$\phi_i = f_b(\sigma_i) + 2\pi\ell + (i-2)\pi \quad i = 2, 4 \quad (22)$$

The five parameters $(\sigma_3, \dot{\sigma}_3, \phi_3, \dot{\phi}_3, \ddot{\phi}_3)$ can be obtained from the five times $(t_1, t_2, t_3, t_4, t_5)$ by substituting Equations (19-20) in Equations (21-22) and solving the resulting nonlinear algebraic equations by an iterative differential correction technique⁷. The first set of values of $(\sigma_3, \dot{\sigma}_3)$, i.e. $(\sigma_{31}, \dot{\sigma}_{31})$ can be obtained by using the constant-sun-angle solutions for (t_1, t_2, t_3) and (t_3, t_4, t_5) . Since these

7. P. R. Bevington, Data Reduction and Error Analysis for the Physical Sciences, McGraw-Hill, New York, 1969.

approximately correspond to the sun angles for t_2 and t_4 , we will denote them by σ_2, σ_4 .

$$\therefore \sigma_{31} = (\sigma_2 + \sigma_4)/2 \quad (23)$$

$$\dot{\sigma}_{31} = (\sigma_4 - \sigma_2)/(t_4 - t_2) \quad (24)$$

Equations (19-20) for the $(j-1)$ iteration can be written in the form:

$$\begin{aligned} & \ddot{\phi}_{3j} (t_i - t_3)^2/2 + \dot{\phi}_{3j} (t_i - t_3) + \phi_{3j} \\ & = f_K (\sigma_{ij-1}) + \left(\frac{\partial f_K (\sigma_{ij-1})}{\partial \sigma_3} \right) (\sigma_{3j} - \sigma_{3j-1}) \\ & + \frac{\partial f_K (\sigma_{ij-1})}{\partial \dot{\sigma}_3} (\dot{\sigma}_{3j} - \dot{\sigma}_{3j-1}) + m\pi \end{aligned} \quad (25)$$

where

$$K = a, m = i-1 \text{ for } i = 1, 3, 5$$

$$K = b, m = 2(\ell-1) + i \text{ for } i = 2, 4$$

Equations (25) are linear in the unknowns $(\sigma_{3j}, \dot{\sigma}_{3j}, \phi_{3j}, \dot{\phi}_{3j}, \ddot{\phi}_{3j})$ and can be easily solved; usually only three or four iterations are required.

A second version of a varying sun angle analysis using five times can be used for constant $\dot{\phi}$. In this case, Equations (19-20) are replaced by:

$$\sigma_i = \ddot{\sigma}_3 (t_i - t_3)^2/2 + \dot{\sigma}_3 (t_i - t_3) + \sigma_3 \quad (26)$$

$$\phi_i = \dot{\phi}_3 (t_i - t_3) + \phi_3 \quad (27)$$

Equations similar to Equations (25) can be easily derived for this variant.

IV. EFFECT OF MOVING COORDINATE SYSTEM

ϕ is the roll angle measured with respect to $\vec{e}_{2s}$. $\dot{\phi}$ is a roll rate measured in this solar fixed-plane coordinate system and is not necessarily equal to the roll rate, p , measured in an inertia coordinate system since the solar coordinate system can itself have a non-zero roll rate.

For our inertia system, we will use an earth-fixed coordinate system X_1, X_2, X_3 , so aligned that the X_3 axis is vertical and the trajectory is initially in the X_1 - X_3 plane. Since the actual trajectory can be reasonably well approximated by a planar trajectory, we will approximate the velocity vector along the trajectory by $(V \cos \theta_T, 0, V \sin \theta_T)$.

In the appendix, the roll component (ω_{1s}) of the angular velocity of the sun fixed-plane coordinates is computed in terms of the horizontal and vertical components of the complex yaw in the aeroballistic fixed-plane coordinates⁸:

$$\begin{aligned} \omega_{1s} = & (b_1 \dot{\xi}_H + b_2 \dot{\xi}_V) \cos \sigma_T \\ & + b_3 \hat{\xi}_H \dot{\xi}_H + b_4 \hat{\xi}_V \dot{\xi}_V + b_5 \hat{\xi}_H \dot{\xi}_V + b_6 \dot{\xi}_H \hat{\xi}_V \end{aligned} \quad (28)$$

where

$$\hat{\xi} = \hat{\xi}_H + i \hat{\xi}_V = \sin \hat{\beta} + i \cos \hat{\beta} \sin \hat{\alpha}$$

$\hat{\alpha}, \hat{\beta}$ are the angles of attack and sideslip

σ_T is the angle between the sun vector and the tangent to the trajectory;

b_i 's are defined in Table 1.

TABLE 1. COEFFICIENTS IN EQUATIONS (28) AND (A17)
$b_1 = (s_3 \cos \theta_T - s_1 \sin \theta_T) \csc^2 \sigma_T$
$b_2 = -s_2 \csc^2 \sigma_T$
$b_3 = b_2 [2 \cos \sigma_T \tan \theta_T - (1 + \cos^2 \sigma_T) b_1]$
$b_4 = b_2 [2 \cos \sigma_T \tan \theta_T + (1 + \cos^2 \sigma_T) b_1]$
$b_5 = \cot^2 \sigma_T - b_1 \cos \sigma_T \tan \theta_T - b_2^2 (1 + \cos^2 \sigma_T)$
$b_6 = -\cot^2 \sigma_T - b_1 \cos \sigma_T \tan \theta_T + b_1^2 (1 + \cos^2 \sigma_T)$

8. C. H. Murphy, "Free Flight Motion of Symmetric Missiles", BRL Report 1216, July 1963, AD 442757.

The variation of the complex yaw can be described by the usual epicycle

$$\hat{\xi} = K_1 e^{i\phi_1} + K_2 e^{i\phi_2}$$

$$\phi_j = \phi_{j0} + \dot{\phi}_j t \quad (29)$$

The presence of derivatives in all terms of Equations (28) suggests that the high frequency mode is the more important mode in Equation (29). If we neglect the low frequency mode ($K_2=0$), Equation (28) becomes

$$\omega_{1s} = (-b_1 \sin \phi_1 + b_2 \cos \phi_1) \dot{\phi}_1 K_1 \cos \sigma_T$$

$$+ [(b_4 - b_3) \sin \phi_1 \cos \phi_1 + b_5 \cos^2 \phi_1 - b_6 \sin^2 \phi_1] \dot{\phi}_1 K_1^2$$

$$(30)$$

Since $\dot{\phi}$ is the difference between the projectile spin and the coordinate system spin:

$$\dot{\phi} = p - \omega_{1s}, \quad (31)$$

it will be a periodic function with frequency $\dot{\phi}_1$ except when $\sigma_T = \pi/2$. For this special case where the sun is perpendicular to the projectile, the frequency will be $2\dot{\phi}_1$. The average value of $\dot{\phi}$ is, however, quite close to the projectile spin:

$$\dot{\phi}_{av} = p + (b_5 - b_6) \dot{\phi}_1 K_1^2/2 \quad (32)$$

V. DISCUSSION

In Figure 1, the sun angle complement ($\sigma_n = \pi/2 - \sigma$) and $\dot{\phi}$ as obtained from the three-time-measurements, constant-sun-angle reduction are plotted for an eight-inch projectile. These data are then reduced by the five-time-measurements analysis of this report and plotted in Figure 2. The sun angles are changed by very little but the oscillations in $\dot{\phi}$ are reduced by 50%. The remainder is clearly periodic with frequency $\dot{\phi}_1$. Later in the flight, the sun angle went through $\pi/2$; Figure 3 shows σ_n and $\dot{\phi}$ for this portion of the trajectory. We note the $\dot{\phi}$ oscillations are much smaller, with frequency $2\dot{\phi}_1$.

It is interesting to note that the need for the varying σ data reduction can be eliminated by a modified yawsonde. If the first sun sensor is oriented so that $\gamma_a = 0$, that sensor is insensitive to sun angle (see Equation (4)), so that

$$f_a(\sigma) \doteq 0 \quad (33)$$

This sensor directly measures $\dot{\phi}$. The second sensor, then, yields a σ_2 at $t=t_2$ from the standard three-time-measurements procedure.

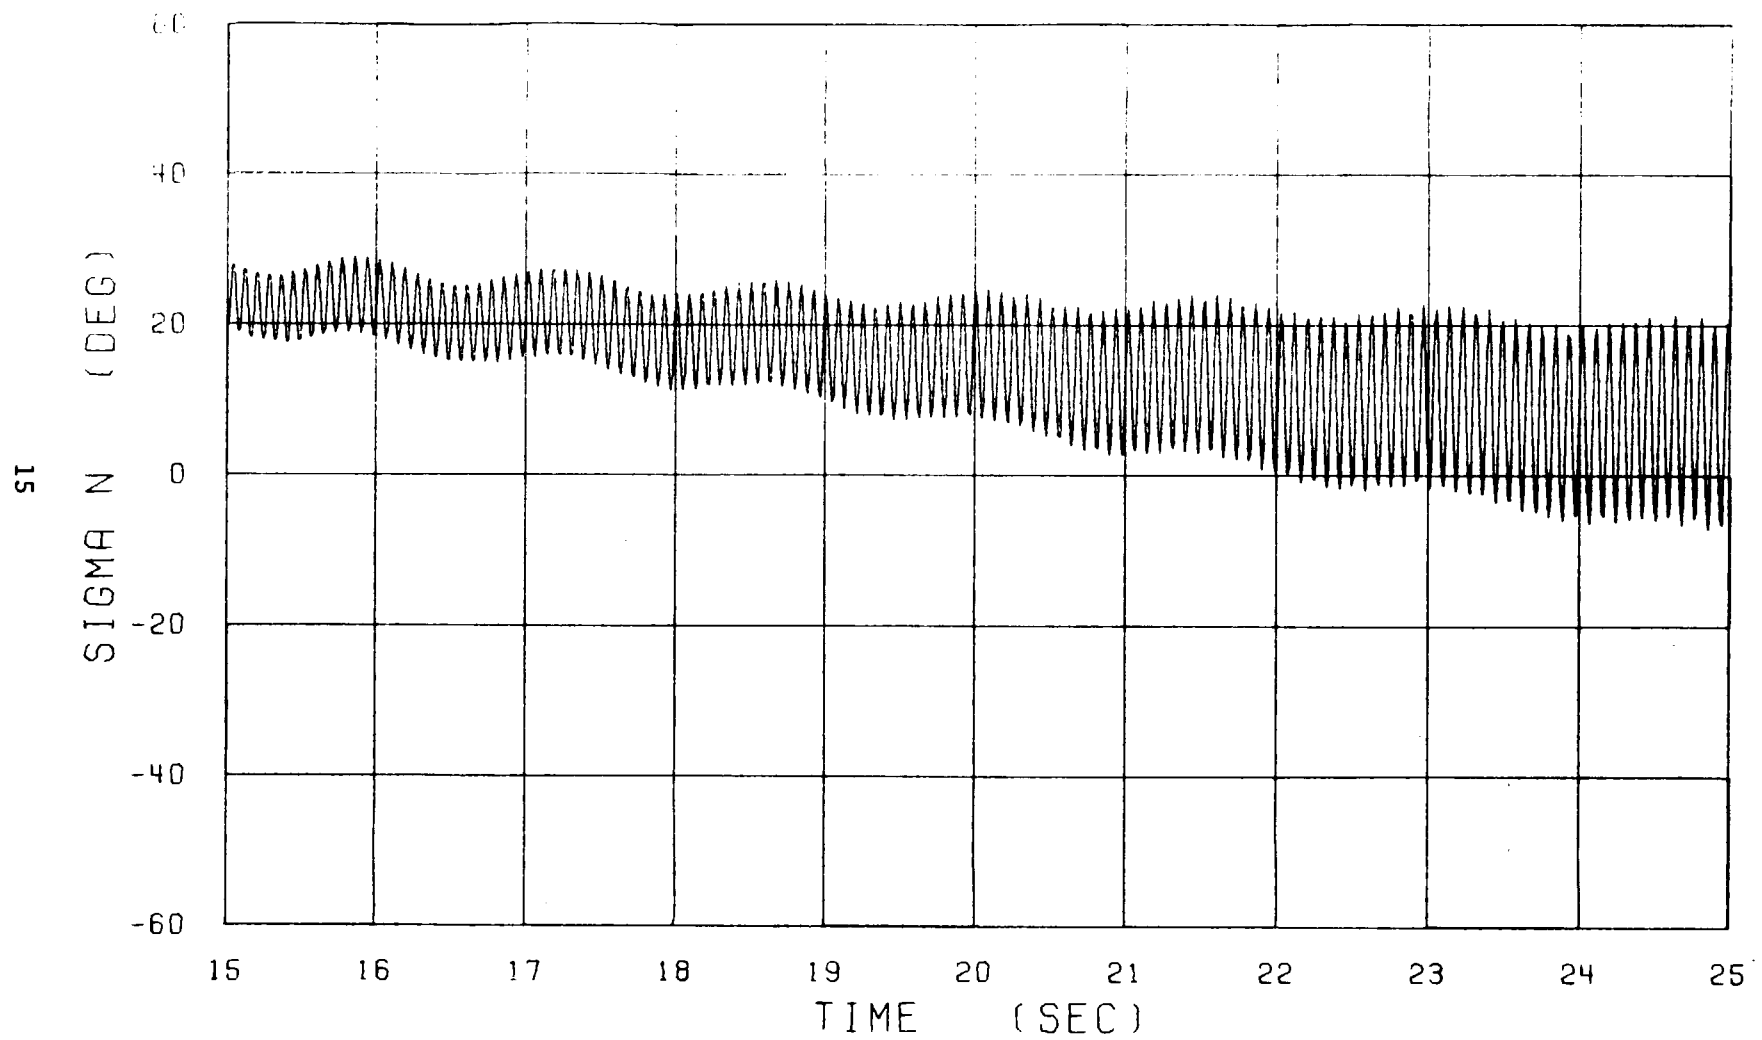


Figure 1A. Sun Angle versus Time for Eight-Inch Shell Computed from Sets of Three Sun Sights

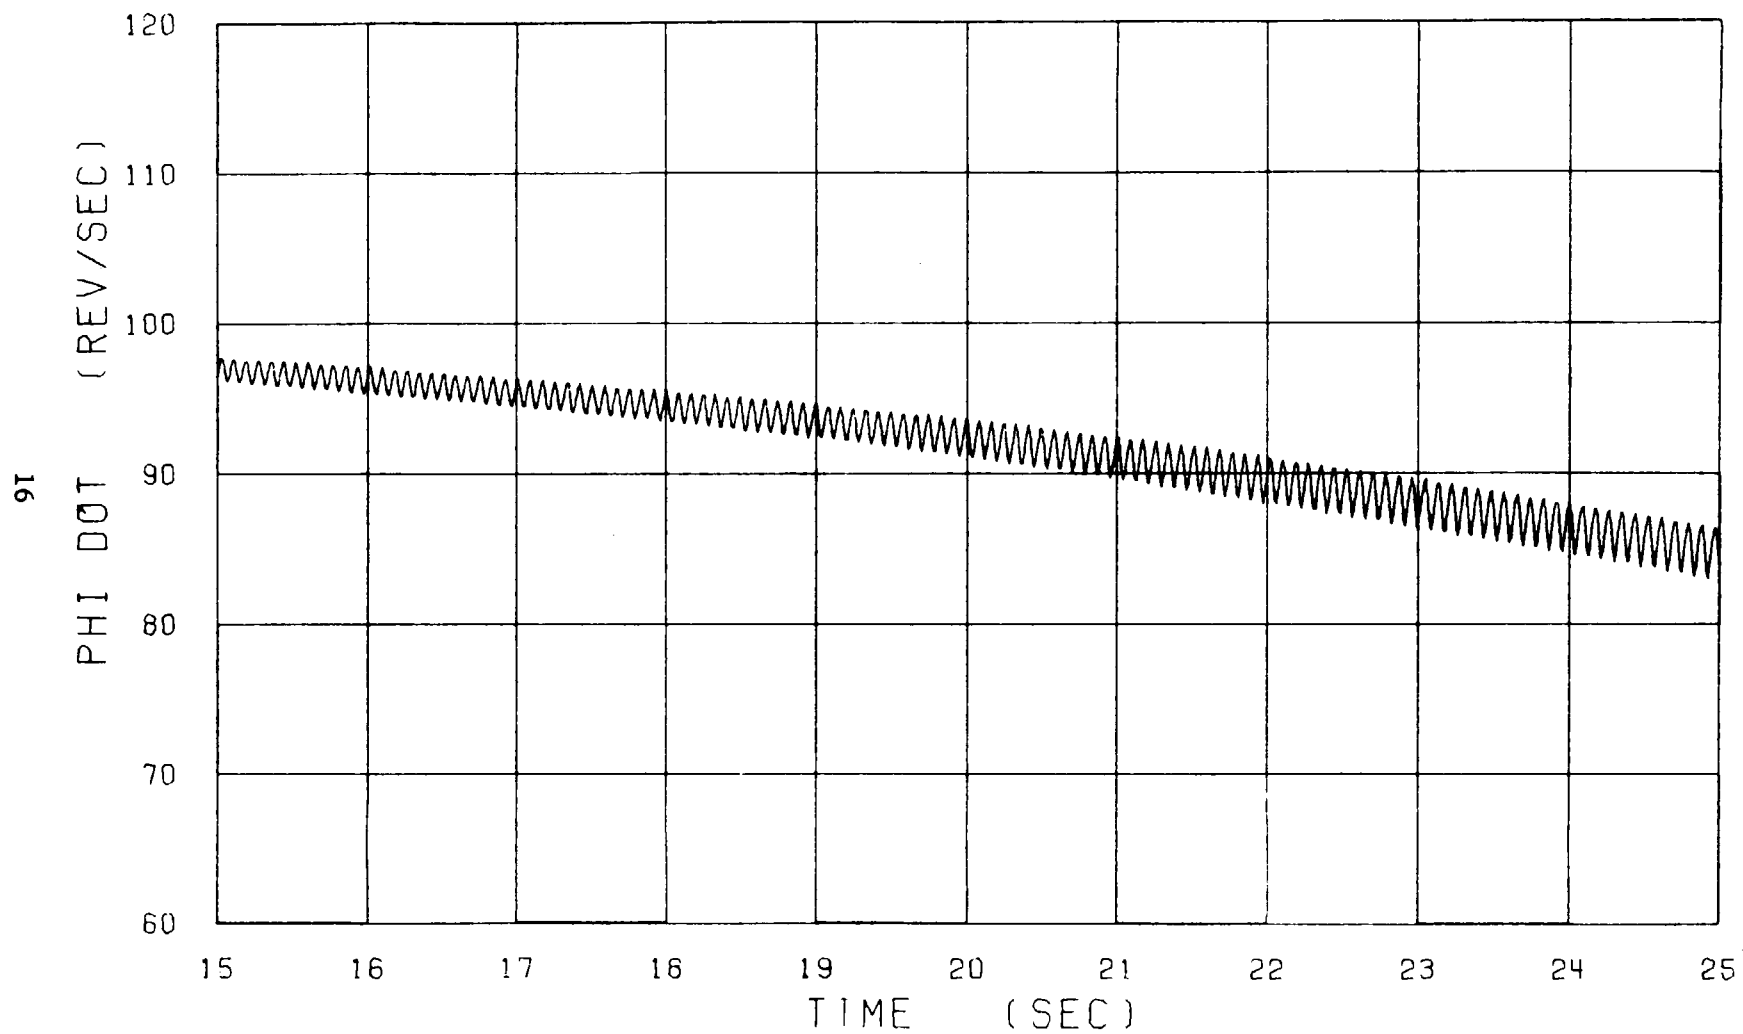


Figure 1B. $\dot{\phi}$ versus Time for Eight-Inch Shell Computed from Sets of Three Sun Sights

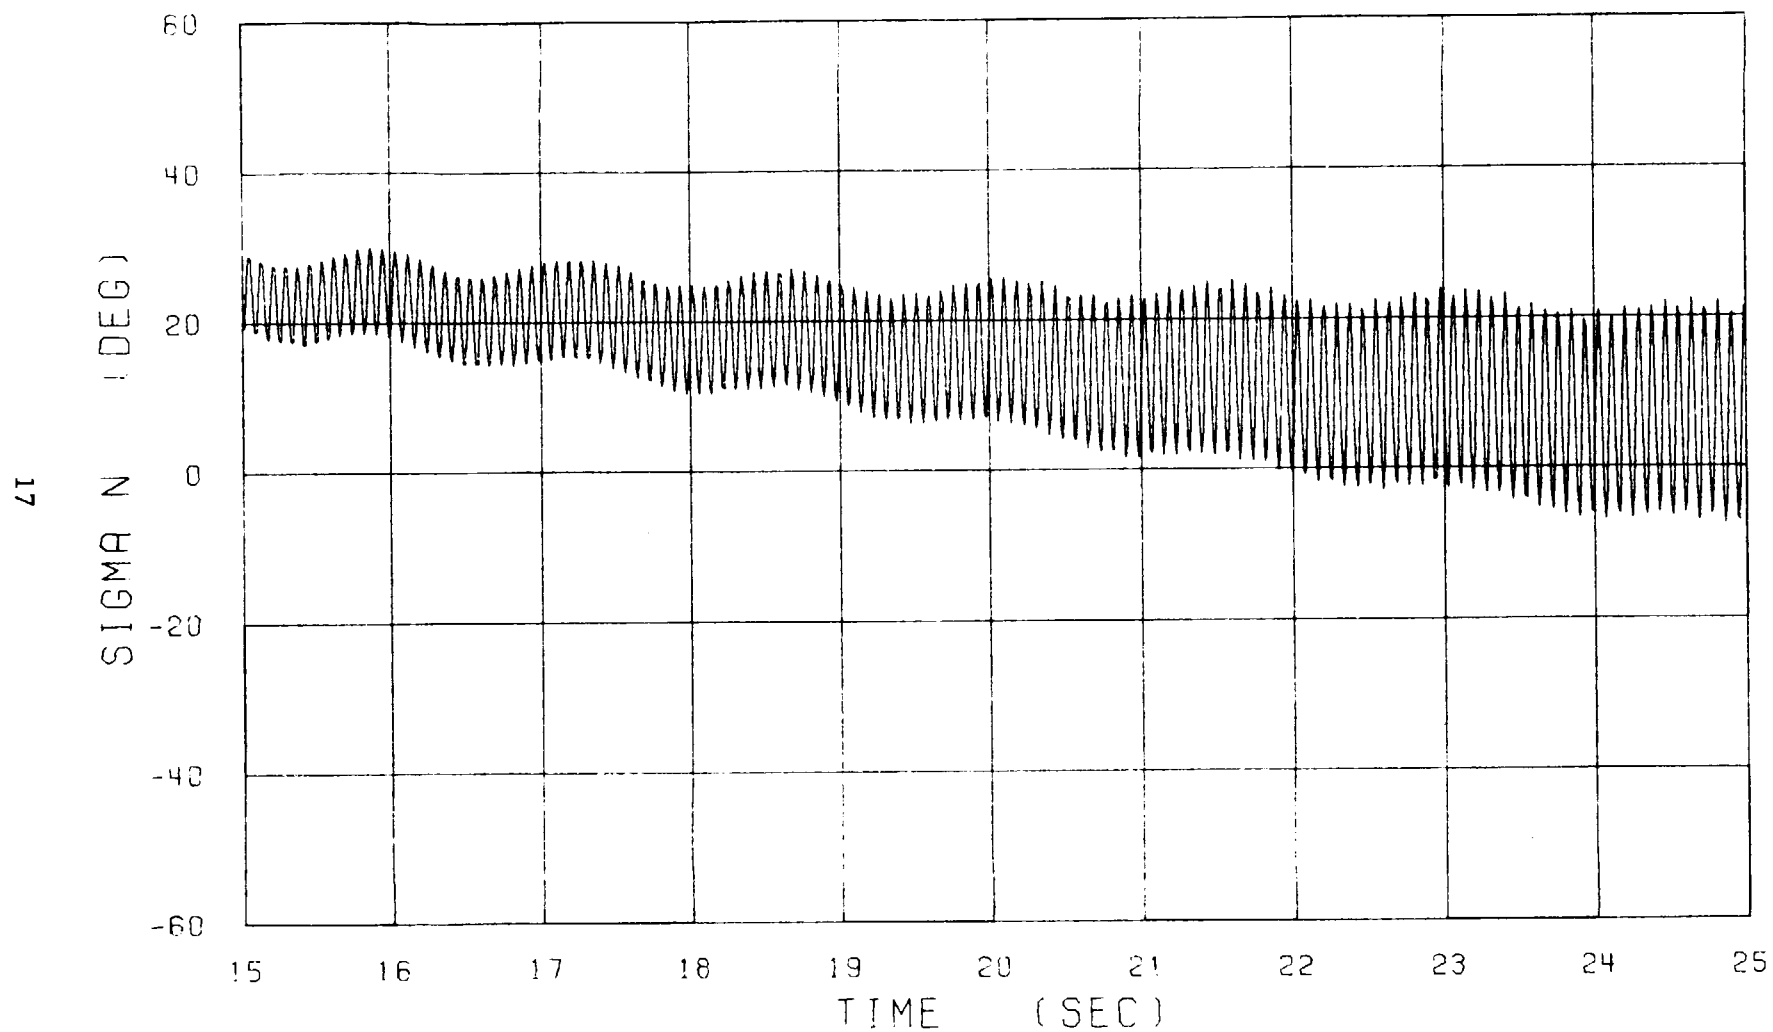


Figure 2A. Sun Angle versus Time for Eight-Inch Shell Computed from Sets of Five Sun Sights
 $(\sigma_T \neq 90^\circ; \sigma_n \neq 0)$

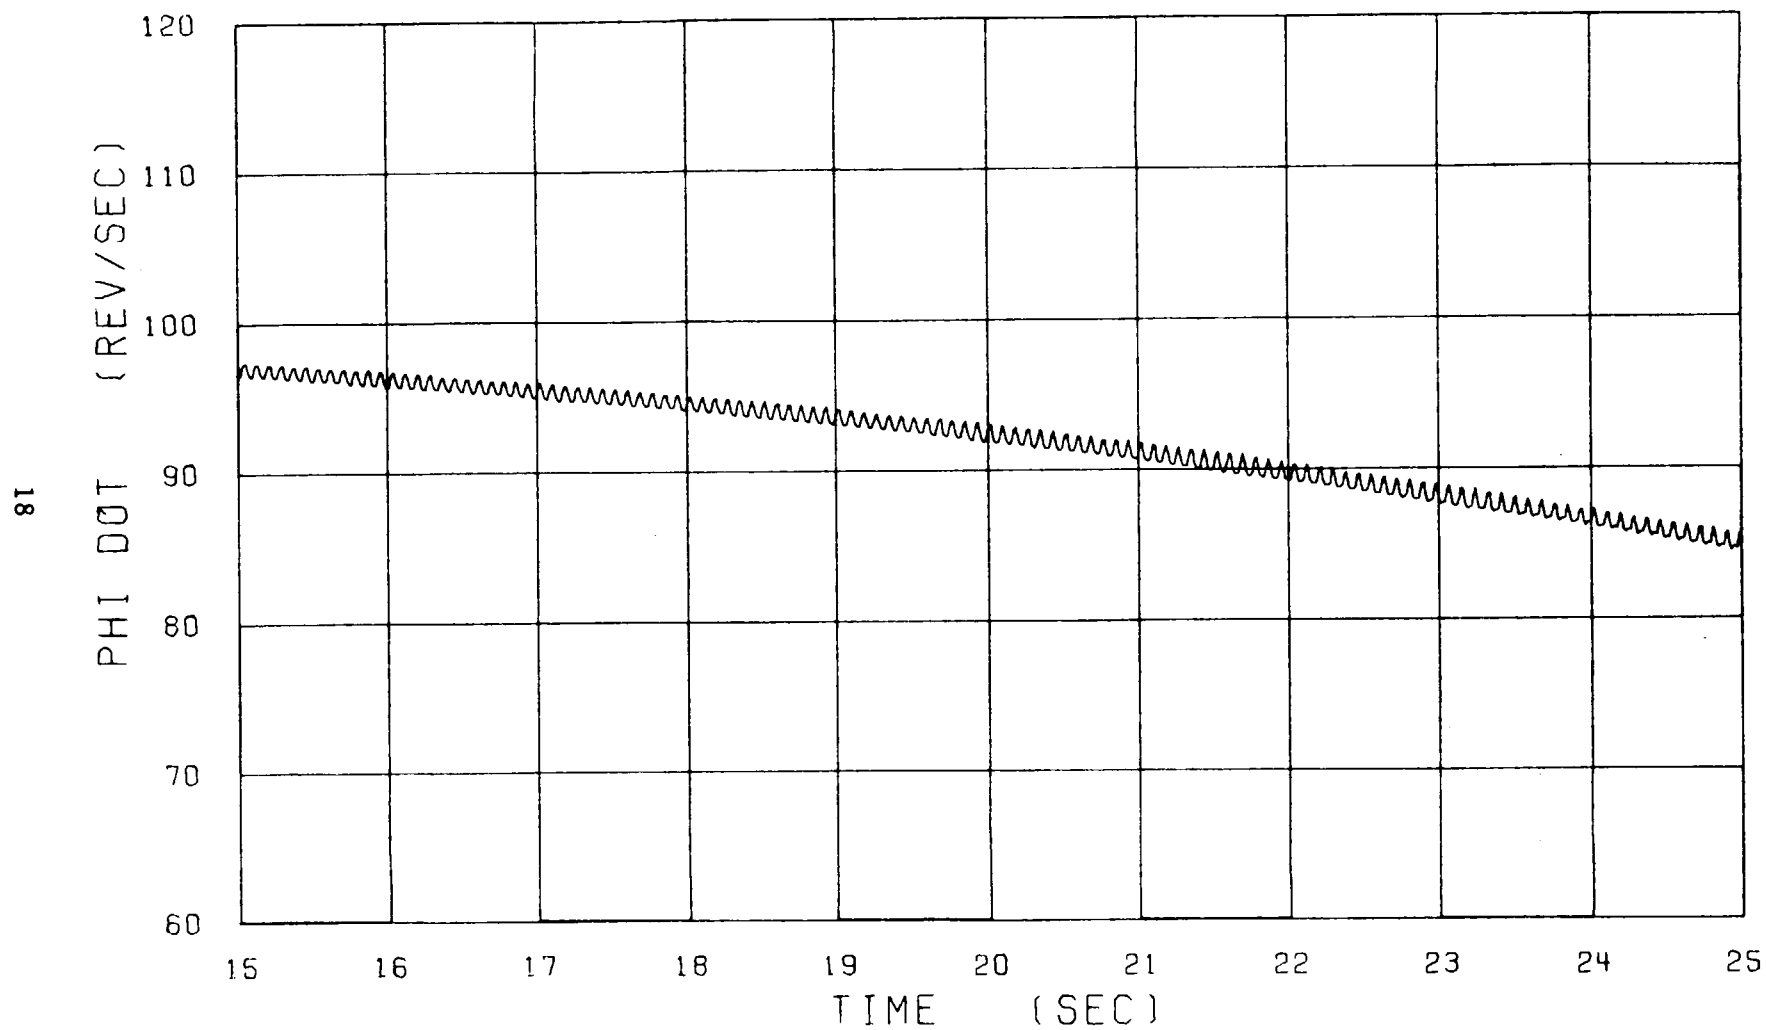


Figure 2B. $\dot{\phi}$ versus Time for Eight-Inch Shell Computed from Sets of Five Sun Sights
 $(\sigma_T \neq 90^\circ ; \sigma_n \neq 0)$

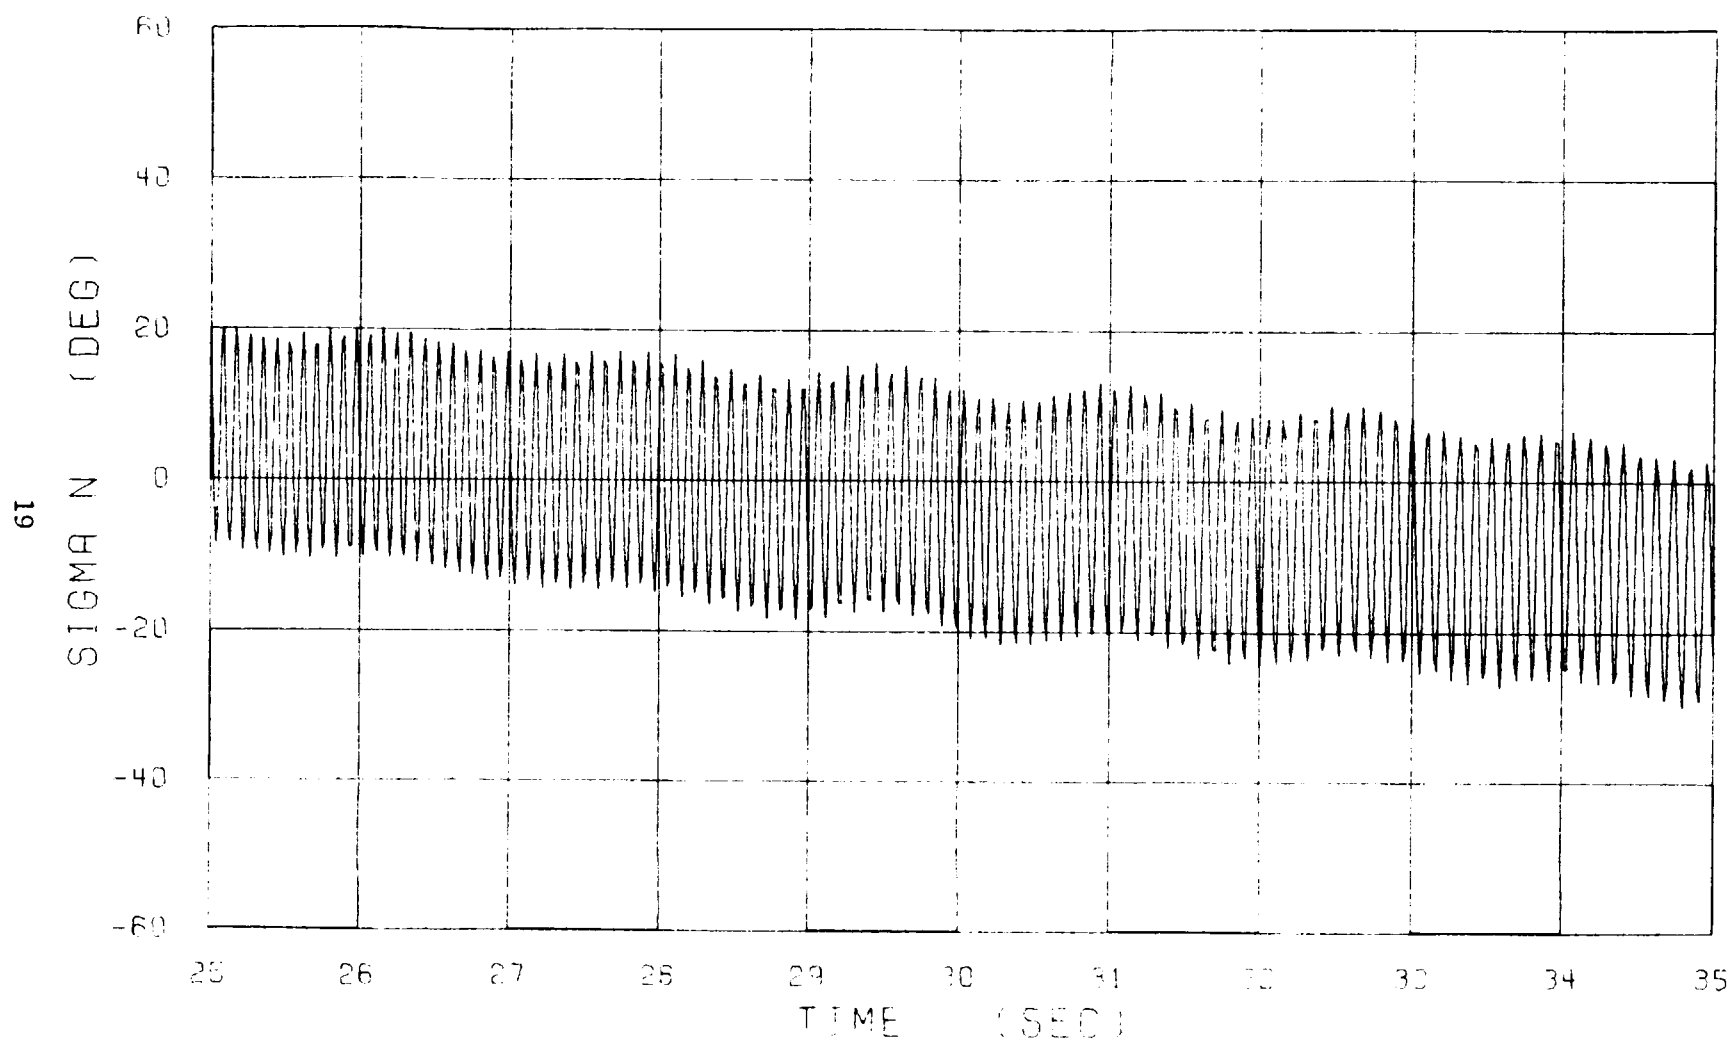


Figure 3A. Sun Angle versus Time for Eight-Inch Shell Computed from Sets of Five Sun Sights
 $(\sigma_T = 90^\circ ; \sigma_n = 0)$

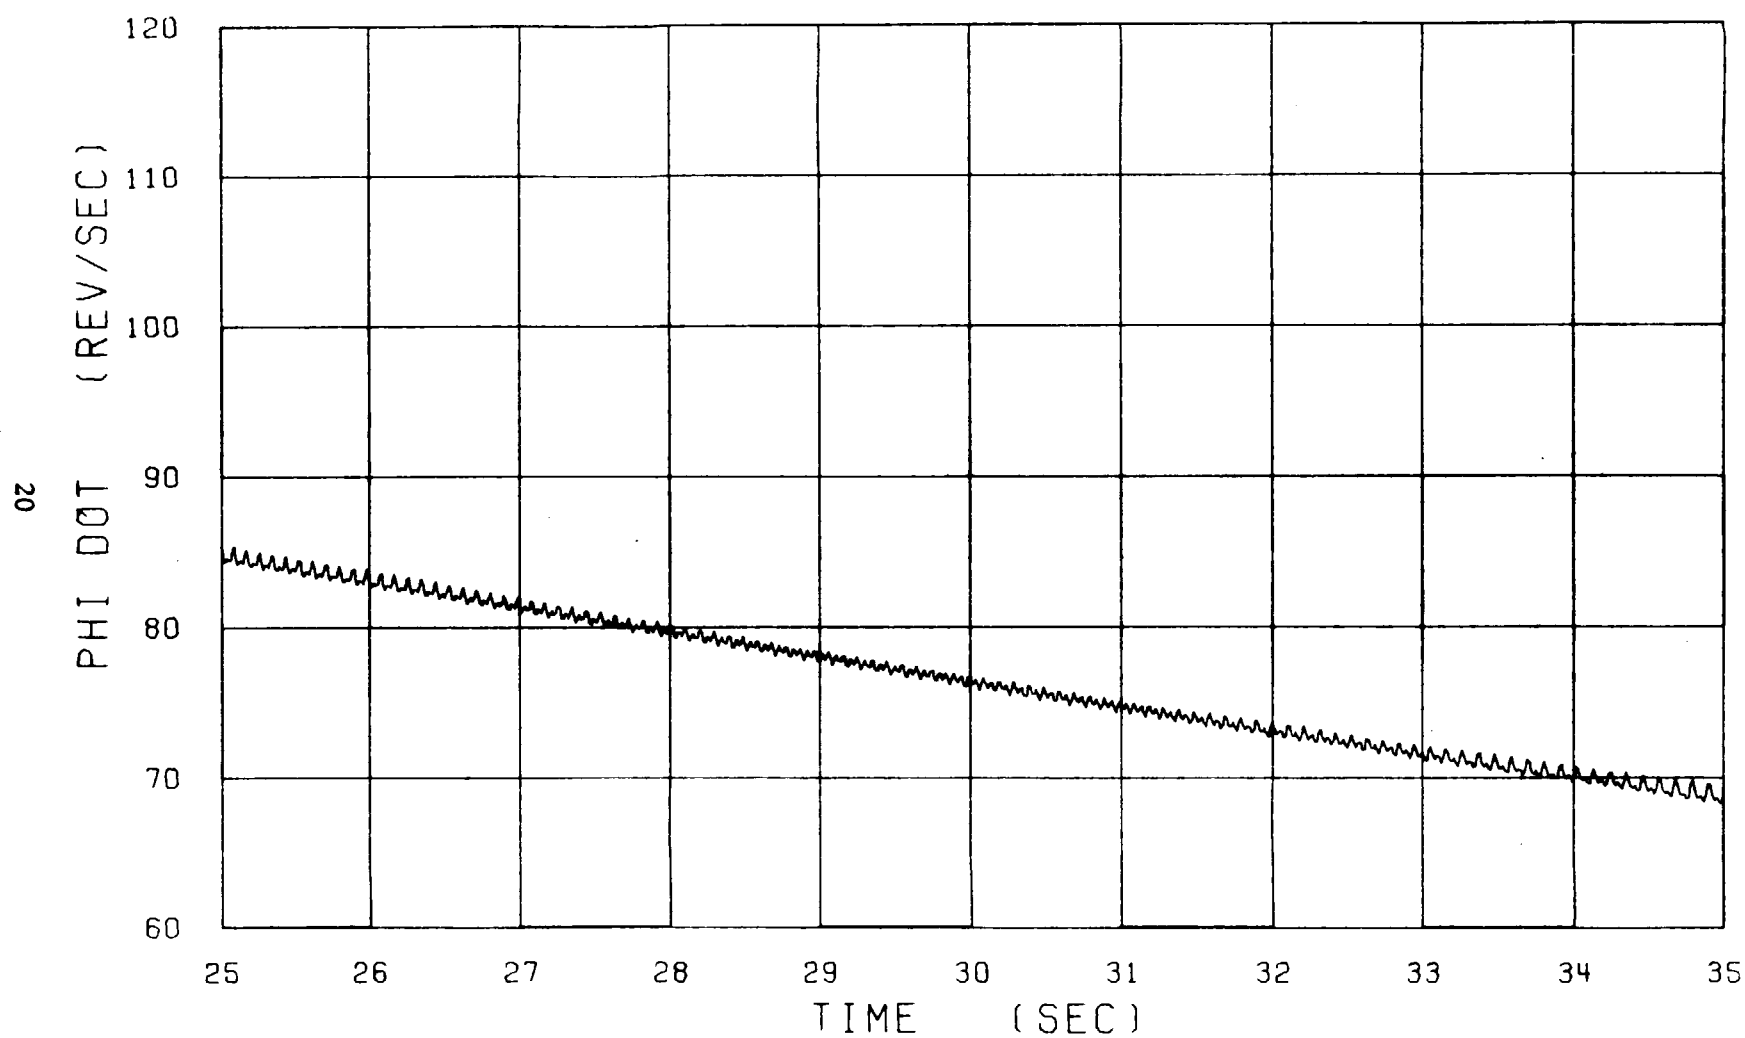


Figure 3B. $\dot{\phi}$ versus Time for Eight-Inch Shell Computed from Sets of Five Sun Sights
 $(\sigma_T = 90^\circ; \sigma_n = 0)$

REFERENCES

1. I. Amery, H. Henning, K. Lawrie and E. Wlatnig, "A Telemetry System for the Measurement of the Yaw of a Projectile Throughout the Major Part of Its Trajectory (U)," RARDE Report 1/65, March 1965, AD 359250, (CONFIDENTIAL).
2. W. R. Haseltine, "Yawing Motion of 5.0" MK 41 Projectile Studied by Means of Yaw Sondes," Naval Weapons Center Report NWC TP 4779, August 1969, AD 862065.
3. W. H. Mermagen, "Measurements of the Dynamical Behavior of Projectiles over Long Flight Paths," Journal of Spacecraft and Rockets, Vol. 8, April 1971, pp. 380-385. (See also U.S. Army Ballistic Research Laboratories Memorandum Report No. 2079, November 1970, AD 717002.)
4. W. H. Clay, "A Precision Yawsonde Calibration Technique," U.S. Army Ballistic Research Laboratories Memorandum Report No. 2263, January 1973, AD 758158.
5. R. H. Whyte and W. H. Mermagen, "A Method for Obtaining Aerodynamic Coefficients from Yawsonde and Radar Data," Journal of Spacecraft and Rockets, Vol. 10, June 1973, pp. 384-388. (See also U.S. Army Ballistic Research Laboratories Memorandum Report No. 2280, March 1973, AD 759482.)
6. W. H. Mermagen and W. H. Clay, "The Design of a Second Generation Yawsonde," U.S. Army Ballistic Research Laboratories Memorandum Report No. 2368, April 1974, AD 780064.
7. P. R. Bevington, Data Reduction and Error Analysis for the Physical Sciences, New York, McGraw-Hill, 1969.
8. C. H. Murphy, "Free Flight Motion of Symmetric Missiles," U.S. Army Ballistic Research Laboratories Report No. 1216, July 1963, AD 442757.

coefficients in the expression for ω_{ls} ,
Equation 28; defined in Table 1

unit vector along the missile's axis

unit vectors in the aeroballistic fixed-
plane system, Equations (A4-A5)

unit vectors in the solar fixed-plane
system, Equations (A7-A8)

sun angle functions obtained from roll
angle versus sun angle data provided
by sun sensor (a) or (b)

$$f_a \text{ or } f_b, \text{ Equation (25)}$$

a function relating the difference in successive roll angle values to the sun angle, Equation (17)

the inverse of function g , Equation (18)

magnitude of the high (1) or low (2)
frequency yaw mode, Equation (29)

an integer in Equations (16, 22, 25)
providing the proper multiple of 2π

$$i = 1, 3, 5$$
$$2(\ell - 1) + i \quad i = 2, 4$$

vector normal to the plane of sun sensor (a)

direction cosines of the missile's axis in
the earth-fixed X_1, X_2, X_3 system

LIST OF SYMBOLS (CONTINUED)

p	roll rate in the earth-fixed X_1, X_2, X_3 system
$\vec{s}$	the unit vector from the missile to the sun
s_1, s_2, s_3	components of s in the earth-fixed X_1, X_2, X_3 system
t	time
t_i	time at which a sensor sees the sun, $i = 1, 2, 3 \dots$
V	magnitude of the velocity vector
$\vec{V}$	velocity vector
X_1, X_2, X_3	axes in an earth-fixed coordinate system: X_3 is vertical and the trajectory is initially in the $X_1 - X_3$ plane
$\hat{\alpha}$	angle of attack
$\hat{\beta}$	angle of sideslip
γ_a, γ_b	the inclination of slit (a) or (b) with respect to the missile's axis
δ	$\phi_2 - \phi_1 - (\phi_b - \phi_a)$
η_1, η_2, η_3	components of the yaw vector $(\vec{e}_1 - \vec{V}/V)$ in the earth-fixed X_1, X_2, X_3 system
θ_T	the angle between the missile's axis and the tangent to the trajectory

LIST OF SYMBOLS (CONTINUED)

$\hat{\xi}$	$\hat{\xi}_H + i \hat{\xi}_V$, the complex yaw in the aeroballistic fixed-plane system
$\hat{\xi}_H$	$\sin \hat{\beta}$, the horizontal component of $\hat{\xi}$
$\hat{\xi}_V$	$\cos \hat{\beta} \sin \hat{\alpha}$, the vertical component of $\hat{\xi}$
σ	the sun angle: the angle between the sun vector and the missile's axis
σ_i	$\sigma(t_i)$, $i = 1, 2, 3, \dots$
σ_{ik}	the value of σ_i computed at the k-th iteration of the data analysis
σ_n	$\frac{\pi}{2} - \sigma$, the sun angle complement
σ_T	the angle between the sun vector and the tangent to the trajectory
ϕ	the missile's roll angle in the solar fixed-plane system, that is, with respect to the vector $\vec{e}_{2s}$
ϕ_a, ϕ_b	the value of ϕ when the line-of-sight from sun sensor (a) or (b) to the sun lies in the $e_1 e_{3s}$ plane
ϕ_i	(a) $\phi(t_i)$, $i = 1, 2, 3 \dots$ Equations (6-27) (b) the orientation angle of the high- ($i = 1$) or low- ($i = 2$) frequency yaw mode, Equation (29, on)

LIST OF SYMBOLS (CONTINUED)

ϕ_{ik}	the value of $\phi(t_i)$ computed at the k-th iteration of the data analysis
$\dot{\phi}$	roll rate in the solar fixed-plane system
ω_{la}	roll component of the angular velocity of the aeroballistic fixed-plane system
ω_{ls}	roll component of the angular velocity of the solar fixed-plane system
$\dot{(\)}$	derivative with respect to time
$\hat{(\)}, (\)_a$	value in the aeroballistic fixed-plane system
$(\)_s$	value in the solar fixed-plane system

APPENDIX A. DERIVATION OF EQUATION (28)

Our earth-fixed coordinate system X_1, X_2, X_3 will be so oriented that the $X_1 - X_3$ plane is the vertical plane containing the initial velocity vector. If we make the very reasonable approximation that the velocity vector stays in this plane, it can be written in the form

$$\vec{V} = V (\cos \theta_T, 0, \sin \theta_T). \quad (A1)$$

The unit vector along the missile's axis then takes the form

$$\vec{e}_1 = (n_1, n_2, n_3) = (\cos \theta_T + \eta_1, \eta_2, \sin \theta_T + \eta_3) \quad (A2)$$

$$n_1^2 + n_2^2 + n_3^2 = 1 \quad (A3)$$

where the η_j 's become zero for zero-amplitude yawing motion.

We will be using two coordinate systems which use two different fixed planes:

1. The usual aeroballistic fixed plane which contains the missile's axis and the vertical vector;
2. A sun fixed plane which contains the missile's axis and the sun vector and is the reference plane for the yaw sonde's ϕ .

The other two unit vectors for the aeroballistic fixed-plane system are

$$\vec{e}_{2a} = \frac{(0,0,1) \times \vec{e}_1}{\cos \theta} = \frac{(-\eta_2, \cos \theta_T + \eta_1, 0)}{\cos \theta} \quad (A4)$$

$$\vec{e}_{3a} = \frac{\vec{e}_1 \times [(0,0,1) \times \vec{e}_1]}{\cos \theta} = \frac{(0,0,1) - (\sin \theta_T + \eta_3) \vec{e}_1}{\cos \theta} \quad (A5)$$

$$\cos \theta = [\cos^2 \theta_T + 2\eta_1 \cos \theta_T + \eta_1^2 + \eta_2^2]^{\frac{1}{2}} \quad (A6)$$

Similarly, the other two units vectors for the sun fixed-plane system are:

$$\vec{e}_{2s} = \frac{\vec{s} \times \vec{e}_1}{\sin \sigma} \quad (A7)$$

$$\vec{e}_{3s} = \frac{\vec{e}_1 \times (\vec{s} \times \vec{e}_1)}{\sin \sigma} = \frac{\vec{s} - (\cos \sigma) \vec{e}_1}{\sin \sigma} \quad (A8)$$

where

$\vec{s} = (s_1, s_2, s_3)$ is the unit vector pointing to the sun,

$$\cos \sigma = \vec{s} \cdot \vec{e}_1,$$

and σ is in the first quadrant when the sun's rays illuminate the missile's nose and is in the second quadrant when the sun's rays illuminate the missile's base.

The horizontal and vertical components of the complex yaw in the aeroballistic fixed-plane coordinates can be computed from their definitions:

$$\hat{\xi}_H = \frac{\vec{e}_{2a} \cdot \vec{V}}{V} = \frac{-\eta_2 \cos \theta_T}{\cos \theta} \quad (A9)$$

$$\begin{aligned} \hat{\xi}_V &= \frac{\vec{e}_{3a} \cdot \vec{V}}{V} \\ &= \frac{\eta_1 \sin \theta_T \cos \theta_T - \eta_3 (1 + \sin^2 \theta_T + \eta_1 \cos \theta_T - \eta_3 \sin \theta_T)}{\cos \theta_T} \end{aligned} \quad (A10)$$

where

$$\hat{\xi} = \hat{\xi}_H + i \hat{\xi}_V = \sin \hat{\beta} + i \cos \hat{\beta} \sin \hat{\alpha}$$

and $\hat{\beta}$, $\hat{\alpha}$ are the angles of attack and sideslip respectively. A quadratic approximation for η_1 and a linear approximation for $\cos \theta$ can be obtained from Equations (A3, A6, A9-10).

$$\eta_1 = -\eta_3 \tan \theta - \frac{\eta_2^2 \cos^2 \theta_T + \eta_3^2}{2 \cos^3 \theta_T} \quad (\text{A11})$$

$$\frac{\cos \theta_T}{\cos \theta} = 1 + \frac{\eta_3 \sin \theta_T}{\cos^2 \theta_T} \quad (\text{A12})$$

$$\eta_2 = -\hat{\xi}_H + \hat{\xi}_V \hat{\xi}_H \tan \theta_T \quad (\text{A13})$$

$$\eta_3 = -\hat{\xi}_V \cos \theta_T + (\hat{\xi}_V^2 - \hat{\xi}_H^2)(\sin \theta_T)/2 \quad (\text{A14})$$

The roll component of the angular velocity of the sun fixed-plane coordinates can now be computed in terms of the η_j 's:

$$\begin{aligned} \omega_{1s} &= -\vec{e}_{2s} \cdot \dot{\vec{e}}_{3s} \\ &= -\vec{e}_{2s} \cdot [(\csc \sigma) \dot{\vec{s}} - (\ctn \sigma) \dot{\vec{e}}_1 - \ctn \sigma \dot{\vec{e}}_1] \\ &= (\ctn \sigma) \vec{e}_{2s} \cdot \dot{\vec{e}}_1 \\ &= \ctn \sigma \csc \sigma [\dot{\eta}_1 (-s_2 \sin \theta_T + \eta_2 s_3 - \eta_3 s_2) \\ &\quad + \dot{\eta}_2 (s_1 \sin \theta_T - s_3 \cos \theta_T + s_1 \eta_3 - s_3 \eta_1) \\ &\quad + \dot{\eta}_3 (s_2 \cos \theta_T + s_2 \eta_1 - s_1 \eta_2)] \end{aligned} \quad (\text{A15})$$

$$\begin{aligned} \cos \sigma &= \vec{s} \cdot \vec{e}_1 \\ &= \cos \sigma_T + s_1 \eta_1 + s_2 \eta_2 + s_3 \eta_3 \end{aligned} \quad (\text{A16})$$

where

$$\cos \sigma_T = s_1 \cos \theta_T + s_3 \sin \theta_T$$

We can now use Equations (A11-13, A16) to express ω_{1s} as a quadratic expansion in $\hat{\xi}_H$ and $\hat{\xi}_V$

$$\begin{aligned}\omega_{1s} = & (b_1 \dot{\hat{\xi}}_H + b_2 \dot{\hat{\xi}}_V) \cos \sigma_T \\ & + b_3 \dot{\hat{\xi}}_H \dot{\hat{\xi}}_H + b_4 \dot{\hat{\xi}}_V \dot{\hat{\xi}}_V + b_5 \dot{\hat{\xi}}_H \dot{\hat{\xi}}_V + b_6 \dot{\hat{\xi}}_H \dot{\hat{\xi}}_V\end{aligned}\quad (A17)$$

where the b_j 's are defined in Table 1.

Equation (A17) is precisely Equation (28) of the text. It is interesting to note that for the special case of the sun directly overhead, the two fixed-plane coordinate systems are the same. For this case,

$$\begin{aligned}s_1 = s_2 = 0 \quad s_3 = 1 \\ \theta_T = \pi/2 - \sigma_T.\end{aligned}\quad (A18)$$

The b_j 's of Table 1 become

$$b_1 = \sec \theta_T; \quad b_2 = b_3 = b_4 = b_5 = 0; \quad b_6 = 1 \quad (A19)$$

and

$$\hat{\omega}_1 = \omega_{1a} = \omega_{1s} = \dot{\hat{\xi}}_H \tan \theta_T + \dot{\hat{\xi}}_H \dot{\hat{\xi}}_V \quad (A20)$$

Equation (A20) for $\theta_T = 0$ is equivalent to Equation (4.3) on page 150 of Reference 8.

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
2	Commander Defense Documentation Center ATTN: DDC-TCA Cameron Station Alexandria, VA 22314	1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDE-H 5001 Eisenhower Avenue Alexandria, VA 22333
1	Director Defense Nuclear Agency ATTN: STRA, Mr. W. W. Berning Washington, DC 20305	1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDE-W 5001 Eisenhower Avenue Alexandria, VA 22333
1	Director National Security Agency ATTN: Mr. P. W. Waldo, Jr. Fort George G. Meade, MD 20755	1	Commander US Army Aviation Systems Command ATTN: DRSAB-E 12th and Spruce Streets St. Louis, MO 63166
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDMA-ST 5001 Eisenhower Avenue Alexandria, VA 22333	1	Director US Army Air Mobility Research and Development Laboratory Ames Research Center Moffett Field, CA 94035
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDE-A 5001 Eisenhower Avenue Alexandria, VA 22333	3	Commander US Army Electronics Command ATTN: DRSEL-RD DRSEL-TL/I-J, Jacobs SELRA-SMA, M. Lowenthal Fort Monmouth, NJ 07703
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDE-R 5001 Eisenhower Avenue Alexandria, VA 22333	5	Commander US Army Missile Command ATTN: DRSMI-R DRSMI-RBL, J. Howell DRSMI-RST, R. Eppes DRSMI-RDK, R. Becht R. Deep Redstone Arsenal, AL 35809
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDE-DN 5001 Eisenhower Avenue Alexandria, VA 22333		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Commander US Army Tank Automotive Logistics Command ATTN: DRSTA-RHFL Warren, MI 48090	1	Commander US Army White Sands Missile Range ATTN: Mr. Webb White Sands, NM 88002
2	Commander US Army Mobility Equipment Research & Development Center ATTN: Tech Docu Cen, Bldg 315 DRSME-RZT Fort Belvoir, VA 22060	1	Commander US Army Watervliet Arsenal Watervliet, NY 12189
1	Commander US Army Armament Command ATTN: DRSAR-SA, Mr. B. Witherspoon Rock Island, IL 61202	1	Commander US Army Jefferson Proving Ground ATTN: STEJP-TD-D Madison, IN 47250
3	Commander US Army Frankford Arsenal ATTN: SARFA-MDP, Mr. Mitchell SARFA-MDA-A, Mr. S. Hirschman Mr. A. Cianciosi Philadelphia, PA 19137	2	Commander Yuma Proving Ground ATTN: STEYP-TMW, Mr. J. Callicotte Mr. J. Mullins Yuma, AZ 85364
5	Commander US Army Picatinny Arsenal ATTN: SARPA-AD-D-R, Mr. S. Wasserman SARPA-FR-S-A, Mr. A. Loeb Mr. D. Mertz SARPA-MI-H, Mr. A. G. Edwards, Bldg 352 (2 cys) Dover, NJ 07801	6	Commander US Army Harry Diamond Laboratories ATTN: DRXDO-TI, Dr. M. Apsteil DRXDO-DBC, Mr. T. Liss Mr. T. Tuccinardi DRXDO-DAC, Mr. F. Vrataric DRXDO-DAD, Mr. D. Finger DRXDO-DAB, Mr. H. Davis 2800 Powder Mill Road Adelphi, MD 20783
2	Commander US Army Picatinny Arsenal Project Manager Selected Ammunition ATTN: Mr. Marty Chase Mr. R. Corn Dover, NJ 07801	1	Commander US Army Materials and Mechanical Research Center ATTN: DRXMR-ATL Watertown, MA 02172
		1	Commander US Army Natick Laboratories ATTN: DRXRE, Dr. D. Sieling Natick, MA 01762

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Project Manager Cannon Artillery Weapons Systems Rock Island, IL 61201	3	Commander US Naval Ordnance Systems Command ATTN: ORD-0632 ORD-035 ORD-5524 Washington, DC 20360
1	Commander Training and Doctrine Command ATTN: ATCD-CF, LTC R. E. Camp Fort Monroe, VA 23651	1	Director Office of Naval Research ATTN: Mr. S. Curley 495 Summer Street Boston, MA 02210
1	Director US Army TRADOC Systems Analysis Activity ATTN: ATAA-SA White Sands Missile Range NM 88002	5	Commander US Naval Surface Weapons Center White Oak Laboratory ATTN: Code 312, Mr. R. Regan Mr. S. Hastings Code 730, Tech Lib Mr. D. Merritt Mr. P. Aronson Silver Spring, MD 20910
1	Commander US Army Field Artillery School ATTN: CPT J. Harnish Fort Sill, OK 73503	5	Commander US Naval Surface Weapons Center Dahlgren Laboratory ATTN: GBJ, Mr. R. Kapnick Mr. E. Ohlmeyer Code KBB, Mr. J. Hurtt Code DK20, Dr. T. Clare Code DG40, Dr. W.R. Chadwick Dahlgren, VA 22448
1	HQDA (DAMA-DDC, LTC J. Ganahl) Washington, DC 20310	2	Commander US Naval Weapons Center ATTN: Code 753, Lib Code 50704, Dr. W. Haseltine China Lake, CA 93555
1	HQDA (DAMO-ZD, Mr. E. Smith) Washington, DC 20310	3	Commander US Naval Research Laboratory ATTN: Tech Info Div Code 7700, Dr. A. Kolb Code 7720, Dr. E. McLean Washington, DC 20390
1	Commander US Army Research Office ATTN: CRD-AA-EH P.O. Box 12211 Research Triangle Park, NC 27709		
1	Director US Army Advanced BMD Technology Center P.O. Box 1500 Huntsville, AL 35809		
3	Commander US Naval Air Systems Command ATTN: AIR-604 Washington, DC 20360		

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
3	Commander US Naval Ordnance Station ATTN: Mr. D. Monetta Mr. W. Burnett Mr. A. Hauckland Indian Head, MD 20640	1	Director National Aeronautics and Space Administration Scientific and Technical Information Facility ATTN: SAK/DL P.O. Box 8757 Baltimore/Washington International Airport, MD 21240
2	ADTC (ADBPS-12) Eglin AFB, FL 32542		
2	AFATL (DLRA, Mr. F. Burgess) (Tech Lib) Eglin AFB, FL 32542	1	Director National Aeronautics and Space Administration Goddard Space Flight Center ATTN: Tech Lib Greenbelt, MD 20771
1	AFWL (SUL) Kirtland AFB, NM 87117		
1	AFFDL Wright-Patterson AFB, OH 45433	1	Director Jet Propulsion Laboratory ATTN: Tech Lib 4800 Oak Grove Drive Pasadena, CA 91103
1	ASD (ASAMCC) Wright-Patterson AFB, OH 45433		
1	Environmental Sciences Services Administration ATTN: Code 82.70 Mr. J. W. Wright Boulder, CO 80301	1	Director National Aeronautics and Space Administration Langley Research Center ATTN: MS 185, Tech Lib Langley Station Hampton, VA 23365
5	Director National Aeronautics and Space Administration Ames Research Center ATTN: Mr. D. R. Harrison Mr. T. Canning Dr. D. Kirk Dr. G. T. Chapman Dr. M. Tobak Moffett Field, CA 94035	5	Director National Aeronautics and Space Administration Wallops Station ATTN: Mr. R. Krieger Mr. C. Layton Mr. J. Green Mr. J. Andre Mr. W. Lord Wallops Island, VA 23337

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
3	ARO, Inc. ATTN: Tech Lib (2 cys) PWT-HTP, Mr. D. Herron Arnold AFB, TN 37389	1	Director Applied Physics Laboratory The Johns Hopkins University Johns Hopkins Road Laurel, MD 20810
1	Calspan Corporation ATTN: Library P.O. Box 235 Buffalo, NY 14221	1	The Johns Hopkins University ATTN: Head of Department of Aeronautics 34th and Charles Streets Baltimore, MD 21218
1	General Electric Company ATTN: Armament Department Mr. R. H. Whyte Room 1412 Lakeside Avenue Burlington, VT 05401	1	Massachusetts Institute of Technology Department of Aeronautics and Astronautics ATTN: Tech Lib 77 Massachusetts Avenue Cambridge, MA 02139
1	Sanders Associates ATTN: Mr. A. Colao Simon and Ledge Streets Nashua, NH 03060	1	Massachusetts Institute of Technology ATTN: Dr. H. P. Greenspan 77 Massachusetts Avenue Cambridge, MA 02139
4	Sandia Laboratories ATTN: Aerodynamics Department Org 5620, Mr. R. Maydew Org 5625, Mr. W. Curry Mr. R. Bentley Albuquerque, NM 87115	1	Ohio State University Department of Aeronautical and Astronautical Engineering ATTN: Tech Lib Columbus, OH 43210
5	Space Research Corporation ATTN: Dr. G. V. Bull North Jay Road P.O. Box 60 North Troy, VT 05859	1	University of Maryland ATTN: Mathematics Department Professor Y. M. Lynn 5401 Wilkens Avenue Baltimore, MD 21228
2	California Institute of Technology ATTN: Aeronautics Department Professor H. Liepmann Dr. W. Bekrens Pasadena, CA 91102	2	University of Michigan ATTN: Department of Aeronautical Engineering Dr. A. Kuethé Dr. M. Sichel East Engineering Building Ann Arbor, MI 48104
1	Guggenheim Aeronautical Lab California Institute of Technology ATTN: Tech Lib Pasadena, CA 91103		

DISTRIBUTION LIST

No. of
Copies

Organization

Aberdeen Proving Ground

Marine Corps Ln Ofc

Cdr, USATECOM

ATTN: DRSTE-BE, Mr. Morrow

DRSTE-TA-R, Mr. Wise

Dir, USAMSAA

ATTN: Dr. J. Sperrazza

Mr. C. T. Odom

Cdr, USAEA

ATTN: SAREA-R, Mr. A. Flatau

SAREA-WGM, Mr. W. Dee

Mr. D. Cohen

SAREA-DE-WG, Mr. J. Jacoby