

UNCLASSIFIED

AD NUMBER

ADB804921

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to DoD only; Foreign Government Information; DEC 1946. Other requests shall be referred to British Embassy, 3100 Massachusetts Ave., NW, Washington, DC 20008.

AUTHORITY

DSTL, AVIA 6/13540, 20 May 2009

THIS PAGE IS UNCLASSIFIED

Reproduction Quality Notice

This document is part of the Air Technical Index [ATI] collection. The ATI collection is over 50 years old and was imaged from roll film. The collection has deteriorated over time and is in poor condition. DTIC has reproduced the best available copy utilizing the most current imaging technology. ATI documents that are partially legible have been included in the DTIC collection due to their historical value.

If you are dissatisfied with this document, please feel free to contact our Directorate of User Services at [703] 767-9066/9068 or DSN 427-9066/9068.

**Do Not Return This Document
To DTIC**

Reproduced by
AIR DOCUMENTS DIVISION



HEADQUARTERS AIR MATERIEL COMMAND

WRIGHT FIELD, DAYTON, OHIO

The
U.S. GOVERNMENT

IS ABSOLVED

FROM ANY LITIGATION WHICH MAY

ENSUE FROM THE CONTRACTORS IN -

FRINGING ON THE FOREIGN PATENT

RIGHTS, WHICH MAY BE INVOLVED.

REEL - C

794

A.T.I.

20798

UNCLASSIFIED

Leslie, W. H. P.

Electronics (3)
Electronic Tubes (8)
Tubes, Electronic (95220)

20798

EL-1408

Effect of life tests on electronic tube type CV257 (Neon stabilizer)

Royal Aircraft Establishment, Farnborough, Hants

Gt. Brit Eng.

Unclass. Unclass. Dec '46 14

tables, graphs

The effect of life tests on electronic tube type CV257 (Neon stabilizer) is presented. The CV257, a neon stabilizer used as a source of a reference voltage in electronic regulators and radio equipment is described. Tests on 12 samples show that the tube has a voltage stability of 2 per cent for 1000 hours, 0.7 per cent for 250 hours, and 0.7 per cent for 24 hours. Attention is drawn to the necessity for improving the interservice specification for this stabilizer.

NOTE: Copies of this report may be obtained only by U. S. Military Organisations.

Air Documents Division, T-2
AMC, Wright Field
Microfilm No.

RC-794 E20798

UNCLASSIFIED

NOT SUITABLE FOR FURTHER DISTRIBUTION REPORT No: EL. 1408

ATI No.

Incl 1 to
20798 Kp-78 752

ROYAL AIRCRAFT ESTABLISHMENT

Farnborough, Hants.

EFFECT OF LIFE TESTS ON ELECTRONIC VALVE TYPE CV287 (NEON STABILIZER)

by

W. H. P. LESLIE, B.Sc.

367295

ATTENTION IS CALLED TO THE PENALTIES ATTACHING
TO ANY INFRINGEMENT OF THE OFFICIAL SECRETS ACT

THIS DOCUMENT IS THE PROPERTY OF H.M. GOVERNMENT

IT IS INTENDED FOR THE USE OF THE RECIPIENT ONLY, AND FOR COMMUNICATION TO SUCH OFFICERS UNDER
HIM AS MAY REQUIRE TO BE ACQUAINTED WITH THE CONTENTS OF THE REPORT IN THE COURSE OF THEIR
DUTIES. THE OFFICERS EXERCISING THIS POWER OF COMMUNICATION WILL BE HELD RESPONSIBLE THAT SUCH
INFORMATION IS IMPARTED WITH DUE CAUTION AND RESERVE.

ANY PERSON OTHER THAN THE AUTHORISED HOLDER, UPON OBTAINING POSSESSION OF THIS DOCUMENT, BY
FINDING OR OTHERWISE, SHOULD FORWARD IT, TOGETHER WITH HIS NAME AND ADDRESS, IN A CLOSED ENVELOPE
TO:-

THE SECRETARY, MINISTRY OF SUPPLY,
THAMES HOUSE, MILLBANK, LONDON S.W.1

LETTER POSTAGE NEED NOT BE PREPAID; OTHER POSTAGE WILL BE REFUNDED.

ALL PERSONS ARE HEREBY WARNED THAT THE UNAUTHORISED RETENTION OR DESTRUCTION OF THIS
DOCUMENT IS AN OFFENCE AGAINST THE OFFICIAL SECRETS ACT 1911-1920.

NAD 2583 241

Inclosure *12* to Report No *R.2192-47*
Military Attache, London.

Class No. 621.385.22.032.182.004.62:621.316.722.1

Report No. EL.1408

December, 1946.

ROYAL AIRCRAFT ESTABLISHMENT, FARNBOROUGH

Effect of Life Tests on Electronic Valve
Type CV287 (Noon Stabilizer)

by

W.H.P. Leslie, B.Sc.

R.A.E. Ref: EL/G.3992/140

SUMMARY

The CV287 is used as a source of a reference voltage in Electronic Regulators and Radio Equipment. Tests on 12 samples show that the valve has a voltage stability of 2% for 1000 hours, 0.7% for 250 hours, 0.7% for 24 hours. Attention is drawn to the necessity for improving the Interservice Specification for this stabilizer.

Further tests, based on a larger number of samples, are necessary to give more representative results. A continuous record of voltage variations on a number of stabilizers would show whether the day-to-day variations occur in intermittent jumps or slow changes, but it is not proposed to carry out these tests.

LIST OF CONTENTS

	<u>Page</u>
1 Introduction	2
2 Method of Test	2
3 Results of Test	2
4 Comments on Test Results	3
5 Conclusions	5
References	6
Circulation	7

LIST OF TABLES

	<u>Table</u>	
Extremes of Voltage (250 hour periods)	I	3
Significant Rates of Voltage Change	II	4

LIST OF ILLUSTRATIONS

	<u>Figure</u>
CV287 tested at 3 milliamp.	1,2
CV287 tested at 6 milliamp.	3,4
CV287 tested at 9 milliamp.	5,6

1 Introduction

- 1.1 The increasing use of electronic regulators has caused a demand for an e.m.f. or voltage drop which has a fixed value independent of life.
- 1.2 The neon stabilizer has been used to obtain a constant voltage drop, reasonably independent of life and current.
- 1.3 This report deals with tests carried out during February and March, 1946, on the CV287, a neon stabilizer with the following characteristics¹.

Striking Voltage less than 170, with aux. anode suitably connected.

Voltage Drop at 5 m.a.	14.5 to 160 volts.
Change in Voltage when current is changed from 2 m.a. to 10 m.a.	5 volts maximum.
Size	54 mm. by 19 mm. dia.

- 1.4 The tests were carried out under laboratory conditions (temperature 15°C. to 25°C.) and the voltage of each stabilizer was recorded at 24 hour intervals. Fluctuations occurring during shorter intervals were not recorded.

2 Method of Test

- 2.1 An accuracy of 0.1% being required, substandard voltmeters were not suitable for reading the volt drop. A simple potentiometer, standardised daily against a standard cell, was used. The accuracy obtained was better than ± 0.1 volts in 150 and the potentiometer required a current of approximately 1 milliamp. from the voltage being measured.

- 2.2 Each stabilizer was supplied through a fixed resistor from a regulated 300 volt supply, which was adjusted to 300 volts ± 0.4 each day. The value of each resistor was chosen to give approximately the required current for a stabilizer of nominal voltage. This is representative of the normal use of the stabilizer. 4 stabilizers were operated at 3 milliamp., 4 at 6 milliamp., and 4 at 9 milliamp.

- 2.3 As described in 2.1 the potentiometer required approximately 1 m.a. due to low input impedance. This caused the neon stabilizer current during the voltage measurement to be 1 m.a. less than its running value. This had no bad effect since the current did not fall below the minimum regulating value.

3 Results of Test

- 3.1 The tests were carried on for 1,000 hours, the life generally required for airborne equipment.
- 3.2 Figures 1 to 6 show the variations in voltage throughout 1,000 hours for each stabilizer. The zero of the voltage scale has been suppressed, and the voltage level varies, but the voltage scale is the same in each figure to facilitate comparison. Since the changes in voltage are erratic in magnitude and sign the points have been joined by straight lines rather than smooth curves.
- 3.3 An alternative presentation of the results is given in Tables I and II. Table I states the maximum and minimum voltages of each stabilizer during intervals of 250 hours. This shows the long term stability. The maximum variation during 1000 hours is also stated.

Table I
Extremes of Voltage (250 hour periods)

Stabilizer No.	Test Current	Initial Voltage	0 to 250 hrs.		250 to 500 hrs.		500 to 750 hrs.		750 to 1000 hrs.		Maximum Variation	Average Variation
			Highest	Lowest	High	Low	High	Low	High	Low		
1	2.9 m.a.	150.2	<u>150.7</u>	<u>150.2</u>	150.5	149.8	150.0	149.6	150.0	<u>149.5</u>	1.2	
2	2.9 m.a.	148.5	<u>150.0</u>	<u>148.3</u>	150.0	149.0	149.3	149.0	149.4	<u>149.0</u>	1.7	1.9
3	2.9 m.a.	150.6	<u>150.6</u>	<u>147.4</u>	148.0	147.8	148.2	147.8	148.2	<u>148.0</u>	3.2	
4	2.9 m.a.	146.7	<u>146.7</u>	<u>145.6</u>	146.1	<u>145.5</u>	<u>147.1</u>	145.6	146.6	<u>146.0</u>	1.6	
5	5.9 m.a.	147.6	<u>148.9</u>	<u>147.6</u>	148.9	148.2	148.8	148.3	149.1	<u>148.6</u>	1.5	3.0
6	5.9 m.a.	140.6	<u>145.1</u>	<u>140.6</u>	145.7	144.9	146.5	145.6	<u>147.3</u>	<u>146.1</u>	6.7	
7	6.0 m.a.	147.2	<u>149.2</u>	<u>147.2</u>	149.1	148.1	148.4	147.9	149.1	<u>148.3</u>	2.0	
8	5.9 m.a.	148.7	<u>149.3</u>	<u>148.5</u>	149.2	<u>148.3</u>	<u>149.9</u>	148.8	149.0	<u>148.3</u>	1.6	1.7 neglecting No. 6.
9	9.3 m.a.	150.3	<u>150.6</u>	<u>150.0</u>	150.6	149.5	150.4	149.7	150.2	<u>149.1</u>	1.5	
10	9.4 m.a.	148.5	<u>149.7</u>	<u>148.5</u>	149.7	149.0	149.7	149.2	150.3	<u>149.6</u>	1.8	2.0
11	9.3 m.a.	146.2	<u>148.6</u>	<u>146.2</u>	148.6	147.8	148.5	148.0	<u>148.9</u>	<u>148.0</u>	2.7	
12	9.2 m.a.	146.3	<u>148.2</u>	<u>146.3</u>	148.2	147.4	<u>148.3</u>	147.8	<u>148.3</u>	<u>147.6</u>	2.0	

Extreme values during 1000 hours are underlined.

Table II

Significant Rates of Voltage Change

Stabilizer No.	3 m.a.										6 m.a.										9 m.a.									
	1		2		3		4		5		6		7		8		9		10		11		12							
	Volts	Hours	V	h	V	h	V	h	V	h	V	h	V	h	V	h	V	h	V	h	V	h	V	h						
0 to 150 hours	+0.5	72	+0.3	24	-3.1	24	-0.9	48	+0.7	24	+3.1	24	+1.1	24	+0.2	24	-0.3	24	+0.3	24	+0.9	24	+0.3	48						
	+0.2	24	-0.4	24	+0.5	150	+0.4	72	-0.7	24	-1.1	24	-0.2	72	+0.5	72	+0.6	120	+0.6	72	+0.8	48	-0.3	24						
	-1.0	150	+0.3	24	+0.2	24	-0.7	24	+0.2	24	+1.6	100	+0.4	72	-0.2	43	-0.6	43	-0.4	48	+0.7	72	+0.7	72						
	+0.3	48	-0.4	24	-0.2	72	+0.5	48	+0.3	48	+0.7	48	+0.6	24	+0.5	48	+0.6	24	+0.5	30	-0.3	72	+0.7	43						
500 to 1000 hrs.			+1.7	72			+0.5	48	-0.6		-0.7	24	-0.6	48	+0.4	24	+0.9	150	+0.7	150	-0.8	48	-0.7	150						
			-1.0	48					+0.4		+0.5	24	-0.6	48	-0.9	48	+0.9	150	+0.7	150	+0.7	150	+0.9	150						
															+0.3	48														
	-0.3	24	-0.2	48	+0.2	48	-0.5	72	-0.4	48	+0.4	24	-0.4	75	-0.7	72	-0.6	72	-0.5	75	-0.5	72	-0.5	72						
	+0.2	24	+0.2	96	+0.2	48	+0.3	72	+0.4	72	-0.3	48	+0.2	100	+0.4	72	+0.4	24	+0.5	100	+0.4	100	+0.4	96						
	-0.4	96	-0.3	150	-0.2	150	+1.2	48	+0.4	48	+0.3	72	+0.7	50	-0.4	50	-0.6	24	-0.3	48	-0.3	48	-0.4	48						
	+0.4	96	+0.5	48			-0.9	24	-0.2	48	+0.5	24	-0.3	24	-0.5	24	+0.3	48	+0.9	100	+0.7	48	+0.4	48						
	-0.5	120	-0.3	72			-0.5	48			+0.5	48	-0.5	72	-0.3	24	+1.1	48	-0.3	24	-0.3	48	-0.4	150						
				24			+0.6	48			+0.6	72	-0.4	72			-0.2	48	-0.4	24	-0.5	24	-0.3	24						

The right hand column states the average (for each 4 stabilizers tested under identical conditions) of the maximum variation.

Table II shows the larger rates of change of voltage stated as X volts in Y hours. This gives an indication of the day-to-day stability of the voltage.

4 Comments on Test Results

4.1 Tests carried out on 12 stabilizers, probably from the same batch, cannot give definite information of the best or worst qualities of the stabilizer, but the properties may be regarded as more extreme than the results obtained.

4.2 There is no sign of excessive voltage rise towards the end of life, indicating that the stabilizer is adequately rated.

4.3 Table I (or figures 1 to 6) shows that

(a) The change in the first 250 hours was as large as 4.5 volts (No.6), 3.2 volts (No.3), and 2.4 volts (No.11).

(b) In each subsequent 250 hours the maximum change was of the order of 1.0 volts.

No.1, No.5, and No.12 were better with a change of 0.7 to 0.8 volts.

(c) The change in 1000 hours varied between 1.2 volts and 3.2 volts (with the exception of No.6 which may be seen in Fig.3 to have a defect causing a progressive rise in voltage with life. Maximum change 6.7 volt).

(d) If No.6 is disregarded the change in voltage over 250 hour periods, and over 1000 hours, is seen to be independent of operating current.

(e) Table II (or figures 1 to 6) show that changes as high as ± 3 volts occurred in 24 hours (Nos.3 and 6). If No.6 is neglected it is noteworthy that in the case of No.3 the change of -3.1 volts occurred in the first 24 hours and after a return of +0.5 volts in 150 hours there was no change greater than 0.2 volts in 24 hours.

In addition stabilizers Nos.1, 2, 4, 7, 9, 10, 11, all had changes of the order of ± 1 volt in 24 to 150 hours.

No.2 had a change of +1.7 in 72 hours.

No.7 had a change of +1.1 in 24 hours.

4.4 The specification¹ for this valve gives no indication of the required stability from second to second, or during the unstated life of the valve, only requiring the voltage to be between 145 and 160 volts at 5 m.a. when new. It does not specify whether the voltage should increase or decrease when the current changes from 2 to 10 milliamp. so that at 2 or 10 milliamp. the voltage limits are 140 to 165 volts.

Table I shows that apart from No.6 all the stabilizers would be within these limits throughout their life.

5 Conclusions

5.1 The CV287 may be used as a voltage reference source providing variations of the following order can be tolerated.

- (1) $\pm 2\%$ in 1000 hours.
- (2) $\pm 0.7\%$ in 250 hours.
- (3) $\pm 0.7\%$ in 24 hours.

5.2 In what may be exceptional stabilizers, changes occurred as great as:-

- (1) 4% in 1000 hours (No.6).
- (2) 2% and 3% in 250 hours (Nos.3 and 6).
- (3) 2% in 24 hours (Nos.3 and 6).

5.3 The best performances in a 250 hour period were:-

- (1) $\pm 0.15\%$ (No.3).
- (2) $\pm 0.2\%$ (No.2).
- (3) $\pm 0.3\%$ 8 out of 12 stabilizers at some particular part of their life.

5.4 The specification rating of 2 m.a. to 10 m.a. appears to lead to a satisfactory life.

5.5 The inter-service specification could be improved (see 4.4).

5.6 A greater number of samples with different manufacturing histories would have to be tested to obtain data justifying design of equipment relying on the stabilities quoted in this report.

5.7 No account has been taken of changes occurring in intervals shorter than 1 day although it is suspected that the change in 5 minutes may be of the same order as that recorded for 1 day.

Tests using an accurate recording system are necessary, but not contemplated at present.

5.8 The voltage of the CV287 is more stable than that of the CV188² for periods greater than 24 hours.

5.9 The voltage of the CV287 is considerably more stable than that of CV286³.

References

1. Specification MOS/CV287/Issue 3.
2. Effect of Life Tests on Electronic Valve Type CV188. (Neon Stabilizer). R.A.E. Report EL.1406.
3. Effect of Life Tests on Electronic Valve Type CV286. (Neon Stabilizer). R.A.E. Report EL.1407.

Attached:

Figures 1 to 6. Drgs. No. EL.15170 to 15175 incl.

Circulation:

D.D.C.D.1.	
A.D./C.D.3.	
D.Inst.R.D.	
A.D.R.D.Inst.EL.	
Chief Superintendent T.R.E.	(3 copies)
Chief Superintendent S.R.D.E.	(3 copies)
Post Office Research Station, Dollis Hill	
R.T.P./T.I.B.	(70 copies)
Director, R.A.E.	
Head of EL. Dept.	
Head of Inst. Dept.	
Head of Radio Dept.	
Valve Group Radio Dept.	(3 copies)
Head of Armament Dept.	
Head of Guided Projectile Dept.	
Library	(2 copies)

FIG. 1.

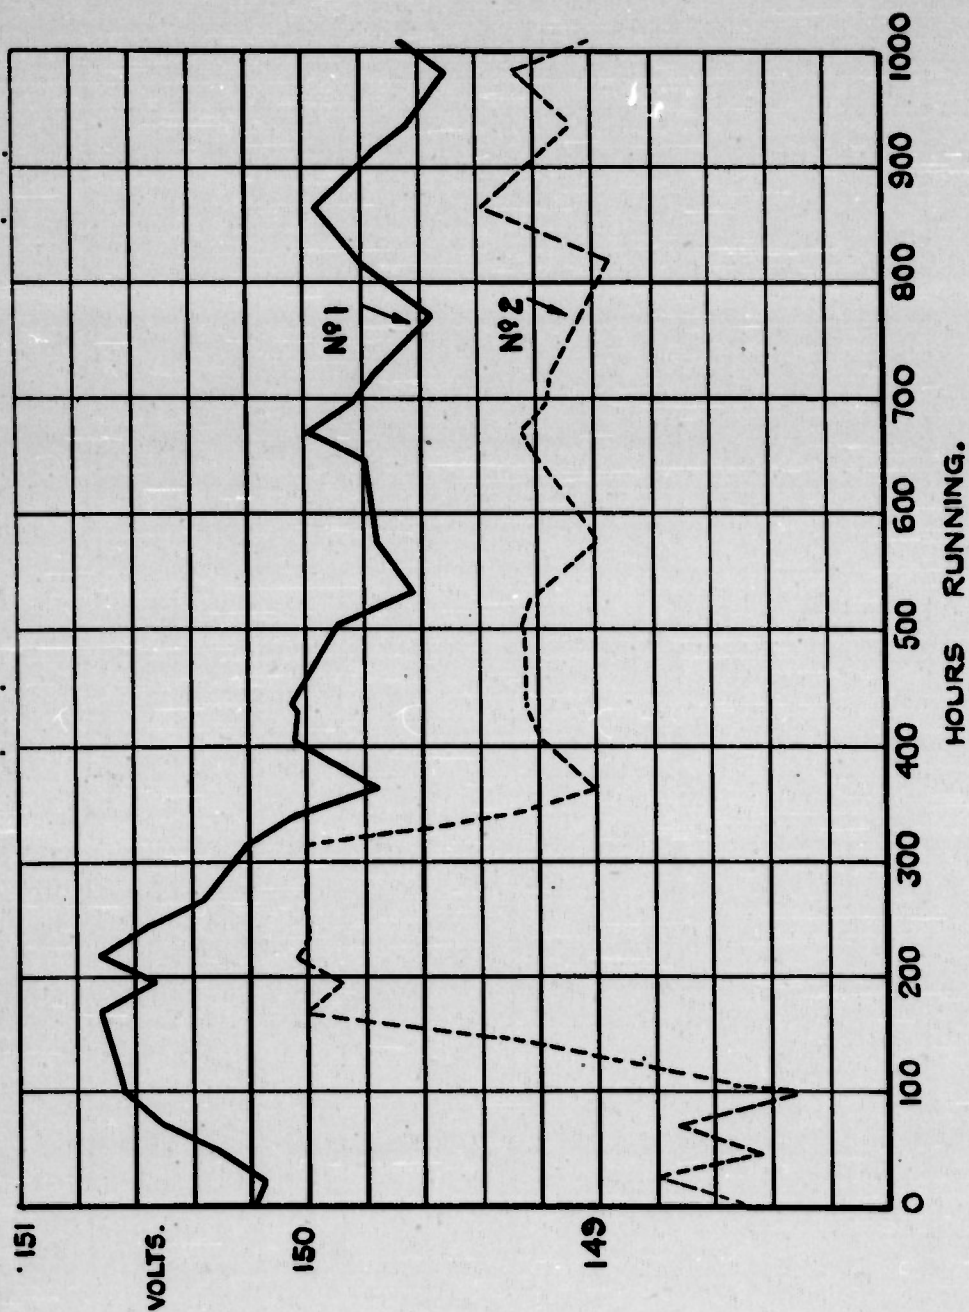


FIG. 1. LIFE TEST ON VALVE TYPE CV 287 TESTED AT 3. ma.

FIG.3

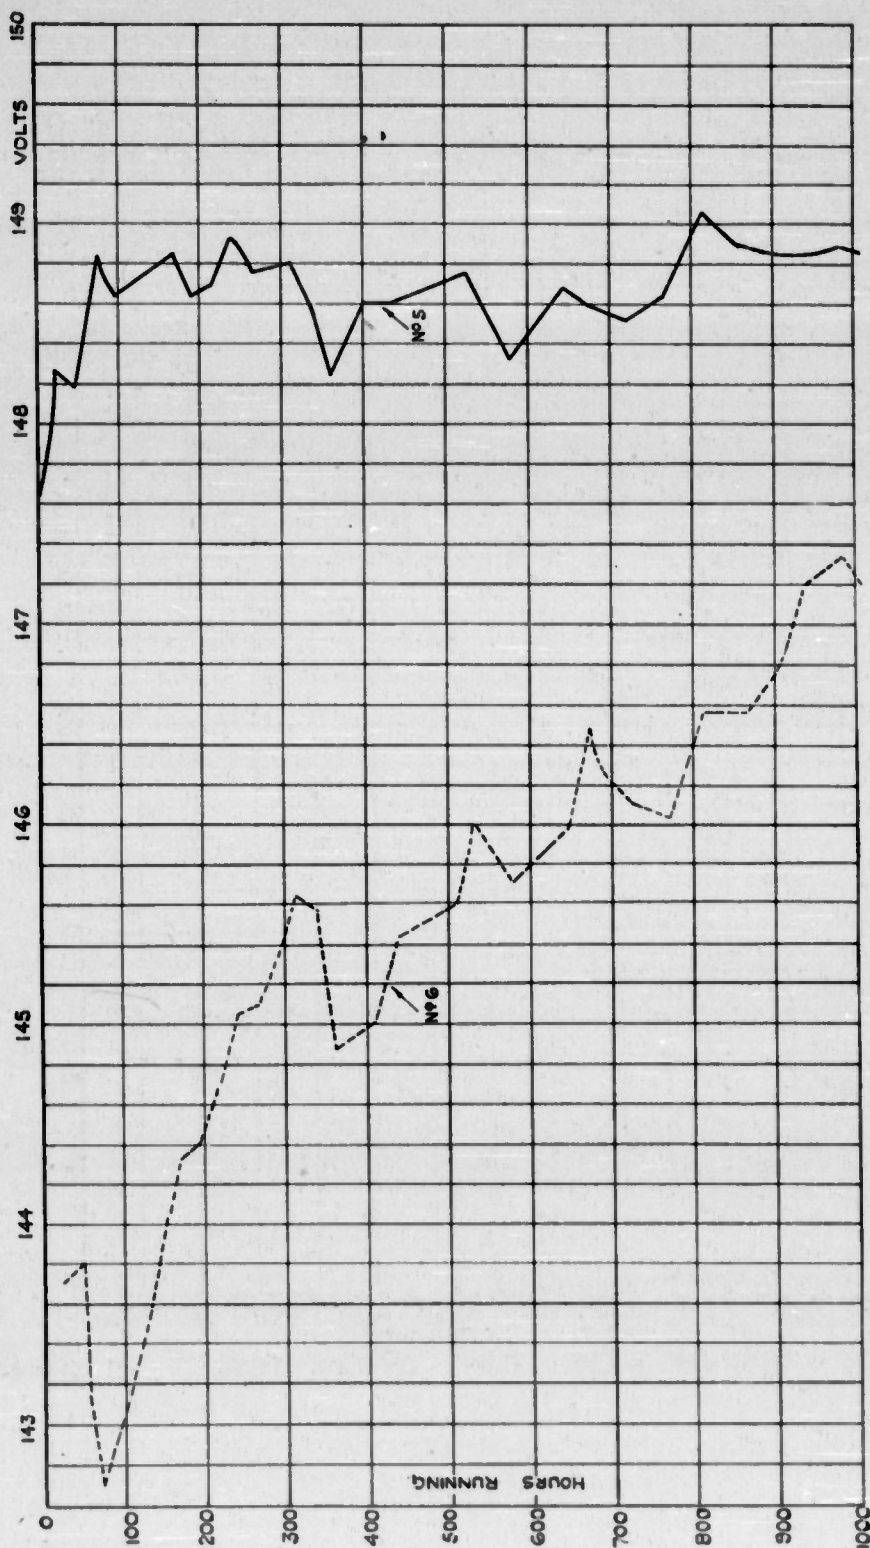


FIG.3. LIFE TEST ON VALVE TYPE CV.287 TESTED AT 6 m.a.

FIG. I.

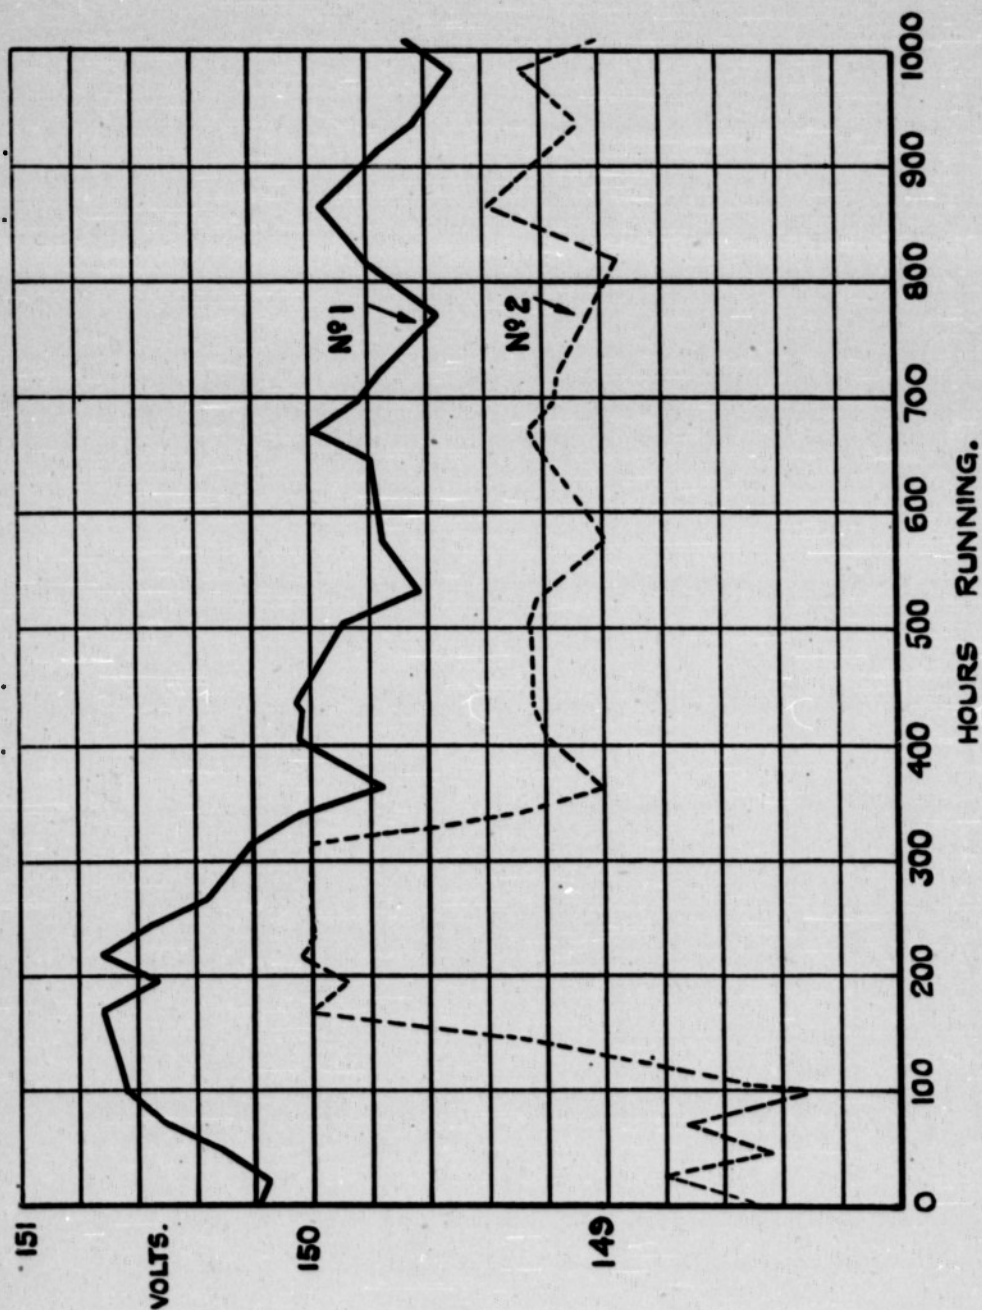


FIG. I. LIFE TEST ON VALVE TYPE CV 287 TESTED AT 3. ma.

FIG. 4.

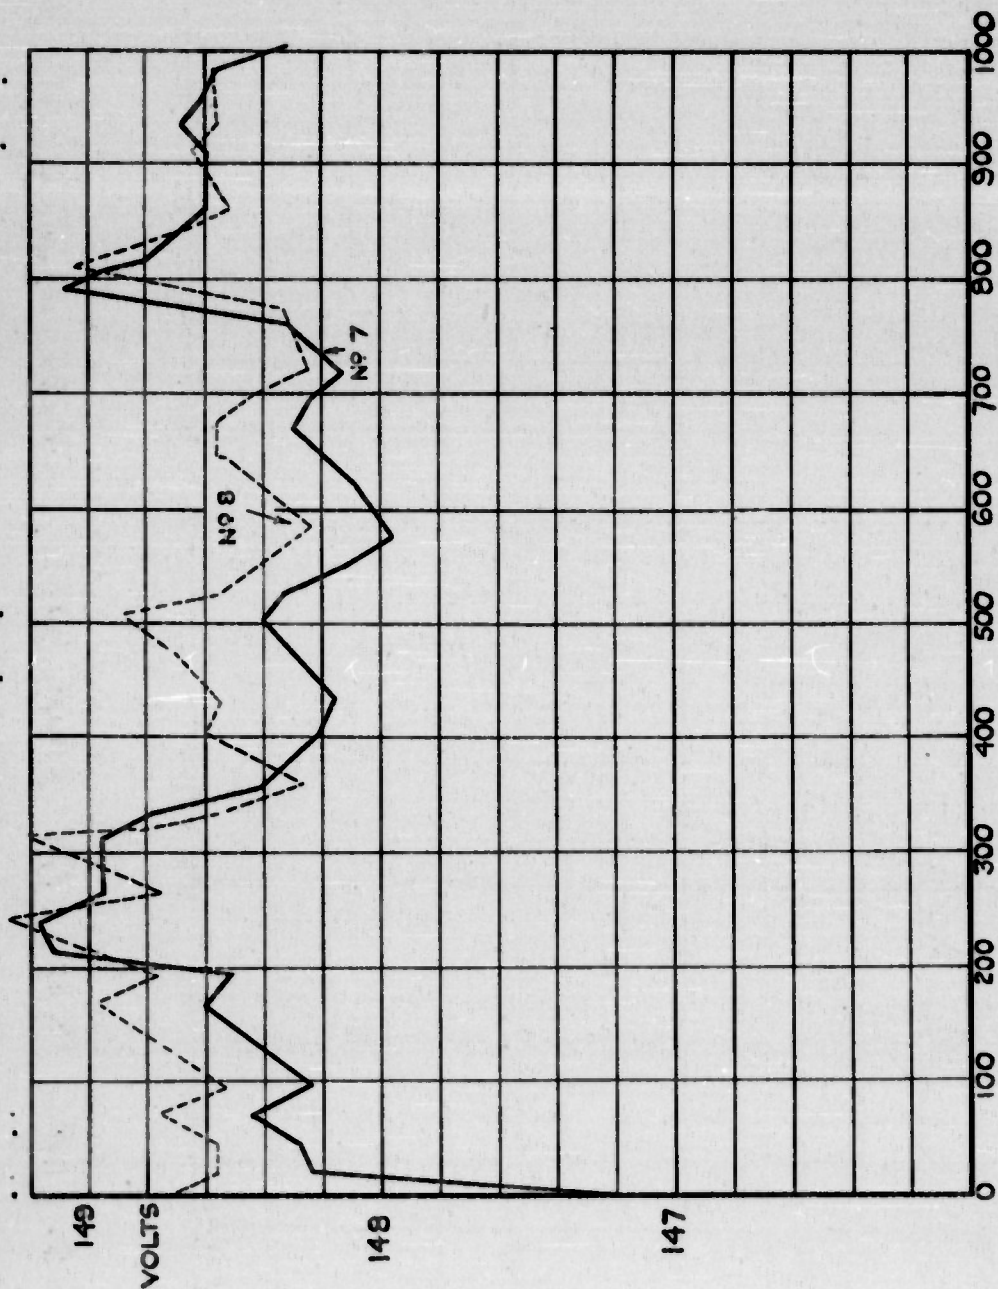


FIG. 4 LIFE TESTS ON VALVE C.V. 287 TESTED AT 6 m.a.

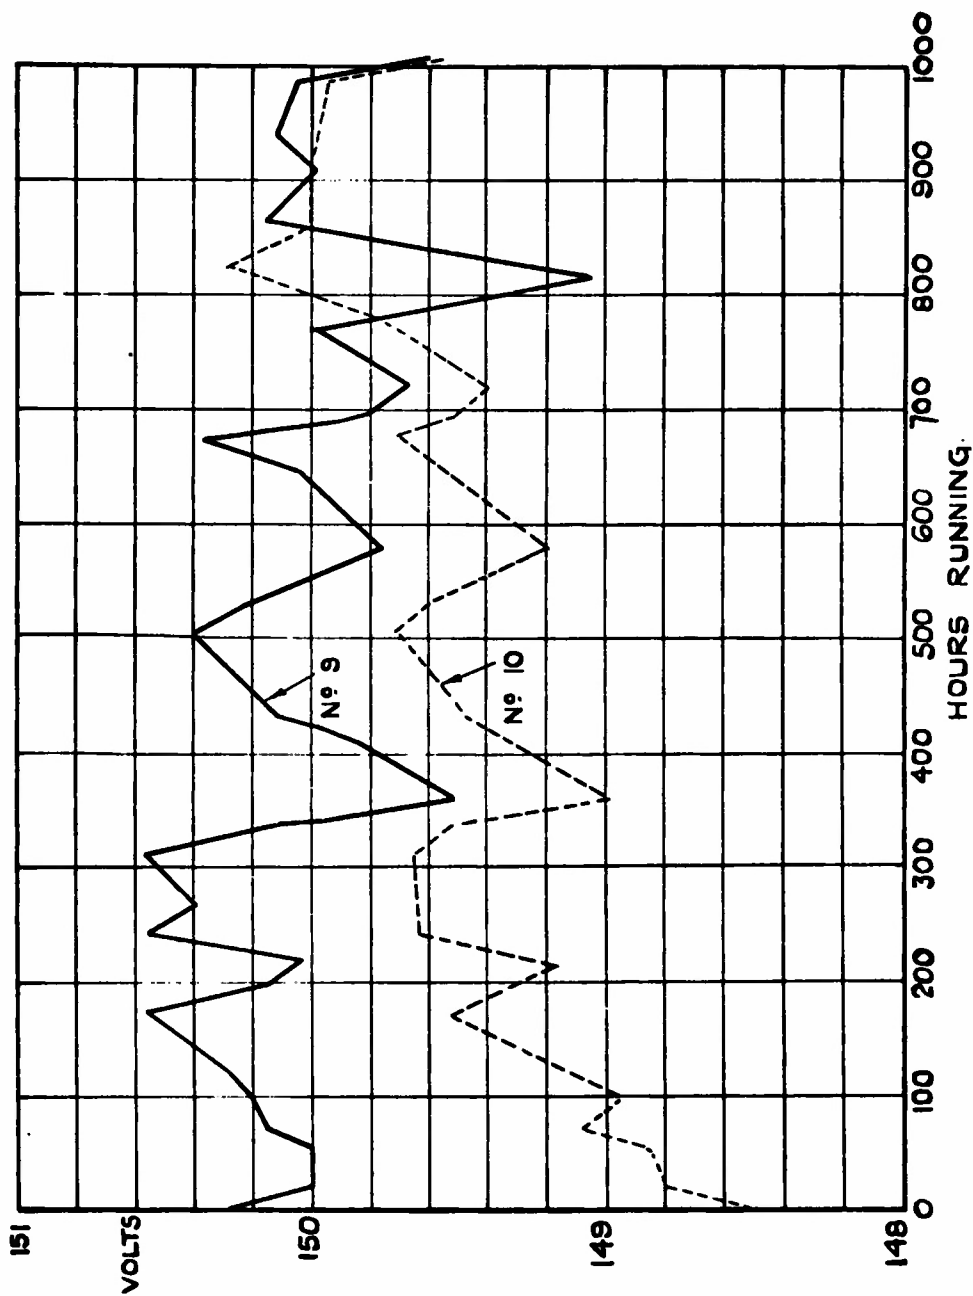


FIG. 5. LIFE TESTS ON VALVE TYPE CV 287 TESTED AT 9 m.a.

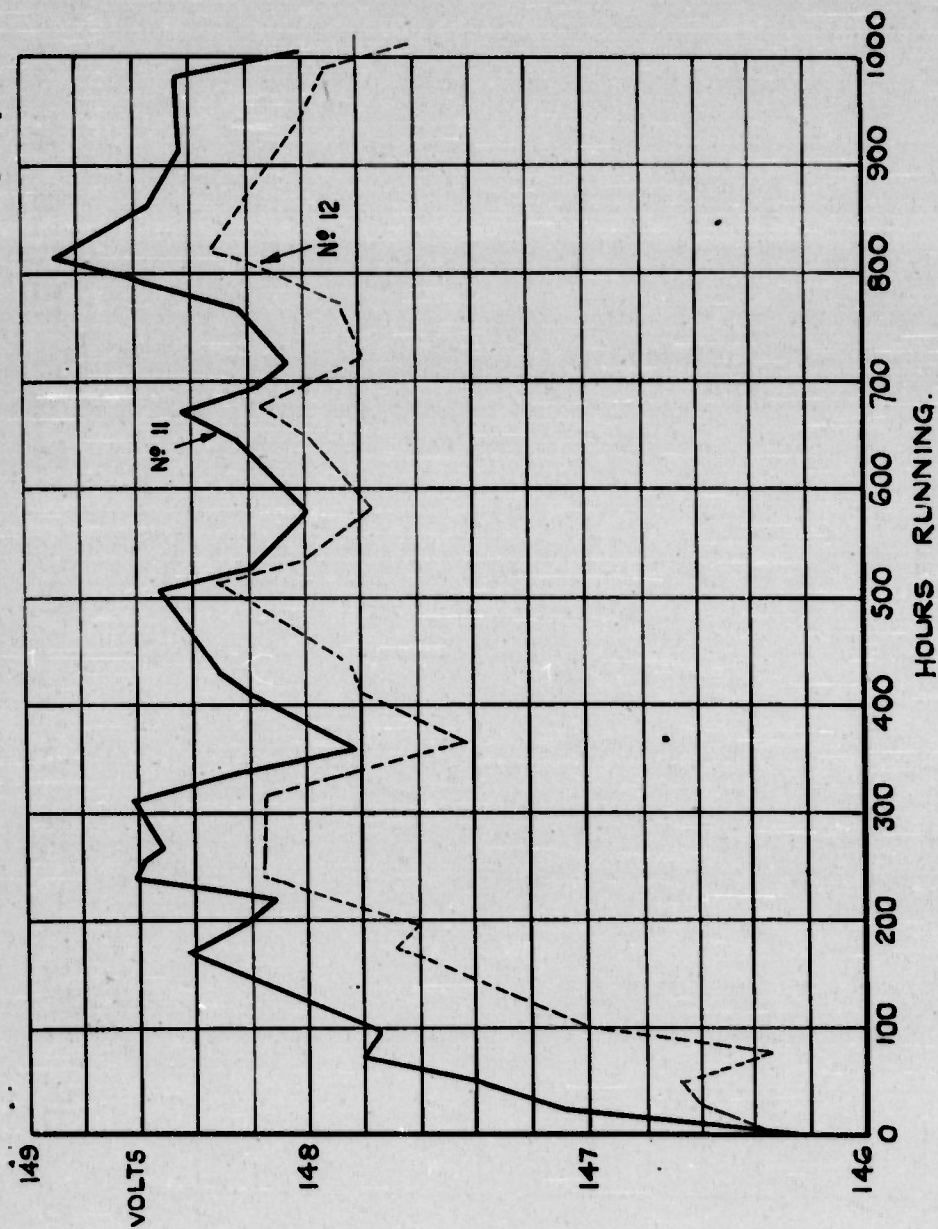


FIG. 6 LIFE TESTS ON VALVE TYPE CV287 TESTED AT 9 m.a.

REEL - C

794

A.T.I.

20798



*Information Centre
Knowledge Services*

[dstl] *Forrest Pown,
Salisbury*

Halls

SP4 600

22060-6218

Tel: 01980-613753

Fax 01980-613970

Defense Technical Information Center (DTIC)
8725 John J. Kingman Road, Suit 0944
Fort Belvoir, VA 22060-6218
U.S.A.

AD#: ADB804921

Date of Search: 20 May 2009

Record Summary: AVIA 6/13540

Title: Effect of Life Tests on Electronic Valve Type CV287

Availability Open Document, Open Description, Normal Closure before FOI Act: 30 years

Former reference (Department), E.L. 1408

Held by: The National Archives, Kew

This document is now available at the National Archives, Kew, Surrey, United Kingdom.

DTIC has checked the National Archives Catalogue website (<http://www.nationalarchives.gov.uk>) and found the document is available and releasable to the public.

Access to UK public records is governed by statute, namely the Public Records Act, 1958, and the Public Records Act, 1967.

The document has been released under the 30 year rule.

(The vast majority of records selected for permanent preservation are made available to the public when they are 30 years old. This is commonly referred to as the 30 year rule and was established by the Public Records Act of 1967).

This document may be treated as UNLIMITED.

REF ID: A6468 (13 MAR 47)

Leslie, W. H. P.

DIVISION: Electronics (3)

SECTION: Electronic Tubes (8)

CROSS REFERENCES: Tubes, Electronic (95220)

17-3-8-39

ATI- 20798

ORIG. AGENCY NUMBER

EL-1408

REVISION

AUTHOR(S)

AMER. TITLE: Effect of life tests on electronic tube type CV287 (Neon stabilizer)

FORG'N. TITLE:

ORIGINATING AGENCY: Royal Aircraft Establishment, Farnborough, Hants

TRANSLATION:

COUNTRY	LANGUAGE	FORG'N. CLASS.	U. S. CLASS.	DATE	PAGES	ILLUS.	FEATURES
Gt. Brit.	Eng.	Unclass.	Unclass.	Dec '46	14		tables, graphs

ABSTRACT

The effect of life tests on electronic tube type CV287 (Neon stabilizer) is presented. The CV287, a neon stabilizer used as a source of a reference voltage in electronic regulators and radio equipment is described. Tests on 12 samples show that the tube has a voltage stability of 2 per cent for 1000 hours, 0.7 per cent for 250 hours, and 0.7 per cent for 24 hours. Attention is drawn to the necessity for improving the interservice specification for this stabilizer.

NOTE: Copies of this report may be obtained only by U. S. Military Organizations.

T-2, HQ., AIR MATERIEL COMMAND

AIR TECHNICAL INDEX

WRIGHT FIELD, OHIO, USAAF

WT-O-21 MAR 47

ATI No:

US Classification:

OA No:

TITLE:

310450 20792 Unclass. E141492
Effect of (Ako tests) on electronic valve type (H/20)
(Hood stabilizer) & Elec frequency sensitive valves

AUTHOR(S):

Inalio, W. H. P. P13/11

OA:

Royal Aircraft Establishment, Farnborough, Hants

Foreign Title:

Previously cataloged under No:

AD-B804 921

Translation No:

Subject

Section:

310450
MCI - Form 89B
Library Card