

UNCLASSIFIED

AD NUMBER
ADB815747
LIMITATION CHANGES
TO: Approved for public release; distribution is unlimited. Document partially illegible.
FROM: Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; 08 JAN 1946. Other requests shall be referred to Office of Scientific Research and Development, Washington, DC 20301. Document partially illegible.
AUTHORITY
SOD memo dtd 2 Aug 1960

THIS PAGE IS UNCLASSIFIED

Reproduced by
AIR DOCUMENTS DIVISION



HEADQUARTERS AIR MATERIEL COMMAND
WRIGHT FIELD, DAYTON, OHIO

The
U.S. GOVERNMENT

IS ABSOLVED

FROM ANY LITIGATION WHICH MAY

ENSUE FROM THE CONTRACTORS IN -

FRINGING ON THE FOREIGN PATENT

RIGHTS WHICH MAY BE INVOLVED.

REEL - C

4 8 2

A.T.I.

1 3 8 0 2

**STREAMLINED MICROWAVE
OMNI-DIRECTIONAL ANTENNAS**

**REPORT
871**

**RADIATION LABORATORY
MASSACHUSETTS INSTITUTE OF TECHNOLOGY
CAMBRIDGE • MASSACHUSETTS**

NDRC
Div. 14
GEMur-262

Radiation Laboratory

Report 871

January 8, 1946

STREAMLINED MICROWAVE OMNI-DIRECTIONAL ANTENNAS

Abstract

High speed aircraft require antennas which are inherently streamlined. Details are given of antennas for both horizontal and vertical polarization at S-band. For horizontal polarization a pair of slots on the flat faces of a streamlined section give excellent results when fed by a slotted dipole. For vertical polarization a pair of vertical dipoles may be used. The designs are such as to provide satisfactory azimuth and elevation patterns with tolerable match.

C. E. Barker
H. J. Riblet

Approved by: *L. C. Smith*
Leader, Group 54

A. H. Hill
Head, Division 5

Title page
2 Numbered Pages
1 Bibliography
9 Pages of Figures

STREAMLINED MICROWAVE OMNI-DIRECTIONAL ANTENNAS

In previous reports, 1,2,3 one of the writers has described microwave omni-directional antennas for both horizontal and vertical polarization. These have all depended for their uniformity of pattern on a certain azimuthal symmetry. In particular, the outer extent of these antennas has been circular. The success of S and X-band ground radars has raised to considerable importance the problem of designing suitable omnidirectional antennas which can be installed on military aircraft for identification and communication purposes. Although the use of very fast planes puts a great premium on flush antennas, the performance of the radars has often been so critical that satisfactory results can be hoped for, only if the antenna is mounted clear and free of the aircraft. One can try simply to use streamlined covers on the antenna types described in the above reports, but unfortunately these are of such a size that the resulting side loads present very serious, if not impossible, mechanical problems. It is clear then that, for satisfactory solution of these problems, antenna forms which lend themselves to streamlining, i. e., have one very narrow dimension, are necessary. We have found it possible to get very satisfactory performance from antennas of this type for both horizontal and vertical polarization.

A. Horizontally Polarized Antennas at S-band.

Fig's 1 and 2 show two versions of a scheme which will give satisfactory performance for a horizontally polarized beacon antenna at S-band. The basic fact governing the operations of these antennas is that a pair of slots centrally cut in the opposite sides of a thin waveguide when excited 180° out of phase has a nearly uniform azimuthal pattern. These slots may be excited either by probes extending into the guide or by means of the slotted dipole shown in the figures 1 and 2. The advantages of this latter procedure are at least two in number. Feeding power from a cable is very simple and considerable space is available in the structure for feeding other antennas. Fig. 3 gives the azimuthal pattern for both the whole and half slot antenna. The elevation patterns of the two antennas are shown in Fig. 4. Fig. 5 shows the SRR over a band for the two different types.

The antenna of Fig. 2 was constructed from that of Fig. 1 by cutting off the upper half of the cavity. Then, in order to suppress direct radiation from the remainder of the cavity, two straps shown in the figure were added. This had the desired effect, although the elevation beam width is somewhat wider than that of the full slot antenna.

B. Vertically Polarized Antennas at S-band.

Fig's 6 & 7 show two slightly different versions of antennas which are usable for vertical polarization. The difference between 6 and 7 is that the element in 7 is so constructed that two quarter inch coaxial lines can be run side by side making possible the construction of a combined transmitting and receiving antenna in a single unit.

The element used in the antenna of Fig. 6 is called the single line H element or just H-element while that of Fig. 7 is called the double line H element or simply double H-element. The azimuthal patterns of the two types are shown in Fig. 8. Fig. 9 gives the elevation patterns of 2 and 3 bay arrays of H elements. Since the double H elements were to be used singly but in close proximity, chokes or wave traps as shown in Fig. 7 were placed on both sides of the element as indicated in Fig. 10. These serve to reduce the cross talk between the transmitting and receiving antennas and to minimize the stray currents flowing on the feeder. An elevation pattern of a double H element with wave traps is given in Fig. 10. Fig. 11 gives the $(\text{SWR})^2$ over a band of a two bay array of H-elements mounted as shown in Fig. 6. Preliminary measurements indicated that comparable bandwidth could be expected of the single double-H element with wave traps.

It will be observed perhaps that for none of these antennae are patterns shown over a frequency band. Although some of this data exists, it is nevertheless not complete, and when the war ended there seemed to be no good reason for getting it. The important fact is that in general, the requirements on SWR for these antennas will more quickly limit their usefulness than requirements on pattern.

C. B. Berker
H. J. Riblet
November 26, 1945

Bibliography

1. Radiation Laboratory Report, 517 S-Band Horizontally Polarized Non-directional Antennas, H. J. Riblet, February 14, 1944
2. Radiation Laboratory Report, 623 S-Band Vertically Polarized Non-directional Antennas, H. J. Riblet, December 20, 1944
3. Radiation Laboratory Report, 489 X-Band Horizontally Polarized Non-directional Antennas, H. J. Riblet, April 22, 1944

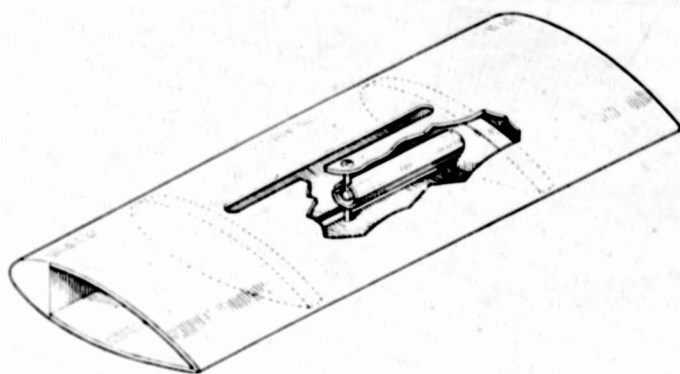


FIG. 1 FULL-SLOT ANTENNA S-BAND

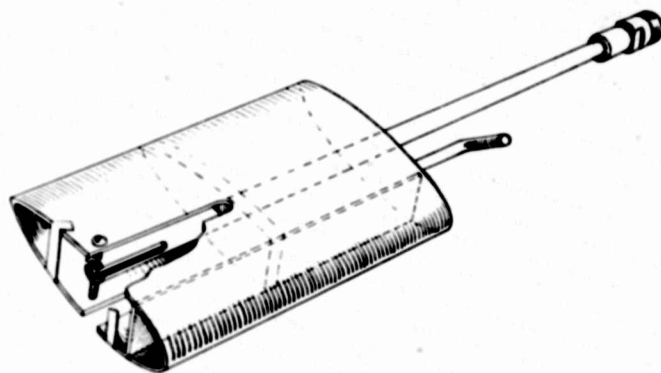


FIG. 2 HALF-SLOT ANTENNA S-BAND

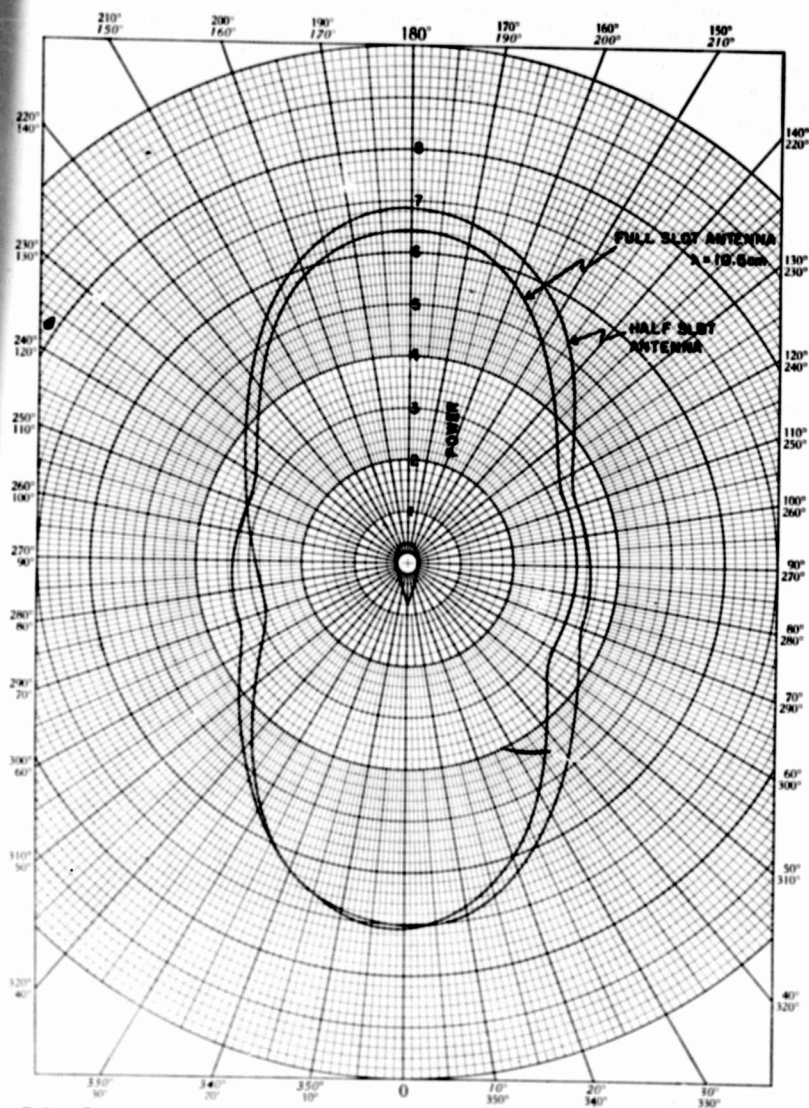


FIG. 3 — AZIMUTH PATTERNS OF SLOTTED BEACON ANTENNAS

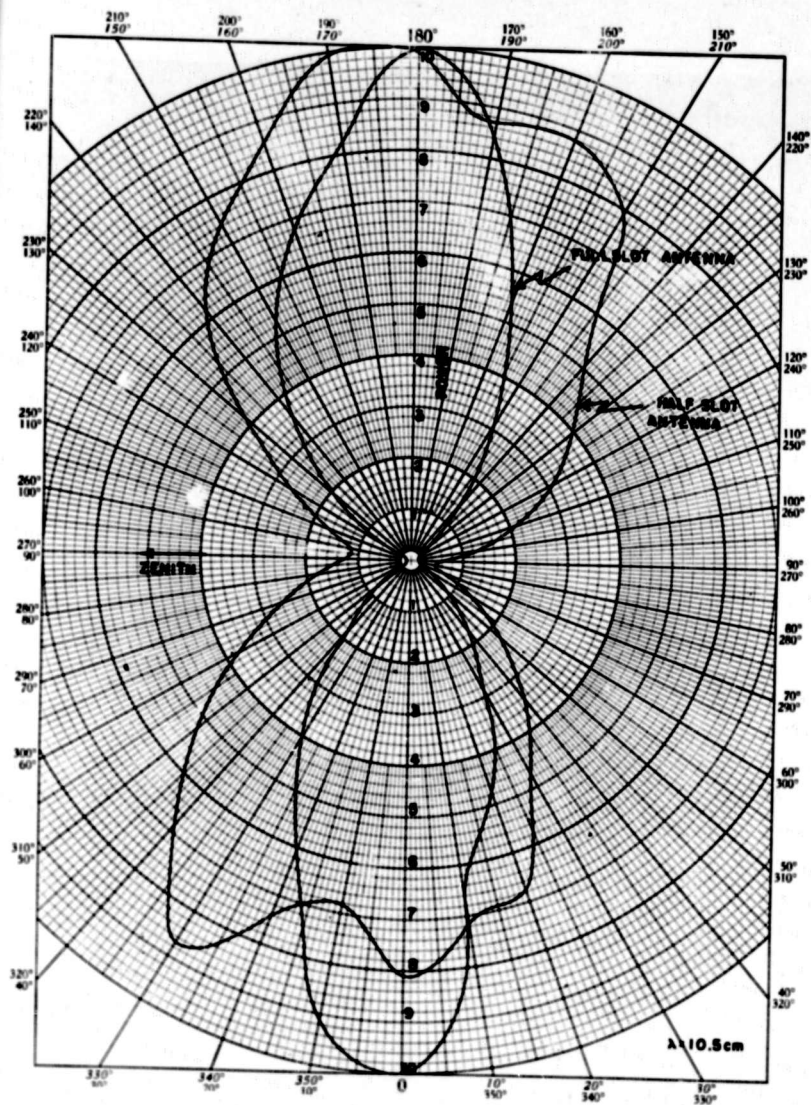


FIG. 4 - ELEVATION PATTERNS OF SLOTTED ANTENNAS

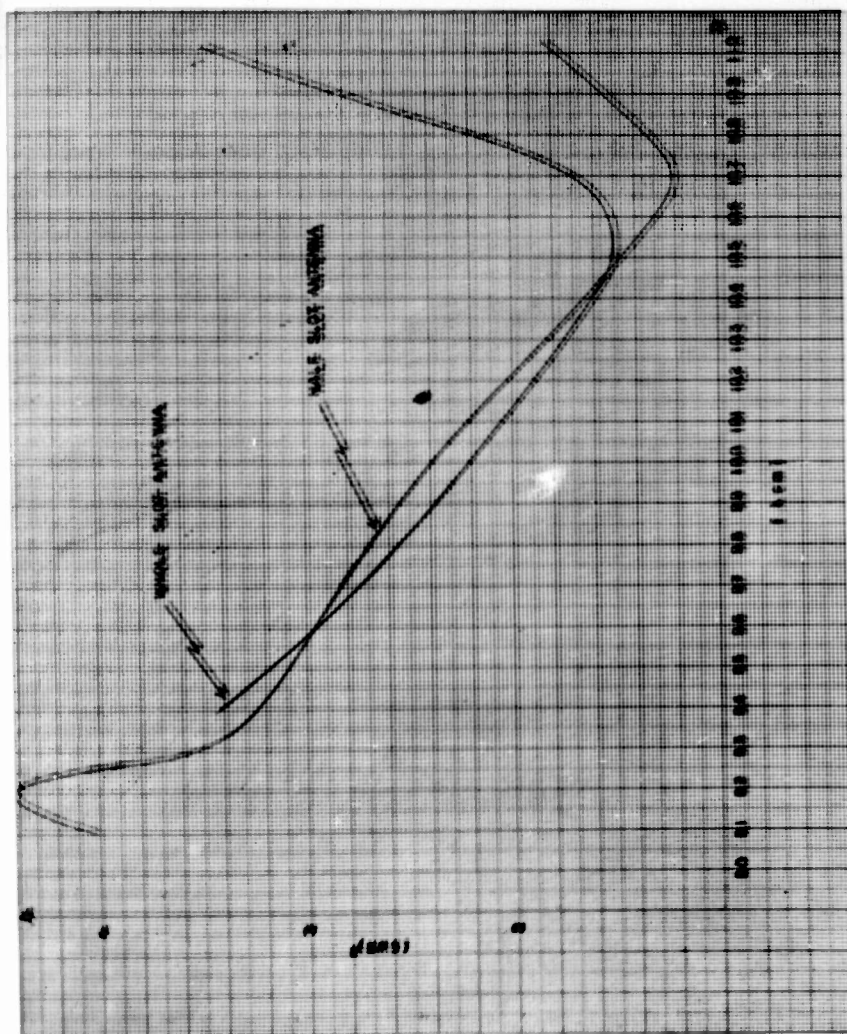


FIG. 5 - (SWR)² OF SLOTTED BEACON ANTENNAS

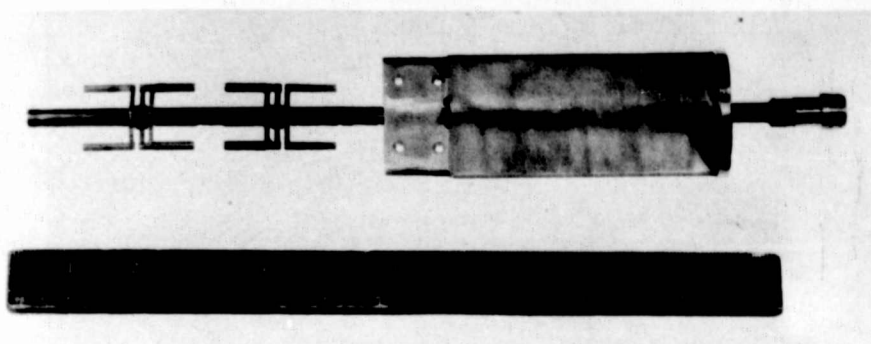


FIG. 6 — SINGLE LINE H-ELEMENT

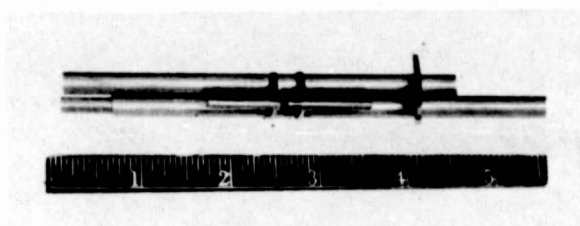


FIG. 7 — DOUBLE LINE H-ELEMENT

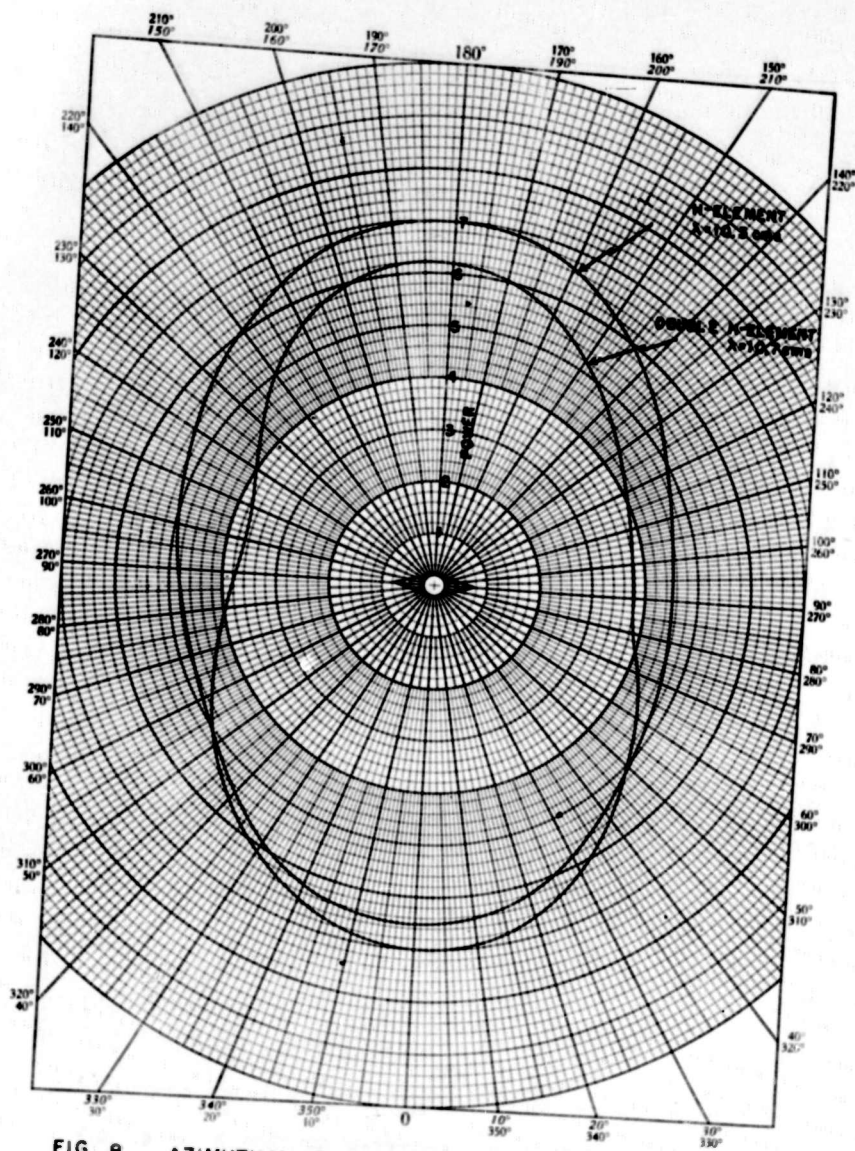


FIG. 8 AZIMUTHAL PATTERNS OF H-ELEMENT ANTENNAS

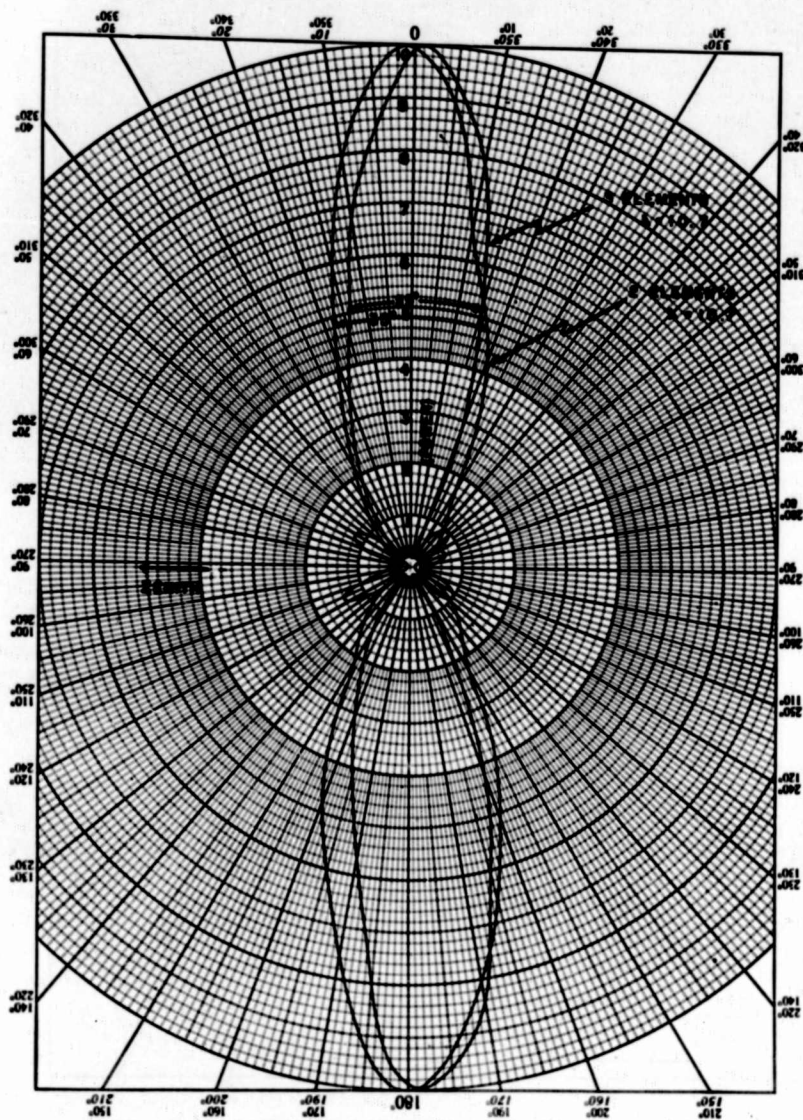


FIG. 9 — ELEVATION PATTERNS OF 2 AND 3 ELEMENT
H-ANTENNAS

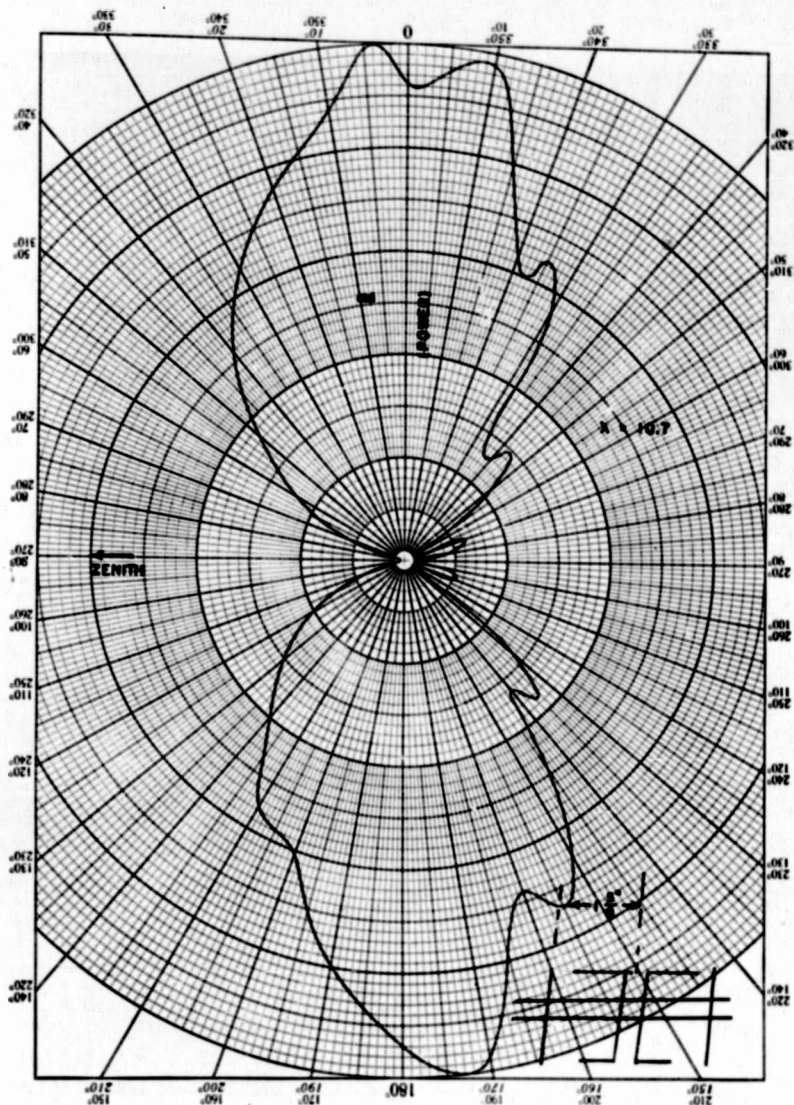


FIG. 10 - ELEVATION PATTERN OF SINGLE DOUBLE
H ELEMENT ANTENNA

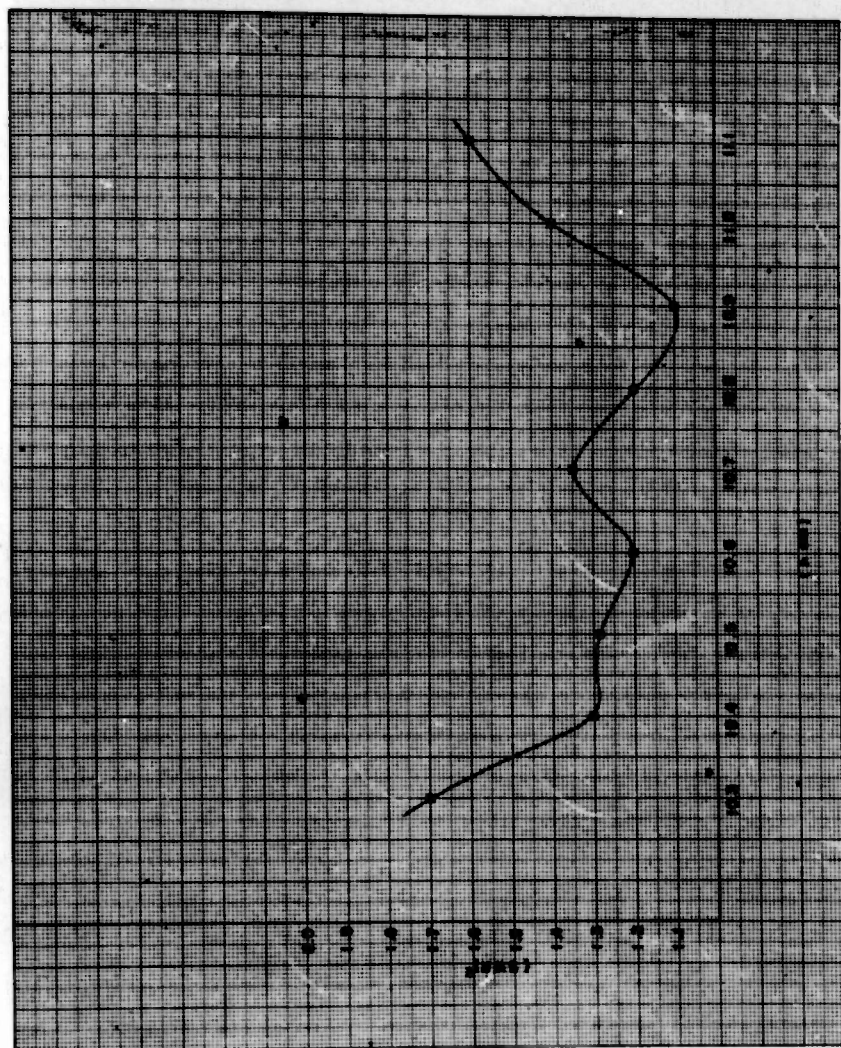


FIG. 11 - (SWR)² OF 2 ELEMENT H ANTENNA

REEL - C

4 8 2

A.T.I.

1 3 8 0 2

ISD FORM 69 (13 MAR 47)

Barker, C. B.

Riblet, H. J.

DIVISION: Electronics (3)

SECTION: Antennas (9)

CROSS REFERENCES: Antennas (11050)

7-3-9-49

ATI- 13802

ORIG. AGENCY NUMBER

R-871

REVISION

AUTHOR(S)

AMER. TITLE: Streamlined microwaves omni-directional antennas

FORG'N. TITLE:

ORIGINATING AGENCY: Massachusetts Inst. of Technology, Radiation Lab., Cambridge

TRANSLATION:

COUNTRY	LANGUAGE	FORG'N. CLASS	U. S. CLASS.	DATE	PAGES	ILLUS.	FEATURES
U.S.	Eng.		Unclass.	Nov '45	13	11	photos, graphs

ABSTRACT

High-speed aircraft require antennas which are streamlined. Details are given of both horizontal and vertical polarization characteristics of S-band antennas. For horizontal polarization a pair of slots on the flat faces of a streamlined section gives excellent results when fed by a slotted dipole. For vertical polarization a pair of vertical dipoles may be used. The designs are such as to provide satisfactory azimuth and elevation with tolerable match.

T-2, HQ., AIR MATERIEL COMMAND

AIR TECHNICAL INDEX

WRIGHT FIELD, OHIO, USAAF

DT-0-31 MAR 47

TITLE: Streamlined Microwave Omni-Directional Antennas

ATI- 24501

AUTHOR(S): Barker, C. B.; Riblet, H. J.

REVISION:
(None)

ORIGINATING AGENCY: Massachusetts Inst. of Technology, Radiation Lab., Cambridge

COND. AGENCY NO.
R-871

PUBLISHED BY: Office of Scientific Research and Development, NDRC, Div 14

PUBLISHING AGENCY NO.
(None)

DATE
Nov '45

DOC. CLASS.
Unclass.

COUNTRY
U.S.

LANGUAGE
Eng.

PAGES
13

ILLUSTRATIONS
photos, graphs, drwgs

ABSTRACT:

A description is given of streamlined microwave omni-directional antennas for use on military aircraft for identification and communication purposes. Details are given of the antennas for both horizontal and vertical polarization at S-band. For horizontal polarization a pair of slots on the flat faces of a streamlined section give excellent results when fed by a slotted dipole. For vertical polarization a pair of vertical dipoles may be used. The designs are such as to provide satisfactory azimuth and elevation patterns with tolerable match.

DISTRIBUTION: Copies of this report obtainable from Air Documents Division; Attn: MCIDXD

DIVISION: Electronics (3)

SECTION: Antennas (9)

SUBJECT HEADINGS: Atennas, Aircraft (11063.5);
IFF (50301)

ATI SHEET NO.: R-3-9-35

Air Documents Division, Intelligence Department
Air Materiel Command

AIR TECHNICAL INDEX

Wright-Patterson Air Force Base
Dayton, Ohio