

AD No. 16275
ASTIA FILE COPY

OFFICE OF NAVAL RESEARCH

Contract N7onr-35801

T. O. I.

NR-041-032

Technical Report No. 93

THE BEARING CAPACITY OF A FOOTING

ON A SOIL (PLANE-STRAIN)

by

R. T. Shield

GRADUATE DIVISION OF APPLIED MATHEMATICS

BROWN UNIVERSITY

PROVIDENCE, R. I.

August, 1953

THE BEARING CAPACITY OF A FOOTING ON A SOIL (PLANE-STRAIN)¹by R. T. Shield²

Brown University

The purpose of this report is to outline a method of showing that the Prandtl stress solution [1]³ to the plane-strain problem of a flat rigid punch (or footing) is valid for soils with cohesion whose angles of internal friction are less than 75 degrees. Since a kinematically admissible velocity field can be associated with the Prandtl stress solution [2], limit analysis [3,4] shows that the Prandtl value [1]

$$p = c \cot \varphi [\exp(\pi \tan \varphi) \tan^2(\frac{\pi}{4} + \frac{\varphi}{2}) - 1] \quad (1)$$

is an upper bound for the collapse value of the average pressure over the punch, where c is the cohesion and φ is the angle of internal friction of the soil. A statically admissible extension of the Prandtl stress field into the rigid region is found here, so that the value (1) is also a lower bound and therefore the true value of the average pressure.

In Fig. 1, OE is the center-line of the punch OA indenting the surface OD of the soil. The region OBCD is composed of the Prandtl stress field of two regions of constant state, OAB and ADC, and a region of radial shear ABC. The Prandtl

¹The results presented in this paper were obtained in the course of research sponsored by the Office of Naval Research under Contract N7onr-35801 with Brown University.

²Research Associate in Applied Mathematics, Brown University.

³Numbers in square brackets refer to the bibliography at the end of the paper.

field is continued to the line of stress discontinuity BSF which is as yet unspecified. The stress field below this line is determined from the following conditions. (i) σ_x and σ_y are functions of y only and x only respectively and τ_{xy} is zero, satisfying the equilibrium equations and the symmetry condition across OE. (ii) In the immediate neighborhood of the line of discontinuity, the material is in a plastic state of stress. These conditions, together with the jump conditions [5] across the line of discontinuity, are sufficient to determine the stresses in the region BEFSB and to determine the line BSF. Figure 2 shows the Mohr's circles for the states of stress on either side of the line at a typical point S. It is found that, in region BEFSB, σ_x is a monotonic algebraically decreasing function of y and σ_y is a monotonic algebraically increasing function of x . The yield condition is nowhere violated in this region if ϕ is less than 75 degrees.

A perfectly plastic material may be considered as a soil for which $\phi \rightarrow 0$. Designating the shearing stress on a plane of slip by k , it follows from the above that the value $(2 + \pi)k$ is a lower as well as an upper bound for the collapse value of the average pressure in the indentation of such a material. A somewhat similar method has been used by Bishop [6] to show the validity of the "complete" solution to the v-notched bar problem for a perfectly plastic material.

APPENDIX

The soil is assumed to be a plastic material in which slip or yielding occurs in plane strain when the stresses satisfy the Coulomb formula [7]

$$\frac{1}{2}(\sigma_x + \sigma_y) \sin \varphi + \left\{ \frac{1}{4}(\sigma_x - \sigma_y)^2 + \tau_{xy}^2 \right\}^{1/2} - c \cos \varphi = 0. \quad (2)$$

This equation and the two equations of stress equilibrium (in which the weight of the soil is neglected) form a hyperbolic system of equations for the determination of the stresses σ_x , σ_y and τ_{xy} . The two characteristic lines are inclined at an angle $\pi/4 + \varphi/2$ to the direction of the algebraically greater principal stress and will be called the first and second failure lines, with the convention that the direction of the first failure line is obtained from the direction of the algebraically greater principal stress by a clockwise rotation of amount $\pi/4 + \varphi/2$. The angle of inclination of the first failure line to the x-axis is denoted by θ .

It is convenient to put

$$p = \frac{(\sigma_2 - \sigma_1)}{2 \sin \varphi} \geq 0, \quad (3)$$

where σ_1 and σ_2 ($\sigma_1 < \sigma_2$) are the principal stresses. From (2) and (3) it can be shown [8] that

$$\left. \begin{aligned} \sigma_x &= -p [1 + \sin \varphi \sin(2\theta + \varphi)] + c \cot \varphi, \\ \sigma_y &= -p [1 - \sin \varphi \sin(2\theta + \varphi)] + c \cot \varphi, \\ \tau_{xy} &= p \sin \varphi \cos(2\theta + \varphi). \end{aligned} \right\} \quad (4)$$

The equations of equilibrium can be replaced by the relations [9]

$$\begin{aligned} \frac{1}{2} \cot \varphi \log p + \Theta &= \text{const. along a first failure line,} \\ \frac{1}{2} \cot \varphi \log p - \Theta &= \text{const. along a second failure line.} \end{aligned} \quad (5)$$

Across a line of stress discontinuity in a plastic stress field, the normal and tangential components of stress must be continuous across the line for equilibrium. The equilibrium conditions across a line of discontinuity separating two plastic stress fields a and b can be written [5]

$$\left. \begin{aligned} \sin(\Theta_a + \Theta_b - 2\Omega + \varphi) + \sin \varphi \cos(\Theta_a - \Theta_b) &= 0, \\ p_a \cos(2\Theta_a - 2\Omega + \varphi) &= p_b \cos(2\Theta_b - 2\Omega + \varphi), \end{aligned} \right\} \quad (6)$$

where Ω is the inclination to the x-axis of the normal to the line at a current point of the line. Subscripts a and b distinguish the values which p and Θ assume on the two sides of the line.

Referring now to Fig. 1, the surface AD is free from traction and $\sigma_y = 0$ in the constant state region ACD. Since $\Theta = \pi/4 - \varphi/2$ in ACD it follows from the second of Eqs. (4) that p has the value

$$p = \frac{c \cot \varphi}{(1 - \sin \varphi)}$$

in the region ACD. The first of Eqs. (5) then shows that at a point G on the first failure line BCD,

$$p = \frac{c \cot \varphi}{(1 - \sin \varphi)} \exp \left\{ 2 \tan \varphi \left(\frac{\pi}{4} - \frac{\varphi}{2} - \alpha \right) \right\}, \quad (7)$$

where α is the value of Θ at the point G.

It has been mentioned above that the material just below the line of stress discontinuity BSF is assumed to be in a plastic state of stress. We shall denote by a and b the two plastic stress fields immediately above and immediately below the point S respectively, where S is the point of intersection of the second failure line AG and the line of discontinuity. Since the failure line AGS is straight, the value of p , p_a , in region a at S is also given by Eq. (7) and we have $\theta_a = \alpha$. In region b at S, $\sigma_x < \sigma_y$ so that $\theta_b = \pi/4 - \varphi/2$. Also the normal to the line of discontinuity at S is inclined at an angle $\Omega = \pi/2 - \psi$ to the x-axis, where ψ is the inclination of the line to the negative x-axis. Substitution of these values into the first of the jump conditions (6) gives

$$\sin\left(\frac{\pi}{4} + \frac{\varphi}{2} + \alpha + 2\psi\right) = \sin \varphi \sin\left(\frac{\pi}{4} + \frac{\varphi}{2} + \alpha\right),$$

and the relevant root of this equation is

$$\psi = \frac{3\pi}{8} - \frac{\alpha}{2} - \frac{\mu}{2} - \frac{\varphi}{4}, \quad (8)$$

where

$$\sin \mu = \sin \varphi \sin\left(\frac{\pi}{4} + \frac{\varphi}{2} + \alpha\right), \quad 0 \leq \mu \leq \varphi. \quad (9)$$

With this value of ψ , the second of the jump conditions (6) gives

$$p_b = p_a \frac{\cos\left(\frac{\pi}{4} - \alpha + \mu - \frac{\varphi}{2}\right)}{\cos\left(\frac{\pi}{4} - \alpha - \mu - \frac{\varphi}{2}\right)},$$

or

$$p_b = \frac{c \left\{ 1 + \sin^2 \varphi - 2 \sin \varphi \cos\left(\frac{\pi}{4} + \frac{\varphi}{2} + \alpha - \mu\right) \right\}}{(1 - \sin \varphi) \sin \varphi \cos \varphi} \exp \left\{ \tan \varphi \left(\frac{\pi}{2} - \varphi - 2\alpha \right) \right\}, \quad (10)$$

where the value (7) for p_a and Eq. (9) have been used.

From Eq. (4), the non-zero stresses in region b at the point S are given by

$$\left. \begin{aligned} \sigma_x &= -p_b(1 + \sin \varphi) + c \cot \varphi, \\ \sigma_y &= -p_b(1 - \sin \varphi) + c \cot \varphi. \end{aligned} \right\} \quad (11)$$

For equilibrium, σ_x and σ_y are taken to be functions of y only and x only respectively in region BEFSB. The values of σ_x and σ_y just below the line BSF are known from Eqs. (11) and (10) so that σ_x and σ_y can be found at any point of the region BEFSB. It can be shown that p_b is a monotonic decreasing function of α . It follows that just below the line BSF, σ_x and σ_y are increasing functions of α , and hence that in region BEFSB σ_x is a monotonic decreasing function of y and σ_y is a monotonic increasing function of x .

This extension of the Prandtl stress field is permissible only if the yield condition is nowhere violated in region BEFSB, i.e., if the expression on the left hand side of Eq. (2) is less than or equal to zero at all points in the region. Because of the monotonic character of the stresses σ_x and σ_y , the yield condition will not be violated anywhere in the region if it is not violated at the point E at infinity on the y -axis. At the point E , σ_x has an (algebraic) maximum value and σ_y has an (algebraic) minimum value and these values are

$$\begin{aligned} \sigma_x &= -2c \tan\left(\frac{\pi}{4} + \frac{\varphi}{2}\right), \\ \sigma_y &= -c \cot \varphi \left\{ \exp(\pi \tan \varphi) \tan^2\left(\frac{\pi}{4} - \frac{\varphi}{2}\right) - 1 \right\}. \end{aligned}$$

Substituting these values into the expression on the left hand side of Eq. (2) and setting the resulting expression less than or equal to zero gives, after reduction, the inequality

$$\exp(\pi \tan \varphi) \leq \tan^6\left(\frac{\pi}{4} + \frac{\varphi}{2}\right).$$

The inequality is satisfied if the angle φ is less than an angle which lies between 75 and 76 degrees. Thus the yield condition is nowhere violated in region BEFSB if φ is less than 75 degrees.

If the length of the line AS in Fig. 1 is denoted by r , then we have

$$dr = rd(\alpha + \varphi)\tan(\psi + \alpha + \varphi),$$

or

$$dr = r d\alpha \tan\left(\frac{3\pi}{8} + \frac{\alpha}{2} + \frac{3\varphi}{4} - \frac{\mu}{2}\right).$$

This differential equation and the condition $r = AB$ when $\alpha = -\pi/4 - \varphi/2$, determines the line of discontinuity. As α tends to $\pi/4 - \varphi/2$, the line tends asymptotically to a straight line inclined at an angle $\pi/4 - \varphi/2$ to the negative x-axis.

Bibliography

1. "Ueber die Haerte plastischer Koerper", by L. Prandtl, Nachrichten von der Koeniglichen Gesellschaft der Wissenschaften zu Goettingen, Mathematisch-Physikalische Klasse, 1920, pp. 74-85.
2. "Mixed Boundary Value Problems in Soil Mechanics", by R. T. Shield, Quarterly of Applied Mathematics, vol. 11, 1953, pp. 61-75.
3. "On Plastic-Rigid Solutions and Limit Design Theorems for Elastic-Plastic Bodies", by D. C. Drucker, H. J. Greenberg, E. H. Lee, and W. Prager, Proceedings of the First U.S. National Congress of Applied Mechanics, June, 1951, pp. 533-538.
4. "Soil Mechanics and Plastic Analysis or Limit Design", by D. C. Drucker and W. Prager, Quarterly of Applied Mathematics, vol. 10, 1952, pp. 157-165.
5. "Stress and Velocity Fields in Soil Mechanics", by R. T. Shield, Brown University Report All-81 to the Office of Naval Research, December, 1952.
6. Private communication from J. F. W. Bishop to W. Prager, October, 1952.
7. "Theoretical Soil Mechanics", by K. Terzaghi, John Wiley and Sons, Inc., New York, N. Y., 1943, p. 22.
8. "Statics of Earthy Media", by V. V. Sokolosky, Izdatelsvo Akademii Nauk S.S.R., Moscow, 1942.
9. "Die Bestimmung des Drucks an gekruemmten Gleitflaechen, eine Aufgabe aus der Lehre vom Erddruck", by F. Kötter, Monatsberichte der Akademie der Wissenschaften zu Berlin, 1903, pp. 229-233.

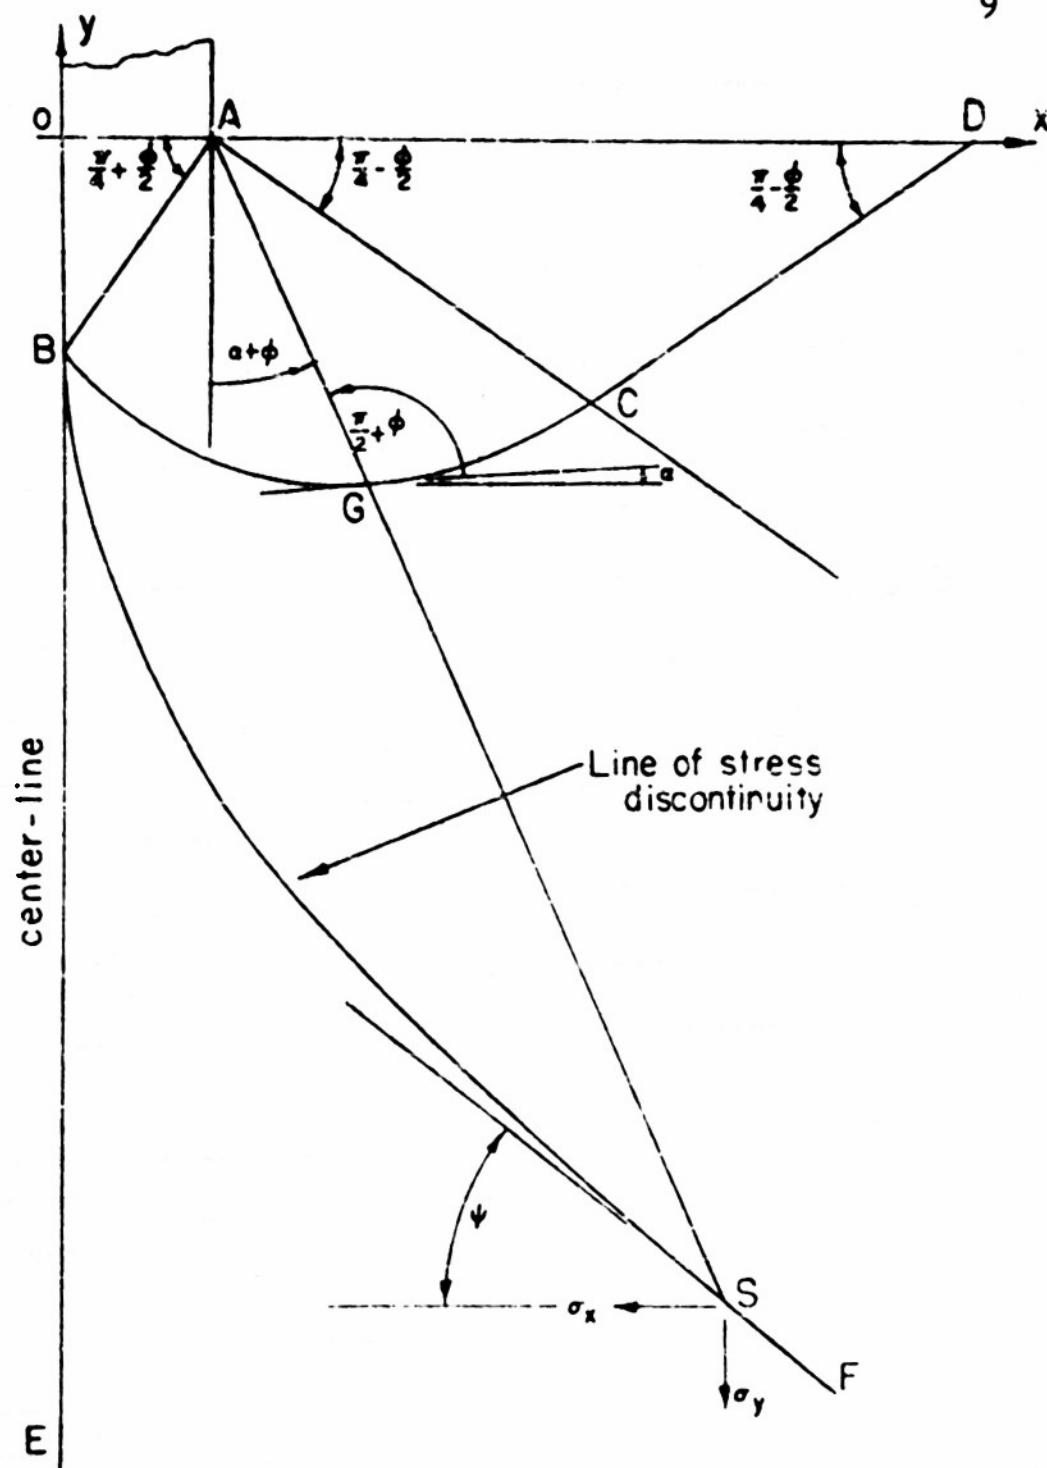


Fig. 1 An extension of the Prandtl stress solution for a footing on a soil

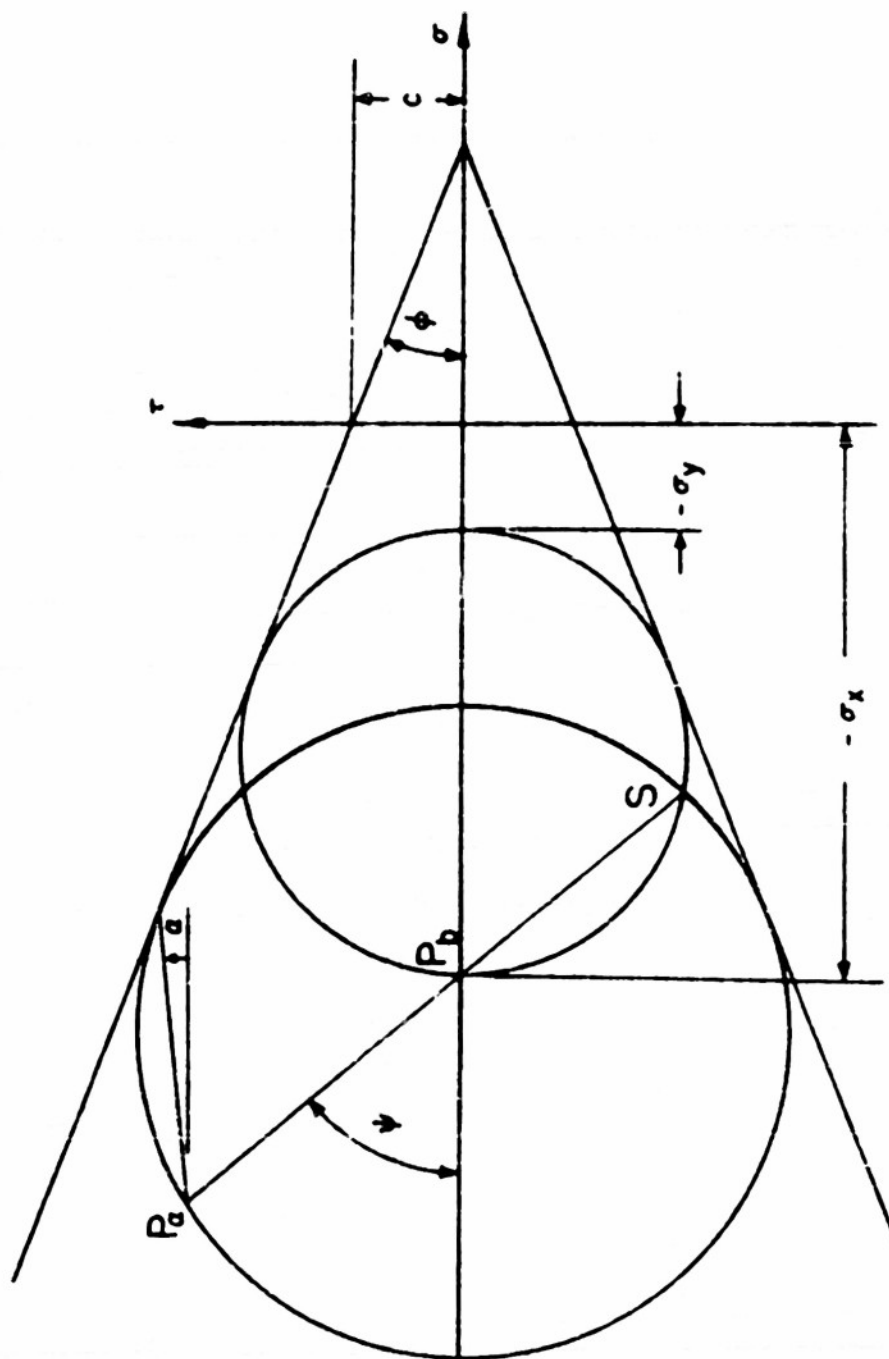


Fig. 2 Mohr's circles for states of stress at point S
 in Fig. 1

APPROVED DISTRIBUTION LIST FOR UNCLASSIFIED TECHNICAL REPORTS

Issued by

BROWN UNIVERSITY
Contract N7onr-358, T. O. 1
NR 041 032

Office of Naval Research
Washington 25, D. C.

M-2 Attn: Mathematics Branch (Code 432)
M-1 Mechanics Branch (Code 438)
M-1 Physical Branch (Code 421)
M-1 Metallurgy Branch (Code 423)

M-2 Commanding Officer
Office of Naval Research Branch Office
150 Causeway Street
Boston 14, Massachusetts

M-1 Commanding Officer
Office of Naval Research Branch Office
346 Broadway
New York, New York

M-1 Commanding Officer
Office of Naval Research Branch Office
844 North Rush Street
Chicago 11, Illinois

M-1 Commanding Officer
Office of Naval Research Branch Office
1000 Geary Street
San Francisco 9, California

M-1 Commanding Officer
Office of Naval Research Branch Office
1030 East Green Street
Pasadena 1, California

M-17 Officer-in-Charge
Office of Naval Research
Navy #100
Fleet Post Office
New York, New York

M-9 Director
Naval Research Laboratory
Washington 20, D. C.

 Attn: Scientific Information Division

M-2 Library (Code 2021)
M-1 Applied Mathematics Branch (Code 3830)
M-1 Shock and Vibrations Section (Code 3850)
M-1 Structures Branch (Code 3860)

Bureau of Ships
Department of the Navy
Washington 25, D. C.
M-2 Attn: Code 364 (Technical Library)
R-1 Code 423 (Underwater Explosion Research)
M-1 Code 442 (Scientific Section, Design)

David Taylor Model Basin
Carderock, Maryland
M-2 Attn: Library
M-1 Structural Mechanics Division

Naval Ordnance Laboratory
White Oak, Silver Spring 19, Maryland
M-2 Attn: Library

Bureau of Aeronautics
Department of the Navy
Washington 25, D. C.
M-1 Attn: AER-TD-414
R-1 Materials Branch
R-1 Design Elements Division

Bureau of Yards and Docks
Department of the Navy
Washington 25, D. C.
R-2 Attn: Director, Research Division

Commander
Norfolk Naval Shipyard
Norfolk, Virginia
M-1 Attn: Technical Library (Code 243A)
M-1 UERD (Code 290)

Superintendent
Aeronautical Structures Laboratory
Building 600, Naval Air Experimental Station
Philadelphia 12, Pennsylvania
R-1 Attn: Experimental Structures Section

Office, Assistant Chief of Staff, G4
The Pentagon
Washington, D. C.
M-1 Attn: Research and Development Division

M-1 The Chief, Armed Forces Special Weapons Project
Department of Defense
P. O. Box 2610
Washington, D. C.

U. S. Army Arsenal
Watertown 72, Massachusetts
M-1 Attn: Dr. R. Baeuwkes

Frankford Arsenal
Pitman-Dunn Laboratory
Philadelphia 37,
M-1 Attn: Dr. Herbert I. Fusfeld

Picatinny Arsenal
 Dover, New Jersey
 M-1 Attn: Mr. L. Gilman

Commanding General
 Air Materiel Command
 Wright-Patterson Air Force Base
 Dayton, Ohio
 M-1 Attn: Chief, Materials Division (DCRTS)
 R-1 Attn: Head, Structures Lab (MCREX-B)

Department of Commerce
 Office of Technical Service
 Washington 25, D. C.
 M-1 Attn: Library Section

National Advisory Committee for Aeronautics
 1724 F. Street NW
 Washington 25, D. C.
 M-1 Attn: Chief of Aeronautical Intelligence

National Advisory Committee for Aeronautics
 Langley Aeronautical Laboratory
 Langley Field, Virginia
 M-1 Attn: Library

National Advisory Committee for Aeronautics
 Lewis Flight Propulsion Laboratory
 Cleveland Airport
 Cleveland 11, Ohio
 M-1 Attn: Library

National Bureau of Standards
 Washington, D. C.
 M-1 Attn: Dr. W. H. Ramberg

Director of Research
 Sandia Corporation
 Albuquerque, New Mexico
 M-1 Attn: Dr. R. P. Peterson

Brooklyn Polytechnic Institute
 85 Livingston Street
 Brooklyn, New York
 R-1 Attn: Dr. N. J. Hoff
 R-1 Attn: Dr. H. Reissner
 M-1 Attn: Dr. F. S. Shaw (Dept. Aero. Engrg. & Appl. Mech.)

Brown University
 Providence 12, Rhode Island
 M-1 Attn: Chairman, Graduate Division of Applied Mathematics

California Institute of Technology
 Pasadena, California
 R-1 Attn: Dr. J. G. Kirkwood
 R-1 Attn: Dr. Pol Duwez

University of California
Berkeley, California

M-1 Attn: Dr. J. E. Dorn
R-1 Dr. H. Hultgren
R-1 Dr. G. C. Evans
M-1 Dr. C. F. Garland

University of California
Los Angeles, California

R-1 Attn: Dr. I. S. Sokolnikoff
R-1 Dr. D. Rosenthal

Carnegie Institute of Technology
Pittsburgh, Pennsylvania

R-1 Attn: Dr. J. S. Koehler
R-1 Dr. G. H. Handelman
M-1 Dr. E. Saibel
R-1 Dr. H. J. Greenberg
R-1 Dr. E. D'Appolonia

Case Institute of Technology
Cleveland, Ohio

M-1 Attn: Dr. W. M. Baldwin, Jr., Metals Research Laboratory
R-1 Dr. O. Hoffman

Catholic University of America
Washington, D. C.

M-1 Attn: Dr. F. A. Biberstein
R-1 Dr. K. Hertzfeld

University of Chicago
Chicago, Illinois

R-1 Attn: Dr. T. S. Ke
R-1 Dr. C. S. Barrett

Columbia University
New York, New York

M-1 Attn: Dr. R. D. Mindlin
M-1 Dr. H. Bleich

Cornell University
Ithaca, New York

R-1 Attn: Dr. H. S. Sack
R-1 Dr. A. Kantrowitz

University of Florida
Gainesville, Florida

M-1 Attn: Dr. C. G. Smith

Harvard University
Cambridge 38, Massachusetts

R-1 Attn: Dr. E. von Mises
R-1 Dr. F. Birch, Dunbar Laboratory
R-1 Dr. H. M. Westergaard

Illinois Institute of Technology
Chicago, Illinois

R-1 Attn: Dr. L. H. Donnell
R-1 Dr. L. van Griffis
M-1 Dr. E. Sternberg
R-1 Dr. W. Osgood
M-1 Dr. E. A. Eringer

University of Illinois
Urbana, Illinois

M-1 Attn: Dr. N. M. Newmark
R-1 Engineering
R-1 T. J. Dolan
R-1 Dr. F. Seitz, Department of Physics
M-1 Department of Theoretical and Applied Mathematics

Indiana University
Bloomington, Indiana

M-1 Attn: Dr. E. E. Thomas

Institute for Advanced Study
Princeton, New Jersey

R-1 Attn: Dr. J. von Neumann

Iowa State College
Ames, Iowa

R-1 Attn: Dr. G. Murphy
R-1 Dr. D. L. Hall

Johns Hopkins University
Baltimore, Maryland

M-1 Attn: Dr. W. H. Hoppman, II

M-1 Director, Applied Physics Laboratory
Johns Hopkins University
8621 Georgia Avenue
Silver Spring, Maryland

Lehigh University
Bethlehem, Pennsylvania

R-1 Attn: Mr. Lynn S. Beedle

Massachusetts Institute of Technology
Cambridge 39, Massachusetts

R-1 Attn: Dr. F. B. Hildebrand
R-1 Dr. C. W. MacGregor
R-1 Dr. J. M. Lessels
R-1 Dr. W. M. Murray
R-1 Dr. E. Reissner
R-1 Dr. H. S. Tsien
R-1 Dr. M. Cohen, Rm. 8-413, Department of Metallurgy
R-1 Dr. B. L. Averbach, Department of Metallurgy
R-1 Dr. J. T. Norton
R-1 Dr. E. Growan
M-1 Dr. R. Bisplinghoff, Dept. Aero. Engr.

University of Michigan
Ann Arbor, Michigan
M-1 Attn: Dr. Bruce G. Johnston
M-1 Dr. Paul Nagdhi
R-1 Dr. N. Coburn
R-1 Dr. W. Kaplan

New York University
Institute for Mathematics & Mechanics
45 Fourth Avenue
New York 3, New York
R-1 Attn: Professor R. Courant
R-1 Dr. G. Hudson

New York University
New York 53, New York
R-1 Attn: Dr. C. T. Wang, Department of Aeronautics

Northwestern University
Evanston, Illinois
R-1 Attn: Dr. M. M. Hetenyi

University of Notre Dame
Notre Dame, Indiana
R-1 Attn: Dr. P. A. Beck

Ohio State University
Columbus, Ohio
M-1 Attn: Dr. B. A. Boley

Pennsylvania State College
State College, Pennsylvania
R-1 Attn: Dr. M. Gensamer
R-1 Dr. J. A. Sauer
R-1 Dr. Joseph Marin
R-1 Dr. J. W. Fredrickson

Princeton University
Princeton, New Jersey
R-1 Attn: Dr. S. Lefschetz
R-1 Dr. L. Lees
R-1 Dr. J. V. Charyk

Rensselaer Polytechnic Institute
Troy, New York
R-1 Attn: Library
R-1 Dr. Paul Leiber

Santa Clara University
Santa Clara, California
M-1 Attn: Dr. R. M. Hermes

Stanford University
Stanford, California
R-1 Attn: Dr. L. Jacobsen
M-1 Dr. A. Phillips, Department of Mechanical Engineering
R-1 Dr. J. N. Goodier

Stevens Institute of Technology
Hoboken, New Jersey
R-1 Attn: Dr. E. G. Schneider

Swarthmore College
Swarthmore, Pennsylvania
M-1 Attn: Capt. W. P. Roop

University of Texas
Austin 12, Texas
R-1 Attn: Dr. A. A. Topractsoglou

University of Utah
Salt Lake City, Utah
M-1 Attn: Dr. H. Eyring

Washington State College
Pullman, Washington
R-1 Attn: Dr. B. Fried

Wheaton College
Norton, Massachusetts
R-1 Attn: Dr. H. Geiringer

Aerojet, Inc.
Azusa, California
R-1 Attn: F. Zwicky

Aluminum Company of America
New Kensington, Pennsylvania
M-1 Attn: R. L. Templin

Armstrong Cork Company
Lancaster, Pennsylvania
R-1 Attn: J. W. Scott

Bell Telephone Laboratories
Murray Hill, New Jersey
R-1 Attn: C. Herring
R-1 J. M. Richardson
R-1 D. P. Ling
R-1 W. P. Mason

Corning Glass Company
Corning, New York
R-1 Attn: J. T. Littleton

E. I. Dupont de Nemours & Co., Inc.
Wilmington 98, Delaware
R-1 Attn: J. H. Faupel, Materials of Construction Section

General Electric Company
Schenectady, New York
R-1 Attn: H. Fehr
R-1 H. Poritsky
R-1 J. H. Hollomon

General Motors
 Detroit, Michigan
 R-1 Attn: J. O. Almen

Lockheed Aircraft Company
 Department 72-25, Factory A-1, Building 66
 Burbank, California
 R-1 Attn: Engineering Library

Midwest Research Institute
 Kansas City, Missouri
 R-1 Attn: C. O. Dohrenwend
 R-1 M. Golan

Pratt & Whitney Aircraft Corporation
 East Hartford, Connecticut
 R-1 Attn: R. Morrison

U. S. Rubber Company
 Passaic, New Jersey
 R-1 Attn: H. Smallwood

Welding Research Council
 Engineering Foundation
 29 West 39th Street
 New York 18, New York
 M-1 Attn: W. Spraragen, Director

Westinghouse Research Laboratories
 East Pittsburgh, Pennsylvania
 M-1 Attn: Dr. A. Nadai
 R-1 Dr. E. A. Davis

Westinghouse Electric Corporation
 Lester Branch P. O.
 Philadelphia, Pennsylvania
 R-1 Attn: R. P. Kroon, Mgr. of Engineering, AGT Division