

UNCLASSIFIED

AD NUMBER	
AD038781	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO: Approved for public release; distribution is unlimited.	
FROM: Distribution: Further dissemination only as directed by Office of Naval Research, Code 466, Washington, DC 20350, 10 AUG 1954, or higher DoD authority.	
AUTHORITY	
30 dec 1966, DoDD 5200.10; ntis onr ltr, 26 oct 1977	

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD NUMBER

AD038781

CLASSIFICATION CHANGES

TO:

confidential

FROM:

secret

AUTHORITY

30 dec 1957, DoDD 5200.10

THIS PAGE IS UNCLASSIFIED

THIS REPORT HAS BEEN DELIMITED
AND CLEARED FOR PUBLIC RELEASE
UNDER DOD DIRECTIVE 5200.20 AND
NO RESTRICTIONS ARE IMPOSED UPON
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

UNCLASSIFIED

AD _____

*Reproduced
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA



DOWNGRADED AT 3 YEAR INTERVALS:
DECLASSIFIED AFTER 12 YEARS
DOD DIR 5200.10

UNCLASSIFIED

Armed Services Technical Information Agency

AD

38781

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

Reproduced by
DOCUMENT SERVICE CENTER
KNOTT BUILDING, DAYTON, 2, OHIO

46955
012


Columbia University
in the City of New York

HUDSON LABORATORIES

DOBBS FERRY, N. Y.

CATALOGED BY ASIA
AS AD No. 38 786

PROJECT MICHAEL

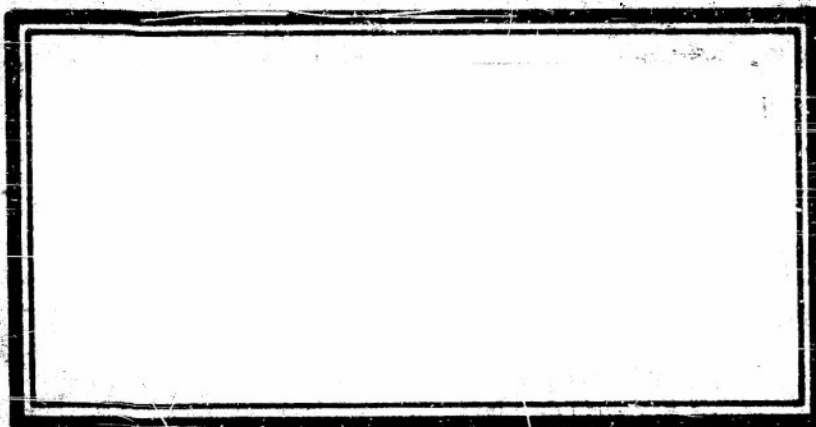

RESEARCH SPONSORED BY
OFFICE OF NAVAL RESEARCH

CONTRACT N6-ONR-27135

This document has been reviewed in accordance with
OPNAVINST 5510.7, paragraph 5. The security
classification assigned hereto is correct.

Date: 9/2/54 *Princeton*
By direction of *W. H. S.*
Chief of Naval Research (Code)



0619

54AA

55909

COLUMBIA UNIVERSITY
Hudson Laboratories
Dobbs Ferry, N. Y.

PROJECT MICHAEL
Contract N6-ONR-27135

W. A. Nierenberg
Director

Technical Report No. 28
Results of Preliminary Experiments
on Well Listening on Fire Island

by

M. V. Brown and F. Evans

Research Sponsored by
Office of Naval Research

Further distribution of this report, or of an abstract
or reproductions, may be made only with the approval of
Chief of Naval Research (Code 466).

Copy No. 012

SECRET

of 60 Copies

August 10, 1954

This report consists of 9 pages

This document contains information affecting the national
defense of the United States within the meaning of the
Espionage Laws, Title 18, U.S.C., Sections 793 and 794.
The transmission or the revelation of its contents in any
manner to an unauthorized person is prohibited by law.

- 1 -
54 AA

5596

TABLE OF CONTENTS

	<u>Page</u>
I. Introduction	3
II. Measurements	4
III. Future Planning	5
References	5

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1	Ambient Noise Level in Well at Bellport Life Boat Station	7
2	Peak Shot Pressure Vs Range	8

RESULTS OF PRELIMINARY EXPERIMENTS
ON WELL LISTENING ON FIRE ISLAND

by

M. V. Brown and F. Evans

I. INTRODUCTION

This is the second report (1) relating to a new method of submarine detection. Existing techniques employing two-dimensional arrays of hydrophones are envisaged. The new contribution is the utilization of deep wells drilled on dry land for hydrophone locations.

A preliminary test of the effectiveness of sound reception in a well (1) was made at the U.S. Navy Mine Countermeasures Station, Panama City, Florida. The obvious next step was to choose a location where the geology might not be unfavorable and which would be of more importance in guarding sea lanes. Preliminary tests were required in a short time to prove that in a general way such a location would give positive results. Therefore, further tests were made during the period August 17-18, 1954, using a well on Great South Beach (popularly known as Fire Island) belonging to the Bellport Lifeboat Station, C.G. No. 79. This well was only 380 ft deep, which is undoubtedly too shallow for optimum listening. However, the results were even more encouraging than those at Panama City. It appears that a much wider range of frequencies was transmitted at Fire Island than was observed at Panama City.

This may be due either to a difference in the geology of the area or to a lesser high frequency ambient noise at Fire Island. Neither set of observations was complete enough to be definitive.

The primary purpose of the Fire Island experiment was to observe the ambient noise level. However, since the opportunity offered, a few small charges of TNT were exploded offshore and recorded at the well. For the purposes of understanding the results, an extrapolation of the range run (6.5 mi) was made. It indicated that a 1 lb charge should be heard to a distance of the order of 400 miles if there are no serious faults or changes in the stratification of the rocks making up the ocean bottom. The continental shelf extends from shore approximately 100 miles at this point.

During the period August 17-18, the broad band (3-1000 cps) ambient noise was 24 db above 1 dyne per square cm. The surf was low. Further observations are needed to determine how ambient noise depends upon surf.

Local sources contribute greatly to the ambient level. Even when the hydrophone was 350 ft deep, automobiles 100 ft away and even footsteps near the well were easily distinguished. The program outlined in the earlier report supposed the employment of vertical arrays. This will be unquestionably important in reducing the effect of the surface noise. A second row of wells can be employed to reduce the backward noise.

The upper 1400 ft of the geological column at Panama City is separated acoustically into four layers. Present information about the Fire Island area indicates that the upper 1700 ft contains only one or two acoustically different layers to a distance of 20 miles offshore (2,3). Oliver and Drake report two layers, while Ewing, et al. report only one with a second appearing about 15 miles offshore. The speeds of sound in this intermediate layer as reported by Oliver and by Ewing differ markedly, 6500 ft/sec and 11,800 ft/sec, respectively. The Oliver section was near Shinnecock Inlet, while that of Ewing was near Fire Island Inlet. The Bellport Lifeboat Station is in between, therefore conditions in this area are indeterminate.

II. MEASUREMENTS

On August 17, the hydrophone was placed at depths from 50 to 350 ft. At each depth, several bandwidths were used and the average ambient noise voltage was read off a battery operated vacuum tube voltmeter. In addition, the signal was monitored with earphones to establish the absence of obvious circuit noises. The data obtained are tabulated in Fig. 1. It is apparent that there are no large changes in noise amplitude with depth changes. However, there is a definite increase as the low frequency end of the band-pass filter is extended. For the shot work on August 18, new readings of ambient noise were taken at several depths for the band 3-1000 cps. These are shown in parentheses in Fig. 1.

On August 18, a range run was made in which our buoy boat traveled a course at 160° extending from a point 50 yards off-shore to a point 6 1/2 mi at sea. The hydrophone was placed 350 ft down in the well. Caps were fired for the first mile and were received quite clearly, particularly the components above 100 cps.

As the run extended out from the 1 mile point, 1/2 lb, and, later, 1 lb charges were fired. For the heavier charges and greater ranges, the lower frequencies (less than 100 cps predominated). The return run was a repetition of the initial run except that the hydrophone was placed at 200 ft. Sound pressures were recorded on a Brush oscillograph recorder. The peak-to-peak sound pressures as a function of distance are shown in Fig. 2. A "best" straight line was fitted to the data and is shown in comparison to the ambient noise level in the well. The two lines are projected to a point where the amplitudes are equal. This distance is about 400 miles.

The location of the Bellport Lifeboat Station is 72°55'45" W by 40°42'45" N. On both days, the sea was about state 1 and the surf was slight with only one line of about 1-2 ft breakers. The ambient noise levels may have been somewhat high because of a small leak (1 quart per hour) in the relief valve of the well.

The well is of the artesian type. There was a capped static pressure of 6 psi. Therefore, a pressure lock was constructed for inserting the hydrophone.

III. FUTURE PROGRAM

The program outlined in the earlier report will now be prosecuted vigorously on the south shore of Long Island. Simultaneously, several sites will be explored for suitability and deeper wells will be dug. Besides this outline, two complete experimental programs will be undertaken to measure phase variations and transmission as a function of frequency using explosive and CW techniques. It is anticipated that the optimum reception frequency will be lower than that generally employed at present in long distance submarine detection. The geology will be more carefully evaluated experimentally. More permanent control of the stations in Long Island will have to be obtained for security purposes.

REFERENCES

1. Nierenberg, W. A., Levin, F. K., Brown, M. V., and Tolstoy, I. A progress report in shallow water research. Columbia University, Hudson Laboratories, technical report no. 21. June 30, 1954. (S)

REFERENCES, cont'd

2. Oliver, J. E., and Drake, C. L. Geophysical investigations in the emerged and submerged Atlantic Coastal Plain, Pt. VI: The Long Island Area, Geol. Soc. Am., Bull., 62:1287-1296. 1951.
3. Ewing, M., Worzel, J. L., Steenland, N. C., and Press, F. Geophysical investigations in the emerged Atlantic Coastal Plain, Pt. V: Woods Hole, New York and Cape May Sections, Geol. Soc. Am., Bull., 61:877-892. 1950.

SECRET

-7-

FIG. 1
AMBIENT NOISE LEVEL IN WELL
AT BELLPORT LIFE BOAT STATION

AUG. 17, 1954

BANDWIDTH				
	3-1000 CPS	10-1000 CPS	30-1000 CPS	100-1000 CPS
D E P T H	50 FT. (24)* +28 db wrt. 1 dyne/cm ²	+24 db wrt. 1 dyne/cm ²	+18 db wrt. 1 dyne/cm ²	+14 db wrt. 1 dyne/cm ²
	100 FT. (+22)* 32 " " "	28 " "	26 " "	16 " "
	150 FT. (26)* 24 " "	22 " "	16 " "	12 " "
	200 FT. (22)* 28 " "	24 " "	18 " "	12 " "
	250 FT. 24 " "	22 " "	18 " "	12 " "
	300 FT. 24 " "	24 " "	18 " "	10 " "
	350 FT. 23 " "	22 " "	21 " "	16 " "

* READING IN PARENTHESIS OBTAINED AUG. 18, 1954

SECRET


FIG. 2

PEAK SHOT PRESSURE VS. RANGE

Aug 18, 1954

LEGEND
X = 1 Round
O = 1/2 Round

AMBIENT NOISE 7

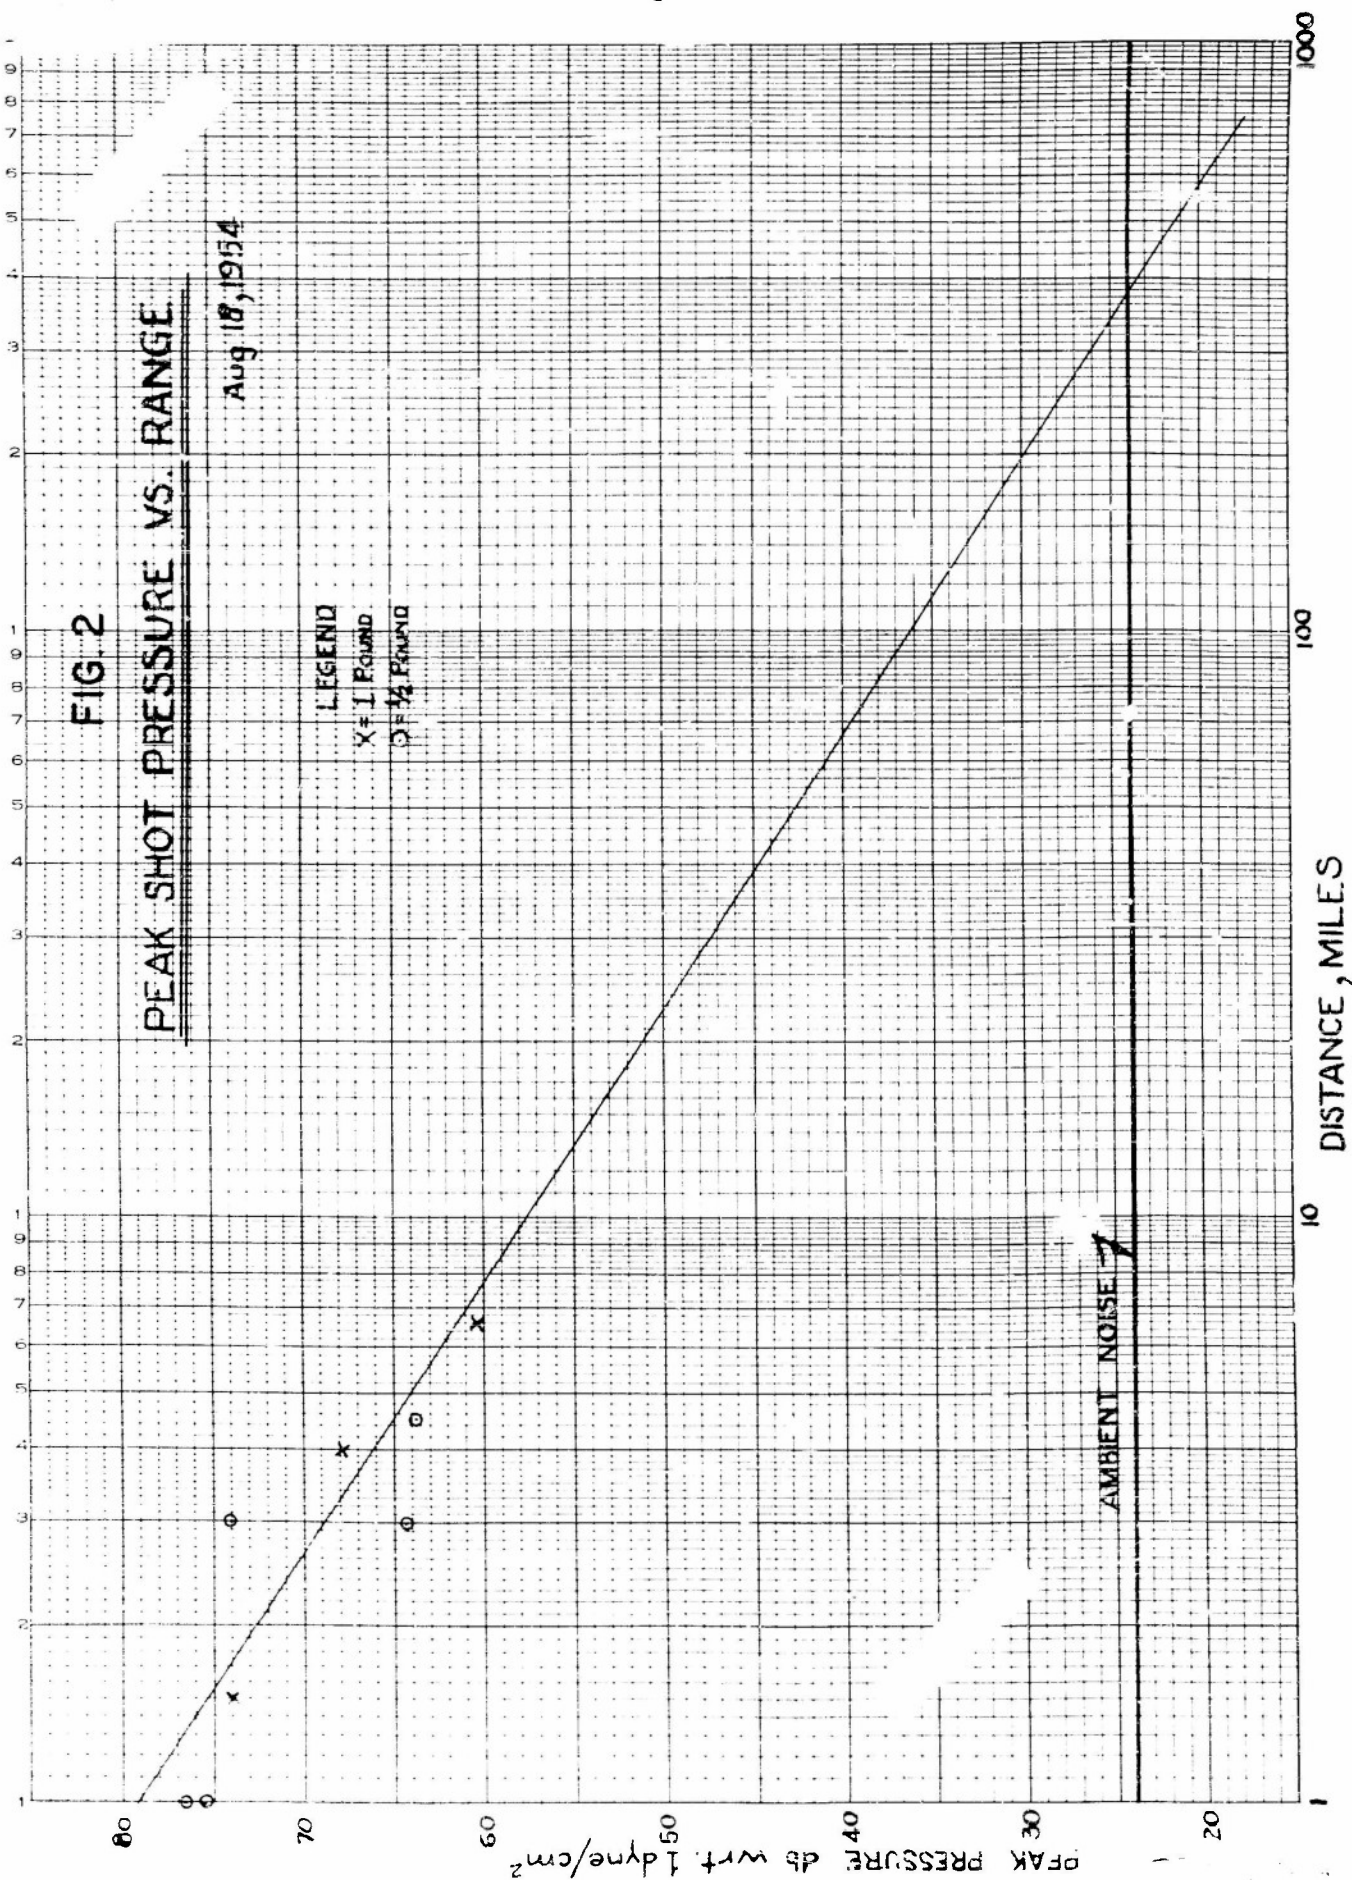

DISTRIBUTION LIST
PROJECT MICHAEL REPORTS

Copy No.	Addresses	Copy No.	Addresses	Copy No.	Addresses
1-13	Chief of Naval Research (Code 436) Navy Department Washington 25, D. C.	30	Commander Submarine Force U. S. Pacific Fleet Fleet Post Office San Francisco, California	34-36	Office of Naval Research Research and Development Department of the Navy 4000 Reservoir Road, NW Washington 25, D. C.
14	Director Naval Research Laboratory (Dr. H. L. Saxton, Code 5560) Washington 25, D. C.	31	Commanding Officer and Director David Taylor Model Basin (Attn: Mr. M. Lasky) Washington 7, D. C.	37-43	Office of Naval Research Research and Development Department of the Navy 4000 Reservoir Road, NW Washington 25, D. C.
15	Executive Secretary Committee on Undersea Warfare National Research Council 2101 Constitution Avenue NW Washington 25, D. C.	32	Commanding General Headquarters, Air Force Washington 25, D. C.	44	Commander Submarine Development Group II U. S. Naval Submarine Base Box 70 New London, Conn.
	Via Contract Administrator Southeastern Area Office of Naval Research 2100 G Street NW Washington, D. C.	33	Commanding Officer Signal Corps Engineering Laboratory Squad Signal Laboratory Fort Monmouth, N. J.	45-49	Commanding Officer Office of Naval Research Branch Office 348 Broadway New York 13, New York
16	Commanding Officer & Director U. S. Navy Underwater Sound Laboratory Fort Trumbull Point Lookout, Conn.	34	Commander U. S. Naval Ordnance Test Station Pasadena Annex 3802 E. Foothill Blvd. Pasadena 6, California		4 copies for transmittal to: Bell Telephone Laboratories Murray Hill, New Jersey (Attn: Mr. L. W. Stengall)
17	Director Marine Physical Laboratory University of California VIA Commanding Officer & Director U. S. Navy Electronics Laboratory Point Loma San Diego 52, California	35-38	Chief, Bureau of Ships Navy Department Washington 25, D. C. Code 845 Code 520 Code 371 Code 449		Bell Telephone Laboratories Whippany, New Jersey (Attn: Mr. J. F. Hart)
18	Commanding Officer & Director U. S. Navy Electronics Laboratory Point Lookout San Diego 52, California	39	Chief, Bureau of Aeronautics (EL 46) Navy Department Washington 25, D. C.		Director Lamont Geological Observatory Torrrey Hill Palisades, New York
19	Director U. S. Navy Underwater Sound Reference Laboratory P. O. Box 3028 Orlando, Florida	40	Chief, Bureau of Ordnance Navy Department Washington 25, D. C.		Director Edwards Street Laboratory Yale University Box 1818 Yale Station New Haven, Conn. (Attn: Prof. L. W. McKeehan)
20	Commander U. S. Naval Ordnance Laboratory (Attn: Dr. E. L. Shavelly) White Oak Silver Spring, Md.	41	Commander in Chief U. S. Atlantic Fleet U. S. Naval Station Norfolk 11, Virginia		
21	Commander U. S. Naval Air Development Center Johnsville, Penn.	42	Commander Operational Development Force U. S. Atlantic Fleet Fleet Post Office Branch Norfolk 11, Virginia		
22-23	Chief of Naval Operations (Op-316) Navy Department Washington 25, D. C.	43	Commander in Chief U. S. Pacific Fleet Fleet Post Office San Francisco, California		
24	Commanding Officer Office of Naval Research Branch Office 1030 E. Green St. Pasadena 1, California	44	Commander Submarine Development Group II U. S. Naval Submarine Base Box 70 New London, Conn.		
25	Commanding Officer Office of Naval Research Branch Office 2000 Geary St. San Francisco, California	45-49	Commanding Officer Office of Naval Research Branch Office 348 Broadway New York 13, New York		
26	Commanding Officer Office of Naval Research Branch Office Tenth Floor - John Crane Library Building 88 E. Randolph St. Chicago 1, Illinois				
27	Commanding Officer Surface Anti-Submarine Development Detachment U. S. Atlantic Fleet U. S. Naval Station Key West, Florida				
28	Commanding Officer Office of Naval Research Branch Office Navy No. 100 Fleet Post Office New York, New York				
29	Commander Submarine Force U. S. Atlantic Fleet U. S. Naval Submarine Base Box 70 New London, Conn.				