

RADC-TR-80-100
Interim Report
April 1980

LEVEL 12



ANALYTICAL STUDIES OF PHASE ESTIMATION TECHNIQUES

Eikonix Corporation

Sponsored by
Defense Advanced Research Projects Agency (DoD)
ARPA Order No. 3223

DTIC
ELECTE
S JUL 8 1980 **D**
A

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

The views and conclusions contained in this document are those of the authors and should not be interpreted as necessarily representing the official policies, either expressed or implied, of the Defense Advanced Research Projects Agency or the U. S. Government.

ROME AIR DEVELOPMENT CENTER
Air Force Systems Command
Griffiss Air Force Base, New York 13441

80 7 7 095

ADA086285

DDC FILE COPY.

This report has been reviewed by the RADC Public Affairs Office (PA) and is releasable to the National Technical Information Service (NTIS). At NTIS it will be releasable to the general public, including foreign nations.

RADC-TR-80-100 has been reviewed and is approved for publication.

APPROVED:



DORIS HAMILL, 1/Lt, USAF
Project Engineer

If your address has changed or if you wish to be removed from the RADC mailing list, or if the addressee is no longer employed by your organization, please notify RADC (OCSE), Griffiss AFB NY 13441. This will assist us in maintaining a current mailing list.

Do not return this copy. Retain or destroy.

ANALYTICAL STUDIES OF PHASE ESTIMATION TECHNIQUES

Robert A. Gonsalves
Robert H. Chidlaw

Contractor: Eikonix Corporation
Contract Number: F30602-77-C-0176
Effective Date of Contract: 14 September 1977
Contract Expiration Date: 14 December 1979
Short Title of Work: Analytical Studies of
Phase Techniques
Program Code Number: OE20
Period of Work Covered: Jan 79 - Aug 79
Principal Investigator: Robert A. Gonsalves
Phone: 617 273-0350
Project Engineer: 1/Lt Doris Hamill
Phone: 315 330-3148

Approved for public release; distribution unlimited.

This research was supported by the Defense Advanced
Research Projects Agency of the Department of
Defense and was monitored by 1/Lt Doris Hamill (OCSE),
Griffiss AFB NY 13441 under Contract F30602-77-C-0176.

Accession For	
NTIS Grant	☒
DOC Fee	☐
Unprocessed	☐
Justification	☐
By _____	
Date _____	
Special _____	
A	

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER (18) RADC-TR-80-106	2. GOVT ACCESSION NO. AD-A084 385	3. RECIPIENT'S CATALOG NUMBER (20)	
4. TITLE (and Subtitle) (6) ANALYTICAL STUDIES OF PHASE ESTIMATION TECHNIQUES	5. DATE OF REPORT (and Date Covered) (9) Interim Report, 15 Jan 80 - 16 Aug 79	6. PERFORMING ORG. REPORT NUMBER (14) EC/2107481-TR-3	
7. AUTHOR(s) (16) Robert A. /Gonsalves Robert H. /Chidlaw	8. CONTRACT OR GRANT NUMBER(s) (15) F30602-77-C-0176, W/ARPA Order-3223	9. PERFORMING ORGANIZATION NAME AND ADDRESS Eikonix Corporation 103 Terrace Hall Ave Burlington MA 01803	10. REPORT TYPE (17) 2230105
11. CONTROLLING OFFICE NAME AND ADDRESS Defense Advanced Research Projects Agency 1400 Wilson Blvd Arlington VA 22209	12. REPORT DATE (11) Apr 80	13. NUMBER OF PAGES 16	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Rome Air Development Center (OCSE) Griffiss AFB NY 13441 (12, 18)	15. SECURITY CLASS. (of this report) UNCLASSIFIED	16. DECLASSIFICATION/DOWNGRADING N/A	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) Same			
18. SUPPLEMENTARY NOTES RADC Project Engineer: Doris Hamill. 1/Lt, USAF (OCSE)			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Phase retrieval adaptive optics			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Phase retrieval algorithms are presented for extended objects and for multiple images arising, for example, from observations at several wavelengths or several focal planes. The first experimental demonstration of phase retrieval is reported.			

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED


SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

394225

HB

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

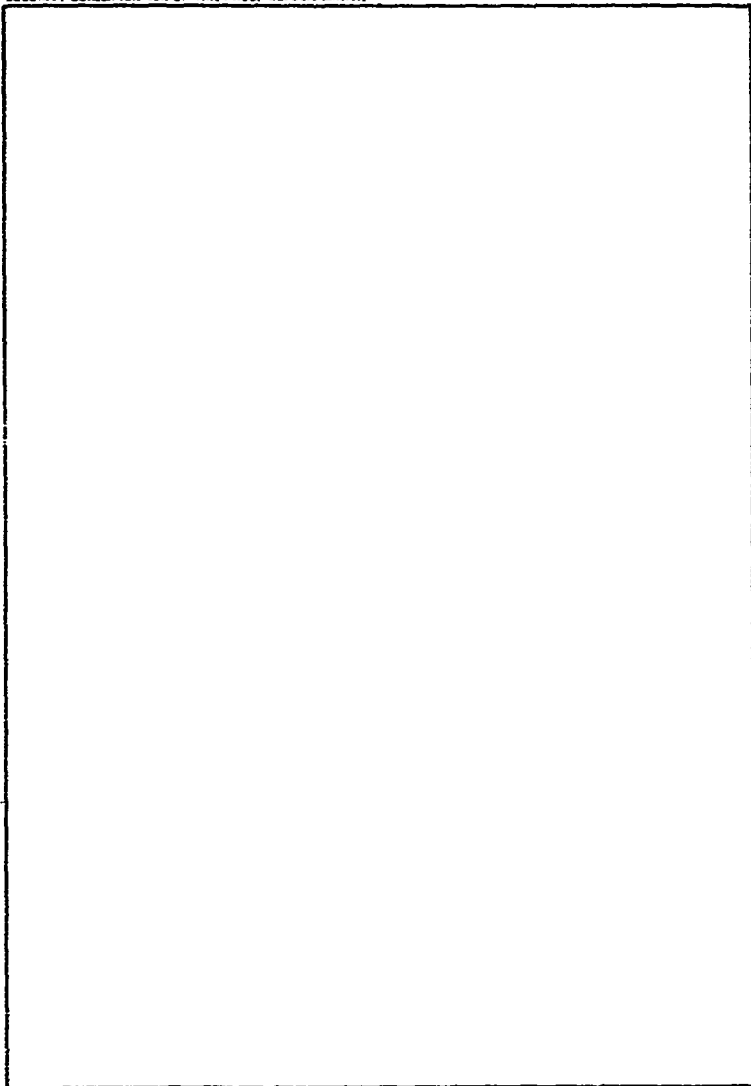

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

1 INTRODUCTION

This technical report summarizes the work performed under contract No. F30602-77-C-0176 from January 15, 1979 to August 16, 1979. We report progress in the following areas:

Draper Work

Algorithm Development

1. DC measurement problem
2. Two focal planes or two wavelengths for extended objects
3. Smoothing techniques

Hughes Work

1. Noise
2. Blind Test

Experimental Work

One-D Results

2 DRAPER WORK

Personnel from Draper gave us a phase aberration that is a typical output from a simulation of the ITEK imaging model. We fit this aberration with a 14-term Zernicke polynomial expansion and constructed a point spread function (PSF) from the polynomial phase.

When we performed phase retrieval on the PSF at $\lambda = 8$ microns the phase was retrieved almost exactly. At $\lambda = 4$ microns, where the effective phase aberration is twice as large as at 8 microns, the algorithm did not perform as well. The residual phase produced an improved PSF but it was far from diffraction limited.

At an August 16 meeting of Draper and EIKONIX personnel, we decided to perform another round of phase retrieval on the improved PSF.

Details of this work appear in TM-9 and a report of the successful recovery of the phase in the above-mentioned second iteration will appear in the final report.

3 ALGORITHM DEVELOPMENT

3.1 DC Measurement Problem

Quantization of the observed PSF causes an error in the DC ($f = 0$) term of the optical transfer function (OTF). In simulations this was not a problem because the data was generated in floating-point form. However, the phenomenon appears in measurements from our experiment where the data is recorded only to 8 significant bits.

The current algorithm fits an observed OTF with an hypothesized OTF, both normalized to one at $f = 0$. Thus an error in the normalization can cause an incorrect, hypothesized OTF to fit the observed OTF better than the correct OTF.

The remedy is simple. We find the constant that scales the hypothesized OTF to best fit the observed OTF (in a mean square error sense). Calculation of the constant is straightforward. Details appeared in the May 1979 monthly report and will be updated for the final report.

3.2 Two Focal Planes or Two Wavelengths

This algorithm is particularly useful for extended objects. If the object's spectrum $O(f)$ is known, then the problem is nearly identical to that of the point object. The algorithm uses $O(f)$ and $O(f)P_o(f)$ in the block diagram of Figure 1. $P(f)$ and $P_c(f)$ are the observed and hypothesized OTF's.

If the object (scene) is unknown, then it must first be estimated based on additional information. Such information might come from an additional observation of the scene at another wavelength or at another focal position. Call the two observations $z_1(x)$ and $z_2(x)$ with Fourier transforms $z_1(f)$ and $z_2(f)$. Then an appropriate estimate of the object spectrum is

$$\delta(f) = \frac{P_{1c}^*(f)z_1(f) + P_{2c}^*(f)z_2(f)}{|P_{1c}(f)|^2 + |P_{2c}(f)|^2},$$

where $P_{1c}(f)$ and $P_{2c}(f)$ are estimates of the system OTF's based on an estimate of the unknown phase aberration. This estimate is used in a slight modification to the algorithm of Figure 1 to find the best phase estimate.

This algorithm was tested, successfully, with a simulated, Gaussian object and noiseless observations at two focal positions. Testing with more general objects will be reported in the final report.

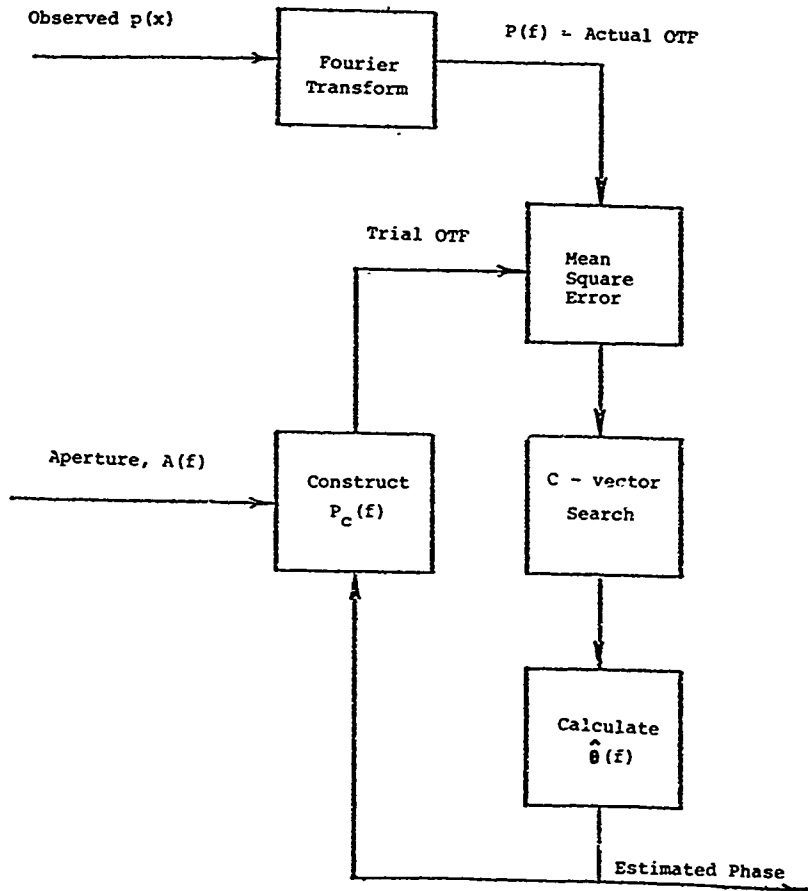


Figure 1 Parameter Search Algorithm

3.3 Smoothing Techniques

The error metric of Figure 1 has many local minima in the N-dimensional space of the Zernicke polynomial coefficients. In one-D notation the metric is

$$E(C) = \int |P(f) - P_C(f)|^2 df,$$

where $P(f)$ is the observed OTF and $P_C(f)$ is the hypothesized OTF with parameter vector C . In earlier work under this contract (TM-9), we developed a method to smooth the metric by averaging over C -intervals. Thus, the averaged metric is

$$\overline{E(C)} = \int |P(f)|^2 df - 2 \operatorname{Re} \{ \overline{P^*(f) P_C(f)} \} + \int |P_C(f)|^2 df,$$

where the overbar denotes the C -average. In that earlier work, we showed plots of the second term for a particular, observed OTF, $P(f)$, and for a one-dimensional variation of the C -vector.

In this reporting period we studied the third term to see how rapidly it varies with the several C -parameters. TM-4 is a report of this study. We found that the Zernicke polynomials for coma, 0 and 45 degree astigmatism and X and Y coma were relatively smooth for coefficients from about .2 to .6 (waves). This provided us with a rationale for selecting the interval (.25 to .5) for the grid search of the basic algorithm.

The result above is a by-product of the search for a good smoothing technique. We have neither programmed nor tested $\overline{E(C)}$, itself, to see if it provides a better metric -- one that can be searched more efficiently because it has fewer minima. This task has not been undertaken, as yet, because of its lower priority among other tasks to be accomplished.

4 WORK WITH HUGHES AIRCRAFT COMPANY

During this period we used phase retrieval algorithms developed under this contract in two separate tasks for Hughes Aircraft Company. The first was a study of the algorithm's performance with additive noise in the measured PSP and the second was a blind test. At the request of the contract monitor and with Hughes' permission, we briefed the government on this work on August 16, 1979.

In the first task we estimated the residual phase error vs. measurement noise in the PSP. We found that when the PSP is corrupted by signal-dependent noise with variance $k\rho(x)$, it causes the residual phase (after correction) to increase gradually up to some value of k and then it increases rapidly. Figure 2 shows a typical plot of the residual phase's rms value vs. input noise level when the original phase has an rms value of 0.3 waves. This plot was obtained by Monte Carlo simulation. For k higher than 0.4 the residual phase increases dramatically.


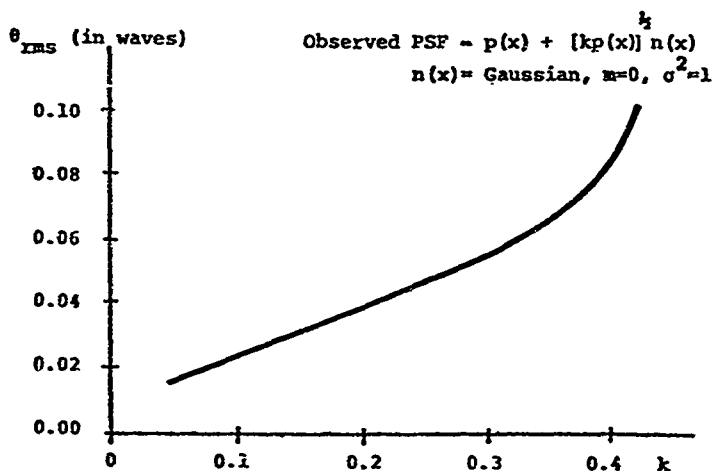


Figure 2 Residual θ_{rms} vs. measurement noise when input θ_{rms} is 0.3 waves.


The second task was a blind test where Hughes supplied us with a PSF from a system with unknown (to EIKONIX) phase aberration. We estimated the phase from the PSF. The results are summarized in Figure 3. The real phase (at the bottom) was given to EIKONIX by Hughes after the task was completed.

The second task was a blind test where Hughes supplied us with a PSF from a system with unknown (to EIKONIX) phase aberration. We estimated the phase from the PSF. The results are summarized in Figure 3. The real phase (at the bottom) was given to EIKONIX by Hughes after the task was completed.


8

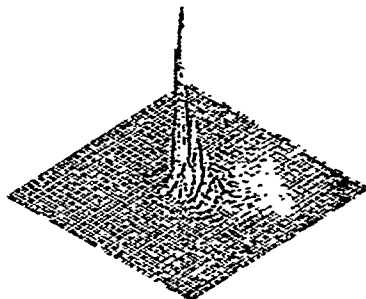

Measured PSF



Estimated Phase
1.0 = one wave



Actual Phase
100 = one wave

Figure 3 The Hughes Blind Test

5 EXPERIMENTAL WORK

The phase retrieval algorithm has been extensively tested in computer simulations, in which a point spread function from an aberrated optical system is generated by the computer and the PSF is passed to the phase retrieval program. Although this kind of work is a necessary first step, an experimental verification, in which an optical system with measured aberration is used to create the PSF, is needed to really prove the concept. An experiment was designed to provide that proof. We fabricated a phase aberration, measured it interferometrically (Figure 4), put it in an optical system to generate the PSF (Figure 5), submitted this PSF to the phase retrieval algorithm, and compared the resulting estimated phase (Figure 6) to the measured phase. The agreement is excellent and provides the first actual demonstration of phase retrieval in wavefront sensing.

A detailed presentation of the experiment will be given in the final report.

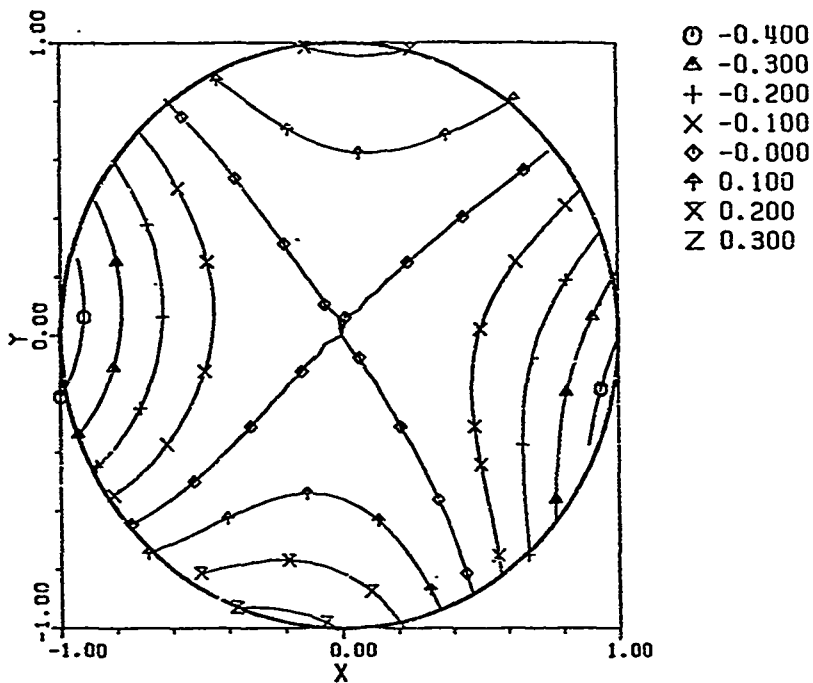


Figure 4 Interferometrically measured phase aberration reconstructed with Zernike polynomials

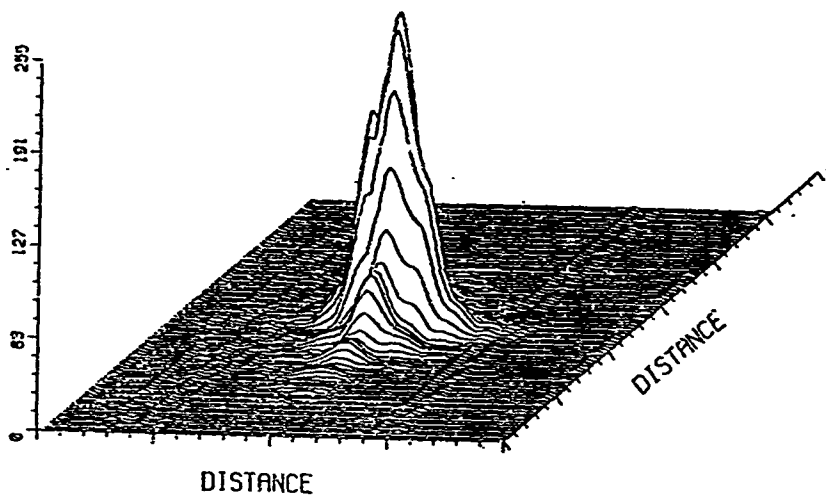


Figure 5 Aberrated PSF measured experimentally

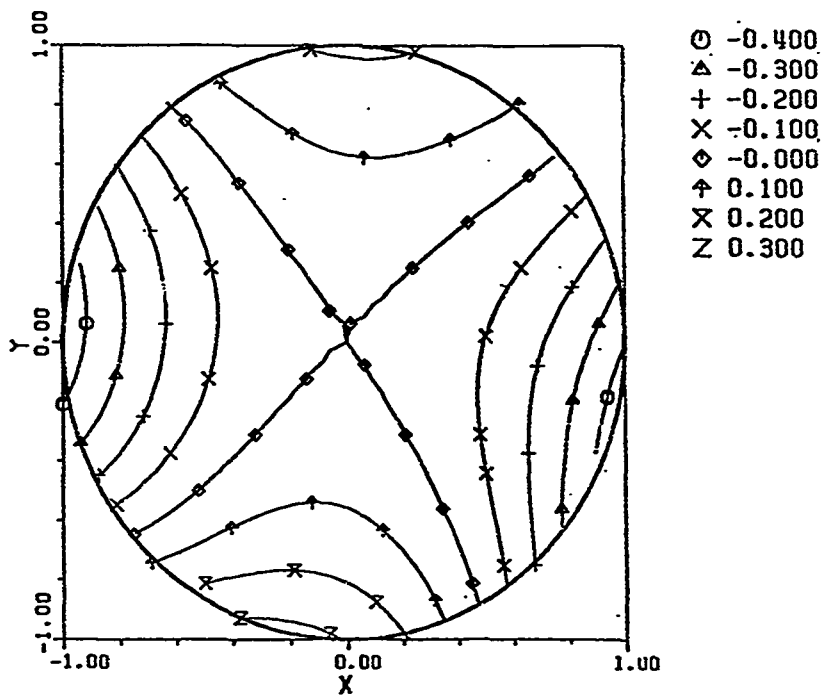


Figure 6 Estimated phase aberration corresponding to Figure 4.

6 ONE-D RESULTS

Two algorithms were developed for the one-dimensional phase retrieval problem. The first may be useful for small phase aberrations and the second appears to be a satisfactory solution for the noiseless, one-D problem.

Consider a small phase $\theta(f)$ for which the coherent system function $H(f)$ has the approximation

$$H(f) = e^{i\theta(f)}, \quad |f| < 1.$$

$$= 1 + i\theta(f), \quad |f| < 1.$$

The system OTF is the autocorrelation of $H(f)$.

More generally, we define

$$C(f) = 1 + i\theta(f)$$

where $\theta(f)$ is real but not necessarily small. Its autocorrelation $P(f)$ is observed and the problem of phase retrieval is to find $\theta(f)$.

We have shown that this problem has an exact solution and have developed an algorithm to find it. The solution is

$$\theta_K = A_{N-K+1} - \sum_{J=2}^{K-1} \theta_J \theta_{N+J-K} / \theta_N$$

$$\theta_{N-K+1} = B_{N-K+1} - \sum_{J=2}^K (\theta_{N+J-K} - \theta_J),$$

where the A_K and B_K are samples of the real and imaginary parts of the measured OTF (less the diffraction-limited OTF), and θ_K is a sample of $\theta(f)$.

A derivation of the result and several examples will appear in the final report.

The second algorithm attacks the more general problem where the sampled OTP is

$$P_K = \sum_{J=1}^{N-K+1} H_J^* H_{J+K-1}.$$

We can show that

$$\theta_K = \theta_N - F_K \pm G_K$$

and

$$\theta_{N-K+1} = B_K \pm G_K,$$

where

$$F_K = \text{angle of } D_K$$


$$G_K = \cos^{-1} (D_K/2),$$

and

$$D_K = P_{N-K+1} - \sum_{J=2}^{K-1} H_J^* H_{J+N-K}.$$

The choice of signs for θ_K yields a 2-fold ambiguity for each value of K or a 2^N -fold ambiguity for N θ_K 's. The ambiguity is resolved by monitoring the magnitude of D_K . If, at any K , D_K has magnitude greater than 2, an incorrect sign has been made prior to the current value of K . This prunes the binary tree in such a way that the number of branches grows approximately linearly with K , an entirely manageable search. This is an observation, not a theorem, based on some searches of size $N = 10, 20$ and 64 .

Details and examples will be given in the final report.

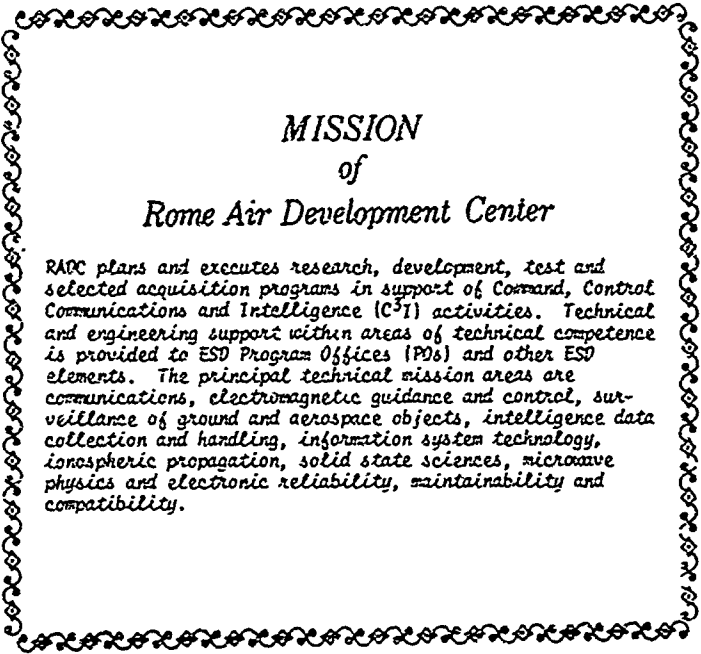A decorative rectangular border with a repeating scrollwork pattern surrounds the central text.

MISSION of Rome Air Development Center

RADC plans and executes research, development, test and selected acquisition programs in support of Command, Control Communications and Intelligence (C³I) activities. Technical and engineering support within areas of technical competence is provided to ESD Program Offices (POs) and other ESD elements. The principal technical mission areas are communications, electromagnetic guidance and control, surveillance of ground and aerospace objects, intelligence data collection and handling, information system technology, ionospheric propagation, solid state sciences, microwave physics and electronic reliability, maintainability and compatibility.