

AD-A168 442

SIMPLIFIED DESIGN EQUATIONS FOR AN OPTICAL QUARTER-WAVE 1/1

STACK REFLECTION FILTER(U) AIR FORCE WRIGHT

AERONAUTICAL LABS WRIGHT-PATTERSON AFB OH


R J SPRY


UNCLASSIFIED

APR 86 AFMAL-TR-86-4021

F/G 20/6

NL

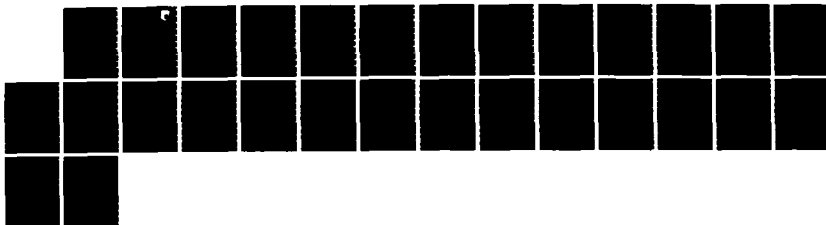



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AFWAL-TR-86-4021


SIMPLIFIED DESIGN EQUATIONS FOR
AN OPTICAL QUARTER-WAVE STACK
REFLECTION FILTER

Robert J. Spry
Laser Hardened Materials Branch
Electromagnetic Materials Division

April 1986

Interim Technical Report for Period July 1981 -- June 1985

Approved for public release; distribution unlimited

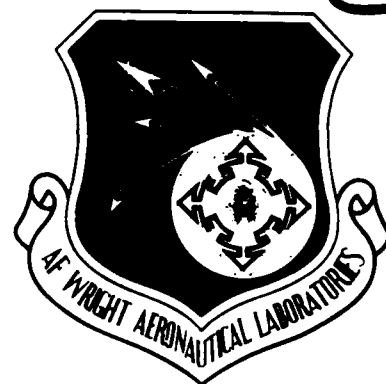

DTIC FILE COPY

MATERIALS LABORATORY
AIR FORCE WRIGHT AERONAUTICAL LABORATORIES
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433-6533

DTIC
ELECTE
MAY 14 1986
S E D


86 5 14 002

NOTICE

When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


This report has been reviewed by the Office of Public Affairs (ASD/PA) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

This technical report has been reviewed and is approved for publication.


ROBERT J. SPRY, Project Scientist


WILLIAM R. WOODY, Acting Chief
Laser Hardened Materials Branch
Electromagnetic Materials Division

FOR THE COMMANDER

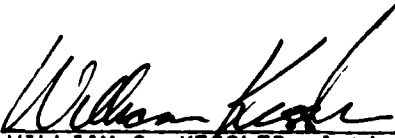
WILLIAM C. KESSLER, Acting Chief
Electromagnetic Materials Division

If your address has changed, or if you wish to be removed from our mailing list, or if the addressee is no longer employed by your organization, please notify AFWAL/MLPJ, W-PAFB, OH 45433 to help us maintain a current mailing list.

Copies of the report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

ADA168442

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution unlimited		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE					
4. PERFORMING ORGANIZATION REPORT NUMBER(S) AFWAL-TR-86-4021			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION Laser Hardened Materials Branch Electromagnetic Materials Division		6b. OFFICE SYMBOL (If applicable) AFWAL/MLPJ	7a. NAME OF MONITORING ORGANIZATION		
6c. ADDRESS (City, State and ZIP Code) Wright-Patterson Air Force Base OH 45433-6533			7b. ADDRESS (City, State and ZIP Code)		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
8c. ADDRESS (City, State and ZIP Code)			10. SOURCE OF FUNDING NOS.		
			PROGRAM ELEMENT NO. 62102F	PROJECT NO. 2422	TASK NO. 04
					WORK UNIT NO. 01
11. TITLE (Include Security Classification) Simplified Design Equations for an Optical Quarter-Wave Stack Reflection Filter (U)					
12. PERSONAL AUTHOR(S) Robert J. Spry					
13a. TYPE OF REPORT Interim		13b. TIME COVERED FROM 81 Jul TO 85 Jun		14. DATE OF REPORT (Yr., Mo., Day) April 1986	
15. PAGE COUNT 28					
16. SUPPLEMENTARY NOTATION					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB. GR.			
20	06		optical filters; interference filters; quarter-wave stack; periodic media; thin films.		
19. ABSTRACT (Continue on reverse if necessary and identify by block number)					
Formulas are presented which describe the major operational parameters of the high-rejection, narrow bandwidth, quarter-wave stack optical interference filter. Mathematical equivalence is demonstrated between the results of the development of two prominent, present-day theoreticians. To facilitate the understanding of the utility of the simplified equations, a practical design problem has been analyzed. Further areas for application of the equations are suggested.					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT UNCLASSIFIED/UNLIMITED ☒ SAME AS RPT. ☐ DTIC USERS ☐			21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED		
22a. NAME OF RESPONSIBLE INDIVIDUAL Robert J. Spry			22b. TELEPHONE NUMBER (Include Area Code) (513) 255-6671		22c. OFFICE SYMBOL AFWAL/MLPJ

FOREWORD

This report describes an in-house study conducted by Robert J. Spry of the Laser Hardened Materials Branch, Electromagnetic Materials Division, Materials Laboratory, Air Force Wright Aeronautical Laboratories, Wright-Patterson Air Force Base, OH 45433 under Project 2422, Task No. 242204, Work Unit 24220401. The work reported herein was performed during the period July 1981 through June 1985 by the author. The report was released on 16 December 1985.

The author wishes to thank John C. Olson, Donald F. Stevison, and Koto White of the Laser Hardened Materials Branch for many helpful discussions.

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Avail and/or	
Dist	Special
A-1	



TABLE OF CONTENTS

SECTION		PAGE
I	INTRODUCTION	1
II	DERIVATIONS	3
	1. Physical Description	3
	2. Bandwidth	7
	3. Reflectance and Transmittance	7
	4. Angle Shift of the Reflection Band Maximum . . .	12
III	DESIGN EXAMPLE	14
IV	CONCLUSIONS	20
	REFERENCES	21

LIST OF ILLUSTRATIONS

FIGURE		PAGE
1.	Geometry of the Reflection-Band Filter	4
2.	Spectrum of the Reflection-Band Filter	5
3.	Minimum Transmission vs. Number of Layer Pairs	15
4.	Number of Layer Pairs vs. the High Refractive Index . . .	16
5.	Width of the Reflection Band vs. the High Refractive Index	18
6.	Maximum Angle of Incidence vs. Maximum Tolerable Fractional Spectral Shift	19

SECTION I

INTRODUCTION

Optical filters with large absorbance values are much in demand nowadays, largely in relation to the widespread use of moderate or high power lasers. Examples of applications include protection of operators of laser range finders, and removal of the excitation radiation from Raman spectra. Most uses also require that the filter rejection band be narrow, so as to maximize the useful spectral regime. One approach to the solution for these problems is the quarter-wave interference stack filter (Reference 1). The physics of these structures is very mature, having been fully developed and summarized by Professor O. S. Heavens of York University, England (Reference 2). The pertinent features and equations for these filters have also been reviewed by an American expert, Dr. Philip Baumeister (Reference 3).

Many persons familiar with the older theoretical development of Heavens have not immediately recognized the formulas used by Baumeister. The first purpose of this report is to demonstrate the mathematical equivalence between the two schools of the major quarter-wave stack expressions. It is also felt that a summary of the equations in a single place would be handy for use by scientists from other fields who need to make quick estimates of filter performance. A practical example of the application of the equations is also included. Also, it should be noted

AFWAL-TR-86-

that the quarter-wave stack serves as a good first approximation to another popular refractive index spatial variation, that of the sinusoid, or rugate (Reference 4).

SECTION II

DERIVATIONS

1. Physical Description

The quarter-wave stack filter, along with incident and transmitted light rays, is illustrated in Figure 1. The filter is constructed of alternating layers of low-refractive index material, n_L , and high-refractive index material, n_H , deposited upon a substrate of refractive index, n_S . The thicknesses of the low- and high-index materials are d_L , and d_H , respectively. The refractive indices and layer thicknesses are chosen so that the optical thicknesses ($n_i d_i$ products) are one-quarter of the wavelength of light to be rejected. In Figure 1, the case of an even number ($2N$) of layers is shown. An odd number ($2N + 1$) of layers is also a practical possibility.

A light ray of wavenumber ν_0 , wavelength λ_0 , and intensity I_0 impinges upon the outer surface of the filter at an angle θ_0 to the surface normal. A beam is reflected about the normal at an equal angle θ_0 with intensity RI_0 , where R is the filter reflectance. The transmitted beam exits the back surface of the substrate also at an angle θ_0 , with intensity TI_0 , T being the transmittance of the filter. In the absence of absorption,

$$R + T = 1 \quad . \quad (1)$$

In Figure 2, a typical reflectance spectrum of a quarter-wave stack interference filter is plotted on a reduced wavenumber scale. The maximum reflectance at the central frequency ν_0 is R_{2N} , while the transmittance at ν_0 is $T_{\min}$. The bandwidth BW is defined to be the full

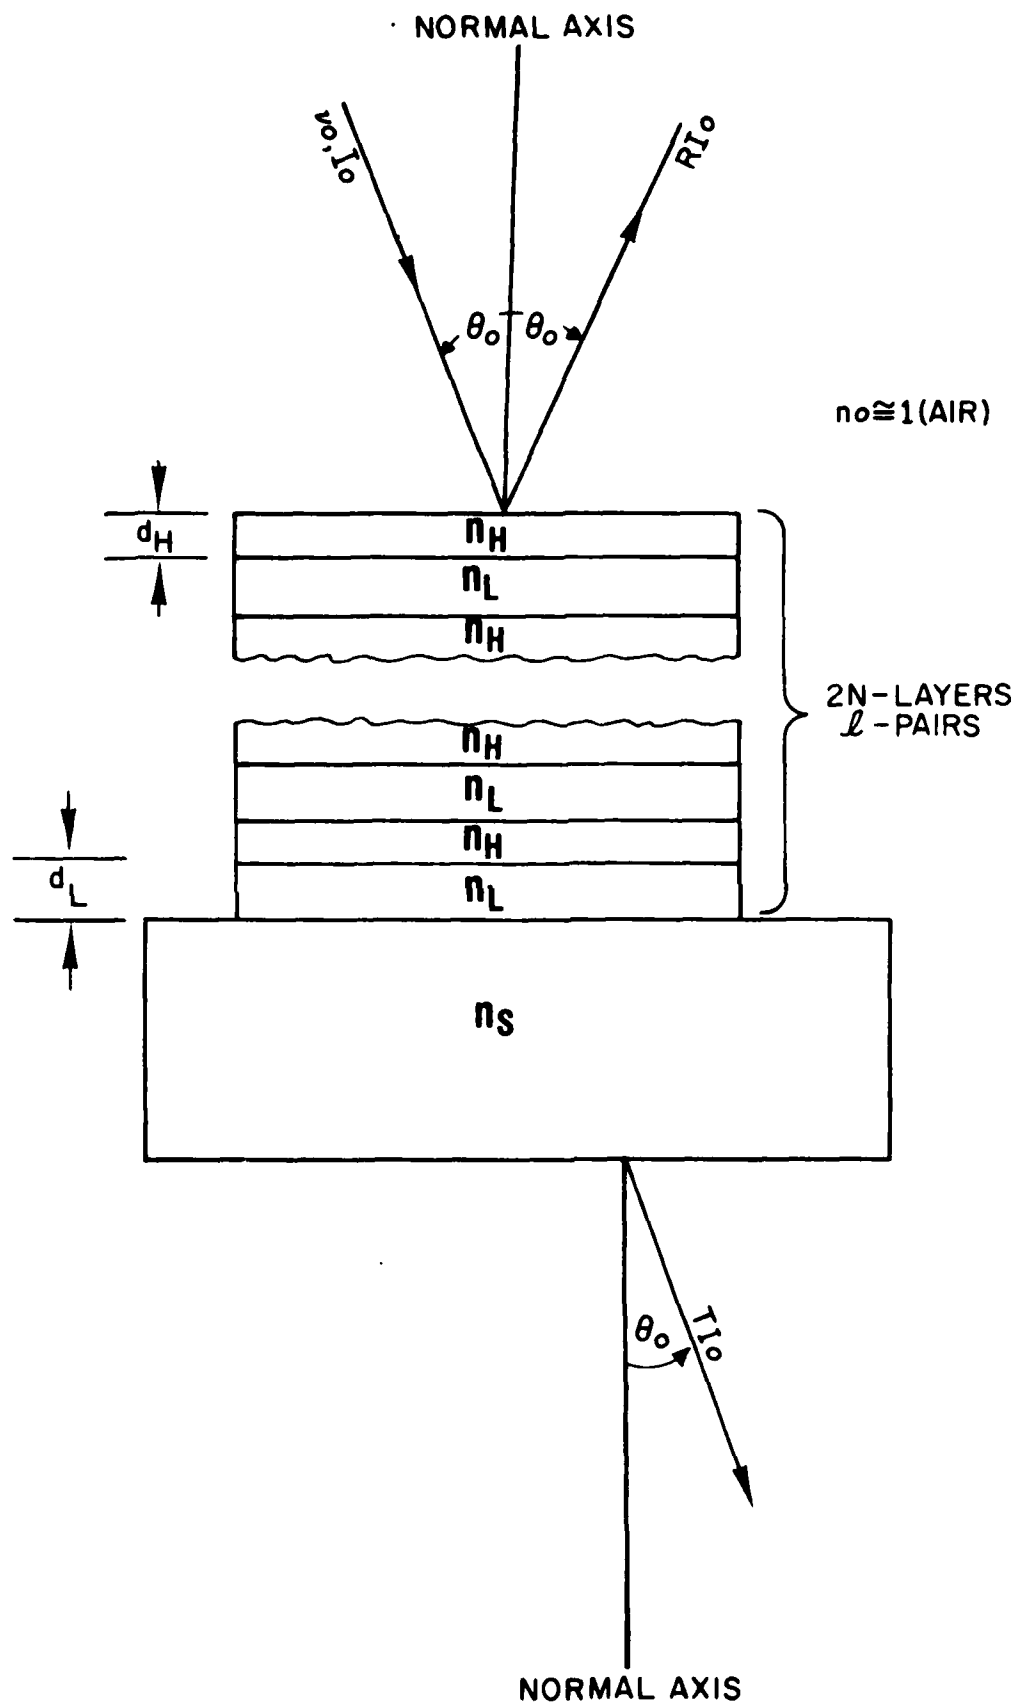


Figure 1. Geometry of the Reflection-Band Filter.

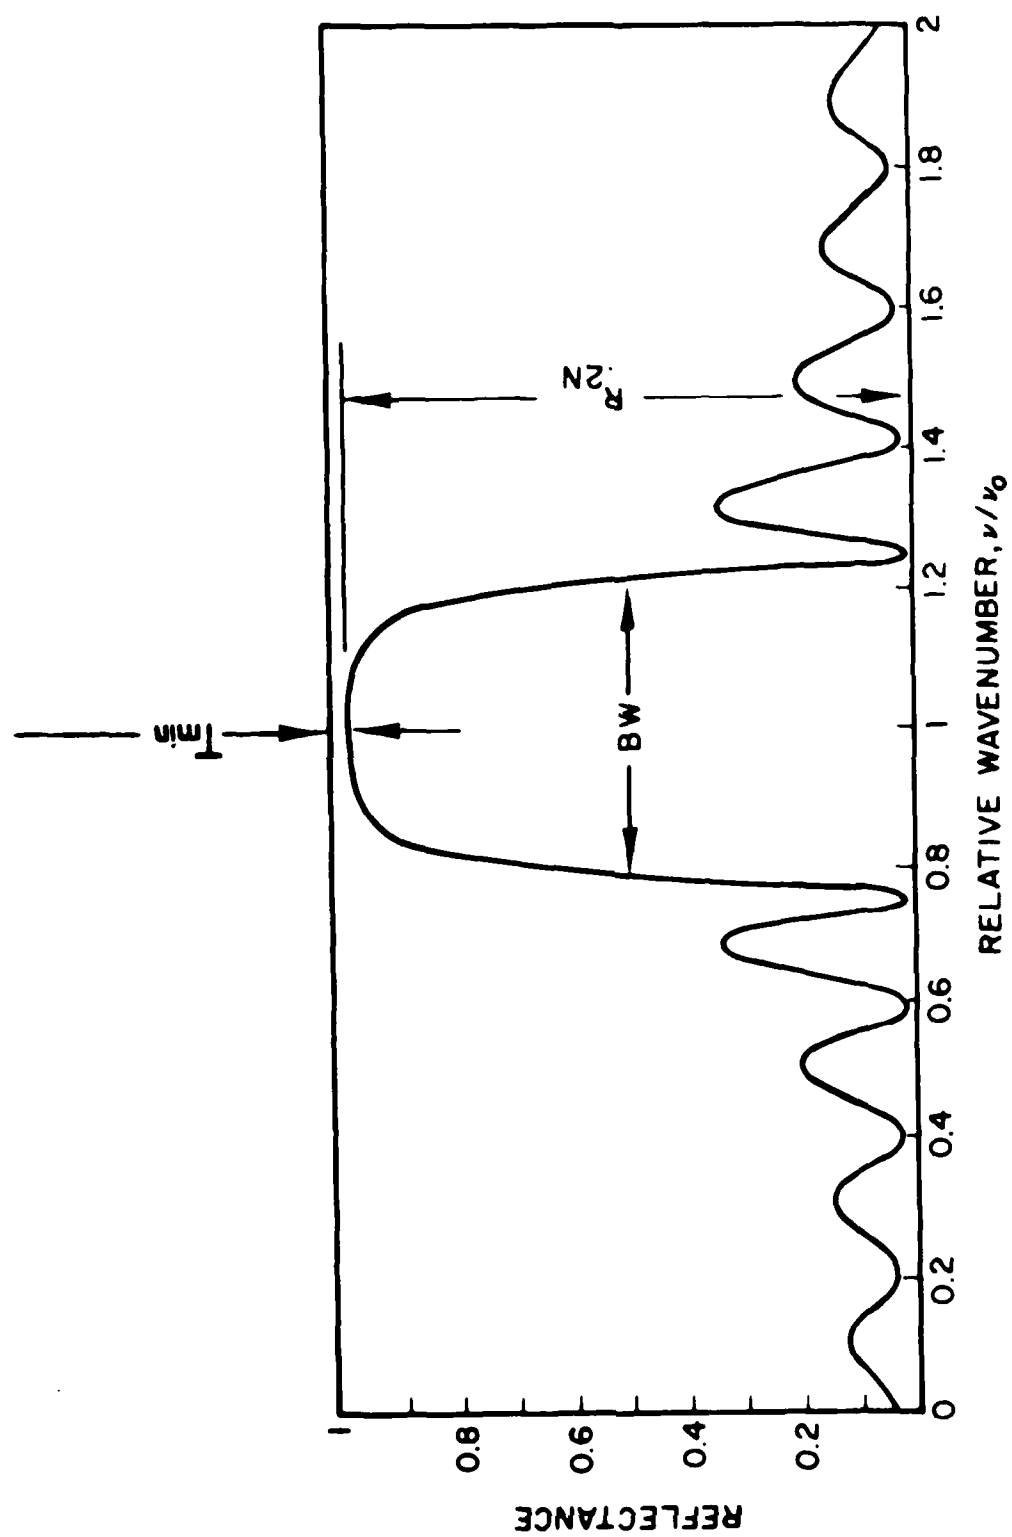


Figure 2. Spectrum of the Reflection-Band Filter.

width of the reflectance band (reduced wavenumber scale) at one-half the maximum reflectance. The origin of the smaller relative maxima and minima are beyond the scope of the present discussion.

2. Bandwidth

It can be shown from the product matrix method (References 1 and 2) that

$$BW = \frac{4}{\pi} \arcsin \left(\frac{n_H - n_L}{n_H + n_L} \right) . \quad (2)$$

Making use of the expansion for small x ,

$$\arcsin x \approx x , \quad (3)$$

we find

$$BW \approx \frac{4}{\pi} \left(\frac{n_H - n_L}{n_H + n_L} \right) . \quad (4)$$

If we further define

$$\Delta n \equiv (n_H - n_L) , \quad (5)$$

and

$$\bar{n} \equiv \left(\frac{n_H + n_L}{2} \right) , \quad (6)$$

we arrive at

$$BW \approx \left(\frac{2}{\pi} \frac{\Delta n}{\bar{n}} \right) , \quad (7)$$

the result of Baumeister.

3. Reflectance and Transmittance

For an even number of layer pairs, Heavens (Reference 1) has derived

the reflectance maximum as

$$R_{2N} = \left(\frac{n_s f - n_0}{n_s f + n_0} \right)^2, \quad (8)$$

and for an odd number of pairs as

$$R_{2N+1} = \left(\frac{f n_H^2 - n_0 n_s}{f n_H^2 + n_0 n_s} \right). \quad (9)$$

Here, f is the standing wave ratio

$$f = \left(\frac{n_H}{n_L} \right)^{2N}. \quad (10)$$

If we let

$$y = \frac{n_0}{n_s f}, \quad (11)$$

then Eq. (8) becomes

$$R_{2N} = \left(\frac{1 - y}{1 + y} \right)^2. \quad (12)$$

For the desired case of large reflectance values

$$y \ll 1, \quad (13)$$

so that R_{2N} may be expanded as

$$R_{2N} = (1 - 2y + y^2)(1 - y + y^2 \text{ ----})^2, \quad (14)$$

or

$$R_{2N} \approx (1 - 4y) \quad . \quad (15)$$

Thus,

$$T_{\min} \approx 4y = \frac{4n_o/n_s}{f} \quad . \quad (16)$$

If the antireflection coatings have already been applied to the front and back surfaces of the quarter-wave stack to produce zero reflection at the boundaries, and if we let $l = 2N$ and $V = f$, we obtain

$$V = \left(\frac{n_H}{n_L} \right)^l \quad , \quad (17)$$

and

$$T_{\min} \approx \frac{4}{V} = 4 \left(\frac{n_H}{n_L} \right)^{-l} \quad , \quad (18)$$

bringing the previous results into agreement with the expressions of Baumeister. These antireflection coatings also have a quarter-wave optical thickness and refractive index values given by

$$n_a = \sqrt{\bar{n} n_o} \quad , \quad (19)$$

and

$$n_b = \sqrt{\bar{n} n_s} \quad . \quad (20)$$

When actually designing a filter, one is often interested in the number of layers to be deposited in achieving a given level of performance. To find this required number of layer pairs, we first compute the natural logarithm of both sides of Eq. (18):

$$\ln\left(\frac{T_{\min}}{4}\right) = -l \ln\left(\frac{n_H}{n_L}\right) . \quad (21)$$

Further, utilizing Eq. (5) and the series expansion

$$\ln(1+z) = \left(z - \frac{z^2}{2} + \dots\right) , \quad (22)$$

Eq. (21) simplifies to:

$$l \approx \left(\frac{n_L}{\Delta n}\right) \ln\left(\frac{4}{T_{\min}}\right) . \quad (23)$$

For most practical cases n_L is approximately equal to $\bar{n}$. Thus, combining Eq. (7) and Eq. (23) yields

$$l \approx \frac{2}{\pi(BW)} \ln\left(\frac{4}{T_{\min}}\right) . \quad (24)$$

This is a most practical equation for the designer, because it clearly relates the trade-offs among bandwidth, optical rejection, and number of required layer pairs.

In our present model we have assumed that the absorption within the filter is identically zero. It is nevertheless useful to calculate an

effective peak absorbance, defined in the usual manner in terms of the real transmittance:

$$D_{\max} = -\log (T_{\min}) \quad . \quad (25)$$

Inserting Eq. (18) into Eq. (25) gives

$$D_{\max} \approx \log V - 0.602 \quad , \quad (26)$$

while utilizing Eq. (22) and Eq. (17) produces

$$D_{\max} \approx l (\log e) \left(\frac{\Delta n}{n_L} \right) - 0.602 \quad . \quad (27)$$

Finally, with the help of Eq. (7) and the previous approximation for n_L , we obtain Baumeister's result,

$$D_{\max} \approx 0.434 \frac{\pi}{2} (BW) l - 0.602 \quad . \quad (28)$$

This formula is similar to Eq. (24) in its usefulness in design applications.

4. Angle Shift of the Reflection Band Maximum

For the case of a single layer of thickness d and refractive index n , the condition for a reflectance maximum is:

$$\frac{2nd \cos \theta}{\lambda_o} = k + 1/2 \quad , \quad (29)$$

where θ is the angle of refraction inside the medium and k is an integer (Reference 5). Setting $k = 0$, we will combine Eq. (29) with the result from Snell's law,

$$n \sin \theta = n_o \sin \theta_o \quad , \quad (30)$$

to give the fractional wavelength shift

$$\frac{\delta \lambda_o}{\lambda_o} = \sqrt{1 - \left(\frac{n_o}{n} \sin \theta_o \right)^2} - 1 \quad . \quad (31)$$

Turning to our quarter-wave stack, we next replace n by $\bar{n}$, and expand the above radical for small angles (in radians) to obtain

$$\frac{\delta \lambda_o}{\lambda_o} \approx - \frac{1}{2} \left(\frac{n_o \theta_o}{\bar{n}} \right)^2 \quad . \quad (32)$$

Using $\bar{n}$ here is not completely accurate, but the correct, effective index does lie between n_H and n_L . Eq. (32) is the same result obtained by Baumeister, except that his text seems to be in error because it refers to the angle in Eq. (32) as "the mean refracted angle inside the periodic stack."

We usually will only be able to tolerate a certain small wavelength shift, which we will define as a fraction γ of the bandwidth:

$$\left(\frac{\delta \lambda}{\lambda_0} \right)_{\max} = \gamma_{BW} \quad (33)$$

Combining Eqs. (7), (32), and (33) yields for the maximum tolerable angle of incidence,

$$\theta_{\max} = 2 \sqrt{\frac{\gamma}{\pi} \Delta n \bar{n}} \quad (34)$$

SECTION III

DESIGN EXAMPLE

We will next apply our mathematical results to a practical example recently considered at the Materials Laboratory (Reference 6). We wanted to produce a high-reflectance narrow band filter for $5300 \text{ \AA}$, with minimum angle shift. A major concern was the number of required layer pairs, since the actual manufacture for a large number would be prohibitive. Further, n_L was constrained to the value 2.37, while n_H could be only about 6 percent greater.

The required minimum transmittance is plotted in Fig. 3 using Eq. (18). Practical required transmittance values were in the 10^{-2} to 10^{-4} range. A family of equations was generated by allowing n_H to assume values between 2.39 and 2.52. Alternatively, Eq. (23) was used to generate similar design considerations in Fig. 4. It is clear from both graphs that there is a severe trade-off among $T_{\min}$, ℓ , and Δn . To reduce ℓ to a practical level, it is thus required to make Δn reasonably large and reduce expectations for $T_{\min}$. For example, $T_{\min} = 10^{-2}$ and $n_H \geq 2.47$ would keep $\ell < 150$.

$T_{\min}$ vs. ℓ ; $n_L = 2.37$

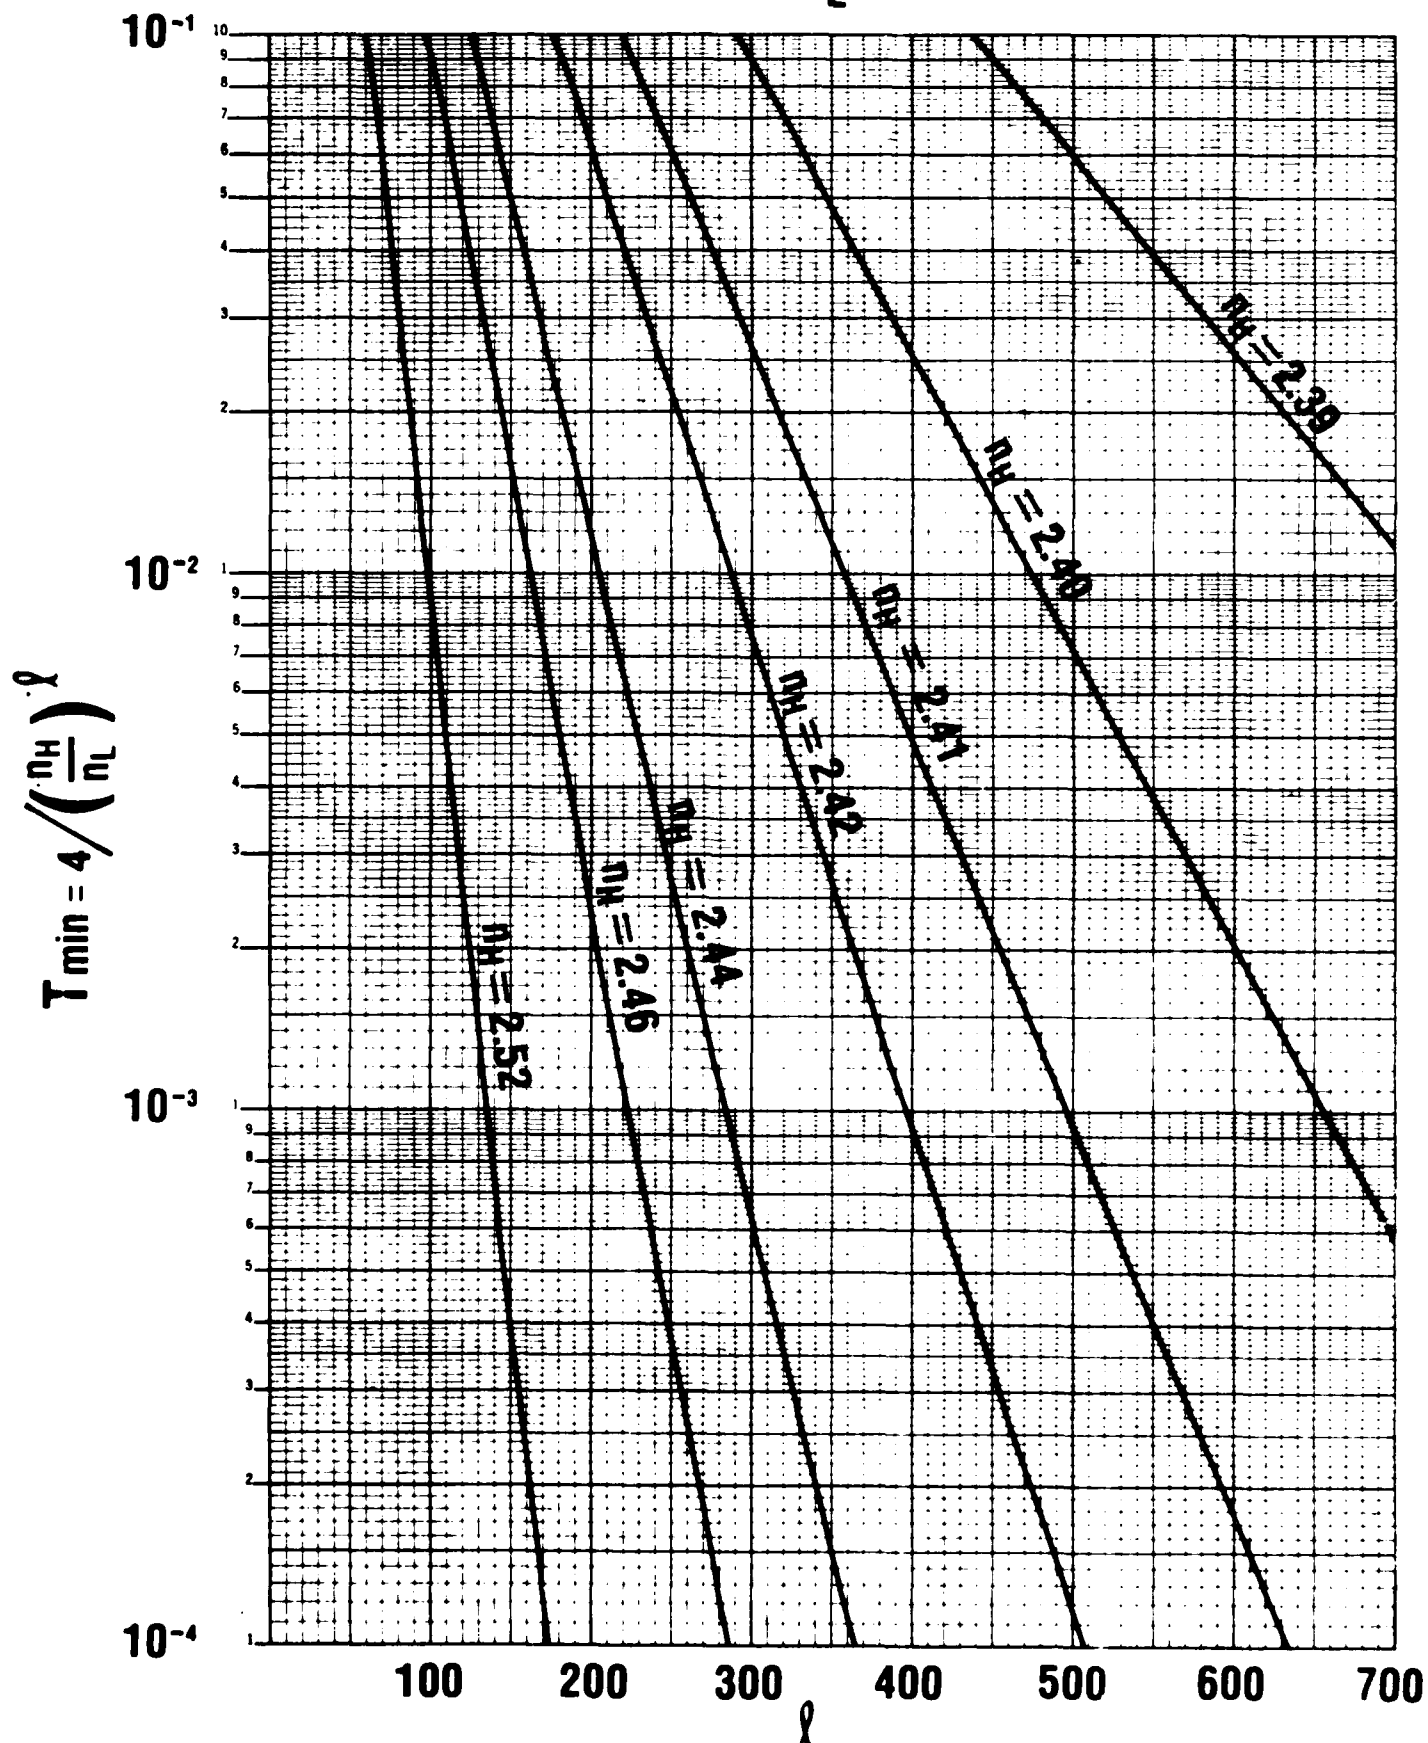


Figure 3. Minimum Transmission vs. Number of Layer Pairs.

ℓ vs. n_H ; $n_L=2.37$

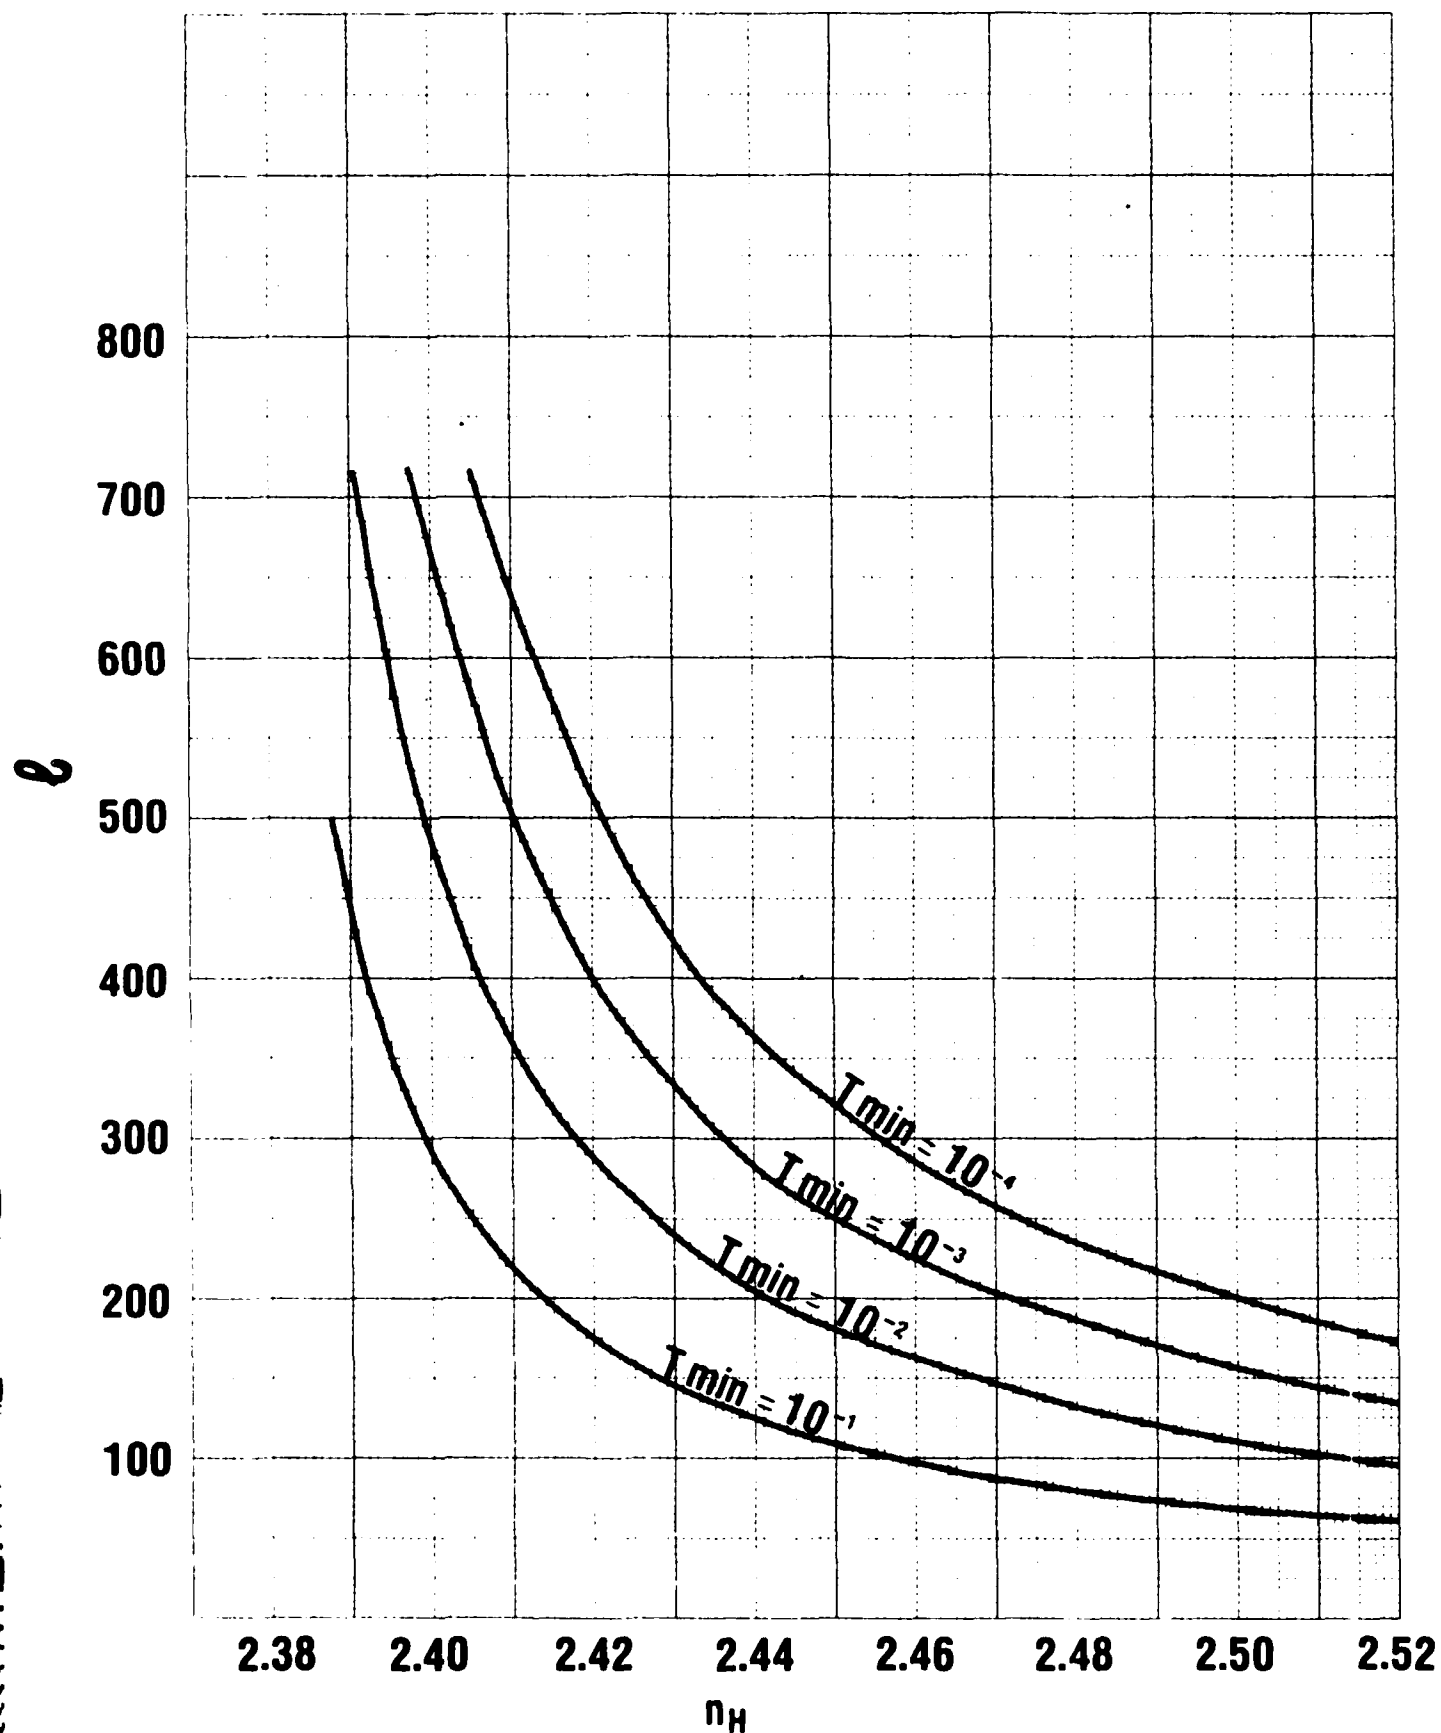


Figure 4. Number of Layer Pairs vs. the High Refractive Index.

Next, we consider the bandwidth, governed by the parameters of Eq. (7) as shown in Fig. 5. Even up to the maximum allowed value of 2.52 for n_H , the bandwidth is less than 0.04, a quite acceptable value. Thus, the bandwidth does not impose any limitations upon the design or manufacture of our case study filter.

The angle shift of the peak reflectance is the only design problem with which we must still contend. To facilitate our choices, we have plotted Eq. (34) in Fig. 6 using the same family of values for n_H as was used in Fig. 3. We wish the required wavelength peak shift to be no more than 20 percent of the bandwidth. We previously found that n_H must be ≥ 2.47 . From the curves we find $\theta_{\max} \approx 15^\circ$, a good value for the angle of incidence, or 30° for the field of view (F.O.V.). This is quite compatible with many practical optical systems.

BW vs. n_h ; $n_L=2.37$

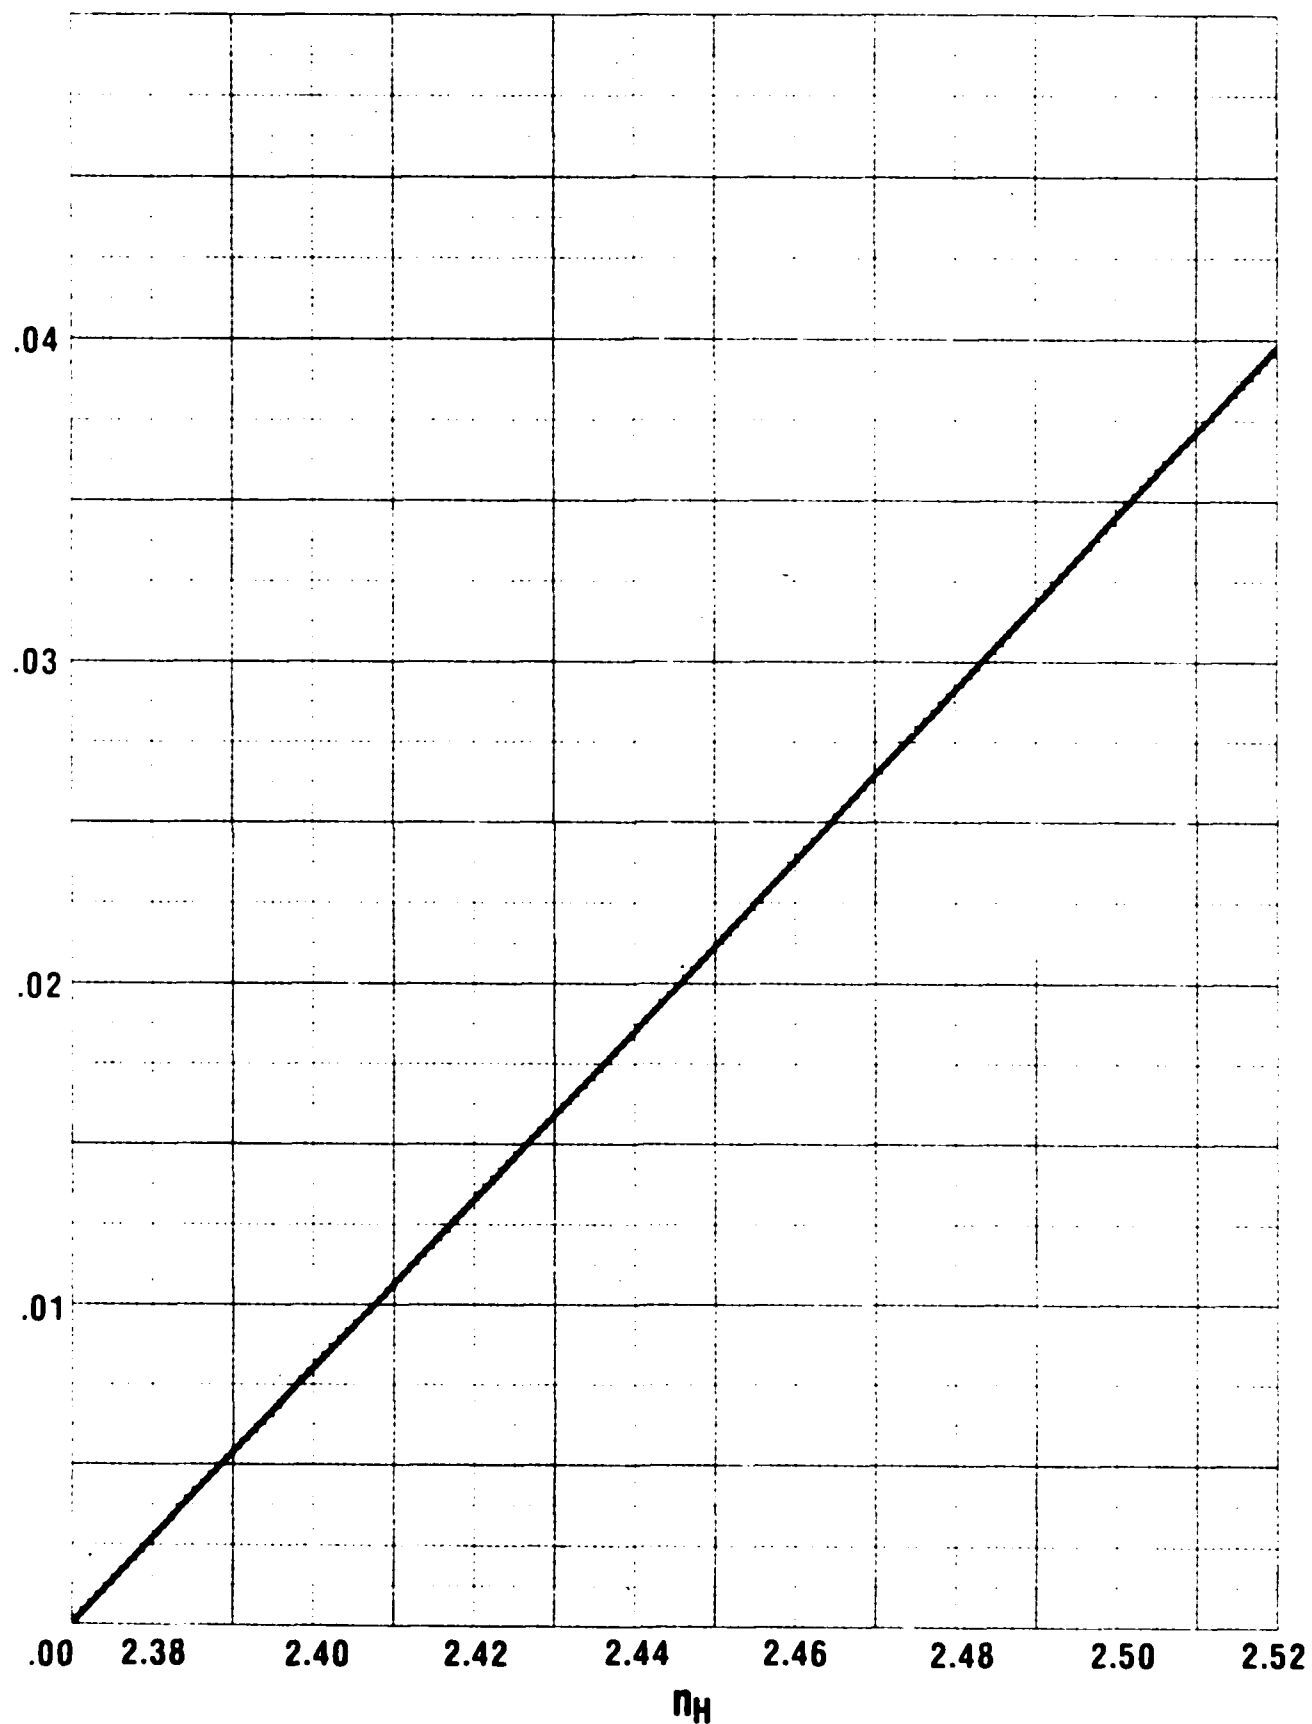


Figure 5. Width of the Reflection Band vs. the High Refractive Index.

$\Theta_{\max}$ vs. τ

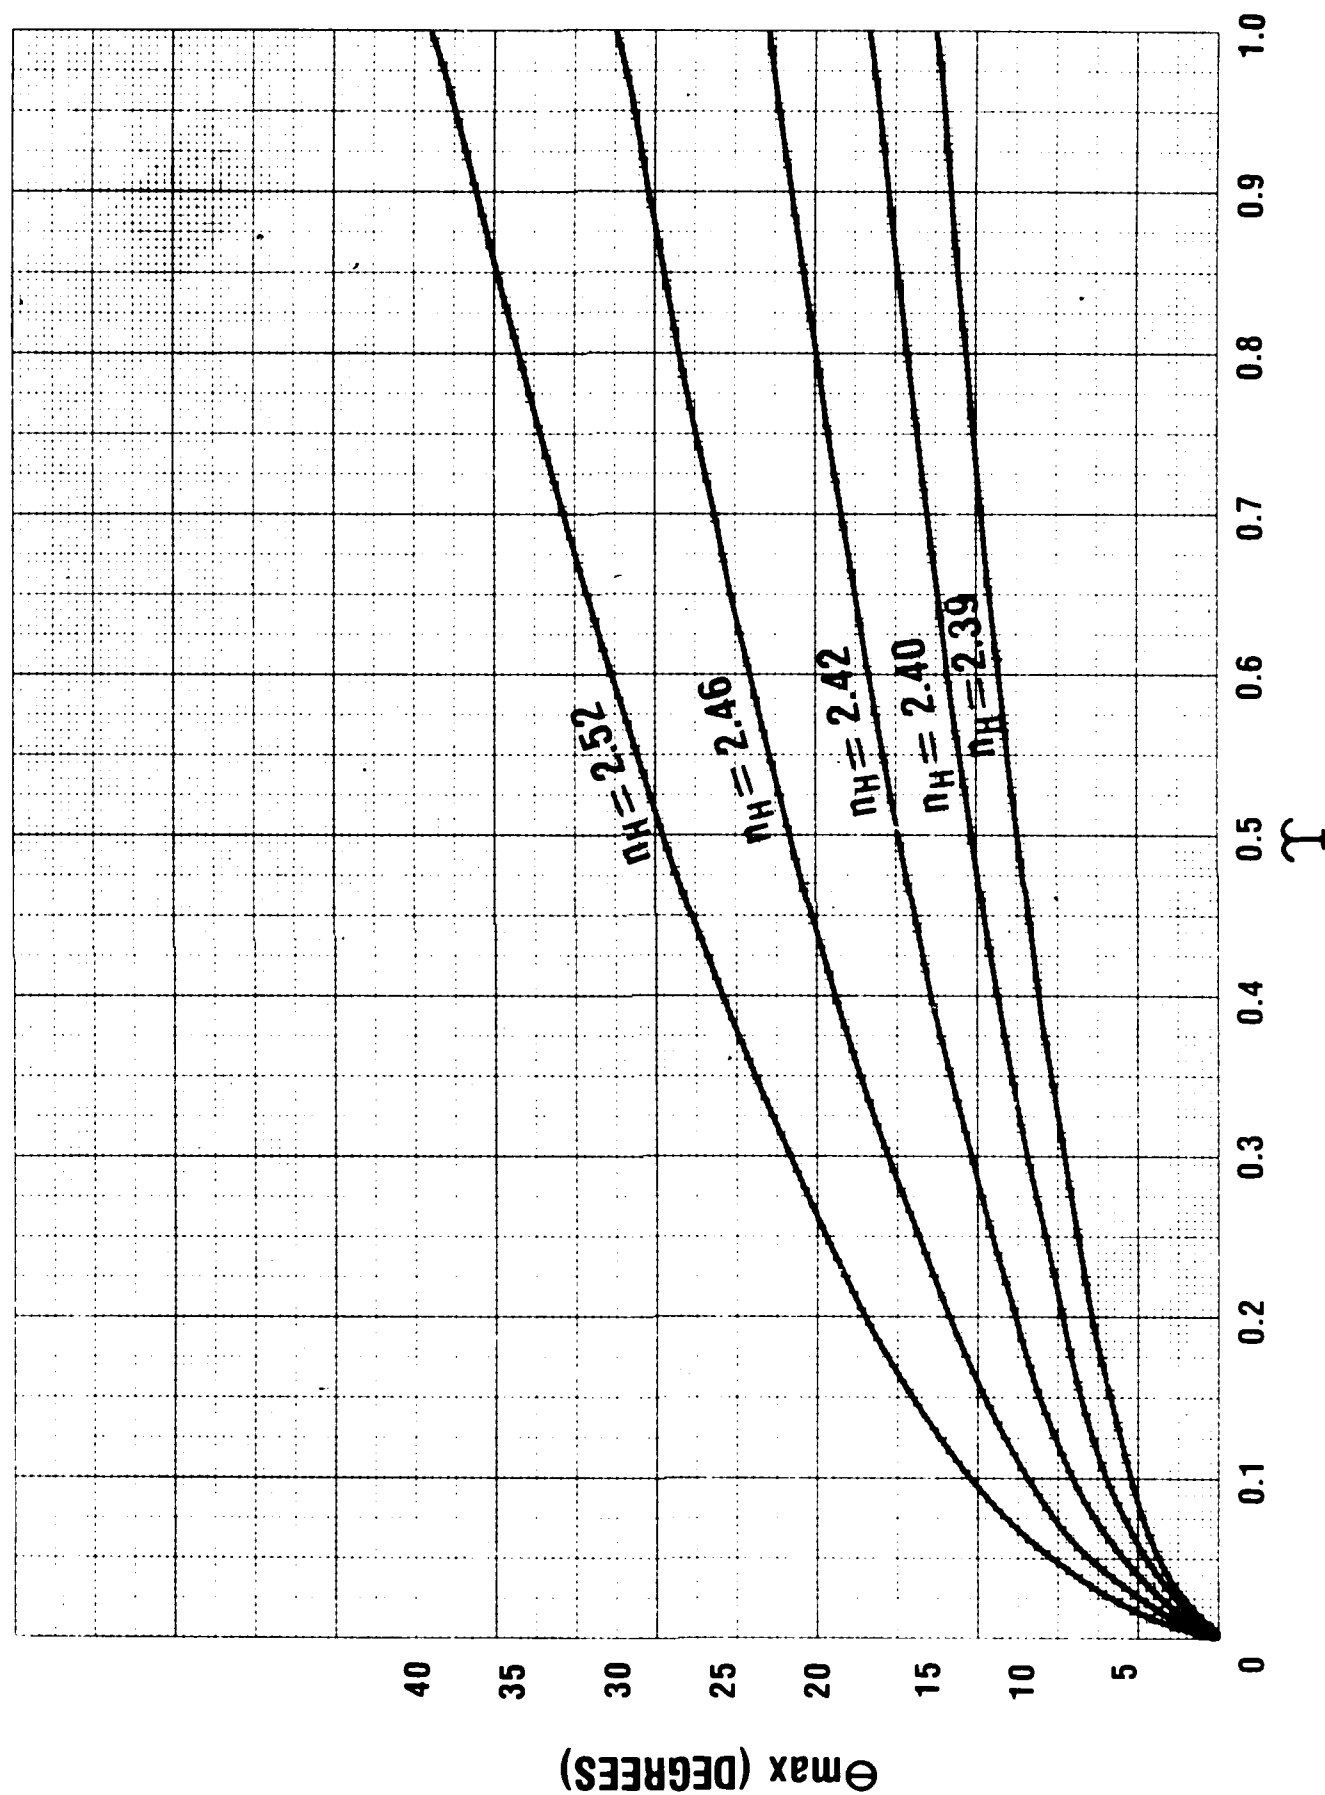


Figure 6. Maximum Angle of Incidence vs. Maximum Tolerable Fractional Spectral Shift.

SECTION IV

CONCLUSIONS

We have collected or derived the equations describing the major operational parameters for high-rejection, narrow bandwidth, quarter-wave stack interference filters. In doing so we have demonstrated the mathematical equivalence between expressions from the two major theoretical developments used by most scientists at the present time. We have presented simplified design equations for the transmittance minimum, reflectance maximum, absorbance maximum, bandwidth, required number of layer pairs, and angle shift of the reflectance maximum.

This report should be useful to the novice who wishes to obtain quick, moderately accurate results without indulging in the intricacies of matrix manipulations and tedious computer calculations. This category may include persons whose major efforts are concerned with materials, lasers, spectroscopy, nonlinear optics, systems, and management. We also feel that this collection of equations helps one maintain cognizance of the pertinent physics, something often lost when encumbered by numerical methods. To demonstrate the utility of the equations contained herein, we have carefully analyzed a practical design problem. Finally, we wish to emphasize that through the connection via Fourier's theorem, the formulas for the quarter-wave stack filter serve as a quick, first approximation for calculating the major features of filters having sinusoidal refractive index profiles.

REFERENCES

1. O. S. Heavens, Thin Film Physics (Methuen and Company, Ltd., London, 1970), Chap. 6.
2. O. S. Heavens, Optical Properties of Thin Solid Films (Dover Publications, Inc., New York, 1965).
3. Philip Baumeister, J. Opt. Soc. Am. 71, 604 (1981).
4. J. A. Dobrowlski and D. Lowe, Appl. Opt. 17, 3039 (1978).
5. Bruno Rossi, Optics (Addison-Wesley Publishing Company, Inc., Reading Mass., 1957), Chap. 6.
6. Robert J. Spry, "Dielectric Optical Switch," Air Force Invention No. 16,542 (August 9, 1984).

END
DTIC

7-86