

UNCLASSIFIED

AD 409 017

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

DDC 409017
CATALOGED BY
AS AD No.

409 017

THE ANTENNA LABORATORY

RESEARCH ACTIVITIES in ---

*Automatic Controls
Microwave Circuits
Terrain Investigations
Wave Propagation*

*Antennas
Astronautics
Radomes*

*Echo Area Studies
E M Field Theory
Systems Analysis
Submillimeter Applications*

THE TRANSISTORIZED DIPOLE ANTENNAFIER

by

William J. Robertson and John R. Copeland

Contract Number AF 33(657)-10386

BPSN Number 3-6399-62780-1

1566-2

15 May 1963

Hitch Element Number 62405484

760D - Project 6278, Task 627801

Aeronautical Systems Division

Project Engineer, J. F. Rippin, Jr. - ASRNC-33

Department of ELECTRICAL ENGINEERING



THE OHIO STATE UNIVERSITY
RESEARCH FOUNDATION

Columbus, Ohio

NO. OTS

NOTICES

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

The Government has the right to reproduce, use, and distribute this report for governmental purposes in accordance with the contract under which the report was produced. To protect the proprietary interests of the contractor and to avoid jeopardy of its obligations to the Government, the report may not be released for non-governmental use such as might constitute general publication without the express prior consent of The Ohio State University Research Foundation.

Qualified requesters may obtain copies of this report from the ASTIA Document Service Center, Arlington Hall Station, Arlington 12, Virginia. Department of Defense contractors must be established for ASTIA services, or have their "need-to-know" certified by the cognizant military agency of their project or contract.

REPORT
by
THE OHIO STATE UNIVERSITY RESEARCH FOUNDATION
COLUMBUS 12, OHIO

Sponsor	Aeronautical Systems Division Air Force Systems Command United States Air Force Wright-Patterson Air Force Base Ohio
Contract Number	AF 33(657)-10386
BPSN Number	3-6399-62780-1
Hitch Element Number	62405484 760D - Project 6278, Task 627801
Investigation of	Research on Techniques for Integration of Active Elements Into Antennas and Antenna Structure
Subject of Report	The Transistorized Dipole Antennafier
Submitted by	W. J. Robertson and J. R. Copeland Antenna Laboratory Department of Electrical Engineering
Date	15 May 1963

ABSTRACT

The transistorized dipole antennafier is a novel integrated design uniting a resonant half-wave dipole antenna with a VHF transistor amplifier, and providing a simple, stable, compact, high-gain, low-noise, and inexpensive element suitable for use alone or in arrays.

The design philosophy is to match the resonant dipole directly into the transistor amplifier, eliminating the usual transmission lines and auxiliary tuned circuits. The result is a maximum bandwidth device, with higher gain and better noise performance than is possible in conventional operation using the same components separately.

Measurements have been made at 146 Mc on a transistorized dipole antennafier, with results of 12.5 db gain, less than 400°K effective noise temperature, bandwidth approximately equal to that of the dipole antenna itself, and no effect whatever on the radiation pattern of the dipole.

TABLE OF CONTENTS

	<u>Page</u>
I. INTRODUCTION	1
II. CONSTRUCTION	2
III. PERFORMANCE	4
IV. CONCLUSIONS	12

THE TRANSISTORIZED DIPOLE ANTENNAFIER

I. INTRODUCTION

The concept of integrating the design of an antenna and the circuitry with which it is intended to function is an evolutionary development which, when applied properly, is capable of providing improved system performance from fewer components in more compact form than the more conventional approach of separated design. A truly integrated design is one in which the antenna structure performs one or more circuit functions as well as its antenna function, and as a result of which no sharp division can be made which isolates antenna terminals from circuit terminals.

This duplication of functions in the antenna provides for the elimination of the usual matching and tuning elements between an antenna and its circuitry, and makes it convenient to incorporate some portions of the circuitry directly in the antenna structure, dispensing with transmission lines. As a result of the elimination of these circuit elements, RF losses are reduced, and in receiving applications, the operating noise temperature of the system is lowered.

The concept of integrated design has found application in transmitting, receiving, and echo-area control. Tunnel-diode oscillators and varactor harmonic-generators have been combined with dipoles to form two different kinds of integrated antenna-transmitters, or "antennamitters". Mixer-diode and tunnel-diode downconverters have been combined with broadband spiral antennas to form "antennaversers". Tunnel diodes, varactor parametric amplifiers, and transistor amplifiers have been combined with slots, spirals, dipoles, and arrays of dipoles to form various kinds of "antennafiers". In echo-area applications, switching diodes and varactor parametric amplifiers have been used with slot antennas to modulate, increase, and decrease the echo area of simple structures with slot antennas in them.

The purpose of this report is to describe a basic type of antennafier suitable for use alone or as elements of a receiving array. It is comprised of a resonant half-wavelength dipole antenna matched directly into a transistor RF amplifier, whose collector tank circuit provides the output of the integrated device.

II. CONSTRUCTION

Figure 1 shows two schematic diagrams illustrating transistorized dipole antennafiers. In (a) the transistor amplifier operated with fixed bias for maximum gain or minimum noise temperature, while in (b) the technique of "Forward AGC" has been used to provide a variable-gain antennafier for use in array applications or elsewhere if gain control is required. Figure 2 is a photograph of one such antennafier constructed for 146 Mc.

The active portion of the circuit is provided by the 2N1742 VHF transistor, some of whose characteristics are reproduced in Figs. 3-5. Operating unneutralized in the test circuit of Fig. 6 at 146 Mc, selected units provided up to 12.5 db gain with 4.0 noise figure, when optimized for best noise performance.

The antenna as shown in Fig. 1 was a resonant half-wavelength dipole with a gamma-match feed connected directly to the base of the transistor. The length of the gamma rod and resonating capacitance were both made adjustable for proper matching between the antenna and the transistor.

The output circuit was a parallel resonant tank, using the parasitic output capacitance of the transistor alone in order to achieve maximum bandwidth. The 50-ohm coaxial output was tapped part-way up from the cold end of this tank circuit for an impedance match. Other tap points could be used depending on whether greater or less bandwidth were desired in the output circuit at the expense of power gain, but the condition of matched impedances was chosen here. This choice resulted in half-power bandwidth of about 20 Mc which corresponds to an operating Q of about 7.5.

It will be shown later that at these bandwidth limits the antenna VSWR is so low that the total bandwidth is determined primarily by the operating Q of the collector circuit.

The $\lambda/4$ sleeve balun shown in Figs. 1 and 2 was required only to prevent antenna currents from flowing on the supporting structure of the dipole. This is a common fault of the gamma-match type of unbalanced feed arrangement, and if uncorrected can lead to asymmetrical radiation patterns of the dipole.

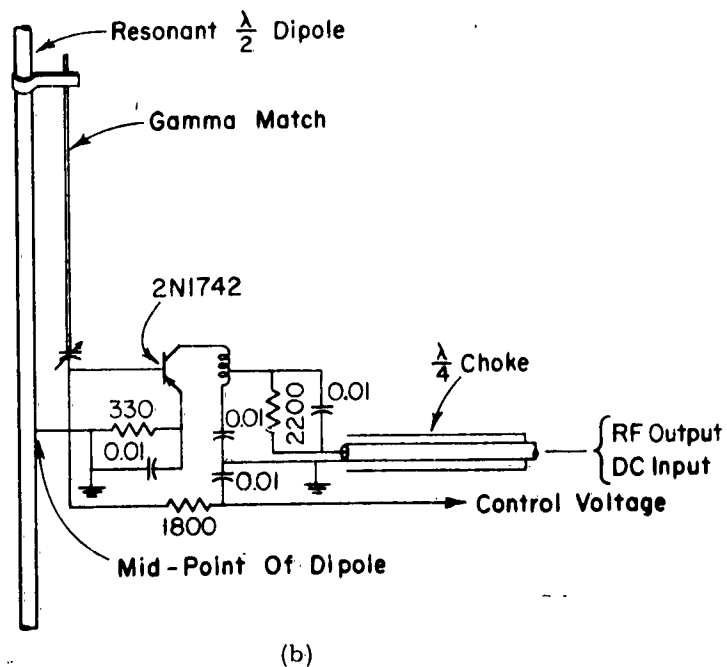
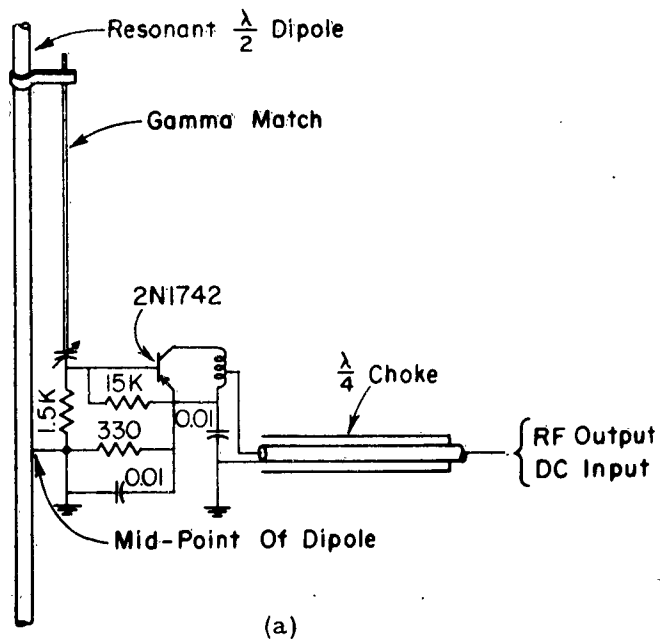


Fig. 1. The transistorized dipole antennafier.
(a) fixed gain, (b) controllable gain.

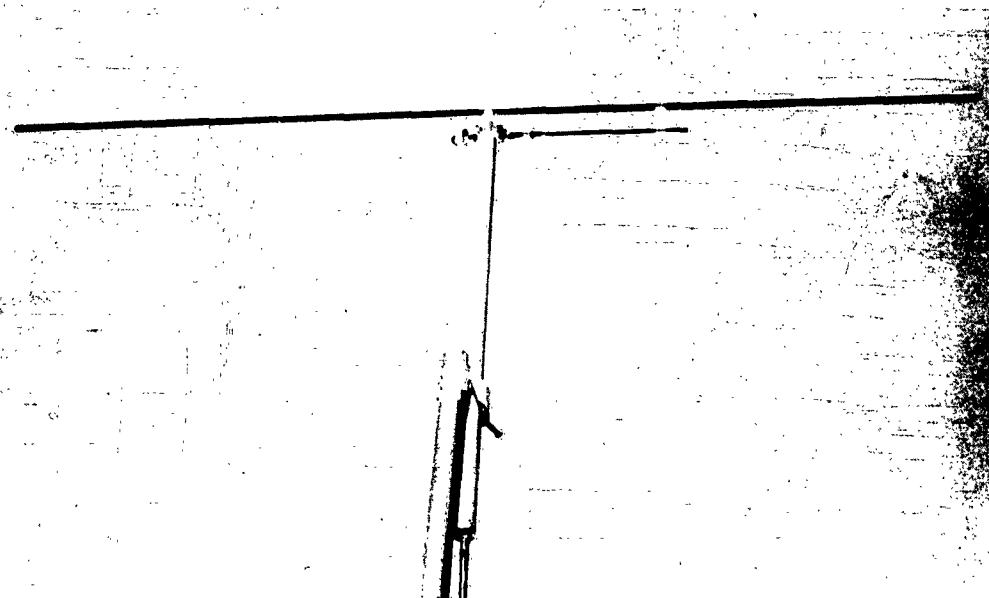


Fig. 2. A transistorized dipole antennafier for 146 mc.

The power supply used for the 2N1742 transistor amplifier was 12 V DC connected to the RF output line with an RF choke and DC block arrangement for isolation. A Microlab HW-02N monitor tee was more suited to this purpose.

III. PERFORMANCE

The parameters of interest in the specification of an antennafier are pattern, gain, and noise temperature. Patterns are easily measured and are interpreted in the same way as ordinary antenna patterns. Gain and noise temperature are not always easy to specify, however.

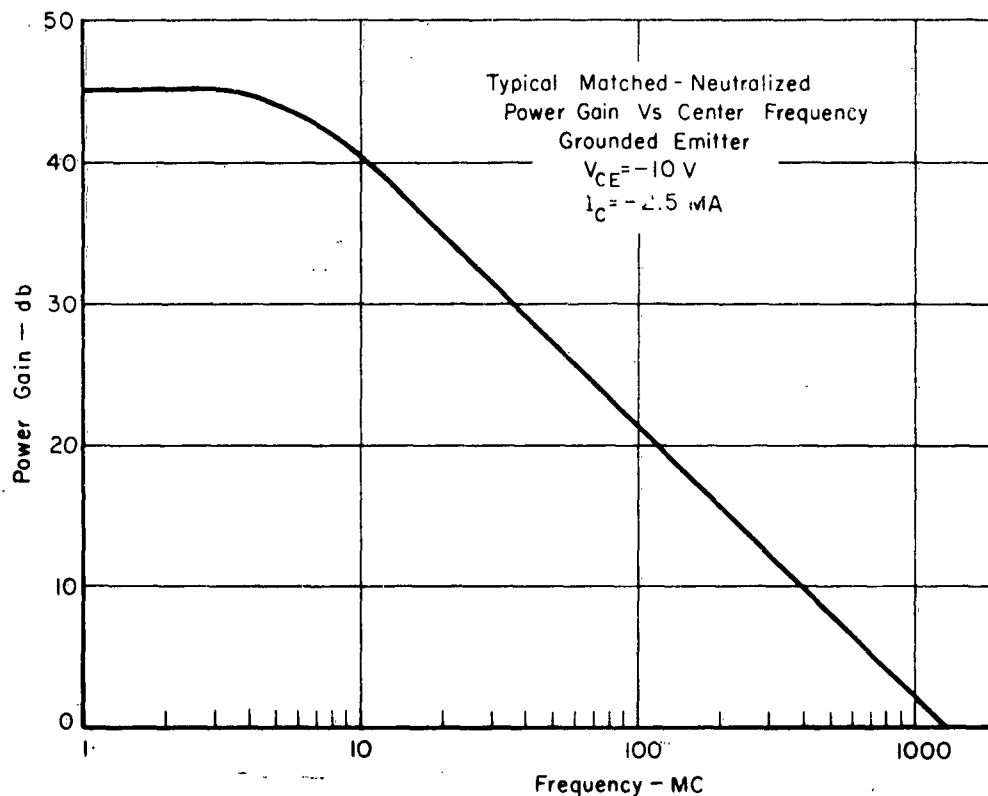


Fig. 3. Frequency capability of Philco 2N1742 transistor.

The gain of an antennafier is a function of both antenna gain and circuit gain, and is usually measured in terms of gain over a half-wave-length reference dipole. In simple examples such as the present case, the circuit gain can be more or less separated from the antenna gain, but in more complicated cases such as antennafier arrays, this separation becomes difficult and it is necessary to specify pattern and gain independently.

The noise temperature of an antennafier is even more difficult to measure. In conventional receiving systems, a direct measurement of noise temperature with respect to input terminals can be made on a receiver, and the effective noise contribution due to losses in the antenna and matching circuits can be measured and added. However, this approach is inapplicable to antennafiers generally, because no such set of input terminals to the receiver exists.

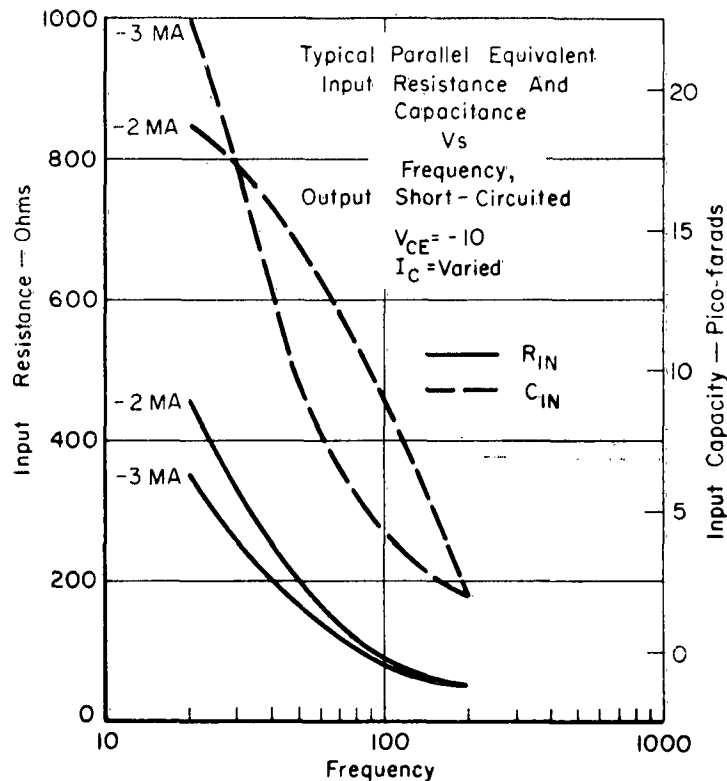


Fig. 4. Input characteristics of Philco 2N1742 transistor.

The only related parameter which can be measured easily is the field-strength sensitivity, defined as the power density of the electromagnetic wave in which the antenna-fier must be immersed in order to provide signal output equal to noise output:

$$FSS = \left[\frac{|\bar{P}_{inc}|}{S_{out} = N_{out}} \right]$$

where $\bar{P}_{inc}$ is the incident Poynting vector, S_{out} is signal power output, N_{out} is noise power output.

This measurement is then repeated using the reference dipole and a receiver of known noise temperature. The resulting ratio of field-strength sensitivities, along with the measured power gain of the antenna-fier and the effective antenna temperatures, is sufficient to determine the effective noise temperature of the antenna-fier:

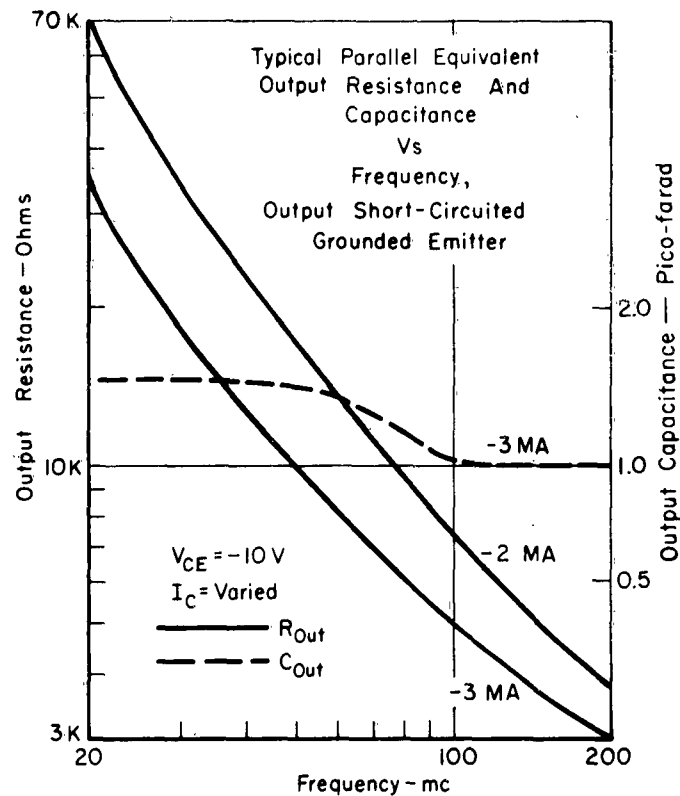


Fig. 5. Output characteristics of Philco 2N1742 transistor.

$$T_a = T_e(FSSR - 1) + T_r(FSSR - 1/G)$$

where

T_a = antenafier noise temperature

T_e = antenna noise temperature

T_r = noise temperature of the receiving
system following the antenafier

G = gain of the antenafier

FSSR = field-strength sensitivity ratio.

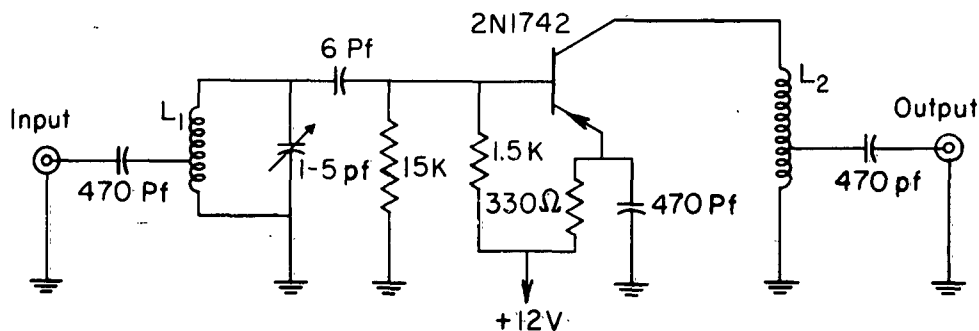


Fig. 6. 146-mc test circuit for 2N1742 transistor.

This type of measurement has been discussed in greater detail in Report 903-29.*

The gain of the transistorized dipole antenna-fier was measured as 12.5 db relative to the reference dipole. The pattern was identical to the reference dipole pattern as shown in Fig. 7. The 12.5-db gain difference was removed for better comparison of the two patterns. It was found that the controllable-gain antenna-fier of Fig. 1b could be adjusted over the range from 20 db loss to 12.5 db gain by variation of the control voltage.

* Final Engineering Report, Report 903-29, 31 December 1962, Antenna Laboratory, The Ohio State University Research Foundation; prepared under Contract AF 33(616)-6211, Aeronautical Systems Division, Wright-Patterson Air Force Base, Ohio.

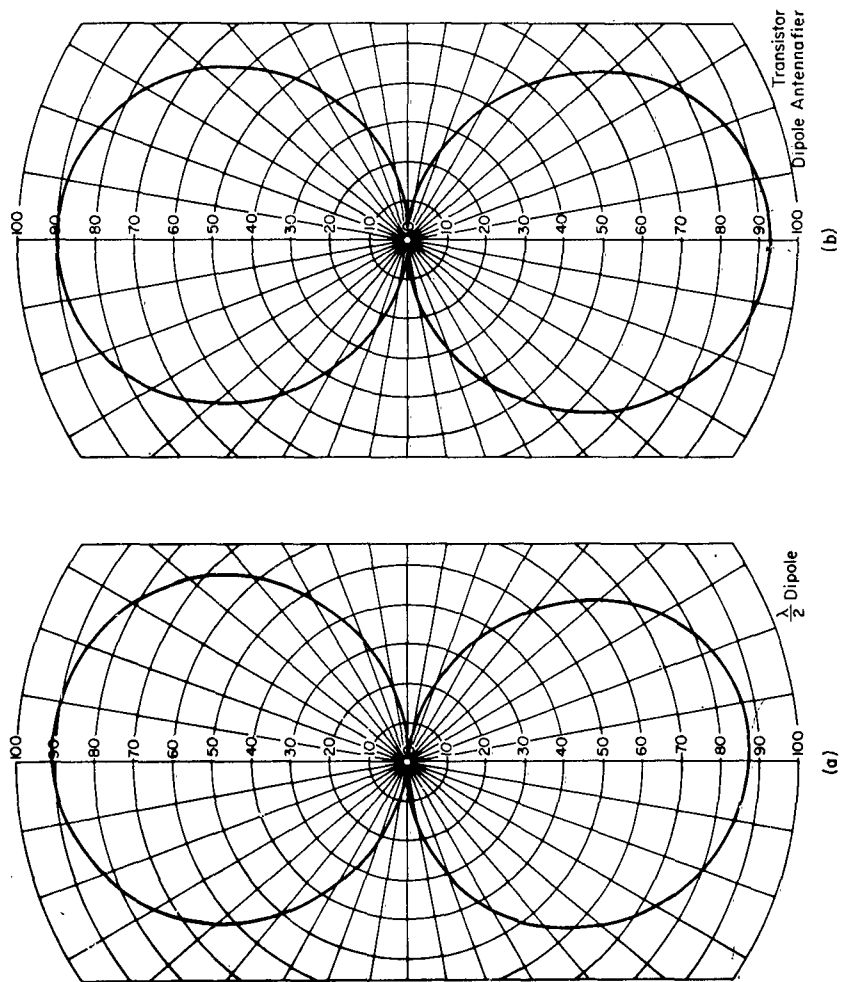


Fig. 7. Field patterns of transistorized dipole antennafier and reference dipole antenna.

Figure 8 shows the frequency response of the antennafier. This curve was obtained from comparison with the response of a reference dipole constructed to the same dimension as the antennafier, with an identical reference dipole used as the transmitting antenna. Figure 9 shows a VSWR curve of the two identical reference dipoles. In this way the frequency behavior of the transmitting antenna was known and accounted for in the frequency-response measurements.

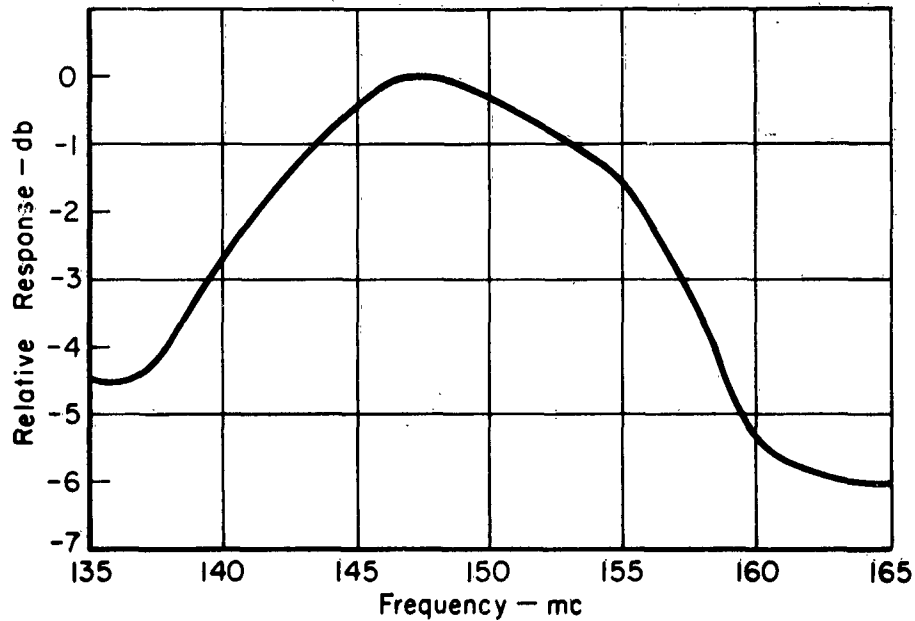


Fig. 8. Frequency response of the transistorized dipole antennafier.

As mentioned earlier, since the half-power bandwidth of the antennafier corresponds to VSWR limits of less than 2 on the antenna (a VSWR of 5.8 would correspond to a half-power mismatch), the bandwidth of the antennafier is determined principally by the choice of loaded Q in the collector circuit.

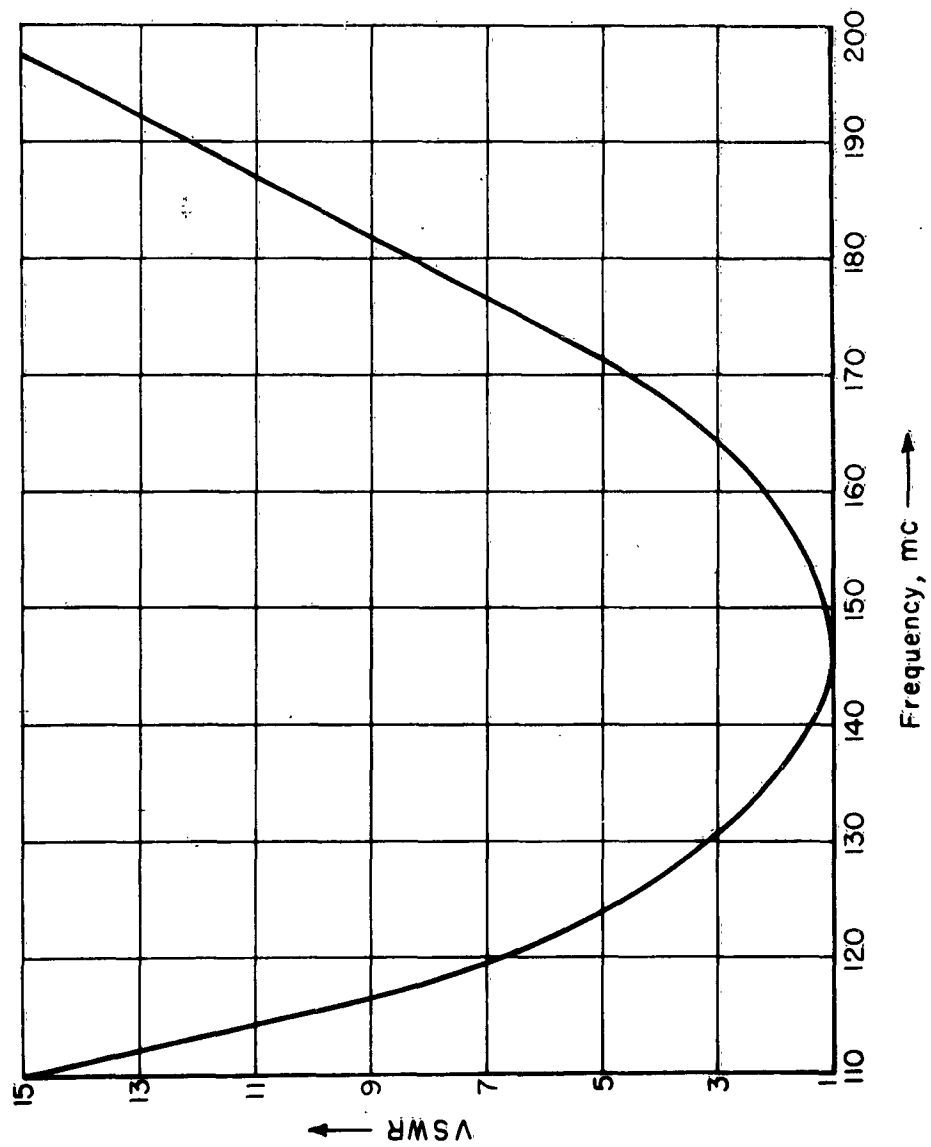


Fig. 9. VSWR of reference dipole antenna.

The spot noise temperature measured at 146 Mc by the method described above indicated about 350°K for the complete antennafier. This turns out to be slightly better than the approximately 425°K measured for the same transistor in the amplifier test circuit. This difference is believed to arise from the losses which inevitably occur in the input circuit of the amplifier, and which have been eliminated in the integrated design.

It is interesting to note that even at this frequency of 146 Mc, the noise temperature of the antennafier approximates the lowest level of cosmic noise temperature to be found in the coldest regions of the sky, and this element is therefore well-suited to VHF communications applications.

IV. CONCLUSIONS

The transistorized dipole antennafier is a practical and useful integrated design of a resonant half-wavelength dipole with a simple and completely stable VHF transistor amplifier. The device is compact, inexpensive, features high gain with low noise, and is suitable for use singly or in arrays with similar elements, all of whose gains may be controlled independently.

Measurements at 146 Mc indicate that the element has 12.5 db of power gain with respect to a reference dipole, 350°K effective noise temperature, bandwidth comparable to that of the dipole itself, and achieves this with no effect whatever on the radiation pattern of the dipole.

STANDARD AND ANTENNA DISTRIBUTION LIST
CONTRACT AF 33(657)-10386
PROJECT 1566

<u>Copies</u>		<u>Copies</u>	
20	ASTIA (TIP-DR) Arlington Hall Station Arlington 12, Virginia	1	ASD (ASRSA - Library) Wright-Patterson AFB, Ohio
8	ASD (ASRNC-33) Wright-Patterson AFB, Ohio	1	Director Air University Library Attn: 3T-AUL-59-3C Maxwell AFB, Alabama
1	ASD (ASAPRD-Dist) Wright-Patterson AFB, Ohio	1	Commanding Officer Diamond Ordnance Fuze Labs. Attn: 240 Washington 25, D. C.
1	ASD (ASNVEG) Wright-Patterson AFB, Ohio	1	NASA Attn: Librarian Langley Field, Virginia
1	ASD (ASNDCT/W. P. Compton) Wright-Patterson AFB, Ohio	1	NASA Goddard Space Flight Center Antenna Section, Code 523 Greenbelt, Maryland
1	AFCRL (CRRD) L. G. Hanscom Field Bedford, Mass.	1	Material Laboratory, Code 932 New York Naval Shipyard Brooklyn 1, New York
1	APGC (POTRI, Tech. Library) Eglin AFB, Florida	1	Commander U. S. Naval Air Test Center Attn: WST-54, Antenna Section Patuxent River, Maryland
1	AFMTC (Technical Library) Patrick AFB, Florida	1	U. S. Naval Ordnance Laboratory Attn: Technical Library Corona, California
1	AFMTC (Technical Library) Holloman AFB, New Mexico	1	RADC (RCLTM) Griffiss Air Force Base, N. Y.
1	BSD (BSEREP) Air Force Unit Post Office Los Angeles 45, California	1	RADC (RAALD) Griffiss AFB, New York
1	Director Ballistic Research Laboratory Attn: Ballistics Measurement Lab. Aberdeen Proving Ground, Md.		
1	Aerospace Technical Intelligence Center AFCIN-4 Bia Wright-Patterson AFB, Ohio		

1566 Distribution List - Page 2

Copies

1 Office of Chief Signal Officer
Engineering and Technical Div.
Attn: SIGNET-5
Washington 25, D. C.

1 Commanding Officer
U. S. Army Electronics
R & D Activity
SELMS-ED (Mr. E. R. Drydon, Jr.)
White Sands Missile Range,
New Mexico

1 801 Air Div. (DCTTD)
Lockbourne AFB, Ohio

1 Director
Surveillance Department
Evans Area
Attn: Technical Document Center
Belmar, New Jersey

1 Commander
Foreign Technology Division
Attn: TD-EE
Wright-Patterson AFB, Ohio

1 Commander
Research & Technology Div.
Attn: RTHR, Maj. J. Gregory
Bolling Air Force Base
Washington 25, D. C.

1 Director
U. S. Navy Electronics Lab.
Attn: Library
San Diego 52, California

1 Commanding Officer
USARDVL
Attn: SIGRA/SL-NAI
Ft. Monmouth, New Jersey

1 Commanding General
White Sands Missile Range
Attn: ORDBS-CM
Tech. Library RR-312
New Mexico

Copies

1 Aero Geo Astro
Attn: Security Officer
1200 Duke Street
Alexandria, Virginia

1 Airborne Instruments Lab., Inc.
Attn: Librarian (Antenna Section)
Walt Whitman Road
Melville, L. I., New York

1 American Systems, Inc.
Attn: Technical Library
Antenna Section
1625 East 126th Street
Hawthorne, California

1 Andrew Alford Consulting Engrs.
Attn: Librarian (Antenna Section)
299 Atlantic Avenue
Boston 10, Massachusetts

1 Bell Aircraft Corporation
Technical Information Libraries
Antenna Section
Buffalo 5, New York

1 Bell Telephone Labs., Inc.
Technical Information Libraries
Attn: Technical Report Librarian
Whippany, New Jersey

1 Bendix Radio Division
Bendix Aviation Corporation
Attn: Technical Library
For Dept. 462-4
Baltimore 4, Maryland

1 Bendix Corporation
Research Division
Attn: Technical Library
Antenna Section
P. O. Box 5115
Detroit 35, Michigan

1566 Distribution List - Page 3

Copies

1 Boeing Airplane Company
Aero Space Division
Attn: Technical Library
M/F Antenna & Radomes Unit
Seattle, Washington

1 Boeing Airplane Company
Attn: Technical Library
M/F Antenna Systems Staff Unit
Wichita, Kansas

1 Chance Vought Aircraft, Inc.
Thru: BUAER Representative
Attn: Technical Library
M/F Antenna Section
P.O. Box 5907
Dallas 22, Texas

1 Collins Radio Company
Attn: Engr. Library
Richardson, Texas

1 Convair
Ft. Worth Division
Attn: Technical Library
Antenna Section
Grants Lane
Fort Worth, Texas

1 Convair
Attn: Technical Library
Antenna Section
P.O. Box 1950
San Diego 12, California

1 Dalmo Victor Company
Attn: Technical Library
Antenna Section
1515 Industrial Way
Belmont, California

1 Dorne & Margolin, Inc.
Attn: Technical Library
Antenna Section
30 Sylvester Street
Westbury, L. I., New York

Copies

1 Douglas Aircraft Co., Inc.
Attn: Technical Library
Antenna Section
3000 Ocean Park Blvd.
Santa Monica, California

1 Dynatronics, Inc.
Box 2566
Attn: R. E. Webster
Orlando, Florida

1 Fairchild Engine & Airplane Corp.
Fairchild Aircraft & Missiles Div.
Attn: Technical Library
Antenna Section
Hagerstown 10, Maryland

1 Federal Aviation Agency
Hawaiian Region
P.O. Box 4009
Honolulu 12, Hawaii
Attn: Mr. N. Thompson
Chief, Systems Maintenance Br.

1 General Electric Company
Electronics Laboratory
Attn: Technical Library
Electronics Park
Syracuse, New York

1 University of Illinois
Antenna Laboratory
Attn: P. E. Mayes
Urbana, Illinois

1 General Electronics Lab., Inc.
Attn: Technical Library
Antenna Section
18 Ames Street
Cambridge 42, Massachusetts

1 Goodyear Aircraft Corporation
Attn: Technical Library
M/F Dept. 474
1210 Massillon Road
Akron 15, Ohio

1566 Distribution List - Page 4

Copies

- 1 Granger Associates
Attn: Technical Library
Antenna Section
974 Commercial Street
Palo Alto, California
- 1 The Hallicrafters Company
Attn: Technical Library
Antenna Section
4401 West Fifth Avenue
Chicago 24, Illinois
- 1 Hoffman Laboratories, Inc.
Attn: Technical Library
Antenna Section
3740 South Grand Avenue
Los Angeles, California
- 1 Hughes Aircraft Corporation
Attn: Technical Library
Antenna Section
Florence & Teale Streets
Culver City, California
- 1 ITT Laboratories
Federal Division
Antenna Section
Attn: Technical Library
3700 East Pontiac
Fort Wayne, Indiana
- 1 I-T-E Circuit Breaker Co.
Special Products Division
Attn: Research Library
601 East Erie Avenue
Philadelphia 34, Pennsylvania
- 1 ITT Laboratories
Attn: Technical Library
Antenna Section
500 Washington Avenue
Nutley 10, New Jersey

Copies

- 1 Lincoln Laboratories
MIT, Attn: Document Room
P. O. Box 73
Lexington 73, Massachusetts
- 1 Litton Industries
Attn: Technical Library
Antenna Section
4900 Calvert Road
College Park, Maryland
- 1 Lockheed MSD
Attn: Technical Library
M/F Dept. 58-40, Plt. 1, Bldg. 130
P. O. Box 504
Sunnyvale, California
- 1 The Martin Company
Attn: Technical Library
Antenna Section
Baltimore 3, Maryland
- 1 W. L. Maxson Corporation
Attn: Technical Library
Antenna Section
Great River, L. I., New York
- 1 McDonnell Aircraft Corp.
Attn: Technical Library
Antenna Section
Box 516
St. Louis 66, Missouri
- 1 Melpar, Inc.
Attn: Technical Library
Antenna Section
3000 Arlington Blvd.
Falls Church, Virginia
- 1 The Mitre Corporation
Attn: Technical Library
M/F Electronics Warfare Dept. D-21
Middlesex Turnpike
Bedford, Massachusetts

1566 Distribution List - Page 5

Copies

1 National Research Council
Attn: Microwave Section
Ottawa 2, Canada
Thru: Foreign Release Office
ASD (ASYF)

1 National Bureau of Standards
Department of Commerce
Attn: Dr. A. G. McNish
Washington 25, D.C.

1 North American Aviation, Inc.
Attn: Technical Library
M/F Engineering Dept.
4300 East Fifth Avenue
Columbus 16, Ohio

1 North American Aviation, Inc.
Attn: Technical Library
M/F Dept. 56
International Airport
Los Angeles, California

1 Northrop Aircraft, Inc.
NORAIR Division
Attn: Technical Library
M/F Dept. 2135
Hawthorne, California

1 Philco Corporation
Government & Industrial Div.
Attn: Technical Library
M/F Antenna Section
4700 Wissachickon Avenue
Philadelphia 44, Pennsylvania

1 Radioplane Company
Attn: Librarian
M/F Aerospace Laboratory
8000 Woodley Avenue
Van Nuys, California

Copies

1 Ramo-Wooldridge Corporation
Attn: Librarian, Antenna Section
8433 Falibrook Avenue
Canoga Park, California

1 Rand Corporation
Attn: Librarian, Antenna Section
1700 Main Street
Santa Monica, California

1 Rantec Corporation
Attn: Librarian, Antenna Section
23999 Ventura Boulevard
Calabasas, California

1 Raytheon Electronics Corporation
Attn: Librarian
Antenna Laboratory
1089 Washington Street
Newton, Massachusetts

1 Raytheon Electronics Corporation
Attn: Equipment Div. Librarian
P.O. Box 520
Waltham 54, Massachusetts

1 Republic Aviation Corporation
Applied Res. & Dev. Division
Attn: Librarian
Antenna Laboratory
Farmingdale, New York

1 Sanders Associates
Attn: Librarian
Antenna Laboratory
95 Canal Street
Nashua, New Hampshire

1 Sichak Associates
Attn: W. Sichak
518 Franklin Avenue
Nutley, New Jersey

1566 Distribution List - Page 6

Copies

1 The S. T. L. Technical Library
Document Acquisition
Space Technology Lab., Inc.
P. O. Box 95001
Los Angeles 45, California

1 Sperry Gyroscope Company
Attn: Librarian
Antenna Laboratory
Great Neck, L. I., New York

1 Stanford Research Institute
Attn: Librarian
Antenna Laboratory
Menlo Park, California

1 Sylvania Electronics System
Attn: Librarian
M/F Antenna & Microwave Lab.
100 First Street
Waltham 54, Massachusetts

1 Stanford Electronic Laboratory
Attn: Librarian (Antenna Lab)
Stanford, California

1 Technical Research Group
Attn: Librarian
Antenna Section
2 Aerial Way
Syosset, New York

1 Ling Temco Aircraft Corporation
Temco Aircraft Division
Attn: Librarian
Antenna Laboratory
Garland, Texas

1 A. S. Thomas, Inc.
Attn: Librarian
Antenna Laboratory
355 Providence Highway
Westwood, Massachusetts

Copies

1 Westinghouse Electric Corp.
Air Arms Division
Attn: Librarian, Antenna Lab.
P. O. Box 746
Baltimore 3, Maryland

1 University of Illinois
Attn: Technical Library
Dept. of Elec. Engr.
Urbana, Illinois

1 University of Michigan
Aeronautical Research Lab.
Willow Run
Ypsilanti, Michigan

1 U. S. Naval Research Laboratory
Attn: Code 5250
Dr. A. E. Marston
Washington 25, D. C.

1 American Electronic Labs.
Box 552 (Antenna Section)
Lansdale, Pennsylvania

1 Sylvania Electronic Systems
Attn: Librarian (M/F Antenna Lab)
P. O. Box 188
Mountain View, California

1 Aerospace Corporation
2400 East El Segundo Blvd.
El Segundo, California

1 Electronic Communications, Inc.
Research Division
Attn: Technical Library
1830 York Road
Timonium, Maryland

Copies

1 Georgia Institute of Technology
Engineering Experiment Station
Attn: Technical Library
M/F Electronics Division
Atlanta 13, Georgia

1 Johns Hopkins University
Applied Physics Laboratory
8621 Georgia Avenue
Silver Springs, Maryland

1 University of Michigan
Cooley Electronics Laboratory
Attn: Technical Library M/F
Dept. of Electronic Engineering
Ann Arbor, Michigan

1 Raytheon Company
Missile and Space Division
Attn: Technical Library
Antenna Section
P. O. Box 636
Santa Barbara, California

1 Radio Corporation of America
RCA Laboratories Division
Attn: Technical Library
M/F Antenna Section)
Princeton, New Jersey

1 Sperry Microwave Electronics Co.
Attn: Librarian (Antenna Lab)
P. O. Box 1828
Clearwater, Florida

1 Texas Instruments, Inc.
Attn: Librarian (Antenna Lab)
600 Lemmon Avenue
Dallas 9, Texas

1 Philco Corporation
Lansdale Division
Attn: Mr. F. Mayock
Church Road
Lansdale, Pennsylvania

Copies

1 Grumman Aircraft Engr. Corp.
Attn: Technical Library
M/F Avionics Engineering
Bethpage, New York

1 General Precision Lab.
Div. of General Precision, Inc.
Attn: Technical Library
Antenna Section
63 Bedford Road
Pleasantville, New York

1 New Mexico State University
Attn: Technical Library
M/F Antenna Department
University Park, New Mexico

1 Radio Corporation of America
Missile & Surface Radio Div.
Attn: H. J. Schrader
Moorestown, New Jersey

1 Radiation, Inc.
Attn: Technical Library
M/F Antenna Section
Drawer 37
Melbourne, Florida

1 H. R. B. Singer Corporation
Attn: Librarian (Antenna Lab)
State College, Pennsylvania

1 Sylvania Electronic System
Attn: Librarian
Mountain View Operations
P. O. Box 188
Mountain View, California

1 Wheeler Laboratories
Attn: Librarian (Antenna Lab)
Box 561
Smithtown, New York

1566 Distribution List - Page 8

Copies

1 Antenna Systems, Inc.
Manager Documentation
Grenier Field
Manchester, New Hampshire

1 University of Michigan Research
Institute
Electronic Defense Group
Attn: Dr. J. A. Lyons
Ann Arbor, Michigan

1 University of Dayton
Research Institute
Attn: Prof. D. Hanneman
300 College Park
Dayton, Ohio

1 Technische Hochschule
Attn: H. H. Meinke
Munich, Germany

1 Teledyne Systems, Inc.
Attn: Technical Library
Antenna Section
1625 East 126th Street
Hawthorne, California

1 Goodyear Aircraft Corporation
Antenna Department
Litchfield Park
Phoenix, Arizona

1 General Electric Company
Light Military Electronics Dept.
French Road
Utica, New York

1 General Electric Company
General Engineering Laboratory
Bldg. 371, Room 478
Schenectady, New York

Copies

1 Motorola, Inc.
Western Military Electron
P. O. Box 1417
Scottsdale, Arizona

1 Philco Corporation
Antenna Section
3875 Fabian Way
Palo Alto, California

1 Motorola, Inc.
Military Electronics Divi
Attn: Antenna Section
1450 North Cicero Avenue
Chicago 51, Illinois