

UNCLASSIFIED

AD 409 173

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

AD No. ~~409~~ 173
DDC FILE COPY

(5) 234 300

N-63-4-2


(1)

Office of Naval Research

Contract Nonr-1866 (32)

NR-371-016

TABLES FOR THE STEP-BY-STEP INTEGRATION
OF ORDINARY DIFFERENTIAL EQUATIONS
OF THE FIRST ORDER



scale 2

409 173

By

William F. Pickard

March 25, 1963

Technical Report No. 406

DDC

1963

100 A

Cruft Laboratory
Harvard University
Cambridge, Massachusetts

\$1.10

(4) 1.10

(5) 234 300 7-9 NA

Office of Naval Research

(15) Contract Nonr-1866(32) Grant 21869

(16) Proj. NR #371 #016

(6)

TABLES FOR THE STEP-BY-STEP INTEGRATION OF ORDINARY
DIFFERENTIAL EQUATIONS OF THE FIRST ORDER,

by

(10)

William F. Pickard,

(11)

March 25, 1963,

(12) 7p. (13) NA

17-19 NA

20 U

(21) NA

For

The research reported in this document was supported by Grant 21869 of the National Science Foundation. Publication was made possible through support extended to Cruft Laboratory, Harvard University, by the Navy Department (Office of Naval Research), the Signal Corps of the U. S. Army, and the U. S. Air Force under ONR Contract Nonr-1866(32). Reproduction in whole or in part is permitted for any purpose of the United States Government.

(14)

Technical ^{Report} No. 406

Cruft Laboratory

Harvard University

Cambridge, Massachusetts

TR406

TABLES FOR THE STEP-BY-STEP INTEGRATION OF ORDINARY
DIFFERENTIAL EQUATIONS OF THE FIRST ORDER

by

William F. Pickard

Division of Engineering and Applied Physics
Harvard University, Cambridge, Massachusetts

ABSTRACT

A study is made of the step-by-step integration of ordinary differential equations of the first order by means of formulas obtained from the Gregory-Newton backward interpolating formula. Tables of relevant constants are presented.

Consider the ordinary differential equation of the first order

$$y' = f(y, x) \quad (1)$$

which is to be integrated step-by-step over $x = a(h)b$. A natural method for accomplishing this integration is a predictor-corrector process based upon a suitable finite difference interpolating formula.

Let x_0 be a tabular point within (a, b) and assume that y is known at the points $x_{-j} = x_0 - jh$ ($j = 0, 1, \dots, \frac{x_0 - a}{h}$). One can then write for y' the approximation to it which is provided by the Gregory-Newton backward interpolating formula

$$y' = \sum_{j=0}^J \frac{1}{j!} (u+j-1)^{[j]} \Delta^j f_{-j} + h^{J+1} \frac{1}{(J+1)!} (u+J)^{[J+1]} (J+1)(\xi) \quad (2)$$

where $u = (x - x_0)/h$, $\Delta^j f_{-j}$ is the j^{th} forward difference of y' about x_{-j} , $x_{-J} \leq \xi \leq x_0$, and $(u-\ell)^{[j]}$ is the factorial polynomial

$$(u-\ell)^{[j]} = (u-\ell)(u-\ell-1) \cdots (u-\ell-j+1) \quad (3)$$

which possesses the expansion

$$(u-\ell)^{[j]} = \sum_{k=0}^j {}_{\ell}S_k^j u^{j-k} \quad (3')$$

where the ${}_{\ell}S_k^j$ are the generalized Stirling numbers of the first kind [1].

The formula (2) can be integrated in two fashions. In the first it is assumed that $y_0, y_{-1}, \dots, y_{-J}$ are accurately known and that a prediction of $y_1 = y(x_1)$ is desired:

$$y(x_1) = y_0 + h \sum_{j=0}^J \beta_j \Delta^j f_{-j} + E_J \quad \text{PREDICTOR} \quad (4)$$

where the error E_J is given by

$$|E_J| \leq h^{J+2} \beta_{J+1} |f^{(J+1)}|_{\max} \quad (5)$$

and

$$\beta_j = \frac{1}{j!} \int_0^1 (u+j-1)^{[j]} du \quad (6a)$$

$$= \frac{1}{j} \sum_{p=0}^j \frac{1}{j+1-p} \frac{S_p^j}{-(j-1)^p} \quad (6b)$$

$$= \frac{S_j}{L(j)j!} \quad (6c)$$

where $L(j)$ is the least common denominator of $1/1, 1/2, \dots, 1/(j+1)$.

In the second method it is assumed that $y_{-1}, \dots, y_{-J}$ are accurately known, that y_0 is approximately known, and that a corrected value of y_0 is desired:

$$y(x_0) = y_{-1} + \sum_{j=0}^J \beta_j^* \Delta^j f_{-j} + E_J^* \quad \text{CORRECTOR} \quad (7)$$

where the error E_J^* is given by

$$|E_J^*| \leq h^{J+2} |\beta_{J+1}^*| |f^{(J+1)}|_{\max} \quad (8)$$

Table I
 N_j , N_j^* , and $L(j)j!$

$j \rightarrow$	0	1	2	3	4	5	6	7	8	9	10
N_j	1	1	5	27	502	2 375	-95 435	1 287 965	29 960 476	262 426 878	28 184 365 650
N_j^*	1	-1	-1	-3	-38	-135	-4 315	-48 125	-950 684	-7 217 406	-682 590 930
$L(j)j!$	1	2	12	72	1 440	7 200	302 400	4 233 600	101 606 400	914 457 600	100 590 336 000

and

$$\beta_j^* = \frac{1}{j!} \int_{-1}^0 (u+j-1)^{[j]} du \quad (9a)$$

$$= \frac{1}{j!} \sum_{p=0}^j \frac{(-1)^{j-p}}{j+1-p} -(j-1) S_p^j \quad (9b)$$

$$= \frac{N_j^*}{L(j)j!} \quad (9c)$$

This corrected value of y_0 can itself be used in (7) to obtain what is presumably a still better value of y_0 , and this process can be repeated indefinitely until it converges to a final value or, in bad cases, is seen to be divergent. The use of (4) to obtain an initial estimate and the repeated use of (7) to improve this value constitutes a well-known predictor-corrector process.

The quantities β_j and β_j^* , as defined by (6a) and (9a), respectively, have been described by Collatz [2] and tabulated by him for $j = 0(1)6$. The increasing use of digital machines - often in double precision - for the integration of differential equations has made a somewhat extended table of these coefficients desirable and the existence now [1] of extensive tables of the S_k^j has made possible the simple computation from (6b) and (9b). Table I presents the results of such an extension; the table entries were checked using the recursion relation [2]

$$\beta_{j+1} = \beta_j + \beta_{j+1}^* \quad (10)$$

Figure I presents a graph of these coefficients. The β_j can be seen to fall off slowly and can be shown, from (6a), to satisfy the inequality

$$\frac{j}{j+1} \leq \frac{\beta_{j+1}}{\beta_j} < 1 \quad j \geq 0 \quad (11a)$$

which implies that their decline is very slow indeed. The β_j^* can be seen to fall off somewhat faster; this is to be expected since, from (6a) and (9a),

$$|\beta_j^*| < \frac{\beta_j}{j-1} \quad j \geq 2 \quad (11b)$$

These data point up the intrinsic superiorities of corrector formulas over predictor formulas: (i) that, since $|\beta_j^*| < |\beta_j|$ the series (7) converges faster than the series (4), and (ii) that, since the β_j^* decay much faster than the β_j , the buildup of computational error in the taking of successive differences will, for a given number of terms in the interpolating series, have much less effect on the final answer when a corrector formula is used.

In actual practice the calculation of the several differences is often not carried out. Instead, the differences are expanded as

$$\Delta^j f_{-j} = \sum_{p=0}^j \gamma_{pj} f_{-p} \quad (12)$$

and (4) rewritten as

$$y(x_1) = y_0 + h \sum_{j=0}^J \sum_{p=0}^j \gamma_{pj} \beta_j f_{-p} + E_J \quad (13a)$$

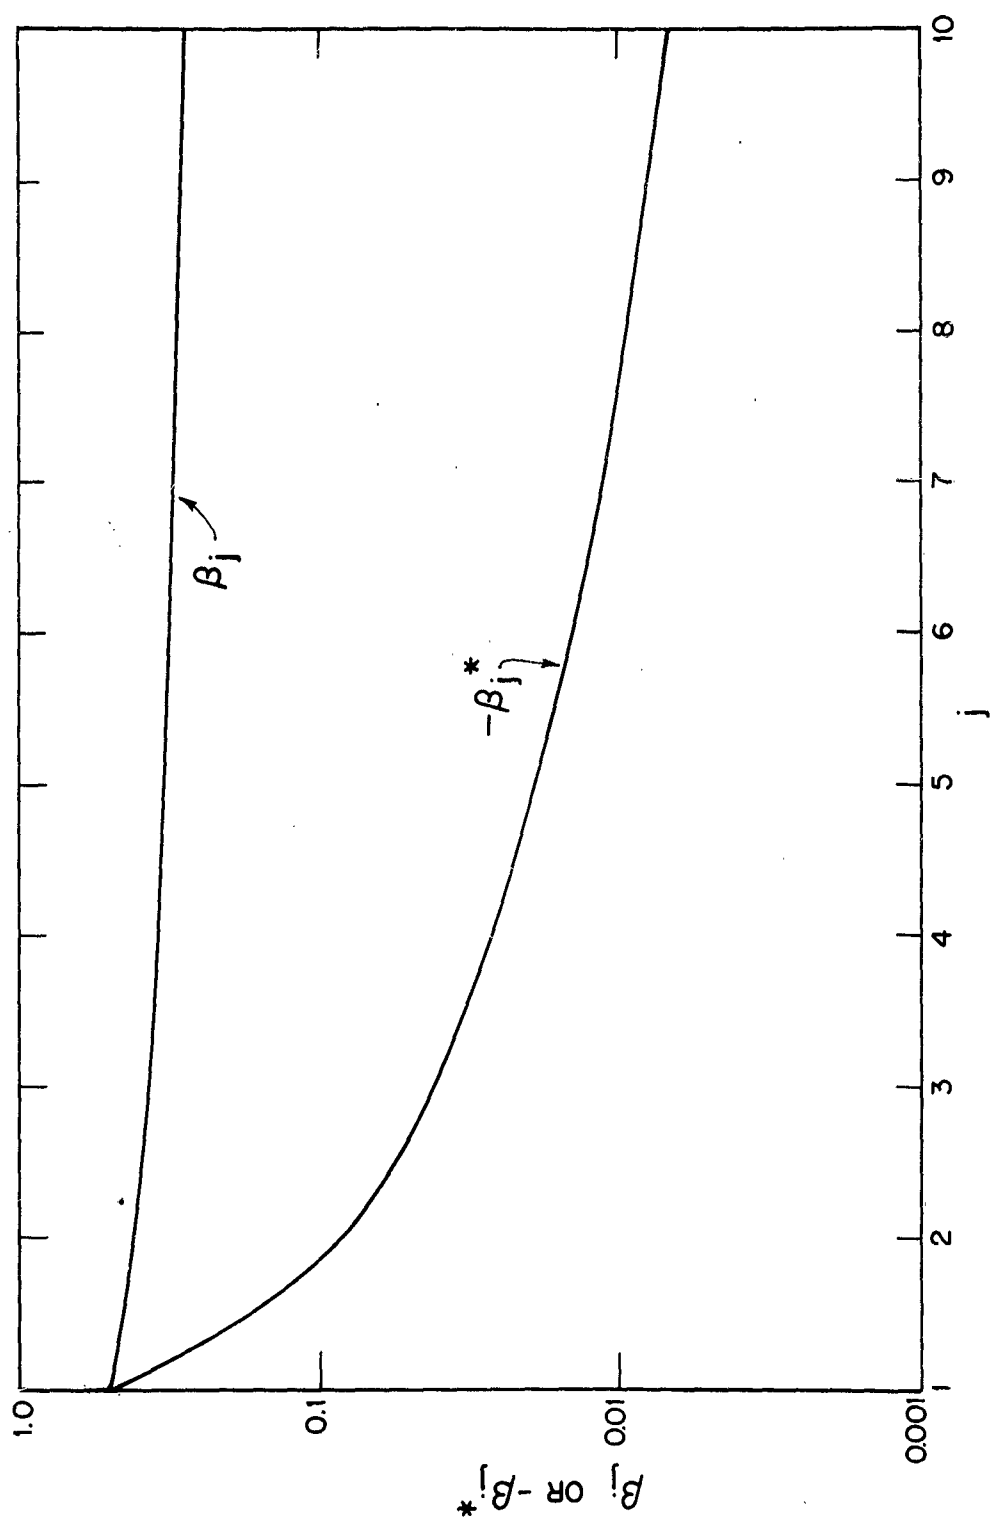


FIGURE 1

J	p'	0	1	2	3	4	5	6	7	8	9	10
1		1	3	-1								
2		23	-16									
3		165	-177	111								
4		3 802	-5 548		-27							
5		21 385	-39 615	5 232		502						
6		993 605	-2 236 440	49 910	-36 490		14 385					
7		15 198 435	-40 325 915	3 527 745	-3 441 280	2 035 695	-2 375					
8		394 722 916	-1 207 505 768	76 435 695	-93 256 695	73 578 505	-672 360	95 435				
9		3 814 933 122	-13 229 393 814	2 673 350 008	-3 915 947 336	3 863 117 440	-2 552 833 976	10 351 845				
10		447 827 009 070	-1 737 076 976 040	4 954 123 399 050	-57 287 383 776	67 833 843 368	-56 041 292 412	1 087 337 608	-270 594 968	29 960 476		
					-9 683 7336 093 360	13 380 439 581 180	-13 267 002 309 120	31 829 896 224	-11 882 722 320	2 631 186 186	-262 426 878	
								9 420 005 371 140	-4 689 223 333 200	1 557 759 934 710	-310 710 613 080	26 184 365 650

J	P	0	1	2	3	4	5	6	7	8	9	10
0	0	1										
1	1	1										
2	5	8										
3	27	57		-1								
4	902	1 292	3	-15								
5	2 375	7 135	212									
6	95 435	325 560	2 410	-38								
7	1 287 965	4 894 715	187 520	-865	135							
8	29 960 476	125 078 632	4 309 655	-101 055	31 560	-4 315						
9	262 426 878	1 190 664 342	156 670 024	-3 099 145	1 452 465	-397 285						
10	28 184 365 650	137 798 986 920	2 016 292 320	-128 928 632	88 097 464	-36 153 992	48 125					
			2 016 292 320	-1 420 184 304	1 702 270 332	-931 648 032	8 760 472	-950 685				
			303 703 066 800	-186 936 865 290	359 262 650 880	-245 025 378 820	338 670 864	-73 512 810	7 217 406			
				-382 895 428 860			119 164 706 640	-38 803 000 950	7 619 823 940	682 590 930		

$$= y_0 + h \sum_{p=0}^J a_p(J) f_{-p} + E_J \quad (13b)$$

$$= y_0 + \frac{h}{L(J)J!} \sum_{p=0}^J \delta_p(J) f_{-p} + E_J \quad (13c)$$

while (7) can be rewritten as

$$y(x_0) = y_{-1} + h \sum_{j=0}^J \sum_{p=0}^j \gamma_{pj} \beta_j^* f_{-p} + E_J^* \quad (14a)$$

$$= y_{-1} + h \sum_{p=0}^J a_p^*(J) f_{-p} + E_J^* \quad (14b)$$

$$= y_{-1} + \frac{h}{L(J)J!} \sum_{p=0}^J \delta_p^*(J) f_{-p} + E_J^* \quad (14c)$$

The calculation of the next value of y can then be accomplished directly from (13c) or (14c) and the labor of maintaining a difference table thereby eliminated. Tables of $\delta_p(J)$ and $\delta_p^*(J)$ have been computed for $J = 0(1)10$ and $p = 0(1)J$ and are given in Tables II and III, respectively; they represent a considerable extension over the existing tables [2, 3] which go at most to $J = 5^*$. The values of $\delta_p(J)$ and $\delta_p^*(J)$ were checked by the relations [2]

 *The values of $a_p(5)$ given in Reference 3 are believed to be in error.

$$1 = \sum_{p=0}^J a_p(J) \quad (15a)$$

$$1 = \sum_{p=0}^J a_p^*(J) \quad (15b)$$

and by having key portions of the computations individually repeated.

The selection of a predictor-corrector pair for a specific problem is by no means simple, it being necessary to choose J and h with care to minimize the effects of roundoff and truncation error. However, for modern digital machines operated in double precision, $J = 10$ will probably be as large as is profitable since by this point the computing error generated in calculating the $\Delta^i f_{-j}$ will be growing much faster than the β_j^* will be decreasing, and the total error due to this cause will normally be at least as important as the truncation error E_J^* . Finally, for suitable $f(y, x)$, it may be desirable to suspend the common practice of using a low order predictor to obtain an estimate of the next point which can then be improved using a high order corrector; the existence of high order predictors makes the initial use of a high order predictor formula and the suspension of corrector iterations seem attractive where the superior roundoff suppressing properties of a corrector formula are not essential.

REFERENCES

1. W. F. Pickard, "Tables of the Generalized Stirling Numbers of the First Kind," Cruft Laboratory Technical Report No. 404, Harvard University, Cambridge, 1963.
2. L. Collatz, "The Numerical Treatment of Differential Equations," Third Edition, Springer-Verlag, Berlin, 1960.
3. P. Henrici, "Discrete Variable Methods in Ordinary Differential Equations," John Wiley and Sons, Inc., New York, 1962.

Activity Supply Officer
Building 2504, Charles Wood Area
Fort Monmouth, New Jersey (50)
Attn: Director of Research

Commanding Officer
Office of Naval Research
Navy (OS, Box 3) (25)
Fleet Post Office
New York, New York

Armed Services
Technical Information Agency
Arlington Hall Station (10)
Arlington 15, Virginia
Attn: TIPDR

The Director
Naval Research Laboratory
Washington 25, D. C. (9)
Attn: Technical Information Office

Commander, AF CRL
AFRD, AFDC, CFP C
Laurence G. Hanscom Field (4)
Bedford, Massachusetts
Attn: Electronics Research Directorate

Commanding General
Air Research and Development Command
P. O. Box 1395 (3)
Baltimore 7, Maryland
Attn: ADTRAP

Chief of Naval Research
Department of the Navy (2)
Washington 25, D. C.
Attn: Dr. A. Shostak, Code 427

Chief of Naval Research
Department of the Navy (2)
Washington 25, D. C.
Attn: Code 427

Commanding Officer
Office of Naval Research
495 Summer Street (2)
Boston, Massachusetts

Chief, Bureau of Ships
Department of the Navy (2)
Washington 25, D. C.
Attn: Code 810

Director, Air University
Library (2)
Maxwell Air Force Base
Alabama

Chief of Naval Research
Department of the Navy
Washington 25, D. C.
Attn: Code 421

Commanding Officer
Office of Naval Research
495 Summer Street
Boston, Massachusetts

Commanding Officer
Office of Naval Research
John Carter Library Building
86 East Randolph Street
Chicago 1, Illinois

Commanding Officer
Office of Naval Research
346 Broadway
New York 15, New York

Commanding Officer
Office of Naval Research
1000 East Grand Street
Pasadena, California

Commanding Officer
Office of Naval Research
1000 Geary Street
San Francisco 9, California

Head, Document Section
Technical Information Division
Naval Research Laboratory
Washington 25, D. C.

Martin A. Garavito
Magnum Branch, Code 6450
Solid State Division
Naval Research Laboratory
Washington 25, D. C.

Commanding Officer
U. S. N. Air Development Center
Johnsville, Pennsylvania
Attn: NADC Library

Commander
U. S. N. Air Development Center
Johnsville, Pennsylvania
Attn: AAGC

Chief, Bureau of Aeronautics
Department of the Navy
Washington 25, D. C.
Attn: EL-1

Engineering Librarian
Convair
San Diego 12, California

Dr. John E. Pippin
Applied Physics and Ferrite Devices
Sperry Microwave Electronics Co.
P. O. Box 1828
Clearwater, Florida

Engineering Librarian
Sperry Microwave Electronics Co.
Clearwater, Florida

Dr. Lajos Rinal
Research Division
Raytheon Company
Waltham 54, Massachusetts

Elizabeth Weaks, Librarian
Raytheon Company
28 Bay Street
Waltham 54, Massachusetts

Report Librarian
Sylvania Electric Products Inc.
Electronic Systems Division
100 First Avenue
Waltham, Massachusetts

Document Control Center
Wayland Library
Raytheon Manufacturing Co.
Wayland, Massachusetts

J. E. Goldman
Scientific Laboratory
Ford Motor Company
Engineering Staff
P. O. Box 2055
Dearborn, Michigan

Charles C. H. Tang
Bell Telephone Labs.
Murray Hill, New Jersey

Librarian
RCA Laboratories
Princeton, New Jersey

Dr. A. Amth
RCA
Princeton, New Jersey

Commander (2)
U. S. Naval Electronics Lab.
San Diego, California

Commanding General, RCRW
Rome Air Development Center
Griffiss Air Force Base (2)
Rome, New York

Commanding General
Air Research and Development Command
P. O. Box 1395 (2)
Baltimore, Maryland
Attn: RDDDE

Commander
Air Force Cambridge Research Lab.
Laurence G. Hanscom Field (2)
Bedford, Massachusetts
Attn: CROTLA

Commander
Wright Air Development Center
Wright Patterson Air Force Base
Ohio
Attn: WCLRA Library

National Security Agency
Physical Sciences Division (2)
Fort George Meade, Maryland
Attn: Dr. Alvin Mackler

Associate Prof. A. Kaprielian
Department of Electrical Engineering
University of Southern California
University Park
Los Angeles 7, California

Assistant Secretary of Defense
(Research and Development)
Research and Development Board
Department of Defense
Washington 25, D. C.

Chief of Naval Operations
Department of the Navy
Washington 25, D. C.
Attn: Op-10

Chief of Naval Operations
Department of the Navy
Washington 25, D. C.
Attn: Op-32

Chief of Naval Operations
Department of the Navy
Washington 25, D. C.
Attn: Op-413

Chief, Bureau of Aeronautics
Department of the Navy
Washington 25, D. C.
Attn: EL-4

Technical Library
U. S. Naval Proving Ground
Dahlgren, Virginia

Director
Naval Ordnance Laboratory
White Oak, Maryland

Librarian
U. S. Naval Post Graduate School
Monterey, California

Air Force Office of Scientific Research
Air Research and Development Command
Washington 25, D. C.
Attn: SRY, Physics Division

Commanding General
Rome Air Development Center
Griffiss Air Force Base
Rome, New York
Attn: RCHEC-4C

Commanding General
Rome Air Development Center
Griffiss Air Force Base
Rome, New York
Attn: RCH

Commander
Air Force Cambridge Research Center
230 Albany Street
Cambridge 39, Massachusetts
Attn: CRZ1

Commander
Air Force Cambridge Research Center
230 Albany Street
Cambridge 39, Massachusetts
Attn: CRZM

AF Cambridge Research Laboratories
Laurence G. Hanscom Field
Bedford, Massachusetts
Attn: Dr. Hollingsworth

Commander
Wright Air Development Center
Wright Patterson Air Force Base
Ohio
Attn: WCRB

Sandia Corporation
Org. 1424, Sandia Base
Albuquerque, New Mexico
Attn: Dr. C. W. Harrison, Jr.

Sandia Corporation
Sandia Base
Albuquerque, New Mexico
Attn: Library Division 1922-1

Mr. Robert Turner
General Electric Company
Advanced Electronics Center
Cornell University
Ithaca, New York

Library
Airborne Instruments Lab.
Walt Whitman Road
Melville, Long Island, New York

Secretary, Working Group
Semiconductor Devices
345 Broadway, 8th Floor
New York 15, New York
Attn: AGCT

Metals Research Laboratories
Electro Metallurgical Company
Box 580, Niagara Falls, New York
Attn: Mr. R. J. Gladieux

Librarian
General Electric Research Lab.
P. O. Box 1088
Schenectady, New York

Westinghouse Electric Corp.
Research Laboratories
Brush Road, Churchill Boro.
Pittsburgh 35, Pennsylvania

Prof. O. E. N. Rydbeck
P. O. Box 266
Salmon, New Jersey

Dr. Melvin W. Azarov
611 East Genesee Street
Pawtucket, New York

Library
Airborne Instruments
Minneapolis, New York

Commander
Wright Air Development Center
Wright Patterson Air Force Base
Ohio
Attn: WCRH

Commandant
Air Force Institute of Technology
Wright Patterson Air Force Base
Ohio
Attn: MGLI Library

AF Special Weapons Center
Kirtland Air Force Base
Albuquerque, New Mexico
Attn: SWOI

Headquarters
AF Missile Test Center
MU-135, ADRC
Patrick Air Force Base
Florida

U. S. Coast Guard
1300 E. Street, N. W.
Washington 25, D. C.
Attn: EEE

M. A. Krivanich, Chief
Systems Component Branch
Electronic Warfare Division
Signal Corps Agency
White Sands Proving Ground
New Mexico

Mr. A. D. Bedrosian
Signal Corps Liaison Office
Mass. Institute of Technology
Building 16, Room 151
Cambridge 39, Massachusetts

Chief, European Office
ABDC Command
Shall Building
40 Rue Ravenstein
Brussels, Belgium

Dr. J. Anton IJlman
Ordnance Materials Res. Office
Watertown Arsenal
Watertown, Massachusetts

Acquisitions Officer
ASTIA Reference Center
Arlington Hall Station
Arlington 12, Virginia

Stanford Research Institute
Documents Center
Menlo Park, California
Attn: Mary Lou Fields

Dr. C. H. Pappas
Dept. of Electrical Engineering
California Institute of Technology
Pasadena, California

Stanford Electronics Lab.
Stanford University
Stanford, California
Attn: Document Library

Applied Electronic Lab.
Department of Electrical Engineering
Yale University
New Haven, Connecticut

Librarian
Naval Postgraduate School
1315 St. Paul Street
Baltimore 2, Maryland

Radiation Laboratory
Johns Hopkins University
1315 St. Paul Street
Baltimore 2, Maryland

Director, Lincoln Laboratory
Mass. Institute of Technology
Bedford, Massachusetts

Mr. John Hewitt
Document Room
Research Lab. of Electronics
Mass. Institute of Technology
Cambridge 39, Massachusetts

Professor A. Von Hippel
Mass. Institute of Technology
Lab. for Insulation Research
Cambridge 39, Massachusetts

Library, Room A 225
Lincoln Laboratory
P. O. Box 73
Lexington 15, Massachusetts

K. H. Siegel, Head
Theory and Analysis Department
Willow Run Airplant
Ypsilanti, Michigan

Martin A. Garavito, Head
Paramagnetic Section
Magnum Branch
Solid State Division
Naval Research Laboratory
Washington 25, D. C.
Attn: Code 6450

Dr. Rainer Neuwirth, Jr.
Ordnance Materials
Research Laboratory
Watertown Arsenal
Watertown, Massachusetts

Mr. A. Saka
Hitachi Technical College
Hitachi, Japan

Electronics Research Laboratory
Division of Electrical Engineering
University of California
Berkeley 4, California
Attn: Librarian

Johns Hopkins University
34th and Charles Street
Whitehead Hall
Baltimore 18, Maryland
Attn: Mr. J. O. Artman

Librarian
Physics Department
Amherst College
Amherst, Massachusetts
Attn: Mr. Romer

Professor I. Lowe
Department of Physics
University of Minnesota
Minneapolis, Minnesota

Michigan State College
Department of Mathematics
East Lansing, Michigan

Microwave Research Institute
Polytechnic Institute of Brooklyn
55 Johnson Street
Brooklyn, New York

Librarian
National Bureau of Standards Library
Room 301, Northwest Building
Washington 25, D. C.

Librarian
U. S. Department of Commerce
National Bureau of Standards
Boulder, Colorado

Dr. Karl Gullen
National Security Agency
Physical Sciences Division
Fort George Meade, Maryland

Dr. H. Campagna
National Security Agency
Physical Sciences Division
Fort George Meade, Maryland

Chung Kung University
Electrical Engineering Department
Tainan, Taiwan
Republic of China
Attn: Professor Chao-lin Chou

Head, Eng. Department
Mr. D. S. Jones
Department of Mathematics
Unit, College of No. Staffordshire
Keels, Staffordshire, England

Professor Paul Sanal Mito
Osaka City University
Dept. of Engineering Sciences
12 Nishi Ogimachi Kitaku
Osaka, Japan

Donald C. Stinson
Dept. of Electrical Engr.
University of Arizona
Tucson 29, Arizona

Professor Jerome R. Singer
Div. of Electrical Engineering
University of California
Berkeley 4, California

Professor Charles Kittel
Department of Physics
University of California
Berkeley 4, California

Serials Librarian
Brandeis University
Waltham, Massachusetts

Professor H. G. Booker
School of Electrical Engineering
Cornell University
Ithaca, New York

Library, College of Engineering
University of Illinois Library
University Heights
New York University
New York 33, New York

E. A. Chapman, Librarian
Rensselaer Polytechnic Institute
Amos Eaton Hall
Troy, New York

Robert Pinnery
Department of Engineering
Case Institute of Technology
Cleveland 6, Ohio

Dept. of Electrical Engineering
Case Institute of Technology
University Circle
Cleveland 6, Ohio
Attn: S. Sady, Head

Dr. G. J. Falkenback
Bell Telephone Institute
Holmdel, New Jersey
Attn: Electrical Engineering Division

Librarian
Engineering Library
Brown University
Providence, Rhode Island

Professor A. W. Stratton
Dept. of Electrical Engineering
University of Texas
Austin 12, Texas

Mr. William Way
Research Librarian
Tucker Instruments Corp.
1347 Cabaniss Boulevard
Hollywood 28, California

SOLID STATE ONLY

ELECTROMAGNETIC RADIATION ONLY