

AD-A043 582

CIVIL ENGINEERING LAB (NAVY) PORT HUENEME CALIF
A FINITE ELEMENT HEAD INJURY MODEL. VOLUME II. COMPUTER PROGRAM--ETC(U)
JUL 77 T A SHUGAR
CEL-R-854-2

F/G 6/2

UNCLASSIFIED

NL

1 OF 2
AD
A043582



AD A 043582

12
NW

Technical Report

R 854-II

COPY AVAILABLE TO DDC DOES NOT PERMIT FULLY LEGIBLE PRODUCTION




Sponsored by

DEPARTMENT OF TRANSPORTATION,
NAVAL AEROSPACE MEDICAL RESEARCH LABORATORY,
and OFFICE OF NAVAL RESEARCH

July 1977

CIVIL ENGINEERING LABORATORY

Naval Construction Battalion Center
Port Hueneme, California 93043

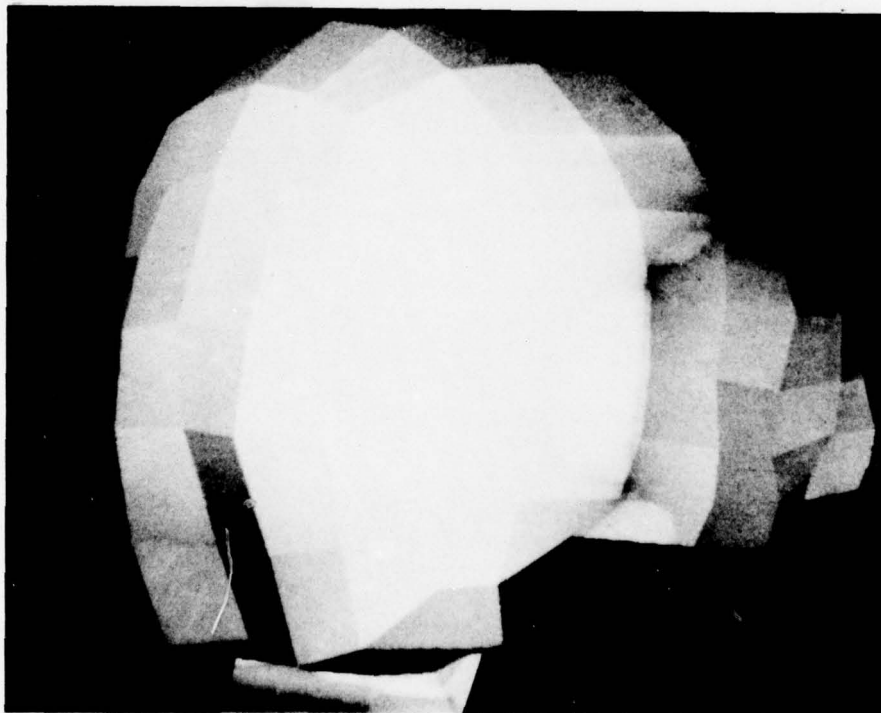

AD No. ~~1~~
DDC FILE COPY

**A FINITE ELEMENT HEAD INJURY MODEL - Volume II:
Computer Program Documentation**

by T. A. Shugar

Approved for public release; distribution unlimited.

DDC
RECEIVED
AUG 31 1977
C

Handwritten initials

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

14

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER CE/R-854-1-2	2. GOVT ACCESSION NO. DN 244152	3. RECIPIENT'S CATALOG NUMBER Sept.
4. TITLE (and Subtitle) A FINITE ELEMENT HEAD INJURY MODEL Volume II. Computer Program Documentation.		5. TYPE OF REPORT & PERIOD COVERED Final June 1973 - June 1977
7. AUTHOR(s) T. A. Shugar		6. PERFORMING ORGANIZATION NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS CIVIL ENGINEERING LABORATORY Naval Construction Battalion Center Port Hueneme, California 93043		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS Department of Transportation, Naval Aerospace Medical Research Laboratory, and Office of Naval Research		10. PROGRAM ELEMENT, PROJECT, TASK AND REPORT NUMBER DOT-HS-289-3-550-1A ONR-61153N, RR023-03-01; NAMRL N00203-75-WR-00142
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		11. DATE July 1977
12. 153 p.		13. NUMBER OF PAGES 158
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		15. SECURITY CLASS. (of this report) Unclassified
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) RR023031		15a. DECLASSIFICATION DOWNGRADING SCHEDULE
18. SUPPLEMENTARY NOTES RR023031		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Biomechanics, structural models, head injury prediction, impact, dynamics, transients, finite element.		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Volume II contains necessary information and documentation for executing the HIM computer program. Documentation includes a user's manual, a flow chart, CDC 6600 control cards, sample input data, and a FORTRAN IV source code listing of the HIM program. In addition, listings are provided for a preprocessor (skull mesh generator), a bandwidth minimizer, and a subroutine for an improved finite element for simulating the load-deformation response of the skull.		

DDC
RECEIVED
AUG 31 1977
RESOLVED

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

391 111

fb

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

Library Card

Civil Engineering Laboratory
A FINITE ELEMENT HEAD INJURY MODEL - VOLUME II:
Computer Program Documentation (Final) by T. A. Shugar
TR-854 - II 158 pp illus July 1977 Unclassified

1. Biomechanics 2. Head injury prediction I. DOT-HS-289-3-550

Volume II contains necessary information and documentation for executing the HIM computer program. Documentation includes a user's manual, a flow chart, CDC 6600 control cards, sample input data, and a FORTRAN IV source code listing of the HIM program. In addition, listings are provided for a preprocessor (skull mesh generator), a bandwidth minimizer, and a subroutine for an improved finite element for simulating the load-deformation response of the skull.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

Volume II of this report contains Appendixes B, C, D, E, F, and G HIM Code documentation. Appendix A can be found in Volume I.

<u>Appendix</u>	<u>Title</u>	<u>Page</u>
B	Summary of FEAP Modifications for Improved Efficiency	1
C	User Instructions for the HIM Code	2
D	Flow Diagram for Main Subroutines	23
E	Sample Job Control Cards	25
F	HIM Code Listing	27
G	Sample Input Data	99
H	Other Associated Code Listings	127

White Section
 B-1 Section
 B-2 Section

BY DISTRIBUTION/AVAILABILITY CODES
 SPECIAL

Date: **A 23 CP**

Appendix B

SUMMARY OF FEAP MODIFICATIONS FOR IMPROVED EFFICIENCY

The major changes made to the FEAP program are listed below:

1. The entire program was recompiled using FTN (OPT=2). Several FORTRAN errors were found and corrected.
2. The PUNCH, PUNCHB, TAPE8 and TAPE12 files were removed. Buffer sizes were increased to 3075 for TAPE7 and TAPE10 and to 2050 for TAPE13 and TAPE14. TAPE11 becomes a direct access (QUICKIO) file with a buffer size of 65 words. QUICKIO is a FORTRAN callable subroutine which decreases I/O time.
3. All files were binary blocked using FTNBIN.
4. The global stiffness matrix is saved on a direct-access file in subroutine MAKEA. During forward reduction in USOL, no additional files are used for spill-over processing. All intermediate storage required is written in-place as an appropriate record on the QUICKIO file. This reduces the appropriate record on the QUICKIO file, which in turn reduces the amount of scratch storage required by more than half.
5. USOL was completely rewritten to allow direct-access equation processing. A COMPASS routine was included to increase the solution efficiency.
6. RESOLVE was rewritten to accommodate direct-access processing during the back-substitution phase.
7. Subroutines PRTMAT, COMPACT, CKQUAD, PACKD, SLD04, and QSHP8 were removed.
8. Subroutines FELMT, MESHCK, TSOLVE, and RESET were modified to accommodate the node resequencing (bandwidth minimizing) changes. Primarily, this involved adding named COMMON/MINBW/NEW(1500) and internally altering nodal references. Note that fixing NEW at 1,500 words inherently limits the program to 1500 nodes maximum. This COMMON would have to be extended if larger problems are anticipated.
9. Two input changes were made, neither of which affect the execution of existing decks; i.e., no actual changes were made to input processing unless the new features are desired. An optional first card may be included with the entry ISZDT. Blank COMMON will be set to this value allowing execution at reduced core size for smaller problems. The entry is read using I5 format. The default value is 58000. The second option is activated by entering "1" in cc 79 of the FEAP card. If activated, the program expects to encounter the PREFEAP punched output immediately following the FEAP card. PREFEAP punched output contains the optionally reordered nodal point numbering system.

Appendix C

USER INSTRUCTIONS FOR THE HIM CODE

1 CONTROL CARDS

Card 1. (15)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	ISZDT	Blank COMMON will be set to this value. Default value is 58000	(1)

Card 2. (6X, 12A6)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
7-10	—	Must contain the word FEAP 73	
13-78	—	Output page header	(2)
79	—	Enter 1 if optimized nodal point numbering is employed. Otherwise leave blank	(3)

Card Group 2a. If Card 2 contains a 1 in cc 79, the program expects to encounter a group of cards specifying an optimally reordered nodal point numbering system prior to encountering Card 3.

Card 3. (15,1X,3A6)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	NOIM	Spatial dimension of problem. Use 3	
7-12	—	X coordinate designation	
13-18	—	Y coordinate designation	
19-24	—	Z coordinate designation	

Card 4. (15,1X,3A6)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	NDF	Number of unknown displacements per node. Use 3.	
7-12	—	X displacement designation	
13-18	—	Y displacement designation	
19-24	—	Z displacement designation	

Card 5. (I5,10X,15,30X,3F10.0)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	NEN	Maximum number of nodes connected to any one element. Use 8.	
16-20	MBAN	Maximum expected half-bandwidth	(4)
51-60	CON3 (1)	User defined X scale factor	(5)
61-70	CON3 (2)	User defined Y scale factor	
71-80	CON3 (3)	User defined Z scale factor	

Notes

- (1) For typical HIM code simulations this card can be left blank thereby specifying 58000 as the blank COMMON allocation.
- (2) Any description that the user wishes to have printed at the top of each output page can be entered.
- (3) Large, three-dimensional, dynamic problems can be expensive. A bandwidth minimizer has been employed to resequence the nodal point numbering scheme and optimally reorder the system of equations to provide economy in computational costs. A set of cards has been provided for this purpose which map the old and new numbering schemes. The mapping is transparent to the user; he refers always to the old system. Use of this option is highly recommended.
- (4) Typically this value is 150. The default value is 100 and is not sufficient. Therefore 150 should be specified.
- (5) These scale factors can be used to alter the size and shape of the HIM skull configuration as provided. Their default values are unity. Also these scale factors can be employed to change the provided geometrical configurations from inches to any appropriate unit of measure; *i.e.*, centimeters.

II MATERIAL PROPERTY SPECIFICATION

Card 1. (I5,1X,12A6)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	NUMMAT	Number of different material characterizations to follow.	(1)
7-12	—	Must contain the word MATERI	

One group of cards follows for each material. There must be NUMMAT card groups. There are at least two cards for each group; card (a) and card (b). For viscoelastic characterization, additional cards are required within the group as described below.

Card (a). (I5,1X,I5,11A6)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	—	Material number (1 to NUMMAT)	
7-11	—	Element type	(2)
12-77	—	Alphanumeric description of each material	

Card (b). (2I5,2F10.0)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	NG	Number of viscoelastic shear terms. If not viscoelastic, leave blank.	(3)
6-10	NK	Number of viscoelastic bulk terms. If not viscoelastic, leave blank.	
11-20	—	The infinite shear modulus or elastic shear modulus, G_0 .	
21-30	—	The infinite bulk modulus or elastic bulk modulus, K_0 .	
31-40	—	Mass density	

Card (c). (8F10.)

Omit this and the next card if material is not viscoelastic.

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-10	—	First shear modulus term G_1	
11-20	—	First relaxation time term, A_1	
21-30	—	Second shear modulus term, G_2	

etc., until NG terms are identified.

Card (d). (8F10.)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-10	—	First bulk modulus term, K_1	
11-20	—	First bulk relaxation time term, B_1	
21-30	—	Second bulk modulus term, K_2	

etc., until NK terms are identified.

Notes

(1) NUMMAT is usually assigned a value of 5. This allows the option for a different material specification for each of the following skull-brain regions.

<u>Material Number</u>	<u>Region</u>
1	Outer table bone
2	Diploe
3	Inner table bone
4	Subarachnoid space
5	Brain

(2) For the elastic skull materials (1, 2, and 3) the word ELM21 should be entered. For the subarachnoid space material (4) and brain material (5), an element possessing reduced integration is recommended, and the word ELM22 should be entered. Otherwise ELM21 may be entered for all materials.

(3) Viscoelastic material characterization is specified by the following equations:

$$G(t) = G_0 + \sum_{i=1}^{NG} G_i e^{-t/A_i}$$

$$K(t) = K_0 + \sum_{j=1}^{NK} K_j e^{-t/B_j}$$

Recommended units are the inch-pound-second system, although any consistent system can be used. (See note I(5)).

III SKULL-BRAIN GEOMETRICAL INPUT

Card 1. (15,1X,A6)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	NUMNP	Number of nodal points in the skull-brain system	(1)
7-12	—	Must contain the word NODAL	

There must follow NUMNP nodal point cards in numerical order.

Typical Nodal Point Card (15,115,3F10.0)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	—	Nodal point number	
15	—	Insert 0 for free node or 1 for restraint in X direction	(2)
16	—	Insert 0 for free node or 1 for restraint in Y direction	
17	—	Insert 0 for free node or 1 for restraint in Z direction	
21-30	—	X coordinate value	
31-40	—	Y coordinate value	
41-50	—	Z coordinate value	

Notes

(1) For the six-cubed, half-skull model configuration provided, this value is 716. This is the model which has been most useful in the development of the HIM code. A complete set of nodal point cards whose coordinates are entered in inches has been provided for this configuration.

(2) The boundary conditions to be used for the HIM simulation are activated in cc 15, 16, and 17. Entering a 0 allows the node to move in any one of three possible directions. A zero in cc 15, 16, and 17 means the node is completely free. A 1 means that the node's displacement is constrained to move in a manner to be specified in subsequent input cards (see Section VI). The sets of nodal point cards which have been provided do not have any boundary condition preset with the following exceptions. The nodal point cards contain a 1 in cc 16 for all nodal points located in the midsagittal plane. Thus Y component displacements for half skull simulation are automatically constrained to zero in the midsagittal plane for the user's convenience.

IV ELEMENT CARDS

Card 1. (15,1X,A6)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	NUMEL	Number of elements in the skull-brain system	(1)
7-12	—	Must contain the word ELEMEN	

There must follow 2 cards for each element, taking the elements in numerical order.

Typical Element Card Set

Card (a) (215)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	—	Element number	
6-10	—	Material number	(2)

Card (b) (814)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-4	—	Node 1	
5-8	—	Node 2	
9-12	—	Node 3	
.	.	.	
.	.	.	
29-32	—	Node 8	

Notes

- (1) For the six-cubed, half-skull model configuration, the value is 555. A complete set of element cards has been provided for this configuration.
- (2) A material number for which properties have been identified in Section II is entered. The corresponding element is then assigned those properties.

V INITIAL CONDITIONS

These cards can be omitted if the initial displacement velocity and acceleration of the skull-brain system are zero.

Card 1. (15,1X,A6)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	NICD	Number of initial condition vectors. Specify a "3".	(1)
7-12	—	Must contain the word INITIA	

Card 2. (6X,2A6) Repeat NICD times

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
7-18		Descriptive title for initial conditions	(2)

Card 3. (215,7F10.0) Repeat for each degree of freedom

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	—	Degree of freedom number for X; 3*NODE -2 = entry for Y; 3*NODE -1 = entry for Z; 3*NODE -0 = entry	(3)
6-10	—	Generator increment	(4)
11-20	—	Initial displacement value	
21-30	—	Initial velocity value	
31-40	—	Initial acceleration value	

Card 4. (15)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5		Largest node times 3 plus 1 (NUMNP*3+1)	(5)

Notes

- (1) When initial conditions of the skull-brain system are specified, the initial displacement, velocity, and acceleration (three vectors) are supplied as input.
- (2) Three cards follow Card 1 and merely describe each of the three initial condition vectors. These descriptions will appear above each vector in the subsequent printout.
- (3) Any or all nodes may be assigned an initial condition in the X, Y, and Z directions. But the initial condition must correspond to a degree of freedom number associated with the node and not the node number itself. The indicated equation is employed to obtain the degree of freedom number.
- (4) The generator increment is used when the initial condition is uniformly applied over the entire skull-brain system, and this is generally the case. It avoids the necessity for inputting all but a few cards. For example, if the skull-brain system is initially moving at 240 in./sec in the +X direction, two cards are required to assign the initial velocity to all nodes. The first would be for node 1 and the second for node NUMNP (largest node number in the system). The first card would contain a degree of freedom number of $1(3* 1-2)$, a generator increment of 2 (assigns the initial condition to only the degree of freedom numbers associated with the X-direction), and a 240 in cc 21-30. The second card would contain the value of $3* \text{NUMNP}-2$ in cc 1-5 and 240 in cc 21-30.
- (5) This card ends the initial condition data.

**VI PROPORTIONAL LOAD OR DISPLACEMENT SPECIFICATION
USING ANALYTICAL FUNCTIONS**

This section should be skipped if using point-by-point input loading. Such loading is covered in Section VIII. But this section is applicable to simulated dynamic loads or displacements which rise and subside according to a single time function (see Section VIII for the time function). They may all be assigned different magnitudes, but otherwise at any given instant the loads are proportional to one another.

Card 1. (15,1X,A6)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	—	Last node to which a force or displacement is to be specified. Must contain the word FORCE.	(1)

The following group of cards is composed of one card for each node to which a specified force or displacement is assigned.

Typical Card (15,5X,6F10.0)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5		Node to which a force or displacement is specified	
11-20		X component of force or displacement	(2)
21-30		Y component of force or displacement	
31-40		Z component of force or displacement	

Notes

(1) Merely means the largest node number to which a force or displacement is applied. Forces and displacements must be applied at nodal points.

(2) This value is the ratio between the simulated peak load component at this node and the largest peak simulated load considering all nodes. It may also be a direction cosine. Only ratios from 0 to 1 are assigned here. The magnitude of the resultant for the largest peak load is prescribed in Section VIII (see Note (9)).

VII PLOT CARD

This card is to be used only when diverting computed response data to an output tape. This action does not suppress the printing of output data.

Card 1. (15,1X,A6)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	-	Number of time steps plus one for which data is output	(1)
7-12		Must contain the word PLOT3D	

Note

(1) Data will be placed on an output tape for subsequent postprocessing for each time step up to, but not including the value indicated. Usually data for all time steps is desired. Therefore this entry should be one more than the number of time steps prescribed in the dynamic analysis. See the variable NTS in the next section.

VIII IMPLICIT TIME-INTEGRATION SPECIFICATION

This card is required on all static or dynamic runs.

Card 1. (I5,1X,A6)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5	NSEQ	Number of time sequences, usually 1	(1)
7-12		Must contain the word IMPLIC for dynamic problems. Must contain the word VISCOE for static problems.	

NSEQ sets of the following cards are required

Card (a) (F10.0,8I5,2F10.0)

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-10	DT	Time step size	(2)
11-15	NTS	Number of time steps in the sequence(s) plus 1	(3)
16-20	INT	Print interval	(4)
21-25	NNI	First node printed, generally 1	(5)
26-30	NNE	Last node printed, generally NUMNP	
31-35	NEI	First element stress printed, generally 1	
36-40	NEF	Last element stress printed, generally NUMEL	
41-45	NPROP	Number of proportional loads	(6)
46-50	NFORC	Largest node to which a force or displacement has been specified in a point-by-point specification of input loading	(7)
51-60	BETA	Newmark integration parameter, usually specify 0.25	(8)
61-70	DEL	Newmark integration parameter, usually specify 0	

Card (b). (215,7F10.0) One for each NPROP. Use only when specifying analytical function input. If using point-by-point input skip to card (c).

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5		Proportional load type, either 1 or 2	(9)
6-10	K	Exponent for type 2	
11-20	TMIN	Start time for loading	
21-30	TMAX	End time for loading	
31-40		AO	
41-50		A1	
51-60		A2	
61-70		A3	
71-80		A4	

Card group (c) (15,5X,6F10.0). This group of cards is comprised of one card for each node to which an input value is assigned. Node NFORC is the last node from which a card is provided. The group represents a loading vector, and generally there should be one group for each time step in the dynamic analysis. Omit this card group if NPROP is non-zero.

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5		Node to which force or displacement is specified	
11-20		X component value of force or displacement	
21-30		Y component value of force or displacement	
31-40		Z component value of force	

Card (3) (A5) last data card

<u>Columns</u>	<u>Variable</u>	<u>Description</u>	<u>Note</u>
1-5		Must contain the word STOP	

Notes

- (1) Little experience has been gained with values other than 1. Potentially, NSEQ can be used to specify a broader range of different loading functions. (Card (a) describes how different functions can be specified with NSEQ > 1). For example, one analysis could consist of two sequences where the first is the onset of loading requiring a small time step and the second is the loading decay which may be slower and during which a larger, more economical, time step can be employed.
- (2) This value should be chosen with caution. It generally depends on the rise time and should be no greater than one-fifth of that value. A value of one-tenth would be sufficiently small.
- (3) This is the number of time steps plus 1 for which the dynamic analysis is to proceed. Generally, it is chosen so that the entire rise and decay of the loading function can be simulated with the prescribed time step.
- (4) Several inches of paper may be required, depending upon NTS, for the printing of output information. A blank in cc 16-20 will cause the printing of data for each time step; issuing a 1 will cause the printing of data for every other time step, etc.
- (5) The next four entries also provide for reductions in the amount of output. If a few nodes and elements can be identified as key check points in the analysis it is only necessary to monitor their output. However, data elsewhere should at least be saved on tape (see Section VII).
- (6) This value is employed to distinguish among the specification of different input load functions in the dynamic analysis. For example if it is desired that the prescribed load vary as a haversine function and subsequently change to a linear function, then NPROP=2. This is also true of a triangular function. If a single function, such as a ramp function or haversine function, is desired then NPROP=1. If a point-by-point input loading is desired then NPROP is left blank.
- (7) This entry is for point-by-point load specification only. If proportioned load functions are employed, NFORC is left blank.
- (8) BETA and DEL are the Newmark integration parameters (implicit). Investigators have determined that BETA = 0.25 and DEL = 0 are good choices. If DEL > 0 artificial positive damping is introduced and if DEL < 0 artificial negative damping is introduced. The numerical integration will be unconditionally stable if

$$\text{BETA} \geq \frac{4 (\text{DEL} + 1)^2}{16}$$

The higher and least important nodes may be damped out by choosing BETA = 0.276 and DEL = 0.05.

(9) Proportional load type 1 is a polynomial function,

$$f(t) = A_0 + A_1*t + A_2*t^2 + A_3*t^3 + A_4*t^4$$


Proportional load type 2 is a transcendental function,


$$f(t) = A_0*\sin^K(A_1*t) + A_2*\cos^K(A_3*t) + A_4$$

A haversine function has been found to be particularly useful in the specification of impact forces, $F(t) = A_0*\sin^K(A_1*t)$, where A_0 is the peak force magnitude, A_1 is pi divided by the load duration in seconds, and $K = 2$. Force magnitude must be halved when employing a half-skull model.

Appendix D

FLOW DIAGRAM FOR MAIN SUBROUTINES

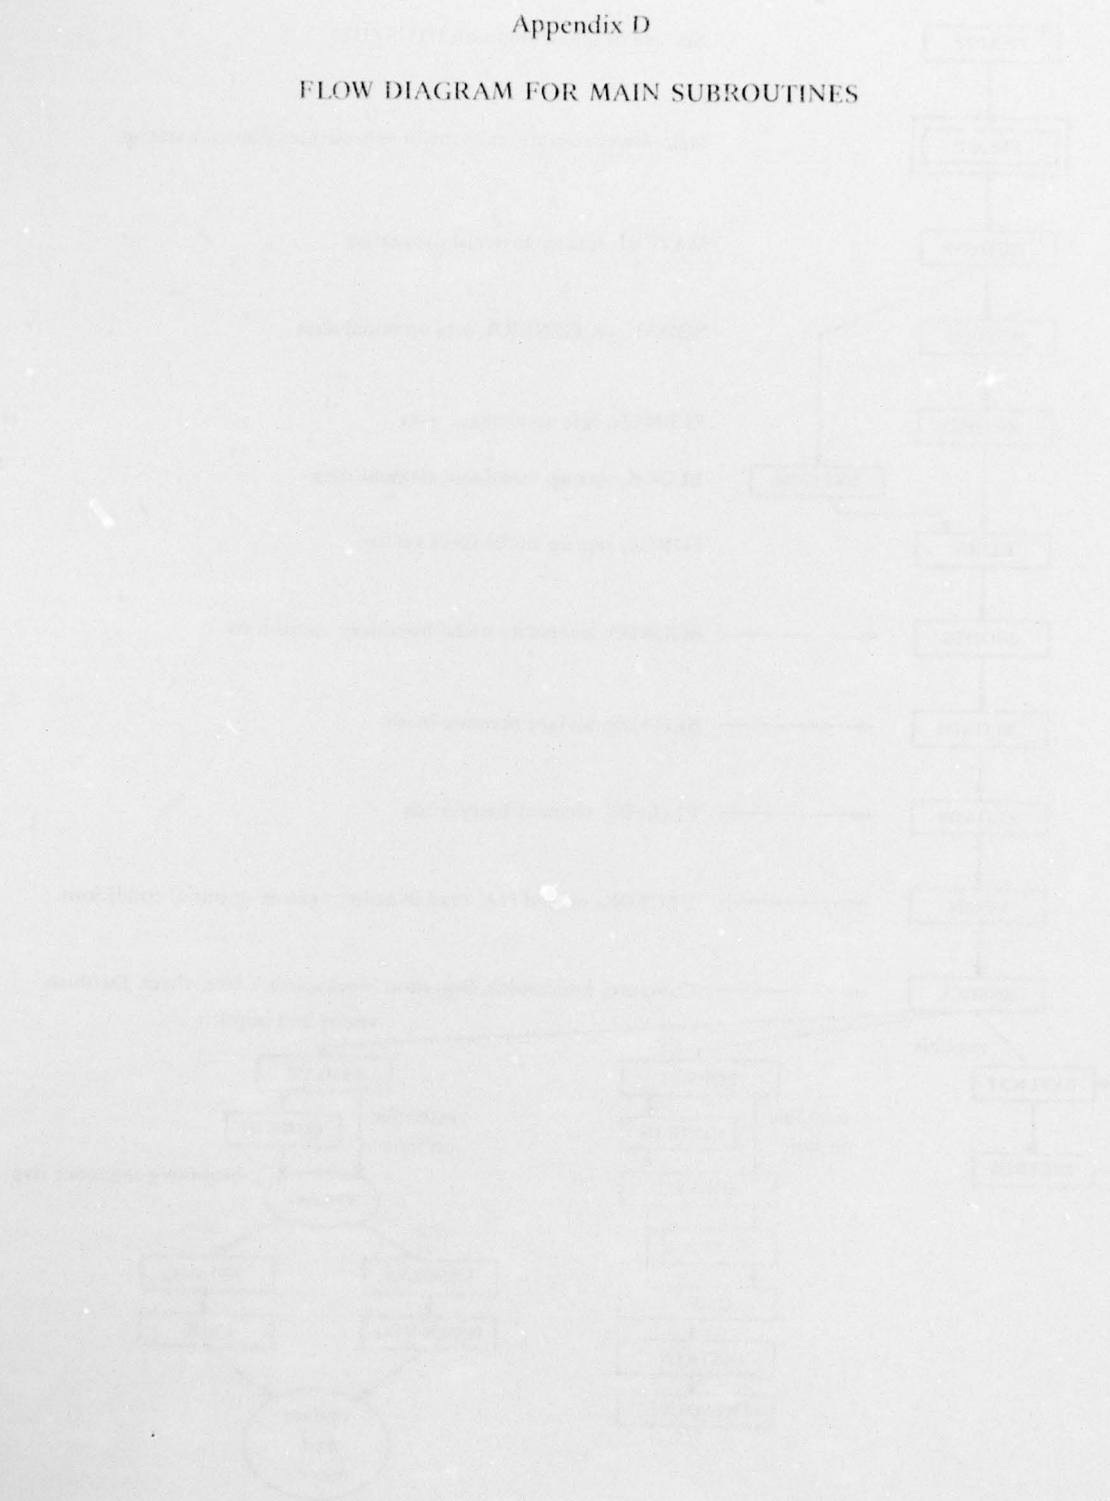

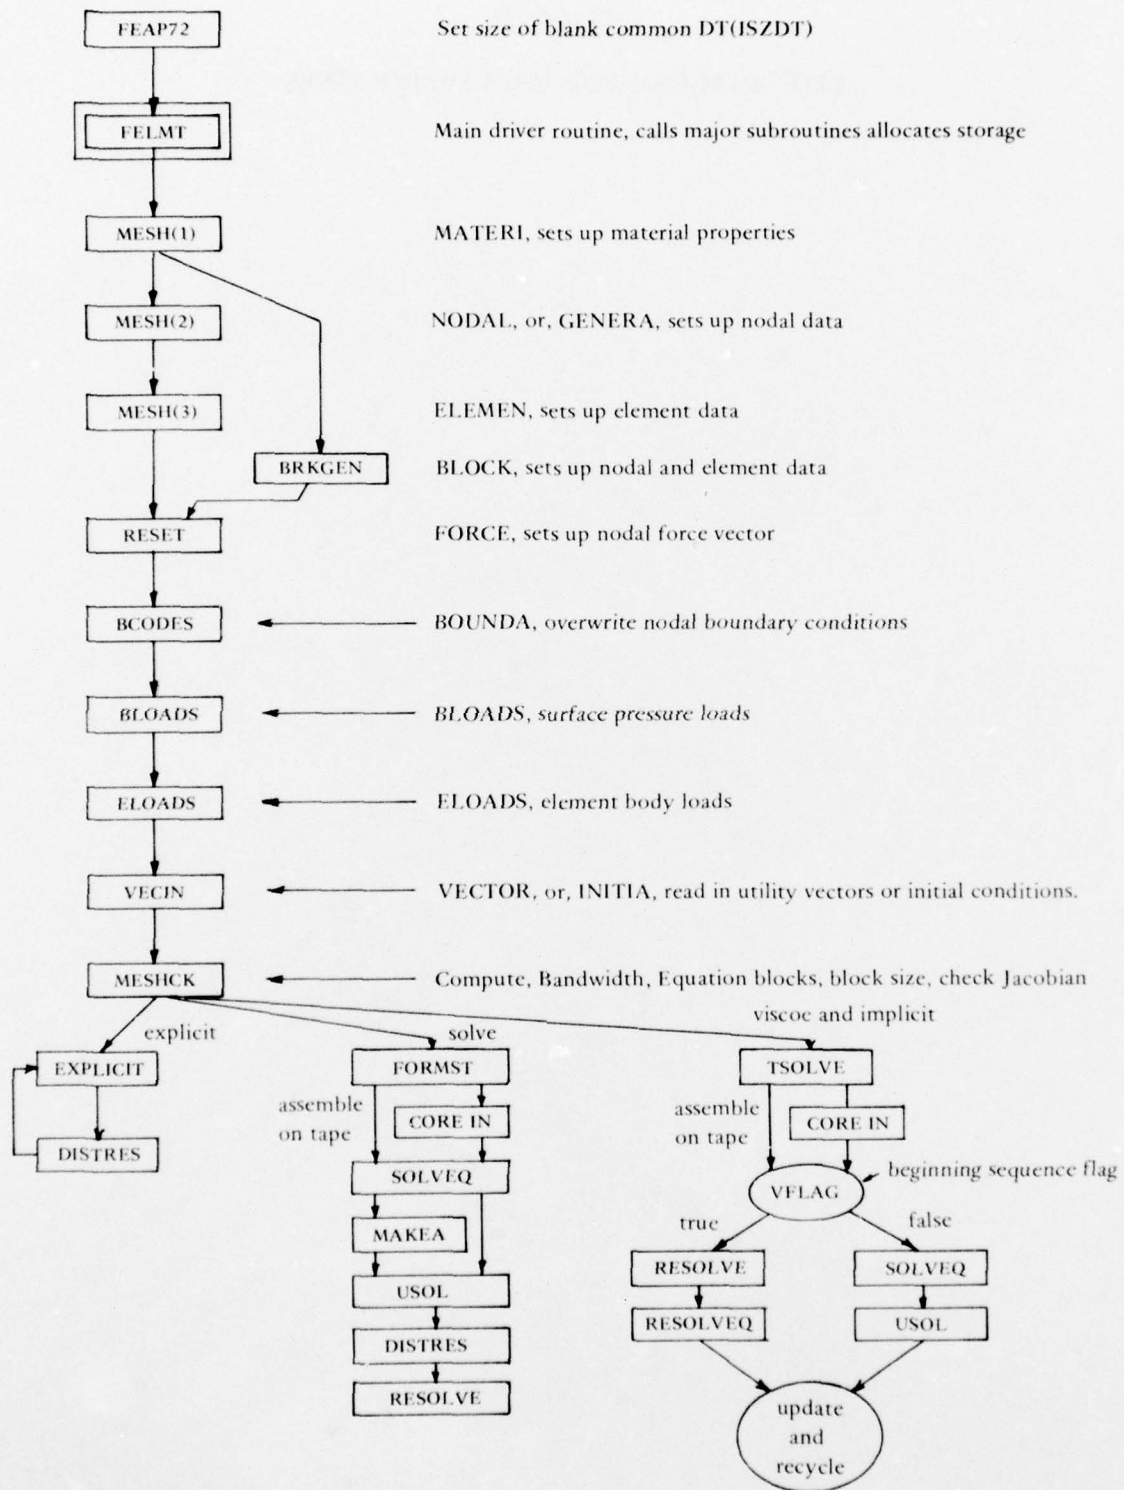

Appendix E
SAMPLE JOB CONTROL CARDS

\$CHARGE,L2317*X=008.
MONKEY,CM15000,CL262000,T*000,I04000,TR1,P6.
REQUEST FEAP,HI. (L2313)
SKIPF (FEAP,I,17,H)
COPYRF (FEAP,LGO)
REWIND (FEAP)
UNLOAD (FEAP)
REQUEST TAPE30,HI. (SAVE)
ATTACH (IO,QUICKIO)
HFL,150000.
SET (0)
LOAD (LGO)
LOAD (IO)
EXECUTE.
EXIT.
EXIT.

Appendix F

HIM CODE LISTING

\$CHARGE,L2317AA=00R.
MONKEY,CM1500,CL262000,14000,104000,TP1,P6.
REQUEST FEAP,H1. (L2313)
SKIPF (FEAP,1,17,0)
COPYHF (FEAP,L60)
REWIND (FEAP)
UNLOAD (FEAP)
REQUEST,TAPE 30,H1. (SAVE)
ATTACH (IO,QUICKIO)
HFL,15000.
SET (0)
LOAD (L60)
LOAD (IO)
EXECUTE.
EXIT.
EXIT.

PROGRAM FEAP72 (INPUT=65,OUTPUT,TAPE5=INPUT,TAPE6=OUTPUT,
 • TAPE7=3075,TAPE9,TAPE10=3075,TAPE11=65,TAPE13=2050,
 • TAPE14=2050,TAPE30)

C
 CXXXX NOTE NOTE NOTE NOTE

C TWO ADDL. INPUT FEATURES ARE INCLUDED IN THIS VERSION

C
 C 1. AN OPTIONAL CARD MAY BE INCLUDED IMMEDIATELY PRECEDING
 C THE FIRST FEAP CARD. THIS CARD HAS THE ENTRY ISZDT (15).
 C ADMISSABLE RANGE IS 500.LE. ISZDT .LE.65000.
 C THE PROGRAM WILL ASSIGN THIS VALUE TO THE SIZE OF BLANK
 C COMMON AND RFL UP TO THIS LIMIT. THIS WILL ALLOW THE
 C PROGRAM TO LOAD AND EXECUTE IN ONLY THE AMOUNT OF CORE REQRD.
 C IF OMITTED, A DEFAULT VALUE OF 58000 IS ASSIGNED TO ISZDT.
 C
 C 2. A 1 ENTERED IN CC 79 OF THE FEAP CARD INDICATES THAT
 C THE NODE RESEQUENCING CARDS PUNCHED BY THE FEAP PREPROCESSOR
 C ARE TO BE INPUT IMMEDIATELY FOLLOWING THE FEAP CARD.

C
 CXXXX NOTE NOTE NOTE NOTE

C
 C.... FINITE ELEMENT ASSEMBLY PROGRAM * STORAGE ALLOCATION

FEA 4C
 FEA 5C
 FEA 6C

COMMON /TIMING/ TRICP,NTRI,HACKCP,NBACK
 COMMON DT(1)
 DIMENSION I=IN(6)
 DATA I=IN/7,9,10,13,14,30/
 DATA JFEAP/4,HFEAP/
 CALL FINFIN (1,6,I=IN)
 CALL BLKDAT
 TRICP=0.
 HACKCP=0.
 NTRI=J
 NBACK=0
 I1=0.
 I2=0.

C
 C.... ISZDT MUST COINCIDE WITH SIZE OF ARRAY DT

FEA 8C
 FEA 9C
 FEA 10C

C
 CXXXX
 C CHECK FOR OPTIONAL FIRST CARD
 CXXXX

ISZDT=58000
 READ (5,100) IFEAP
 100 FORMAT (A4)
 HACKSPACE 5
 IF (IFEAP.EQ.JFEAP) GO TO 50
 READ (5,200) ISZDT
 200 FORMAT (15)
 IF (ISZDT.LT.500) ISZDT=500
 IF (ISZDT.GT.65000) ISZDT=65000
 50 CALL XREF (LOC(01(ISZDT)))

C
 C.... REASONABLE MAXIMUM BAND WIDTH

FEA 12C
 FEA 13C
 FEA 14C

C
 MBAND=1000
 CALL FELEMT(DT,ISZDT,MBAND)

FEA 16C

CXXXX
 C PRINT PROGRAM TIMINGS
 C NOTE THAT THE TIMINGS ARE NOT MEANINGFUL
 C IF STACKED JOBS WERE PROCESSED
 CXXXX

IF (NTRI.GT.0) T1=TRICP/NTRI
 IF (NBACK.GT.0) T2=BACKCP/NBACK
 WRITE (6,500) NTRI,TRICP,T1,NBACK,BACKCP,T2
 500 FORMAT (//
 *46H PROGRAM TIMINGS //
 *46H NUMBER OF TOTAL TIME FOR EACH //
 *46H TRIANGULAR TIME FACTORIZATION //
 *46H FACTORIZATIONS (CP) (CP) //
 * I15,F10.3,F20.3//

	NUMBER OF BACKWARD REDUCTIONS	TOTAL TIME (CP)	TIME FOR EACH / REDUCTION / (CP) //	
• 115.F10.3.F20.3//)				
STUP				FEA 17C
END				FEA 18C
*DECK MANUAL				
SUBROUTINE MANUAL				MAN 1C
C				MAN 2C
C				MAN 3C
C				MAN 4C
C				MAN 5C
C				MAN 6C
C				MAN 7C
C				MAN 8C
C				MAN 9C
C				MAN 10C
C				MAN 11C
C				MAN 12C
C				MAN 13C
C				MAN 14C
C				MAN 15C
C				MAN 16C
C				MAN 17C
C				MAN 18C
C				MAN 19C
C				MAN 20C
C				MAN 21C
C				MAN 22C
C				MAN 23C
C				MAN 24C
C				MAN 25C
C				MAN 26C
C				MAN 27C
C				MAN 28C
C				MAN 29C
C				MAN 30C
C				MAN 31C
C				MAN 32C
C				MAN 33C
C				MAN 34C
C				MAN 35C
C				MAN 36C
C				MAN 37C
C				MAN 38C
C				MAN 39C
C				MAN 40C
C				MAN 41C
C				MAN 42C
C				MAN 43C
C				MAN 44C
C				MAN 45C
C				MAN 46C
C				MAN 47C
C				MAN 48C
C				MAN 49C
C				MAN 50C
C				MAN 51C
C				MAN 52C
C				MAN 53C
C				MAN 54C
C				MAN 55C
C				MAN 56C
C				MAN 57C
C				MAN 58C
C				MAN 59C
C				MAN 60C
C				MAN 61C
C				MAN 62C
C				MAN 63C
C				MAN 64C
C				MAN 65C

C		FOR ELMTNN.	MAN 66C
C		NDP IS THE DIMENSION OF LOADED SURFACE	MAN 67C
C		NPRES IS NUMBER OF LOADED NODES (MAX 8)	MAN 68C
C		IPRES(R) ARE NODE NUMBERS OF LOADED NODES.	MAN 69C
C		PR(R) ARE LOAD VALUES AT CORRESPONDING IPRES	MAN 70C
C		NODES.	MAN 71C
C		FS(6,8) ARE THE COMPUTED GENERALIZED (NODAL)	MAN 72C
C		FORCES FOR EACH DEGREE OF FREEDOM AT EACH	MAN 73C
C		IPRES NODE.	MAN 74C
C		SEE SECTION 7.1 FOR DATA INPUT DETAILS.	MAN 75C
C			MAN 76C
C			MAN 77C
C			MAN 78C
C		INTEGRATION TABLE IS ACCESSED BY THE CALL	MAN 79C
C		CALL INTEGL(LIM,NCI,NDIM,LINT,STUW)	MAN 80C
C			MAN 81C
C			MAN 82C
C		STUW(4,M) INTEGRATION POINTS AND WEIGHTS.	MAN 83C
C		**NOTE** M MUST BE SET EXPLICITLY AND BE LARGER	MAN 84C
C		THAN OR EQUAL TO LINT.	MAN 85C
C		LINT - RETURNS WITH NUMBER INTEGRATION POINTS.	MAN 86C
C		NCI = 0 RETURNS GAUSS POINTS AND WEIGHTS IN	MAN 87C
C		STUW.	MAN 88C
C		LIM = 1 TO 5 IS NUMBER OF GAUSS POINTS/DIR-	MAN 89C
C		ECTION.	MAN 90C
C		NCI = 1 RETURNS A SPECIAL 3-D GAUSS FORMULA.	MAN 91C
C		SET LIM = 1 FOR 6 PT. CUBIC ACCURACY	MAN 92C
C		SET LIM = 2 FOR 14 PT. QUINTIC ACCURACY.	MAN 93C
C		NCI = 2 RETURNS TRIANGULAR INTEGRATION FORMULA	MAN 94C
C		SET LIM = 1 FOR 1 PT. LINEAR ACCURACY.	MAN 95C
C		SET LIM = 2 FOR 3 PT. QUADRATIC ACCURACY.	MAN 96C
C		SET LIM = 3 FOR 7 PT. QUARTIC ACCURACY.	MAN 97C
C			MAN 98C
C			MAN 99C
C		1.) DATA TYPE IDENTIFICATION CARDS (IS,IX,IZAB).	MAN100C
C			MAN101C
C		EACH DATA SEGMENT IS PRECEDED BY A CARD WHICH IDENTIFIES THE	MAN102C
C		TYPE OF DATA AND LIMITS ON THE AMOUNT OF DATA WHICH IMMEDIATELY	MAN103C
C		FOLLOWS THE CARD. EXCEPT AS NOTED THE DATA SEGMENTS MAY APPEAR	MAN104C
C		IN ANY ORDER. THE IDENTITY CARDS MAY ALSO AID THE USER IN	MAN105C
C		INTERPRETING THE INPUT DATA CARDS. AS SUPPLIED THERE ARE	MAN106C
C		TWENTY-FIVE DIFFERENT DATA IDENTIFICATION CARDS. THESE ARE	MAN107C
C			MAN108C
C		COL 7 TO 12 IDENTITY(RESTRICTIONS)	MAN109C
C			MAN110C
C	FEAP73	START OF EACH PROBLEM (MUST PRECEDE ALL OTHER	MAN111C
C		DATA).	MAN112C
C	FILE	CHANGE OUTPUT PAGE HEADINGS	MAN113C
C	REMARK	COMMENTS ON OUTPUT	MAN114C
C	MATERI	MATERIAL CHARACTERIZATION.	MAN115C
C	NODAL	NODAL CARDS	MAN116C
C	POLAR	POLAR CONVERSION. (PRECEDE BY NODAL, GENERA, OR	MAN117C
C		BLOCK)	MAN118C
C	ELEMEN	ELEMENT CONNECTION CARDS.	MAN119C
C	GENERA	GENERATE NODES IN A LINEAR PATH BY ANY INCREMNT	MAN120C
C	BLOCK	GENERATE ALL MESH DATA (BOTH NODAL AND ELEMENT)	MAN121C
C		FOR A 2, (OR 3) DIMENSIONAL REGION WHOSE BOUNDARY	MAN122C
C		MAY BE DEFINED BY 4 (8) OR 8 (20) COLLOCATED POINTS	MAN123C
C	HOUNDA	BOUNDARY CODE PRESCRIPTION (PRECEDE BY NODAL OR	MAN124C
C		GENERATE OR BLOCK)	MAN125C
C	VECTOR	PRESCRIBED NODAL OR ELEMENT DATA (PRECEDE BY	MAN126C
C		NODAL OR POLAR AND ELEMEN)	MAN127C
C	FORCE	NODAL GENERALIZED FORCES (PRECEDE BY NODAL OR	MAN128C
C		GENERA OR BLOCK).	MAN129C
C	HLOADS	SURFACE LOADINGS (SAME AS FORCE).	MAN130C
C	ELOADS	ELEMENT LOADINGS (SAME AS FORCE).	MAN131C
C	MESH	CHECK CONSISTENCY OF MESH ONLY (SAME AS SOLVE)	MAN132C
C	PLOT	PLOT MESH, RESULTS (SAME AS SOLVE)	
C	INITIA	INITIAL CONDITION PRESCRIPTION FOR DYNAMIC	MAN134C
C		ANALYSIS (PRECEDE BY NODAL, GENERA OR BLOCK)	MAN135C
C	SOLVE	COMPLETE FORMULATION AND SOLUTION FROM ELEMENTS	MAN136C
C		(PRECEDE BY MATERI, NODAL OR GENERA, AND ELEMEN	MAN137C

C	RESOLV	OR PRECEDE BY MATER1 AND BLOCK 1	MAN138C
C		USE PREVIOUS PROBLEM DESCRIPTION WITH NEW LOAD	MAN139C
C	EXPLIC	ONLY (PRECEDE BY SOLVE AND NEW LOADING CARDS).	MAN140C
C		DYNAMIC SOLUTION BY EXPLICIT INTEGRATION, (SAME	MAN141C
C		AS SOLVE)	MAN142C
C	IMPLIC	IMPLICIT INTEGRATION OF DYNAMIC PROBLEMS	MAN143C
C		(PRECEDE BY SAME DATA AS FOR SOLVE)	MAN144C
C	VISCOF	QUASI-STATIC LINEAR VISCOELASTIC INTEGRATION	MAN145C
C		(PRECEDE BY SAME DATA AS FOR SOLVE)	MAN146C
C	FOURIE	FOURIER COMPOSITION (SAME AS SOLVE)	MAN147C
C	ADDDUP	ACCUMULATE FOURIER SOLUTION (AFTER FOURIE)	MAN148C
C	STOP	NORMAL EXIT (MUST FOLLOW ALL DATA)	MAN149C
C			MAN150C
C		***NOTE*** EACH IDENTIFIER IS PUNCHED STARTING IN COL 7 (LEFT	MAN151C
C		JUSTIFIED).	
C			MAN153C
C		EXCESS CARDS MAY EXIST BETWEEN EACH SECTION OF DATA, HOWEVER,	MAN154C
C		THE DATA TO BE USED MUST IMMEDIATELY FOLLOW THE TYPE CARD AND	MAN155C
C		MUST BE IN PROPER ORDER. NO PARTICULAR ORDER OF THE TYPE	MAN156C
C		CARDS IS NECESSARY EXCEPT THAT THE FEAP73 CARD MUST ALWAYS BE	MAN157C
C		THE FIRST CARD IN EACH SET OF DATA, AND RESTRICTIONS MUST BE	MAN158C
C		OBSERVED.	MAN159C
C			MAN160C
C			MAN161C
C	2.) PROBLEM INITIATION AND CONTROL CARDS		MAN162C
C			MAN163C
C	CARD 1. (6X,12A6)		MAN164C
C			MAN165C
C	COL 7 TO 12	MUST CONTAIN WORD FEAP73	MAN166C
C	COL 13 TO 74	OUTPUT PAGE HEADER	MAN167C
C			MAN168C
C	CARD 2. (15*1X,3A6)		MAN169C
C			MAN170C
C	COL 1 TO 5	NDIM - SPATIAL DIMENSION OF PROBLEM (1 TO 3)	MAN171C
C	COL 7 TO 12	NAMES TO BE PRINTED AS OUTPUT HEADERS TO	MAN172C
C	COL 13 TO 18	COORDINATES - IF BLANK SET TO 1,2,3 AS NEEDED.	MAN173C
C	COL 19 TO 24		MAN174C
C			MAN175C
C	CARD 3. (15*1X,6A6)		MAN176C
C			MAN177C
C	COL 1 TO 5	NDF - NUMBER OF UNKNOWN PER NODE (1 TO 6)	MAN178C
C	COL 7 TO 12	NAMES TO BE PRINTED AS OUTPUT HEADERS OF THE	MAN179C
C	COL 13 TO 18	GENERALIZED DISPLACEMENTS AND FORCES - IF	MAN180C
C	BLANK SET TO 1,2,3,4,5,6 AS NECESSARY	MAN181C
C	COL 37 TO 42		MAN182C
C			MAN183C
C	CARD 4. (615*5F10.0)		MAN184C
C			MAN185C
C	COL 1 TO 5	NEN - MAXIMUM NUMBER OF NODES CONNECTED TO ANY	MAN186C
C		ELEMENT (1 TO 20).	MAN187C
C	COL 6 TO 10	NEXTRA - INCREASES ELEMENT MATRIX SIZE FROM	MAN188C
C		NDF*NEN TO NDF*NEN + NEXTRA	MAN189C
C	COL 11 TO 15	IREC - COMPUTE GENERALIZED FORCE CHECK IF	MAN190C
C		NONZERO (FOR TIME INVARIANT ANALYSIS ONLY)	MAN191C
C	COL 16 TO 20	MBAN - MAXIMUM EXPECTED BANDWIDTH, DEFAULT IS	MAN192C
C		SET TO 100. USED AS AN ERROR CHECK TO PREVENT	MAN193C
C		RUNNING WITH AN OBVIOUS ERROR.	MAN194C
C	COL 21 TO 25	IBUF - BUFFER SIZE FOR STORAGE OF HISTORY	MAN195C
C		EFFECTS IN TIME DEPENDENT ANALYSIS, DEFAULT IS	MAN196C
C		IBUF = 15401/20	MAN197C
C	COL 26 TO 30	NC1 - USER INTEGER CONSTANT	MAN198C
C	COL 31 TO 40	CUN1 - USER DEFINED CONSTANT	MAN199C
C	COL 41 TO 50	CUN2 - USER DEFINED CONSTANT	MAN200C
C	COL 51 TO 60	CUN3(1), 1-COORD. MULTIPLIER, DEFAULT = 1.0	
C	COL 61 TO 70	CUN3(2), 2-COORD. MULTIPLIER, DEFAULT = 1.0	
C	COL 71 TO 80	CUN3(3), 3-COORD. MULTIPLIER, DEFAULT = 1.0	
C			MAN204C
C	2.1) *REMARK* USER COMMENTS ON OUTPUT. (6X,12A6)		MAN205C
C			MAN206C
C	SUBSEQUENT CARDS		MAN207C
C			MAN208C
C	COL 7 TO 12	MUST CONTAIN REMARK	MAN209C

C	COL 13 TO 78	STATEMENTS TO BE OUTPUT • USE AS MANY REMARK CARDS AS DESIRED. INSERT BEFORE ANY TYPE CARD.	MAN210C
C			MAN211C
C	2.2) TITLE CHANGE ON OUTPUT (6X+12A6)		MAN212C
C			MAN213C
C			MAN214C
C	COL 7 TO 12	MUST CONTAIN TITLE	MAN215C
C	COL 13 TO 78	NEW TITLE DESCRIPTOR	MAN216C
C	2.3) EXECUTION TERMINATION (6X+A4)		MAN217C
C			MAN218C
C			MAN219C
C	COL 7 TO 10	MUST CONTAIN STOP, INSERT AFTER LAST PROBLEM.	MAN220C
C			MAN221C
C			MAN222C
C	3.) MATERIAL CHARACTERIZATION (15+1X+12A6)		MAN223C
C			MAN224C
C	COL 1 TO 5	NUMMAT = NUMBER OF DIFFERENT MATERIAL CHARACTERIZATIONS TO FOLLOW.	MAN225C
C	COL 7 TO 12	MUST CONTAIN WORD MATERI	MAN226C
C			MAN227C
C			MAN228C
C		THE FOLLOWING CARDS ARE SUPPLIED FOR EACH MATERIAL TO BE CHARACTERIZED (MUST BE EXACTLY NUMMAT SETS OF CARDS)	MAN229C
C			MAN230C
C			MAN231C
C	CARD 1.) ELEMENT SELECTOR CARD (15+1X+A5+11A6)		MAN232C
C			MAN233C
C	COL 1 TO 5	MATERIAL NUMBER (1 TO NUMMAT)	MAN234C
C	COL 7 TO 11	ELMNN = WHERE NN IS NUMBER OF ELEMENT CLASS (01 TO 30) TO WHICH THE CHARACTERIZATION BELONGS.	MAN235C
C	COL 12 TO 77	ALPHANUMERIC INFORMATION TO BE OUTPUT.	MAN236C
C			MAN237C
C			MAN238C
C		CARD 2.), ETC. ** USER DEFINED FOR EACH ELEMENT TYPE PROVIDED.	MAN239C
C			MAN240C
C	4.) NODAL CARDS (15+1X+A6)		MAN241C
C			MAN242C
C	COL 1 TO 5	NUMNP = NUMBER OF NODAL POINTS	MAN243C
C	COL 7 TO 12	MUST CONTAIN NODAL	MAN244C
C			MAN245C
C		SUBSEQUENT CARDS LAST NODAL CARD MUST NOT BE GENERATED. (15+11D+3F10.0)	MAN246C
C			MAN247C
C			MAN248C
C	COL 1 TO 5	NODE NUMBER	MAN249C
C	COL 15	1 IF 1 DISPLACEMENT IS SPECIFIED	MAN250C
C	COL 16	1 IF 2 DISPLACEMENT IS SPECIFIED	MAN251C
C	COL 17	1 IF 3 DISPLACEMENT IS SPECIFIED	MAN252C
C	COL 18	1 IF 4 DISPLACEMENT IS SPECIFIED	MAN253C
C	COL 19	1 IF 5 DISPLACEMENT IS SPECIFIED	MAN254C
C	COL 20	1 IF 6 DISPLACEMENT IS SPECIFIED	MAN255C
C	COL 21 TO 30	1 COORDINATE VALUE	MAN256C
C	COL 31 TO 40	2 COORDINATE VALUE • AS REQUIRED	MAN257C
C	COL 41 TO 50	3 COORDINATE VALUE	MAN258C
C			MAN259C
C		NODAL CARDS MUST BE IN ORDER. MISSING NODES ARE INTERPOLATED LINEARLY FROM INPUT NODES. IF SUCCEEDING CARDS HAVE IDENTICAL BOUNDARY CODES, THIS BOUNDARY CODE WILL BE ASSIGNED TO THE INTERVENING NODES. IN ALL OTHER CASES THE BOUNDARY CODE IS SET TO ZERO • TERMINATE ON NODE NUMNP OR A BLANK CARD •	MAN260C
C			MAN261C
C			MAN262C
C			MAN263C
C			MAN264C
C			MAN265C
C	4.1) NON SEQUENTIAL NODAL GENERATOR OPTION. (15+1X+A6)		MAN266C
C			MAN267C
C	COL 1 TO 5	NUMBER OF NODAL POINTS	MAN268C
C	COL 7 TO 12	MUST CONTAIN GENERA	MAN269C
C			MAN270C
C		SUBSEQUENT CARDS (215+110+3F10.0)	MAN271C
C			MAN272C
C	COL 1 TO 5	NODE=NUMBER	MAN273C
C	COL 6 TO 10	NODE=NUMBER-INCREMENT WHICH WILL BE SUCCESSIVELY ADDED TO NODE=NUMBER UNTIL SUM IS GREATER THAN NODE=NUMBER ON FOLLOWING CARD (ALGEBRAIC) • BOUNDARY CODE • SAME AS INPUT FOR NODAL.	MAN274C
C			MAN275C
C	COL 15 TO 20	IF SUCCEEDING CARDS HAVE IDENTICAL BOUNDARY CODES, THIS BOUNDARY CODE WILL BE ASSIGNED TO THE INTERVENING NODES. IN ALL OTHER CASES THE BOUNDARY CODE IS SET TO ZERO.	MAN276C
C			MAN277C
C			MAN278C
C			MAN279C
C			MAN280C
C			MAN281C

C ELEMENT CARDS MUST BE IN ORDER. MISSING ELEMENTS ARE GENERATED BY INCREMENTING NODES. MAN354C
 C LAST ELEMENT CARD MUST NOT BE GENERATED. MAN355C
 C * TERMINATE ON ELEMENT NUMEL OR A BLANK CARD * MAN356C
 C MAN357C
 C MAN358C
 C 5.) BLOCK GENERATOR: GENERATES ALL MESH DATA. (6X, A6) MAN359C
 C COL 1 TO 5 NUMBER OF NODAL POINTS TO BE GENERATED. MAN360C
 C COL 7 TO 12 MUST CONTAIN BLOCK MAN361C
 C SUBSEQUENT CARDS (1015/615/(10X, 3F10.0)) MAN362C
 C MAN363C
 C MAN364C
 C MAN365C
 C CARD 1. MAN366C
 C COL 1 TO 5 NN, NUMBER OF POINTS REQUIRED TO DEFINE BOUNDARY OF REGION. FOR 2-DIM., NN=4 OR 8. MAN368C
 C FOR 3-DIM., NN= 8 OR 20. MAN369C
 C COL 6 TO 10 NUMBER OF ELEMENTS IN X-DIRECTION. MAN370C
 C COL 11 TO 15 NUMBER OF ELEMENTS IN Y-DIRECTION. MAN371C
 C COL 16 TO 20 NUMBER OF ELEMENTS IN Z-DIRECTION. MAN372C
 C COL 21 TO 25 INITIAL NODE NUMBER, DEFAULT = 1. MAN373C
 C COL 26 TO 30 INITIAL ELEMENT NUMBER, DEFAULT = 1. MAN374C
 C COL 31 TO 35 MATERIAL NUMBER OVER REGION, DEFAULT = 1. MAN375C
 C COL 36 TO 40 BOUNDARY CODE SKIP. A NON-ZERO ENTRY WILL OMIT SETTING ALL INTERIOR BOUNDARY CODES TO ZERO. MAN377C
 C COL 41 TO 45 IREUSE - REUSE ELEMENT STIFFNESS OPTION - USES EACH ELEMENT STIFFNESS IREUSE TIMES BEFORE GENERATING A NEW ELEMENT STIFFNESS MATRIX. MAN378C
 C MAN379C
 C COL 46 TO 50 ELEMENT STIFFNESS-PRINT. A NON-ZERO ENTRY WILL CAUSE PRINT-OUT OF FIRST ELEMENT. MAN380C
 C MAN381C
 C COL 51 TO 55 INSH - IF NONZERO SUPPRESSES PRINT OF NODES. MAN382C
 C COL 56 TO 60 IELM - IF NONZERO SUPPRESSES PRINT OF ELEMENTS. MAN383C
 C MAN384C
 C MAN385C
 C CARD 2. (BOUNDARY CODE AS DEFINED IN NODAL CARD.) MAN386C
 C MAN387C
 C MAN388C
 C COL 1 TO 10 BOUNDARY CODE OVER FACE +X. MAN389C
 C COL 11 TO 20 BOUNDARY CODE OVER FACE +Y. MAN390C
 C COL 21 TO 30 BOUNDARY CODE OVER FACE +Z. MAN391C
 C COL 41 TO 50 BOUNDARY CODE OVER FACE -X. MAN392C
 C COL 41 TO 50 BOUNDARY CODE OVER FACE -Y. MAN393C
 C COL 51 TO 60 BOUNDARY CODE OVER FACE -Z. MAN394C
 C MAN395C
 C CARD 3. (REPEAT NN TIMES.) MAN396C
 C COL 11 TO 20 1-COORDINATE OF BOUNDARY-DEFINING-POINT. MAN397C
 C COL 21 TO 30 2-COORDINATE OF BOUNDARY-DEFINING-POINT. MAN398C
 C COL 31 TO 40 3-COORDINATE OF BOUNDARY-DEFINING-POINT. MAN399C
 C MAN400C
 C MAN401C
 C NOTE: BLOCK GENERATES ONLY 4 PT. QUADRILATERALS OR 8 PT. BRICKS. MAN402C
 C INPUT OF CARDS 3.) FOLLOW ORDER RULES FOR ELEMENT INPUT (SEE 5.) MAN403C
 C R-S-T ARE LOCAL COORDINATES, I.E. (-1 .LE. R+S+T .LE. 1.) MAN404C
 C WHERE R IS DIRECTED FROM NODE 1 TO 2, S IS IN PLANE OF FIRST THREE MAN405C
 C NODES, AND T IS NORMAL TO R-S PLANE. MAN406C
 C MAN407C
 C MAN408C
 C 6.) VECTOR CARDS, I.E. USER DEFINED INPUT (15, 1X, A6) MAN409C
 C COL 1 TO 5 NVEC, NUMBER OF DIFFERENT VECTORS (7 MAX) MAN410C
 C COL 7 TO 12 MUST CONTAIN VECTOR MAN411C
 C MAN412C
 C SUBSEQUENT CARDS MAN413C
 C MAN414C
 C CARD 1. (215) MAN415C
 C COL 1 TO 5 NSIZV, VECTOR LENGTH, COMMON TO ALL NVEC VECTORS MAN416C
 C COL 6 TO 10 IPICK, CODED PARAMETER. MAN417C
 C MAN418C
 C MAN419C
 C IPICK = 0, VECTORS ASSOCIATED WITH NODES MAN420C
 C IPICK = 1, VECTORS ASSOCIATED WITH DEG. FREEDOM MAN421C
 C IPICK = 2, VECTORS ASSOCIATED WITH ELEMENTS MAN422C
 C MAN423C
 C CARD 2. (6X, 2A6) REPEAT NVEC TIMES MAN424C
 C MAN425C

C COL 7 TO 18 DESCRIPTIVE TITLE FOR VECTOR MAN426C
 C CARD 3. (2I5,7F10,0) MAN427C
 C MAN428C
 C COL 1 TO 5 POSITION NUMBER OF VECTOR ELEMENT, 1 TO NSIZV MAN429C
 C COL 11 TO 20 VECTOR ELEMENT VALUE OF VECTOR 1 MAN430C
 C COL 6 TO 10 GENERATOR INCREMENT MAN431C
 C COL 21 TO 30 VECTOR ELEMENT VALUE OF VECTOR 2 MAN432C
 C COL AS REQUIRED FOR NVEC VECTORS MAN433C
 C MAN434C
 C MAN435C
 C LINEAR INTERPOLATION IS PERFORMED ON ALL VECTORS BETWEEN MAN436C
 C NON-CONSECUTIVE POSITION NUMBERS SPECIFIED IN COL 1 TO 5 IF MAN437C
 C INCREMENT IS NONZERO. MAN438C
 C IF DESCRIPTIVE TITLES OF ALL VECTORS ARE BLANK CARDS, PRINTING MAN439C
 C OF THE VECTOR VALUES IS SUPPRESSED. MAN440C
 C MAN441C
 C * TERMINATE ON BLANK CARD * MAN442C
 C MAN443C
 C 6.1) INITIAL CONDITIONS FOR TIME DEPENDENT ANALYSIS. MAN444C
 C COL 1 TO 5 NICO, NUMBER OF INITIAL CONDITION VECTORS MAN445C
 C COL 7 TO 12 MUST CONTAIN INITIA MAN446C
 C MAN447C
 C SUBSEQUENT CARDS MAN448C
 C MAN449C
 C CARD 1. (6X,2A6) REPEAT NICO TIMES MAN450C
 C MAN451C
 C COL 7 TO 18 DESCRIPTIVE TITLE FOR INITIAL CONDITIONS MAN452C
 C CARD 2. (2I5,7F10,0) MAN453C
 C MAN454C
 C COL 1 TO 5 POSITION NUMBER, AS IN VECTOR CARDS FOR IPICK=1 MAN455C
 C COL 6 TO 10 GENERATOR INCREMENT MAN456C
 C COL 11 TO 20 INITIAL CONDITION 1 MAN457C
 C COL 21 TO 30 INITIAL CONDITION 2 MAN458C
 C COL AS REQUIRED FOR NICO INITIAL CONDITIONS MAN459C
 C MAN460C
 C INTERPOLATION BETWEEN INPUT VALUES AS DESCRIBED IN VECTOR INPUT. MAN461C
 C *** NOTE *** IF MISSING THE INITIAL CONDITIONS ARE SET ZERO MAN462C
 C MAN463C
 C MAN464C
 C 6.2) TWO AND THREE DIMENSIONAL PLOTTING PORTHOLE. (TAPE30)
 C COL 1 TO 5 NSTEP, NUMBER OF TIME STEPS TO BE PLOTTED
 C COL 7 TO 12 MUST CONTAIN PLOT
 C THIS PLOT CONTROL CARD WRITES ALL INFORMATION TO TAPE30
 C FOR USE IN PROGRAM PLOT2D) IF NDIM = 2. IF NDIM = 3, A THREE
 C DIMENSIONAL PORTHOLE RECORD IS WRITTEN IN SUBROUTINE PLOT2D.
 C MAN465C
 C 7.) FORCE CARDS (I5,IX,A6) MAN466C
 C COL 1 TO 5 LAST NODE TO WHICH A FORCE IS TO BE SPECIFIED MAN467C
 C COL 7 TO 12 MUST CONTAIN FORCE MAN468C
 C MAN469C
 C SUBSEQUENT CARDS (I5,5X,6F10,0) MAN470C
 C MAN471C
 C THE FOLLOWING VALUES ARE EACH INTERPRETTED AS FORCES IF THE
 C CORRESPONDING BOUNDARY CODE IS A 0 *ZERO* AND AS A DISPLACEMENT
 C IF THE CORRESPONDING BOUNDARY CODE IS 1 *ONE*. MAN472C
 C MAN473C
 C COL 1 TO 5 NODE TO WHICH FORCE OR DISPLACEMENT IS APPLIED MAN474C
 C COL 11 TO 20 VALUE OF 1 FORCE/DISPLACEMENT * AS * MAN475C
 C COL 21 TO 30 VALUE OF 2 FORCE/DISPLACEMENT * AS * MAN476C
 C COL 31 TO 40 VALUE OF 3 FORCE/DISPLACEMENT * REQUIRED * MAN477C
 C COL 41 TO 50 VALUE OF 4 FORCE/DISPLACEMENT MAN478C
 C COL 51 TO 60 VALUE OF 5 FORCE/DISPLACEMENT MAN479C
 C COL 61 TO 70 VALUE OF 6 FORCE/DISPLACEMENT MAN480C
 C MAN481C
 C MAN482C
 C MAN483C
 C MAN484C
 C MAN485C
 C 7.1) SURFACE LOAD CARDS (I5,IX,A6) MAN486C
 C MAN487C

C	COL 1 TO 5	NUMBER OF LOADED FACE CARDS	MAN488C
C	COL 7 TO 12	MUST CONTAIN BLOADS	MAN489C
C	CARD 1. (15,1X,A5,14,8(5,8)3)		MAN490C
C	COL 1 TO 5	DIMENSION OF LOADING SURFACE, (1 OR 2).	MAN491C
C	COL 7 TO 11	SLD(NN), ALPHA-NUMERIC NAME OF SURFACE LOADING	MAN492C
C		SUBROUTINE (NN IS BETWEEN 1 AND 5)	MAN493C
C	COL 12 TO 15	NMT, NUMBER OF ADDITIONAL ELEMENT LOAD	MAN494C
C		SURFACES TO BE GENERATED FROM CURRENT MODEL.	MAN495C
C	COL 16 TO 20	IPRES(N), NODE NUMBERS DEFINING LOADING SURFACE	MAN496C
C	COL 21 TO 25	OF CURRENT ELEMENT.	MAN497C
C	COL ...	(IDENTIFY FROM 2 TO 8 AS REQUIRED)	MAN498C
C	COL 51 TO 55		MAN499C
C	COL 56 TO 58	INC(N), INCREMENT VALUE ADDED TO IPRES(N) TO	MAN500C
C	COL 59 TO 61	IDENTIFY NODE NUMBERS OF A GENERATED SEQUENCE.	MAN501C
C	COL ...	(IDENTIFY FROM 2 TO 8 AS REQUIRED)	MAN502C
C	CARD 2. (8F10,0)		MAN503C
C	COL 1 TO 80	LOAD AT NODES GIVEN ON PREVIOUS CARD.	MAN504C
C		MUST CORRESPOND IN SEQUENCE TO THE NODE NUMBERS	MAN505C
C	7.2) ELEMENT LOAD CARDS (15,1X,A6)		MAN506C
C	COL 1 TO 5	NLD, NUMBER OF ELEMENT LOAD CARDS.	MAN507C
C	COL 7 TO 11	MUST CONTAIN ELOADS	MAN508C
C	SUBSEQUENT CARDS (15,1X,A5,14,15,6F10,0)		MAN509C
C	COL 1 TO 5	IEL, INITIAL ELEMENT OF A GENERATED SEQUENCE.	MAN510C
C	COL 7 TO 11	ELM(NN), ALPHA-NUMERIC NAME OF ELEMENT	MAN511C
C		SUBROUTINE WHERE ELEMENT LOADS ARE COMPUTED,	MAN512C
C		USED AS CHECK TO INSURE IEL, ET,Z ARE PROPER	MAN513C
C		ELEMENTS.	MAN514C
C	COL 12 TO 15	INC, INCREMENT NUMBER IN A GENERATED SEQUENCE,	MAN515C
C		(DEFAULT = 1).	MAN516C
C	COL 16 TO 20	JEL, TERMINAL ELEMENT NUMBER IN A GENERATED	MAN517C
C		SEQUENCE, IF JEL = 0, ONLY IEL IS COUNTED.	MAN518C
C	COL 21 TO 80	USER DEFINED VALUES FOR DETERMINING BODY LOADS	MAN519C
C		IN THE ISW=5 PORTION OF ELM(NN).	MAN520C
C	NOTE: USER MUST PROVIDE COMPUTATION OF LOADS IN ELM(NN).		MAN521C
C	OR IS TRANSFERRED TO SUBROUTINE ELM(NN) IN THE U VECTOR,		MAN522C
C	WHEN ISW = 5, ONLY.		MAN523C
C	7.3) PROPORTIONAL LOADS FOR TIME DEPENDENT ANALYSIS		MAN524C
C	TRANSFER TO THIS OPTION OCCURS ONLY FOR TIME ANALYSES.		MAN525C
C	ONE CARD FOR EACH PROPORTIONAL LOAD REQUIRED		MAN526C
C	COL 1 TO 5	PROPORTIONAL LOAD TYPE, 1+2 OR 3	MAN527C
C	COL 6 TO 10	K, TABLE CONSTANT	MAN528C
C	COL 11 TO 20	TMIN, SMALLEST TIME LOADING IS VALID	MAN529C
C	COL 21 TO 30	TMAX, LARGEST TIME LOADING IS VALID	MAN530C
C	COL 31 TO 40	A0	MAN531C
C	COL 41 TO 50	A1	MAN532C
C	COL 51 TO 60	A2	MAN533C
C	COL 61 TO 70	A3	MAN534C
C	COL 71 TO 80	A4	MAN535C
C	LOAD TYPE 1. 1 = TIME		MAN536C
C	PROP = A0 + A1*T + A2*T*T + A3*T*T*T + A4*T*T*T*T		MAN537C
C	LOAD TYPE 2.		MAN538C
C	PROP = A0*(SIN(A1*T))*K + A2*(COS(A3*T))*K + A5		MAN539C
C			MAN540C
C			MAN541C
C			MAN542C
C			MAN543C
C			MAN544C
C			MAN545C
C			MAN546C
C			MAN547C
C			MAN548C
C			MAN549C
C			MAN550C
C			MAN551C
C			MAN552C
C			MAN553C
C			MAN554C
C			MAN555C
C			MAN556C
C			MAN557C
C			MAN558C
C			MAN559C

C LOAD TYPE 3. MAN560C
 C PROP = USER DEFINED FUNCTION FROM SUBROUTINE EXPRLO(PROP,T) MAN561C
 C MAN562C
 C MAN563C
 C **NOTE** PROPORTIONAL LOADS CAN BE ACCUMULATED FROM DIFFERENT MAN564C
 C TYPES AT THE SAME TIME. MAN565C
 C MAN566C
 C B.) INITIATION OF TIME INDEPENDENT SOLUTION (15,1X,A6) MAN567C
 C COL 1 TO 4 IOUT, OUTPUT CONTROL CODE. MAN568C
 C IOUT = 0, ALL STRESSES AND DISP. PRINTED MAN569C
 C IOUT = 1, 0, SELECTED PRINTOUT, MORE DATA INPUT MAN570C
 C SEE SECTION 9 FOR DATA PREPARATION. MAN571C
 C COL 7 TO 12 MUST CONTAIN SOLVE *INDICATES ALL DATA INPUT* MAN572C
 C COMPLETE FORMULATION AND SOLUTION OF EQUATIONS. MAN573C
 C COL 7 TO 12 MUST CONTAIN RESOLVE TO OBTAIN SUBSEQUENT MAN574C
 C SOLUTIONS WHERE BOUNDARY CODES DO NOT CHANGE
 C AND ALL PRESCRIBED DISPLACEMENTS ARE ZERO. MAN575C
 C MAN576C
 C B.1) INITIATION OF DYNAMIC SOLUTION BY EXPLICIT INTEGRATION. MAN577C
 C COL 1 TO 4 IOUT, OUTPUT CONTROL FOR DISPLACEMENT AND MAN578C
 C STRESS PRINTOUT. SEE SECT. 9 FOR DATA INPUT.
 C IF IOUT = 0, THE SPATIAL CONTROL DATA MAN579C
 C COMES AT THE END OF THE DYNAMIC SEGMENT. MAN580C
 C COL 7 TO 12 MUST CONTAIN EXPLIC MAN581C
 C MAN582C
 C SUBSEQUENT CARDS (215,2F10,0,215) MAN583C
 C COL 1 TO 5 NUMBER OF TIME STEPS MAN584C
 C COL 6 TO 10 PRINT INTERVAL MAN585C
 C COL 11 TO 20 TIME INCREMENT MAN586C
 C COL 21 TO 30 NEWMARK DELTA-DAMPING TERM (GAMMA = .5) MAN587C
 C COL 31 TO 35 NUMBER OF TIME EVOLUTION STRESS PLOTS. MAN588C
 C COL 36 TO 40 NPROP, NUMBER OF PROPORTIONAL LOADS TO BE INPUT MAN589C
 C COL 41 TO 45 NFORC, LAST NODE ON WHICH A FORCE IS CHANGED
 C DURING EACH TIME STEP. MAN590C
 C COL 46 TO 50 KKK, STABILITY CHECK OVERRIDE ** CAUTION USE
 C ONLY WHEN A BETTER ESTIMATE OF THE STABLE TIME
 C STEP IS AVAILABLE THAN CAN BE PERFORMED BY CODE
 C KKK ZERO, USES INTERNAL STABILITY CHECK. MAN591C
 C KKK NONZERO, DISREGARDS STABILITY CHECK. MAN592C
 C MAN593C
 C SUBSEQUENT CARDS (315) ONE FOR EACH STRESS PLOT. MAN594C
 C COL 1 TO 5 ELEMENT NUMBER CONTAINING STRESS TO BE PLOTTED. MAN595C
 C COL 6 TO 10 LOCAL COORDINATE POINT CODE, 1 TO 7, AS
 C PATTERNED AFTER, COL 11 TO COL 17, IN SOLVE. MAN596C
 C COL 11 TO 15 STRESS COMPONENT CODE, 1 TO 6 FOR SIGMA(I,J),
 C I.E., SIGMA(1,1)=1, SIGMA(1,2)=2, SIGMA(1,3)=3,
 C SIGMA(2,2) = 4, SIGMA(2,3) = 5, SIGMA(3,3) = 6. MAN597C
 C MAN598C
 C IF (NPROP,NE,0) READ PROPORTIONAL LOAD CARDS, SEE SECT. 7.3 MAN599C
 C MAN600C
 C IF (NFORC,NE,0) READ FORCE CARDS AT EACH TIME STEP. IF OUTPUT IS
 C LIMITED BY IOUT NONZERO, THE FIRST FORCE CARD SET PRECEDES
 C OUTPUT CARDS AND THE REMAINDER FOLLOW THE OUTPUT CARDS NO BLANK
 C CARDS MAY BE USED BETWEEN SETS OF CARDS OTHER THAN THE USUAL
 C BLANK TERMINATOR CARD FOR FORCE INPUT CARDS. MAN601C
 C MAN602C
 C IF (IOUT,NE,0) DATA FOR SPATIAL PRINTOUT CONTROL, SEE SECT.9. MAN603C
 C MAN604C
 C MAN605C
 C SPECIAL COMMENTS FOR DYNAMIC OPTION MAN606C
 C (1) ONLY COLUMNS 1 TO 60 ARE AVAILABLE FOR PAGE HEADING. MAN607C
 C (2) MAXIMUM ADVANTAGE OF ELEMENT REUSE OPTION SHOULD BE TAKEN. MAN608C
 C (3) INITIAL CONDITIONS FOR DISPLACEMENT AND VELOCITY VECTORS,
 C AS WELL AS STORAGE FOR ACCELERATION VECTOR, MAY BE MADE
 C THROUGH INPUT OF AN INITIAL CONDITION CARD SET, WITHOUT
 C MAN609C
 C MAN610C
 C MAN611C
 C MAN612C
 C MAN613C
 C MAN614C
 C MAN615C
 C MAN616C
 C MAN617C
 C MAN618C
 C MAN619C
 C MAN620C
 C MAN621C
 C MAN622C
 C MAN623C
 C MAN624C
 C MAN625C
 C MAN626C
 C MAN627C
 C MAN628C
 C MAN629C
 C MAN630C
 C MAN631C

C SPECIFIED INITIAL CONDITIONS THEY ARE AUTOMATICALLY SET ZERO. MANA32C
 C (4) SPATIAL LOADING IS INPUT THROUGH FORCE OR BOUNDARY MANA33C
 C PRESSURE CARDS. ALL LOADS VARY PROPORTIONALLY WITH TIME MANA34C
 C (5) EXTREME CAUTION ON ORDER OF DATA CARDS MUST BE OBSERVED. NO MANA35C
 C EXTRA CARDS ARE PERMITTED AND STRICT COUNTS ARE OBSERVED MANA36C
 C EXCEPT FOR THE NUMBER OF FORCE CARDS USED IN EACH TIME STEP. MANA37C
 C MANA38C
 C
 C 8.2) INITIATION OF IMPLICIT TIME INTEGRATIONS (15,1X,A6) MANA39C
 C
 C COL 1 TO 5 NSEQ, NUMBER OF TIME SEQUENCES MANA40C
 C COL 7 TO 12 MUST CONTAIN VISCOE FOR LINEAR VISCOELASTIC MANA41C
 C QUASI-STATIC PROBLEMS (ONE INITIAL CONDITION
 C ONLY MUST BE USED) MANA42C
 C COL 7 TO 12 MUST CONTAIN IMPLIC FOR DYNAMIC IMPLICIT MANA43C
 C INTEGRATIONS (THREE INITIAL CONDITIONS ARE
 C REQUIRED, MORE CAN BE SPECIFIED WITHOUT ERROR) MANA44C
 C MANA45C
 C MANA46C
 C MANA47C
 C MANA48C
 C
 C SUBSEQUENT CARDS, ONE SET FOR EACH TIME SEQUENCE MANA49C
 C
 C CARD 1. (F10,0,815*2F10,0) MANA50C
 C
 C COL 1 TO 10 DT, TIME INCREMENT (NONZERO FOR IMPLIC) MANA51C
 C COL 11 TO 15 NTS, NUMBER OF TIME STEPS IN SEQUENCE MANA52C
 C COL 16 TO 20 INT, PRINT INTERVAL (DEFAULT 1) MANA53C
 C COL 21 TO 25 NNI, FIRST NODE PRINTED MANA54C
 C COL 26 TO 30 NNE, LAST NODE PRINTED MANA55C
 C COL 31 TO 35 NEI, FIRST ELEMENT STRESS TO BE PRINTED MANA56C
 C COL 36 TO 40 NEF, LAST ELEMENT STRESS TO BE PRINTED MANA57C
 C COL 41 TO 45 NPROP, NUMBER OF PROPORTIONAL LOADS IN SEQUENCE MANA58C
 C COL 46 TO 50 NFORC, LAST NODE FOR GENERALIZED FORCES TO BE
 C INPUT FOR EACH TIME IN SEQUENCE (SEE SECT.7.
 C FOR DATA PREPARATION FORMATS) MANA59C
 C
 C COL 51 TO 60 BETA, NEWMARK INTEGRATION PARAMETER (IMPLIC) MANA60C
 C COL 61 TO 70 DEL = GAMMA = 0.5, NEWMARK INTEGRATION
 C PARAMETER (IMPLIC) MANA61C
 C MANA62C
 C MANA63C
 C
 C CARD 2. (215,7F10,0) MANA64C
 C
 C ONE FOR EACH NPROP. SEE SECT.7.3 FOR DATA PREPARATION MANA65C
 C
 C SUBSEQUENT CARDS FOR EACH TIME STEP IN THE SEQUENCE MANA66C
 C
 C FORCE CARDS. SEE SECTION 7. FOR DATA PREPARATION FORMATS. MANA67C
 C MANA68C
 C
 C *** SPECIAL USE OF SECTION 8.2 FOR STATIC RUNS WITH REPEATED
 C LOAD CASES ...
 C
 C NSEQ = 1
 C CONTROL WORD = VISCOE
 C DT = -1. (MINUS)
 C NTS = NUMBER OF LOAD CASES PLUS 1
 C INT = 1
 C NPROP = 0
 C NNI, NNE, NEI, NEF AS DEFINED ABOVE
 C NFORC = HIGHEST NODE OF ALL LOAD CASES WITH NON-ZERO LOAD
 C
 C *** USE FORCE DATA INPUT, SECTION 7., FOR EACH LOAD CASE
 C BACK TO BACK, WHERE LAST NODE = NFORC. NOTE LAST NODE
 C MAY OR MAY NOT HAVE NON-ZERO FORCES. THE LAST LOAD CASE
 C IS A DUMMY CASE.
 C
 C
 C 9.) OUTPUT CONTROL FOR LIMITED PRINTS MANA77C
 C
 C DISPLACEMENT OUTPUT CONTROL, IF IOUT .NE. 0, MANA78C
 C
 C CARD 1. (15) MANA79C
 C
 C COL 1 TO 5 NUPDIS = NUMBER OF DISPLACEMENT PRINT CARDS MANA80C
 C MANA81C
 C MANA82C
 C MANA83C
 C MANA84C
 C MANA85C

```

C          SUBSEQUENT CARDS (215) SKIP IF NUMDIS = 0
C
C          COL 1 TO 5   NODAL NUMBER TO BE OUTPUT.
C          COL 6 TO 10  HIGHER NODE NUMBER OF A GENERATED SEQUENCE,
C                       IF ZERO JUST FIRST NODE IS COUNTED.
C          COL 11 TO 15 INCREMENT TO GENERATOR, DEFAULT = 1
C                       *** REPEAT UNTIL NUMDIS CARDS HAVE BEEN READ
C
C          STRESS OUTPUT CONTROL, IF IOUT .NE. 0.
C
C          CARD 1: (15,5X,11)
C
C          COL 1 TO 5   NUMSTR - NUMBER OF STRESS OUTPUT CARDS
C          COL 11 TO 17 NSIG(7) - PRINT PATTERN WITHIN AN ELEMENT.
C                       LOCAL POINTS OF EACH ELEMENT CAN BE
C                       SUPPRESSED BY NON-ZERO ENTRIES AS FOLLOWS,
C                       E.G.
C          COL 11      SUPPRESS PRINT AT LOCAL POINT 1, ( 0, 0, 0)
C          COL 12      SUPPRESS PRINT AT LOCAL POINT 2, (-1, 0, 0)
C          COL 13      SUPPRESS PRINT AT LOCAL POINT 3, ( 1, 0, 0)
C          COL 14      SUPPRESS PRINT AT LOCAL POINT 4, ( 0, -1, 0)
C          COL 15      SUPPRESS PRINT AT LOCAL POINT 5, ( 0, 1, 0)
C          COL 16      SUPPRESS PRINT AT LOCAL POINT 6, ( 0, 0, -1)
C          COL 17      SUPPRESS PRINT AT LOCAL POINT 7, ( 0, 0, 1)
C
C          SUBSEQUENT CARDS (215) SKIP IF NUMSTR = 0
C
C          COL 1 TO 5   ELEMENT NUMBER TO BE PRINTED.
C          COL 6 TO 10  HIGHER ELEMENT NUMBER OF A GENERATED SEQUENCE,
C                       IF ZERO ONLY FIRST ELEMENT IS COUNTED.
C          COL 11 TO 15 INCREMENT TO GENERATOR, DEFAULT = 1
C                       *** REPEAT UNTIL NUMSTR CARDS HAVE BEEN READ
C
C.....
C
C          RETURN
C          END
C *DECK FELMT
C          SUBROUTINE FELMT(UT,ISZDT,MBAND)
C
C          MAIN ASSEMBLY PROGRAM AND STORAGE ALLOCATION FOR VARIABLES
C
C          REAL LABEL
C          LOGICAL CHECK,FLAG,NPL
C          DIMENSION CONWD(24),FLAG(7),TITLE(12),TYPE(7),DT(15ZDT),RE(2)
C          DIMENSION NEWBUF(15)
C          COMMON /TAPES/ ITP5,ITP6
C          COMMON /FORIER/ NF(5),XN,F1,F2,F3,F4
C          COMMON /GAUSS/ LIM,SGAUSS(5,5),WGAUSS(5,5)
C          COMMON /LABELS/ LABEL(6),XHED(3),XM,FHED(6),FH,UHED(6),RH
C          X ,AWOR01,AWOR02,AWOR03,HEAD(12),START,CEASE,IPG,NSTR,WOR0(30)
C          COMMON /SHAPE/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)
C          COMMON /TTLES/ XTIL(3),UTTL(6)
C          COMMON /VALUES/ NC1,CUN1,CUN2,CUN3(3)
C          COMMON /DYNAMO/ TIME,NSIG(7),NI,NSIEP,DS,NUMPLT,NEDATA(20,3),NPR,NPL
C          COMMON /PLOTS/ IPLO1
C
C          CXXXXXX
C          PUT IN COMMON TO HOLD NODE RENUMBERING ARRAY
C          CXXXXXX
C          COMMON /MINBW/ NEW(1500)
C          DATA CONWD/ EHMATERI,6HNODAL,6HPOLAR,6HELEMEN,6HSOLVE,6HRESOLV,
C          X EHROUNDA,6HFORCE,6HBLUADS,6HELUADS,6HVECTOR,6NMESH,6HPLOT,
C          X 6HFUORIF,6HREMARK,6HINITIA,6HGENERA,6HITILE,6HBLOCK,6HEXPLOC,
C          X 6HADDDUP,6HVISCOE,6HMIMPIC,6MNEWTON/
C          DATA RE/4NUT,4H /,BLANX/6H /
C          DATA NFLAG,NLIST/7,24/,M1,M2,M3,M4,M5,M6,MB/7*1/,ITA/9/
C          DATA NHW/1H1/
C          RE*IND 30
C
C          C
C          C**** INITIATE SEARCH FOR START OF PROBLEM
C          100 READ (ITP5,1000) CC,HEAD,MBW

```

```

MAN680C
MAN681C
MAN682C
MAN683C
MAN684C
MAN685C
MAN686C
MAN687C
MAN688C
MAN689C
MAN690C
MAN691C
MAN692C
MAN693C
MAN694C
MAN695C
MAN696C
MAN697C
MAN698C
MAN699C
MAN700C
MAN701C
MAN702C
MAN703C
MAN704C
MAN705C
MAN706C
MAN707C
MAN708C
MAN709C
MAN710C
MAN711C
MAN712C
MAN713C
MAN714C
MAN715C
MAN716C
MAN717C
MAN718C
MAN719C
MAN720C
MAN721C
MAN722C
MAN723C
FEL 1C
FEL 2C
FEL 3C
FEL 4C
FEL 5C
FEL 6C
FEL 7C
FEL 8C
FEL 9C
FEL 10C
FEL 11C
FEL 12C
FEL 13C
FEL 14C
FEL 15C
FEL 16C
FEL 17C
FEL 18C
FEL 19C
FEL 20C
FEL 21C
FEL 22C
FEL 23C
FEL 24C

```

	CC=HEAD(1)	FEL 26C
	IF (CC.EQ.START) GO TO 240	FEL 27C
	IF (CC.EQ.6HFEAP73) GO TO 240	
	IF (CC.EQ.CEASE) RETURN	FEL 28C
	GO TO 100	FEL 29C
120	CONTINUE	FEL 30C
	DO 122 I=1,12	FEL 31C
122	HEAD(I)=TITLE(I)	FEL 32C
	CXXXX	
	C IF CC 79 OF FEAP73 CARD IS NON-ZERO THEN READ NODE	
	C CORRESPONDENCE ARRAY PUNCHED IN PREPROCESSOR	
	CXXXX	
240	DO 600 I=1,1500	
600	NEW(I)=1	
	IF (MBA*NE*MBW1) GO TO 650	
	J=0	
	K=0	
605	HEAD (5*631) I,NEWBUF	
601	FORMAT (1615)	
	J=J+1	
	IF (I.EQ.9999) GO TO 650	
	IF (I.LQ.J) GO TO 610	
	WRITE (5,602)	
	STOP 1	
602	FORMAT (60H0** ERROR ** NODE RESEQUENCING CARD OUT OF ORDER.)	
610	DO 615 I=1,15	
	K=K+1	
	IF (NEWBUF(I).NE.0) NEW(K)=NEWBUF(I)	
615	CONTINUE	
	GO TO 605	
	C	
650	READ (1TP5,1000) CC,TITLE	
	NDIM = CC	FEL 34C
	DO 150 I = 1,NDIM	FEL 35C
	CC = TITLE(I)	FEL 36C
	XHEAD(I) = CC	FEL 37C
	IF (CC.EQ.BLANK) XHEAD(I) = XTIL(I)	FEL 38C
150	CONTINUE	FEL 39C
	READ(1TP5,1000) CC,TITLE	FEL 40C
	NDF = CC	FEL 41C
	DO 152 I = 1,NDF	FEL 42C
	CC = TITLE(I)	FEL 43C
	IF (CC.EQ.BLANK) CC = UTTL(I)	FEL 44C
	FHEAD(I) = CC	FEL 45C
	UHEAD(I) = CC	FEL 46C
152	FHEAD(I) = CC	FEL 47C
	NUMFL = 0	FEL 48C
	READ(1TP5,1001) NEN,NEXTRA,IREC,MHAN,IBUF,NC1,CON1,CUN2,CON3	FEL 49C
	DO 153 I=1,NDIM	
153	IF (CON3(I).EQ.0.0) CON3(I) = 1.0	FEL 50C
	IF (MBA*LE.0) MHAN = MBAND	FEL 51C
	ISIZ = ISZDI	FEL 52C
	IDI = ISZDI/2	FEL 53C
	NICO = 0	FEL 54C
	NVEC = 0	FEL 55C
	NPL = .TRUE.	FEL 56C
	NUMPLI = 0	FEL 57C
	NI = 1	
	IPLOT = 0	
	C.... INITIALISE TIME AND CLOCK	FEL 58C
	CALL TIC(CLOCKTIME,0)	FEL 59C
	DO 121 I=1,7	FEL 60C
121	TIME(I) = 0.0	FEL 61C
	NFLT = NEN * 2	FEL 62C
	NTERM = 0	FEL 64C
	DO 10 I=1,NFLAG	FEL 65C
10	FLAG(I) = .FALSE.	FEL 66C
	C	FEL 67C
	C.... STORAGE IS SET FOR A NSTF X NSTF ELEMENT MATRIX AND FORCE VECTOR	FEL 68C
	C.... MAXIMUM SIZE FOR NSTF IS 120; THIS IS CONTROLLED BY DIMENSION ON LD	FEL 69C
	C	FEL 70C
	NSTF = NDF*NEN + NEXTRA	FEL 71C

```

      M9 = 4*NSIF + 1
      N9 = NSIF*(NSIF+2) + 1
      IF (M9.GT.10T) GO TO 710
      IPG=1
      IF (IHUF.LE.0) IHUF = ISZDT/20
      IF (IIRC.NE.0) IIRC = 1
      WRITE (IIPA,2000) HEAD,IPG,NDIM,NDF,NEN,NSIF,ME(IIRC*1),MBAN,IBUF,
X      NC1,CON1,CON2,CON3
      IPG = IPG + 1
      IF (NDIM.GT.3.OR.NDF.GT.6.OR.NEN.GT.20) GO TO 720
C
C.... SEARCH THE LIST OF NAMES FOR A TRANSFER ADDRESS
C
125 HEAD (IIPS,1000) CC,TITLE,MBW
      I = CC
      CC=TITLE(1)
      DO 126 J = 1,NLIST
      IF (CC.EQ.CONN(J)) GO TO 127
126 CONTINUE
      IF (CC.EQ.START) GO TO 12C
      IF (CC.EQ.DMFAP73) GO TO 120
      IF (CC.EQ.CEASE) RETURN
      GO TO 125
C
C.... NAMES (MAT,NOD,POL,ELE,SOL,RES,BCS,FOR,BLD,ELD,VEC,MES,PLU,FOU,REM,
127 GO TO(210,220,226,230,200,270,228,260,250,255,245,200,350,200,131,
X 345,221,133,220,400,200,200,200,200),J
C.... ICD,GEN,II,BLD,EXP,ADD,VIS,IMP,NEW)
C
131 WRITE (IIPA,2003) (TITLE(I),I=2,12)
      GO TO 125
133 DO 134 I = 2,12
134 HEAD(I) = TITLE(I)
      GO TO 125
C
C.... INPUT THE MATERIAL CHARACTERIZATIONS.
C
210 J = 1
      IF (FLAG(1)) GO TO 215
      FLAG(1) = .TRUE.
      IF (I.LE.0) GO TO 700
      NUMMAT = 1
      M1 = M0
      M2 = M0 * NUMMAT
      M3 = M0 * 64 * NUMMAT
215 IF (M0.GT.1520T) GO TO 710
      CALL FESH(J,NUMNP,NUMEL,NUMMAT,NDIM,NDF,NEN,NEL),
X      DI(M1),DI(M2),DI(M3),DI(M4),DI(M5),DI(M6))
      IF (IPG.LE.0) GO TO 100
      GO TO 125
C
C.... INPUT THE NODAL LOCATIONS AND BOUNDARY CONDITION CODES.
C
220 IF (FLAG(2)) GO TO 225
      FLAG(2) = .TRUE.
      IF (I.LE.0) GO TO 700
      NUMNP = 1
      M3 = M0
      M4 = M0 * NUMNP
      M5 = M4 * NDIM * NUMNP
      M6 = M5 * NDF * NUMNP
      IF (M0.GT.1520T) GO TO 710
      IF (.NOT.FLAG(3)) M6 = M0
225 CONTINUE
      IF (CC.EQ.CONWD(19)) GO TO 227
      J = 2
      IF (CC.EQ.CONWD(17)) J = 4
      GO TO 215
226 IF (.NOT.FLAG(2)) GO TO 730
      CALL CONVERT(NUMNP,NDIM,DI(M4))
      GO TO 125
227 CONTINUE

```

```

FEL 72C
FEL 73C
FEL 74C
FEL 75C
FEL 76C
FEL 77C
FEL 78C
FEL 79C
FEL 80C
FEL 81C
FEL 82C
FEL 83C
FEL 84C
FEL 86C
FEL 87C
FEL 88C
FEL 89C
FEL 90C
FEL 91C
FEL 92C
FEL 93C
FEL 94C
FEL 95C
FEL 97C
FEL 98C
FEL 99C
FEL100C
FEL101C
FEL102C
FEL103C
FEL104C
FEL105C
FEL106C
FEL107C
FEL108C
FEL109C
FEL110C
FEL111C
FEL112C
FEL113C
FEL114C
FEL115C
FEL116C
FEL117C
FEL118C
FEL119C
FEL120C
FEL121C
FEL122C
FEL123C
FEL124C
FEL125C
FEL126C
FEL127C
FEL128C
FEL129C
FEL130C
FEL131C
FEL132C
FEL133C
FEL134C
FEL135C
FEL136C
FEL137C
FEL138C
FEL139C
FEL140C
FEL141C
FEL142C

```

CALL HRKGEN(NUMNP,NUMEL,NDIM,NDF,NEN,NEL1,DT(M3),DT(M4),DT(M5),	FEL143C
X DT(M6))	FEL144C
IF(IPG.LE.0) GO TO 705	FEL145C
IF(.NOT.FLAG(3)) M0 = M0 + NEL1*NUMEL	FEL146C
FLAG(3) = .TRUE.	FEL147C
IF(M0.GT.15ZDT) GO TO 710	FEL148C
GO TO 125	FEL149C
C	FEL150C
C... BOUNDARY CODE OVERWRITE	FEL151C
C	FEL152C
228 IF(.NOT.FLAG(2)) GO TO 730	FEL153C
CALL HCOPIES(NUMNP,DT(M3))	FEL154C
GO TO 125	FEL155C
C	FEL156C
C... INPUT THE ELEMENT CONNECTION ARRAY.	FEL157C
C	FEL158C
230 J = 3	FEL159C
IF(FLAG(3)) GO TO 215	FEL160C
FLAG(J) = .TRUE.	FEL161C
IF(I.LE.0) GO TO 700	FEL162C
NUMEL = I	FEL163C
M6 = M0	FEL164C
M0 = M0 + NEL1*NUMEL	FEL165C
GO TO 215	FEL166C
C	FEL167C
C... INPUT THE VECTORS OF PRESCRIBED VALUE.	FEL168C
C	FEL169C
245 IF(.NOT.FLAG(2)) GO TO 730	FEL170C
IF(I.LE.0) GO TO 700	FEL171C
IF(FLAG(4)) GO TO 247	FEL172C
FLAG(4) = .TRUE.	FEL173C
READ(1,PS,1001) NSIZV,IPICK	FEL174C
NVEC = I	FEL175C
M8 = M0	FEL176C
M4 = M8 + NSIZV*I	FEL177C
M0 = M4	FEL178C
IF(M0*2*I.GT.15ZDT) GO TO 710	FEL179C
CALL VECIN (NUMNP,NUMEL,NDF,NSIZV,IPICK,NVEC,DT(M4),DT(M8))	FEL180C
IF(IPG.LE.0) GO TO 100	FEL181C
GO TO 125	FEL182C
250 CONTINUE	FEL183C
IF(I.LE.0) GO TO 125	FEL184C
C	FEL185C
C... INPUT BOUNDARY LOADS	FEL186C
C	FEL187C
CALL HLOADS(I,NUMNP,NDIM,NDF,DT(M3),DT(M4),DT(M5))	FEL188C
IF(IPG.LE.0) GO TO 705	FEL189C
GO TO 125	FEL190C
C	FEL191C
C... INPUT ELEMENT LOADS	FEL192C
C	FEL193C
255 IF(I.LE.0) GO TO 125	FEL194C
CALL ELOADS(I,NDIM,NDF,NEN,NEL1,NSIF,NSIZV,NVEC,DT(M1),DT(M2),	FEL195C
DT(M3),DT(M4),DT(M6),DT(M5),DT(M9),DT(M8))	FEL196C
IF(IPG.LE.0) GO TO 705	FEL197C
GO TO 125	FEL198C
C	FEL199C
C... INPUT THE INITIAL CONDITIONS	FEL200C
C	FEL201C
345 IF(FLAG(6)) GO TO 347	FEL202C
FLAG(6) = .TRUE.	FEL203C
NICD = I	FEL204C
NSICD = NDF*NUMNP	FEL205C
M9 = M0	FEL206C
M0 = M9 + NICD*NSICD	FEL207C
M0 = M0	FEL208C
IF(M0*2*I.GT.15ZDT) GO TO 710	FEL209C
CALL VECIN (NUMNP,NUMEL,NDF,NSICD,I,NICD,DT(M0),DT(M9))	FEL210C
IF(IPG.LE.0) GO TO 100	FEL211C
GO TO 125	FEL212C
C	
C... TWO AND THREE DIMENSIONAL PLOTTING PORTHOLE CONTROL.	

```

C
350 CONTINUE
   IF (NDIM.EQ.2 .AND. NEN.NE.4) GO TO 707
   CHECK = .TRUE.
   WRITE(IIP6,2040)
   DO 351 K=1,3
   IF (.NOT.FLAG(K)) CHECK = .FALSE.
351 CONTINUE
   IF (.NOT.CHECK) GO TO 707
   KSTEPS = I
   NVEC = 8
   NSIZV = NUMEL
   IF (NDIM.EQ.3) NVEC = 2
   IF (NDIM.EQ.3) NSIZV = 6
   IF (FLAG(4)) GO TO 352
   FLAG(4) = .TRUE.
   M8 = M0
   M0 = M8 + NVEC*NSIZV
   IF (M0.GT. ISZDT) GO TO 710
352 IPLOT = NDIM
   TDUM = NUMMAT
   GO TO 125

C
C... START THE SOLUTION FOR FIRST LOADING CASE
C
200 IF (FLAG(5)) GO TO 401
   CHECK=.TRUE.
   CALL IICQC(TIME,1)
   DO 123 J=1,3
123 IF (.NOT.FLAG(J)) CHECK=.FALSE.
   CONTINUE
   IF (.NOT.CHECK) GO TO 707
   NTM = 0
   IF (CC.NE.CONWD(22).AND.CC.NE.CONWD(23)) GO TO 515
C... SET UP VISCOELASTIC/NONLINEAR SOLUTION CALL
   NTM = 1
   NSEQ = I
   I=0
   ISIZ = ISZDT - IBUF
   IDT = ISIZ/2
   IF (NICD.NE.0) GO TO 515
   WRITE(IIP6,2038)
   NICD = 1
   IF (CC.EQ.CONWD(23)) NICD=3
   NSICD = NDF*NUMNP
   M8 = M0
   M0 = M0 + NICD*NSICD
   IF (M0.GT.ISIZ) GO TO 710
   DO 510 J = M8,M0
510 DT(J) = 0.
515 M7 = M0
   M7A = M0
   IF (ID1.GE.M7) M7 = IDT + 1
   MU = M7
   ID1 = IDT + 1
   M0 = M7 + NDF*NUMNP
   IF (M0.GT.ISIZ) GO TO 710
   M8 = M0-1

C
C... SAVE MESH DATA ON TAPE FOR PLOT2D/3D
C
   IF (IPLOT.GT.0) CALL PLOT2D(0,KSTEPS,HEAD,NUMNP,NUMEL,DT(M3),
X DT(M4),DT(M6),DT(M8),NVEC,NSIZV,NEL1,NICD,TDUM,TDUM,NDF)

C
C... CHECK THE MESH FOR CONSISTENCY OF INPUT DATA
C
   CALL MESHCK(NUMNP,NUMEL,NUMMAT,NDIM,NDF,NEN,NEL1,DT,ID1,M8,MAXHAN
X ,DT,DT(M1),DT(M2),DT(M3),DT(M4),DT(M5),DT(M6),DT(M7),ISZA,NEQB,
X IBLK,NDEG)
   MX = ID1 - NEQB

CAXXX
C OPEN TAPE11 QUICKIO FILE IF OUT-OF-CORE SOLN

```

```

FEL2130
FEL2140
FEL2150
FEL2160
FEL2170
FEL2180
FEL2190
FEL2200
FEL2210
FEL2220
FEL2230
FEL2240
FEL2250
FEL2260
FEL2270
FEL2280
FEL2290
FEL2300
FEL2310
FEL2320
FEL2330
FEL2340
FEL2350
FEL2360
FEL2370
FEL2380
FEL2390
FEL2400
FEL2410
FEL2420
FEL2430
FEL2440
FEL2450
FEL2460
FEL2470
FEL2480

```

```

FEL2490
FEL2500
FEL2510
FEL2520
FEL2540

```

```

CXXXX
*01 IF (IBLK.GT.0) CALL QUICKIO (6LTAPE11,0,ISZA)
      IOUT = I
      IF (I.NE.0) WRITE (IIP6,2039)
      CALL ICTOC (TYME,2)
      IF (CC.EQ.CONWD(24)) NSEQ=1
      IF (CC.EQ.CONWD(24)) GO TO 520
      IF (CC.EQ.CONWD(20)) GO TO *15
      IF (MAXBAN.GT.MBAN) GO TO 740
      IF (CC.EQ.CONWD(12).OR.CC.EQ.CONWD(13)) GO TO 125
      IF (IPG.LE.0) GO TO 705
      IF (CC.NE.CONWD(14)) GO TO 405
C
C.... FOURIER COMPOSITION
C
      READ (IIP5,1002) J,F1,F2,F3,F4
      WRITE (IIP6,2002) HEAU,IPG,J,F1,F2,F3,F4
      IPG = IPG + 1
      NTERM = NTERM + 1
      NF (INTERM) = J
      XN = J
C
C.... FORM THE STIFFNESS FOR THE ELEMENTS
C
*05 IF (FLAG(5)) GO TO 410
      LA = 1
      J = (MAXBAN+1)*NDEG + NDF*NUMNP*(1 + NTM)
      IF (ISIZ=J.LT.M7A) GO TO 410
C.... ONCORE SOLUTION IS POSSIBLE
      WRITE (IIP6,2031)
      NEQB = NDEG
      IBLK = 0
C.... CHECK TO SEE IF IUEST IS TO BE MOVED UP
      J = NUMNP*NDF-1
C.... SAVE FORCE VECTOR FOR NONLINEAR SOLUTION
      MX=M5+J
      REWIND 9
      WRITE (9) (DT(I),I=M5,MX)
      IF (M7.EQ.M7A) GO TO 409
      DO 408 K = 1,J
*08 DT (M7A+K) = DT (M7+K)
      DT (M7A) = DT (M7)
      M7 = M7A
*09 LA = M7 + J + 1
      MU = LA + NDEG*MAXBAN
      MX = MU + NUMNP*NDF
      M0 = MX + NDEG
      I01 = NDEG*MAXBAN + 1
*10 FLAG (5) = *TRUE*
      IF (NTM.EQ.1) GO TO 520
      CALL FORMST (NUMNP,NUMEL,NUMMAT,NDIM,NDF,NEN,NEL1,MB,DT,DT (M1),
      X DT (M2),DT (M3),DT (M4),DT (M5),DT (M6),DT,DT (M9),DT (M7),DT (MB),
      X DT (MU),DT (LA),NSIF,IBLK,NVEC,NSIZV,MAXBAN,IRES,NDEG)
      CALL ICTOC (TYME,3)
      IF (IPG.LE.0) GO TO 705
C
C.... FORM THE GLOBAL STIFFNESS AND SOLVE USING GAUSS ELIMINATION
C
      CALL SOLVEQ (NUMNP,NUMEL,NDF,I01,MB,MAXBAN,ITA,NSTF,ISZA,NEQB,IRLK,
      XDT (LA),DT (M5),DT (MU),DT (M7),DT,DT (M9),DT (MX),NDEG)
      CALL ICTOC (TYME,4)
      GO TO 420
C
C.... DYNAMIC SOLUTION BY EXPLICIT INTEGRATION
C
*15 IF (NICD.GE.3) GO TO 418
      WRITE (IIP6,2038)
      NICD = 3
      NSICD = NDF*NUMNP
      M0 = M0
      M0 = M0 + NICD*NSICD
      IF (M0.GE.ISZDT) GO TO 710
      FEL258C
      FEL259C
      FEL262C
      FEL263C
      FEL264C
      FEL265C
      FEL266C
      FEL267C
      FEL268C
      FEL269C
      FEL270C
      FEL271C
      FEL272C
      FEL273C
      FEL274C
      FEL275C
      FEL276C
      FEL277C
      FEL278C
      FEL279C
      FEL280C
      FEL281C
      FEL282C
      FEL283C
      FEL284C
      FEL285C
      FEL286C
      FEL287C
      FEL288C
      FEL289C
      FEL290C
      FEL291C
      FEL292C
      FEL293C
      FEL294C
      FEL295C
      FEL296C
      FEL297C
      FEL298C
      FEL299C
      FEL300C
      FEL301C
      FEL302C
      FEL303C
      FEL304C
      FEL305C
      FEL306C
      FEL307C
      FEL308C
      FEL309C
      FEL310C
      FEL311C
      FEL312C
      FEL313C
      FEL314C
      FEL315C
      FEL316C
      FEL317C
      FEL318C
      FEL319C
      FEL320C
      FEL321C
      FEL322C
      FEL323C
      FEL324C
      FEL325C
      FEL326C
      FEL327C
      FEL328C
      FEL329C

```

```

417 DO 417 J=MG,M0                                FEL330C
      DT(J) = 0.0                                  FEL331C
*18 MC = MG * NSICD                                FEL332C
      MD = MC * NSICD                                FEL333C
      ME = M0                                        FEL334C
      MF = ME + NSTF                                  FEL335C
      MO = 2 * NSTF + MF                             FEL336C
      IF (MO .GT. ISZDT) GO TO 710                    FEL337C
      CALL EXPLC1 (NUMNP,NUMEL,NUMMAT,NDIM,NDF,NEN,NEL1,NSTF,NVEC,NSIZV,
      X DT(M1),DT(M2),DT(M3),DT(M4),DT(M5),DT(M6),DT(M7),DT(M8),DT(M9),
      X DT(M8),DT(M6),DT(MC),DT(MD),DT(ME),DT(MF),TYME,IOUT,NSICD)
      GO TO 125                                        FEL339C
270 IOUT = I                                        FEL340C
      CALL ICTOC (TYME,1)                             FEL341C
C                                                    FEL342C
C... FORM THE NEW LOAD AND DO A RESOLUTION ONLY     FEL343C
C                                                    FEL344C
      CALL HFSVEG (NUMNP,NDF,M7-1,MAXBAN,ISZA,NEGB,IBLK,DT(LA),DT(M5),
      X DT(MU),DT(MS),DT(M7),DT(MX),NDF*NUMNP)
      CALL ICTOC (TYME,5)                             FEL345C
420 CONTINUE                                        FEL346C
C                                                    FEL347C
C... COMPUTE AND OUTPUT THE NODAL DISPLACEMENTS AND ELEMENT STRESSES
C                                                    FEL348C
      IF (IREC.GT.0.AND.IBLK.EQ.0) REWIND 7
      CALL DISTR8 (NUMNP,NUMEL,NUMMAT,NDIM,NDF,NEN,NEL1,NSTF,NVEC,NSIZV,
      X DT(M1),DT(M2),DT(M3),DT(M4),DT(M5),DT(M6),DT(MU),DT(M9),DT(MB)
      X,IOUT,IREC,IBLK)
      CALL ICTOC (TYME,9)
      IF (IBLK.GT.0) REWIND 7
      IF (IBLK.GT.0) READ(7) (DT(I),I=1,MB)
      I = 0
      WRITE (IIP6,2030) TYME
      DO 271 N = 1, 7
271 TYME(N) = 0.0
C                                                    FEL351C
C... INPUT THE FORCE VECTORS ON NODES (RESET TO ZERO AUTOMATICALLY
C... AFTER EACH PROBLEM SOLUTION OR RESOLUTION).
C                                                    FEL352C
260 CONTINUE
      IF (.NOT.FLAG(2)) GO TO 730
      CALL HRESET(1,NUMNP,NDF,DT(M5))
C                                                    FEL353C
CXXXX
C CLOSE FILE 11 IF OUT-OF-CORE SOLN WAS DONE
CXXXX
      IF (IBLK.GT.0) CALL QUICKIO (6,TAPE11,4)
      GO TO 125
C                                                    FEL356C
C... TIME INTEGRATION SUBROUTINE FOR DYNAMIC AND VISCOELASTIC SOLUTIONS
C                                                    FEL357C
520 IF (FLAG(7)) GO TO 540
      FLAG(7) = .TRUE.
      I = M0 * NSICD + 1
      IF (I.GT.ISIZ) GO TO 710
      DO 530 J = M0,I
530 DT(J) = 0.
      IF (IBLK.EQ.0) GO TO 540
      MU = M0 * NSICD
      IF (MU*NSICD.GT.ISIZ) GO TO 710
540 ML=1
      IF (ICC.EQ.CONWD(22)).OR.(ICC.EQ.CONWD(23))
      X CALL TSOLVE (NUMNP,NUMEL,NUMMAT,NDIM,NDF,NEN,NEL1,NSTF,NVEC,
      1 NSIZV,NSICD,NSICD,IBLK,ISZA,NEWH,MAXBAN,NDEG,I01,MB,IBUF,DT,
      2 DT(M1),DT(M2),DT(M3),DT(M4),DT(M5),DT(M6),DT(M7),DT(M8),
      3 DT,DT(M9),DT(ML),DT(LA),DT(M0),DT(MX),DT(ISIZ+1),DT(MG),DT(MU),
      4 NSEQ,TYME)
      IF (ICC.EQ.CONWD(24))
      XCALL NEWTON (NUMNP,NUMEL,NUMMAT,NDIM,NDF,NEN,NEL1,NSTF,NVEC,NSIZV,
      1IBLK,ISZA,NEGB,MAXBAN,NDEG,I01,MB,IBUF,DT,DT(M1),DT(M2),DT(M3),
      2DT(M4),DT(M5),DT(M6),DT(M7),DT(M8),DT,DT(M9),DT(ML),DT(LA),DT(M0),
      3DT(MX),DT(ISIZ+1),DT(MU),NSEQ,TYME)
      I = 0
      FEL359C
      FEL360C
      FEL361C
      FEL362C
      FEL363C
      FEL364C
      FEL365C
      FEL366C
      FEL367C
      FEL368C
      FEL369C
      FEL370C
      FEL371C
      FEL372C
      FEL373C
      FEL374C
      FEL375C
      FEL376C
      FEL377C
      FEL378C
      FEL379C
      FEL380C
      FEL381C
      FEL382C
      FEL383C
      FEL384C
      FEL386C
      FEL387C
      FEL388C
      FEL389C
      FEL390C
      FEL391C
      FEL392C
      FEL393C
      FEL394C
      FEL395C
      FEL396C

```

```

GO TO 260
C.... PROGRAM EXECUTION TIME ARRAY, REFERENCE SUBROUTINE CLOCK
705 WRITE (IIP6,2030) Tyme
GO TO 100
707 WRITE (IIP6,2033) (FLAG(J),J=1,3)
GO TO 100
700 WRITE (IIP6,2034) CC
GO TO 100
710 WRITE (IIP6,2035) M0,ISI2,CC
GO TO 100
720 WRITE (IIP6,2036) NDIM,NDF,NEN
GO TO 100
730 WRITE (IIP6,2037) CC
GO TO 100
735 WRITE (IIP6,2038)
GO TO 100
740 WRITE (IIP6,2032) MABAN
GO TO 100

C....
C.... FORMATS
C....
1000 FORMAT (F5.0,1X,12A6,A1)
1001 FORMAT (F15.5F10.0)
1002 FORMAT (15,5X,4F10.0)
2000 FORMAT (1H1,12A6,30X,4HPAGE,14////
X/19X,32H FINITE ELEMENT ANALYSIS PROGRAM///13X, 22(2H *) //
X 13X,2H *.1R,34H DIMENSIONAL PROBLEM * * * * * //
X 13X,2H *.1R,34H DEGREES OF FREEDOM PER NODE * * //
X 13X,2H *.1R,34H NODES CONNECTED TO EACH ELEMENT * //
X 13X,2H *.1R,34H ELEMENT STIFFNESS SIZE * * * * //17X,22(2H *) //
X 13X,2H *.4X,34H A GENERALIZED FORCE CHECK HAS * //
X 13X,2H *.9X,44,14H BEEN REQUESTED,14X,1H //
X 13X,2H *.1R,34H IS MAXIMUM PERMISSIBLE HALF BAND * //
X 13X,2H *.1R,34H WORD BUFFER AREA RESERVED FOR H * //13X,22(2H *) //
X 13X,2H *.8X,18H CONSTANT 1---- =,1R,7X,1H * //
X 13X,2H *.8X,18H CONSTANT 2---- =,E12.4,4H * //
X 13X,2H *.8X,18H CONSTANT 3---- =,E12.4,4H * //
X 13X,2H *.8X,18H MULTIPLIER 1--- =,E12.4,4H * //
X 13X,2H *.8X,18H MULTIPLIER 2--- =,E12.4,4H * //
X 13X,2H *.8X,18H MULTIPLIER 3--- =,E12.4,4H * //13X,22(2H *) //
2002 FORMAT (1H1,12A6,30X,4HPAGE,14//
X 14X,37H FOURIER COEFFICIENTS FOR HARMONIC NO. * , 14//
X 10X, 25H RADIAL COEFFICIENT = E12.4//
X 10X, 25H TANGENTIAL COEFFICIENT = E12.4//
X 10X, 25H AXIAL COEFFICIENT = E12.4//
X 10X, 25H THERMAL COEFFICIENT = E12.4// )
2003 FORMAT (70X,11A6)
2030 FORMAT (1H1,21X,12H ELAPSED TIME///10X,25H INPUT PROPERTIES AND MESH
,F10.3/10X,25H CHECK AND PLOT INPUT DATA,F10.3/10X,14H FORM STIFFNESS
,F21.3/10X,21H SOLUTION OF EQUATIONS,F14.3/10X,23H RESOLUTION OF EQUA
TIONS,F12.3/10X,14H OUTPUT ANSWERS,F21.3/10X,10H TOTAL TIME,F25.3 )
2031 FORMAT (// 5X,16H IN-CORE SOLUTION )
2032 FORMAT (27H BANDWIDTH EXCEEDED, MBRAND=15)
2033 FORMAT (55H ALL INFORMATION FOR THIS PROBLEM HAS NOT BEEN PROVIDED/
X 15H MATERIAL CARDS * L2/
X 15H NODAL CARDS * L2/
X 15H ELEMENT CARDS * L2/ )
2034 FORMAT (5X,4A6,16H TYPE CARD ERROR/)
2035 FORMAT (20H REQUIRED STORAGE = 17/20H AVAILABLE STORAGE = 17/
X 25H STORAGE EXCEEDED DURING ,A6/)
2036 FORMAT (20H INPUT SIZE ERROR, *HH NDIM = ,15,HH, NDF = ,15,
C *HH, NEL = ,15)
2037 FORMAT (18H ATTEMPT TO INPUT ,A6,20H BEFORE NODAL POINTS )
2038 FORMAT (5X, 98H NON-FATAL ERROR** INITIAL DYNAMIC VECTORS HAVE NOT
X BEEN INPUT **INITIAL CONDITION ASSUMED ZERO )
2039 FORMAT (47H REQUEST MADE FOR LIMITED AMOUNT OF OUTPUT,
X ,25H ADDITIONAL DATA REQUESTED/1X)
2040 FORMAT (////33H REQUEST FOR PLOTS IS INITIATED. )
END
*DECK BLKDATA
SUBROUTINE BLKDAT
REAL LABL

```

```

FEL397C
FEL398C
FEL399C
FEL400C
FEL401C
FEL402C
FEL403C
FEL404C
FEL405C
FEL406C
FEL407C
FEL408C
FEL409C
FEL410C
FEL411C
FEL412C
FEL413C
FEL414C
FEL415C
FEL416C
FEL417C
FEL419C
FEL420C
FEL421C
FEL422C
FEL423C
FEL424C
FEL425C
FEL426C
FEL427C
FEL428C
FEL429C
FEL430C
FEL431C
FEL432C
FEL433C
FEL436C
FEL437C
FEL438C
FEL439C
FEL440C
FEL441C
FEL442C
FEL443C
FEL444C
FEL445C
FEL446C
FEL447C
FEL448C
FEL449C
FEL450C
FEL451C
FEL452C
FEL453C
FEL454C
FEL455C
FEL456C
FEL457C
FEL458C
FEL459C
FEL460C
FEL461C
FEL462C
FEL463C
FEL464C

```

2C

```

LOGICAL NPH,NPL
COMMON/DTNANO/ TIME,NSIG(7),NT,NSTEP,DT,NUMPLT,NEL,DATA(20,3),NPH,NPL
COMMON/DALS/ LIM,SGAUSS(5,5),WGAUSS(5,5)
COMMON/LABELS/ LABEL(6),XHEED(3),XMFHEED(6),FM,UHEED(6),UM,RHEED(6),RM
X AWORD1,AWORD2,AWORD3,HEAD(12),START,CEASE,IPG,NSTR,WORD(30)
COMMON/SHAPE/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)
COMMON/TITLES/ XTTL(3),UTTL(9)
COMMON/TAPES/ ITP5,ITP6
COMMON/XTAPE/ ITP13,ITP14,ITPH0,ITPWH
DATA SHAPE/B000.0/,START,CEASE/6MFEAP72.6HSTOP /
DATA AWORD/SHELM01,SHELM02,SHELM03,SHELM04,SHELM05,SHELM06,SHELM07,
X SHELM08,SHELM09,SHELM10,SHELM11,SHELM12,SHELM13,SHELM14,SHELM15,
X SHELM16,SHELM17,SHELM18,SHELM19,SHELM20,SHELM21,SHELM22,SHELM23,
X SHELM24,SHELM25,SHELM26,SHELM27,SHELM28,SHELM29,SHELM30/
DATA SGAUSS/S0.0,-.57735027,.57735027,.3*0.0,-.77459667,0.0,.77459667
C .2*0.0,-.86113631,-.33998104,.33998104,.86113631,0.0,-.93617985,
C -.53846931,0.0,.53846931,.90617985/
DATA WGAUSS/S0.2,0.9*1.0,55555556.0,88888889.0,55555556.2*0.0,.34785485
C .2*0.0,5214515.0,34785485.0,0.0,23642689.0,47862867.0,56888889.0,47862867
C .0,23642689/
DATA LABEL(1)/BH (112) /
DATA XTTL/6H 1.0H 2.0H 3/ 4H/6H ORD. /
DATA UTTL/6H 1.0H 2.0H 3.6H 4.6H 5.6H 6/
DATA FM,RM,UH,ZEM FORCE,6H FORCE,6H DISPL/
DATA XAWORD1,AWORD2/BH F13.4,8H 6E13.4/,AWORD3/RH F12.2,/
DATA ITP5,ITP6 /5,6/ * NSIG/7*0/, TIME/0.0/,NUMPLT,NPH,NPL/0,0,1/
DATA ITP13,ITP14/13,14/
RETURN
END
30C
*DECK TICTOC
SUBROUTINE TICTOC(TIME, I)
C
C SURROUTINE TO TIME PROGRAM SEGMENTS AS MEASURE OF EFFICIENCY
C
DIMENSION TIME(7)
IF (I .LE. 6) GO TO 100
CALL SECOND(T1)
TIME (1) = T1 - T0
TIME (7) = TIME(7) + TIME(1)
T0 = T1
RETURN
100 CALL SECOND(T0)
RETURN
END
TIC 10
TIC 20
TIC 30
TIC 40
TIC 50
TIC 60
TIC 70
TIC 80
TIC 90
TIC 100
TIC 110
TIC 120
TIC 130
TIC 140
*DECK MESH
SUBROUTINE MESH(MC,NUMMP,NUMEL,NUMMAT,NDIM,NDF,NEL,NEL1,
X D1,TYPE,0,ICOD,XYZ,F,IX)
C**** INPUT OF MESH AND MATERIAL PROPERTIES .
COMMON/TAPES/ ITP5,ITP6
REAL LABEL
DIMENSION TYPE(1),D(3,21,1),ICOD(1),XYZ(NDIM,1),F(NDF,1),
X IX(NEL1,1),IXD(20),DX(3),IXP(20),XWORD(11)
COMMON/DALS/ LIM,SGAUSS(5,5),WGAUSS(5,5)
COMMON/LABELS/ LABEL(6),XHEED(3),XMFHEED(6),FM,UHEED(6),UM,RHEED(6),RM
X AWORD1,AWORD2,AWORD3,HEAD(12),START,CEASE,IPG,NSTR,WORD(30)
COMMON/SHAPE/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)
COMMON/VALUES/ NCI,CUN1,CUN2,CUN3(3)
DATA BLANK/BLANK /
GO TO(1,2,3,2),MC
CONTINUE
MCT = 0
DO 300 I = 1,NUMMAT
MCI = MCT + 1
IF(MCI.GT.3) GO TO 10
WRITE(ITP5,2001) HEAD,IPG,NUMMAT
IPG = IPG + 1
MCT = 4
CONTINUE
10 READ(ITP5,1002) M,DM,XWORD
IF(M.GT.NUMMAT,OR,M.LE.0) GO TO 301
TYPE(M) = DM
WRITE(ITP5,2002) UM,M,XWORD
MES 10
MES 20
MES 30
MES 40
MES 50
MES 60
MES 70
MES 80
MES 90
MES 100
MES 110
MES 120
MES 130
MES 140
MES 150
MES 160
MES 170
MES 180
MES 190
MES 200
MES 210
MES 220
MES 230
MES 240
MES 250
MES 260
MES 270

```

	DO 280 J = 1,3	MES 28C
	DO 280 K = 1,21	MES 29C
280	D(J,K,M)=0.0	MES 30C
C		MES 31C
	K = 0	MES 32C
	DO 290 J = 1,30	MES 33C
	IF(DM.EQ.*ORD(J)) GO TO 400	MES 34C
290	CONTINUE	MES 35C
C....	ERRON IF EXIT ON LOOP 290	MES 36C
301	WRITE(11P6,2032)M,DM	MES 37C
	IP6 = 0	MES 38C
	RETURN	MES 39C
400	CALL ELMLIB(N,M,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	MES 40C
	X IX,F,FORCE,ESTIF,U,VECT,1)	MES 41C
300	CONTINUE	MES 42C
	RETURN	MES 43C
2	CONTINUE	MES 44C
C		MES 45C
C....	SET XYZ(1:N) TO BLANKS	MES 46C
C		MES 47C
	DO 20 N = 1,NUMNP	MES 48C
	XYZ(1,N) = BLANK	MES 49C
	DO 20 I = 1,NDF	MES 50C
20	F(I,N) = 0.0	MES 51C
C		MES 52C
C....	START FILLING DATA	MES 53C
C		MES 54C
	N = 0	MES 55C
	NXP = 0	MES 56C
21	NP = N	MES 57C
	IF(MC.EQ.2.AND.N.GE.NUMNP) GO TO 30	MES 58C
	NX = NXP	MES 59C
	READ(11P5,1006) N,NXP,I,DX	MES 60C
	IF(N.LE.0.OR.N.GT.NUMNP) GO TO 30	MES 61C
	IF(MC.EQ.2) NXP = 1	MES 62C
	ICOD(N) = 1	MES 63C
	DO 26 I = 1,NDIM	MES 64C
26	XYZ(I,N) = LX(I)*CON3(I)	MES 66C
	IF(NX.EQ.0) GO TO 21	MES 67C
	IF((N-NP)*NX.GE.0) GO TO 25	MES 68C
	NX = -NX	MES 69C
	WRITE(11P6,2033) NP,N	MES 70C
25	CONTINUE	MES 71C
C		MES 72C
C....	GENERATE THE NODES BETWEEN NP AND N IN INTERVALS OF NX	MES 73C
C		MES 74C
	LX = (IABS(N-NP) + IABS(NX) - 1)/IABS(NX)	MES 75C
	DO 22 I = 1,NDIM	MES 76C
22	Dx(I) = (XYZ(I,N) - XYZ(I,NP))/LX	MES 77C
23	NP = NP + NX	MES 78C
	IF(NX.GT.0.AND.NP.GE.N) GO TO 21	MES 79C
	IF(NX.LT.0.AND.NP.LE.N) GO TO 21	MES 80C
	DO 24 I = 1,NDIM	MES 81C
24	XYZ(I,NP) = XYZ(I,NP-NX) + Dx(I)	MES 82C
	ICOD(NP) = 0	MES 83C
	IF(ICOD(NP-NX).EQ.ICOD(N)) ICOD(NP) = ICOD(N)	MES 84C
	GO TO 23	MES 85C
C		MES 86C
C....	CHECK IF ALL DATA HAS BEEN INPUT OR GENERATED AND PRINT OUTPUT	MES 87C
C		MES 88C
30	CALL PRIMSH(1,NUMNP,NDIM,ICOD,XYZ)	MES 89C
	RETURN	MES 90C
C....	INPUT ELEMENT CONNECTION ARRAY	MES 91C
3	MCT = 0	MES 92C
	NSIDE = (NEL*1)/NDIM**2	MES 93C
	N=0	MES 94C
	MAP = 0	MES 95C
C....	SET UP INCREMENT ARRAY IF NOT INPUT OFF CARDS	MES 96C
	GO TO 132	MES 97C
130	DO 151 L = 1,NEL	MES 98C
151	IXU(L) = [XU(L)	MES 99C
	IF([XU(L)].NE.0) GO TO 157	

```

150 DO 152 L = 1,NEL
    IX(L) = NSIDE
    N1 = 4*NSIDE + 1
    N2 = 8*NSIDE - 4
    IF(N2.GT.NEL) GO TO 154
    DO 152 L = N1,N2
152 IX(L) = 1
154 N1 = 2*NSIDE
    N2 = N1 + 2 - NSIDE
    N4 = N1 + N2
    DO 156 L = N3,N1
    IX(L) = 1
    IX(L + N1) = 1
    IF(N2.GT.NEL) GO TO 156
    IX(L + N2) = 1
    IX(L + N4) = 1
156 CONTINUE
157 CONTINUE
132 READ(11PB,1003) M,MA,IR,IP,IAP
    IF(M.LE.0) RETURN
    READ(11PB,1004) (IX(I,M),I=1,NEL)
    IF(M.EQ.0) K = M - 1
    IX(NEL,K) = MA + 10*IP + 100*IR
    K1 = 1
    DO 133 I1 = 1,NEL
    IF((IX(I1,M),EG.0) GO TO 134
    K1 = K1 + 1
133 CONTINUE
134 IF(K1.GT.NEL) GO TO 140
    DO 136 I1 = K1,NEL
136 IX(I1) = 0
140 N=N+1
    MCT = MCT + 1
    IF(MCT.GT.0) GO TO 142
    WRITE(11PB,2011) HEAD, 1PG,NUMEL,(I,I=1,NEL)
    IPG = IPG + 1
    MCT = 0
142 CONTINUE
    IF(M.LE.0) GO TO 170
    DO 158 L = 1,NEL
158 IX(L,N) = IX(L,N-1) + IX(L)
170 CONTINUE
    K = 0
    DO 324 J1=1,NEL
    IF(IX(J1,N),EG.0) GO TO 141
    DO 325 J1=1,NEL
    IF(IX(J1,N),EG.0) GO TO 340
    KK=ABS(IX(J1,N)-IX(J1,N)) + 1
    IF(K.LE.KK) K=KK
325 CONTINUE
340 CONTINUE
141 MAP= MOD(IX(NEL,N)+10)
    IR = IX(NEL,N)/100
    IP = MOD(IX(NEL,N),100)/10
    WRITE(11PB,2005) N,MAP,IR,IP,(IX(I,N),I=1,NEL),K
    IF(M=N) 155,150,140
155 WRITE(11PB,2031) N
    IPG = 0
    RETURN
180 MAP = MA
    IF(NUMEL.GT.N) GO TO 130
    RETURN
C**** FORMATS
1002 FORMAT(15,1X,A5,11A6)
1003 FORMAT(4I5,20I3)
1004 FORMAT(20I4)
1005 FORMAT(2I5,110,4F10.0)
001  FORMAT(1H1,12AA,30X,4HPAGE,14//15,10H MATERIALS//
    X 20H MATERIAL PROPERTIES //1X)
2002 FORMAT(5X,A5,1X, 5HMATERIAL,15,5X,11A6/1X)
2005 FORMAT(20I5)
MES100C
MES101C
MES102C
MES103C
MES104C
MES105C
MES106C
MES107C
MES108C
MES109C
MES110C
MES111C
MES112C
MES113C
MES114C
MES115C
MES116C
MES117C
MES118C
MES119C
MES120C
MES121C
MES122C
MES123C
MES124C
MES125C
MES126C
MES127C
MES128C
MES129C
MES130C
MES131C
MES132C
MES133C
MES134C
MES135C
MES136C
MES137C
MES138C
MES139C
MES140C
MES141C
MES142C
MES143C
MES144C
MES145C
MES146C
MES147C
MES148C
MES149C
MES150C
MES151C
MES152C
MES153C
MES154C
MES155C
MES156C
MES157C
MES158C
MES159C
MES160C
MES161C
MES162C
MES163C
MES164C
MES165C
MES166C
MES167C
MEU168
MES169C
MES170C
MES171C

```

```

2011 FORMAT(1H,1246,3X,4HPAGE,14//15,9H ELEMENTS//          MES172C
X 20H CLMT MATL RE PRNT ,3X,26HNODES CONNECTED TO ELEMENT/  MES173C
X 20H NO. NO. USES ,1X,20(2H %,12,1H*)) MES174C
C**** MES175C
C**** ERROR MESSAGES * MES176C
C**** MES177C
2031 FORMAT(24H) ELEMENT CARD ERROR, N=15) MES178C
2032 FORMAT(26H) MATERIAL CARD ERROR, M = ,13,2X,8H,TYPE = ,A5/ MES179C
2033 FORMAT( MES180C
X 5,58H**NON-FATAL ERROR** INCREMENT FOR GENERATION BETWEEN NODES, MES181C
X 15,4H AND,15,3/15 OF INCORRECT SIGN ** SIGN CHANGED/1X) MES182C
END MES183C
*DECK MFSHCK
SUBROUTINE MESHCK(NUMNP,NUMEL,NUMMAT,NDIM,NDF,NEL,NEL1,IJ1,IJ1, MES 1C
X M7,NR,DT,TYPE,D,ICUD,XYZ,IF,IX,IDEST,ISZA,NEGB,IPLK,NDEG)
INTEGER XYZ,X,BLANK
REAL LAML
DIMENSION TYPE(1),D(63,1),XYZ(NDIM,1),IX(NEL,1),IDEST(NDF,1) MES 3C
X ,ICUD(1),IF(NDF,1) MES 4C
COMMON/LABELS/ LABL(6),XNED(3),XN,FXNED(6),FN,UNED(6),UN,RNED(6),RN MES 6C
X ,XNND1,XNND2,XNND3,HEAD(12),STAR,CEASE,IPG,NSTR,NORD(30) MES 7C
COMMON/SHAP/ XJAC,SHAPF(4,20),SG(3,3),SA(3,3),X(3,20),LD(120) MES 8C
COMMON /TAPES/ ITP5,ITP6 MES 9C
COMMON /MINRW/ NEM(1500)
DATA /LAMB/EMHLANK / MES 10C
CXXXX
C REWIND ALL ARRAYS BASED ON MINIMUM BANDWIDTH
CXXXX
DO 14 N=1,NUMNP
NA=NE*(N)
10 IDEST(1,NA)=ICUD(N)
DO 15 N=1,NUMNP
15 ICUD(N)=IDEST(1,N)
DO 30 I=1,NDIM
DO 20 N=1,NUMNP
NA=NE*(N)
20 IDEST(I,NA)=XYZ(I,N)
DO 25 N=1,NUMNP
25 XYZ(I,N)=IDEST(I,N)
30 CONTINUE
DO 35 N=1,NUMEL
DO 35 I=1,NEL
K=IX(I,N)
IF(K.EQ.0) GO TO 35
IX(I,N)=NE*(K)
35 CONTINUE
36 CONTINUE
IJ1 = IJ1 + 1
C**** SET UP THE DESTINATION VECTOR
NDEG = 0
DO 14 N = 1,NUMNP
IC = ICUD(N)
IL = 100000
DO 12 I = 1,NDF
IDEST(I,N) = 0
IF(IC.GT.IL) GO TO 150
100 IC = IC - IL
IF(JC.GT.IL) GO TO 100
GO TO 120
150 NDEG = NDEG + 1
IDEST(I,N) = NDEG
120 IL = IL/10
140 CONTINUE
MCT = 0
DO 16 IJ=1,NUMNP
N=NE*(IJ)
MCT = MCT + 1
IF(MCT.GT.0) GO TO 160
MCT = 50
WRITE(ITP6,2033) HEAD,IPG,(UNED(I),I=1,NDF)
IPG = IPG + 1
160 WRITE (ITP6,2000) IJ,(IDEST(I,N),I=1,NDF)

```

```

C.... COMPUTE THE BANDWIDTH OF THE MESH
MH =
DO 19 N = 1,NUMEL
MM =
NN =
DO 17 I = 1,NEL
K = IX(I,N)
IF (K.EQ.0) GO TO 180
DO 17 J = 1,NDF
IC = IDEST(J,K)
IF (IC.GT.MM) MM = IC
IF (IC.EQ.0) GO TO 170
IF (IC.LI.NN.OR.NN.EQ.0) NN = IC
170 CONTINUE
180 IF (MM-NN.GT.MH) MH = MM-NN
190 CONTINUE
MH = MH + 1
MH1 = MH + 2
NEQH = 101/MH1
IF ( NEQH.GT.NDEG) NEQH = NDEG
IHLK = (NDEG+NEQH - 1)/NEQH
WRITE (ITP6,2031) HEAD,IHG,NDEG,MH,NEQH,IHLK
IPG = IPG + 1
ISZA = NEQH*(MH+1)
C.... CHECK MESH FOR CONSISTENCY OF DATA
DO 50 N = 1,NUMEL
MA = MOD(IX(NEL1,N)+10)
IF (MA.GT.NUMMAT.OR.MA.LE.0) GO TO 40
DN = 1+PF(MA)
FLAG = 1.0
DO 205 I=1,NEL
K = IX(I,N)
IF (K.GT.NUMMP.OR.N.LI.0) GO TO 40
IF (K.EQ.0) GO TO 205
NEN = I
IF (XYZ(I,K) .NE. BLANK) GO TO 195
FLAG = -1.
WRITE (ITP6,2034)K,N
IPG = 0
GO TO 205
195 CONTINUE
DO 205 J = 1,NDIM
200 X(J,I) = XYZ(J,K)
205 CONTINUE
IF (FLAG .GT. 0.0)
X CALL ELMLIB(N,MA,NDIM,NDF,NEN,NEL1,NSIF,NSIZV,NVEC,MCT,DM,D,XYZ,
X IX,PF,FORCE,ESTIF,U,VECT,2)
60 IF (DM.GI.0) GO TO 50
40 WRITE (ITP6,2030) N,MA,DM, (IX(J,N),J=1,NEL)
IPG = 0
50 CONTINUE
IF (IPG .GT. 0) WRITE (ITP6,2032)
RETURN
2000 FORMAT(10,5X,A16)
2030 FORMAT(4H ELEMENT,15,10H, MATERIAL,15,10H, JACOBIAN,E12.4/
X 9H IX ARRAY,20I5)
2031 FORMAT(1H,12A6,30X,4HPAGE,14//17H EQUATION SUMMARY//
X 5X,2)HNUMBER OF EQUATIONS =,16//5X,21HMAXIMUM HALFBAND =,16//
X 5X,2)HEQUATIONS PER BLOCK =,16//
X 5X,2)HNUMBER OF BLOCKS =,16//4X,28(1H0)/////1X)
2032 FORMAT(5X,46HNO ERRORS DETECTED DURING A CHECK OF THE MESH )
2033 FORMAT(1H,12A6,30X,4HPAGE,14//19H DESTINATION VECTOR//
X 5X,4HNODE,2X,3HDOF,5A6)
2034 FORMAT(21H **FATAL ERROR**NOUE, 16, 34H NOT INPUT BUT IS USED IN E
X ELEMENT, 16 )
END
*DECK PRTELM
SUBROUTINE PRTELM(NF,MF,NEL,NEL1,IX)
REAL LABL
DIMENSION IX(NEL1,1)
COMMON /TAPES/ ITP5,ITP6
COMMON/LABELS/ LABL(6),XHED(3),XH,FHED(6),FH,UHED(6),UH,RH
MES 35C
MES 36C
MES 37C
MES 38C
MES 39C
MES 40C
MES 41C
MES 42C
MES 44C
MES 45C
MES 46C
MES 47C
MES 48C
MES 49C
MES 50C
MES 51C
MES 52C
MES 53C
MES 54C
MES 55C
MES 56C
MES 57C
MES 58C
MES 59C
MES 60C
MES 61C
MES 62C
MES 63C
MES 64C
MES 65C
MES 66C
MES 67C
MES 68C
MES 69C
MES 70C
MES 71C
MES 72C
MES 73C
MES 74C
MES 75C
MES 76C
MES 77C
MES 78C
MES 79C
MES 80C
MES 81C
MES 82C
MES 83C
MES 84C
MES 85C
MES 86C
MES 87C
MES 88C
MES 89C
MES 90C
MES 91C
MES 92C
MES 93C
MES 94C
MES 95C
MES 96C
MES 97C
MES 98C
MES 99C
MES100C
PRT 1C
PRT 2C
PRT 3C
PRT 4C
PRT 5C

```

```

X ,AWORD1,AWORD2,AWORD3,HEAD(12),START,CEASE,IPG,NSTR,WORD(30)      PRT 6C
MCT = 0                                                                PRT 7C
DO 300 N = NE,ME                                                       PRT 8C
MCT = MCT + 1                                                         PRT 9C
IF(MCT.GT.0) GO TO 100                                               PRT 10C
WRITE(IIP6,2011) HEAD,IPG,ME,(I,I=1,NEL)                             PRT 11C
IPG = IPG + 1                                                         PRT 12C
MCT = 50                                                               PRT 13C
100 CONTINUE                                                           PRT 14C
K = 0                                                                  PRT 15C
MA = MOD(IX(NEL1,N),10)                                              PRT 16C
IA = IX(NEL1,N)/100                                                  PRT 17C
IP = MOD(IA(NEL1,N),100)/100                                         PRT 18C
DO 140 I1 = 1,NEL                                                    PRT 19C
IF(IX(I1,N),EQ.0) GO TO 150                                          PRT 20C
DO 135 J1 = I1,NEL                                                  PRT 21C
IF(IX(J1,N),EQ.0) GO TO 140                                          PRT 22C
KK = LAMS(IX(I1,N)-IX(J1,N)) + 1                                     PRT 23C
IF(K.LT.KK) K = KK                                                  PRT 24C
135 CONTINUE                                                         PRT 25C
140 CONTINUE                                                         PRT 26C
150 WRITE(IIP6,2005) N,MA,IA,IP,(IX(I,N),I=1,NEL),K               PRT 27C
300 CONTINUE                                                           PRT 28C
RETURN                                                                PRT 29C
2005 FORMAT(25I5)                                                    PRT 30C
2011 FORMAT(1H1,12A6,3LX,4HPAGE,14//15,9H ELEMENTS//              PRT 31C
X 20H ELMT MATL RE PRNT ,3X,26HNODES CONNECTED TO ELEMENT//      PRT 32C
X 20H NO. NO. USES ,1X,20(2H *,12,1H*))                            PRT 33C
END                                                                    PRT 34C
*DECK PRTM5H
SUBROUTINE PRTM5H(N1,NUMNP,NDIM,ICOD,XYZ)                               PRT 1C
REAL LABL                                                            PRT 2C
DIMENSION ICOD(1),XYZ(NDIM,1)                                       PRT 3C
COMMON /TAPES/ ITP5,ITP6                                           PRT 4C
COMMON/LABELS/ LABL(6),XHED(3),XH,FHED(6),FH,UHED(6),UH,HHED(6),RH PRT 5C
X ,AWORD1,AWORD2,AWORD3,HEAD(12),START,CEASE,IPG,NSTR,WORD(30)    PRT 6C
DATA BLANK/CHHLANK /                                               PRT 7C
MCT = 0                                                                PRT 8C
DO 33 N = N1,NUMNP                                                  PRT 9C
MCT = MCT + 1                                                         PRT 10C
IF(MCT.GT.0) GO TO 31                                               PRT 11C
WRITE(IIP6,2010) HEAD,IPG,NUMNP,(XHED(I),XH,I=1,NDIM)             PRT 12C
IPG = IPG + 1                                                         PRT 13C
MCT = 50                                                               PRT 14C
31 IF(XYZ(1,N),EQ.0) GO TO 32                                        PRT 15C
WRITE(IIP6,2006) N,ICOD(N),(XYZ(I,N),I=1,NDIM)                    PRT 16C
GO TO 33                                                              PRT 17C
32 WRITE(IIP6,2007) N                                               PRT 18C
33 CONTINUE                                                           PRT 19C
RETURN                                                                PRT 20C
2006 FORMAT(21I2,7F13.4)                                           PRT 21C
2007 FORMAT(1I2,5X,31HHAS NOT BEEN INPUT OR GENERATED )          PRT 22C
2010 FORMAT(1H1,12A6,3LX,4HPAGE,14//15,13H NODAL POINTS//        PRT 23C
X 12H NODAL POINT,6X,6H*,C.,* / (1X,246))                          PRT 24C
END                                                                    PRT 25C
*DECK PRTMAT
SUBROUTINE PRTMAT(HEAD,IPG,NELM,NSTR,ESTIF,FORCE,LD,NT)             PRT 1C
COMMON /TAPES/ ITP5,ITP6                                           PRT 2C
DIMENSION ESTIF(N1,NT),FORCE(NT),LD(NT),HEAD(12)                  PRT 3C
MBLK = (NSTR+23)/24                                                 PRT 4C
NMLK = (NSTR + 8)/9                                                 PRT 5C
N1 = 1                                                                PRT 6C
DO 200 NN = 1,NBLK                                                  PRT 7C
N2 = N1 + 8                                                         PRT 8C
IF(N2.GT.NSTR) N2 = NSTR                                           PRT 9C
M1 = 1                                                                PRT 10C
DO 100 MM = 1,MBLK                                                  PRT 11C
M2 = M1 + 23                                                         PRT 12C
IF(M2.GT.NSTR) M2 = NSTR                                           PRT 13C
WRITE(IIP6,2000) HEAD,IPG,NELM,(J,J=N1,N2)                         PRT 14C
IPG = IPG + 1                                                         PRT 15C
DO 50 I = M1,M2                                                      PRT 16C

```

```

50 WRITE (11PB,2002) 1,LD(1),(ESTIF(1,J),J=N1,N2)          PRT 17C
100 M1 = N2 + 1                                             PRT 18C
    WRITE (11PB,2001) (FORCE(J),J=N1,N2)                   PRT 19C
200 N1 = N2 + 1                                             PRT 20C
    RETURN                                                    PRT 21C
2000 FORMAT (1H1,12A6,3LX,4HPAGE,14//5X,7HELEMENT,15,7H MATRIX// PRT 22C
X 2X,7HPROW/COL,3X,9I12)                                   PRT 23C
2001 FORMAT (/3X,5HPFORCE,4X,1P9E12.3)                    PRT 24C
2002 FORMAT (/14,3H LD,15,1P9E12.3)                       PRT 25C
    END                                                       PRT 26C
*DECK BLOADS
SUBROUTINE BLOADS(NLD,NUMNP,NDIM,NDF,ICOD,XYZ,F)           RLO 1C
COMMON/LABELS/ LABL(6),XHPD(3),XM,FHED(5),FM,UHED(5),UM,HPED(5),HM RLO 2C
X ,ANORD1,ANORD2,ANORD3,HEAD(12),START,CEASE,IPG,NSTR,NORD(3) RLO 3C
COMMON/SHAPE/ XJAC,SHAPE(4,20),SG(3,3),SN(3,3),X(3,20),LD(120) RLO 4C
COMMON/VALUES/ ITPS,ITPB RLO 5C
DIMENS IOD(1),XYZ(NDIM,1),F(NDF,1),IPRES(8),PR(8),SWU(5), RLO 6C
X FS(6,4),INC(4) RLO 7C
DATA S4D/5MSLD01,5MSLD02,5MSLD03,5MSLD04,5MSLD05/ RLO 8C
MCT = 0 RLO 9C
DO 400 I = 1,ALI RLO 10C
READ(11PE,1500) NDP,SLD,NRT,IPRES,INC,PR RLO 11C
DO 200 I = 1,N RLO 12C
IF (IPRES(I).EQ.0) GO TO 300 RLO 13C
JM = IPRES(I) RLO 14C
IF (JM.GT.NUNNP.OR.JM.LT.0) GO TO 910 RLO 15C
JM = JM + NRT*INC(I) RLO 16C
IF (JM.GT.NUNNP.OR.JM.LT.0) GO TO 920 RLO 17C
200 NPRES = 1 RLO 18C
C... CHECK FOR MATCH OF LOAD TYPE RLO 19C
300 DO 400 JM = 1,5 RLO 20C
    JMM = JM RLO 21C
    IF (SLD(JM).SND(JM)) GO TO 500 RLO 22C
400 CONTINUE RLO 23C
    WRITE (11PB,2030) SLD RLO 24C
    IPG = 0 RLO 25C
    RETURN RLO 26C
500 DO 520 I = 1,NPRES RLO 27C
    J = IPRES(I) RLO 28C
    DO 510 K = 1,NDF RLO 29C
510 X(K,I) = XYZ(K,J) RLO 30C
    DO 520 K = 1,NDF RLO 31C
520 FS(K,I) = 0.0 RLO 32C
    GO TO (1,2,3,4,5),JMM RLO 33C
1 CALL SLD01(NDIM,NDF,NDP,NPRES,IPRES,PR,XYZ,FS) RLO 34C
GO TO 500 RLO 35C
2 CALL SLD02(NDIM,NDF,NDP,NPRES,IPRES,PR,XYZ,FS) RLO 36C
GO TO 500 RLO 37C
3 CALL SLD03(NDIM,NDF,NDP,NPRES,IPRES,PR,XYZ,FS) RLO 38C
GO TO 500 RLO 39C
4 CALL SLD04(NDIM,NDF,NDP,NPRES,IPRES,PR,XYZ,FS) RLO 40C
GO TO 500 RLO 41C
5 CALL SLD05(NDIM,NDF,NDP,NPRES,IPRES,PR,XYZ,FS) RLO 42C
600 MCT = MCT + NPRES = 2 RLO 43C
IF (MCT.GT.5) GO TO 610 RLO 44C
WRITE (11PB,2000) HEAD,IPG,(FHED(I),FM,I=1,NDF) RLO 45C
IPG = IPG + 1 RLO 46C
MCT = 5 RLO 47C
610 WRITE (11PB,2001) NDP,SLD RLO 48C
DO 620 I = 1,NPRES RLO 49C
620 WRITE (11PB,2002) IPRES(I),PR(I),(FS(J,I),J=1,NDF) RLO 50C
C... ADD TO THE GENERALIZED FORCES RLO 51C
DO 740 I = 1,NPRES RLO 52C
K = IPRES(I) RLO 53C
IC = ICOD(K) RLO 54C
IL = 10.000 RLO 55C
DO 730 J = 1,NDF RLO 56C
IF (IC.LT.IL) GO TO 720 RLO 57C
710 IC = IC - IL RLO 58C
IF (IC.GE.IL) GO TO 710 RLO 59C
GO TO 730 RLO 60C
720 F(J,K) = F(J,K) + FS(J,I) RLO 61C

```

```

730 IL = IL/10
740 CONTINUE
IF (NHT.LF.0) GO TO 900
NRT = NRT - 1
DO 800 I = 1,R
800 IPRES(I) = IPRES(I) + INC(I)
GO TO 500
900 CONTINUE
RETURN
910 WRITE (IIP6,2031) NDP,SLD,IPRES
GO TO 930
920 WRITE (IIP6,2031) NDP,SLD,IPRES,NRT,INC
930 IFG = 0
RETURN
C.... FORMAL STATEMENTS
1000 FORMAT (1F,1X,A5,14,815,813/8F10.0)
2000 FORMAT (1H1,12A6,30X,4HPAGE,14//5X,26HDISTRIBUTED BOUNDARY LOADS//
1 4X,4HNODE, 4X,4HLOAD,6(1X,2A6))
2001 FORMAT (7E,13H DIMENSIONAL ,A5,5H LOAD)
2002 FORMAT (10,1P7E13.4)
2030 FORMAT (17H **FATAL ERROR** ,A5,16H LOAD CARD ERROR/1X)
2031 FORMAT (21H **FATAL ERROR** NDP=,14,3X,A5,3X,5HNODES,815/15X,15,
1 21H INCREMENTS WITH INC=,815,24H WILL CAUSE MODAL ERROR*)
END
*DECK SLD01
SUBROUTINE SLD01 (NDIM,NDF,NDP,NPRES,IPRES,PR,XZ,FS)
DIMENSION IPRES(8),PR(R),FS(6,8)
COMMON/GAUS/ LIM,SGAUSS(5,5),*GAUSS(5,5)
COMMON/SHAPE/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)
NSIDE = NPRES - 1
IF (NDP.EQ.2) NSIDE = NPRES/4
LIM = NSIDE + 1
C.... COMPUTE NORMAL PRESSURE GENERALIZED FORCES
LIM3 = LIM
IF (NDP.EQ.1) LIM3 = 1
NDP = NDP + 1
DO 404 IT = 1,LIM3
SS = SGAUSS(IT,LIM)
*S = *GAUSS(IT,LIM)
IF (LIM3.NE.1) GO TO 401
SS = -1.0
*S = 1.0
401 CONTINUE
DO 404 JJ = 1,LIM
IT = SGAUSS(JJ,LIM)
*W = *GAUSS(JJ,LIM)**S
CALL BRICK2(IT,SS,-1.,NDIM,NPRES,NSIDE)
PN = 0.
DO 402 I = 1,NPRES
402 PN = PR(I) + PR(I)*SHAPE(4,I)
PN = PR*W
DO 400 I = 1,NPRES
DO 400 J=1,NDP
400 FS(J,I) = FS(J,I) + SG(NDP,J)*SHAPE(4,I)*PN
404 CONTINUE
NDP = NDP - 1
RETURN
END
*DECK SLD02
SUBROUTINE SLD02 (NDIM,NDF,NDP,NPRES,IPRES,PR,X,FS)
DIMENSION AR(3,3),IPRES(8),PR(8),X(3,20),FS(6,8)
DATA AR/-3.,-4.,1.,4.,0.,0.,0.,-4.,-1.,4.,3./
C.... ADD HORIZONTAL AND VERTICAL COMPONENT STRESS LOADS
DO 600 K=1,3
DO 600 L=1,3
FS(1,K) = FS(1,K) + PR(K,L)*X(2,L)*PR(1)/6.0
600 FS(2,K) = FS(2,K) - AR(K,L)*X(1,L)*PR(2)/6.0
RETURN
END
*DECK SLD03
SUBROUTINE SLD03 (NDIM,NDF,NDP,NPRES,IPRES,PR,XZ,FS)
DIMENSION IPRES(8),PR(R),FS(6,8)

```

	COMMON/SHAPE/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)	SLD 3C
	NSIDE = NPRES - 1	SLD 4C
	LIM = NSIDE + 1	SLD 5C
C****	COMPUTE NORMAL PRESSURE GENERALIZED FORCES	SLD 6C
	DO 404 JJ = 1,LIM	SLD 7C
	TT = SGAUSS(JJ,LIM)	SLD 8C
	WT = WGAUSS(JJ,LIM)	SLD 9C
	CALL BRICK2(TT,-1.,-1.,NDIM,NPRES,NSIDE)	SLD 10C
	PN = 0.	SLD 11C
	RR = 0.0	SLD 12C
	DO 405 I = 1,NPRES	SLD 13C
	RR = RR + SHAPE(4,I)*X(1,I)	SLD 14C
402	PN = PN + PH(I)*SHAPE(4,I)	SLD 15C
	RR = PN*TT*RR	SLD 16C
	DO 406 I = 1,NPRES	SLD 17C
	RR = SHAPE(4,I)*PN	SLD 18C
	DO 406 J=1,2	SLD 19C
406	FS(J,I) = FS(J,I) + SG(2,J)*RR	SLD 20C
404	CONTINUE	SLD 21C
	RETURN	SLD 22C
	END	SLD 23C
*DECK	BRKGEN	SLD 24C
	SUBROUTINE BRKGEN(NUMNP,NUMEL,NDIM,NDF,NEL,NEL1,ICOD,XYZ,F,IX)	BRK 1C
	REAL LABEL	BRK 2C
	DIMENSION ICOD(1),XYZ(NDIM,1),IX(NEL1,1),F(NDF,1)	BRK 3C
	COMMON /LABELS/ ITP6,ITP6	BRK 4C
	COMMON /LABELS/ LABEL(6),XMED(3),XM,FMED(6),FM,UMED(6),UM,RMED(6),RM	BRK 5C
	X ,AWOM1,AWORD2,AWORD3,HEAD(12),START,CEASE,IPG,NSTR,WORD(30)	BRK 6C
	COMMON/SHAPE/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)	BRK 7C
C		BRK 8C
C****	GENERATION OF NODAL COORDINATES AND BOUNDARY CODES FOR BRICK SHAPE	BRK 9C
C****	REGIONS USING ELEMENT SHAPE FUNCTIONS * * *	BRK 10C
C		BRK 11C
C****	INPUT THE REGION PROPERTIES	BRK 12C
C		BRK 13C
	READ(ITP6,1000) NN,NR,NS,NT,NI,NE,MA,NBC,IREUSE,IPRINT,IMSH,IELM	BRK 14C
	READ(ITP6,1001) I1,I2,I3,I4,I5,I6	BRK 15C
	READ(ITP6,1002) ((X(I,J),I=1,3),J=1,NN)	BRK 16C
	IF(NS.LE.0) NS=1	BRK 17C
	IF(NR.LE.0) NR=1	BRK 18C
	IF(NT.LE.0) NT=1	BRK 19C
	IF(NI.LE.0) NI = 1	BRK 20C
	IF(NE.LE.0) NE = 1	BRK 21C
	IF(MA.LE.0) MA = 1	BRK 22C
	WRITE(ITP6,2000) HEAD,IPG,NR,NS,NT,NI,NE,MA	BRK 23C
	WRITE(ITP6,2100) I1,I2,I3,I4,I5,I6,(XMED(I),XM,I=1,NDIM)	BRK 24C
	DO 10 N = 1,NN	BRK 25C
10	WRITE(ITP6,2001) (X(I,N),I=1,NDIM)	BRK 26C
C		BRK 27C
C****	SET THE CONTROL CONSTANTS	BRK 28C
C		BRK 29C
	NSIDE = (NN+1)/NDIM**2	BRK 30C
	DR = 2./FLOAT(NR)	BRK 31C
	DS = 2./FLOAT(NS)	BRK 32C
	DT = 2./FLOAT(NT)	BRK 33C
	NR = NR + 1	BRK 34C
	NS = NS + 1	BRK 35C
	NT = NT + 1	BRK 36C
	IF(NDIM.EQ.2) NT = 1	BRK 37C
	NRS = NR*NS	BRK 38C
	NF = NRS*NT + NI = 1	BRK 39C
	IF(NF.GI.NUMNP) GO TO 400	BRK 40C
	IF(NBC.NE.0) GO TO 30	BRK 41C
C		BRK 42C
C****	SET THE BOUNDARY CONDITION CODES TO ZERO	BRK 43C
C		BRK 44C
	DO 20 I = NI,NF	BRK 45C
	DO 15 J = 1,NDF	BRK 46C
15	F(J,I) = 0*0	BRK 47C
20	ICOD(I) = 0	BRK 48C
30	CONTINUE	BRK 49C

	N = NI	HRK 50C
	ME = NE - 1	HRK 51C
	T = -1.0	HRK 52C
	DO 300 K = 1,NT	HRK 53C
	S = -1.0	HRK 54C
	DO 200 J = 1,NS	HRK 55C
	R = -1.0	HRK 56C
	DO 100 I = 1,NR	HRK 57C
	CALL BRICK2(R,S,T,NDIM,NN,NSIDE)	HRK 58C
C		HRK 59C
C COMPUTE THE NODAL COORDINATES OF THE N -TH NODE	HRK 60C
C		HRK 61C
	DO 50 L = 1,NDIM	HRK 62C
	CC = 0.	HRK 63C
	DO 40 M = 1,NN	HRK 64C
40	CC = CC + SHAPE(4,M)*X(L,M)	HRK 65C
50	XYZ(L,N) = CC	HRK 66C
C		HRK 67C
C SET THE SURFACE BOUNDARY CONDITIONS TO PRESCRIBED CONDITIONS	HRK 68C
C		HRK 69C
	IF(I.EQ.1) ICOD(N) = ICOD(N) + 11	HRK 70C
	IF(I.EQ.NR) ICOD(N) = ICOD(N) + 12	HRK 71C
	IF(J.EQ.1) ICOD(N) = ICOD(N) + 13	HRK 72C
	IF(J.EQ.NS) ICOD(N) = ICOD(N) + 14	HRK 73C
	IF(K.EQ.1) ICOD(N) = ICOD(N) + 15	HRK 74C
	IF(K.EQ.NT) ICOD(N) = ICOD(N) + 16	HRK 75C
	N = N + 1	HRK 76C
	IF(K.EQ.NT.AND.K.NE.1) GO TO 100	HRK 77C
	IF(I.EQ.NR.OR.J.EQ.NS) GO TO 100	HRK 78C
	ME = ME + 1	HRK 79C
	IX(NEL1,ME) = MA	HRK 80C
	IX(1,ME) = N - 1	HRK 81C
	IX(2,ME) = N	HRK 82C
	IX(3,ME) = N + NR	HRK 83C
	IX(4,ME) = N + NR - 1	HRK 84C
	IF(NDIM.EQ.2) GO TO 100	HRK 85C
	IX(5,ME) = N + NRS - 1	HRK 86C
	IX(6,ME) = N + NRS	HRK 87C
	IX(7,ME) = N + NRS + NR	HRK 88C
	IX(8,ME) = N + NRS + NR - 1	HRK 89C
100	R = R + DR	HRK 90C
200	S = S + DS	HRK 91C
300	T = T + DT	HRK 92C
	IF(IREUSE.EQ.0) GO TO 360	HRK 93C
	J = (IREUSE - 1)*100 + MA	HRK 94C
	DO 320 I = NE,ME,IREUSE	HRK 95C
320	IX(NEL1,I) = J	HRK 96C
360	IF(IPRINT.NE.0) IX(NEL1,NE) = IX(NEL1,NE) + 10	HRK 97C
	IF(IMSH.EQ.0) CALL PRMSH(NI,NF,NDIM,ICOD,XYZ)	HRK 98C
	IF(IELM.EQ.0) CALL PRTELM(NE,ME,NEL,NEL1,IX)	HRK 99C
	IF(ME.GT.NUMEL) NUMEL = ME	HRK 100C
	RETURN	HRK 101C
400	WRITE(1,PG,2030)	HRK 102C
	IPG = 0	HRK 103C
	RETURN	HRK 104C
1000	FORMAT(1A15)	HRK 105C
1001	FORMAT(6I17)	HRK 106C
1002	FORMAT(10X,3F10.0)	HRK 107C
2000	FORMAT(1H1,12A6,30X,4HPAGE,14//17H NODE GENERATIONS//	HRK 108C
	X 10X,25HNUMBER OF R-INCREMENTS +15/	HRK 109C
	X 10X,25HNUMBER OF S-INCREMENTS +15/	HRK 110C
	X 10X,25HNUMBER OF T-INCREMENTS +15/	HRK 111C
	X 10X,25HFIRST NODES NUMBER +15/	HRK 112C
	X 10X,25HFIRST ELEMENT NUMBER +15/	HRK 113C
	X 10X,25HELEMENT MATERIAL NUMBER +15/ (X)	HRK 114C
2100	FORMAT(HRK 115C
	X 10X,25H1=FACE BOUNDARY CODE +110/	HRK 116C
	X 10X,25H2=FACE BOUNDARY CODE +110/	HRK 117C
	X 10X,25H3=FACE BOUNDARY CODE +110/	HRK 118C
	X 10X,25H4=FACE BOUNDARY CODE +110/	HRK 119C
	X 10X,25H5=FACE BOUNDARY CODE +110/	HRK 120C
	X 10X,25H6=FACE BOUNDARY CODE +110//5X,3(2A6))	HRK 121C

```

2001 FORMAT(5X,1,F12.3)
2030 FORMAT(5X,47H **FATAL ERROR** INSUFFICIENT STORAGE FOR NODES)
      FND
*CHECK ELOADS
SUBROUTINE ELOADS(NLD,NDIM,NDF,NEN,NEL1,NSTF,NSIZV,NVEC,TYPE,0,
1 ICOD,XYZ,IX,F,FORCE,ESTIF,VECT)
COMMON/LABELS/ LABL(6),XHED(3),XH,FHED(6),FH,UHED(6),UH,RHED(6),RH
X ,AWORD1,AWORD2,AWORD3,HEAD(12),START,CEASE,IPG,NSTR,WORD(30)
COMMON/SHAP/ XJAG,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)
COMMON /TAPL/ ITP5,ITP6
DIMENSION TYPE(1),ICOD(1),XYZ(NDIM,1),IX(NEL,1),F(NDF,1),
1 FORCE(NDI,1),PR(6)
C... LOADINGS ASSOCIATED WITH ELEMENTS
DO 500 M = 1,NLD
READ(ITP5,1000) IEL,ELD,INC,JEL,PR
INC = IABS(INC)
IF(INC.LE.0) INC = 1
IF(JEL.EQ.0) JEL = IEL
IF(JEL.GT.IEL) GO TO 120
IC = IEL
IEL = JEL
JEL = IC
120 N = IEL
DO 100 JM = 1,30
IF(ELD.EQ.WORD(JM)) GO TO 200
100 CONTINUE
DM = 0
110 WRITE(ITP6,2030) ELD,DM,N
IPG = 0
RETURN
200 DO 500 N = IEL,JEL,INC
MA = MOD(IX(NEL),N)+10
DM = TYPE(MA)
IF(DM.NE.ELD) GO TO 110
DO 310 I = 1,NSTF
310 FORCE(I,1) = 0
DO 330 I = 1,NEN
K = IX(1,N)
IF(K.EQ.0) GO TO 330
LD(I) = K
NEL = I
DO 320 J = 1,NDIM
320 X(J,1) = XYZ(J,K)
330 CONTINUE
CALL ELMFIB(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,UM,D,XYZ,
1 IX,F,FORCE,ESTIF,PR,VECT,5)
C... ADD FORCES TO THE GENERALIZED FORCES
MCT = MCT + NEL = 2
IF(MCT.GT.0) GO TO 350
WRITE(ITP6,2000) HEAD,IPG,(FHED,FH,I=1,NDF)
IPG = IPG + 1
350 MCT = 50
WRITE(ITP6,2001) N,(I,PR(I),I=1,6)
DO 400 I = 1,NEL
K = LD(I)
IC = ICOD(K)
IL = 100000
DO 430 J = 1,NDF
IF(IC.LI.IL) GO TO 420
440 IC = IC - IL
IF(IC.GE.IC) GO TO 440
GO TO 430
420 F(J,K) = F(J,K) + FORCE(J,I)
430 IL = IL/10
410 CONTINUE
400 WRITE(ITP6,2002) K,(FORCE(J,1),J=1,NDF)
500 CONTINUE
600 CONTINUE
RETURN
1000 FORMAT(15,1X,45,14,15,6F10.0)
2000 FORMAT(1H1,12A6,30X,4HPAGE,14//5X,13HELEMENT LOADS//6X,4MNODE,
1 6(1X,2AA))

```

```

2001 FORMAT(7SA,7HELEMENT,15,6H LOADS,6(I3,1PE13.4,2H ))          FLO 69C
2002 FORMAT(11J,1P6E13.4)                                          FLO 70C
2030 FORMAT(17H **FATAL ERROR** ,A5,25H LOAD CARD ERROR, TYPE = , A5, FLO 71C
1 12H FOR ELEMENT, 15)                                          FLO 72C
END                                                                FLO 73C
*DECK HCODES
SUBROUTINE HCODES(NUMNP,ICOD)
C
C.... BOUNDARY CODE GENERATOR
C
C.... ASSUME ICOD IS FILLED AND ONLY CHANGES ARE TO OCCUR
C.... IF NOT USER SHOULD INITIALIZE BY PLACING TWO CARDS WITH N=1 AND
C.... NX = 1 ON FIRST CARD AND N = NUMNP AND NX = 0 ON SECOND
C
COMMON/LABELS/ LABL(6),XHED(3),XH,FHED(6),FH,UMED(6),JH,HHED(6),RH
X ,AWORD1,AWORD2,AWORD3,HEAD(12),START,CEASE,IPG,NSTR,WORD(30)
COMMON/TAPES/ ITP5,ITP6
DIMENSION ICOD(1),IBC(6),NHC(6)
N = 0
NX = 0
100 NP = N
NXP = NX
READ(ITP5,1000) N,NA,IHC
IF(N.LE.(.OR.N.GT.NUMNP)) GO TO 500
IT = IABS(IHC(1))
DO 200 I = 2,6
200 IT = 10*IT + IABS(IHC(I))
ICOD(N) = IT
IF(NXP.EQ.0) GO TO 100
IF((N-NP)*NXP.GE.0) GO TO 300
NXP = -NXP
300 NP = NP + NXP
IF(NXP.GT.0.AND.NP.GE.0) GO TO 100
IF(NXP.LT.0.AND.NP.LE.0) GO TO 100
IT = 0
IF(IHC(1).LT.0) IT = 1
DO 400 I = 2,6
400 IT = 10*IT + IABS(IHC(I).LT.0) IT = IT + 1
CONTINUE
ICOD(NP) = IT
GO TO 300
C
C.... OUTPUT THE NONZERO CODES
C
500 MCT = 0
J = 0
DO 600 N = 1,NUMNP
IF(ICOD(N).EQ.0) GO TO 600
J = J + 1
NHC(J) = N
IHC(J) = ICOD(N)
IF(J.LT.A.AND.N.LT.NUMNP) GO TO 600
MCT = MCT + 1
IF(MCT.GT.0) GO TO 610
WRITE(ITP6,2030) HEAD,IPG
IPG = IPG + 1
MCT = 0
610 WRITE(ITP6,2001) (NHC(I),IHC(I),I=1,J)
J = 0
600 CONTINUE
RETURN
C
C.... FORMATS
C
1000 FORMAT(1A15)
2000 FORMAT(1H1,12A0,3U,4HPAGE,19//23H NONZERO BOUNDARY CODES//
1 6(5A,12PNODE/H CODE,3X))
2001 FORMAT(6(1I,1H,17,3X))
2030 FORMAT(49H **NON FATAL ERROR** NODE INCREMENT BETWEEN NODES,15,
1 4H AND,15,34H OF INCORRECT SIGN. SIGN CHANGED**)

```

```

      END
      *DECK VECIN
      SUBROUTINE VECIN(NUMNP,NUMEL,NDF,NSIZV,IPICK,N ,PRIV,VECT)
      C
      C.... VECIN ALLOWS INPUT OF USER DEFINED VECTORS.
      C
      C.... IPICK IS A CODED PARAMETER AS FOLLOWS.
      C.... IPICK = 0, IMPLIES VECTORS ARE ASSOCIATED WITH NODES
      C.... IPICK = 1, IMPLIES VECTORS ARE ASSOCIATED WITH DEGREES FREEDOM
      C.... IPICK = 2, IMPLIES VECTORS ARE ASSOCIATED WITH ELEMENTS
      C
      DIMENSION DX(7),PRIV(2,N),VECT(NSIZV,N),VWORD(6)
      REAL LAM
      COMMON /TAPES/ ITP5,ITP6
      COMMON/LABELS/ LABEL(6),XMH,FHED(6),FM,UMED(6),UR,UMED(6),RH
      X ,AWORD1,AWORD2,AWORD3,HEAD(12),START,CEASE,IPG,NSTR,WORD(30)
      DATA VWORD/6H NODAL ,6H POINTS,6H DEG , F,6H FREEDOM,6H NO , EL,6H ELEMENTS /
      DATA BLANK,F0,PRINT / 6H , 6H NO,6H PRINT /
      C
      C.... INPUT HEADER DESCRIPTIONS
      READ(ITP5,1000) ((PRIV(I,J),I=1,2),J=1,N)
      IPRINT = 0
      DO 10 I=1,2
      DO 10 J=1,N
      IF (PRIV(I,J) .NE. BLANK) IPRINT = 1
      10 CONTINUE
      IF (IPRINT .EQ. 1) GO TO 11
      PRIV(1,1) = F0
      PRIV(2,1) = PRINT
      11 CONTINUE
      DO 12 I = 1,NSIZV
      DO 12 J = 1,N
      12 VECT(I,J) = 0.0
      MCT = 0
      L = 1
      IF (IPICK .LT. 0 .OR. IPICK .GT. 2) GO TO 450
      IP1 = 2*IPICK + 1
      IP2 = 2*IPICK + 2
      NSKIP = 1
      IF (IPICK .EQ. 1) NSKIP = NDF
      I = 0
      NXP = 0
      200 IP = 1
      NX = NXP
      READ(ITP5,1001) I,NXP,(DX(J),J=1,N)
      IF (I.LE.0 .OR. I.GT.NSIZV) GO TO 290
      DO 21 J = 1,N
      210 VECT(I,J) = DX(J)
      IF (NX.EQ.0) GO TO 200
      IF ((I-IP)*NX.GE.0) GO TO 220
      NX = -NX
      220 LX = (IABS(I-IP)+IABS(NX)-1)/IABS(NX)
      DO 23 J = 1,N
      230 DX(J) = (VECT(I,J)-VECT(IP,J))/LX
      240 IP = IP + NX
      IF (NX.GT.0 .AND. IP.GE.1) GO TO 200
      IF (NX.LT.0 .AND. IP.LE.1) GO TO 200
      DO 25 J = 1,N
      250 VECT(IP,J) = VECT(IP-NX,J) + DX(J)
      GO TO 240
      290 IF (IPRINT.EQ.0) GO TO 500
      C.... OUTPUT VECTORS
      IK = 0
      DO 300 K = 1,NSIZV
      KK = (K-1)/NSKIP
      KK = KK*NSKIP + 1
      IF (KK.EQ. K) IK = IK + 1
      MCT = MCT + 1
      IF (MCT.GT.0) GO TO 300
      WRITE(ITP6,2000) HEAD,IPG,VWORD(IP1),VWORD(IP2),NSIZV,PRIV
      IPG = IPG + 1
      MCT = 50
      VEC 10
      VEC 20
      VEC 30
      VEC 40
      VEC 50
      VEC 60
      VEC 70
      VEC 80
      VEC 90
      VEC 100
      VEC 110
      VEC 120
      VEC 130
      VEC 140
      VEC 150
      VEC 160
      VEC 170
      VEC 180
      VEC 190
      VEC 200
      VEC 210
      VEC 220
      VEC 230
      VEC 240
      VEC 250
      VEC 260
      VEC 270
      VEC 280
      VEC 290
      VEC 300
      VEC 310
      VEC 320
      VEC 330
      VEC 340
      VEC 350
      VEC 360
      VEC 370
      VEC 380
      VEC 390
      VEC 400
      VEC 410
      VEC 420
      VEC 430
      VEC 440
      VEC 450
      VEC 460
      VEC 470
      VEC 480
      VEC 490
      VEC 500
      VEC 510
      VEC 520
      VEC 530
      VEC 540
      VEC 550
      VEC 560
      VEC 570
      VEC 580
      VEC 590
      VEC 600
      VEC 610
      VEC 620
      VEC 630
      VEC 640
      VEC 650
      VEC 660
      VEC 670
      VEC 680
      VEC 690
      VEC 700

```

```

300 WRITE (ITP6,2001) IK, (VECT(K,J),J=1,N)
GO TO 5J0
400 WRITE (ITP6,3000) I
IPG = 0
GO TO 5J0
450 WRITE (ITP6,3001) IPICK
IPG = n
5J0 CONTINUE
IF (IPRINT .EQ. 0) WRITE (ITP6,2000) HEAD,IPG,VWORD(IP1),VWORD(IP2),
X NSIZV,PRIV
RETURN
C.... FORMATS
1000 FORMAT(6X,2A6)
1001 FORMAT(2I5,7F10.0)
2000 FORMAT(1H1,12A6,30X,4HPAGE,14//5X,
X 31H INPUT VECTORS ASSOCIATED WITH ,2A6,5X,16H VECTOR LENGTH =15//
X 4X,6#NUMBER, 7(3X,2A6)/1X)
2001 FORMAT(1I0,7E15.5)
3000 FORMAT(25HVECTOR CARD ERROR, NODE=,I5)
3001 FORMAT(32H VECTOR PARAMETER ERROR, IPICK = 15)
END
*DECK PLOT2D
SUBROUTINE PLOT2D(ISW,KSTEPS,HED,NUMNP,NUMEL,ICOD,XYZ,IX,VECT,
X NVEC,NSIZV,NEL1,NICU,TIME,V,NDF)
COMMON/MJNH/WNEW(1500)
COMMON/PLOTIS/PL01
DIMENSION NSTEPS(2),PRSCAN(2),TPSCAN(2),IDUM(10),HED(12),ICOD(1),
X XYZ(NDF,1),IX(NEL1,1),VECT(1),V(NDF,1)
DATA INPUTCK,RA,NSTEPS,PRSCAN,TPSCAN,IDUM,DUM
X/0.0,0.0,0.0,0.0,0.0,0.0,1.0,1.0,10*0.0,0/
C
IF (PL01.EQ.3) GO TO 100
C
C PLUTING FOR TWO DIMENSIONAL PROBLEMS WITH FOUR NODE QUADS
C
IF (ISW .GE. 1) GO TO 50
C
C WRITE MESH DATA TO TAPE 30
C
NUMMAT = TIME
NSTEPS(1)=KSTEPS
NSTEPS(2)=KSTEPS
DO 20 N=1,NUMNP
VECT(N)=0.0
IC=ICOD(N)
IL=100000
K=0
DO 10 J=1,2
5 IF (IC.LT.IL) GO TO 10
IC=IC-IL
IF (IC.GT.IL) GO TO 5
K=K+1
VECT(N)=J
IF (K.EQ.2) VECT(N)=3
10 IL=IL/10
20 CONTINUE
C
NF=NEL1-1
DO 30 N=1,NUMEL
RA=MOD (IX(NEL1,N),10)
30 IX(NE,N)=RA
C
WRITE (30) (HED(I),I=1,8),NUMNP,NUMEL,NUMMAT,INPUTCK,RA,NSTEPS,
XPRSCAN,TPSCAN,IDUM,DUM
WRITE (30) (VECT(N),XYZ(1,N),XYZ(2,N),N=1,NUMNP),((IX(I,N),I=1,5),
XN=1,NUMEL),DUM,DUM
C
DO 40 N=1,NUMEL
40 IX(NE,N)=0
C
MMM=0
RETURN

```

```

VEC 71C
VEC 72C
VEC 73C
VEC 74C
VEC 75C
VEC 76C
VEC 77C
VEC 78C
VEC 79C
VEC 80C
VEC 81C
VEC 82C
VEC 83C
VEC 84C
VEC 85C
VEC 86C
VEC 87C
VEC 88C
VEC 89C
VEC 90C
VEC 91C

```

```

C
C WRITE SYSTEM RESPONSE RECORDS FOR EACH TIME STEP
C
50 IF (ISW .NE. 1) GO TO 75
   NMM = NMM + 1
   NMMM = NMM
   IF (NICD .EQ. 3) GO TO 70
   NMMM = -NMMM
   WRITE (30) NMMM, TIME, (V(1,N), V(2,N), N=1, NUMNP)
   GO TO 91
70 WRITE (30) NMM, TIME, (V(1,N), V(2,N), N=1, NUMNP), (V(1, NUMNP*N),
XV(2, NUMNP*N), N=1, NUMNP), (V(1, 2*NUMNP*N), V(2, 2*NUMNP*N), N=1, NUMNP)
   GO TO 91
75 CONTINUE
   WRITE (30) NMMM, TIME, (VECT(N), VECT(NUMEL*N), VECT(2*NUMEL*N),
XVECT(3*NUMEL*N), N=1, NUMEL)
   WRITE (30) NMMM, TIME, (VECT(4*NUMEL*N), VECT(5*NUMEL*N),
XVECT(6*NUMEL*N), VECT(7*NUMEL*N), N=1, NUMEL)
90 CONTINUE
   RETURN
C
C100 CONTINUE
   NDIM = IPLOT
   NEL = NELL-2
C
C THREE DIMENSIONAL PLOTTING PORTHOLE....
C
C HEAD(12) ... TITLE OF PROBLEM
C NUMNP ... NUMBER OF NODAL POINTS
C NUMEL ... NUMBER OF ELEMENTS
C KSTEPS ... NUMBER OF TIME STEPS
C NICD ... NUMBER OF INITIAL CONDITIONS, 1=STATIC, 3=DYNAMIC.
C NEL ... NUMBER OF NODES PER ELEMENT
C NELL ... NEL * 2 ( MATERIAL LOCATION IN CONNECTIVITY ARRAY)
C NDIM ... SPATIAL DIMENSION OF PROBLEM (2 OR 3)
C NSIZV ... NUMBER OF STRESS/STRAIN COMPONENTS, 6.
C ICOD(NUMNP) ... BOUNDARY CODE, SIX DIGIT HOOLIAN NUMBER.
C XYZ(NDIM, NUMNP) ... CARTESIAN COORDINATES
C IX(NEL1, NUMEL) ... CONNECTIVITY ARRAY AND MATERIAL PROPERTY NO.
C Y(NDIM, NUMNP, NICD) ... DISPLACEMENT VECTOR IF STATIC, ALSO
C VELOCITY AND ACCELERATION IF DYNAMIC.
C VECT(2,9) ... STRESS AND STRAIN AT ELEMENT CENTER.
C ORDER IS ... (XX), (XY), (XZ), (YY), (YZ), (ZZ)
C
C IF (ISW .GE. 1) GO TO 200
C
C MESH DATA RECORDS FIRST.
C
C NUMMAT = TIME
C WRITE (30) (HEAD(I), I=1, 12), NUMNP, NUMEL, NUMMAT, KSTEPS, NICD, NDIM, NELL
C WRITE (30) (ICOD(N), (XYZ(K,N), K=1, NDIM), N=1, NUMNP),
X ( (IX(I,N), I=1, NEL), IX(NEL1,N), N=1, NUMEL), (NEW(I), I=1, 1500)
C RETURN
C
200 IF (ISW .GT. 1) GO TO 250
C
C RESPONSE DATA ... DISPLACEMENTS, AND (VELOCITIES AND ACCELERATIONS
C IF DYNAMIC).
C
C WRITE (30) TIME, (((V(I,N+(K-1)*NUMNP), I=1, NDIM), N=1, NUMNP), K=1, NICD)
C RETURN
C
C STRESS AND STRAIN AT ELEMENT CENTER FOR EACH ELEMENT RECORD
C
250 CONTINUE
   WRITE (30) (VECT(J), J=1, NSIZV), (VECT(J+NSIZV), J=1, NSIZV)
   RETURN
   END
*DECK SOLVEQ
SUBROUTINE SOLVEQ(NUMNP, NUMEL, NDF, ID1, M7, NB, ITA, NSTF, ISZA, NEGB, SOL 1C
X IBLK, DT, F, U, IDEST, FORCE, ESTIF, FD, NDEG) SOL 2C
DIMENSION DT(M7), U(1), IDEST(1), F(1), FD(NEGB) SOL 3C

```

	COMMON/SHAP/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)	SOL 4C
C****	ADD ELEMENT STIFFNESS TO GLOBAL STIFFNESS	SOL 5C
	IB = ID1 + ISZA - NEQB	SOL 6C
	IF (IBLK.GT.0)	SOL 7C
	XCALL MAKEA(DT(ID1),DT(IB),ISZA,NEQB,ITA,NUMEL,NSTF,NSTF,LD,FORCE,	SOL 8C
	X ESTIF,7,IBLK)	SOL 9C
C****	SOLVE EQUATIONS	SOL 10C
	CALL USOL(DT,DT(ID1),FD,NEQB,MB,1,IBLK,ISZA,ITA,R,10,11,10)	SOL 11C
C****	PUT SOLUTION VECTOR INTO U(I)	SOL 12C
	L = NDEG	SOL 13C
	N = NDEG	SOL 14C
	M = NDF*NUMNP	SOL 15C
	IF (IBLK.EQ.0) GO TO 200	SOL 16C
	N = NEQB - IBLK*NEQB + NDEG	SOL 17C
	REWIND 7	SOL 18C
	REWIND 10	SOL 19C
	READ (7) DT	SOL 20C
C****	PUT THE SOLUTION BACK IN ORDER	SOL 21C
100	READ(10) (FU(I),I=1,N)	SOL 22C
200	IF (IDEST(M),NE,L) GO TO 250	SOL 23C
	IF (IBLK.GT.0) U(M) = FU(N)	SOL 24C
	IF (IBLK.EQ.0) U(M) = U(N)	SOL 25C
	L = L - 1	SOL 26C
	IF (L.EQ.0) L = -1	SOL 27C
	N = N - 1	SOL 28C
	GO TO 300	SOL 29C
250	U(M) = F(M)	SOL 30C
300	M = M - 1	SOL 31C
	IF (M.LE.0) GO TO 400	SOL 32C
	IF (N.GT.0) GO TO 200	SOL 33C
	IF (IBLK.FG.0) GO TO 250	SOL 34C
	N = NEQB	SOL 35C
	GO TO 100	SOL 36C
400	CONTINUE	SOL 37C
	IF (IBLK.GT.0) REWIND 7	
	IF (IBLK.GT.0) READ(7) DT	
	RETURN	SOL 38C
	END	SOL 39C
*DECK	CORFIN	
	SUBROUTINE CORFIN(A,U,NEQ,ESTIF,FORCE,LD,NSTF)	COR 1C
	DIMENSION A(NEQ,1),U(1),ESTIF(NSTF,NSTF),FORCE(NSTF,2),LD(1)	COR 2C
	DO 200 I = 1,NSTF	COR 3C
	K = LD(I)	COR 4C
	IF (K.EQ.0) GO TO 200	COR 5C
	U(K) = U(K) + FORCE(I,1)	COR 6C
	DO 190 J = 1,NSTF	COR 7C
	L = LD(J)-K+1	COR 8C
	IF (L.GT.0) A(K,L) = A(K,L) + ESTIF(I,J)	COR 9C
190	CONTINUE	COR 10C
200	CONTINUE	COR 11C
	RETURN	COR 12C
	END	COR 13C
*DECK	MAKEA	
	SUBROUTINE MAKEA(A,B,ISZA,NEQB,ITA, NELS,IELM,JELM,LD,FORCE,ESTIF,	MAK 1C
	X ITEL,IBLK)	MAK 2C
C****	ASSEMBLY ROUTINE FOR ELEMENT STIFFNESS MATRICES * MODIFIED *	MAK 3C
	DIMENSION A(ISZA),LD(IELM),FORCE(IELM,2),ESTIF(IELM,IELM),R(1)	MAK 4C
	REWIND ITA	MAK 5C
	MB = SQRT(FLOAT(IBLK))	MAK 6C
	NEQB = NEQB*MB	MAK 7C
	MB = MB - 1	MAK 8C
	MB = 0	MAK 9C
	NID = 0	MAK 10C
	NTI = 0	MAK 11C
	ILD* = 1	MAK 12C
	DO 400 N = 1,IBLK	MAK 13C
C****	INITIALIZE RECORD	MAK 14C
	DO 20 I = 1,ISZA	MAK 15C
20	A(I) = 0.0	MAK 16C
	IDPH = ILD* + NEQB - 1	MAK 17C
	ITAP = 10	MAK 18C
	NEL = NEL	MAK 19C

	IF (MM.GI.0) GO TO 30	MAK 20C
	ITAP = ITEL	MAK 21C
	NEL = NELS	MAK 22C
	N10 = 0	MAK 23C
30	REWIND 10	MAK 24C
	CONTINUE	MAK 25C
	REWIND ITAP	MAK 26C
	IF (ITAP.EQ.ITEL) READ(ITAP) ZIP	MAK 27C
	DO 290 K = 1,NEL	MAK 28C
	HEAD(ITAP) ESTIF,FORCE,LD	MAK 29C
	DO 200 I = 1,JFLM	MAK 30C
	NR = LD(I)	MAK 31C
	IF (NR.LT.LOW.OR.NR.GT.IUPR) GO TO 200	MAK 32C
	NR = NR - NII	MAK 33C
	B(NR) = B(NR) + FORCE(I,1)	MAK 34C
	DO 100 J = 1,JELM	MAK 35C
	NC = LD(J)	MAK 36C
	IF (NC.LT.NH) GO TO 100	MAK 37C
	ICELL = (NC - NR)*NEUB + MR	MAK 38C
	A(ICELL) = A(ICELL) + ESTIF(I,J)	MAK 39C
100	CONTINUE	MAK 40C
200	CONTINUE	MAK 41C
	IF (MM.GI.0) GO TO 260	MAK 42C
	IF (MM.LE.0) GO TO 260	MAK 43C
	DO 220 I = 1,JELM	MAK 44C
	NR = LD(I) - NII	MAK 45C
	IF (NR.GT.NEUB.AND.NR.LE.NEMB) GO TO 240	MAK 46C
220	CONTINUE	MAK 47C
	GO TO 260	MAK 48C
240	WRITE(11) ESTIF,FORCE,LD	MAK 49C
	N10 = N10 + 1	MAK 50C
260	CONTINUE	MAK 51C
300	CONTINUE	MAK 52C
	CXXXX	
	C WRITE QUICKIO FILE	
	CXXXX	
	CALL QUICKIO (6LTAPE11,1,A)	
	ILOW = IUPR + 1	MAK 54C
	MM = MM + 1	MAK 55C
	IF (MM.GT.NH) MM = 0	MAK 56C
400	NII = NII + NEUB	MAK 57C
	RETURN	MAK 58C
	END	MAK 59C
*DECK	USOL	
	SUBROUTINE USOL (A,B,MAXB,NEUB,MM,LL,NBLOCK,NSR,NORG,NHRS,NII,	USO 1C
	NT,NPST)	USO 2C
X	[DIMENSION A(NSH),B(NSR),MAXB(NEUB)	USO 3C
	COMMON /TIMING/ TRICK,NTRI,BACKCP,NHACK	
	NTRI=NTRI+1	
	CALL SECOND (TTT)	
C		USO 4C
	NH = NEUB * MB	USO 5C
	NEM = 0	USO 6C
	IF (NBLOCK.EQ.0) GO TO 110	USO 7C
	NC = MM * LL	USO 8C
	NHR = (NR - 1) / NEUB + 1	USO 9C
	INC = NLRM - 1	USO 10C
	NEUB2 = NEUB * NEUB	USO 11C
	REWIND NORG	
	IXNORG = 0	
	CXXXX	
	C MAXB IS SAVED ON FILE 9 (NORG)	
	C EUN BLOCKS ARE RANDOMLY READ/WROTTEN IN-PLACE ON FILE 11	
	CXXXX	
	N = 1	
100	IXNORG = IXNORG + 1	
	IF ((N.GT.1).AND.(NHR.EQ.1)) GO TO 110	
	CALL QUICKIO (6LTAPE11+2*A,IXNORG)	
110	DO 300 I = 1,NEUB	USO 27C
	D = A(I)	USO 28C
	IF (D.GT.0.0) GO TO 300	USO 29C
	DO 130 J = 1,NHR,NEUB	USO 30C

	IF (A(J),NE,0.) MAX = J	US0 31C
130	CONTINUE	US0 32C
	MAXH(1) = MAX	US0 33C
	JL=1+1	US0 34C
	IF (JL.GT.NEQH) GO TO 300	US0 35C
	II=1	US0 36C
	DI=1./D	
	DO 200 J=JL,NEQH	US0 37C
	II=II+NEQH	US0 38C
	IF (II.GI.NMH) GO TO 200	US0 39C
	C=A(II)*DI	
	IF (C.EQ.0.0) GO TO 200	US0 41C
	KK = J	US0 42C
	CALL REDVC6 ((MAX-II)/NEQH+1,NEQH,NEQH,C,A(II),A(KK))	
	KK=J+NMH	US0 46C
	JJ=1+NMH	US0 47C
	A(KK)=A(KK)-C*A(JJ)	
200	CONTINUE	US0 52C
300	CONTINUE	US0 53C
	IF (NBLCK.EQ.0) GO TO 930	US0 54C
C		
	WRITE (NORG) MAXH	
	CALL QUICKIO (6LTAPE11,3,A,IANORG)	
	IF=1+NORG	
C		US0 56C
C	SUBSTITUTE INTO REMAINING EQUATIONS	US0 57C
C		US0 58C
	DO 800 NN=1,NMH	US0 59C
	IF (N*NN.GI.NBLCK) GO TO 800	US0 60C
	IP=IP+1	
	CALL QUICKIO (6LTAPE11,2,R,IP)	
	IL = NN*NEQH2 + 1	US0 65C
	DO 700 I=1,NEQH	US0 66C
	D = A(I)	US0 67C
	IF (D.EQ.0.0) GO TO 700	US0 68C
	II=IL	US0 69C
	MAX = MAXH(1)	US0 70C
	DI=1./D	
	DO 69 K=1,NEQH	US0 71C
	IF (II.GI.NMH) GO TO 700	US0 72C
	C=A(II)*DI	
	IF (C.EQ.0.0) GO TO 690	US0 74C
	KK = K	US0 75C
	CALL REDVC6 ((MAX-II)/NEQH+1,NEQH,NEQH,C,A(II),B(KK))	
	KK = K + NMH	US0 79C
	JJ = 1 + NMH	US0 80C
	B(KK)=B(KK)-C*A(JJ)	
690	II = II + NEQH	US0 85C
700	IL = IL - INK	US0 86C
	IF (NBR.NE.1) GO TO 750	US0 87C
	DO 74 I=1,NSH	US0 88C
740	A(I)=B(I)	US0 89C
	GO TO 800	US0 90C
750	CALL QUICKIO (6LTAPE11,3,R,IP)	
800	CONTINUE	US0 92C
	N = N + 1	US0 96C
	IF (N.LE.NBLCK) GO TO 100	US0 97C
	CALL SECUND (TTTT)	
	TRICH=TRICP+(TTTT-TIT)	
	NBACK=NBACK+1	
C		US0 98C
C	BACKSUBSTITUTION = RESULTS ON TAPE NRST	US0 99C
C		US0 100C
	LS=NEWR	
	NBR=NEQH*(NBR+1)	US0 102C
	NUM=NBR*NEQH	US0 103C
	MAX=NBR	
	DO 905 I=1,MAX	US0 105C
905	H(I) = .	US0 106C
	REWIND NRST	US0 107C
	N = 1	US0 108C
	NB=NBLCK+1	

```

907 N=NN-1
BACKSPACE NORG
READ (MUB) MAXH
BACKSPACE NORG
CALL QUICKIO (BLTAPF11,2,4,NN)
K=NEH
DO 41 J=1,NUM US0119C
IF K=NEGH US0115C
R(K)=0.0 US0116C
910 K=K+1 US0117C
IF N=H US0118C
K=0
DO 42 J=1,NEGH US0121C
I=I+1 US0122C
K=K+1 US0123C
920 R(K)=R(I) US0124C
930 DO 455 I=1,NEGH US0125C
J=NEGH+I-1 US0126C
MAX = MAX(R(I)) US0127C
IF (A(J).EQ.0.) GO TO 955 US0128C
KK=J US0131C
JJ=KK+1 US0132C
IL=J+NEGH US0133C
C=R(KK) US0134C
IF (MAX.LT.IL) GO TO 950 US0135C
DO 44 I1=IL+MAX*NEGH US0136C
C=C-R(I1)*R(JJ) US0137C
940 JJ=JJ+1 US0138C
950 R(KK)=C/IL US0139C
955 CONTINUE US0140C
IF (N=LOCK.F.) RETURN US0141C
I=0
K=0
DO 46 J=1,NEGH US0144C
K=K+1 US0145C
I=I+1 US0146C
960 A(I)=R(K) US0147C
WRITE (NRST) (A(I),I=1,LS) US0148C
N = N + 1 US0149C
IF (N.LE.NHLOCK) GO TO 907 US0150C
CALL SECOND (TIT)
BACKUP=BACKCP+(TIT-TIT1)
RETURN US0151C
END US0152C
*DECK TSOLVE
SUBROUTINE TSOLVE (NUMP,NUMEL,NUMMAT,NDIM,NDF,NEN,NEL),NSTF,NVEC,
1 NSIZV,NICO,NBICO,IBLK,ISZA,NEWH,MAXBAN,NUEG,IO1,MR,IBUF,DS,
2 TYPE,N,ICOD,XYZ,F,IX,IDEST,VECI,FORCE,ESTIF,LP,A,DU,MAXH,H,U,DF,
3 NSIG,TIME)
REAL LAME
LOGICAL NPH,NPL
DIMENSION IPE(1),ICOD(1),XYZ(NDIM*1),F(NDF*1),IX(NEL*1),
1 IDEST(NDF*1),VECI(NSIZV*1),FORCE(NSTF*2)+ESTIF(NSTF*1),
2 A(NF*1),DU(NDF*1),H(IBUF),U(NDF*1),DF(1)+DS(MB)
COMMON/DIRAN/XTIME,NSIG(7),NI,NSTEP,DT,NUMPLI,NEDATA(20*3),NPR,NPL
COMMON/LABELS/ LABL(6),XHE(3),XH,FHE(6),FH,UHE(6),UH,RHE(6),RH
X ,AROH(1),ARCP(2),AROP(3),HEAD(12),START+CEASE+IPG+NSTR+WORD(30)
COMMON/SHAPE/ XJAC,SHAPE(4*20)+SO(3*3)+SR(3*3)+X(3*20),LD(120)
COMMON/TAPES/ ITP5,ITP6
COMMON/VISDAT/DIP,NH,ISZH,DUL(6*20),UL(6*20)+UDL(6*20)+C6
COMMON/VIAP/ ITP13+ITP14,ITR0,ITR
COMMON/PLUITS/IPLOT
COMMON /MINHW/ NEW(1500)
LOGICAL VFLAG
C.... MAIN VISCELASTIC SUBROUTINE FOR THE GENERAL PROGRAM
DO 2 N=1,NEH US0119C
DO 2 J=1,NDF US0120C
2 UDL(J,N)=0. US0121C
DO 3 I=2,7 US0122C
NSIG(I)=1 US0123C
3 IF (IBLK.FG.) GO TO 4 US0124C
KU = NUMP*NBICO US0125C

```

	REWIND 7	TSU 26C
	WRITE(7) 05	TSU 27C
C....	SET THE OUTPUT LABELS FOR DISPLACEMENT PRINTS	TSU 28C
4	HEAD(12) = 6H TIME=	TSU 29C
	IFLG = -KSLCU	TSU 30C
	I = 2	TSU 31C
	DO 5 N = 1,NDIM	TSU 32C
	LABL(1) = AWORD1	TSU 33C
5	I = I + 1	TSU 34C
	LABL(1) = AWORD2	TSU 35C
	DTP = 0.	TSU 36C
	TIME = 0.	TSU 37C
	MH = NA*NAN + 1	TSU 38C
	NEI = NEM + 1	TSU 39C
	DO 10 N = 1,NUMEL	TSU 40C
10	IX(NE1,N) = 0	TSU 41C
C....	PUT INITIAL DATA ON TAPE	TSU 42C
	ISZH = INCF	TSU 43C
	ITRD = ITR13	TSU 44C
	ITRW = ITR14	TSU 45C
	REWIND ITRD	TSU 46C
	IF (IRLK.GT.0) WRITE(ITRD) ((U(J,J),J=1,NDF),J=1,KU)	TSU 47C
	DO 11 N = 1,ISZH	TSU 48C
11	H(N) = 0.	TSU 49C
	NTBF = (NH*ISZH-1)/ISZH	TSU 50C
	IF (NTH.LE.1) GO TO 13	TSU 51C
	NT = NTR92	TSU 52C
	DO 12 N = 1,NT	TSU 53C
12	WRITE(ITRD) H	TSU 54C
13	REWIND ITRD	TSU 55C
	IF (IRLK.GT.0) HEAD(ITRD) 0M	TSU 56C
	NEP = NUMNP + NUMNP	TSU 57C
	CF = 0.	TSU 58C
	DO 900 K = 1,KSEW	TSU 59C
	HEAD(ITP6,1000) DT,NTS,INT,NNI,NNF,NEI,NEF,NPROP,NFORC,BETA,UEL	TSU 60C
	IF (INI.LE.0) INT = 1	TSU 61C
	GAM = .5*UEL	TSU 62C
	WRITE(ITP6,2000) HEAD,TIME,IPG,DT,NTS,INT,NNI,NNF,NEI,NEF	TSU 63C
	IF (NCO.NE.1) WRITE(ITP6,2002) BETA,GAM	TSU 64C
	IPG = IPG + 1	TSU 65C
	IF (NCO.EQ.1) GO TO 1	TSU 66C
	IF (DT.EQ.0) GO TO 901	TSU 67C
	C1 = 1 - GAM/BETA	TSU 68C
	C2 = (1 - GAM/BETA/2) * DT	TSU 69C
	C3 = GAM/BETA/DT	TSU 70C
	C4 = 1 - C3/BETA	TSU 71C
	C5 = 1/BETA/DT	TSU 72C
	CF = C3/DT	TSU 73C
1	IF (NPROP.GT.0) PROP = PROPLD(TIME,NPROP)	TSU 74C
	IF (NFORC.GT.0.AND.NPROP.GT.0) WRITE(ITP6,4001)	TSU 75C
	VFLAG = .FALSE.	TSU 76C
	PROP = 1.0	TSU 77C
	DO 901 AT = 1,NTS	TSU 78C
	IF (NPROP.GT.0) PROP = PROPLD(TIME+DT,0)	TSU 79C
	IF (NFORC.GT.0) CALL RESET(-NFORC,NUMNP,NDF,F)	TSU 80C
	IF (IRLK.EQ.0) GO TO 15	TSU 82C
	IF (.NOT.VFLAG) GO TO 20	TSU 84C
	DO 14 I = 1,NDEG	TSU 85C
14	DF(I) = 0.	TSU 86C
	GO TO 20	TSU 87C
15	DO 19 N = 1,NUMNP	TSU 88C
	DO 18 K = 1,NDF	TSU 89C
	J = INEST(K,N)	TSU 90C
	IF (J.EQ.0) GO TO 18	TSU 91C
	IF (VFLAG) GO TO 17	TSU 92C
	DO 17 I = 1,MAXRAN	TSU 93C
16	A(J,I) = 1.0	TSU 94C
17	DF(J) = F(K,N)*PROP	TSU 95C
18	CONTINUE	TSU 96C
19	CONTINUE	TSU 97C
20	NH = 1	TSU 98C
C....	OUTPUT THE SOLUTION VECTOR FOR THE CURRENT TIME	TSU100C

```

IF (IPLOT .EQ. 3) CALL PLOT2D(1,NTS,HEAD,NUMNP,NUMEL,ICOD,XYZ,IX,
X VECT,NVEC,NSIZV,NEL1,NICD,TIME,U,PDF)
NSIG(I) = 1
IF (NN1.EQ.0,OR.(NI/INT)*INT.NE.NI) GO TO 40
IF (N.EQ.1,AND.NI.EQ.1) GO TO 40
NSIG(I) = 0
MCT = 0
DO 30 J=NI1,NNE
N=NH*(IJ)
MCT = MCT + 1
IF (MCT.GT.0) GO TO 30
WRITE (IPB,2001) HEAD,TIME,IPG,PROP,(XHE(I),XN,I=1,NDIM),
X (UHE(I),OR,I=1,PDF)
IPG = IPG + 1
MCT = 0
30 WRITE (IPB,LABL) J,(XYZ(I,N),I=1,NDIM),(U(I,N),I=1,PDF)
40 IF (NICD.EQ.1) GO TO 44
C... UPDATE FOR DYNAMIC PROBLEMS
DO 42 N = 1,NUMNP
DO 42 I = 1,PDF
TEMP = U(I,N*NUMNP)
DM = U(I,N*NEP)
U(I,N*NUMNP) = C1*TEMP + C2*DM
42 U(I,N*NEP) = C4*DM - C5*TEMP
44 MR = 0
REWIND ITWR
IF (IBLK.GI.0) WRITE (ITWR) ((U(I,J),I=1,PDF),J=1,KU)
IF (NID.GI.1) READ (ITRD) M
TEMP = 0
MCT = 0
DO 46 N = 1,NUMEL
NPR = .TRUE.
IF (N.EQ.NEL1,AND.N.LE.NEP) NPR = .FALSE.
IF (M.EQ.1,AND.NI.EQ.1) NPR = .TRUE.
MA = MOD(IX(NEL1,N),10)
IF (MR.LE.0) MRR = IX(NEL1,N)/100
IF (MR.LE.0) MR = MRR
DO 46 I = 1,NSTF
FORCE(I,1) = 0.
FORCE(I,2) = 0.
LD(I) = 0
IF (MR.NE.MRR,OR.VFLAG) GO TO 60
DO 50 J = 1,NSTF
ESTIF(I,J) = 0.0
60 CONTINUE
L = 0
DO 110 I = 1,NEN
K = IX(I,N)
IF (K.EQ.0) GO TO 120
NEL = I
DO 100 J = 1,NDIM
X(J,I) = XYZ(J,K)
DO 110 J = 1,PDF
IF (NICD.NE.1) UDL(J,I) = U(J,K*NEP)
DUL(J,I) = DU(J,K)
UL(J,1) = U(J,K)
L = L + 1
110 LD(L) = IDEST(J,K)
120 DM = TYPE(MA)
C (REMOVED PAGE CHANGER)
TEMP = DM
C... COMPUTE ELEMENT STRESSES AND UPDATE FORCES
CALL ELMLIB(N,MA,NDIM,PDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,
X IX,H,FORCE,ESTIF,U,VECT,6)
IF (IPLOT .EQ. 3) CALL PLOT2D(2,NTS,HEAD,NUMNP,NUMEL,ICOD,XYZ,IX,
X VECT,NVEC,NSIZV,NEL1,NICD,TIME,U,PDF)
C... FORM STIFFNESS IF NEEDED FOR THE NEXT TIME STEP
IF ((.NOT.VFLAG,AND.MR.EQ.MRR),OR.(VFLAG,AND.IX(NEL1,N).EQ.1))
XCALL ELMLIB(N,MA,NDIM,PDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,
X IX,H,FORCE,ESTIF,U,VECT,3)
C... MODIFY FOR THE DISPLACEMENT B.C.
DO 130 L = 1,NEL

```

```

J = IX(L,N)
IC = ICOD(J)
IL = ICODEC
NE = NDF*(L-1)
DO 125 K = 1,NDF
NE = NE + 1
IF (DT.LI.GT.0) FORCE(NE,1) = 0.0
W = F(K,J)*PROP
IF (Q.EQ.0.0) GO TO 122
IF (IC.LI.IL.AND.IBLK.GT.0) F(K,J) = 0.0
IF (IC.LI.IL) GO TO 123
IX(NE,1) = 1
DO 121 I = 1,NSIF
121 FORCE(I,1) = FORCE(I,1) - ESTIF(I,NE)*W
122 IC = IC - IL
IF (IC.GT.IL) GO TO 122
123 IF (IBLK.GT.0) FORCE(NE,1) = FORCE(NE,1) + W
125 IL = IL/10
130 CONTINUE
IF (VFLAG) GO TO 300
IF (IBLK.EQ.0) CALL COREIN(A,DF,NEGH,ESTIF,FORCE,LD,NSIF)
IF (IBLK.GT.0) WRITE(7) ESTIF,FORCE,LD
GO TO 4.0
300 CONTINUE
C... ADD THE FORCE TO THE SOLUTION FOR A RESOLVE
DO 310 K = 1,NSIF
J = LD(K)
IF (J.GT.0) UF(J) = UF(J) + FORCE(K,1)
310 CONTINUE
400 CONTINUE
IF (IPL0T .EQ. 2) CALL PLOT2(2,NTS,HEAD,NUMNP,NUMEL,ICOD,XYZ,IX,
X VECT,NVEC,NSIZV,NEL1,NICD,TIME,U,NDF)
IF (NTI.GT.1) WRITE(11WR) H
IF (IBLK.GT.0) WRITE(11WR) (IX(NEL,N),N=1,NUMEL)
IF (.NOT.VFLAG) CALL SOLVEQ(NUMNP,NUMEL,NDF,10),MR,MAXHAN,9,NSIF,
1 ISZA,NEGH,IBLK,A,DU,DF,IOEST,FORCE,ESTIF,MAXH,NDeg)
IF (VFLAG) CALL RESVEQ(NUMNP,NDF,MR,MAXHAN,ISZA,NEGH,IBLK,A,DF,DF,
1 IOEST,IOEST,MAXH,IFLG)
C... UPDATE THE SOLUTION
I = ITRD
ITRD = 11WR
ITWR = 1
IF (IBLK.GT.0) BACKSPACE ITRD
IF (IBLK.GT.0) READ(ITRD) (IX(NEL,N),N=1,NUMEL)
REWIND ITRD
IF (IBLK.GT.0) READ(ITRD) ((U(I,J),I=1,NDF),J=1,KU)
K = 0
DO 700 N = 1,NUMNP
DO 700 I = 1,NDF
K = K + 1
DU(I,N) = UF(K)
IF (IOEST(I,K).EQ.0) DU(I,N) = F(I,N)*PROP - U(I,N)
TEMP=DU(I,N)
IF (DT.LI.0.0) U(I,N) = 0.0
IF (NICD.EQ.1) GO TO 700
U(I,N*NUMNP)=U(I,N*NUMNP)+C3*TEMP
U(I,N*NEP)=U(I,N*NEP)+C4*TEMP
700 U(I,N)=U(I,N)*TEMP
VFLAG = .TRUE.
DTP = 01
MR = MR - 1
800 TIME = TIME + DT
900 CONTINUE
RETURN
901 WRITE(11PB,2030)
IPB = 0
RETURN
C... FORMATS
1000 FORMAT(F10.0,8I5,2F10.0)
2000 FORMAT(1H1,[2A6,E]3,5,17X,4HPAGE,14//5X,23HTIME DEPENDENT SOLUTION
X//1X,17HTIME INCREMENT = 1PE15.4/
X 1X,17HNUMBER OF STEPS = 15/

```

TS0160C
TS0161C
TS0162C
TS0163C
TS0164C

TS0165C
TS0166C
TS0167C
TS0169C
TS0170C
TS0171C
TS0172C
TS0173C
TS0174C
TS0175C
TS0176C
TS0177C
TS0178C
TS0179C
TS0180C
TS0181C
TS0182C
TS0183C
TS0184C
TS0185C
TS0186C
TS0187C
TS0188C

TS0189C
TS0190C
TS0191C
TS0192C
TS0193C
TS0194C
TS0195C
TS0197C
TS0198C
TS0199C
TS0200C
TS0201C
TS0202C
TS0203C
TS0204C
TS0205C
TS0206C
TS0207C
TS0208C
TS0209C
TS0210C

TS0211C
TS0212C
TS0213C
TS0214C
TS0215C
TS0216C
TS0217C
TS0218C
TS0219C
TS0220C
TS0221C
TS0222C
TS0223C
TS0224C
TS0225C
TS0226C
TS0227C
TS0228C

```

X 10X,14HPRINT INTERVAL = 15/ TS0229C
X 10X,14HPRINT NODES .15,3H 10,15/ TS0230C
X 10X,14HPRINT ELEMENTS,15,3H 10,15/ TS0231C
2001 FORMAT(1H1,12A6,E13.5,17X,4HPAGE,14//5X,12HNODAL VALUES,
X 50X,4H FROM,E13.5//12H NODAL POINT,9(1X,2A6))
2002 FORMAT(10X,30HNEWMARK INTEGRATION PARAMETERS/ TS0234C
C10X12HETA VALUE = F6.3/ TS0235C
C10X17GAMMA VALUE = F6.3/ TS0236C
2130 FORMAT(5X,53H**FATAL ERROR 33** TIME STEP ZERO FOR DYNAMIC PROBLEM TS0237C
X/1X) TS0238C
4001 FORMAT(10H)**WARNING** BOTH THE PROPORTIONAL LOADING AND FORCE ARE
X BEING RESET ON EACH TIME STEP) TS0240C
END TS0241C
*DECK HFSVEU
SUBROUTINE HFSVEU(NUMBP,NDF,M7,MB,ISZA,NEQB,IBLK,DT,F,U,IDES,IDEST
X ,MAXB,NEB) RES 1C
DIMENSION D1(M7),F(NDF,1),U(1),IDEST(1),IDES(1) RES 2C
NE = 1AMB(NEB) RES 3C
IF (IBLK.GT.0) REWIND 7 RES 4C
IF (NEB.LE.0) GO TO 125 RES 5C
REWIND 10 RES 6C
C.... SAVE THE DESTINATION VECTOR FOR UNPACKING THE SOLUTION RES 7C
WRITE(10)(IDEST(I),I=1,NE) RES 8C
C.... COMPACT THE FORCE VECTOR, F, INTO U. RES 9C
DO 100 I = 1,NE RES 10C
J = IDEST(I) RES 11C
IF (J.EQ.0) GO TO 100 RES 12C
U(I) = F(I) RES 13C
100 CONTINUE RES 14C
C.... USE HRESOLVE TO GET THE NEW SOLUTION RES 15C
125 CALL HRESOLV (DT,U,ISZA,NEQB,MB,IBLK,B,MAXB) RES 16C
C.... HEXPAND THE SOLUTION VECTOR RES 17C
IF (IBLK.EQ.0.OR.NEB.LE.0) GO TO 150 RES 18C
REWIND 10 RES 19C
HEAD(10)(IDES(I),I=1,NE) RES 20C
N = NE RES 21C
DO 200 I = 1,NE RES 22C
IF (IBLK.GT.0) J = IDEST(I) RES 23C
IF (IBLK.EQ.0) J = IDEST(N) RES 24C
IF (J.EQ.0) U(I) = 0. RES 25C
IF (J.NE.0) U(I) = U(J) RES 26C
200 N = N - 1 RES 27C
IF (IBLK.GT.0) READ(7) DT RES 28C
RETURN RES 29C
END RES 30C
*DECK HFSOLV RES 31C
SUBROUTINE HFSOLV (A,U,NSH,NEQB,MB,NHLOCK,NBNS,MAXB) RES 1C
DIMENSION A(NSH),U(1),MAXB(NEQB) RES 2C
COMMON /TIMING/ (NICH,NTHI,BACKCP,NHACK
NHACK=BACKCP)
CALL SECOND (TTT)
C RES 3C
C.... HRESOLVE USING DECOMPOSED MATRIX RES 4C
C RES 5C
CXXXX
C NOTE MAXB WAS STORED ON FILE NORG (9) IN SBRT USOL
C NORG IS SET TO 9 IN THIS ROUTINE
CXXXX
DATA NORG/9/
REWIND NORG
JJ = 0
DO 300 N = 1,NHLOCK
C RES 7C
C RES 8C
C RES 9C
IF (NHLOCK.EQ.0) GO TO 50
HEAD (NORG) MAXB
CALL QUICKIO (6LTAPE11,2,A,N)
C RES 11C
50 DO 200 I=1,NEQB
JJ=JJ+1
D=A(I)
IF (D.EQ.0.) GO TO 200
UJ=U(JJ)

```

```

      IF(UJ.EQ.0.) GO TO 200
      NMB=MAXB(I)
      II=NEQB+1
      CALL REDVCG ((NMB-II)/NEQB+1,NEQB,1,UJ/D,A(II),U(JJ+1))
200  CONTINUE
300  CONTINUE
C
C**** BACKSUBSTITUTION
C
      NN=NBLOCK*1
      JJ = NEQB*NBLOCK
      IF(NBLOCK.EQ.0) JJ = NEQB
      DO 400 N = 1,NBLOCK
C
      IF(NBLOCK.EQ.0) GO TO 350
      NA=NN-1
      BACKSPACE NORG
      READ (NORG) MAXB
      BACKSPACE NORG
      CALL QUICKIO (6LTAPE11,2,A,NN)
C
350  IL=NEQB*1
      DO 500 I=1,NEQB
      IL=IL-1
      D=A(IL)
      IF(D.EQ.0.) GO TO 500
      UJ=U(JJ)
      II=IL+NEQB
      KK=JJ
      NMB=MAXB(IL)
      DO 400 J=II,NMB,NEQB
      KK=KK+1
      UJ=UJ-A(JJ)*D(KK)
400  CONTINUE
      U(JJ)=UJ/D
500  JJ=JJ-1
600  CONTINUE
      CALL SECOND (ITTT)
      BACKCH=BACKCP+(ITTT-ITT)
      RETURN
      END
*DECK PROPLD
      FUNCTION PROPLD(T,N)
      DIMENSION TABLE(9,5),LAB(3)
      COMMON /TAPES/ ITP5,ITP6
      DATA ILAB/10HPOLYNOMIAL,10HPERIODIC ,10HUSER INPUT/
      IF(N.EQ.0) GO TO 200
C**** INPUT TABLE
      NTERMS = N
      READ(ITP5,1000) ((TABLE(I,J),I=1,9),J=1,N)
      WRITE(11P6,2001)
      DO 100 J = 1,N
      K = TABLE(1,J)
      IF(K.LT.10H.K.GT.3) GO TO 700
      L = TABLE(2,J)
100  WRITE(11P6,2000) ILAB(K),L,(TABLE(I,J),I=3,9)
      RETURN
200  PROPLD = 0.
C**** INTERPOLATE THE TABLE
      DO 300 J = 1,NTERMS
      TMIN = TABLE(3,J)
      TMAX = TABLE(4,J)
      IF(T.LT.TMIN.OH.T.GT.TMAX) GO TO 300
      K = TABLE(1,J)
      GO TO (201,202,203)*K
201  TT = 1.
      DO 211 I = 5,9
      PROPLD = PROPLD + TABLE(I,J)*TT
211  TT = TT*1
      RETURN
C82 LFOR
202  K = TABLE(2,J)

```

```

RES 28C
RES 29C
RES 30C
RES 31C
RES 32C
RES 33C
RES 34C
RES 35C
RES 36C
RES 40C
RES 58C
RES 59C
RES 60C
ROPL 1C
ROPL 2C
ROPL 3C
ROPL 4C
ROPL 5C
ROPL 6C
ROPL 7C
ROPL 8C
ROPL 9C
ROPL 10C
ROPL 11C
ROPL 12C
ROPL 13C
ROPL 14C
ROPL 15C
ROPL 16C
ROPL 17CC
ROPL 18C
ROPL 19C
ROPL 20C
ROPL 21C
ROPL 22C
ROPL 23C
ROPL 24C
ROPL 25C
ROPL 26C
ROPL 27C
003 OT 06
ROPL 29C

```

```

      IF (K.EQ.N) K = 1
      PROPLD = PROPLD + TABLE(9,J) + TABLE(5,J)*(SIN(TABLE(6,J)*T))**K
      X = X + TABLE(7,J)*(COS(TABLE(8,J)*T))**K
      RETURN
C33 LPOP                                003 UT 0G
203 CALL EXPLD(PROP,1,1,1,1,1,1,1,1,1)
      PROPLD = PROPLD
      RETURN
300 CONTINUE
      RETURN
700 WRITE(IIP6,2030) N
      IPG = 0
      RETURN
1000 FORMAT(2F5.0,7F10.3)
2000 FORMAT(2X,A10,15,7F14.5)
2001 FORMAT(//5X,23HPROPORTIONAL LOAD TABLE//
      X 3X,9HTYPE LOAD*5H EXP,5X,9HMIN* TIME,5X,9HMAX* TIME,5X,
      X 2HA0,12X,2HA1,12X,2HA2,12X,2HA3,12X,2HA4/1X)
2030 FORMAT(5H PROPORTIONAL LOAD INPUT TABLE ERROR. INPUT TYPE =,15/)
      END
*DECK RESET
      SUBROUTINE RESET(IN,NUMNP,NDF,F)
      COMMON /TABLES/ ITP5,ITP6
      REAL LABL
      DIMENSION F(NDF,1)
      COMMON/LABELS/ LABL(6),XHED(3),XH,FHED(6),FH,UHED(6),UH,RHED(6),RH
      X ,AWORD1,AWORD2,AWORD3,HEAD(12),START,CEASE,IPG,NSTR,WORD(30)
      COMMON /MINI/ NZ(1500)
      DIMENSION FT(7)
      MCT = 0
      N=NN
      IF (N.GT.F) GO TO 200
      DO 100 I = 1,NUMNP
      DO 100 J = 1,NDF
100 F(J,I)=0.0
      IF (N.EQ.0) RETURN
      N = - N
200 CONTINUE
      READ (ITP5,1000) J,(FT(I),I=1,NDF)
      K=NEW(J)
      DO 210 I=1,NDF
210 F(I,K)=FT(I)
      MCT = MCT + 1
      IF (MCT.GT.0) GO TO 250
      WRITE(IIP6,2000) HEAD,IPG,NUMNP,(FHED(I),FH,I=1,NDF)
      IPG = IPG + 1
      MCT = 50
250 WRITE (IIP6,2001) J,(FT(I),I=1,NDF)
      IF (J.GE.NUMNP) RETURN
      IF (J.GE.N) RETURN
      GO TO 200
1000 FORMAT(15,5X,7F10.0)
2000 FORMAT(1H1,12A6,30X,4HPAGE,14//15,13H NODAL FORCES//
      X 12H NODAL POINT,7(1X,2A6))
2001 FORMAT(112,4F13.4)
      END
*DECK ELMLIB
      SUBROUTINE ELMLIB(N,MA,NOIM,NDF,NEL,NELI,NSTF,NSIZ,NVEC,MCT,DM,D,
      X XYZ,IX,F,FORCE,ESTIF,U,VECT,ISW)
      REAL LABL
      COMMON/LABELS/ LABL(6),XHED(3),XH,FHED(6),FH,UHED(6),UH,RHED(6),RH
      X ,AWORD1,AWORD2,AWORD3,HEAD(12),START,CEASE,IPG,NSTR,WORD(30)
C
C..... ELEMENT LIBRARY FOR FEAP72
C
C..... IS* = 1 FOR MATERIAL CHARACTERIZATION
C..... IS* = 2 FOR CHECK ON MESH
C..... IS* = 3 FOR ELEMENT STIFFNESS FORMULATION
C..... IS* = 4 FOR ELEMENT OUTPUTS
C..... IS* = 5 FOR ELEMENT LOAD/VECTOR COMPUTATIONS
C..... IS* = 6 FOR NON-LINEAR LOAD VECTOR COMPUTATIONS
C
      DO 55 J = 1,30

```

	IF (OM.EQ.WORD(J)) GO TO 57	FLM 17C
56	CONTINUE	FLM 18C
57	GO TO (1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,	FLM 19C
	X 23,24,25,26,27,28,29,30) , J	FLM 20C
1	CALL ELMT01(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 21C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 22C
	GO TO 99	FLM 23C
2	CALL ELMT02(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 24C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 25C
	GO TO 99	FLM 26C
3	CALL ELMT03(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 27C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 28C
	GO TO 99	FLM 29C
4	CALL ELMT04(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 30C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 31C
	GO TO 99	FLM 32C
5	CALL ELMT05(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 33C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 34C
	GO TO 99	FLM 35C
6	CALL ELMT06(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 36C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 37C
	GO TO 99	FLM 38C
7	CALL ELMT07(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 39C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 40C
	GO TO 99	FLM 41C
8	CALL ELMT08(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 42C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 43C
	GO TO 99	FLM 44C
9	CALL ELMT09(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 45C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 46C
	GO TO 99	FLM 47C
10	CALL ELMT10(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 48C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 49C
	GO TO 99	FLM 50C
11	CALL ELMT11(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 51C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 52C
	GO TO 99	FLM 53C
12	CALL ELMT12(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 54C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 55C
	GO TO 99	FLM 56C
13	CALL ELMT13(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 57C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 58C
	GO TO 99	FLM 59C
14	CALL ELMT14(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 60C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 61C
	GO TO 99	FLM 62C
15	CALL ELMT15(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 63C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 64C
	GO TO 99	FLM 65C
16	CALL ELMT16(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 66C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 67C
	GO TO 99	FLM 68C
17	CALL ELMT17(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 69C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 70C
	GO TO 99	FLM 71C
18	CALL ELMT18(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 72C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 73C
	GO TO 99	FLM 74C
19	CALL ELMT19(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 75C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 76C
	GO TO 99	FLM 77C
20	CALL ELMT20(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 78C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 79C
	GO TO 99	FLM 80C
21	CALL ELMT21(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 81C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 82C
	GO TO 99	FLM 83C
22	CALL ELMT22(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 84C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 85C
	GO TO 99	FLM 86C
23	CALL ELMT23(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,XYZ,	FLM 87C
	X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 88C

	GO TO 99	FLM 89C
24	CALL ELMT24(N,MA,NDIM,NDF,NEL,NEL1,NSIF,NSIZV,NVEC,MCT,DM,D,XYZ, X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 90C FLM 91C
	GO TO 99	FLM 92C
25	CALL ELMT25(N,MA,NDIM,NDF,NEL,NEL1,NSIF,NSIZV,NVEC,MCT,DM,D,XYZ, X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 93C FLM 94C
	GO TO 99	FLM 95C
26	CALL ELMT26(N,MA,NDIM,NDF,NEL,NEL1,NSIF,NSIZV,NVEC,MCT,DM,D,XYZ, X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 96C FLM 97C
	GO TO 99	FLM 98C
27	CALL ELMT27(N,MA,NDIM,NDF,NEL,NEL1,NSIF,NSIZV,NVEC,MCT,DM,D,XYZ, X IX,F,FORCE,ESTIF,U,VECT,ISW)	FLM 99C ELM100C
	GO TO 99	ELM101C
28	CALL ELMT28(N,MA,NDIM,NDF,NEL,NEL1,NSIF,NSIZV,NVEC,MCT,DM,D,XYZ, X IX,F,FORCE,ESTIF,U,VECT,ISW)	ELM102C ELM103C
	GO TO 99	ELM104C
29	CALL ELMT29(N,MA,NDIM,NDF,NEL,NEL1,NSIF,NSIZV,NVEC,MCT,DM,D,XYZ, X IX,F,FORCE,ESTIF,U,VECT,ISW)	ELM105C ELM106C
	GO TO 99	ELM107C
30	CALL ELMT30(N,MA,NDIM,NDF,NEL,NEL1,NSIF,NSIZV,NVEC,MCT,DM,D,XYZ, X IX,F,FORCE,ESTIF,U,VECT,ISW)	ELM108C ELM109C
99	RETURN	ELM110C
	END	ELM111C
*DECK	INTEGL	
	SUBROUTINE INTEGL(LIM,NC1,NDIM,LINT,STUW)	INT 1C
	REAL LABL	INT 2C
	DIMENSION STRI(7,3),TTRI(7,3),UTRI(7,3),*TRI(7,3),STUW(4,1)	INT 3C
	DIMENSION SIR(7),TIR(7),UIR(7),WB(2),SB(2),WC(2),SC(2)	INT 4C
	COMMON/GAUS/ LZZ,SGAUSS(5,5),*GAUSS(5,5)	INT 5C
	COMMON/LABELS/ LABL(6),XHED(3),XH,FHED(6),FH,UHED(6),UH,RHED(6),RH	INT 6C
X	AWOR01,AWOR02,AWOR03,HEAD(12),START,CEASE,IPG,NSTR,WORD(30)	INT 7C
	DATA STRI/0.33333333,6*0.0,0.5,0*0.0,0.5,4*0.0,0.33333333,0.05971587,	INT 8C
C	2*0.47014206,0.79742699,2*0.10128651/	INT 9C
	DATA TTRI/0.33333333,6*0.0,2*0.5,0.0,4*0.0,0.33333333,0.47014206,	INT 10C
C	0.05971587,0.47014206,0.10128651,0.79742699,0.10128651/	INT 11C
	DATA UTRI/0.33333333,6*0.0,0.0,2*0.5,6*0.0,0.33333333,2*0.47014206	INT 12C
C	0.05971587,2*0.10128651,0.79742699/	INT 13C
	DATA *TRI/0.1,0.7*0.33333333,0.225,3*0.13239415,3*0.12593918/	INT 14C
	DATA SIR,TIR,UIR/1.0,2*0.0,4*1.0,0.0,1.0,0.0,2*1.0,-1.0,-1.0,0.0,0.0,1.1.	INT 15C
C	-1.0,-1.0,1.0/	INT 16C
	DATA WB,SB,WC,SC/1.3333333,0.886*26593,1.0,0.795822426,0.0,	INT 17C
C	0.335180055,0.0,0.758786911/	INT 18C
C****	INTEGRATION TABLE CONSTRUCTION	INT 19C
	IF(NC1.LT.0) NC1 = 0	INT 20C
	IF(NC1.GT.2) NC1 = 2	INT 21C
	NC = NC1 + 1	INT 22C
	GO TO (241,244,249),NC	INT 23C
C****	NC1 = 0; GAUSS INTEGRATION	INT 24C
241	I1 = 0	INT 25C
	IF(LIM.LT.1) LIM = 2	INT 27C
	IF(LIM.GT.5) LIM = 5	INT 28C
	LIM3 = LIM	INT 29C
	IF(NDIM.EQ.2) LIM3 = 1	INT 30C
	DO 243 I = 1,LIM3	INT 31C
	UU = SGAUSS(I,LIM)	INT 32C
	UU = *GAUSS(I,LIM)	INT 33C
	IF(NDIM.NE.2) GO TO 242	INT 34C
	UU = -1.0	INT 35C
	UU = 1.0	INT 36C
242	CONTINUE	INT 37C
	DO 243 J = 1,LIM	INT 38C
	TT = SGAUSS(J,LIM)	INT 39C
	WT = *GAUSS(J,LIM)*UU	INT 40C
	DO 243 K = 1,LIM	INT 41C
	II = II + 1	INT 42C
	STUW(1,II) = SGAUSS(K,LIM)	INT 43C
	STUW(2,II) = TT	INT 44C
	STUW(3,II) = UU	INT 45C
	STUW(4,II) = *GAUSS(K,LIM)*WT	INT 46C
243	CONTINUE	INT 47C
	LINT = II	INT 48C
	GO TO 244	

```

C**** NCI = 1, IRONS INTEGRATION
244 IF (NDIM.NE.3.OR.LIM.EQ.1) GO TO 241
      LINT = 6
      IF (LIM.GE.2) LINT = 14
      BS = SB(LIM)
      BW = WB(LIM)
      DO 245 I = 1,7
      I2 = 2*I
      I1 = I2 - 1
      IF (I.NE.4) GO TO 245
      BS = SC(LIM)
      BW = WC(LIM)
245 CONTINUE
      STUW(1,I1) = SIR(1)*BS
      STUW(1,I2) = -STUW(1,I1)
      STUW(2,I1) = IIR(1)*BS
      STUW(2,I2) = -STUW(2,I1)
      STUW(3,I1) = OIR(1)*BS
      STUW(3,I2) = -STUW(3,I1)
      STUW(4,I1) = HW
      STUW(4,I2) = HW
246 GO TO 244
C**** NCI = 2, TRIANGULAR COORDINATE INTEGRATION
249 LINT = 3
      IF (LIM.GE.3) LIM = 3
      IF (LIM.EQ.2) LINT = 3
      IF (LIM.GE.3) LINT = 7
      DO 247 I = 1,LINT
      STUW(1,I) = STRI(1,LIM)
      STUW(2,I) = TTRI(1,LIM)
      STUW(3,I) = UTRI(1,LIM)
247 STUW(4,I) = WTRI(1,LIM)
248 CONTINUE
      RETURN
      END
*DECK COMPACT
      SUBROUTINE COMPACT(ESTIF,FORCE,ISIZE,NSIZE,JSIZE,ITAPE)
      C
C**** REDUCE LAST EQUATIONS OF THE NSIZE X NSIZE STIFFNESS MATH TO A
C**** FINAL JSIZE X JSIZE STIFFNESS MATRIX * STORE ON ITAPE
      C
      DIMENSION ESTIF(ISIZE,ISIZE),FORCE(ISIZE)
      I1=NSIZE-JSIZE
      IF (I1.LE.0) RETURN
      DO 700 II=1,I1
      KK=NSIZE-II
      K1=KK+1
      C = ESTIF(K1,K1)
      IF (C.LE.0.0) GO TO 700
      DO 65 JJ=1,KK
      ESTIF(K1,JJ)=ESTIF(K1,JJ)/C
      CC=ESTIF(K1,JJ)
      FORCE(JJ)=FORCE(JJ)-CC*FORCE(K1)
      DO 65 LL=1,KK
650 ESTIF(LL,JJ)=ESTIF(LL,JJ)-ESTIF(LL,K1)*CC
      FORCE(K1)=FORCE(K1)/C
700 CONTINUE
      IF (ITAPE.GT.0) WRITE(ITAPE) ESTIF,FORCE
      RETURN
      END
*DECK CKQUAD
      SUBROUTINE CKQUAD(FLAG,K,NEL)
      COMMON,SHAP, XJAC,SHAPF(4,20),SG(3,3),SK(3,3),X(3,20),LO(120)
      FLAG = 1.
      SS = 1.0
      DO 30 I = 1,2
      SS = -SS
      TT = 1.0
      DO 30 J = 1,2
      TT = -TT
      CALL QSHPR(SS,TT,K,XXX,YYY,NEL)
      IF (K.GE.1) CALL THEIA(SG,SK,I,0)

```

```

INT 49C
INT 50C
INT 51C
INT 52C
INT 53C
INT 54C
INT 55C
INT 56C
INT 57C
INT 58C
INT 59C
INT 60C
INT 61C
INT 62C
INT 63C
INT 64C
INT 65C
INT 66C
INT 67C
INT 68C
INT 69C
INT 70C
INT 71C
INT 72C
INT 73C
INT 74C
INT 75C
INT 76C
INT 77C
INT 78C
INT 79C
INT 80C
INT 81C
INT 82C
INT 83C
COM 1C
COM 2C
COM 3C
COM 4C
COM 5C
COM 6C
COM 7C
COM 8C
COM 9C
COM 10C
COM 11C
COM 12C
COM 13C
COM 14C
COM 15C
COM 16C
COM 17C
COM 18C
COM 19C
COM 20C
COM 21C
COM 22C
COM 23C
COM 24C
CKQ 1C
CKQ 2C
CKQ 3C
CKQ 4C
CKQ 5C
CKQ 6C
CKQ 7C
CKQ 8C
CKQ 9C
CKQ 10C
CKQ 11C

```

	IF (XJAC*LE,0,0) GO TO 40	CKL 12C
30	CONTINUE	CKL 13C
	RETURN	CKL 14C
40	FLAG = XJAC	CKL 15C
	RETURN	CKL 16C
	END	CKL 17C
*DECK	CKBRIN	
	SUBROUTINE CKBRIN(NDIM,NEN,FLAG)	CKH 1C
	COMMON/SHAP/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)	CKH 2C
	FLAG = 1.	CKH 3C
	NSIDE = (NEN-1)/NDIM**2	CKH 4C
	L = 1	CKH 5C
	IF (NDIM*EG.2) L = 2	CKH 6C
	SS = 1.0	CKH 7C
	DO 30 I = 1,2	CKH 8C
	SS = -SS	CKH 9C
	TT = 1.0	CKH 10C
	DO 30 J = 1,2	CKH 11C
	TT = -TT	CKH 12C
	UU = 1.0	CKH 13C
	DO 30 K = 1,2	CKH 14C
	UU = -UU	CKH 15C
	CALL BRICK2(UU,TT,SS,NDIM,NEN,NSIDE)	CKH 16C
	IF (XJAC*LE,0,0) GO TO 40	CKH 17C
30	CONTINUE	CKH 18C
	RETURN	CKH 19C
40	FLAG = XJAC	CKH 20C
	RETURN	CKH 21C
	END	CKH 22C
*DECK	PACKD	
	SUBROUTINE PACKD(U,1,C11,C12,C33,M)	PAC 1C
	DIMENSION D(3,21,M)	PAC 2C
	GO TO (291,293,294)+1	PAC 3C
	CONTINUE	PAC 4C
291	D(1,1,M) = C11	PAC 5C
	D(1,2,M) = C12	PAC 6C
	D(2,2,M) = C11	PAC 7C
	D(2,1,M) = C12	PAC 8C
	D(3,3,M) = 4.0*C33	PAC 9C
	RETURN	PAC 10C
293	CONTINUE	PAC 11C
	D(1,3,M) = C12	PAC 12C
	D(2,3,M) = C12	PAC 13C
	D(3,3,M) = C11	PAC 14C
294	CONTINUE	PAC 15C
	D(1,1,M) = C11	PAC 16C
	D(1,5,M) = C12	PAC 17C
	D(1,1,M) = C33	PAC 18C
	D(1,16,M) = C33	PAC 19C
	D(2,2,M) = C33	PAC 20C
	D(2,4,M) = C33	PAC 21C
	D(2,11,M) = C11	PAC 22C
	D(2,17,M) = C33	PAC 23C
	D(3,3,M) = C33	PAC 24C
	D(3,7,M) = C33	PAC 25C
	D(3,12,M) = C33	PAC 26C
	D(3,14,M) = C33	PAC 27C
	RETURN	PAC 28C
	END	PAC 29C
*DECK	BRICK2	
	SUBROUTINE BRICK2(R,S,T,NDIM,NEN,NSIDE)	HRI 1C
	DIMENSION N1(12),N2(12),N3(12),NODE(12),S2ORD(12),S3ORD(12),SS(3)	HRI 2C
	DIMENSION CUM(3)	HRI 3C
	COMMON/SHAP/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)	HRI 4C
	DATA NODE/2,4,6,8,9,10,11,12,14,16,18,20/	HRI 5C
	DATA N1/1,2,1,2,3,3,3,3,1,2,1,2/ ,N2/2,3,2,3,1,1,1,1,2,3,2,3/	HRI 6C
	DATA N3/3,1,3,1,2,2,2,3,1,3,1/	HRI 7C
	DATA S2ORD/-0.5,-0.5,0.5,-0.5,0.5,0.5,0.5,-0.5,-0.5,0.5,0.5,0.5/	HRI 8C
	DATA S3ORD/-0.5,0.5,-0.5,-0.5,0.5,-0.5,0.5,0.5,0.5,0.5,-0.5/	HRI 9C
	SS(1) = R	HRI 10C
	SS(2) = S	HRI 11C
	SS(3) = T	HRI 12C

```

      K1 = 4
      L1 = 1
      IF (NSIDE, EQ, 1) GO TO 110
      K1 = 12
      L1 = 2
C**** FORM MIDSIDE SHAPE FUNCTIONS
      DO 100 L = 1, 12
      N = NODE(L)
      I = N1(L)
      J = N2(L)
      K = N3(L)
      SJ = SZORD(L)
      SL = SZORD(L)
      RP = 1. - SS(I)**2
      SP = 0.5 + SJ*SS(J)
      TP = 0.5 + SL*SS(K)
      SHAPE(I, N) = -2.0*SS(I)*SP*TP
      SHAPE(J, N) = SJ*RP*TP
      SHAPE(K, N) = SL*RP*SP
      SHAPE(4, N) = RP*SP*TP
100 C**** FORM CORNER SHAPE FUNCTIONS
110 SJ = -1.5
      K = 0
      DO 250 J = 1, 2
      L = 1
      DO 200 I = 5, 8
      RP = .5 + SZORD(I)*K
      SP = .5 + SJ*ORD(I)*S
      TP = .5 + SJ*OT
      SHAPE(I, L + K) = SZORD(I)*SP*TP
      SHAPE(2, L + K) = RP*SZORD(I)*TP
      SHAPE(3, L + K) = RP*SP*SJ
      SHAPE(4, L + K) = RP*SP*TP
200 L = L + L1
      K = K1
250 SJ = 1.5
      IF (NSIDE, EQ, 1) GO TO 360
C**** CORRECT BASIC CORNER FUNCTIONS BY PROPORTIONS OF MIDSIDE FUNCTIONS
      K = 8
      L = 9
      DO 350 I = 1, 8, 2
      DO 300 J = 1, 4
      SHAPE(J, I) = SHAPE(J, I) - 0.5*(SHAPE(J, I+1) + SHAPE(J, K) + SHAPE(J, L))
300 SHAPE(J, I+12) = SHAPE(J, I+12) - 0.5*(SHAPE(J, I+13) + SHAPE(J, K+12)
      * SHAPE(J, L))
      K = I + 1
350 L = L + 1
C**** FORM THE JACOBIAN DETERMINANT
360 DO 370 I = 1, 3
      DO 370 J = 1, 3
370 SK(I, J) = 0.0
      DO 400 I = 1, NDIM
      DO 400 J = 1, NDIM
      DO 400 K = 1, NEL
400 SK(I, J) = SK(I, J) + SHAPE(J, K)*X(1, K)
      IF (NDIM, EQ, 2) SK(3, 3) = 1.0
      SG(1, 1) = SK(2, 2)*SK(3, 3) - SK(2, 3)*SK(3, 2)
      SG(2, 2) = SK(1, 1)*SK(3, 3) - SK(1, 3)*SK(3, 1)
      SG(3, 3) = SK(1, 1)*SK(2, 2) - SK(1, 2)*SK(2, 1)
      SG(1, 2) = -SK(1, 2)*SK(3, 3) + SK(1, 3)*SK(3, 2)
      SG(1, 3) = SK(1, 2)*SK(2, 3) - SK(1, 3)*SK(2, 2)
      SG(2, 1) = -SK(2, 1)*SK(3, 3) + SK(2, 3)*SK(3, 1)
      SG(2, 3) = -SK(1, 1)*SK(2, 3) + SK(2, 1)*SK(1, 3)
      SG(3, 1) = SK(2, 1)*SK(3, 2) - SK(2, 2)*SK(3, 1)
      SG(3, 2) = -SK(1, 1)*SK(3, 2) + SK(1, 2)*SK(3, 1)
      XJAC = XJAC + SG(I, I)*SK(I, I)
600 DO 400 I = 1, NDIM
      XJAC = XJAC + SG(I, I)*SK(I, I)
      DO 400 J = 1, NEL
      DO 710 I = 1, NDIM
      TEMP = 0.
      DO 700 K = 1, NDIM

```

```

RR1 13C
RR1 14C
RR1 15C
RR1 16C
RR1 17C
RR1 18C
RR1 19C
RR1 20C
RR1 21C
RR1 22C
RR1 23C
RR1 24C
RR1 25C
RR1 26C
RR1 27C
RR1 28C
RR1 29C
RR1 30C
RR1 31C
RR1 32C
RR1 33C
RR1 34C
RR1 35C
RR1 36C
RR1 37C
RR1 38C
RR1 39C
RR1 40C
RR1 41C
RR1 42C
RR1 43C
RR1 44C
RR1 45C
RR1 46C
RR1 47C
RR1 48C
RR1 49C
RR1 50C
RR1 51C
RR1 52C
RR1 53C
RR1 54C
RR1 55C
RR1 56C
RR1 57C
RR1 58C
RR1 59C
RR1 60C
RR1 61C
RR1 62C
RR1 63C
RR1 64C
RR1 65C
RR1 66C
RR1 67C
RR1 68C
RR1 69C
RR1 70C
RR1 71C
RR1 72C
RR1 73C
RR1 74C
RR1 75C
RR1 76C
RR1 77C
RR1 78C
RR1 79C
RR1 80C
RR1 81C
RR1 82C
RR1 83C
RR1 84C

```

```

700 TEMP = TEMP + SG(K,I)*SHAPE(K,J)
710 COLM(I) = TEMP
DO 80 I=1,NDIM
800 SHAPE(I,J) = COLM(I)
RETURN
END
*DECK QSHPR
SUBROUTINE QSHPR(SS,I,IW,XXX,YYY,NEL)
C**** SHAPE FUNCTION SUBROUTINE FOR 8 POINT ISOPARAMETRIC ELEMENT.
DIMENSION SORD(8),TORD(8),ST(2)
COMMON /ZSHAP/ XJAC,SHAPE(4,20),SG(3,3),SA(3,3),X(3,20),L0(120)
COMMON /ASTI/ XS,SI,YS,TI,ZS,ZT
DATA SORD/-1.,0.,0.,1.,0.,-1.,-1.,1./,TORD/-1.,-1.,-1.,0.,0.,3*1.,0./
IF(NEL,RT,4) GO TO 50
C**** FOUR POINT ELEMENT SHAPE FUNCTIONS
J = 1
DO 30 I = 1,3,2
SI = SORD(I)/2.
TI = TORD(I)/2.
SP = .5 + SI*SS
TP = .5 + TI*TI
SHAPE(1,J) = SI*TP
SHAPE(2,J) = SP*TI
SHAPE(3,J) = SP*TP
30 J = J + 1
GO TO 30
C**** EIGHT POINT ELEMENT SHAPE FUNCTIONS
50 DO 10 I = 1,8,2
SI=SORD(I)
TI=TORD(I)
SP=SI*SS
TP=TI*TI
SH=1.+SP
TH=1.+TP
STU=(SI+TI)-1.*0.25
SHAPE(1,I)=SI*TP*(STU+SP*0.25)
SHAPE(2,I)=TI*SP*(STU+TP*0.25)
SHAPE(3,I)=SP*TP*STU
100 CONTINUE
DO 20 I=2,8,4
TI=TORD(I)
TP=1.+TI*TI
SS=1.+SS*SS
SHAPE(1,I)=SS*TP
SHAPE(2,I)=0.5*SS*TI
SHAPE(3,I)=0.5*SS*TP
200 CONTINUE
DO 30 I=4,8,4
SI=SORD(I)
SP=1.+SI*SS
TI=1.+TI*TI
SHAPE(1,I)=0.5*SI*TIH
SHAPE(2,I)=-TI*SP
SHAPE(3,I)=0.5*SP*TIH
300 CONTINUE
C**** FORM JACOBIAN AND TRANSFORMATION MATRIX FOR PLATE ELEMENT
350 XXX=0.0
YYY=0.0
XS=0.0
YS=0.0
ZS=0.0
XT=0.0
YT=0.0
ZT=0.0
DO 40 J I = 1,NEL
SP=SHAPE(1,J)
TP=SHAPE(2,J)
FP=SHAPE(3,J)
XJ=X(I,J)
YJ=Y(I,J)
XX=XXX+XJ*FP
YY=YYY+YJ*FP

```

```

XS=XS*X1*SP
YS=YS*Y1*SP
XT=XT*X1*TP
YT=YT*Y1*TP
IF (I*E*U) GO TO 400
Z1 = X(3,I)
ZS = ZS + Z1*SP
400 ZT = ZT + Z1*TP
CONTINUE
IF (I*E*U+1) RETURN
XJAC=XS*Y1-X1*YS
SG(1,1)=Y1/XJAC
SG(1,2)=-X1/XJAC
SG(2,1)=-YS/XJAC
SG(2,2)=XS/XJAC
DO 520 J=1,NEL
DO 510 J=1,2
TEMP=J
500 DO 500 K=1,2
TEMP = TEMP*SG(K,J)*SHAPE(K,I)
510 ST(J)=TEMP
DO 520 J=1,2
520 SHAPE(J,I) = ST(J)
RETURN
END

*DECK ELMT21
SUBROUTINE ELMT21(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSIZV,NVEC,MCT,DM,D,
X XYZ,IX,MY,FORCE,ES,IF,U,VECT,IS*)
REAL LABL
LOGICAL NPH,NPL,NOPRINT
DIMENSION U(63,1),FSTIF(NSTF,NSTF),FORCE(NSTF,2),STUX(4,27),XX(3),
X IX(NEL1,1),U(NDF,1),DEPS(4,3),XIG(4,3),TAB1(11),TAB2(11)
X XSMED(3,3),R(1),IG(6),JG(6)
DIMENSION VECT(NSIZV,NVEC)
COMMON/DYNAPRO/TIME,NSIG(7),NF,NSTEP,DT,NUNPLI,NEDATA(20,3),NPH,NPL
COMMON/LABELS/ LABL(6),XMED(3),XM,FMED(6),FM,UMED(6),UR,UMED(6),RH
X XWORD1,AWORD2,AWORD3,HEAD(12),START,CEASE,IPG,NSTR,XORU(30)
COMMON/SHAP/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)
COMMON/TAPES/ ITP5,ITP6
COMMON/VISUAT/UTP,NH,ISZM,DUL(6,20), UL(6,20),UUL(6,20),C6
COMMON/VTAPE/ ITP13,ITP14,ITRD,ITWR
COMMON/PLOTS/ IPLO1
DATA TAB1(1),TAB2(1)/RH(10),I7,BH ( BX /,*SWORD/IR)/
DATA SMED/6H XX=,6H XY=,6H XZ=,6H YY=,6H YZ=,
X 6H XZ=,6H YZ=,6H ZZ=
DATA FWORD,EWORD,XWORD/RH,CPP12,3,BH,1PE12,3,BH ,12X /
DATA SH,FM,HLANK/6HSTRESS,6HSTRAIN,6H /,YWORD/RH,AS,I7 /
DATA 16/1,1,2,1,2,3/ JG/1,2,2,3,3,3/
IF (ISW.GT.0) GO TO 4000
NSIDE = (NEL+1)/NDIM**2
GO TO (1,2,3,4,5,4), IS*
C*** CHARACTERIZE THE MATERIAL FOR ISOTROPIC LINEAR VISCOELASTICITY
1 READ (ITP5,1000) NG,NK,D(4,MA),D(5,MA),D(3,MA)
WHILE (ITP6,2400) NG,NK,U(4,MA),D(5,MA),D(3,MA)
LIM = NSIDE+1
CALL INTFGL(LIM,0,NDIM,LINT,STUX)
CA = 1.
DT = 1.
DTP = 1.0
NH = 1
C**** SET UP HEADS FOR PRINTOUTS
I = 2
DO 600 J=1,NDIM
TAP1(1) = FWORD
TAP2(1) = XWORD
600 I = I + 1
DO 610 J = 1,6
TAP1(1) = EWORD
TAP2(1) = EWORD
610 I = I + 1
TAP1(1) = SWORD
TAP2(1) = SWORD

```

```

QSH 66C
QSH 67C
QSH 68C
QSH 69C
QSH 70C
QSH 71C
QSH 72C
QSH 73C
QSH 74C
QSH 75C
QSH 76C
QSH 77C
QSH 78C
QSH 79C
QSH 80C
QSH 81C
QSH 82C
QSH 83C
QSH 84C
QSH 85C
QSH 86C
QSH 87C
QSH 88C
QSH 89C
QSH 90C
FLM 1C
FLM 2C
FLM 3C
FLM 4C
FLM 6C
FLM 7C
FLM 8C
FLM 9C
FLM 10C
FLM 11C
FLM 12C
FLM 13C
FLM 14C
FLM 15C
FLM 16C
FLM 17C
FLM 18C
FLM 19C
FLM 20C
FLM 21C
FLM 22C
FLM 23C
FLM 24C
ELM 25C
FLM 26C
FLM 28C
FLM 29C
FLM 30C
FLM 31C
FLM 32C
FLM 33C
FLM 34C
FLM 35C
FLM 36C
FLM 37C
FLM 38C
FLM 39C
ELM 40C
FLM 41C
FLM 42C
FLM 43C

```

	1AMP(2) = 1.0000	FLM 44C
	D(1,MA) = NG * .01	FLM 45C
	D(2,MA) = NK * .01	FLM 46C
	NU = 5 * 2*RG	FLM 47C
	IF(NG.EQ.0) GO TO 100	FLM 48C
	READ(IIP5,1001) (U(1,MA),I=5,NU)	FLM 49C
	WRITE(IIP6,2001) (U(1,MA),I=6,NU)	FLM 50C
100	IF(NK.EQ.0) GO TO 200	FLM 51C
	NL = NU * 1	FLM 52C
	NL = NU * 2*NK	FLM 53C
	READ(IIP5,1001) (U(1,MA),I=NL,NU)	FLM 54C
	WRITE(IIP6,2002) (U(1,MA),I=NL,NU)	FLM 55C
200	IF(NU.LT.54) RETURN	FLM 56C
	WRITE(IIP6,2030) MA,NG,NK,NU	FLM 57C
	IPO = 0	FLM 58C
	RETURN	FLM 59C
C****	CHECK MESH FOR NEGATIVE JACOBIANS AT ELEMENT CORNERS	FLM 60C
2	CALL UCHKNK(NDIM,NEL,DM)	FLM 61C
	NG = U(1,MA)	FLM 62C
	NK = U(2,MA)	FLM 63C
	NH = NH * (LINT+1)*(NK+NG*((NDIM+1)*NDIM)/2)	FLM 64C
	RETURN	FLM 65C
C****	COMPUTE THE VISCOELASTIC STIFFNESS MATRICES FOR SHEAR AND BULK	FLM 66C
C****	SET UP THE MATERIAL PROPERTIES	FLM 67C
3	NL = 4	FLM 68C
	NG = U(1,MA)	FLM 69C
	GG = U(4,MA)	FLM 70C
	IF(NG.LE.0) GO TO 150	FLM 71C
	NL = 2*NG * NL	FLM 72C
	DO 14 I = 6,NL,2	FLM 73C
140	GG = GG + U(1,MA)*HIST(DT/D(I+1,MA))	FLM 74C
150	NK = U(2,MA)	FLM 75C
	XK = U(5,MA)	FLM 76C
	IF(NK.LE.0) GO TO 170	FLM 77C
	IL = NL * 2	FLM 78C
	NL = NL * 2*NK	FLM 79C
	DO 16 I = IL,NL,2	FLM 80C
160	XK = XK + U(1,MA)*HIST(UT/D(I+1,MA))	FLM 81C
C****	COMPUTE THE INTEGRALS FOR THIS ELEMENT	FLM 82C
170	CONTINUE	FLM 83C
	CALL VSTIF(NDIM,NDF,NEL,NSIDE,ESTIF(NDF*1+1),FORCE(1,2),STUN,LINT)	FLM 84C
	SS=U(3,MA)*CA	FLM 85C
	CALL ASSEM(NDIM,NDF,NEL,NSIDE,ESTIF(NDF*1+1),ESTIF,FORCE(1,2)+GG*	FLM 86C
	(XK+SS)	FLM 87C
	RETURN	FLM 88C
C****	STRESS COMPUTATION FOR THE VISCOELASTIC ELEMENT	FLM 89C
C****	VISCOELASTIC LOAD HISTORY COMPUTATION AND ELEMENT ASSEMBLY FROM IP	FLM 90C
4	CONTINUE	FLM 91C
C****	COMPUTATION AND OUTPUT OF STRESS AND HISTORY OF VISCOELASTIC SOLN.	FLM 92C
C****	DO THE INTEGRATION AND OUTPUT THE STRESS	FLM 93C
	NG = U(1,MA)	FLM 94C
	NK = U(2,MA)	FLM 95C
	GG = U(4,MA)	FLM 96C
	XK = U(5,MA)	FLM 97C
C****	CHECK FOR H STORAGE	FLM 98C
	LL = NH * (LINT+1)*(NK+NG*((NDIM+1)*NDIM)/2)	FLM 99C
	IF(LL.GT.ISZH) CALL VREF(IIP5,IIP6,H,NH,ISZH)	FLM100C
	NL = LINT * 1	FLM101C
	DO 500 LL = 1,NL	FLM102C
	NOPRNT = NPW	FLM103C
	IF(LL.NE.1) NOPRNT = .TRUE.	
	NPL = .FALSE.	FLM105C
	IF(NUMPLT.LE.0) GO TO 210	FLM106C
	DO 205 NP = 1,NUMPLT	FLM107C
205	IF(NEDATA(NP+1).EQ.N.AND.NEDATA(NP+2).EQ.LL) NPL = .TRUE.	FLM108C
210	CONTINUE	FLM109C
	IF(LL.NE.1) GO TO 220	FLM110C
	SS = 0.0	FLM111C
	TT = 0.0	FLM112C
	UU = 0.0	FLM113C
	IF(NDIM.EQ.2) UU = -1.0	FLM114C
	GO TO 230	FLM115C

```

220  SS = STW(1,LL-1)
      TT = STW(2,LL-1)
      UU = STW(3,LL-1)
      WW = STW(4,LL-1)
230  CALL HRICA2(SS,TT,UU,NDIM,NEL,NSIDE)
C*** COMPUTE THE PRESENT STRAIN AND STRAIN INCREMENT
      DTH = 0.
      THP = 0.
      DO 33 I = 1,NDIM
      CC = 0.
230  DO 30 K = 1,NEL
      CC = CC + SHAPE(4,K)*X(I,K)
      XX(I) = CC
      DO 32 J = 1,NDIM
      CC = 0.
      DD = 0.
      DO 31 K = 1,NEL
      CC = CC + SHAPE(1,K)*UL(J,K) + SHAPE(J,K)*UL(1,K)
310  DD = DD + SHAPE(1,K)*DUL(J,K) + SHAPE(J,K)*DUL(1,K)
      DEFS(1,J) = DD/XJAC
      DEFS(J+1,1) = CC/XJAC
      XIG(1,J) = GG*DEFS(J+1,1)
320  XIG(J+1,1) = XIG(1,J)
      DTH = DTH + DEFS(1,1)
330  THP = THP + DEFS(1+1,1)
      DO 34 I = 1,NDIM
      DEFS(1,1) = DEFS(1,1) - DTH/3.0
340  DEFS(1+1,1) = DEFS(1+1,1)/2.0
      XIK = THP*(XK/2. - GG/3.)
      YIK = XIK
      DTH = DTH/2.
C*** UPDATE THE SHEAR HISTORY
      IG = 0
      IF(NB.LE.0) GO TO 410
      DO 40 I = 1,NG
      IG = IG + 2
      DD = G(IG,MA)
      CC = G(IG,MA)*HIST(DIP/DD)
      DD = EXP(-DT/DD)
      DO 402 J = 1,NDIM
      DO 402 K = J,NDIM
      EE = H(NH) + CC*DEFS(J,K)
      XIG(J,K) = XIG(J,K) + EE
      EE = LE*DD
      XIG(K+1,J) = XIG(K+1,J) + EE
      H(NH) = EE
402  NH = NH + 1
400  CONTINUE
C*** UPDATE THE BULK HISTORY
410  IF(NAL.LE.0) GO TO 430
      DO 42 I = 1,NK
      IG = IG + 2
      DD = G(IG,MA)
      EE = H(NH) + G(IG,MA)*HIST(DIP/DD)*DTH
      XIK = XIK + EE
      EE = LE*EXP(-DT/DD)
      YIK = YIK + EE
      H(NH) = EE
420  NH = NH + 1
430  CONTINUE
      DO 43 I = 1,NDIM
      XIG(1,1) = XIG(1,1) + XIK
435  XIG(1+1,1) = XIG(1+1,1) + YIK
C*** OUTPUT THE STRESSES FOR THE CURRENT TIME STEP
      IF(NOPRNT) GO TO 640
      MCT = MCT + 1
      IF(MCT.GT.0) GO TO 630
      WRITE(IIP6,2004) HEAD,TIME,IPG,(XHED(I),XH,I=1,NDIM),
      X((SHE0(I),J),SH,I=J,NDF),J=1,NDF)
      WRITE(IIP6,2003) (HLANK,HLANK,I=1,NDIM),
      X((SHE0(I),J),EH,I=J,NDF),J=1,NDF)
      IPG = IPG + 1

```

```

FLM116C
FLM117C
FLM118C
FLM119C
FLM120C
FLM121C
FLM122C
FLM123C
FLM124C
FLM125C
FLM126C
FLM127C
FLM128C
FLM129C
FLM130C
FLM131C
FLM132C
FLM133C
FLM134C
FLM135C
FLM136C
FLM137C
FLM138C
FLM139C
FLM140C
FLM141C
FLM142C
FLM143C
FLM144C
FLM145C
FLM146C
FLM147C
FLM148C
FLM149C
FLM150C
FLM151C
FLM152C
FLM153C
FLM154C
FLM155C
FLM156C
FLM157C
FLM158C
FLM159C
FLM160C
FLM161C
FLM162C
FLM163C
FLM164C
FLM165C
FLM166C
FLM167C
FLM168C
FLM169C
FLM170C
FLM171C
FLM172C
FLM173C
FLM174C
FLM175C
FLM176C
FLM177C
FLM178C
FLM179C
FLM180C
FLM181C
FLM182C
FLM183C
FLM184C
FLM185C
FLM186C
FLM187C

```

```

MCI = 16
630 WRITE (17P6,1AR1) N,IXX(I),I=1,NDIM),((XIG(I,J),J=1,NDIM),I=1,NDIM) FLM188C
WRITE (17P6,1AR2) UM,MA,((DEPS(J+1,I),J=1,NDIM),I=1,NDIM) FLM189C
640 IF (NPL) CALL PLDATA(NUMPL,NDIM,N,LL,SHEO,XX,XIG,FORCE) FLM190C
IF (LL.NE.1 .OR. IPLOT.EQ. 0.0) GO TO 650 FLM191C
IF (IPLOT.EQ.3) GO TO 645
VECT(N,1) = XIG(1,1)
VECT(N,2) = XIG(2,2)
VECT(N,3) = 0.0
VECT(N,4) = XIG(1,2)
VECT(N,5) = DEPS(2,1)
VECT(N,6) = DEPS(3,2)
VECT(N,7) = 0.0
VECT(N,8) = DEPS(3,1)
GO TO 650
645 KK = 1
DO 646 I=1,NDIM
DO 646 J=1,NDIM
KK = KK + 1
VECT(KK,1) = XIG(I,J)
VECT(KK,2) = DEPS(J+1,I)
C
C CALCULATE PRINCIPLE STRAINS
C
650 IF (NPRINT) GO TO 550
IF (MA.NE.1) GO TO 550
IF (NDIM.NE.3) GO TO 550
CALL PRINC(DEPS)
WRITE (6,3400) DEPS(1,1),DEPS(1,2),DEPS(1,3)
MCI = MCI + 2
3000 FORMAT(5X,22H $$$PRINCIPAL STRAINS= 3E15.6 /)
550 IF (ISX.EQ.4 .OR. LL.EQ.1) GO TO 500
C.... COMPUTE THE LOADS FOR THE NEXT TIME STEP
DO 44 I = 1,NDIM
DO 44 J = 1,NDIM
XIG(I,J) = XIG(J+1,I)*XX
440 XIG(J,I) = XIG(I,J)
I1 = J
XX = XJAC*XX*U(3,MA)
DO 47 I = 1,NPL
EE = SHAPE(4,I)*XX
DO 46 J = 1,NDF
CC = 0.0
DO 45 K = 1,NDIM
450 CC = CC + SHAPE(K,I)*XIG(J,K)
460 FORCE(I1,J,I) = FORCE(I1,J,I) - CC - EE*UOL(J,I)
470 I1 = I1 + NDF
500 CONTINUE
RETURN
C.... ELEMENT LOAD COMPUTATION FOR BODY TYPE FORCES, ETC.
5 CONTINUE
RETURN
4000 IFG = 0
RETURN
C.... FORMAT STATEMENTS
1000 FORMAT(2I5,3F10.0)
1001 FORMAT(F10.0)
2000 FORMAT(23H VISCOELASTIC MATERIAL//10,12H SHEAR TERMS/
X 11H,12H BULK TERMS//10X,12H G-INFINITY=,1PE12.4/10X,
X 12H K-INFINITY=,1PE12.4/10X,12H DENSITY =, 1PE12.4/1X)
2001 FORMAT(10X,14H SHEAR MODULUS,6X,4H TIME/(10X,1P2E12.4))
2002 FORMAT(10X,14H BULK MODULUS,6X,4H TIME/(10X,1P2E12.4))
2003 FORMAT(8X,4(2A6))
2004 FORMAT(10H,12A6,4E13.5,20X,4HPAGE,13/5X,16HELEMENT STRESSES//
1 1X,7HELEMENT,9(2A6))
2030 FORMAT(9H MATERIAL,13,17H EXCEEDS STORAGE,,15,13H SHEAR TERMS,,15,
X 16H BULK TERMS NEED,14,7H WORDS. )
END
SUBROUTINE PRINC(STRAIN)
C
C CALCULATE PRINCIPLE STRAIN
C

```

```

FLM193C
FLM194C
FLM195C
FLM196C
FLM197C
FLM198C
FLM199C
FLM200C
FLM201C
FLM202C
FLM203C
FLM204C
FLM205C
FLM206C
FLM207C
FLM208C
FLM209C
FLM210C
FLM211C
FLM212C
FLM213C
FLM214C
FLM215C
FLM216C
FLM217C
FLM218C
FLM219C
FLM220C
FLM221C
FLM222C
FLM223C
FLM224C
FLM225C
FLM226C
FLM227C
FLM228C

```

```

C      DIMENSION STRAIN(4,3)
C      S11 = STRAIN(2,1)
C      S12 = STRAIN(3,1)/2.
C      S13 = STRAIN(4,1)/2.
C      S22 = STRAIN(3,2)
C      S23 = STRAIN(4,2)/2.
C      S33 = STRAIN(4,3)
C      R1 = -(S11*S22*S33)
C      R2 = S11*S22*S11*S33+S22*S33 -(S13*S13+S12*S12+S23*S23)
C      R3 = S13*S13*S22+S12*S12*S33+S23*S23*S11
C      I = -(S11*S22*S33 +2.*S12*S23*S13)
C      IF (R1.EQ.0.AND.B2.EQ.0.AND.R3.EQ.0.0) GO TO 10
C      CALL CUBIC(R1,R2,R3,I)
10  STRAIN(1,1) = R1
C      STRAIN(1,2) = R2
C      STRAIN(1,3) = R3
C      RETURN
C      END
C      SUBROUTINE CUBIC(R1,R2,R3,I)
C      DATA ZC,ZU,ZR,S,0.866025404/
C      THIS ROUTINE DETERMINES THE THREE ROOTS OF A RATIONAL CUBIC
C      EQUATION OF FORM:
C
C       $x^3 + R1x^2 + R2x + R3 = 0$ 
C
C      THE USER SUPPLIES THE COEFFICIENTS (R1,R2,R3) THROUGH THE
C      SUBROUTINE CALL LIST. THE SUBROUTINE RETURNS THE ROOTS THROUGH
C      THE SAME VARIABLE LIST, ALONG WITH THE INTEGER, I, WHICH TELLS
C      THE FORM OF THE ROOTS. THERE ARE ONLY TWO POSSIBLE FORMS FOR
C      ROOTS OF A CUBIC EQUATION...
C
C      FORM-1, (I=1) THE ROOTS ARE ALL REAL NUMBERS.
C
C      FORM-2, (I=2) THE FIRST ROOT,R1, IS REAL AND THE
C      OTHER TWO ROOTS ARE COMPLEX CONJUGATE
C      PAIRS, WHERE R2 IS THE REAL PART AND R3
C      IS THE IMAGINARY PART.
C
C      T3 = 1./3.
C      Q = 2.*(R1*T3)**3 - R1*R2*T3 + R3
C      Q2 = Q**2
C      P = R2 - R1*R1*T3
C      R = Q1*Q2 + (P*T3)**3
C      R2 = SQRT(ABS(R))
C      A = Q1 + R2
C      B = Q1 - R2
C      TERM = -R1*T3
C
C      IF (R.GT.0) GO TO 50
C      PATH FOR REAL ROOT DETERMINATION (FORM-1)
C
C      I = 1
C      THETA = ATAN2(Q2,Q1)
C      RC = (SQRT(Q2**2+R2**2))**T3
C      ZA = RC*COS(THETA*T3)
C      ZR = RC*SIN(THETA*T3)
C      R1 = ZC*ZA + TERM
C      R2 = ZC*(ZC/ZC-ZR*ZU) + TERM
C      R3 = ZC*(ZC*ZC + ZR*ZU) + TERM
C
C      RETURN
C
C      PATH FOR ONE REAL ROOT AND TWO COMPLEX, (FORM-2)
C
C      I = 2
C      AT3 = (ABS(A))**T3

```

```

      HT3 = (A13+H13)*T3
      AT3 = SIGN(AT3+A)
      HT3 = SIGN(HT3+H)
      B1 = A13 * HT3 * TERM
      B2 = ZC*(A13+H13) * TERM
      B3 = ZD*(A13-H13)
C
      RETURN
      END
*DECK VISCQ
SUBROUTINE VSTIF(NDIM,NDF,NEL,NSIDE,ST,FORCE,STOR,LINT)
DIMENSION ST(4,27),ST(1),FORCE(NDF,1)
COMMON/SHAPE/XJAC,SHAPE(4,2C),XJUNK(1R),X(3,2U),LD(12U)
C*** INITIALIZE THE ARRAYS FOR STIFFNESS AND INTEGRALS
      DO 20 J1 = 1,LINT
      SS = STOR(1,I1)
      TT = STOR(2,I1)
      UU = STOR(3,I1)
      WU = STOR(4,I1)
      CALL SWICK2(SS,TT,UU,NDIM,NEL,NSIDE)
      DVOL = WU*XJAC
C*** FORM THE INDEPENDENT INTEGRALS
      NS =
      DO 10 J = 1,NEL
      TEMP=SHAPE(4,J)*XJAC*WU
      DO 11 N = 1,NDIM
      FORCE(N,J)=TEMP*FORCE(N,J)
      CC = SHAPE(N,J)*DVOL
      DO 12 I = 1,J
      L = NDIM
      IF(I.EQ.J) L = N
      DO 13 M = 1,L
      NS = NS + 1
100   ST(NS) = ST(NS) + CC*SHAPE(M,J)
200   CONTINUE
      RETURN
      END
SUBROUTINE ASSEMB(NDIM,NDF,NEL,NSIF,ST,ESTIF,FORCE,GG,XX,H0)
DIMENSION ESTIF(NSIF,NSIF),ST(1),FORCE(1)
C*** ASSEMBLY OF ELEMENT INTO THE STIFFNESS
      NU = NEL*NDIM
      NS = (NU*(NU+1))/2
      J1 = NDF*(NEL-1)
      NDI = NDF + 1
      XX = XX + ZC*GG/Z3
      DO 23 J = 1,NEL
      DO 22 N = 1,NDIM
      NI = NDI + N
      I1 = J1
      DO 21 I = J,NEL
      L = 1
      IF(I.EQ.J) L = N
      DO 20 M = 1,NDIM
      MI = NDI + M
      CC = ST(NS)
      ST(NS) = 0.0
      ESTIF(I1+NI,J1+NI) = ESTIF(I1+MI,J1+NI) + XX*CC
      CC = GG*CC
      ESTIF(I1+NI,J1+MI) = ESTIF(I1+NI,J1+MI) + CC
      IF(MI.NE.NI) GO TO 200
      DO 10 K = 1,NDIM
      ESTIF(I1+K,J1+K) = ESTIF(I1+K,J1+K) + CC
100   NS = NS + 1
200   NI = NDI + N
210   I1 = J1 + NDF
220   CONTINUE
230   J1 = J1 + NDF
      NU = NEL*NDF
      DO 30 J = 2,NU
      K = J - 1
      DO 30 I = 1,K
      ESTIF(I,J) = ESTIF(I,J) + ESTIF(J,I)
300   ESTIF(J,I) = ESTIF(I,J)
      ASS 1C
      ASS 2C
      ASS 3C
      ASS 4C
      ASS 5C
      ASS 6C
      ASS 7C
      ASS 8C
      ASS 9C
      ASS 10C
      ASS 11C
      ASS 12C
      ASS 13C
      ASS 14C
      ASS 15C
      ASS 16C
      ASS 17C
      ASS 18C
      ASS 19C
      ASS 20C
      ASS 21C
      ASS 22C
      ASS 23C
      ASS 24C
      ASS 25C
      ASS 26C
      ASS 27C
      ASS 28C
      ASS 29C
      ASS 30C
      ASS 31C
      ASS 32C
      ASS 33C
      ASS 34C
      ASS 35C

```

```

DO 400 I=1,N1
400 ESTIF(I,I)=ESTIF(I,I)+RU*FORCE(I)
RETURN
END
FUNCTION HIST(C)
C.... HISTORY TERM FOR THE INTEGRATION OF VISCOELASTIC EQUATIONS
C.... HIST = (1. - EXP(-C))/C
IF(C.GT.0.01) GO TO 200
HIST = 1.
DO 10, I = 1,3
J = 5 - I
100 HIST = 1.-C/FLOAT(J)*HIST
RETURN
200 HIST = (1. - EXP(-C))/C
RETURN
END
SUBROUTINE VRUFF(ITRD,ITWR,H,IM,ISZH)
C.... BUFFER THE HISTORY VECTORS AND RESET THE POINTER
DIMENSION H(ISZH)
WRITE(ITWR) H
WRITE(ITRD) H
IM = 1
RETURN
END
*DECK ELMT22
SUBROUTINE ELMT22(N,MA,NDIM,NDF,NEL,NELI,NSTF,NSIZV,NVEC,MCT,DM,D,
X XYZ,IX,N,FORCE,ESTIF,U,VECT,ISM)
REAL LABL
LOGICAL NPR,NPL,NUPRNT
DIMENSION D(63*1),ESTIF(NSTF,NSTF),FORCE(NSTF,2),STW(4,8),XX(3),
X IX(NELI,1),D(NDF,1),DEPS(4,3),XIG(4,3),TAB1(11),TAB2(11)
X XSHL(3,3),H(1),IG(6),JG(6)
DIMENSION VECT(NSIZV,NVEC)
COMMON/DYNAMO/IME,NSIG(7),NI,NSIEP,DI,NUMPLT,NEDATA(20,3),NPR,NPL
COMMON/LABELS/ LABL(6),XHE(3),XHEH(6),FH,UHED(6),UH,RHED(6),RH
X ,XWORD1,XWORD2,XWORD3,HEAD(12),START,CEASE,IPG,NSTR,WORD(30)
COMMON/SHAPE/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)
COMMON/TAPES/ ITP5,ITP6
COMMON/VISDAT/UTP,RH,ISZH,DUL(6,20),UL(6,20),UDL(6,20),C6
COMMON/VTAPES/ ITP13,ITP14,ITRD,ITWR
COMMON/FLOTS/IFLOT
DATA TAB1(1),TAB2(1)/RH(1)G,17 ,BH ( BX /VSWORD/1H)/
DATA ONE(2),XX,YSH XY,SH XZ,SH XY,SH YY,SH YZ,
X NH XG,6H YZ,6H ZZ, /
DATA FWORD,ERORD,XWORD/RH,DPF12,3,RH,1PE12,3,BH ,12X /
DATA SH,FR,PLANK/6MSTRESS,6MSTRAIN,AM /,TWORD/RH,AS,17 /
DATA 10/1,1,2,1,2,3/1,2,2,3,3,3/
C
C GENERAL 2D,3D, FLUID ELEMENT (ONE POINT QUADRATURE)
C
IF(CISX.GT.6) GO TO 4000
NSIDE = (NEL+1)/NUM902
GO TO (1,2,3,4,5+4), ISH
C.... CHARACTERIZE THE MATERIAL FOR ISOTROPIC LINEAR VISCOELASTICITY
I
READ(ITP5,100) NG,NK,D(4,MA),D(5,MA),D(3,MA)
WRITE(ITP6,2000) NG,NK,D(4,MA),D(5,MA),D(3,MA)
CALL INTREL(1),D,NUMI,LINEI,STW)
CA = .
DT = .
FLM 28C
FLM 29C
DTP = .
NH = 1
FLM 30C
FLM 31C
C.... SET UP HEADS FOR PRINTOUTS
I = 2
DO 60, J=1,KDIM
TAB1(1) = FWORD
TAB2(1) = XWORD
FLM 32C
FLM 33C
FLM 34C
FLM 35C
FLM 36C
FLM 37C
60 J = J + 1
DO 61, J = 1,6
TAB1(1) = FWORD
TAB2(1) = FWORD
FLM 38C
FLM 39C
FLM 40C
61 J = J + 1
TAB1(1) = SWORD
FLM 41C
FLM 42C

```

```

1AMB2(1) = S*ORD
1AMB2(2) = T*ORD
D(1,MA) = NG * .01
D(2,MA) = NK * .01
NL = 3 * 2*NG
IF (AG, EQ, 0) GO TO 170
READ(1,PS,1001) (D(I,MA), I=6,NU)
WRITE(1,PS,2001) (D(I,MA), I=6,NU)
100 IF (NK, EQ, 0) GO TO 200
NL = NU * 1
NU = NU * 2*NK
READ(1,PS,1001) (D(I,MA), I=NL,NU)
WRITE(1,PS,2002) (D(I,MA), I=NL,NU)
200 IF (ND, LT, 0) RETURN
WRITE(1,PS,2030) MA, NG, NK, NU
IRG = 0
RETURN
C.... CHECK MESH FOR NEGATIVE JACOBIANS AT ELEMENT CORNERS
2 CALL CRRRIA(NDIM, NEL, DM)
NG = D(1,MA)
NK = D(2,MA)
NH = NH * (LINT+1) * (NK * NG * ((NDIM+1) * NDIM) / 2)
RETURN
C.... COMPUTE THE VISCOELASTIC STIFFNESS MATRICES FOR SHEAR AND BULK
C.... SET UP THE MATERIAL PROPERTIES
3 NL = 4
NG = D(1,MA)
GG = D(4,MA)
IF (ND, LT, 0) GO TO 150
NL = 2*NG * NL
DO I = 1, 1 + NL * 2
140 GG = GG + D(I,MA) * HIST(OT/D(I+1,MA))
150 NK = D(2,MA)
XX = D(5,MA)
IF (NK, LE, 0) GO TO 170
IL = NL * 2
NL = NL * 2*NK
DO I = 1, 1 + NL * 2
160 XK = XK + D(I,MA) * HIST(OT/D(I+1,MA))
C.... COMPUTE THE INTEGRALS FOR THIS ELEMENT
170 CONTINUE
CALL VSTIF(NDIM, NDF, NEL, INSIDE, ESTIF(NDF+1,1), FORCE(1,2), STOR(LINT))
SS = D(3,MA) * CA
CALL ASSEMB(NDIM, NDF, NEL, NSTF, ESTIF(NDF+1,1), ESTIF, FORCE(1,2), GG,
(XK, SS))
RETURN
C.... STRESS COMPUTATION FOR THE VISCOELASTIC ELEMENT
C.... VISCOELASTIC LOAD HISTORY COMPUTATION AND ELEMENT ASSEMBLY FROM TP
4 CONTINUE
C.... COMPUTATION AND OUTPUT OF STRESS AND HISTORY OF VISCOELASTIC SOLN.
C.... DO THE INTEGRATION AND OUTPUT THE STRESS
NG = D(1,MA)
NK = D(2,MA)
GG = D(4,MA)
XK = D(5,MA)
C.... CHECK FOR H STORAGE
LL = NH * (LINT+1) * (NK * NG * ((NDIM+1) * NDIM) / 2)
IF (LL, GT, ISZM) CALL VBUFF(ITRD, ITRW, H, NH, ISZM)
NL = LINT
DO 500 LL = 1, NL
NORPT = NH
IF (LL, NE, 1) NORPT = .TRUE.
NPL = .FALSE.
IF (NUMPL, LE, 0) GO TO 210
DO 205 NP = 1, NUMPL
205 IF (NEGAT(NP,1), EQ, N, AND, NEGAT(NP,2), EQ, LL) NPL = .TRUE.
210 CONTINUE
IF (LL, NE, 1) GO TO 220
SS = 0.0
TT = 0.0
UU = 0.0
XX = STOR(4,1)

```

```

FLM 43C
FLM 44C
FLM 45C
FLM 46C
FLM 47C
FLM 48C
FLM 49C
FLM 50C
FLM 51C
FLM 52C
FLM 53C
FLM 54C
FLM 55C
FLM 56C
FLM 57C
FLM 58C
FLM 59C
FLM 60C
FLM 61C
FLM 62C
FLM 63C
FLM 64C
FLM 65C
FLM 66C
FLM 67C
FLM 68C
FLM 69C
FLM 70C
FLM 71C
FLM 72C
FLM 73C
FLM 74C
FLM 75C
FLM 76C
FLM 77C
FLM 78C
FLM 79C
FLM 80C
FLM 81C
FLM 82C
FLM 83C
FLM 84C
FLM 85C
FLM 86C
FLM 87C
FLM 88C
FLM 89C
FLM 90C
FLM 91C
FLM 92C
FLM 93C
FLM 94C
FLM 95C
FLM 96C
FLM 97C
FLM 98C
FLM 99C
FLM100C
FLM102C
FLM103C
FLM105C
FLM106C
FLM107C
FLM108C
FLM109C
FLM110C
FLM111C
FLM112C
FLM113C

```

```

      IF (NDIM.EQ.2) UU = -1.0
      GO TO 230
220  SS = STOK(1,LL-1)
      TT = STOK(2,LL-1)
      UU = STOK(3,LL-1)
      WW = STOK(4,LL-1)
230  CALL BRICK2(SS,TT,UU,NDIM,NEL,NSIDE)
C.... COMPUTE THE PRESENT STRAIN AND STRAIN INCREMENT
      DTH = 0.
      THP = 0.
      DO 33 I = 1,NDIM
      CC = 0.0
      DO 30 K = 1,NEL
300  CC = CC + SHAPE(4,K)*XX(I,K)
      XX(I) = CC
      DO 32 J = 1,NDIM
      CC = 0.
      DO 31 K = 1,NEL
      CC = CC + SHAPE(I,K)*UL(J,K) + SHAPE(J,K)*UL(I,K)
310  DD = DD + SHAPE(I,K)*DUL(J,K) + SHAPE(J,K)*DUL(I,K)
      DEPS(I,J) = DD/XJAC
      DEPS(J+1,I) = CC/XJAC
      XIG(I,J) = GG*DEPS(J+1,I)
320  XIG(J+1,I) = XIG(I,J)
      DTH = DTH + DEPS(I,I)
330  THP = THP + DEPS(I+1,I)
      DO 34 I = 1,NDIM
      DEPS(I,I) = DEPS(I,I) - DTH/3.0
340  DEPS(I+1,I) = DEPS(I+1,I)/2.0
      XJK = THP*(XK/2.-GG/3.)
      YIK = XIK
      DTH = DTH/2.
C.... UPDATE THE SHEAR HISTORY
      IG = 4
      IF (NG.LE.0) GO TO 410
      DO 40 I = 1,NG
      IG = IG + 2
      DD = D(IG+1,MA)
      CC = D(IG,MA)*HIST(DTP/DD)
      DD = EXP(-DT/DD)
      DO 402 J = 1,NDIM
      DO 402 K = J,NDIM
      EE = H(NH) + CC*DEPS(J,K)
      XIG(J,K) = XIG(J,K) + EE
      EE = LE*DD
      XIG(K+1,J) = XIG(K+1,J) + EE
      H(NH) = EE
402  NH = NH + 1
400  CONTINUE
C.... UPDATE THE BULK HISTORY
410  IF (NK.LE.0) GO TO 430
      DO 42 I = 1,NK
      IG = IG + 2
      DD = D(IG+1,MA)
      EE = H(NH) + D(IG,MA)*HIST(DTP/DD)*DTH
      XIK = XIK + EE
      EE = LE*EXP(-DT/DD)
      YIK = YIK + EE
      H(NH) = EE
420  NH = NH + 1
430  CONTINUE
      DO 435 I = 1,NDIM
      XIG(I,I) = XIG(I,I) + XIK
435  XIG(I+1,I) = XIG(I+1,I) + YIK
C.... OUTPUT THE STRESSES FOR THE CURRENT TIME STEP
      IF (NPRINT) GO TO 640
      MCT = MCT - 1
      IF (MCT.GT.0) GO TO 630
      WRITE (IIP6,2004) HEAD,TIME,IPG,(XHEB(I),XH,I=1,NDIM),
      X((SHEB(I,J),SH,I=J,NDF),J=1,NDF)
      WRITE (IIP6,2003) (BLANK,HLANK,I=1,NDIM),

```

```

ELM114C
ELM115C
ELM116C
ELM117C
ELM118C
ELM119C
ELM120C
ELM121C
ELM122C
ELM123C
ELM124C
ELM125C
ELM126C
ELM127C
ELM128C
ELM129C
ELM130C
ELM131C
ELM132C
ELM133C
ELM134C
ELM135C
ELM136C
ELM137C
ELM138C
ELM139C
ELM140C
ELM141C
ELM142C
ELM143C
ELM144C
ELM145C
ELM146C
ELM147C
ELM148C
ELM149C
ELM150C
ELM151C
ELM152C
ELM153C
ELM154C
ELM155C
ELM156C
ELM157C
ELM158C
ELM159C
ELM160C
ELM161C
ELM162C
ELM163C
ELM164C
ELM165C
ELM166C
ELM167C
ELM168C
ELM169C
ELM170C
ELM171C
ELM172C
ELM173C
ELM174C
ELM175C
ELM176C
ELM177C
ELM178C
ELM179C
ELM180C
ELM181C
ELM182C
ELM183C
ELM184C
ELM185C

```

```

X ((SHEDE(I,J),EM,I=J,NDF),J=1,NDF)
IPG = IPG + 1
MCF = 10
630 WRITE(IIP6,IAH1) N,XX(1),I=1,NDIM,((XIG(I,J),J=1,NDIM),I=1,NDIM)
WRITE(IIP6,IAH2) UM,MA,((DEPS(J+1,I),J=1,NDIM),I=1,NDIM)
640 IF(NPL) CALL PLDATA(NUMEL,NDIM,N,LL,SHEDE,XX,XIG,FORCE)
IF(LL.NE.1 .OR. IPLU1.EQ. 0.0) GO TO 650
IF(IPLU1.EQ.3) GO TO 645
VECT(N,1) = XIG(1,1)
VECT(N,2) = XIG(2,2)
VECT(N,3) = 0.0
VECT(N,4) = XIG(1,2)
VECT(N,5) = DEPS(2,1)
VECT(N,6) = DEPS(3,2)
VECT(N,7) = 0.0
VECT(N,8) = DEPS(3,1)
GO TO 650
645 KK = 1
DO 646 I=1,NDIM
DO 646 J=1,NDIM
KK = KK + 1
VECT(KK,1) = XIG(1,J)
VECT(KK,2) = DEPS(J+1,1)
650 IF(I9.EQ.4) GO TO 500
C.... COMPUTE THE LOADS FOR THE NEXT TIME STEP
DO 443 I = 1,NDIM
DO 443 J = 1,NDIM
XIG(I,J) = XIG(J+1,I)*WW
440 XIG(J,I) = XIG(I,J)
I1 = J
WW=XJAC*WW*U(3,MA)
DO 47 I = 1,NEL
EE=SHAPE(4,I)*WW
DO 46 J = 1,NDF
CC = 1.0
DO 45 K = 1,NDIM
CC = CC + SHAPE(K,I)*XIG(J,K)
450 FORCE(I1+J,1)=FORCE(I1+J,1)+CC*EE*U(NL(J,I))
470 I1 = I1 + 100
500 CONTINUE
RETURN
C.... ELEMENT LOAD COMPUTATION FOR BODY TYPE FORCES, ETC.
5 CONTINUE
RETURN
4000 IPG = 0
RETURN
C.... FORMAT STATEMENTS
1000 FORMAT(2I5,3F10.0)
1001 FORMAT(8F10.0)
2000 FORMAT(23H VISCOELASTIC MATERIAL//110,12H SHEAR TERMS/
X 110,12H BULK TERMS//10X,12H G-INFINITY=,1PE12.4/10X,
X 12H K-INFINITY=,1PE12.4/10X,12H DENSITY =, 1PE12.4/1X)
2001 FORMAT(10X,14H SHEAR MODULUS*6X,4HTIME/(10X,1P2E12.4))
2002 FORMAT(10X,14H BULK MODULUS*6X,4HTIME/(10X,1P2E12.4))
2003 FORMAT(8X,9(2A6))
2004 FORMAT(1H1,12A6,E13.5,21X,4HPAGE,13//5X,16HELEMENT STRESSES//
I 1X,7HELEMENT,9(2A6))
2030 FORMAT(9H MATERIAL,13,17H EXCEEDS STORAGE.,15,13H SHEAR TERMS.,15,
X 16H BULK TERMS NEEDED,14,7H WORDS. )
END
*DECK ELMT23
SUBROUTINE ELMT23(N,MA,NDIM,NDF,NEL,NELI,NSTF,NSIZV,NVEC,MCT,DM,D, FLM 1C
X XYZ,IX,M,FORCE,ESTIF,U,VECT,ISA) FLM 2C
REAL LABEL FLM 3C
LOGICAL NPR,NPL,NUPRNT FLM 4C
DIMENSION D(63,1),ESTIF(NSTF,NSTF),FORCE(NSTF,2),STUV(4,4),XX(2), FLM 5C
X IX(NELI,1),U(NDF,1),DEPS(3,2),XIG(3,2),H(1),SHEDE(6) FLM 6C
DIMENSION VECT(NSIZV,NVEC)
COMMON/DYNAR0/TIME,NSIG(7),NT,NSTEP,DT,NUMPLI,NEDATA(20,3),NPR,NPL FLM 7C
COMMON/LABELS/ LABEL(6),XHEDE(3),XHFHEDE(6),FH,UHED(6),UH,RHED(6),RH FLM 8C
X VAWURD1,AWURD2,AWURD3,HEAD(12),START,CEASE,IPG,NSTF,WORD(30) FLM 9C
COMMON/SHAP/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120) FLM 10C

```

```

COMMON/TAPES/ ITP5,ITP6
COMMON/VISDAT/ DTP,NM,ISZM,DUL(6,20),UL(6,20),UDL(6,20),C6
COMMON/XTAPE/ ITP13,ITP14,ITRD,ITWR
COMMON/PLDIS/ IPL120
DATA SHED/3H RR,3H RZ,3H ZZ,3H TT,6HPRINC1,6HPRINC2/
DATA *Y,TT/1.3333333333333333,0.6666666666666667/
IF (ISW.GT.0) GO TO 4000
NSIDE = (NEL+1)/4
GO TO (1,2,3,4,5,4), ISW
C.... CHARACTERIZE THE MATERIAL FOR ISOTROPIC LINEAR VISCOELASTICITY
1 READ (ITP5,1000) NG,NK,D(4,MA),D(5,MA),D(3,MA)
WRITE (ITP6,2000) NG,NK,D(4,MA),D(5,MA),D(3,MA)
CALL INTEGL(2,0,NDIM,LINT,STUW)
CA = 0.0
DT = 0.0
DTP = 0.0
NH = 1
D(1,MA) = NG * .01
D(2,MA) = NK * .01
NU = 3 * 2*NG
IF (NG.EQ.0) GO TO 100
READ (ITP5,1001) (D(I,MA),I=6,NU)
WRITE (ITP6,2001) (D(I,MA),I=6,NU)
100 IF (NK.EQ.0) GO TO 200
NL = NU * 1
NU = NU + 2*NK
READ (ITP5,1001) (D(I,MA),I=NL,NU)
WRITE (ITP6,2002) (D(I,MA),I=NL,NU)
200 IF (NU.LT.64) RETURN
WRITE (ITP6,2030) NA*NG,NK,NU
JPG = 0
RETURN
C.... CHECK MESH FOR NEGATIVE JACOBIANS AT ELEMENT CORNERS
2 CALL CKHPIK(NDIM,NEL,DM)
NG = D(1,MA)
NK = D(2,MA)
NH = NH + (LINT+1)*(NK+NU*((NDIM+1)*NDIM)/2+NG)
CONT = 45./ATAN(1.)/2.
RETURN
C.... COMPUTE THE VISCOELASTIC STIFFNESS MATRICES FOR SHEAR AND BULK
C.... SET UP THE MATERIAL PROPERTIES
3 NL = 4
NG = D(1,MA)
GG = D(4,MA)
RO = D(3,MA)
IF (NG.LE.0) GO TO 150
NL = 2*NG + NL
DO 14 I = 0,NL,2
GG = GG + D(I,MA)*HIST(DT/D(I+1),MA))
140 NK = D(2,MA)
XK = D(5,MA)
IF (NK.LE.0) GO TO 170
IL = NL + 2
NL = NL + 2*NK
DO 16 I = 1L,NL,2
160 XK = XK + D(I,MA)*HIST(DT/D(I+1),MA))
170 C11 = XK * FT*GG
C12 = XK * FT*GG
C13 = C12
C14 = 0.0
C22 = C11
C23 = C12
C33 = C11
C34 = 0.0
C44 = GG
DO 39 KK = 1,LINI
S = STUW(1,KK)
T = STUW(2,KK)
W = STUW(4,KK)
CALL BRICK2(S,T,W,1,2,NEL,NSIDE)
RR = 0.0
DO 38 I = 1,NEL

```

```

FLM 110
FLM 120
FLM 130
FLM 140
FLM 150
FLM 160
FLM 170
FLM 180
FLM 190
FLM 200
FLM 210
FLM 220
FLM 230
FLM 240
FLM 250
FLM 260
FLM 270
FLM 280
FLM 290
FLM 300
FLM 310
FLM 320
FLM 330
FLM 340
FLM 350
FLM 360
FLM 370
FLM 380
FLM 390
FLM 400
FLM 410
FLM 420
FLM 430
FLM 440
FLM 450
FLM 460
FLM 470
FLM 480
FLM 490
FLM 500
FLM 510
FLM 520
FLM 530
FLM 540
FLM 550
FLM 560
FLM 570
FLM 580
FLM 590
FLM 600
FLM 610
FLM 620
FLM 630
FLM 640
FLM 650
FLM 660
FLM 670
FLM 680
FLM 690
FLM 700
FLM 710
FLM 720
FLM 730
FLM 740
FLM 750
FLM 760
FLM 770
FLM 780
FLM 790
FLM 800
FLM 810

```

```

180 RR = RH * X(1,1)*SHAPE(4,1)
    DVOL = RR*RH*XJAC
    II = I
    DO 375 I = 1,NEL
C.... COMPUTE LUMPED MASS
    TEMP = DVOL*SHAPE(4,1)*RO
    FORCE(II,1,2) = FORCE(II,1,2) + TEMP
    FORCE(II+1,2) = FORCE(II+1,2) + TEMP
C.... COMPUTE ELEMENT STIFFNESS
    RN = SHAPE(1,1)/XJAC*DVOL
    ZN = SHAPE(2,1)/XJAC*DVOL
    ET = SHAPE(4,1)/RH*DVOL
    A11 = C11*RN + C12*ET + C14*ZN
    A12 = C13*ZN + C14*RN
    A21 = C12*RN + C22*ET
    A22 = C23*ZN
    A31 = C13*RN + C23*ET + C34*ZN
    A32 = C33*ZN + C34*RN
    A41 = C14*RN + C44*ZN
    A42 = C34*ZN + C44*RN
    J1 = II
    DO 375 J = 1,NEL
    RN = SHAPE(1,J)/XJAC
    ZN = SHAPE(2,J)/XJAC
    ET = SHAPE(4,J)/RH
    ESTIF(II,1,J1) = ESTIF(II,1,J1) + RN*A11 + ET*A21 + ZN*A41
    ESTIF(II,1,J1+1) = ESTIF(II,1,J1+1) + ZN*A31 + RN*A41
    IF(1.NE.J)
    *ESTIF(II+1,J1) = ESTIF(II+1,J1) + RN*A12 + ET*A22 + ZN*A42
    ESTIF(II+1,J1+1) = ESTIF(II+1,J1+1) + ZN*A32 + RN*A42
375 J1 = J1 + NDF
380 J1 = J1 + NDF
390 CONTINUE
C.... CONSTRUCT SYMMETRIC ESTIF
    DO 395 I = 2,NSTF
    N = I-1
    DO 395 J = 1,N
    ESTIF(I,J) = ESTIF(I,J) + ESTIF(J,I)
395 ESTIF(J,I) = ESTIF(I,J)
    IF(106.EQ.J) RETURN
    DO 19 I = 1,NSTF
190 ESTIF(I,1) = ESTIF(I,1) + C4*FORCE(I,2)
    RETURN
C.... STRESS COMPUTATION FOR THE VISCOELASTIC ELEMENT
C.... VISCOELASTIC LOAD HISTORY COMPUTATION AND ELEMENT ASSEMBLY FROM TP
4 CONTINUE
C.... COMPUTATION AND OUTPUT OF STRESS AND HISTORY OF VISCOELASTIC SOLN.
C.... DO THE INTEGRATION AND OUTPUT THE STRESS
    PG = U(1,MA)
    NK = U(2,MA)
    GG = U(4,MA)
    XA = U(5,MA)
C.... CHECK FOR H STORAGE
    LL = RH * (LINT+1)*(NK*NG*(NDIM+1)*NDIM)/2*NG
    IF(LL.GT.1S2H) CALL VBUFF(IITR0,IITWR,H,NH,1S2H)
    NL = LINT + 1
    DO 50 LL = 1,NL
    NUPRNT = NPH
    IF(NSIG(LL).NE.0) NUPRNT = .TRUE.
    NPL = .FALSE.
    IF(NUMPLT.LE.0) GO TO 210
    DO 205 NP = 1,NUMPLT
205 IF(NEDATA(NP,1).EQ.N.AND.NEDATA(NP,2).EQ.LL) NPL = .TRUE.
210 CONTINUE
    IF(LL.NE.1) GO TO 220
    S = 0.0
    T = 0.0
    GO TO 230
220 S = ST0W(1,LL-1)
    T = ST0W(2,LL-1)
    W = ST0W(4,LL-1)
230 CALL BRICK2(S,T,-1.,2.,VEL,NSIDE)

```

C...	COMPUTE THE PRESENT STRAIN AND STRAIN INCREMENT	FLM155C
	DTH = 0.	FLM156C
	TRP = 0.	FLM157C
	DO 33 I = 1,2	FLM158C
	CC = 0.	FLM159C
300	DO 30 J, K = 1,NEL	FLM160C
	CC = CC + SHAPE(4,K)*X(I,K)	FLM161C
	XX(I) = CC	FLM162C
	DO 32 J = 1,2	FLM163C
	CC = 0.	FLM164C
	DO = 0.	FLM165C
	DO 31 K = 1,NEL	FLM166C
	CC = CC + SHAPE(I,K)*UL(J,K) + SHAPE(J,K)*UL(I,K)	FLM167C
310	DO = DO + SHAPE(I,K)*DUL(J,K) + SHAPE(J,K)*DUL(I,K)	FLM168C
	DEPS(I,J) = DO/XJAC	FLM169C
	DEPS(J+1,I) = CC/XJAC	FLM170C
	XIG(I,J) = GG*DEPS(J+1,I)	FLM171C
320	XIG(J+1,I) = XIG(I,J)	FLM172C
	DTH = DTH + DEPS(I,I)	FLM173C
330	TRP = TRP + DEPS(I+1,I)	FLM174C
	RR = XX(I)	FLM175C
	ET = 0.	FLM176C
	DET = 0.	FLM177C
	DO 35 K = 1,NEL	FLM178C
	CC = SHAPE(4,K)	FLM179C
	ET = ET + CC*UL(I,K)	FLM180C
350	DET = DET + CC*DUL(I,K)	FLM181C
	ST = GG*ET*2.0	FLM182C
	STF = ST	FLM183C
	XIK = (TRP + ET*2./RR)*(XK/2. - GG/3.)	FLM184C
	YIK = XIK	FLM185C
	DTH = DTH/2. + DET/RR	FLM186C
	DET = DET*2.0 - DTH*RR*TT	FLM187C
	DO 34 I = 1,2	FLM188C
	DEPS(I,I) = DEPS(I,I) - DTH*TT	FLM189C
340	DEPS(I+1,I) = DEPS(I+1,I)/2.0	FLM190C
C...	UPDATE THE SHEAR HISTORY	FLM191C
	IG = 4	FLM192C
	IF(NG.LE.0) GO TO 410	FLM193C
	DO 400 I = 1,NG	FLM194C
	IG = IG + 2	FLM195C
	DD = U(IG+1,MA)	FLM196C
	CC = U(IG,MA)*HISI(UTP/00)	FLM197C
	DD = EXP(-DT/00)	FLM198C
	DO 402 J = 1,2	FLM199C
	DO 402 K = J,2	FLM200C
	EE = H(NH) + CC*DEPS(J,K)	FLM201C
	XIG(J,K) = XIG(J,K) + EE	FLM202C
	EE = CF*DD	FLM203C
	XIG(K+1,J) = XIG(K+1,J) + EE	FLM204C
	H(NH) = FE	FLM205C
402	NH = NH + 1	FLM206C
	EE = H(NH) + CC*DET	FLM207C
	ST = ST + EE	FLM208C
	EE = EF*DD	FLM209C
	H(NH) = FE	FLM210C
	STF = STF + EF	FLM211C
	NH = NH + 1	FLM212C
400	CONTINUE	FLM213C
C...	UPDATE THE WULK HISTORY	FLM214C
410	IF(NK.LE.0) GO TO 430	FLM215C
	DO 42 I = 1,NK	FLM216C
	IG = IG + 2	FLM217C
	DD = U(IG+1,MA)	FLM218C
	EE = H(NH) + U(IG,MA)*HISI(UTP/00)*DTH	FLM219C
	XIK = XIK + EE	FLM220C
	EE = EE*EXP(-DT/00)	FLM221C
	YIK = YIK + EE	FLM222C
	H(NH) = FE	FLM223C
420	NH = NH + 1	FLM224C
430	CONTINUE	FLM225C
	DO 435 I = 1,2	FLM226C

```

435 XIG(I,1) = XIG(I,1) * XIK
XIG(I,2) = XIG(I,2) * YIK
FT = F/XX(1)
ST = ST/XX(1) * XIK
C.... OUTPUT THE STRESSES FOR THE CURRENT TIME STEP
IF(NOPRINT) GO TO 649
MCT = MCT + 1
IF(MCT.GT.5) GO TO 630
WRITE(IIP6,2004) HEAD,TIME,IPG
IPG = IPG + 1
MCT = 16
630 WRITE(IIP6,2003) N,(XX(1),I=1,2),((XIG(I,J),J=1,2),I=1,2),ST,
X UM,MA,((DEPS(J,1),J=1,2),I=1,2),FT
640 IF(NPL) CALL PLDATA(NUMEL,NDIM,N,LL,SHED,XX,XIG,FORCE)
IF(PLTID.NE.1) GO TO 641
IF(LL.NE.1) GO TO 641
VECT(N,1) = XIG(1,1)
VECT(N,2) = XIG(2,2)
VECT(N,3) = ST
VECT(N,4) = XIG(1,2)
VECT(N,5) = DEPS(2,1)
VECT(N,6) = DEPS(3,2)
VECT(N,7) = FT
VECT(N,8) = DEPS(3,1)
641 CONTINUE
IF(ISA.EQ.4.OR.LL.EQ.1) GO TO 500
C.... COMPUTE THE LOADS FOR THE NEXT TIME STEP
DD = *W*HR
XIG(1,1) = XIG(2,1)*DD
XIG(1,2) = XIG(3,1)*DD
XIG(2,2) = XIG(3,2)*DD
XIG(2,1) = XIG(1,2)
STF = (STF/HR + YIK)*X*AJAC
W = XJAC*DD*DD(3,MA)
11 =
DO 47, I = 1,NEL
CC = SHAPE(4,I)
FORCE(I+1,1) = FORCE(I+1,1) - STF*CC
EE = CC*W
DO 46, J = 1,2
CC = 1.0
DO 45, K = 1,2
450 CC = CC + SHAPE(K,I)*XIG(J,K)
460 FORCE(I+J,1) = FORCE(I+J,1) - CC*EE*UDL(J,I)
470 11 = 11 + NUF
500 CONTINUE
RETURN
C.... ELEMENT LOAD COMPUTATION FOR BODY TYPE FORCES, ETC.
5 CONTINUE
RETURN
4000 IPG = 0
RETURN
C.... FORMAT STATEMENTS
1000 FORMAT(2I5,4F10.0)
1001 FORMAT('H10.0)
2000 FORMAT(5X,57H LINEAR VISCOELASTIC MATERIAL, AXISYMMETRIC SOLID ELE
XMENT //10,12H SHEAR TERMS//
X 110,12H BULK TERMS//10X,12H G-INFINITY=,1PE12.4/10X,
X 12H K-INFINITY=,1PE12.4/10X,12H DENSITY =,1PE12.4/1X)
2001 FORMAT(10X,14H SHEAR MODULUS,6X,4HTIME/(10X,1P2E12.4))
2002 FORMAT(11X,14H BULK MODULUS,6X,4HTIME/(10X,1P2E12.4))
2003 FORMAT(1H0,17,0P2E12.3,1P4E12.3/8X,17,12X,1P4E12.3)
2004 FORMAT(1H1,12A6,E13.5,20X,4HPAGE,13//5A,16HELEMENT STRESSES//
1 1X,7HELEMENT,4X,6MH ORD.,6X,6HZ ORD.,5X,9MHH=STRESS,3X,
2 9HZ=STRESS,3X,9HZ=STRESS,3X,9HIT=STRESS/35X,9HRR=STRAIN,3X,
3 9HZ=STRAIN,3X,9HZ=STRAIN,3X,9HIT=STRAIN)
2030 FORMAT(9H MATERIAL,13,17H EXCEEDS STORAGE.,15,13H SHEAR (RMB),17X
X 16H BULK TERMS NEEDED,14,7H WORDS.)
END
*DECK ELMT24
SUMROUTINE ELMT24(N,MA,NDIM,NDF,NEL,NEL1,NSTF,NSTZ,NDEC,NHT,NH24)
X XYZ,1X,4H FORCE,VECT,IPG,VECT,ISA)

```

```

FLM227C
FLM228C
FLM229C
FLM230C
FLM231C
FLM232C
FLM233C
FLM234C
FLM235C
FLM236C
FLM237C
FLM238C
FLM239C
FLM240C
FLM241C
FLM242C
FLM243C
FLM244C
FLM245C
FLM246C
FLM247C
FLM248C
FLM249C
FLM250C
FLM251C
FLM252C
FLM253C
FLM254C
FLM255C
FLM256C
FLM257C
FLM258C
FLM259C
FLM260C
FLM261C
FLM262C
FLM263C
FLM264C
FLM265C
FLM266C
FLM267C
FLM268C
FLM269C
FLM270C
FLM271C
FLM272C
FLM273C
FLM274C
FLM275C
FLM276C
FLM277C
FLM278C
FLM279C
FLM280C
FLM281C
FLM282C
FLM283C
FLM284C
FLM285C
FLM286C
FLM287C
FLM288C
FLM289C
FLM290C

```


	C22 = C11	FLM 70C
	C23 = C12	FLM 71C
	C33 = C11	FLM 72C
	C34 = 0.0	FLM 73C
	C44 = GG	FLM 74C
	DO 39, KK = 1, NLIN	FLM 75C
	S = STW(1, KK)	FLM 76C
	T = STW(2, KK)	FLM 77C
	W = STW(4, KK)	FLM 78C
	CALL HR[CK2(S, T, -1., 2, NEL, NSIDE)]	FLM 79C
	HR = 1.0	FLM 80C
180	DO 18, I = 1, NEL	FLM 81C
	RR = HR * X(I, 1) * SHAPE(4, I)	FLM 82C
	DVOL = W * HR * XJAC	FLM 83C
	I1 = I	FLM 84C
	DO 38, I = 1, NEL	FLM 85C
C....	COMPUTE LUMPED MASS	FLM 86C
	TEMP = DVOL * SHAPE(4, I) * RU	FLM 87C
	FORCE(I1, 2) = FORCE(I1, 2) + TEMP	FLM 88C
	FORCE(I1+1, 2) = FORCE(I1+1, 2) + TEMP	FLM 89C
C....	COMPUTE ELEMENT STIFFNESS	FLM 90C
	RN = SHAPE(1, I) / XJAC * DVOL	FLM 91C
	ZN = SHAPE(2, I) / XJAC * DVOL	FLM 92C
	ET = SHAPE(4, I) / HR * DVOL	FLM 93C
	A11 = C11 * RN + C12 * ET + C14 * ZN	FLM 94C
	A12 = C13 * ZN + C14 * RN	FLM 95C
	A21 = C12 * RN + C22 * ET	FLM 96C
	A22 = C23 * ZN	FLM 97C
	A31 = C13 * RN + C23 * ET + C34 * ZN	FLM 98C
	A32 = C33 * ZN + C34 * RN	FLM 99C
	A41 = C14 * RN + C44 * ZN	FLM 100C
	A42 = C34 * ZN + C44 * RN	FLM 101C
	J1 = I1	FLM 102C
	DO 375, J = 1, NEL	FLM 103C
	RN = SHAPE(1, J) / XJAC	FLM 104C
	ZN = SHAPE(2, J) / XJAC	FLM 105C
	ET = SHAPE(4, J) / HR	FLM 106C
	ESTIF(I1, J1) = ESTIF(I1, J1) + RN * A11 + ET * A21 + ZN * A41	FLM 107C
	ESTIF(I1, J1+1) = ESTIF(I1, J1+1) + ZN * A31 + RN * A41	FLM 108C
	IF(1.0.E-6, J)	FLM 109C
	*ESTIF(I1+1, J1) = ESTIF(I1+1, J1) + RN * A12 + ET * A22 + ZN * A42	FLM 110C
	ESTIF(I1+1, J1+1) = ESTIF(I1+1, J1+1) + ZN * A32 + RN * A42	FLM 111C
375	J1 = J1 + NDF	FLM 112C
380	I1 = I1 + NDF	FLM 113C
390	CONTINUE	FLM 114C
C....	CONSTRUCT SYMMETRIC ESTIF	FLM 115C
	DO 395, I = 2, NSTF	FLM 116C
	K = I-1	FLM 117C
	DO 395, J = 1, K	FLM 118C
	ESTIF(I, J) = ESTIF(I, J) + ESTIF(J, I)	FLM 119C
395	ESTIF(J, I) = ESTIF(I, J)	FLM 120C
	IF(C6.EQ.0) RETURN	FLM 121C
	DO 195, I = 1, NSTF	
190	ESTIF(I, I) = ESTIF(I, I) + C6 * FORCE(I, 2)	
	RETURN	FLM 125C
C....	STRESS COMPUTATION FOR THE VISCOELASTIC ELEMENT	FLM 126C
C....	VISCOELASTIC LOAD HISTORY COMPUTATION AND ELEMENT ASSEMBLY FROM TP	FLM 127C
*	CONTINUE	FLM 128C
C....	COMPUTATION AND OUTPUT OF STRESS AND HISTORY OF VISCOELASTIC SOLN.	FLM 129C
C....	DO THE INTEGRATION AND OUTPUT THE STRESS	FLM 130C
	NG = D(1, MA)	FLM 131C
	NK = D(2, MA)	FLM 132C
	GG = D(4, MA)	FLM 133C
	KK = D(5, MA)	FLM 134C
C....	CHECK FOR H STORAGE	FLM 135C
	LL = NH * (LINT * I) * (NK * NG * ((NDIM * I) * NDIM) / 2 * NG)	FLM 136C
	IF(LL.GT.152H) CALL VHRFF(ITRD, I1, RR, H, NH, ISZH)	FLM 137C
	NL = LINT	
	DO 500, LL = 1, NL	FLM 139C
	NOPRNT = NPH	FLM 140C
	IF(NSIG(LL), NE, 0) NOPRNT = .TRUE.	FLM 141C
	NPL = .FALSE.	FLM 142C

```

IF (NUMPLT.LE.0) GO TO 210
DO 205 NP = 1,NUMPLT
205 IF (NEDATA(NP,1).EQ.N.AND.NEDATA(NP,2).EQ.LL) NPL = .TRUE.
210 CONTINUE
IF (LL.NE.1) GO TO 220
S = 0.1
T = 0.1
GO TO 230
220 S = STW(1,LL-1)
T = STW(2,LL-1)
XX = STW(4,LL-1)
230 CALL MTRICK(S,T,-1.,2,NEL,NSIDE)
C... COMPUTE THE PRESENT STRAIN AND STRAIN INCREMENT
DTH = 0.
THP = 0.
DO 33 I = 1,2
CC = 0.
DO 300 K = 1,NEL
300 CC = CC + SHAPE(4,K)*X(1,K)
XX(I) = CC
DO 320 J = 1,2
CC = 0.
DO 310 K = 1,NEL
310 CC = CC + SHAPE(1,K)*UL(J,K) + SHAPE(J,K)*UL(I,K)
DD = DD + SHAPE(1,K)*DUL(J,K) + SHAPE(J,K)*DUL(I,K)
DEPS(1,J) = DD/XJAC
DEPS(J+1,I) = CC/XJAC
XIG(1,J) = GG*DEPS(J+1,I)
320 XIG(J+1,I) = XIG(1,J)
DTH = DTH + DEPS(1,I)
330 THP = THP + DEPS(1+1,I)
RR = XX(I)
ET = 0.
DET = 0.
DO 350 K = 1,NEL
350 CC = SHAPE(4,K)
FT = ET + CC*UL(1,K)
IFT = DET + CC*DUL(1,K)
ST = GG*FT*2.0
STF = ST
XIK = (THP + ET*2./RR)*(XK/2. - GG/3.)
YIK = XIK
DTH = DTH/2. + DET/RR
DET = DET*2.0 - DTH*RR*IT
DO 34 I = 1,2
DEPS(1,I) = DEPS(1,I) - DTH*IT
340 DEPS(1+1,I) = DEPS(1+1,I)/2.0
C... UPDATE THE SHEAR HISTORY
IG = 4
IF (NG.LE.3) GO TO 410
DO 400 I = 1,NG
IG = IG + 2
DD = D(IG,1,MA)
CC = D(IG,MA)*HISI(DTP/DD)
DD = EXP(-DTP/DD)
DO 402 J = 1,2
DO 402 K = J,2
EE = H(NH) + CC*DEPS(J,K)
XIG(J,K) = XIG(J,K) + EE
EE = EE*DD
XIG(K+1,J) = XIG(K+1,J) + EE
H(NH) = EE
402 NH = NH + 1
EE = H(NH) + CC*DET
ST = ST + EE
EE = EE*DD
H(NH) = EE
STF = STF + EE
NH = NH + 1
400 CONTINUE
C... UPDATE THE BULK HISTORY

```

```

FLM143C
FLM144C
FLM145C
FLM146C
FLM147C
FLM148C
FLM149C
FLM150C
FLM151C
FLM152C
FLM153C
FLM154C
FLM155C
FLM156C
FLM157C
FLM158C
FLM159C
FLM160C
FLM161C
FLM162C
FLM163C
FLM164C
FLM165C
FLM166C
FLM167C
FLM168C
FLM169C
FLM170C
FLM171C
FLM172C
FLM173C
FLM174C
FLM175C
FLM176C
FLM177C
FLM178C
FLM179C
FLM180C
FLM181C
FLM182C
FLM183C
FLM184C
FLM185C
FLM186C
FLM187C
FLM188C
FLM189C
FLM190C
FLM191C
FLM192C
FLM193C
FLM194C
FLM195C
FLM196C
FLM197C
FLM198C
FLM199C
FLM200C
FLM201C
FLM202C
FLM203C
FLM204C
FLM205C
FLM206C
FLM207C
FLM208C
FLM209C
FLM210C
FLM211C
FLM212C
FLM213C
FLM214C

```

```

410 IF(NK,LE,3) GO TO 430
DO 420 I = 1,NK
IG = IG + 2
DD = D(IG,1,MA)
FF = H(NH) * B(IG,MA)*HIST(DTP/DU)*DTH
XIK = XIK + FF
EE = LE*EXP(-DTP/DU)
YIA = YIK + EE
H(NH) = FF
420 NH = NH + 1
430 CONTINUE
DO 435 I = 1,2
XIG(I,1) = XIG(I,1) + XIK
435 XIG(I+1,1) = XIG(I+1,1) + YIK
ET = ET/XX(1)
ST = ST/XX(1) + XIK
C.... OUTPUT THE STRESSES FOR THE CURRENT TIME STEP
IF(NOPRNT) GO TO 640
MCT = MCT + 1
IF(MCT.GT,3) GO TO 630
WRITE(ITPE,2004) HEAD,TIME,IPG
IPG = IPG + 1
MCT = 16
630 WRITE(ITPE,2003) N,(XX(1),I=1,2),((XIG(I,J),J=1,2),I=1,2),ST,
DM,MA,((DEPS(J+1,I),J=1,2),I=1,2),ET
440 IF(NPL) CALL PLDATA(NUMEL,NDIM,N,LL,SMED,XX,XIG,FORCE)
IF(IPLT2D,NE,1) GO TO 641
IF(LL,NE,1) GO TO 641
VFCT(N,1) = XIG(1,1)
VFCT(N,2) = XIG(2,2)
VFCT(N,3) = ST
VFCT(N,4) = XIG(1,2)
VFCT(N,5) = DEPS(2,1)
VFCT(N,6) = DEPS(3,2)
VFCT(N,7) = ET
VFCT(N,8) = DEPS(3,1)
641 CONTINUE
IF(I5*EQ,4) GO TO 500
C.... COMPUTE THE LOADS FOR THE NEXT TIME STEP
DD = **RK
XIG(1,1) = XIG(2,1)*DD
XIG(1,2) = XIG(3,1)*DD
XIG(2,2) = XIG(3,2)*DD
XIG(2,1) = XIG(1,2)
STF = (STF/RK + YIK)***XJAC
** = XJAC*DD*D(3,MA)
I1 = 0
DO 470 I = 1,NEL
CC = SHAPE(4,I)
FORCE(I1+1,1) = FORCE(I1+1,1) - STF*CC
EE = CC**
DO 460 J = 1,2
CC = 0.0
DO 450 K = 1,2
CC = CC + SHAPE(K,I)*XIG(J,K)
460 FORCE(I1+J,1) = FORCE(I1+J,1) - CC *EE*UDL(J,I)
470 I1 = I1 + NDF
500 CONTINUE
RETURN
C.... ELEMENT LOAD COMPUTATION FOR BODY TYPE FORCES, ETC.
5 CONTINUE
RETURN
4000 IPG = 0
RETURN
C.... FORMAT STATEMENTS
1000 FORMAT(2I5,4F10.0)
1001 FORMAT(1HF10.0)
2000 FORMAT(5X,57H LINEAR VISCOELASTIC MATERIAL, AXISYMMETRIC SOLID ELE
XMENT //1I0,12H SHEAR TERMS/
X 1I0,12H BULK TERMS//10X,12H G=INFINITY=,1PE12.4/10X,
X 12H K=INFINITY=,1PE12.4/10X,12H DENSITY =,1PE12.4/1X)
2001 FORMAT(10X,14H SHEAR MODULUS,6X,4HTIME/(10X,1PE12.4))

```

```

FLM215C
FLM216C
FLM217C
FLM218C
FLM219C
FLM220C
FLM221C
FLM222C
FLM223C
FLM224C
FLM225C
FLM226C
FLM227C
FLM228C
FLM229C
FLM230C
FLM231C
FLM232C
FLM233C
FLM234C
FLM235C
FLM236C
FLM237C
FLM238C
FLM239C
FLM240C
FLM242C
FLM243C
FLM244C
FLM245C
FLM246C
FLM247C
FLM248C
FLM249C
FLM250C
FLM251C
FLM252C
FLM253C
FLM254C
FLM255C
FLM256C
FLM257C
FLM258C
FLM259C
FLM260C
FLM261C
FLM262C
FLM263C
FLM264C
FLM265C
FLM266C
FLM267C
FLM268C
FLM269C
FLM270C
FLM271C
FLM272C
FLM273C
FLM274C
FLM275C

```

```

2002  FORMAI (10X,14H BULK MODULUS,6X,4M TIME/(10X,1P2E12.4))          FLM276C
2003  FORMAI (1HU,17,0P2F12.3,1P4E12.3/8X,A5,17,12X,1P4E12.3)          FLM277C
2004  FORMAI (1H1,12A6,E13.5,20X,4MPAGE,13//5X,16MELEMENT STRESSES//    FLM278C
      1 1X,7HELEMENT,4X,6HM ORD.,6X,6HZ ORD.,5X,9HRR-STRESS,3X,        FLM279C
      2 9HRZ-STRESS,3X,9HZZ-STRESS,3X,9HTT-STRESS/35X,9HRR-STRAIN,3X,  FLM280C
      3 9HRZ-STRAIN,3X,9HZZ-STRAIN,3X,9HTT-STRAIN)                     FLM281C
2030  FORMAI (9H MATERIAL,13,17H EXCEEDS STORAGE.,15,13H SHEAR TERMS.,15, FLM282C
      X 16H BULK TERMS NEED,14,7H *ORDS. )                               FLM283C
      END                                                                    FLM284C
*WEUR

```

Appendix G
SAMPLE INPUT DATA

PRECEDING PAGE BLANK NOT FILMED

50000

FEAPTS

1	653	667	671	671	682	696	703	704	651	695	713	715	647	694	712
2	716	645	690	709	714	638	680	699	700	617	658	661	662	650	666
3	668	669	649	693	701	702	648	692	707	710	646	691	706	711	644
4	689	715	708	637	679	697	698	616	657	659	660	643	663	664	665
5	642	676	681	682	641	675	685	687	640	674	684	688	639	673	683
6	686	636	672	677	678	615	654	655	656	611	618	619	620	610	625
7	628	629	609	624	632	634	608	623	631	635	607	622	630	633	606
8	621	626	627	625	612	613	614	531	535	536	537	530	542	545	546
9	529	541	549	551	528	540	548	552	527	539	547	550	526	534	543
10	544	525	532	533	514	595	600	603	604	594	599	601	602	593	596
11	597	598	589	590	591	592	521	522	523	524	572	571	566	567	516
12	436	439	440	576	569	565	556	515	435	443	445	568	567	564	555
13	514	414	442	446	563	562	561	554	513	433	441	444	560	559	558
14	553	512	432	437	431	517	518	519	520	573	574	575	576	577	580
15	581	562	578	583	585	586	579	584	587	588	502	507	510	511	501
16	506	508	509	500	503	504	505	496	497	498	499	488	489	490	491
17	495	494	493	492	487	429	430	431	461	460	459	452	449	425	345
18	347	458	457	456	451	448	424	344	348	455	454	453	450	447	423
19	343	446	470	469	468	467	462	426	427	428	463	464	465	466	471
20	472	473	474	475	478	479	480	476	481	483	484	477	482	485	486
21	473	478	471	422	412	417	419	420	411	414	415	416	407	408	409
22	410	399	400	401	402	406	405	404	403	398	390	391	392	397	396
23	395	394	393	369	341	342	354	353	352	351	350	349	338	288	363
24	362	361	360	359	355	339	340	372	371	370	369	364	356	367	358
25	365	366	367	368	373	374	375	376	377	380	381	382	378	383	385
26	386	379	384	387	388	328	333	336	337	327	332	334	335	326	329
27	330	331	322	323	324	325	314	315	316	317	321	320	319	318	313
28	305	306	307	312	311	310	304	308	304	296	297	303	302	301	300
29	299	298	295	297	269	268	267	266	265	261	259	260	278	277	276
30	275	276	262	263	264	271	272	273	274	279	280	281	282	283	286
31	287	288	284	289	291	292	285	290	293	294	247	252	255	256	246
32	251	252	254	245	248	249	250	241	242	243	244	233	234	235	236
33	240	239	238	237	232	224	225	226	231	230	229	228	227	223	215
34	216	222	221	220	219	218	217	214	206	213	212	211	210	209	208
35	207	215	188	187	186	185	180	177	178	179	181	182	183	184	189
36	190	191	192	193	196	197	198	194	199	201	202	195	200	203	204
37	153	154	155	156	152	144	145	146	147	143	135	136	138	137	134
38	126	129	128	127	125	120	119	118	117	97	98	99	100	161	162
39	163	164	157	17	78	79	148	71	63	64	139	65	62	56	130
40	54	57	55	121	51	50	49	101	102	103	104	165	168	169	170
41	154	82	87	88	149	72	33	34	140	66	22	18	131	89	19
42	17	122	52	43	44	105	108	109	110	166	171	173	175	159	83
43	89	93	150	73	35	37	141	67	23	7	132	60	20	15	123
44	53	45	47	106	111	113	114	167	172	174	176	160	84	90	94
45	151	74	36	38	142	68	24	8	133	61	21	16	124	54	46
46	44	117	112	115	116	81	86	92	95	80	85	91	96	76	75
47	70	69	30	32	40	41	29	31	39	42	28	27	26	25	6
48	10	12	13	5	9	11	14	6	3	2	1				

9999

```

3
3
R
A MATERI 360
1 ELM21 HARD BONE--OUTER TABLE
335570. 487600. .00027
2 ELM21 POROUS BONE--DIPOLE
335570. 487600. .00002
3 ELM21 HARD BONE--INNER TABLE
335570. 487600. .00027
4 ELM22 SHEARLESS SOLID--SUBARCHNOID SPACE
3.227 305. .0000937
5 ELM22 SHEARLESS SOLID--HRAIN
3.227 305000. .0000937
6 ELM21 NECK COVER
355. 487. .00027

```

716 NODAL

1	J	2.226	-1.455	3.469	5
2	J	2.503	-1.017	3.535	5
3	J	2.634	-.581	3.593	5
4	I	2.717	-0.000	3.587	5

5	0	1.600	-1.723	3.617	5
6	0	1.648	-1.297	3.982	5
7	0	1.691	-.751	4.218	5
8	1	1.690	-0.000	4.378	5
9	0	.792	-2.096	3.803	5
10	0	.775	-1.523	4.212	5
11	0	.780	-.878	4.581	5
12	1	.774	-0.000	4.692	5
13	0	.081	-2.228	3.876	5
14	0	-.033	-1.619	4.346	5
15	0	-.038	-.819	4.687	5
16	1	-.033	-0.000	4.928	5
17	0	-.815	-2.243	3.839	5
18	0	-.835	-1.610	4.366	5
19	0	-.827	-.772	4.734	5
20	1	-.834	-0.000	4.936	5
21	0	-1.514	-1.961	3.785	5
22	0	-1.597	-1.439	4.236	5
23	0	-1.608	-.761	4.589	5
24	1	-1.587	-0.000	4.694	5
25	0	-2.072	-1.579	3.680	5
26	0	-2.287	-1.101	3.825	5
27	0	-2.323	-.594	3.993	5
28	1	-2.311	0.000	4.083	5
29	0	2.204	-1.429	3.439	5
30	0	2.480	-1.000	3.504	5
31	0	2.611	-.573	3.564	5
32	1	2.695	-0.000	3.563	5
33	0	1.580	-1.692	3.582	5
34	0	1.623	-1.267	3.939	5
35	0	1.668	-.736	4.176	5
36	1	1.667	-0.000	4.336	5
37	0	.774	-2.057	3.765	5
38	0	.761	-1.497	4.172	5
39	0	.765	-.861	4.528	5
40	1	.760	-0.000	4.647	5
41	0	.078	-2.183	3.832	5
42	0	-.037	-1.589	4.297	5
43	0	-.041	-.801	4.641	5
44	1	-.040	-0.000	4.871	5
45	0	-.801	-2.190	3.792	5
46	0	-.826	-1.575	4.312	5
47	0	-.820	-.752	4.678	5
48	1	-.823	-0.000	4.875	5
49	0	-1.481	-1.909	3.744	5
50	0	-1.568	-1.404	4.190	4
51	0	-1.576	-.743	4.529	4
52	1	-1.553	-0.000	4.633	4
53	0	-2.029	-1.535	3.642	4
54	0	-2.242	-1.076	3.789	4
55	0	-2.275	-.583	3.955	4
56	1	-2.268	-0.000	4.045	4
57	0	2.161	-1.376	3.380	4
58	0	2.433	-.967	3.441	4
59	0	2.564	-.558	3.508	4
60	1	2.652	-0.000	3.514	4
61	0	1.540	-1.631	3.514	4
62	0	1.574	-1.209	3.853	4
63	0	1.623	-.705	4.092	4
64	1	1.622	-0.000	4.252	4
65	0	.738	-1.979	3.688	4
66	0	.734	-1.446	4.091	4
67	0	.735	-.827	4.423	4
68	1	.733	-0.000	4.556	4
69	0	.073	-2.094	3.744	4
70	0	-.046	-1.530	4.199	4
71	0	-.047	-.767	4.547	4
72	1	-.053	-0.000	4.757	4
73	0	-.774	-2.083	3.697	4
74	0	-.809	-1.505	4.204	4
75	0	-.807	-.711	4.566	4
76	1	-.801	-0.000	4.752	4

77	0	-1.414	-1.803	3.661	4
78	0	-1.509	-1.335	4.097	4
79	0	-1.512	-.708	4.410	4
80	1	-1.484	-0.000	4.511	4
81	0	-1.443	-1.445	3.567	4
82	0	-2.154	-1.025	3.716	4
83	0	-2.178	-.561	3.878	4
84	1	-2.183	-0.000	3.968	4
85	0	2.140	-1.350	3.350	4
86	0	2.410	-.950	3.410	4
87	0	2.540	-.550	3.480	4
88	1	2.630	-0.000	3.490	4
89	0	1.520	-1.600	3.480	4
90	0	1.550	-1.180	3.810	4
91	0	1.600	-.690	4.050	4
92	1	1.600	-0.000	4.210	4
93	0	.726	-1.940	3.650	4
94	0	.726	-1.420	4.050	4
95	0	.726	-.810	4.370	4
96	1	.726	-0.000	4.510	4
97	0	.676	-2.050	3.700	4
98	0	-.050	-1.500	4.150	4
99	0	-.050	-.750	4.500	3
100	1	-.050	-0.000	4.700	3
101	0	-.766	-2.030	3.650	3
102	0	-.800	-1.470	4.150	3
103	0	-.800	-.690	4.510	3
104	1	-.790	-0.000	4.690	3
105	0	-1.340	-1.750	3.620	3
106	0	-1.480	-1.300	4.050	3
107	0	-1.480	-.690	4.350	3
108	1	-1.450	-0.000	4.450	3
109	0	-1.400	-1.400	3.530	3
110	0	-2.110	-1.000	3.680	3
111	0	-2.130	-.550	3.840	3
112	1	-2.140	-0.000	3.930	3
113	0	2.119	-1.324	3.320	3
114	0	2.347	-.933	3.379	3
115	0	2.516	-.542	3.452	3
116	1	2.608	-0.000	3.466	3
117	0	1.500	-1.569	3.446	3
118	0	1.526	-1.151	3.767	3
119	0	1.577	-.675	4.008	3
120	1	1.578	-0.000	4.168	3
121	0	.702	-1.901	3.612	3
122	0	.706	-1.394	4.009	3
123	0	.705	-.793	4.317	3
124	1	.707	-0.000	4.464	3
125	0	.067	-2.006	3.656	3
126	0	-.054	-1.470	4.101	3
127	0	-.053	-.733	4.453	3
128	1	-.067	-0.000	4.643	3
129	0	-.746	-1.977	3.603	3
130	0	-.791	-1.435	4.096	3
131	0	-.793	-.664	4.454	3
132	1	-.779	-0.000	4.628	3
133	0	-1.346	-1.697	3.579	3
134	0	-1.451	-1.265	4.003	3
135	0	-1.448	-.672	4.290	3
136	1	-1.416	-0.000	4.389	3
137	0	-1.857	-1.355	3.493	3
138	0	-2.066	-.975	3.644	3
139	0	-2.082	-.539	3.802	3
140	1	-2.097	-0.000	3.892	3
141	0	2.317	-1.751	3.066	3
142	0	2.685	-1.191	3.166	3
143	0	2.932	-.535	3.184	3
144	1	3.019	-0.000	3.153	3
145	0	2.288	-1.718	3.042	3
146	0	2.656	-1.174	3.144	3
147	0	2.899	-.526	3.163	3
148	1	2.981	-0.000	3.132	2

149	0	2.229	-1.653	2.994	2
150	0	2.599	-1.138	3.101	2
151	0	2.833	-.509	3.121	2
152	1	2.907	-0.000	3.091	2
153	0	2.200	-1.620	2.970	2
154	0	2.570	-1.120	3.080	2
155	0	2.800	-.500	3.100	2
156	1	2.870	-0.000	3.070	2
157	0	2.171	-1.587	2.946	2
158	0	2.541	-1.102	3.059	2
159	0	2.767	-.491	3.079	2
160	1	2.833	-0.000	3.049	2
161	0	1.683	-2.194	3.111	2
162	0	1.662	-2.158	3.083	2
163	0	1.621	-2.086	3.028	2
164	0	1.600	-2.050	3.000	2
165	0	1.579	-2.014	2.972	2
166	0	1.674	-1.301	3.161	2
167	0	1.768	-.648	3.287	2
168	1	1.797	-0.000	3.337	2
169	0	.777	-2.589	3.121	2
170	0	.763	-2.547	3.098	2
171	0	.734	-2.462	3.053	2
172	0	.720	-2.420	3.030	2
173	0	.706	-2.378	3.007	2
174	0	.817	-1.479	3.266	2
175	0	.863	-.735	3.443	2
176	1	.877	-0.000	3.514	2
177	0	.073	-2.712	3.220	2
178	0	.072	-2.659	3.197	2
179	0	.071	-2.553	3.152	2
180	0	.070	-2.500	3.130	2
181	0	.069	-2.447	3.108	2
182	0	.039	-1.531	3.335	2
183	0	.040	-.745	3.523	2
184	1	.040	-0.000	3.604	2
185	0	-.791	-2.622	3.217	2
186	0	-.776	-2.567	3.193	2
187	0	-.745	-2.456	3.144	2
188	0	-.730	-2.400	3.120	2
189	0	-.715	-2.344	3.096	2
190	0	-.732	-1.476	3.334	2
191	0	-.750	-.715	3.516	2
192	1	-.755	-0.000	3.593	2
193	0	-1.504	-2.328	3.159	2
194	0	-1.473	-2.279	3.137	2
195	0	-1.411	-2.180	3.092	2
196	0	-1.380	-2.130	3.070	2
197	0	-1.349	-2.080	3.048	1
198	0	-1.470	-1.315	3.271	1
199	0	-1.522	-.665	3.413	1
200	1	-1.543	-0.000	3.475	1
201	0	-1.934	-1.606	3.028	1
202	0	-2.274	-1.054	3.151	1
203	0	-2.339	-.598	3.184	1
204	1	-2.422	-0.000	3.276	1
205	0	-1.980	-1.650	3.050	1
206	0	-2.330	-1.080	3.170	1
207	0	-2.400	-.610	3.210	1
208	1	-2.480	-0.000	3.300	1
209	0	-2.026	-1.694	3.072	1
210	0	-2.386	-1.106	3.189	1
211	0	-2.461	-.622	3.236	1
212	1	-2.538	-0.000	3.324	1
213	0	-2.119	-1.782	3.116	1
214	0	-2.499	-1.157	3.228	1
215	0	-2.584	-.645	3.288	1
216	1	-2.653	-0.000	3.373	1
217	0	-2.165	-1.826	3.139	1
218	0	-2.556	-1.183	3.247	1
219	0	-2.645	-.656	3.313	1
220	1	-2.711	-0.000	3.397	1

221	0	2.409	-2.008	2.582	1
222	0	2.915	-1.380	2.676	1
223	0	3.181	-.630	2.704	1
224	1	3.317	-0.000	2.682	1
225	0	2.377	-1.969	2.562	1
226	0	2.886	-1.360	2.657	1
227	0	3.151	-.623	2.688	1
228	1	3.260	-0.000	2.664	1
229	0	2.312	-1.890	2.521	1
230	0	2.829	-1.320	2.619	1
231	0	3.090	-.608	2.656	1
232	1	3.167	-0.000	2.628	1
233	0	2.280	-1.850	2.500	1
234	0	2.800	-1.300	2.600	1
235	0	3.060	-.600	2.640	1
236	1	3.120	-0.000	2.610	1
237	0	2.248	-1.810	2.479	1
238	0	2.771	-1.280	2.581	1
239	0	3.030	-.592	2.624	1
240	1	3.073	-0.000	2.592	1
241	0	1.771	-2.400	2.538	1
242	0	1.753	-2.362	2.529	1
243	0	1.718	-2.287	2.510	1
244	0	1.700	-2.250	2.500	1
245	0	1.682	-2.213	2.490	1
246	0	1.811	-1.413	2.613	5
247	0	1.929	-.686	2.694	5
248	1	1.962	-0.000	2.715	5
249	0	.854	-2.737	2.448	5
250	0	.846	-2.690	2.448	5
251	0	.829	-2.597	2.449	5
252	0	.820	-2.550	2.450	5
253	0	.811	-2.503	2.451	4
254	0	.913	-1.538	2.642	4
255	0	.973	-.744	2.753	4
256	1	.990	-0.000	2.792	4
257	0	.965	-2.800	2.520	4
258	0	.966	-2.737	2.520	4
259	0	.969	-2.612	2.520	4
260	0	.970	-2.550	2.520	3
261	0	.971	-2.488	2.520	3
262	0	.991	-1.565	2.679	3
263	0	.102	-.758	2.786	3
264	1	.104	-0.000	2.426	3
265	0	-.733	-2.754	2.597	3
266	0	-.719	-2.695	2.593	3
267	0	-.693	-2.578	2.584	2
268	0	-.680	-2.520	2.580	2
269	0	-.667	-2.462	2.576	2
270	0	-.703	-1.518	2.692	2
271	0	-.735	-.736	2.782	2
272	1	-.747	-0.000	2.817	2
273	0	-1.490	-2.422	2.576	2
274	0	-1.463	-2.371	2.575	1
275	0	-1.408	-2.270	2.572	1
276	0	-1.380	-2.220	2.570	1
277	0	-1.352	-2.170	2.568	1
278	0	-1.493	-1.352	2.674	1
279	0	-1.585	-.686	2.742	1
280	1	-1.618	-0.000	2.765	1
281	0	-1.934	-1.768	2.544	5
282	0	-2.345	-1.064	2.661	4
283	0	-2.518	-.675	2.689	3
284	1	-2.585	-0.000	2.669	2
285	0	-1.980	-1.810	2.550	1
286	0	-2.410	-1.100	2.670	0
287	0	-2.580	-.690	2.710	0
288	1	-2.600	-0.000	2.690	0
289	0	-2.020	-1.852	2.556	0
290	0	-2.475	-1.136	2.679	0
291	0	-2.642	-.705	2.731	1
292	1	-2.735	-0.000	2.711	2

293	0	-2.117	-1.937	2.568	3
294	0	-2.615	-1.208	2.697	4
295	0	-2.767	-.734	2.773	5
296	1	-2.884	-0.000	2.753	5
297	0	-2.152	-1.980	2.574	4
298	0	-2.670	-1.245	2.705	3
299	0	-2.830	-.748	2.795	2
300	1	-2.958	-0.000	2.774	1
301	0	2.415	-2.157	2.101	0
302	0	3.064	-1.546	2.197	0
303	0	3.374	-.723	2.191	0
304	1	3.438	-0.000	2.187	0
305	0	2.391	-2.118	2.088	0
306	0	3.036	-1.524	2.185	1
307	0	3.343	-.717	2.183	2
308	1	3.384	-0.000	2.180	3
309	0	2.344	-2.039	2.063	4
310	0	2.979	-1.481	2.162	5
311	0	3.281	-.706	2.168	5
312	1	3.275	-0.000	2.167	4
313	0	2.320	-2.000	2.050	3
314	0	2.950	-1.460	2.150	2
315	0	3.250	-.700	2.160	1
316	1	3.220	-0.000	2.160	0
317	0	2.296	-1.561	2.037	0
318	0	2.921	-1.439	2.138	0
319	0	3.219	-.694	2.152	0
320	1	3.165	-0.000	2.153	0
321	0	1.766	-2.424	1.991	1
322	0	1.755	-2.380	1.993	2
323	0	1.732	-2.293	1.998	3
324	0	1.720	-2.250	2.000	4
325	0	1.708	-2.207	2.002	5
326	0	1.897	-1.460	2.113	5
327	0	2.031	-.719	2.169	4
328	1	2.051	-0.000	2.165	3
329	0	.898	-2.563	1.868	2
330	0	.891	-2.517	1.878	1
331	0	.877	-2.426	1.899	0
332	0	.870	-2.380	1.910	0
333	0	.863	-2.334	1.921	0
334	0	.977	-1.523	2.089	0
335	0	1.039	-.748	2.164	0
336	1	1.054	-0.000	2.188	1
337	0	.089	-2.749	1.979	2
338	0	.084	-2.687	1.982	3
339	0	.075	-2.562	1.987	4
340	0	.070	-2.500	1.990	5
341	0	.065	-2.438	1.993	5
342	0	.125	-1.558	2.098	4
343	0	.137	-.758	2.153	3
344	1	.137	-0.000	2.171	2
345	0	-.690	-2.752	2.030	1
346	0	-.675	-2.689	2.035	0
347	0	-.645	-2.563	2.045	0
348	0	-.630	-2.500	2.050	0
349	0	-.615	-2.437	2.055	0
350	0	-.681	-1.518	2.108	0
351	0	-.729	-.739	2.138	1
352	1	-.744	-0.000	2.152	2
353	0	-1.494	-2.381	2.043	3
354	0	-1.465	-2.326	2.050	4
355	0	-1.408	-2.215	2.063	5
356	0	-1.380	-2.160	2.070	1
357	0	-1.352	-2.105	2.077	1
358	0	-1.503	-1.357	2.108	1
359	0	-1.625	-.690	2.130	1
360	1	-1.661	-0.000	2.147	1
361	0	-1.940	-1.754	2.014	1
362	0	-2.369	-1.107	2.141	1
363	0	-2.655	-.666	2.169	2
364	1	-2.718	-0.000	2.236	2

365	0	-1.940	-1.800	2.010	2
366	0	-2.430	-1.150	2.150	2
367	0	-2.730	-.690	2.180	2
368	1	-2.780	-0.000	2.240	2
369	0	-2.020	-1.841	2.006	2
370	0	-2.491	-1.193	2.159	3
371	0	-2.805	-.714	2.191	3
372	1	-2.842	-0.000	2.244	3
373	0	-2.100	-1.923	1.997	3
374	0	-2.613	-1.278	2.177	3
375	0	-2.956	-.762	2.214	3
376	1	-2.967	-0.000	2.251	3
377	0	-2.140	-1.965	1.993	4
378	0	-2.674	-1.321	2.186	4
379	0	-3.032	-.785	2.228	4
380	1	-3.030	-0.000	2.254	4
381	0	2.475	-2.163	1.680	4
382	0	3.155	-1.581	1.685	4
383	0	3.419	-.719	1.731	4
384	1	3.470	-0.000	1.790	5
385	0	2.459	-2.133	1.678	5
386	0	3.124	-1.561	1.681	5
387	0	3.382	-.714	1.731	5
388	1	3.407	-0.000	1.790	5
389	0	2.426	-2.071	1.673	5
390	0	3.061	-1.520	1.674	5
391	0	3.307	-.705	1.730	5
392	1	3.282	-0.000	1.790	5
393	0	2.410	-2.040	1.670	5
394	0	3.030	-1.500	1.670	5
395	0	3.270	-.700	1.730	5
396	1	3.220	-0.000	1.790	5
397	0	2.394	-2.009	1.667	5
398	0	2.999	-1.480	1.666	4
399	0	3.233	-.695	1.730	4
400	1	3.157	-0.000	1.790	4
401	0	1.758	-2.367	1.554	4
402	0	1.748	-2.325	1.568	4
403	0	1.729	-2.242	1.596	4
404	0	1.720	-2.200	1.610	4
405	0	1.711	-2.158	1.624	3
406	0	1.935	-1.458	1.668	3
407	0	2.049	-.726	1.703	3
408	1	2.062	-0.000	1.717	3
409	0	.983	-2.526	1.447	3
410	0	.972	-2.469	1.448	3
411	0	.951	-2.356	1.449	3
412	0	.940	-2.300	1.450	2
413	0	.929	-2.244	1.451	2
414	0	1.025	-1.501	1.596	2
415	0	1.061	-.744	1.635	2
416	1	1.067	-0.000	1.650	2
417	0	.164	-2.749	1.500	2
418	0	.158	-2.687	1.500	2
419	0	.146	-2.562	1.500	1
420	0	.140	-2.500	1.500	1
421	0	.134	-2.438	1.500	1
422	0	.164	-1.544	1.568	1
423	0	.145	-.746	1.560	1
424	1	.138	-0.000	1.556	1
425	0	-.695	-2.689	1.538	1
426	0	-.679	-2.629	1.546	5
427	0	-.646	-2.510	1.562	4
428	0	-.630	-2.450	1.570	3
429	0	-.614	-2.390	1.578	2
430	0	-.664	-1.502	1.554	1
431	0	-.722	-.732	1.507	0
432	1	-.737	-0.000	1.499	0
433	0	-1.476	-2.286	1.569	0
434	0	-1.452	-2.239	1.574	0
435	0	-1.404	-2.146	1.585	0
436	0	-1.380	-2.100	1.590	1

437	0	-1.356	-2.054	1.595	2
438	0	-1.495	-1.369	1.520	3
439	0	-1.621	-.689	1.475	4
440	1	-1.633	-0.000	1.471	5
441	0	-1.834	-1.741	1.531	5
442	0	-2.429	-1.210	1.499	4
443	0	-2.719	-.638	1.478	3
444	1	-2.628	-0.000	1.506	2
445	0	-1.880	-1.800	1.530	1
446	0	-2.480	-1.250	1.500	0
447	0	-2.780	-.650	1.470	0
448	1	-2.730	-0.000	1.480	0
449	0	-1.926	-1.859	1.529	0
450	0	-2.531	-1.290	1.501	0
451	0	-2.841	-.662	1.462	1
452	1	-2.832	-0.000	1.454	2
453	0	-2.017	-1.978	1.526	3
454	0	-2.634	-1.370	1.502	4
455	0	-2.962	-.687	1.447	5
456	1	-3.035	-0.000	1.403	5
457	0	-2.063	-2.038	1.524	4
458	0	-2.685	-1.410	1.503	3
459	0	-3.023	-.699	1.440	2
460	111	-3.137	-0.000	1.378	1
461	0	2.475	-2.134	1.369	0
462	0	3.112	-1.566	1.198	0
463	0	3.505	-.784	1.113	0
464	111	3.638	-0.000	1.182	0
465	0	2.461	2.100	1.379	0
466	0	3.089	-1.551	1.236	1
467	0	3.441	-.776	1.172	2
468	1	3.533	-0.000	1.224	3
469	0	2.434	-2.033	1.400	4
470	0	3.043	-1.517	1.312	5
471	0	3.314	-.759	1.291	5
472	1	3.324	-0.000	1.308	4
473	0	2.420	-2.000	1.410	3
474	0	3.020	-1.500	1.350	2
475	0	3.250	-.750	1.350	1
476	1	3.220	-0.000	1.350	0
477	0	2.406	-1.967	1.420	0
478	0	2.997	-1.483	1.388	0
479	0	3.186	-.741	1.409	0
480	1	3.116	-0.000	1.392	0
481	0	1.779	-2.184	1.212	1
482	0	1.764	-2.143	1.237	2
483	0	1.735	-2.061	1.286	3
484	0	1.720	-2.020	1.310	4
485	0	1.705	-1.979	1.334	5
486	0	1.927	-1.424	1.309	5
487	0	1.974	-.739	1.297	4
488	1	1.998	-0.000	1.271	3
489	0	1.016	-2.502	1.114	2
490	0	1.005	-2.464	1.118	1
491	0	.982	-2.388	1.126	0
492	0	.970	-2.350	1.130	0
493	0	.958	-2.312	1.134	0
494	0	1.082	-1.497	1.162	0
495	0	1.040	-.742	1.139	0
496	1	1.030	-0.000	1.166	1
497	0	.070	-2.658	1.104	2
498	0	.070	-2.618	1.110	3
499	0	.070	-2.539	1.123	4
500	0	.070	-2.500	1.130	5
501	0	.070	-2.461	1.137	1
502	0	.217	-1.517	1.099	1
503	0	.092	-.702	.941	1
504	1	.070	-0.000	.899	1
505	0	-.802	-2.585	1.018	1
506	0	-.784	-2.526	1.046	1
507	0	-.748	-2.409	1.102	1
508	0	-.730	-2.350	1.130	2

509	0	-.712	-2.291	1.158	2
510	0	-.633	-1.459	1.042	2
511	0	-.724	-.714	.814	2
512	1	-.740	-0.000	.803	2
513	0	-1.485	-2.298	1.106	2
514	0	-1.459	-2.236	1.110	2
515	0	-1.406	-2.112	1.117	3
516	0	-1.380	-2.050	1.120	3
517	0	-1.354	-1.988	1.123	3
518	0	-1.398	-1.405	.890	3
519	0	-1.534	-.709	.743	3
520	1	-1.532	-0.000	.723	3
521	0	-1.837	-1.795	.920	3
522	0	-2.269	-1.260	.786	4
523	0	-2.461	-.745	.688	4
524	1	-2.271	-0.000	.705	4
525	0	-1.880	-1.850	.920	4
526	0	-2.330	-1.300	.770	4
527	0	-2.530	-.750	.660	4
528	1	-2.380	-0.000	.650	4
529	0	-1.923	-1.905	.920	5
530	0	-2.391	-1.340	.754	5
531	0	-2.599	-.755	.632	5
532	1	-2.489	-0.000	.595	5
533	0	-2.010	-2.015	.420	5
534	0	-2.514	-1.420	.721	5
535	0	-2.738	-.766	.575	5
536	1	-2.708	-0.000	.484	5
537	0	-2.054	-2.070	.420	5
538	0	-2.575	-1.460	.704	5
539	0	-2.807	-.771	.547	5
540	1	-2.817	-0.000	.429	5
541	0	2.402	-1.869	1.197	5
542	0	2.4769	-1.2446	1.08	5
543	0	2.639	-.737	1.104	4
544	1	2.818	-0.000	.938	4
545	0	1.805	-1.825	1.111	4
546	0	1.870	-1.391	1.006	4
547	0	1.645	-.800	.950	4
548	1	1.834	-0.000	.760	4
549	0	1.007	-2.175	.782	4
550	0	1.326	-1.483	.695	3
551	0	.999	-.771	.636	3
552	1	.963	-0.000	.896	3
553	0	.004	-2.356	.827	3
554	0	.528	-1.440	.744	3
555	0	-.194	-.492	.134	3
556	1	-.194	-0.000	-.015	3
557	0	-.853	-2.008	.889	2
558	0	-.514	-1.323	.740	2
559	0	-.809	-.683	-.152	2
560	1	-.794	-0.000	.069	2
561	0	-1.474	-1.937	.573	2
562	0	-1.102	-1.646	.122	2
563	0	-1.468	-.698	-.130	2
564	1	-1.477	-0.000	-.128	1
565	0	-1.843	-1.755	.542	1
566	0	-2.060	-1.261	.105	1
567	0	-2.117	-.700	-.063	1
568	1	-1.936	-0.000	.044	1
569	0	2.420	-1.880	1.160	1
570	0	2.490	-1.250	1.050	1
571	0	2.650	-.750	1.070	5
572	1	2.850	-0.000	.870	4
573	0	1.820	-1.850	1.080	3
574	0	1.920	-1.400	.920	2
575	0	1.670	-.810	.880	1
576	1	1.840	-0.000	.700	0
577	0	1.020	-2.200	.750	0
578	0	1.350	-1.500	.600	0
579	0	1.060	-.750	.500	0
580	1	1.040	-0.000	.690	0

581	0	0.000	-2.380	.780	1
582	0	.520	-1.500	.580	2
583	0	-.180	-.500	.100	3
584	1	-.180	-0.000	-.050	4
585	0	-.900	-2.000	.800	5
586	0	-.480	-1.400	.650	5
587	J	-.780	-.720	-.240	4
588	1	-.780	-0.000	-.030	3
589	0	-1.480	-2.000	.550	2
590	0	-1.080	-1.690	.050	1
591	0	-1.480	-.720	-.240	0
592	1	-1.480	-0.000	-.240	0
593	0	-1.880	-1.800	.520	0
594	0	-2.080	-1.280	.080	0
595	0	-2.140	-.700	-.090	0
596	1	-1.980	-0.000	0.000	1
597	0	2.438	-1.891	1.123	2
598	0	2.503	-1.255	1.02	3
599	0	2.661	-.763	1.036	4
600	1	2.882	-0.000	.802	5
601	0	1.835	-1.875	1.049	5
602	0	1.970	-1.409	.834	4
603	0	1.695	-.820	.810	3
604	1	1.846	-0.000	.640	2
605	0	1.033	-2.225	.718	1
606	0	1.374	-1.517	.505	0
607	0	1.121	-.729	.364	0
608	1	1.117	-0.000	.484	0
609	0	-.004	-2.404	.733	0
610	0	.512	-1.560	.416	0
611	0	-.166	-.508	.066	1
612	1	-.166	-0.000	-.085	2
613	0	-.898	-2.046	.711	3
614	0	-.441	-1.477	.560	4
615	0	-.751	-.757	-.328	5
616	1	-.766	-0.000	-.129	5
617	0	-1.486	-2.063	.527	4
618	0	-1.058	-1.734	-.022	3
619	0	-1.492	-.742	-.350	2
620	1	-1.483	-0.000	-.352	1
621	0	-1.917	-1.845	.498	0
622	0	-2.100	-1.299	.055	0
623	0	-2.163	-.700	-.117	0
624	1	-2.024	-0.000	-.044	0
625	0	2.473	-1.912	1.049	0
626	0	2.529	-1.266	0.95	1
627	0	2.682	-.788	.969	2
628	1	2.946	-0.000	.666	3
629	0	1.864	-2.024	.986	4
630	0	2.069	-1.428	.661	5
631	0	1.745	-.839	.670	5
632	1	1.858	-0.000	.521	4
633	0	1.058	-2.276	.655	3
634	0	1.423	-1.350	.314	2
635	0	1.242	-.688	.093	1
636	1	1.270	-0.000	.071	0
637	0	-.011	-2.452	.640	0
638	0	.497	-1.680	.088	0
639	0	-.139	-.524	-.002	0
640	1	-.139	-0.000	-.155	0
641	0	-.894	-2.137	.533	1
642	0	-.363	-1.631	.379	2
643	0	-.692	-.830	-.505	3
644	1	-.737	-0.000	-.327	4
645	0	-1.499	-2.189	.481	5
646	0	-1.013	-1.823	-.166	1
647	0	-1.517	-.785	-.569	1
648	1	-1.488	-0.000	-.577	1
649	0	-1.992	-1.936	.454	1
650	0	-2.141	-1.336	.004	1
651	0	-2.208	-.700	-.170	1
652	1	-2.112	-0.000	-.133	1

653	0	2.491	-1.922	1.011	2
654	0	2.542	-1.272	0.90	2
655	0	2.692	-.801	.935	2
656	1	2.978	-0.000	.599	2
657	0	1.879	-2.048	.954	2
658	0	2.11	-1.4377	0.600	2
659	0	1.770	-.848	.600	2
660	1	1.864	-0.000	.461	3
661	0	1.070	-2.302	.623	3
662	0	1.448	-1.370	.218	3
663	0	1.303	-.667	-.043	3
664	1	1.346	-0.000	-.135	3
665	0	-.015	-2.476	.594	3
666	0	.489	-1.740	-.077	3
667	0	-.176	-.532	-.036	4
668	1	-.125	-0.000	-.189	4
669	0	-.891	-2.182	.444	4
670	0	-.324	-1.708	.289	4
671	0	-.663	-.866	-.593	4
672	1	-.722	-0.000	-.426	4
673	0	-1.505	-2.253	.458	4
674	0	-.991	-1.868	-.238	5
675	0	-1.530	-.807	-.679	5
676	1	-1.491	-0.000	-.690	5
677	0	-2.029	-1.981	.33	5
678	0	-2.162	-1.355	-.021	5
679	0	-2.231	-.700	-.196	5
680	1	-2.156	-0.000	-.178	5
681	0	2.620	-1.900	-.350	5
682	0	3.370	-1.500	-.500	5
683	0	3.420	-.800	-.350	5
684	1	3.520	-0.000	-.250	5
685	0	2.050	-2.000	-.350	5
686	0	2.020	-.700	-.350	5
687	0	2.820	-.300	-.250	5
688	1	3.220	-0.000	-.350	4
689	0	1.520	-2.200	-.450	4
690	0	1.520	-1.750	-.250	4
691	0	.620	-2.500	-.350	4
692	0	.620	-2.000	-.350	4
693	0	2.125	-1.548	-1.608	4
694	0	2.870	-1.000	-1.900	4
695	0	3.370	-.750	-2.000	3
696	1	3.620	-0.000	-2.000	3
697	0	1.820	-1.700	-1.500	3
698	0	1.820	-.700	-1.750	3
699	0	2.620	-.500	-1.750	3
700	1	3.120	-0.000	-2.000	3
701	0	1.320	-1.700	-1.450	3
702	0	1.320	-1.100	-1.450	2
703	0	.420	-1.750	-1.400	2
704	0	.420	-1.500	-1.400	2
705	0	1.620	-1.500	-3.250	2
706	0	2.220	-1.200	-3.650	2
707	0	2.820	-.700	-3.750	2
708	1	3.020	-0.000	-3.950	2
709	0	1.420	-1.600	-3.050	1
710	0	1.620	-1.000	-3.350	1
711	0	2.320	-.700	-3.750	1
712	1	2.520	-0.000	-3.950	1
713	0	.920	-1.600	-2.750	1
714	0	.920	-1.300	-2.750	1
715	0	.320	-1.600	-2.250	1
716	0	.320	-1.450	-2.250	5

555 ELEMEN

1	1								
1	5	6	2	29	33	34	30		
2	1								
2	6	7	3	30	34	35	31		
3	1								
3	7	8	4	31	35	36	32		
4	1								

5	9	10	6	33	37	38	34
5	1						
6	10	11	7	34	38	39	35
6	1						
7	11	12	8	35	39	40	36
7	1						
8	13	14	10	37	41	42	38
8	1						
10	14	15	11	38	42	43	39
9	1						
11	15	16	12	39	43	44	40
10	1						
13	17	18	14	41	45	46	42
11	1						
14	18	19	15	42	46	47	43
12	1						
15	19	20	16	43	47	48	44
13	1						
17	21	22	18	45	49	50	46
14	1						
18	22	23	19	46	50	51	47
15	1						
19	23	24	20	47	51	52	48
16	1						
21	25	26	22	49	53	54	50
17	1						
22	26	27	23	50	54	55	51
18	1						
23	27	28	24	51	55	56	52
19	2						
29	33	34	30	57	61	62	58
20	2						
30	34	35	31	58	62	63	59
21	2						
31	35	36	32	59	63	64	60
22	2						
33	37	38	34	61	65	66	62
23	2						
34	38	39	35	62	66	67	63
24	2						
35	39	40	36	63	67	68	64
25	2						
37	41	42	38	65	69	70	66
26	2						
38	42	43	39	66	70	71	67
27	2						
39	43	44	40	67	71	72	68
28	2						
41	45	46	42	69	73	74	70
29	2						
42	46	47	43	70	74	75	71
30	2						
43	47	48	44	71	75	76	72
31	2						
45	49	50	46	73	77	78	74
32	2						
46	50	51	47	74	78	79	75
33	2						
47	51	52	48	75	79	80	76
34	2						
49	53	54	50	77	81	82	78
35	2						
50	54	55	51	78	82	83	79
36	2						
51	55	56	52	79	83	84	80
37	3						
57	61	62	58	85	89	90	86
38	3						
58	62	63	59	86	90	91	87
39	3						
59	63	64	60	87	91	92	88
40	3						

61	65	66	62	89	93	94	90
41		3					
62	66	67	63	90	94	95	91
42		3					
63	67	68	64	91	95	96	92
43		3					
65	69	70	66	93	97	98	94
44		3					
66	70	71	67	94	98	99	95
45		3					
67	71	72	68	95	99	100	96
46		3					
69	73	74	70	97	101	102	98
47		3					
70	74	75	71	98	102	103	99
48		3					
71	75	76	72	99	103	104	100
49		3					
73	77	78	74	101	105	106	102
50		3					
74	78	79	75	102	106	107	103
51		3					
75	79	80	76	103	107	108	104
52		3					
77	81	82	78	105	109	110	106
53		3					
78	82	83	79	106	110	111	107
54		3					
79	83	84	80	107	111	112	108
55		4					
85	89	90	86	113	117	118	114
56		4					
86	90	91	87	114	118	119	115
57		4					
87	91	92	88	115	119	120	116
58		4					
89	93	94	90	117	121	122	118
59		4					
90	94	95	91	118	122	123	119
60		4					
91	95	96	92	119	123	124	120
61		4					
93	97	98	94	121	125	126	122
62		4					
94	98	99	95	122	126	127	123
63		4					
95	99	100	96	123	127	128	124
64		4					
97	101	102	98	125	129	130	126
65		4					
98	102	103	99	126	130	131	127
66		4					
99	103	104	100	127	131	132	128
67		4					
101	105	106	102	129	133	134	130
68		4					
102	106	107	103	130	134	135	131
69		4					
103	107	108	104	131	135	136	132
70		4					
105	109	110	106	133	137	138	134
71		4					
106	110	111	107	134	138	139	135
72		4					
107	111	112	108	135	139	140	136
73		1					
1	29	30	2	141	145	146	142
74		1					
2	30	31	3	142	146	147	143
75		1					
3	31	32	4	143	147	148	144
76		2					

29	57	58	30	145	149	150	146
77	2						
30	58	59	31	146	150	151	147
78	2						
31	59	60	32	147	151	152	148
79	3						
57	85	86	58	149	153	154	150
80	3						
58	86	87	59	150	154	155	151
81	3						
59	87	88	60	151	155	156	152
82	4						
85	113	114	86	153	157	158	154
83	4						
86	114	115	87	154	158	159	155
84	4						
87	115	116	88	155	159	160	156
85	1						
1	5	33	29	141	161	162	145
86	2						
29	33	61	57	145	162	163	149
87	3						
57	61	89	85	149	163	164	153
88	4						
85	89	117	113	153	164	165	157
89	1						
5	9	37	33	161	169	170	162
90	2						
33	37	65	61	162	170	171	163
91	3						
61	65	93	89	163	171	172	164
92	4						
89	93	121	117	164	172	173	165
93	1						
9	13	41	37	169	177	178	170
94	2						
37	41	69	65	170	178	179	171
95	3						
65	69	97	93	171	179	180	172
96	4						
93	97	125	121	172	180	181	173
97	1						
13	17	45	41	177	185	186	178
98	2						
41	45	73	69	178	186	187	179
99	3						
69	73	101	97	179	187	188	180
100	4						
97	101	129	125	180	188	189	181
101	1						
17	21	49	45	185	193	194	186
102	2						
45	49	77	73	186	194	195	187
103	3						
73	77	105	101	187	195	196	188
104	4						
101	105	133	129	188	196	197	189
105	1						
21	25	53	49	193	217	213	194
106	2						
49	53	81	77	194	213	209	195
107	3						
77	81	109	105	195	209	205	196
108	4						
105	109	137	133	196	205	201	197
109	5						
113	117	116	114	157	165	166	158
110	5						
114	118	119	115	158	166	167	159
111	5						
115	119	120	116	159	167	168	160
112	5						

117	121	122	118	165	173	174	166
113	5						
118	122	123	119	166	174	175	167
114	5						
119	123	124	120	167	175	176	168
115	5						
121	125	126	122	173	181	182	174
116	5						
122	126	127	123	174	182	183	175
117	5						
123	127	128	124	175	183	184	176
118	5						
125	129	130	126	181	189	190	182
119	5						
126	130	131	127	182	190	191	183
120	5						
127	131	132	128	183	191	192	184
121	5						
129	133	134	130	189	197	198	190
122	5						
130	134	135	131	190	198	199	191
123	5						
131	135	136	132	191	199	200	192
124	5						
133	137	138	134	197	201	202	198
125	5						
134	138	139	135	198	202	203	199
126	5						
135	139	140	136	199	203	204	200
127	4						
137	109	110	138	201	205	206	202
128	4						
138	110	111	139	202	206	207	203
129	4						
139	111	112	140	203	207	208	204
130	3						
109	81	82	110	205	209	210	206
131	3						
110	82	83	111	206	210	211	207
132	3						
111	83	84	112	207	211	212	208
133	2						
81	53	54	82	209	213	214	210
134	2						
82	54	55	83	210	214	215	211
135	2						
83	55	56	84	211	215	216	212
136	1						
53	25	26	54	213	217	218	214
137	1						
54	26	27	55	214	218	219	215
138	1						
55	27	28	56	215	219	220	216
139	1						
141	145	146	142	221	225	226	222
140	1						
142	146	147	143	222	226	227	223
141	1						
143	147	148	144	223	227	228	224
142	2						
145	149	150	146	225	229	230	226
143	2						
146	150	151	147	226	230	231	227
144	2						
147	151	152	148	227	231	232	228
145	3						
149	153	154	150	229	233	234	230
146	3						
150	154	155	151	230	234	235	231
147	3						
151	155	156	152	231	235	236	232
148	4						

153	157	158	154	233	237	238	234
149	4						
154	158	159	155	234	238	239	235
150	4						
155	159	160	156	235	239	240	236
151	1						
141	161	162	145	221	241	242	225
152	2						
145	162	163	149	225	242	243	229
153	3						
149	163	164	153	229	243	244	233
154	4						
153	164	165	157	233	244	245	237
155	1						
161	169	170	162	241	249	250	242
156	2						
162	170	171	163	242	250	251	243
157	3						
163	171	172	164	243	251	252	244
158	4						
164	172	173	165	244	252	253	245
159	1						
169	177	178	170	249	257	258	250
160	2						
170	178	179	171	250	258	259	251
161	3						
171	179	180	172	251	259	260	252
162	4						
172	180	181	173	252	260	261	253
163	1						
177	185	186	178	257	265	266	258
164	2						
178	186	187	179	258	266	267	259
165	3						
179	187	188	180	259	267	268	260
166	4						
180	188	189	181	260	268	269	261
167	1						
185	193	194	186	265	273	274	266
168	2						
186	194	195	187	266	274	275	267
169	3						
187	195	196	188	267	275	276	268
170	4						
188	196	197	189	268	276	277	269
171	1						
193	217	213	194	273	297	293	274
172	2						
194	213	209	195	274	293	289	275
173	3						
195	209	205	196	275	289	285	276
174	4						
196	205	201	197	276	285	281	277
175	5						
157	165	166	158	237	245	246	238
176	5						
158	166	167	159	238	246	247	239
177	5						
159	167	168	160	239	247	248	240
178	5						
165	173	174	166	245	253	254	246
179	5						
166	174	175	167	246	254	255	247
180	5						
167	175	176	168	247	255	256	248
181	5						
173	181	182	174	253	261	262	254
182	5						
174	182	183	175	254	262	263	255
183	5						
175	183	184	176	255	263	264	256
184	5						

181 189 191 182 261 269 270 262
 185 5
 182 190 191 183 262 270 271 263
 186 5
 183 191 192 184 263 271 272 264
 187 5
 189 197 198 190 269 277 278 270
 188 5
 190 198 199 191 270 276 279 271
 189 5
 191 199 200 192 271 279 280 272
 190 5
 197 201 202 198 277 281 282 278
 191 5
 198 202 203 199 278 282 283 279
 192 5
 199 203 204 200 279 283 284 280
 193 4
 201 205 206 202 281 285 286 282
 194 4
 202 206 207 203 282 286 287 283
 195 4
 203 207 208 204 283 287 288 284
 196 3
 205 209 210 206 285 289 290 286
 197 3
 206 210 211 207 286 290 291 287
 198 3
 207 211 212 208 287 291 292 288
 199 2
 209 213 214 210 289 293 294 290
 200 2
 210 214 215 211 290 294 295 291
 201 2
 211 215 216 212 291 295 296 292
 202 1
 213 217 218 214 293 297 298 294
 203 1
 214 218 219 215 294 298 299 295
 204 1
 215 219 220 216 295 299 300 296
 205 1
 221 225 226 222 301 305 306 302
 206 1
 222 226 227 223 302 306 307 303
 207 1
 223 227 228 224 303 307 308 304
 208 2
 225 229 230 226 305 309 310 306
 209 2
 226 230 231 227 306 310 311 307
 210 2
 227 231 232 228 307 311 312 308
 211 3
 229 233 234 230 309 313 314 310
 212 3
 230 234 235 231 310 314 315 311
 213 3
 231 235 236 232 311 315 316 312
 214 4
 233 237 238 234 313 317 318 314
 215 4
 234 238 239 235 314 318 319 315
 216 4
 235 239 240 236 315 319 320 316
 217 1
 221 241 242 225 301 321 322 305
 218 2
 225 242 243 229 305 322 323 309
 219 3
 229 243 244 233 309 323 324 313
 220 4

233 244 245 237 313 324 325 317
 221 1
 241 249 250 242 321 329 330 322
 222 2
 242 250 251 243 322 330 331 323
 223 3
 243 251 252 244 323 331 332 324
 224 4
 244 252 253 245 324 332 333 325
 225 1
 249 257 258 250 329 337 338 330
 226 2
 250 258 259 251 330 338 339 331
 227 3
 251 259 260 252 331 339 340 332
 228 4
 252 260 261 253 332 340 341 333
 229 1
 257 265 266 258 337 345 346 338
 230 2
 258 266 267 259 338 346 347 339
 231 3
 259 267 268 260 339 347 348 340
 232 4
 260 268 269 261 340 348 349 341
 233 1
 265 273 274 266 345 353 354 346
 234 2
 266 274 275 267 346 354 355 347
 235 3
 267 275 276 268 347 355 356 348
 236 4
 268 276 277 269 348 356 357 349
 237 1
 273 297 293 274 353 371 373 354
 238 2
 274 293 289 275 354 373 369 355
 239 3
 275 289 285 276 355 369 365 356
 240 4
 276 285 281 277 356 365 361 357
 241 5
 237 245 246 238 317 325 326 318
 242 5
 238 246 247 239 318 326 327 319
 243 5
 239 247 248 240 319 327 328 320
 244 5
 245 253 254 246 325 333 334 326
 245 5
 246 254 255 247 326 334 335 327
 246 5
 247 255 256 248 327 335 336 328
 247 5
 253 261 262 254 333 341 342 334
 248 5
 254 262 263 255 334 342 343 335
 249 5
 255 263 264 256 335 343 344 336
 250 5
 261 269 270 262 341 349 350 342
 251 5
 262 270 271 263 342 350 351 343
 252 5
 263 271 272 264 343 351 352 344
 253 5
 269 277 278 270 349 357 358 350
 254 5
 270 278 279 271 350 358 359 351
 255 5
 271 279 280 272 351 359 360 352
 256 5

277 281 282 278 357 361 362 358
 257 5
 278 282 283 279 358 362 363 359
 258 5
 279 283 284 280 359 363 364 360
 259 4
 281 285 286 282 361 365 366 362
 260 4
 282 286 287 283 362 366 367 363
 261 4
 283 287 288 284 363 367 368 364
 262 3
 285 289 291 286 365 369 370 366
 263 3
 286 290 291 287 366 370 371 367
 264 3
 287 291 292 288 367 371 372 368
 265 2
 289 293 294 290 369 373 374 370
 266 2
 290 294 295 291 370 374 375 371
 267 2
 291 295 296 292 371 375 376 372
 268 1
 293 297 298 294 373 377 378 374
 269 1
 294 298 299 295 374 378 379 375
 270 1
 295 299 300 296 375 379 380 376
 271 1
 301 305 306 302 381 385 386 382
 272 1
 302 306 307 303 382 386 387 383
 273 1
 303 307 308 304 383 387 388 384
 274 2
 305 309 310 306 385 389 390 386
 275 2
 306 310 311 307 386 390 391 387
 276 2
 307 311 312 308 387 391 392 388
 277 3
 309 313 314 310 389 393 394 390
 278 3
 310 314 315 311 390 394 395 391
 279 3
 311 315 316 312 391 395 396 392
 280 4
 313 317 318 314 393 397 398 394
 281 4
 314 318 319 315 394 398 399 395
 282 4
 315 319 320 316 395 399 400 396
 283 1
 301 321 322 305 381 401 402 385
 284 2
 305 322 323 309 385 402 403 389
 285 3
 309 323 324 313 389 403 404 393
 286 4
 313 324 325 317 393 404 405 397
 287 1
 321 329 330 322 401 409 410 402
 288 2
 322 330 331 323 402 410 411 403
 289 3
 323 331 332 324 403 411 412 404
 290 4
 324 332 333 325 404 412 413 405
 291 1
 329 337 338 330 409 417 418 410
 292 2

330 338 339 331 410 418 419 411
293 3
331 339 340 332 411 419 420 412
294 4
332 340 341 333 412 420 421 413
295 1
337 345 346 338 417 425 426 418
296 2
338 346 347 339 418 420 427 419
297 3
339 347 348 340 419 427 428 420
298 4
340 348 349 341 420 428 429 421
299 1
345 353 354 346 425 433 434 426
300 2
346 354 355 347 426 434 435 427
301 3
347 355 356 348 427 435 436 428
302 4
348 356 357 349 428 436 437 429
303 1
353 377 373 354 433 457 453 434
304 2
354 373 367 355 434 453 449 435
305 3
355 369 365 356 435 449 445 436
306 4
356 365 361 357 436 445 441 437
307 5
317 325 426 318 397 405 406 398
308 5
318 326 327 319 398 406 407 399
309 5
319 327 328 320 399 407 408 400
310 5
325 333 334 326 405 413 414 406
311 5
326 334 335 327 406 414 415 407
312 5
327 335 336 328 407 415 416 408
313 5
333 341 342 334 413 421 422 414
314 5
334 342 343 335 414 422 423 415
315 5
335 343 344 336 415 423 424 416
316 5
341 349 350 342 421 429 430 422
317 5
342 350 351 343 422 430 431 423
318 5
343 351 352 344 423 431 432 424
319 5
349 357 358 350 429 437 438 430
320 5
350 358 359 351 430 438 439 431
321 5
351 359 360 352 431 439 440 432
322 5
357 361 362 358 437 441 442 438
323 5
358 362 363 359 438 442 443 439
324 5
359 363 364 360 439 443 444 440
325 4
361 365 366 362 441 445 446 442
326 4
362 366 367 363 442 446 447 443
327 4
363 367 368 364 443 447 448 444
328 3

365 369 372 366 445 449 450 446
329 3
366 370 371 367 446 450 451 447
330 3
367 371 372 368 447 451 452 448
331 2
369 373 374 371 449 453 454 450
332 2
370 374 375 371 450 454 455 451
333 2
371 375 376 372 451 455 456 452
334 1
373 377 378 374 453 457 458 454
335 1
374 378 379 375 454 458 459 455
336 1
375 379 380 376 455 459 460 456
337 1
381 385 386 382 461 465 466 462
338 1
382 386 387 383 462 466 467 463
339 1
383 387 388 384 463 467 468 464
340 2
385 389 390 386 465 469 470 466
341 2
386 390 391 387 466 470 471 467
342 2
387 391 392 388 467 471 472 468
343 3
389 393 394 390 469 473 474 470
344 3
390 394 395 391 470 474 475 471
345 3
391 395 396 392 471 475 476 472
346 4
393 397 398 394 473 477 478 474
347 4
394 398 399 395 474 478 479 475
348 4
395 399 400 396 475 479 480 476
349 1
381 401 402 385 461 481 482 465
350 2
385 402 403 389 465 482 483 469
351 3
389 403 404 393 469 483 484 473
352 4
393 404 405 397 473 484 485 477
353 1
401 409 410 402 481 489 490 482
354 2
402 410 411 403 482 490 491 483
355 3
403 411 412 404 483 491 492 484
356 4
404 412 413 405 484 492 493 485
357 1
409 417 418 410 489 497 498 490
358 2
410 418 419 411 490 498 499 491
359 3
411 419 420 412 491 499 500 492
360 4
412 420 421 413 492 500 501 493
361 1
417 425 426 418 497 505 506 498
362 2
418 426 427 419 498 506 507 499
363 3
419 427 428 420 499 507 508 500
364 4

420 428 429 421 500 508 509 501
 365 1
 425 433 434 426 505 513 514 506
 366 2
 426 434 435 427 506 514 515 507
 367 3
 427 435 436 428 507 515 516 508
 368 4
 428 436 437 429 508 516 517 509
 369 1
 433 457 453 434 513 537 533 514
 370 2
 434 453 444 435 514 533 524 515
 371 3
 435 449 445 436 515 524 525 516
 372 4
 436 445 441 437 516 525 521 517
 373 5
 397 405 406 398 477 485 486 478
 374 5
 398 406 407 399 478 486 487 479
 375 5
 399 407 408 400 479 487 488 480
 376 5
 405 413 414 406 485 493 494 486
 377 5
 406 414 415 407 486 494 495 487
 378 5
 407 415 416 408 487 495 496 488
 379 5
 413 421 422 414 493 501 502 494
 380 5
 414 422 423 415 494 502 503 495
 381 5
 415 423 424 416 495 503 504 496
 382 5
 421 429 430 422 501 509 510 502
 383 5
 422 430 431 423 502 510 511 503
 384 5
 423 431 432 424 503 511 512 504
 385 5
 429 437 438 430 509 517 518 510
 386 5
 430 438 439 431 510 518 519 511
 387 5
 431 439 440 432 511 519 520 512
 388 5
 437 441 442 438 517 521 522 518
 389 5
 438 442 443 439 518 522 523 519
 390 5
 439 443 444 440 519 523 524 520
 391 4
 441 445 446 442 521 525 526 522
 392 4
 442 446 447 443 522 526 527 523
 393 4
 443 447 448 444 523 527 528 524
 394 3
 445 449 450 446 525 529 530 526
 395 3
 446 450 451 447 526 530 531 527
 396 3
 447 451 452 448 527 531 532 528
 397 2
 449 453 454 450 524 533 534 530
 398 2
 450 454 455 451 530 534 535 531
 399 2
 451 455 456 452 531 535 536 532
 400 1

453 457 458 454 533 537 538 534
401 1
454 458 459 455 534 538 539 535
402 1
455 459 460 456 535 539 540 536
403 1
461 465 466 462 653 625 626 654
404 1
462 466 467 463 654 626 627 655
405 1
463 467 468 464 655 627 628 656
406 2
465 469 470 466 625 597 598 626
407 2
466 470 471 467 626 598 599 627
408 2
467 471 472 468 627 599 600 628
409 3
469 473 474 470 597 569 570 598
410 3
470 474 475 471 598 570 571 599
411 3
471 475 476 472 599 571 572 600
412 4
473 477 478 474 569 541 542 570
413 4
474 478 479 475 570 542 543 571
414 4
475 479 480 476 571 543 544 572
415 1
461 481 482 465 653 657 629 625
416 2
465 482 483 469 625 629 601 597
417 3
469 483 484 473 597 601 573 569
418 4
473 484 485 477 569 573 545 541
419 1
481 489 490 482 657 661 633 629
420 2
482 490 491 483 629 633 605 601
421 3
483 491 492 484 601 605 577 573
422 4
484 492 493 485 573 577 549 545
423 1
489 497 498 490 661 665 637 633
424 2
490 498 499 491 633 637 609 605
425 3
491 499 500 492 605 609 581 577
426 4
492 500 501 493 577 581 553 549
427 1
497 505 506 498 665 669 641 637
428 2
498 506 507 499 637 641 613 609
429 3
499 507 508 500 609 613 585 581
430 4
500 508 509 501 581 585 557 553
431 1
505 513 514 506 669 673 645 641
432 2
506 514 515 507 641 645 617 613
433 3
507 515 516 508 613 617 589 585
434 4
508 516 517 509 585 589 561 557
435 1
513 537 538 514 673 677 649 645
436 2

514 533 529 515 645 649 621 617
437 3
515 529 525 516 617 621 593 589
438 4
516 525 521 517 589 593 565 561
439 5
477 485 486 478 541 545 546 542
440 5
478 486 487 479 542 546 547 543
441 5
479 487 488 489 543 547 548 544
442 5
485 493 494 486 545 549 550 546
443 5
486 494 495 487 546 550 551 547
444 5
487 495 496 488 547 551 552 548
445 5
493 501 502 494 549 553 554 550
446 5
494 502 503 495 550 554 555 551
447 5
495 503 504 496 551 555 556 552
448 5
501 509 510 502 553 557 558 554
449 5
502 510 511 503 554 558 559 555
450 5
503 511 512 504 555 559 560 556
451 5
509 517 518 510 557 561 562 558
452 5
510 518 519 511 558 562 563 559
453 5
511 519 520 512 559 563 564 560
454 5
517 521 522 518 561 565 566 562
455 5
518 522 523 519 562 566 567 563
456 5
519 523 524 520 563 567 568 564
457 4
521 525 526 522 565 593 594 566
458 4
522 526 527 523 566 594 595 567
459 4
523 527 528 524 567 595 596 568
460 3
525 529 530 526 593 621 622 594
461 3
526 530 531 527 594 622 623 595
462 3
527 531 532 528 595 623 624 596
463 2
529 533 534 530 621 649 650 622
464 2
530 534 535 531 622 650 651 623
465 2
531 535 536 532 623 651 652 624
466 1
533 537 538 534 649 677 678 650
467 1
534 538 539 535 650 678 679 651
468 1
535 539 540 536 651 679 680 652
469 4
541 545 546 542 569 573 574 570
470 4
542 546 547 543 570 574 575 571
471 4
543 547 548 544 571 575 576 572
472 4

545 549 551 546 573 577 578 574
473 4
546 550 551 547 574 578 579 575
474 4
547 551 552 548 575 579 580 576
475 4
549 553 554 550 577 581 582 578
476 4
550 554 555 551 578 582 583 579
477 4
551 555 556 552 579 583 584 580
478 4
553 557 558 554 581 585 586 582
479 4
554 558 559 555 582 586 587 583
480 5
555 559 561 556 583 587 588 584
481 4
557 561 562 558 585 589 590 586
482 4
558 562 563 559 586 590 591 587
483 5
559 563 564 560 587 591 592 588
484 4
561 565 566 562 589 593 594 590
485 4
562 566 567 563 590 594 595 591
486 4
563 567 568 564 591 595 596 592
487 3
569 573 574 570 597 601 602 598
488 3
570 574 575 571 598 602 603 599
489 3
571 575 576 572 599 603 604 600
490 3
573 577 578 574 601 605 606 602
491 3
574 578 579 575 602 606 607 603
492 3
575 579 581 576 603 607 608 604
493 3
577 581 582 578 605 609 610 606
494 3
578 582 583 579 606 610 611 607
495 3
579 583 584 580 607 611 612 608
496 3
581 585 586 582 609 613 614 610
497 3
582 586 587 583 610 614 615 611
498 5
583 587 588 584 611 615 616 612
499 3
585 589 590 586 613 617 618 614
500 3
586 590 591 587 614 618 619 615
501 5
587 591 592 588 615 619 620 616
502 3
589 593 594 590 617 621 622 618
503 3
590 594 595 591 618 622 623 619
504 3
591 595 596 592 619 623 624 620
505 2
597 601 602 598 625 629 630 626
506 2
598 602 603 599 626 630 631 627
507 2
599 603 604 600 627 631 632 628
508 2

601 605 606 602 629 633 634 636
509 2
602 606 607 603 630 634 635 631
510 2
603 607 608 604 631 635 636 632
511 2
605 609 610 606 633 637 638 634
512 2
606 610 611 607 634 638 639 635
513 2
607 611 612 608 635 639 640 636
514 2
609 613 614 610 637 641 642 638
515 2
610 614 615 611 638 642 643 639
516 5
611 615 616 612 639 643 644 640
517 2
613 617 618 614 641 645 646 642
518 2
614 618 619 615 642 646 647 643
519 5
615 619 620 616 643 647 648 644
520 2
617 621 622 618 645 649 650 646
521 2
618 622 623 619 646 650 651 647
522 2
619 623 624 620 647 651 652 648
523 1
625 629 630 626 653 657 658 654
524 1
626 630 631 627 654 658 659 655
525 1
627 631 632 628 655 659 660 656
526 1
629 633 634 630 657 661 662 658
527 1
630 634 635 631 658 662 663 659
528 1
631 635 636 632 659 663 664 660
529 1
633 637 638 634 661 665 666 662
530 1
634 638 639 635 662 666 667 663
531 1
635 639 640 636 663 667 668 664
532 1
637 641 642 638 665 669 670 666
533 1
638 642 643 639 666 670 671 667
534 6
639 643 644 640 667 671 672 668
535 1
641 645 646 642 669 673 674 670
536 1
642 646 647 643 670 674 675 671
537 6
643 647 648 644 671 675 676 672
538 1
645 649 650 646 673 677 678 674
539 1
646 650 651 647 674 678 679 675
540 1
647 651 652 648 675 679 680 676
541 1
653 657 658 654 681 685 686 682
542 1
654 658 659 655 682 686 687 683
543 1
655 659 660 656 683 687 688 684
544 1

657 661 662 668 685 689 690 686
 545 1
 661 665 666 672 689 691 692 690
 546 1
 681 685 686 682 693 697 698 694
 547 1
 682 686 687 683 694 698 699 695
 548 1
 683 687 688 684 695 699 700 696
 549 1
 685 689 69 686 697 701 702 698
 550 1
 689 691 692 690 701 703 704 702
 551 1
 693 697 698 694 705 709 710 706
 552 1
 694 698 699 695 706 710 711 707
 553 1
 695 699 700 696 707 711 712 708
 554 1
 697 701 702 698 709 713 714 710
 555 1
 701 703 704 702 713 715 716 714

4 FORCE
 4 -.9659 -.2588
 12 PLOT3D
 1 IMPLICIT
 0.001 2 11 1 716 1 555 1 314. .25
 2 0.01 500.
 STOP

Appendix H
OTHER ASSOCIATED CODE LISTINGS

```

•DECK SKMSH
PROGRAM SKMSH(INPUT,OUTPUT,TAPES=INPUT,TAPE7=OUTPUT,TAPE6=OUTPUT,
1 PUNCH)
COMMON /JAC/ NJAC, TSA,NSA
COMMON /X/ XA(3,20)
DIMENSION DEN(12)
DIMENSION NHIG(15,15,15),NC(8),IPT(1215)
DIMENSION XI(1215),YI(1215),ZI(1215),CI(1215)
COMMON /CONN/ I(120,10),X(1290),Y(1290),Z(1290),H(1290),HC(1290)
DIMENSION /CORRC/
INTEGER HC
INTEGER P
REAL MASS
DATA /CORRC/ 1,2,4,3,5,6,8,7/
A=0.577350269189626
WRITE(6,2008)
2008 FORMAT(1H,45X40H WELCOME TO SKULL MESH ///)
HEAD(5,200) NSIZE
READ(5,207) NDIM, NEL,NSA,NJAC,IHALF,JACON,MASSD
• /IFACE
207 FORMAT(15)
WRITE(6,2012) NDIM,NEL,NSA,NJAC,IHALF,JACON,MASSD
• /IFACE
2012 FORMAT(40H NUMBER OF DIMENSIONS.....,I5,//
X 40H NUMBER OF NODES FOR EACH ELEMENT.....,I5,//
X 40H SUBMACHNOID SPACE SPECIFIED.....,I5,//
X 40H CONSTANT THICKNESS TO BE COMPUTED.....,I5,//
X 40H HALF SKULL SPECIFIED.....,I5,//
X 40H JACOBIAN CHECK ONLY.....,I5,//
X 40H MASS DISTRIBUTION PROPERTIES.....,I5,//
X 40H FACIAL BONES TO BE SPECIFIED.....,I5,//)
HEAD(5,4999) NUMMAT
DO 5000 IM = 1,NUMMAT
HEAD(5,5001) DEN(IM)
WRITE(6,5002) IM,DEN(IM)
5000 CONTINUE
4999 FORMAT(15)
5001 FORMAT(/,29X,E11.4)
5002 FORMAT(/,9H MATERIAL,15,9H DENSITY=,E11.4,20H LB-SEC**2 PER IN**4)
C
C CHECK JACOBIANS FOR COMPLETELY PRESCRIBED MESH
C
DO 7002 I=1,1215
7002 IPT(I)=0
IF (JACON.EQ.0) GO TO 2
READ(5,3000) NPT
3000 FORMAT(15)
DO 3 N1=1,NPT
READ(5,91) N,BC(N),X(N),Y(N),Z(N), IPT(N)
3 CONTINUE
READ(5,3000) NELEM
DO 4 N1=1,NELEM
READ(5,3001) N,IM,(ICONN(N,M),M=1,8)
3001 FORMAT(215,/,8I4)
ICONN(N,19) = IM
4 CONTINUE
GO TO 670
2 READ(5,2010) SCALX, SCALY, SCALZ, SCALT
2010 FORMAT(4F10.3)
WRITE(6,2009) NSIZE
2009 FORMAT(/,30H ORDER OF BRAIN DISCRETIZATION,15,2X,5HCURED//)
WRITE(6,2011) SCALX,SCALY,SCALZ,SCALT
2011 FORMAT(40H X COORDINATE SCALE FACTOR.....,F5.3,//
X 40H Y COORDINATE SCALE FACTOR.....,F5.3,//
X 40H Z COORDINATE SCALE FACTOR.....,F5.3,//
X 40H THICKNESS SCALE FACTOR.....,F5.3,//)
NTOT=(NSIZE,1)**3+4*((NSIZE,1)**3-(NSIZE-1)**3)
NPT=NTOT
N1=1
N4=4
N5=5
N6=6

```

```

      NR=NSIZE*4
      N9=NSIZE*5
      N10=NSIZE*6
      N11=NSIZE*7
      N12=NSIZE*8
      N13=NSIZE*9
C
C      BUILD A BASIC ARRAY OF NODES WITHIN NBIG
C
      NODE=1
      DO 11 I=1,5
      DO 11 J=5,N9
      DO 11 K=5,N9
      NODE = NODE+1
11  NBIG(I,J,K) = NODE
      DO 12 I=6,N8
      DO 12 J=1,5
      DO 12 K=5,N9
      NODE = NODE+1
12  NBIG(I,J,K) = NODE
      DO 13 J=6,N8
      DO 13 K=1,N13
      NODE = NODE+1
13  NBIG(I,J,K) = NODE
      DO 14 J=9,N13
      DO 14 K=5,N9
      NODE = NODE+1
14  NBIG(I,J,K) = NODE
      DO 15 I=9,N13
      DO 15 J=5,N9
      DO 15 K=5,N9
      NODE = NODE+1
15  NBIG(I,J,K) = NODE
      N10=NODE
C
C      FOLD IN THE EDGES
C
      DO 22 I=1,4
      IM=N13+I-1
C  IM RUNS FROM 13 TO 10 AS I GOES FROM 1 TO 4
      IP= N9+I
C  IP RUNS FROM 10 TO 13 AS I GOES FROM 1 TO 4
      DO 21 J=5,N9
      FRONT TOP
      NBIG(5,J,1) = NBIG(I,J,5)
C
      FRONT BOTTOM
      NBIG(5,J,10) = NBIG(I,J,N9)
C
      BACK TOP
      NBIG(N9,J,1) = NBIG(IM,J,5)
C
      BACK BOT
21  NBIG(N9,J,10) = NBIG(IP,J,N9)
      DO 22 K=5,N9
C
C  LEFT FRONT
      NBIG(5,I,K) = NBIG(I,5,K)
C
C  RIGHT FRONT
      NBIG(5,IM,K) = NBIG(I,N9,K)
C
C  LEFT REAR
      NBIG(N9,I,K) = NBIG(IM,5,K)
C
C  RIGHT REAR
      NBIG(N9,IP,K) = NBIG(IP,N9,K)
C
22  CONTINUE
      DO 25 I=6,N8
      DO 25 J=1,4
      JM=N13+1-J

```

```

      JP=N9+J
C
C LEFT TOP
      NBIG(I,5,J) = NBIG(I,J,5)
C
C LEFT BOTTOM
      NBIG(I,5,JM) = NBIG(I,J,N9)
C
C RIGHT TOP
      NBIG(I,N9,J) = NBIG(I,JM,5)
C
C RIGHT BOTTOM
      NBIG(I,N9,JP) = NBIG(I,JP,N9)
25 CONTINUE
C

```

```

      HSUM = 0
      KOUNT = 0
70 READ(5,1000) XX,YY,ZZ,IP,NODE,HH
1000 FORMAT(SX,3E10.0,15,19,E10.0)
      WRITE(6,1000) XX,YY,ZZ,IP,NODE,HH
      IF(NODE.EQ.0) GO TO 71
      KOUNT = KOUNT + 1
      X(NODE) = XX * SCALX
      Y(NODE) = YY * SCALY
      Z(NODE) = ZZ * SCALZ
      H(NODE) = HH * SCALH
      IF (NJAC .NE. 0) HSUM = HSUM + H(NODE)
      IP(NODE) = IP
      GO TO 70
71 CONTINUE
      ISA = (HSUM/KOUNT) * .25
      IF (NJAC .NE. 0) WRITE (6,1001) ISA
1001 FORMAT (41H CONSTANT SUBARACHNOID SPACE THICKNESS IS, F5.3,2X, 6HI
      XNCHES//)

```

```

C
C
C BUILD AND WRITE THE ICONN ARRAY
C
      NLEME = 0
      DO 33 J = 1,4
      DO 33 K = 5,NR
      DO 33 I = 5,NR
      IMAT = I
      NLEME = NLEME + 1
      CALL ISTORE (NLEME,I,J,K,NBIG,ICONN,IMAT)
33 CONTINUE
      DO 37 I = 5,NR
      DO 34 J = 1,4
      DO 34 K = 5,NR
      IMAT = J
      NLEME = NLEME + 1
      CALL ISTORE (NLEME,I,J,K,NBIG,ICONN,IMAT)
34 CONTINUE
      DO 35 J = 5,NR
      DO 35 K = 1,4
      IMAT = K
      NLEME = NLEME + 1
      CALL ISTORE (NLEME,I,J,K,NBIG,ICONN,IMAT)
35 CONTINUE
      DO 135 J = 5,NR
      DO 135 K = 5,NR
      IMAT = 5
      NLEME = NLEME + 1
      CALL ISTORE (NLEME,I,J,K,NBIG,ICONN,IMAT)
135 CONTINUE
      DO 235 J = 5,NR

```

```

      DO 235 J=N9,N12
      IMAT=N13=0
      NELEM=NELEM+1
      CALL ISTORE (NELEM,I,J,K,NHIG,ICONN,IMAT)
235  CONTINUE
      DO 36 J=N9,N12
      DO 36 K=S+NB
      IMAT=N13=0
      NELEM=NELEM+1
      CALL ISTORE (NELEM,I,J,K,NHIG,ICONN,IMAT)
36  CONTINUE
37  CONTINUE
      DO 38 J=N9,N12
      DO 38 K=S+NB
      DO 38 L=S+NB
      IMAT=N13=1
      NELEM=NELEM+1
      CALL ISTORE (NELEM,I,J,K,NHIG,ICONN,IMAT)
38  CONTINUE
200  FORMAT (9I5)

```

```

C
C
C FIND SURFACE NODE AND NEIGHBORS. CODE=1 FOR CORNERS, 2 FOR EDGES, 3 FACES.
C
      CALL POSTS (5,5,4, 5,6,4, 5,4,6, 6,5,4, 1,1,1, 1
1 5, 5, 5, 5, 5, 3, 5, 5, 2, 5, 5, 1, 1,NBIG,IPT) 1
      CALL POSTS (4,5,N9, 4,6,N9, 6,4,N9, 4,5,N8, 1,1,1, 2
1 5, 5, N9, 5, 5,N11, 5, 5,N12, 5, 5,N13, 1,NBIG,IPT) 2
      CALL POSTS (5,N9,4, 6,N9,4, 4,N9,6, 4,N8,5, 1,1,1, 3
1 5, N9, 5, 5, N9, 3, 5, N9, 2, 5, N9, 1, 1,NBIG,IPT) 3
      CALL POSTS (4,N9,N9, 6,N9,N10, 4,N8,N9, 4,N9,N8, 1,1,1, 4
1 5, N9, N9, 5, N9,N11, 5, N9,N12, 5, N9,N13, 1,NBIG,IPT) 4
      CALL POSTS (N9,4,5, N8,4,5, N9,4,6, N9,6,4, 1,1,1, 5
1 N9, 5, 5, N9, 5, 3, N9, 5, 2, N9, 5, 1, 1,NBIG,IPT) 5
      CALL POSTS (N9,4,N9, N8,4,N9, N10,6,N9, N9,4,N8, 1,1,1, 6
1 N9, 5, N9, N9, 5,N11, N9, 5,N12, N9, 5,N13, 1,NBIG,IPT) 6
      CALL POSTS (N9,N9,4, N9,N8,4, N10,N9,6, N8,N9,4, 1,1,1, 7
1 N9, N9, 5, N9, N9, 3, N9, N9, 2, N9, N9, 1, 1,NBIG,IPT) 7
      CALL POSTS (N9,N9,N10, N9,N8,N10, N8,N9,N10, N10,N9,N8, 1,1,1, 8
1 N9, N9, N9, N9, N9,N11, N9, N9,N12, N9, N9,N13, 1,NBIG,IPT) 8
      DO 40 L=6,NB
      M=L-1
      P=L+1
      CALL POSTS (4,5,L, 4,6,L, 4,5,P, 6,4,L, 4,5,M, 9
1 5, 5, L, 3, 5, L, 2, 5, L, 1, 5, L, 2,NBIG,IPT) 9
40  CONTINUE
      DO 41 L=6+NB
      M=L-1
      P=L+1
      CALL POSTS (4,N9,L, 6,N10,L, 4,N9,P, 4,N8,L, 4,N9,M, 10
1 5, N9, L, 3, N9, L, 2, N9, L, 1, N9, L, 2,NBIG,IPT) 10
41  CONTINUE
      DO 42 L=6+NB
      M=L-1
      P=L+1
      CALL POSTS (N9,4,L, N8,4,L, N9,4,P, N10,6,L, N9,4,M, 11
1 N9, 5, L, N11, 5, L, N12, 5, L, N13, 5, L, 2,NBIG,IPT) 11
42  CONTINUE
      DO 43 L=6+NB
      M=L-1
      P=L+1
      CALL POSTS (N10,N9,L, N10,N8,L, N10,N9,P, N8,N10,L, N10,N9,M, 12
1 N9, N9, L, N11, N9, L, N12, N9, L, N13, N9, L, 2,NBIG,IPT) 12
43  CONTINUE
      DO 44 L=6+NB
      M=L-1
      P=L+1
      CALL POSTS (L,4,5, M,4,5, L,4,6, P,4,5, L,6,4, 13
1 L, 5, 5, L, 5, 3, L, 5, 2, L, 5, 1, 2,NBIG,IPT) 13
44  CONTINUE

```

```

DO 45 L=A+NB
M=L-1
P=L+1
CALL POSTS(L,N10,S, P,N10,5, L,N10,6, M,N10,5, L,N8,4,      14
1 L, N9, 5, L, N9, 3, L, N9, 2, L, N9, 1, 2,NBIG,IPT)      14
45 CONTINUE
DO 46 L=A+NB
M=L-1
P=L+1
CALL POSTS(L,N10,5, 4,P,5, 4,L,6, 4,M,5, 6,L,4,      15
1 5, L, 5, 5, L, 3, 5, L, 2, 5, L, 1, 2,NBIG,IPT)      15
46 CONTINUE
DO 47 L=A+NB
M=L-1
P=L+1
CALL POSTS(N10,L,5, N10,M,5, N10,L,6, N10,P,5, N8,L,4,      16
1 N9, L, 5, N9, L, 3, N9, L, 2, N9, L, 1, 2,NBIG,IPT)      16
47 CONTINUE
DO 48 L=A+NB
M=L-1
P=L+1
CALL POSTS(L,4,N9, M,4,N9, L,6,N10, P,4,N9, L,4,N8,      17
1 L, 5, N9, L, 5,N11, L, 5,N12, L, 5,N13, 2,NBIG,IPT)      17
48 CONTINUE
DO 49 L=A+NB
M=L-1
P=L+1
CALL POSTS(L,N9,N10, P,N9,N10, L,N8,N10, M,N9,N10, L,N10,N8,      18
1 L, N9, N9, L, N9,N11, L, N9,N12, L, N9,N13, 2,NBIG,IPT)      18
49 CONTINUE
DO 50 L=A+NB
M=L-1
P=L+1
CALL POSTS(L,N9, 4,P,N9, 6,L,N10, 4,M,N9, 4,L,N8,      19
1 5, L, N9, 5, L,N11, 5, L,N12, 5, L,N13, 2,NBIG,IPT)      19
50 CONTINUE
DO 51 L=A+NB
M=L-1
P=L+1
CALL POSTS(N9,L,N10, N9,M,N10, N8,L,N10, N9,P,N10, N10,L,N8,      20
1 N9, L, N9, N9, L,N11, N9, L,N12, N9, L,N13, 2,NBIG,IPT)      20
51 CONTINUE
DO 52 J=A+NB
DO 52 K=A+NB
JP=J+1
JM=J-1
KP=K+1
KM=K-1
CALL POSTS(L,J,K, 4,JP,K, 4,J,KP, 4,JM,K, 4,J,KM,      21
1 5, J, K, 3, J, K, 2, J, K, 1, J, K, 3,NBIG,IPT)      21
52 CONTINUE
DO 53 J=A+NB
DO 53 K=A+NB
JP=J+1
JM=J-1
KP=K+1
KM=K-1
CALL POSTS(N10,J,K, N10,JP,K, N10,J,KP, N10,JM,K, N10,J,KM,      22
1 N9, J, K, N11, J, K, N12, J, K, N13, J, K, 3,NBIG,IPT)      22
53 CONTINUE
DO 54 I=A+NB
DO 54 K=A+NB
IP=I+1
IM=I-1
KP=K+1
KM=K-1
CALL POSTS(I,4,K, IM,4,K, I,4,KP, IP,4,K, I,4,KM,      23
1 I, 5, K, I, 3, K, I, 2, K, I, 1, K, 3,NBIG,IPT)      23
54 CONTINUE
DO 55 I=A+NB
DO 55 K=A+NB
IP=I+1

```

```

      IM= I-1
      KP= K-1
      KM= K-1
      CALL POSTS(I,N10,K, IP,N10,K, I,N10,KP, IM,N10,K, I,N10,KM,
1      I, N9, K, I,N11, K, I,N12, K, I,N13, K, 3,NB1G,IPT) 24
55 CONTINUE 24
      DO 56 I=0,NR
      DO 56 J=0,NB
      IP = I*1
      IM= I-1
      JP= J+1
      JM= J-1
      CALL POSTS(I,J,4, I,JP,4, IM,J,4, I,JM,4, IP,J,4,
1      I, J, 5, I, J, 3, I, J, 2, I, J, 1, 3,NB1G,IPT) 25
56 CONTINUE 25
      DO 57 I =0,NR
      DO 57 J =0,NB
      IP= I+1
      IM= I-1
      JP= J+1
      JM= J-1
      CALL POSTS(I,J,N10, I,JP,N10, IP,J,N10, I,JM,N10, IM,J,N10,
1      I, J, N9, I, J,N11, I, J,N12, I, J,N13, 3,NB1G,IPT) 26
57 CONTINUE 26

```

```

C
C   GENERATE COORDINATES FOR UNSPECIFIED INTERIOR NODES
C

```

```

600 NMIS=,
      IF (NELEM .EQ. 0)GO TO 663
      DO 635 K=3,NPT
      IF (IPT(K) .NE. 0)GO TO 635
      X(K)=(X(I)+X(NPT))*0.5
      Y(K)=(Y(I)+Y(NPT))*0.5
      Z(K)=(Z(I)+Z(NPT))*0.5
      NMIS=NMIS+0
635 CONTINUE
      IF (NMIS .EQ. 0)GO TO 663
      DO 655 NN=1,NMIS
      IOT=0
      DO 637 K=1,NPT
      XT(K)=0.0
      YT(K)=0.0
      ZT(K)=0.0
637 CT(K)=0.0
      DO 641 IE=1,NELEM
      DO 641 JJ=1,8
      N=N+JJ
      M=NOD(M)
      IF (IPT(J) .NE. 0)GO TO 641
      I=JJ+1
      L=I/4
      IF (4*0L .EQ. I)I=4+I
      M=N+I
      I=NOD(M)
      K=JJ+1
      L=JJ/4
      IF (4*0L .EQ. JJ)K=K+4
      M=N+K
      K=NOD(M)
      L=JJ+4
      IF (L .GT. 8) L=L-8
      M=N+L
      L=NOD(M)
      XT(J)=XT(I)+X(I)+X(K)+X(L)
      YT(J)=YT(I)+Y(I)+Y(K)+Y(L)
      ZT(J)=ZT(I)+Z(I)+Z(K)+Z(L)
640 CT(J)=CT(J)+3.0
641 CONTINUE

```

```

DO 65 J, K=1,NPT
D4=CT(K)
IF (IPT(K) .GT. 0 .OR. D4 .EQ. 0.0) GO TO 650
D1=X(K)
D2=Y(K)
D3=Z(K)
X(K)=X1(K)/D4
Y(K)=Y1(K)/D4
Z(K)=Z1(K)/D4
D1=ABS (X(K)-D1)
D2=ABS (Y(K)-D2)
D3=ABS (Z(K)-D3)
IF (D1+D2+D3 .GT. .0001) IOT=1
650 CONTINUE
ICOUNT=ICOUNT+1
IF (IOT .EQ. 0) GO TO 663
655 CONTINUE
C
663 CONTINUE
C
C HEAD IN FACIAL BONES IF SPECIFIED
C
IF (IFACE.NE.1) GO TO 680
C
C HEAD IN THE FACIAL NODAL POINTS
C
READ(5,3000) NPTF
WRITE(6,3000) NPTF
DO 681 I=1,NPTF
READ(5,91) N,HC(N),X(N),Y(N),Z(N),IPT(N)
WRITE(6,91) N,HC(N),X(N),Y(N),Z(N),IPT(N)
681 CONTINUE
C
C HEAD THE FACIAL CONNECTIVITY
C
READ(5,3000) NELEMF
WRITE(6,3000) NELEMF
DO 682 I=1,NELEMF
READ(5,3001) N,ICUNN(N,10),(ICUNN(N,J),J=1,8)
WRITE(6,3001) N,ICUNN(N,10),(ICUNN(N,J),J=1,8)
682 CONTINUE
C
C UPDATE THE NUMBER OF NODES AND ELEMENTS
C
NPT=NPT+NPTF
NELEM=NELEM+NELEMF
680 CONTINUE
C
C IF SO SPECIFIED, HALVE THE MESH
C
IF (HALF .EQ. 1) CALL HALF(NPT*NELEM*NELE)
C
C REFERENCE CO-ORDINATES TO FRANKFORT PLANE
C
DO 669 N=1,NPT
X(N)=5.52-X(N)
Y(N) = -Y(N)
Z(N)=Z(N)-5.75
669 CONTINUE
C
C CHECK MESH FOR NEGATIVE JACOBIANS
C
670 DO 209 N = 1,NELEM
DO 905 I=1,NEL
K = ICUNN(N,I)
IF(K.GT.NPT .OR.K.LT.0) GO TO 905
IF(K.EQ.0) GO TO 905
XA(1,I) = X(K)
XA(2,I) = Y(K)
XA(3,I) = Z(K)
905 CONTINUE
K1=ICUNN(N,1)
K2=ICUNN(N,2)

```

```

K3=ICUNN(N,3)
K4=ICUNN(N,4)
K5=ICUNN(N,5)
K6=ICUNN(N,6)
K7=ICUNN(N,7)
KH=ICUNN(N,8)
NSIDE = (NEL+1)/NDIM**2
L=1
IF(NDIM.EQ.2) L=2
LJM = 0
EVOL = 0.
SS = 1.0
DO 30 I = 1,2
SS = -SS
II = 1.0
DO 30 J = 1,2
II = -II
UU = 1.0
DO 30 K = 1,2
UU = -UU
CALL CHKJAC (UU,II,SS,NDIM,NEL,NSIDE,XJAC)
EVOL=EVOL*XJAC
C
C COMPUTE MASS PROPERTIES OF SKULL
C
LJK = LJK + 1
IF(XJAC.GT.0.0) GO TO 30
WRITE(6,208) N,XJAC,(ICUNN(N,LL),LL=1,NEL)
208 FORMAT(/#H ELEMENT,15,20X, #HJACOBIAN,E11.4/6H ICUNN,8I14)
JAC = -1
WRITE(6,802) X(K1), X(K2), X(K3), X(K4), X(K5), X(K6), X(K7),X(K8)
WRITE(6,803) Y(K1), Y(K2), Y(K3), Y(K4), Y(K5), Y(K6), Y(K7),Y(K8)
WRITE(6,804) Z(K1), Z(K2), Z(K3), Z(K4), Z(K5), Z(K6), Z(K7),Z(K8)
802 FORMAT (6H X ,#E14.4)
803 FORMAT (6H Y ,#E14.4)
804 FORMAT (6H Z ,#E14.4)
LKJM=ICORRG(LJK)
WRITE(6,206) ICUNN(N,LKJM)
206 FORMAT (/5H NODE,15,12H IS INVERTED)
30 CONTINUE
VOL = VOL + EVOL
IM = ICUNN(K,10)
FMASS =EVOL*DEN(IM)
MASS = MASS+FMASS
IF(MASS*.NE.0) CALL MASSDIS(K1,K2,K3,K4,K5,K6,K7,KH,EMASS,N)
XNELEM,MASS,IMHALF)
209 CONTINUE
WRITE(6,99) VOL,MASS
99 FORMAT(/9H VOLUME =,E11.4,10H INCHES**3/7H MASS =,E11.4,
X 19H LB*SEC**2 PER INCH)
IF (JACON .EQ. 1) GO TO 94
IF (JAC.LT.0) GO TO 94
WRITE(6,942)
942 FORMAT (/55H MESH HAS BEEN CHECKED-NO NEGATIVE JACOBIANS WERE FOUND)
91 FORMAT (15,10X, 11, 4X, 3F10.3,15)
DO 700 N=1,NPT
PUNCH 91, N,RC(N),X(N),Y(N),Z(N),IPT(N)
700 WRITE (6,91) N,RC(N),X(N),Y(N),Z(N),IPT(N)
PUNCH 93, (N,ICUNN(N,10),(ICUNN(N,M),M=1,8),N=1,NELEM)
WRITE (6,93) (N,ICUNN(N,10),(ICUNN(N,M),M=1,8),N=1,NELEM)
93 FORMAT (215,8I4)
GO TO 94
940 WRITE (6,941) K
941 FORMAT (5H NODE,15,2X,11H EXCEEDS NPT)
94 STOP
END
*DECK POSTS
SUBROUTINE POSTS(LA,LR,LC,LD,LE,LF,LG,LH,LI,LJ,LK,LL,LM,LN,LO,LP,
I LU,LR,LS,LT,LU,LV,LW,LX,LY,LZ,LI,ICODE,NB,IG,IPT)
COMMON /JAC/ NJAC, 15A,NSA
COMMON ICUNN(1120,10),X(1290),Y(1290),Z(1290),H(1290),RC(1290)

```

```

INTEGER BC
DIMENSION IPT(1215),NRIG(15,15,15),NS(4),NA(4)
NODE=NRIG(LA,LH,LC)
IPT(NODE)=2
NS(1)=NRIG(LD,LE,LF)
K=NS(1)
NS(2)=NRIG(LG,LH,LI)
I=NS(2)
NS(3)=NRIG(LJ,LK,LL)
J=NS(3)
3 NA(1)=NRIG(LP,LQ,LM)
NA(2)=NRIG(LS,LT,LU)
NA(3)=NRIG(LV,LW,LX)
NA(4)=NRIG(LY,LZ,LI)
NAN=NA(1)
IPT(NAN)=1
DO 40 I1=2,4
NAN=NA(I1)
IP=I1+1
40 IPT(NAN)=IP
IF(ICODE-1) 4,4,2
4 CONTINUE
L=J
NTRI=3
GO TO 103
2 NS(4)=NRIG(LM,LN,LO)
L=NS(4)
NTRI=4
103 CONTINUE
N=NODE
C
C I,J,K,L ARE THE AUXILIARY NODES FOR NODE N
C
104 C1 = 0
C2 = 0
C3 = 0
DO 110 I1 = 1,NTRI
XX = X(N)
YY = Y(N)
ZZ = Z(N)
GO TO (105,106,107,108),I1
105 A1 = X(J) - XX
A2 = Y(J) - YY
A3 = Z(J) - ZZ
H1 = X(I) - XX
H2 = Y(I) - YY
H3 = Z(I) - ZZ
GO TO 109
106 A1 = X(I) - XX
A2 = Y(I) - YY
A3 = Z(I) - ZZ
H1 = X(K) - XX
H2 = Y(K) - YY
H3 = Z(K) - ZZ
GO TO 109
107 A1 = X(K) - XX
A2 = Y(K) - YY
A3 = Z(K) - ZZ
H1 = X(L) - XX
H2 = Y(L) - YY
H3 = Z(L) - ZZ
GO TO 109
108 A1 = X(L) - XX
A2 = Y(L) - YY
A3 = Z(L) - ZZ
H1 = X(J) - XX
H2 = Y(J) - YY
H3 = Z(J) - ZZ
109 C1 = (A2*B3 - A3*B2)/NTRI + C1
C2 = (A3*B1 - A1*B3)/NTRI + C2
C3 = (A1*B2 - A2*B1)/NTRI + C3
110 CONTINUE

```

```

C
C DIRECTION COSINES
C
CL = (C1*C1 + C2*C2 + C3*C3)**.5
COAL = (C1/CL)
COHE = (C2/CL)
COGA = (C3/CL)
COSCH = (COAL*COAL+COHE*COHE+COGA*COGA)**.5
C
C IF SO SPECIFIED-INCLUDE THE SUBARACHNOID SPACE
C
IF (NSA .EQ. 0) GO TO 116
C
C CORRECT FOR NEG JACOBIANS BY SPECIFYING AVERAGE THICKNESS TSA
C
IF (NJAC .NE. 0) GO TO 917
TSA=H(NODE)*.25
917 CONTINUE
N=NA(1)
X(N) = XX - TSA*COAL
Y(N) = YY - TSA*COHE
Z(N) = ZZ - TSA*COGA
116 N=NODE
C
C DIPLOE LAYER THICKNESS IS ASSUMED ONE HALF THE TOTAL SKULL THICKNESS
C
117 T = H(N)*.25
N=NA(2)
X(N)=XX + T*COAL
Y(N)=YY + T*COHE
Z(N)=ZZ + T*COGA
N=NA(3)
X(N)=XX + 3.*T*COAL
Y(N)=YY + 3.*T*COHE
Z(N)=ZZ + 3.*T*COGA
N=NA(4)
X(N)=XX + 4.*T*COAL
Y(N)=YY + 4.*T*COHE
Z(N)=ZZ + 4.*T*COGA
RETURN
END
NO
*DECK
FUNCTION NOD(M)
COMMON ICUNN(1120,10),X(1290),Y(1290),Z(1290),H(1290),HC(1290)
INTEGER HC
NM=(M-1)/8
N=NM+1
JM=(M-NM)*8
J=JM+1
NOD=ICUNN(N,J)
RETURN
END
*DECK
ISTORE
SUBROUTINE ISTORE(NELEM,I,J,K,NBIG,ICUNN,IMAT)
DIMENSION NBIG(15,15,15),ICUNN(1120,10)
ICUNN(NELEM,1)=NBIG(I ,J ,K )
ICUNN(NELEM,2)=NBIG(I ,J+1,K )
ICUNN(NELEM,3)=NBIG(I ,J+1,K+1)
ICUNN(NELEM,4)=NBIG(I ,J ,K+1)
ICUNN(NELEM,5)=NBIG(I+1,J ,K )
ICUNN(NELEM,6)=NBIG(I+1,J+1,K )
ICUNN(NELEM,7)=NBIG(I+1,J+1,K+1)
ICUNN(NELEM,8)=NBIG(I+1,J ,K+1)
ICUNN(NELEM,9)=0
ICUNN(NELEM,10)=IMAT
RETURN
END
*DECK
HALF
SUBROUTINE HALF (NPT,NELEM,NEL)
COMMON ICUNN(1120,10),X(1290),Y(1290),Z(1290),H(1290),HC(1290)
INTEGER HC
DIMENSION ICROS(1215)

```

```

      DO 5 I = 1, NPT
      5 ICROS(I) = 0
      WRITE (6,130) NPT,NELEM,NEL
130  FORMAT (315)
      N = 0
C
C   SET TO ZERO ALL Y COORDINATES ON MIDSAAGITTAL PLANE AND
C   DELETE NUDES WITH NEGATIVE Y COORDINATES
C
      DO 10 I = 1,NPT
      YI = Y(I)
      YI = ABS(Y(I))
      IF (YI .LT. .001) GO TO 7
      IF (Y(I) .LT. 0.) GO TO 10
      GO TO 8
      7 YI = 0.
      8 N = N + 1
      ICROS(I) = N
      X(N) = X(I)
      Y(N) = YI
      Z(N) = Z(I)
      IF (YI .EQ. 0.) BC(N) = 1
10  CONTINUE
      N = N + 1
      DO 20 I = N,NPT
      X(I) = 0.
      Y(I) = 0.
      Z(I) = 0.
      NPT = N-1
C
C   FORM CONNECTIVITY FOR HALF SKULL
C
      KOUNT = 0
      DO 30 J = 1,NELEM
      DO 25 K = 1,NEL
      JK = ICONN(J,K)
      IF (ICROS(JK) .EQ. 0) GO TO 30
      ICONN(J,K) = ICROS(JK)
      25 CONTINUE
      KOUNT = KOUNT + 1
      DO 27 K=1,NEL
      27 ICONN(KOUNT,K) = ICONN(J,K)
      30 CONTINUE
      NELEM = KOUNT
      WRITE (6,130) NPT,NELEM,NEL
      RETURN
      END
*DECK CHKJAC
      SUBROUTINE CHKJAC(W,S,T,NUM,NEL,NSIDE,XJAC)
      COMMON /X/ XA(3,20)
      DIMENSION SHAPE(4,20),SG(3,3),SK(3,3)
      DIMENSION N1(12),N2(12),N3(12),NODE(12),S2ORD(12),S3ORD(12),SS(3)
      DIMENSION COLM(3)
      DATA NODE/2,4,6,8,9,10,11,12,14,16,18,20/
      DATA N1/1,2,1,2,3,3,3,3,1,2,1,2/, N2/2,3,2,3,1,1,1,1,2,3,2,3/
      DATA N3/3,1,3,1,2,2,2,2,3,1,3,1/
      DATA S2ORD/-0.5,-0.5, 0.5,-0.5,-0.5, 0.5, 0.5,-0.5,-0.5, 0.5, 0.5, 0.5/
      DATA S3ORD/-0.5, 0.5,-0.5,-0.5,-0.5,-0.5, 0.5, 0.5, 0.5, 0.5, 0.5,-0.5/
      SS(1) = W
      SS(2) = S
      SS(3) = T
      KI = 4
      LI = 1
      IF (NSIDE.EQ.1) GO TO 110
      KI = 12
      LI = 2
      C**** FORM INSIDE SHAPE FUNCTIONS
      DO 100 L=1,LI
      N = NODE(L)
      I = N1(L)
      J = N2(L)
      K = N3(L)

```

```

      RRI 2C
      RRI 3C
      RRI 5C
      RRI 6C
      RRI 8C
      RRI 9C
      RRI 10C
      RRI 11C
      RRI 12C
      RRI 13C
      RRI 14C
      RRI 15C
      RRI 16C
      RRI 17C
      RRI 18C
      RRI 19C
      RRI 20C
      RRI 21C
      RRI 22C
      RRI 23C

```

```

      SJ = SZORD(L)
      SL = SZORD(L)
      RP = 1. - SS(1)**2
      SP = .5 + SJ*SS(J)
      TP = .5 + SL*SS(K)
      SHAPE(1,N) = -2.0*SS(1)*SP*TP
      SHAPE(2,N) = SJ*RP*TP
      SHAPE(3,N) = SL*RP*SP
      SHAPE(4,N) = RP*SP*TP
100  C**** FORM CORNER SHAPE FUNCTIONS
110  SJ = .5
      K = 0
      DO 250 J = 1,2
      L = 1
      DO 200 I = 1,2
      RP = .5 + SZORD(I)*R
      SP = .5 + SZORD(I)*S
      TP = .5 + SJ*T
      SHAPE(1,L + K) = SZORD(I)*SP*TP
      SHAPE(2,L + K) = RP*SZORD(I)*TP
      SHAPE(3,L + K) = RP*SP*SJ
      SHAPE(4,L + K) = RP*SP*TP
200  L = L + 1
      K = K + 1
250  SJ = .5
      IF(NSIDE.EQ.1) GO TO 360
C**** CORRECT BASIC CORNER FUNCTIONS BY PROPORTIONS OF MIDSIDE FUNCTIONS
      K = 8
      L = 9
      DO 350 I = 1,2
      DO 300 J = 1,4
      SHAPE(J,I) = SHAPE(J,I) - 0.5*(SHAPE(J,I+1) + SHAPE(J,K) + SHAPE(J,L))
300  SHAPE(J,I+12) = SHAPE(J,I+12) - 0.5*(SHAPE(J,I+13) + SHAPE(J,K+12)
      + SHAPE(J,L))
      K = I + 1
350  L = L + 1
C**** FORM THE JACOBIAN DETERMINANT
360  DO 370 I = 1,3
      DO 370 J = 1,3
370  SK(I,J) = 0.0
      DO 400 I = 1,NDIM
      DO 400 J = 1,NDIM
      DO 400 K = 1,NEL
400  SK(I,J) = SK(I,J) + SHAPE(J,K)*XA(I,K)
      IF(NDIM.EQ.2) SK(3,3) = 1.0
      SG(1,1) = SK(2,2)*SK(3,3) - SK(2,3)*SK(3,2)
      SG(2,2) = SK(1,1)*SK(3,3) - SK(1,3)*SK(3,1)
      SG(3,3) = SK(1,1)*SK(2,2) - SK(1,2)*SK(2,1)
      SG(1,2) = -SK(1,2)*SK(3,3) + SK(1,3)*SK(3,2)
      SG(1,3) = SK(1,2)*SK(2,3) - SK(1,3)*SK(2,2)
      SG(2,1) = -SK(2,1)*SK(3,3) + SK(2,3)*SK(3,1)
      SG(2,3) = -SK(1,1)*SK(2,3) + SK(2,1)*SK(1,3)
      SG(3,1) = SK(2,1)*SK(3,2) - SK(2,2)*SK(3,1)
      SG(3,2) = -SK(1,1)*SK(3,2) + SK(1,2)*SK(3,1)
      XJAC = 0.0
      DO 600 I = 1,NDIM
600  XJAC = XJAC + SG(I,1)*SK(I,1)
      RETURN
      END
*CHECK MASSES
SUBROUTINE MASSDIS(K1,K2,K3,K4,K5,K6,K7,K8,EMASS,N,NLELEM,MASS,
      X1HALF)
C
C MASS MOMENT OF INERTIA TENSOR IS COMPUTED VIA PARALLEL AXIS THEOREM
C
      COMMON ICONK(120*10),X(1290),Y(1290),Z(1290),H(1290),RC(1290)
      REAL MASS
C
C COMPUTE ELEMENT CG COORDINATES
C
      XCG = (X(K1)+X(K2)+X(K3)+X(K4)+X(K5)+X(K6)+X(K7)+X(K8))/8.0
      YCG = (Y(K1)+Y(K2)+Y(K3)+Y(K4)+Y(K5)+Y(K6)+Y(K7)+Y(K8))/8.0

```

```

ZCG = (Z(K1)+Z(K2)+Z(K3)+Z(K4)+Z(K5)+Z(K6)+Z(K7)+Z(K8))/B.0
RHOX = YCG*YCG + ZCG*ZCG
RHOY = XCG*XCG + ZCG*ZCG
RHOZ = XCG*XCG + YCG*YCG
C
C ACCUMULATE FIRST MOMENT OF ELEMENT MASS WRT REFERENCE AXES
C
      FMUY = XCG*EMASS+FMUY
      FMOX = ZCG*EMASS+FMOX
C
C ACCUMULATE SECOND MOMENT OF ELEMENT MASS WRT REFERENCE AXES
C
      SMOXX = RHOX*EMASS+SMOXX
      SMOYY = RHOY*EMASS+SMOYY
      SMOZZ = RHOZ*EMASS+SMOZZ
      SMOXY = 0.
      SMOXZ = XCG*ZCG*EMASS+SMOXZ
      SMOYZ = 0.
C
      IF (N.LT.NELEM) RETURN
C
C COMPUTE CG LOCATION WRT REFERENCE AXES
C
      WRITE (6,93)
93  FORMAT (1H1,29H MASS DISTRIBUTION PROPERTIES//)
      IF (IHAF.EQ.1) WRITE(6,94)
94  FORMAT (730H VALUES ARE FOR A HALVED SKULL/)
      XBAR = FMUY/MASS
      YBAR = 0.
      ZBAR = FMOX/MASS
      WRITE (6,98) XBAR,YBAR,ZBAR
      WRITE (6,99) SMOXX,SMOXY,SMOXZ,SMOXY,SMOYY,SMOYZ,SMOXZ,SMOYZ,SMOZZ
C
C COMPUTE MASS MOMENT OF INERTIA WRT TO CG REFERENCE
C
      SMOXX = SMOXX - MASS*ZBAR*ZBAR
      SMOYY = SMOYY - MASS*(XBAR*XBAR + ZBAR*ZBAR)
      SMOZZ = SMOZZ - MASS*XBAR*XBAR
      SMOXY = 0.
      SMOXZ = SMOXZ - MASS*XBAR*ZBAR
      SMOYZ = 0.
      WRITE (6,96) SMOXX,SMOXY,SMOXZ,SMOXY,SMOYY,SMOYZ,SMOXZ,SMOYZ,SMOZZ
C
C PRINCIPAL MASS MOMENTS OF INERTIA WRT TO CG REFERENCE
C
      AVE = (SMOXX+SMOZZ)*.5
      BASE = (SMOXX-SMOZZ)*.5
      RAD = (BASE*BASE + SMOXZ*SMOXZ)**.5
      SMOXX = AVE + RAD
      SMOZZ = AVE - RAD
      DUM = SMOXZ
      SMOXZ = 0.
      WRITE (6,95) SMOXX,SMOXY,SMOXZ,SMOXY,SMOYY,SMOYZ,SMOXZ,SMOYZ,SMOZZ
      THETA = .5*ATAN(DUM/BASE)
      THETA = 180.*THETA/3.1415926
      *WRITE (6,97) THETA
97  FORMAT(//55H PRINCIPAL INERTIA AXIS ORIENTATION WRT FRANKFORD PLAN
      XE/FA.1,4H DEGREES)
98  FORMAT (7,21H CG LOCATION (INCHES)/6H XBAR=F10.3/
      XH YBAR=F10.3/6H ZBAR=F10.3)
99  FORMAT(//34H INERTIA TENSOR WRT REFERENCE AXES/
      X3E11.3/3E11.3,5X,13H LH=SEC**2-IN/3E11.3)
96  FORMAT(//52H INERTIA TENSOR WRT PARALLEL AXES PASSING THROUGH CG/
      X3E11.3/3E11.3,5X,13H LH=SEC**2-IN/3E11.3)
95  FORMAT (//32H PRINCIPAL INERTIA TENSOR WRT CG/
      X3E11.3/3E11.3,5X,13H LH=SEC**2-IN/3E11.3)
      RETURN
      END

```

```

PROGRAM HANDS (INPUT,OUTPUT,PUNCH,TAPE5=INPUT,TAPE6=OUTPUT,
* TAPE7=PUNCH)
C
CXXXX
C PREPROCESSOR FOR FEAP (BANDWIDTH MINIMIZING)
C
C INPUT
C
C CARD) (RIE) NUMNP,IPUNCH,IPRINT
C ELEMENT CARDS
C EOF CARD)
C
C IF IPUNCH AND/OR IPRINT FLAGS ARE ON, THE NODE RESEQUENCING
C ARRAY IS PUNCHED AND/OR PRINTED. THIS ARRAY IS THEN INPUT
C IN THE FEAP PROGRAM IMMEDIATELY FOLLOWING THE FEAP CARD,
C A 1 IN CC 79 OF THE FEAP CARD SIGNALS THAT THE RESEQUENCING
C ARRAY IS INCLUDED IN THE FEAP INPUT.
C
C THE FORMAT FOR THE RESEQUENCING PUNCH IS *
C
C CC 1-5, A SEQUENCE NUMBER (TO MAINTAIN CARD ORDER)
C CC 11-16, 15 ENTRIES IN THE RESEQUENCING ARRAY (1515)
C THE PUNCH IS TERMINATED WITH A 9999 IN CC 1-5
CXXXX
C
C
COMMON /FILES/ I11,I12,I13
COMMON /CONTROL/ JNK(7),INUM,INEX,IRENUM,NTOTD
COMMON /FRRS/ IERF(33)
COMMON /OPUT/ MED(21)
COMMON /STG1/ MSEP(91)
COMMON /MISC/ IASTER,ZERO,RAO
COMMON /KXKCOM/ KXK,ANT
COMMON /TPULGY/ I1,JI(3),NEXT,LAST,KORIG,KNEW
COMMON /S/ NN,MM,IN,IB
COMMON /P/ IHO,IHE
COMMON /TIME/ STIME,NCM
C
COMMON IA(1)
CXX
READ (5,50) INUM,IPUNCH,IPRINT
50 FORMAT (315)
CXX
INEX=INUM
IRENUM=2
NTOTD=0
NN=INUM
MM=0
LAST=J*INUM
NEXT=INUM+1
C
N1=1
N2=N1+INEX
N3=N2+INUM
N4=N3+INUM
N5=N4+INUM
N6=N5+INUM
N7=N6+INUM
N8=N7+INUM
N9=N8+LAST
C
CALL FIELD (IA(N9))
DO 10 I=1,INEX
10 IA(I)=I
DO 20 I=N2,N9
20 IA(I)=0
C
CALL LLIN (IA(N1),IA(N7),IA(N8),INUM*4)
C
N9=N8+LAST+2*MM+10
CALL FIELD (IA(N9))
CALL SCHEME (IA(N8),IA(N1),IA(N2),IA(N3),IA(N4),IA(N5),IA(N6),

```

```

      * IA(N7),IA(N8*LAST))
C      WRITE (6,100) KORIG,KNEW
100  FORMAT (1H1/15H ORIGINAL Bw =,IS/15H   FINAL Bw =,IS )
C      IF (IPRINT.NE.0) WRITE (6,800)
800  FORMAT (22H10LD NODE      NEW NODE  //)
      N7=N7+INUM-1
      J=0
      IH=N7-1
      K=0
      DO 40 I=N7,N7H
      J=J+1
      IF (IPUNCH.EG.0) GO TO 30
      IF (MOD(J,15).NE.1) GO TO 30
      IL=IH+1
      IH=IH+15
      IF (IH.GT.N7H) IH=N7H
      K=K+1
      WRITE (7,60) K,(IA(IL),L=IL,IH)
30  IF (IPRINT.NE.0) WRITE (6,70) J,IA(I)
40  CONTINUE
60  FORMAT (16I5)
70  FORMAT (1A,1B,5X,1B)
      J=9999
      IF (IPUNCH.NE.0) WRITE (7,60) J
      STOP
      END
      SUBROUTINE FIELD (IA)
      DIMENSION IA(1)
      DATA LAST/,/,MAX/,/20000H/,MIN/,/55000H/
      NOW=((LDCF(IA(1))/100H)+1)*100H
      IF (NOW.GT.MAX) GO TO 100
      IF (NOW.LT.MIN) NOW=MIN
      IF (NOW.GT.LAST) GO TO 50
      IF (NOW.LT.LAST-10000) GO TO 50
      GO TO 75
50  CALL XHFL (NOW)
      LAST=NOW
75  RETURN
100  WRITE (6,200) NOW
200  FORMAT (26H0*** ERROR  EXCESSIVE CORE REQUESTED /
      * 11X,12H000 REQUESTS, 17, 7H WORDS )
      STOP
      END
      IDENT  LOAD  (I*1H*LL*IN*IF)
      ENTRY  LOAD
LOAD      VFD  24/4HLOAD,36/5
          HSSZ  1
          SB1  1
          SA2  A1+B1
          SA3  A2+B1
          SA4  A3+B1
          SA5  A4+B1
          MAX  1
          SA2  X2
          SA3  X3
          SA4  X4
          SA1  X1
          SB5  X5
          SB3  X2
          IA5  X2-X3
          SB1  X3-1
          SB2  X5
          LA4  B1-X4
          SB4  60
          SA6  B2-X6
          SB4  B4-B1
          LA6  B3-X6
          SA7  X6-X1
          HA1  X1-X7
          LA7  B4-X7
          LH TO B3
          LH=LL (MASK WIDTH LESS 1)
          NO OF LFT SHFTS FOR IN
          NO OF HGHT SHFTS TO BUILD MASK
          POSN IN
          B4=60
          FORM MASK
          LFT SHFTS TO PUT (IF) IN LO BITS
          POSN MASK
          GET OLD VALUE
          ZERO=OUT OLD VALUE
          POSN (IF) IN LO BITS

```

```

      SA6   X1*X4      MASK IN NEW VALUE
      SA7   B5         STORE IF
      SA6   A1         STORE I
      EQ    LOAD      ALL DONE
      END
IDENT UNLOAD (I,LM,LL,IN)
ENTRY UNLOAD
VFD 36/6HUNLOAD,24/4
UNLOAD BSSZ 1
      SB1 1
      SA2 A1*H1
      SA3 A2*H1
      SA4 A3*H1
      MX1 1
      SA2 X2
      SA3 X3
      SA1 X1
      SD4 X4
      SB3 X2          LH TO B3
      IAS X2-X3      LH-LL (MASK WITH LESS 1)
      SB2 X5          NO OF RIGHT SHFTS TO BUILD MASK-
      IAS X5-X2      -LL TO X7
      AA6 B2*X0      FORM MASK
      SM1 X7*P1      NO OF LFT SHFTS TO PACK IN RIGHT
      LA6 B3*X6      POSN MASK
      BA7 X6*X1      EXTRACT VALUE
      LA6 B1*X7      SHFT IN TO LO ORDER POSN
      SA6 B4         STORE IN
      EQ UNLOAD     ALL DONE
      END
SUBROUTINE ELIN (NODIN,MAXJ,IO,NMNP,NSEC)
COMMON /FILES/ 111,112,113
COMMON /CNTRL/ NLOAD,NCOMB,IMODE,IPL0T,INSTR1,ICORE,INSYS,INUM,
1 INFX,IRENUM,INTOTD
COMMON /ERRS/ IERF(25),KARD,KARDS,NSECT,KULS(2),IERR,NEHRS,
1 MAIN1
COMMON /OPUT/ HED1(8),HE02(8),NLINE,NPAGE,LSTOFF,LSPS,LSP
COMMON /STG1/ MSFP(25),LSEP(25),IORD(25),ICARD(8),NSEP,NSEP1,
1 LUSEP,MXERR,NSP,NK,LBLNK,IT
COMMON /MISC/ IASTEP,ZERO,RAO
COMMON /KRA/COM/ KKR,KNT
DIMENSION NODIN(1),MAXJ(1),IO(1),IJ(8),JI(24)
DIMENSION IAT(8),IX(8)
NODH=NMNP-INTOTD
KARD=1
MAXN=0
IEL=0
15 READ (5,115) IELN,IAT
115 FORMAT (15,15X,8I3)
IF (EOP(5)) 99,20
20 IF (IELN.LE.0) GO TO 99
IF (IELN.GT.IEL*1) GO TO 60
IF (IELN.LE.IEL) GO TO 98
25 READ (5,120) IJ
120 FORMAT (8I4)
IEL=IELN
IH=0
DO 30 I=1,MAXN
IF (IJ(I).LE.0) GO TO 35
IH=IH+1
IX(IH)=IX(I)
IF (IX(IH).EQ.0) IX(IH)=1
30 CONTINUE
35 M=0
DO 45 I=1,IH
L=IJ(I)
IF (L.GT.NMNP) GO TO 97
M=M+1
JI(M)=L
45 CONTINUE
IF (M.GT.0) CALL PACK (JI,MAXJ,IO,M)
GO TO 15

```

```

60 IF (IEL.EQ.0) GO TO 96
   NG=IELN-IEL-1
   DO 80 N=1,NG
     M=0
     IEL=IEL+1
     DO 70 I=1,IH
       IJ(I)=IJ(I)+IX(I)
       L=IJ(I)
       IF (L.GT.NMNP) GO TO 97
       M=M+1
       JI(M)=L
70 CONTINUE
   IF (M.GT.0) CALL PACK (JI,MXJ,IO,M)
80 CONTINUE
   GO TO 25
96 WRITE (6,600)
600 FORMAT (50M0** ERROR ** FIRST ELEMENT OMITTED. )
   STOP 1
97 WRITE (6,610) IEL
610 FORMAT (50M0** ERROR ** NODE NUMBER OUT OF RANGE. ELEM NO. ,IS )
   STOP 2
98 WRITE (6,620) IELN
620 FORMAT (50M0** ERROR ** ELEMENT OUT OF SEQUENCE. ELEM NO. ,IS )
   STOP 3
99 RETURN

END
SUBROUTINE PACK (JI,MXJ,IJ,N)
COMMON /TPOLGY/ I1,JJ,J2,J3,NEXT,LAST
COMMON /CONTROL/ IUMMY(7),INUM
DIMENSION      JI(1),MXJ(1),IJ(1)
NN=N
DO 20 I=1,N
  J=JI(I)
  IF (MXJ(J).EQ.0) GO TO 20
  MXJJ=MXJ(J)
  CALL UNLOAD (MXJJ,45,3),KI)
  CALL UNLOAD (MXJJ,30,16,KK)
  CALL UNLOAD (MXJJ,15, 1,KJ)
  L=I
  IF (KJ.EQ.0) GO TO 10
  NN=NN+1
  L=NN
10 JI(L)=KI
  IF (KK.EQ.0) GO TO 20
  NN=NN+1
  JI(NN)=KK
20 CONTINUE
30 IF (NEXT>NN>NN.LI.LAST) GO TO 50
  LAST=LAST+INUM
  CALL FIELD (IJ(LAST))
  IL=LAST-INUM+1
  DO 40 I=IL,LAST
    IJ(I)=0
40 CONTINUE
  GO TO 30
50 DO 100 I=1,NN
  II=JI(I)
  DO 90 J=1,NN
    JJ=JI(J)
    IF (II.EQ.JJ) GO TO 90
    CALL PK (IJ(II))
90 CONTINUE
100 CONTINUE
  RETURN
END
IDENT PK (IJ(I))
ENTRY PK
VFD 12/2HPR,98/1
PK BSS 1
USE /TPOLGY/
I BSS 1
JI BSS 1

```

J2	HSS	1	
J3	HSS	1	
NEXT	HSS	1	
	USE		
	USE	/S/	
NUMY	HSS	1	
MM	HSS	1	
	USE		
S ₂	1		I TO X2
S ₄	NEXT		NEXT TO X4
S ₃	J1		J1 TO X3
S ₁	X1		
S ₁	A1		
L ₆	14		14 BT LO MSK IN X0
S ₃	46		INITIAL SHFT VALUE
S ₂	X2		I TO H2
S ₄	14		H4=14
S ₁	H1-H2		AD(IJ(0)) TO H1
S ₇	H0		INIT LOOP COUNTER
S ₅	1		
S ₂	MM		MM TO X2
S ₇	X4+1		FORM NEW NEXT IN X7
S ₂	H3		INIT H2
S ₆	X3		J1 TO H6
LOOP	L ₆	H4,X1	SHFT IJ INTO X6
	S ₇	H7,A5	
	H ₅	X6,X0	EXTRACT J
	S ₅	X5	MOVE J TO H5
	Z ₆	X5,PACK12	IS J ZERO
	E ₆	H5,H6,PK	DONE IF J=J1
	L ₆	14	SHFT IJ
	S ₂	H2-H4	DEC SHFT REG
	H ₅	X6,X0	EXTRACT J
	S ₅	X5	MOVE J TO H5
	Z ₆	X5,PACK12	IS J ZERO
	E ₆	H5,H6,PK	DONE IF J=J1
	L ₆	14	SHFT IJ
	S ₂	H2-H4	DEC SHFT REG
	H ₅	X6,X0	EXTRACT J
	S ₅	X5	MOVE J TO H5
	Z ₆	X5,PACK3	IS J ZERO
	E ₆	H5,H6,PK	DONE IF J=J1
	S ₁	H1,X1	FETCH NEXT IJ TO X1
	S ₂	H3	INIT SHFT REG
	E ₆	LOOP	BACK TO TOP TO CONSIDER NEXT IJ
PACK 3	L ₄	42	SHFT CURRENT NEXT
	S ₇	44	STORE NEW NEXT
	H ₆	X6,X4	PACK CURRENT NEXT INTO ADDRESS PORTION
PACK 12	H ₆	X6,X3	PACK J1 INTO IJ
	L ₆	H2,X6	REPOSN IJ
	S ₆	X2	MOVE MM TO H6
	S ₆	A1	STORE UPDATED IJ
	G ₁	H6,H7,PK	DONE IF MM.GT.LOOP COUNT
	S ₇	H7	NEW MM TO X7
	S ₇	A7	STORE NEW MM
	E ₆	PK	DONE
	END		
	I _{VENT}	UNPK (IJ(I))	
	ENTHY	UNPK	
	W _D	24/4HUNPK,36/1	
UNPK	HSS	1	
	USE	/TPOLGT/	
I	HSS	1	
J1	HSS	1	
J2	HSS	1	
J3	HSS	1	
NEXT	HSS	1	
	USE		
	M ₁₀	14	BUILD MASK
	S ₁	X1	
	L ₁₀	14	14 BT LO MASK

```

      LX1      14      SHFT IJ(1)
      HA6     X1*X0    GET J1
      LX1      14      SHFT IJ(1)
      SA6      J1      STORE J1
      HA7     X1*X0    GET J2
      LA1      14      SHFT IJ(1)
      SA7      J2      STORE J2
      HA6     X1*X0    GET J3
      LA1      18      SHFT IJ(1)
      SA6      J3      STORE J3
      SH7     X1      GET NEXT
      SA7      H7      PUT NEXT IN X7
      SA7     NEXT     STORE NEXT
      EQ      UNPK     DONE
      END
SUBROUTINE SCHEME (IG,IC,IDEG,IDIS,IW,NEW,ICC,ILD,IPP)
DIMENSION IG(1),IC(1),IDEG(1),IDIS(1),IW(1),NEW(1),ICC(1),ILD(1),
      IPP(1),NODESL(100)
COMMON /TPULGY/ I1,JI(3),NEXT, LAST,KORIG,KNEW
COMMON /S/ AN,MM,IM,IH
COMMON /P/ IH0,IHE
COMMON /TIME/ STIME,NCM
EQUIVALENCE (IH,ATIME)
N,I=MINO(80,KN)
NUM=1
NOM=2
IO=2
IP=0
CALL DEGREE (IG,IDEG)
MODD=MODF(IDEG,IPP)
NCM=COMPHI(IG,IC,IDEG,IW,ICC)
MAXD=MAXDGR(0,IC,IDEG)
MM=MAXD
DO 30 I=1,NN
NEW(I)=I
30 ILD(I)=1
IS=MAXAND(0,IG,IC,IDEG,NEW,ILD)
KORIG=IS
IH0=IH
DO 35 I=1,NN
NEW(I)=J
35 ILD(I)=0
DO 500 NC=1,NCM
MI=MINDEG(NC,IC,IDEG)
MAD=MI
IF (NUM.EQ.0) GO TO 91
MA=MAXDGR(NC,IC,IDEG)
90 MAD=MI+((MA-MI)*NUM)/NOM
MAD=MIN0(MAD,MODD-1)
MAD=MAX(MAD,MI)
91 CALL UIAM(NC,MAD,NL,NODESL,MAXLEV,IG,IC,IDEG,IDIS,IW,ICC)
JMAX=MIN0(NI,NL)
IMM=IM
DO 400 J=1,JMAX
CALL RELABL(1,NODESL(J),IG,IC,IDEG,IDIS,IW,NEW,ICC,ILD)
IH=MAXAND(0,IG,IC,IDEG,NEW,ILD)
IE=ICC(NC+1)-1
IF (IM-IH) 400,350,300
300 IM=IH
IMM=IH
IJ=J
GO TO 400
350 IF (IMM.LE.IH) GO TO 400
IMM=IH
IJ=J
400 CONTINUE
CALL RELABL(1,NODESL(IJ),IG,IC,IDEG,IDIS,IW,NEW,ICC,ILD)
500 CONTINUE
CALL STACK(IDEG,NEW,ILD,IW)
IH=MAXAND(0,IG,IC,IDEG,NEW,ILD)
IF (IH-IS) 715,742,744

```

```

742 IF (IM.LI.IH0) GO TO 715
744 DO 712 I=1,NN
    ILD(I)=I
712 NEW(I)=I
    CALL STACK(IDEG,NEW,ILD,IM)
    IH=IS
    IM=IM0
715 IM=IM
    CALL REVEFS(NEW,ILD)
    IM=MAXRD(0,IG,IC,IDEG,NEW,ILD)
717 IF (IM.LI.IHE) GO TO 720
    CALL REVEFS(NEW,ILD)
    IM=MAXRD(0,IG,IC,IDEG,NEW,ILD)
720 IM=IM
    KNEW=IH
600 RETURN
END
SUBROUTINE UFGREE (IG,IDEG)
    DIMENSION IG(1),IDEG(1)
    COMMON /TPOLGY/ I1,J1,J2,J3,NEXT
    COMMON /S/ NN,MM,IH,IB
    DO 50 I=1,NN
        NEXT=I
        J=0
    10 CALL UNPK (IG(NEXT))
        IF (J3.EQ.0) GO TO 20
        J=J+3
        GO TO 10
    20 IF (J2.EQ.0) GO TO 30
        J=J+2
        GO TO 10
    30 IF (J1.EQ.J) GO TO 40
        J=J+1
    40 IDEG(I)=J
        MM=MAX(MM,J)
    50 CONTINUE
    RETURN
END
FUNCTION MODE(IDEG,MODE)
    COMMON /S/ NN,MM
    DIMENSION IDEG(1),MODE(1)
    DO 10 I=1,MM
    10 MODE(I)=0
        DO 20 I=1,NN
            K=IDEG(I)
            IF (K.EQ.0) GO TO 20
            MODE(K)=MODE(K)+1
    20 CONTINUE
        MODE=0
        MAX=0
        DO 30 I=1,MM
            K=MODE(I)
            IF (K.LE.MAX) GO TO 30
            MAX=K
    30 CONTINUE
    RETURN
END
FUNCTION COMPNT (IG,IC,IDEG,IW,ICC)
    DIMENSION IG(1),IC(1),IDEG(1),IW(1),ICC(1)
    COMMON /S/ NN,MM,IH,IB
    COMMON /TPOLGY/ I1,JJ(3),NEXT
    DO 100 I=1,NN
        ICC(I)=0
        IC(I)=0
    100 CONTINUE
        NC=0
        ICC(1)=1
    105 DO 110 I=1,NN
        IF (IC(I).EQ.0) GO TO 120
        COMPNT=NC
    110 CONTINUE

```

```

RETURN
120 NC=NC+1
KI=0
KO=1
IW(1)=I
IC(1)=NC
IF(NC.LE.0) GO TO 130
IS=ICC(NC)+1
ICC(NC+1)=IS
130 KI=KI+1
II=I*(KI)
N=IDEG(II)
IF(N.EQ.0) GO TO 105
NEXT=II
140 CALL UNPK (IG(NEXT))
DO 15 J=1,3
IA=JJ(J)
IF(IA.EQ.0) GO TO 200
IF(IC(IA).NE.0) GO TO 180
IC(IA)=NC
KO=KO+1
IW(KO)=IA
IS=ICC(NC+1)+1
ICC(NC+1)=IS
160 CONTINUE
GO TO 140
200 IF(KO.LE.KI) GO TO 105
GO TO 130
END
FUNCTION MAXDGR(NC,IC,IDEG)
DIMENSION IC(1),IDEG(1)
COMMON /S/ NN,MM,IH,1H
M=0
IF(NC.NE.0) GO TO 40
DO 30 I=1,NN
IF(IDEG(I).LE.M) GO TO 30
M=IDEG(I)
30 CONTINUE
GO TO 100
40 DO 50 I=1,NN
IF(IC(I).NE.NC) GO TO 50
IF(IDEG(I).LE.M) GO TO 50
M=IDEG(I)
50 CONTINUE
100 MAXDGR=M
RETURN
END
FUNCTION MAXND(NC,IG,IC,IDEG,NEW,ILD)
DIMENSION IG(1),IC(1),IDEG(1),NEW(1),ILD(1)
COMMON /S/ NN,MM,IH,1H
COMMON /TPOLGY/ II,JJ(3),NEXT
IH=0
M=0
DO 100 I=1,NN
MX=0
IA=NEW(I)
IF(NC.EQ.0) GO TO 50
IF(IA.EQ.0) GO TO 100
IF(NC.NE.IC(IA)) GO TO 100
50 N=IDEG(IA)
IF(N.LE.0) GO TO 100
NEXT=IA
60 CALL UNPK (IG(NEXT))
DO 80 J=1,3
II=JJ(J)
IF(II.EQ.0) GO TO 90
IB=MAX0(N-1-ILD(II))
IF(IB.GT.MX) MX=IB
80 CONTINUE
GO TO 40
90 IF(MX.GT.M) M=MX
IH=IH+MX

```

```

100 CONTINUE
    MAXDEG=M
    RETURN
    END
    FUNCTION MINDEG(NC,IC,IDEG)
    DIMENSION IC(1),IDEG(1)
    COMMON /S/ NN,MM,IR,IR
    M=10000
    IF(NC.NE.0) GO TO 40
    DO 30 I=1,NN
    IF(M.LE.IDEG(I)) GO TO 30
    M=IDEG(I)
30 CONTINUE
    GO TO 100
40 DO 60 I=1,NN
    IF(IC(I).NE.NC) GO TO 60
    IF(M.LE.IDEG(I)) GO TO 60
    M=IDEG(I)
60 CONTINUE
100 MINDEG=M
    RETURN
    END
    SUBROUTINE DIAM(NC,MAXDEG,NL,NODESL,MAXLEV,
    * IG,IC,IDEG,IDIS,IW,ICC)
    DIMENSION IG(1),IDIS(1),IW(1),ICC(1),IC(1),IDEG(1)
    DIMENSION NODESL(1)
    COMMON /S/ NN,MM,IR,IR
    NL=0
    MAXLEV=1000
    DO 100 I=1,NN
    IF(NC.NE.IC(I)) GO TO 100
    IF(MAXDEG.LT.IDEG(I)) GO TO 100
105 MD=IDIST(1,ML,MAXLEV,IG,IC,IDEG,IDIS,IW,ICC)
    IF(MD.LE.0) GO TO 115
56 IF(ML-MAXLEV)58,64,100
58 MAXLEV=ML
    NL=1
    NODESL(1)=1
    GO TO 100
64 IF(NL.GE.100) GO TO 100
    NL=NL*1
    NODESL(NL)=1
100 CONTINUE
    GO TO 110
115 ML=1
    NODESL(1)=1
    MAXLEV=0
110 RETURN
    END
    FUNCTION IDIST(NS,ML,MAXLEV,IG,IC,IDEG,IDIS,IW,ICC)
    DIMENSION IG(1),IC(1),IDEG(1),IDIS(1),IW(1),ICC(1)
    COMMON /S/ NN,MM,IR,IR
    COMMON /T/OLGY/ I1,JI(3),NEXT
    ICN=IC(NS)
    NAC=ICC(ICN,1)-ICC(ICN)
    DO 50 I=1,NN
    IF(IC(I).NE.IC(NS)) GO TO 50
    IDIS(I)=0
50 CONTINUE
    LL=1
    L=0
    KI=0
    KO=1
    ML=0
    I*(1)=NS
    IDIS(NS)=-1
130 KI=KI+1
    IF(KI.NE.LL) GO TO 135
132 LL=L+1
    LL=KO+1
    K=KO+KI+1
    IF(K.LE.ML) GO TO 135

```

```

133 ML=K
    IF (ML.GT.MAXLEV) GO TO 220
135 II=I*(KI)
    N=IDEG(II)
    IF (N.EQ.0) GO TO 215
    NEXT=II
140 CALL UNPK (IG(NEXT))
    DO 190 I=1,3
        IA=J(I)
        IF (IA.EQ.0) GO TO 200
        IF (IDIS(IA).NE.0) GO TO 190
        IDIS(IA)=L
        KO=KO+1
        I*(KO)=IA
    CONTINUE
190 GO TO 140
200 IF (KO.LI.NNC) GO TO 130
205 IDIST=L
    IDIS(NS)=0
    K=KO-KI
    IF (K.GT.ML) ML=K
    GO TO 230
215 L=0
    GO TO 205
220 IDIST=1
230 RETURN

END
SUBROUTINE HELAHL(NS,NODES,IG,IC,IDEG,IDIS,IW,NEW,ICC,ILD)
INTEGER X
DIMENSION IG(1),IC(1),IDEG(1),IDIS(1),IW(1),NEW(1),ICC(1)
DIMENSION ILD(1)
DIMENSION NODES( 1),IAJ(50)
COMMON /S/ AN,MM,1H,1H
COMMON /TPOLGY/ 11,JI(3),NEXT
I=NODES(1)
ICN=IC(I)
NT=ICC(ICN)-1
DO 50 I=1,NN
    IF (IC(I).NE.ICN) GO TO 50
40 IDIS(I)=0
50 CONTINUE
    DO 100 J=1,NS
        JJ=NODES(J)
        IDIS(JJ)=-1
        JT=J*NT
        NEW(JJ)=JJ
100 ILD(JJ)=JT
        KI=NT
        KO=NS*NT
        LL=KO
        L=1
        J=KO
        NAC=ICC(ICN+1)-1
130 KI=KI+1
    IF (KI.NE.LL) GO TO 135
132 L=L+1
    LL=KO+1
135 II=NEW(KI)
    N=IDEG(II)
    IF (N.EQ.0) GO TO 255
    IJ=0
    NEXT=II
140 CALL UNPK(IG(NEXT))
    DO 190 I=1,3
        IA=J(I)
        IF (IA.EQ.0) GO TO 200
        IF (IDIS(IA).NE.0) GO TO 190
150 IJ=IJ+1
        IDIS(IA)=L
        KO=KO+1
        IAJ(IJ)=IA
        IW(IJ)=IDEG(IA)

```



```

41 IF(NOPRINT.AND..NOT.NPL) GO TO 421
DO 414 I = 1,NDIM
414 XX(I) = 0.0
DO 415 I = 1,NL
SIG(I) = 0.0
415 EPS(I) = 0.0
DO 417 L = 1,LINT
E = (1.+S1(J)/STW(1+L))* (1.+S2(J)/STW(2+L))/4.0
IF(NDIM.EQ.3) E = E*(1.+S3(J)/STW(3+L))/2.0
DO 416 I = 1,NDIM
416 XX(I) = XX(I) + E*UDL(I,L)
DO 417 I = 1,NL
SIG(I) = SIG(I) + E*UDL(I,L)
417 EPS(I) = EPS(I) + E*UDL(I,L*LINT)
IF(NOPRINT) GO TO 420
C*** COMPUTE INVARIANTS FOR TWO D PROBLEMS
IF(NDIM.NE.2) GO TO 418
CALL PSTRES(NDIM,SIG,SIG(4),SIG(5),SIG(6))
CALL EPSRES(NDIM,EPS,EPS(4),EPS(5),EPS(6))
418 MCT = MCT + 1
IF(MCT.GT.0) GO TO 419
WRITE(IIP6,2002) U,HEAD,TIME,IPG,(XHED(I),XN,I=1,NDIM),
X (THEU(I),SH,I=1,NL)
WRITE(IIP6,2001) (BLANK,BLANK,I=1,NDIM),(THEU(I),EH,I=1,NL)
IF(NDIM.EQ.2) WRITE(IIP6,2004)
IPG = IPG + 1
MCT = 15
419 WRITE(IIP6,IAH1) N,(XX(I),I=1,NDIM), SIG
WRITE(IIP6,IAH2) UM,MA,EPS
420 IF(NPL) CALL PLDATA(N,NDIM,N,J,THEU,XX,SIG,FORCE)
421 CONTINUE
5 RETURN
C*** FORMAT STATEMENTS
1000 FORMAT(4F10.0,I10)
2000 FORMAT(5X,54HLINEAR ISOTROPIC ELASTIC TWO/THREE DIMENSIONAL ELEMEN
11/5X,3HE =,E15.5,5X,4HNU =,F10.5,5X,SHRHO =,F10.5/5X,4HAA =,F10.5
2,2X51H(1.0 FOR PLANE STRESS, 2.0 FOR PLANE STRAIN AND 3D)/5X)
2001 FORMAT(1X,9(2A6))
2002 FORMAT(A1,12A6,E13.5,17X,4HPAGE,13//5X,16HELEMENT STRESSES//
1 1X,7HELEMENT,9(2A6))
2003 FORMAT(5X,9CH*****FATAL ERROR 12** ATTEMPT TO USE INCOMPATIBLE MODE E
1LEMENT WITH WRONG NUMBER OF CONNECTED NODES)
2004 FORMAT(72X,8H1-VALUES,4X,8H2-VALUES,7X,5HANGLE )
END
SUBROUTINE VSTIF(NDIM,NDF,NEL,NSIDE,ST,FORCE,STW,LINT)
VST 1C
C***** VSTIF REWRITTEN*****7/20/73*****
VST 2C
DIMENSION STW(4,27),ST(1),FORCE(NDF,1),SHP(60)
VST 3C
COMMON/SHAP/ XJAC,SHAPE(4,20),SG(3,3),SK(3,3),X(3,20),LD(120)
VST 4C
EQUIVALENCE(SHP,SHAPE)
VST 5C
N=NEL*NDIM
VST 6C
DO 200 I=1,LINT
VST 7C
SS=STW(1,I)
VST 8C
TT=STW(2,I)
VST 9C
UU=STW(3,I)
VST 10C
WU=STW(4,I)
VST 11C
CALL HRICM2(SS,TT,UU,NDIM,NEL,NSIDE)
VST 12C
DVOL=WU/XJAC
VST 13C
XJAC=XJAC*WU
VST 14C
NS=0
VST 15C
DO 50 J=1,NEL
VST 16C
CC=SHAPE(4,J)*XJAC
VST 17C
DO 50 I=1,NDIM
VST 18C
NS=NS+1
VST 19C
SHP(NS)=SHAPE(I,J)
VST 20C
50 FORCE(I,J)=FORCE(I,J)+CC
VST 21C
NS=0
VST 22C
DO 150 J=1,N
VST 23C
CC=SHP(J)*DVOL
VST 24C
DO 100 I=1,J
VST 25C
ST(I+NS)=ST(I+NS)+CC*SHP(I)
VST 26C
100 NS=NS+J
VST 27C
200 CONTINUE
VST 28C

```

	RETURN	VST 29C
	END	VST 30C
	SUBROUTINE ASSEMB(NDIM,NDF,NEL,NSTF,ST,ESTIF,FORCE,GG,XX,RO)	ASS 1C
C.....	ASSEMB ***** 7/03/73 *****	ASS 2C
	DIMENSION ESTIF(NSTF,NSTF),ST(1),FORCE(1)	ASS 3C
C....	ASSEMBLY OF ELEMENT INTO THE STIFFNESS	ASS 4C
	NU = NEL*NDIM	ASS 5C
	NS = (NU*(NU+1))/2	ASS 6C
	J1 = NDF*(NEL-1)	ASS 7C
	ND1 = NDIM + 1	ASS 8C
	DO 23 J = 1,NEL	ASS 9C
	DO 22 N = 1,NDIM	ASS 10C
	M1 = ND1 - N	ASS 11C
	I1 = J1	ASS 12C
	DO 21 I = J,NEL	ASS 13C
	L = I	ASS 14C
	IF(I.EQ.J) L = N	ASS 15C
	DO 200 M = L,NDIM	ASS 16C
	M1 = ND1 - M	ASS 17C
	CC = ST(NS)	ASS 18C
	ST(NS) = 0.0	ASS 19C
	ESTIF(I1+M1,J1+M1) = ESTIF(I1+M1,J1+M1) + XX*CC	ASS 20C
	CC = GG*CC	ASS 21C
	ESTIF(I1+M1,J1+M1) = ESTIF(I1+M1,J1+M1) + CC	ASS 22C
	IF(M1.NE.N1) GO TO 200	ASS 23C
	DO 190 K = 1,NDIM	ASS 24C
100	ESTIF(I1+K,J1+K) = ESTIF(I1+K,J1+K) + CC	ASS 25C
200	NS = NS - 1	ASS 26C
210	I1 = I1 - NDF	ASS 27C
220	CONTINUE	ASS 28C
230	J1 = J1 - NDF	ASS 29C
	NU = NEL*NUF	ASS 30C
	DO 300 J = 2,NU	ASS 31C
	K = J - 1	ASS 32C
	DO 300 I = 1,K	ASS 33C
	ESTIF(I,J) = ESTIF(I,J) + ESTIF(J,I)	ASS 34C
300	ESTIF(J,I) = ESTIF(I,J)	ASS 35C
	DO 400 I=1,NU	ASS 36C
400	ESTIF(I,I) = ESTIF(I,I)+RO*FORCE(I)	ASS 37C
	RETURN	ASS 38C
	END	ASS 39C
	SUBROUTINE INSHAP(S,SG,SHAPE,NDIM)	INS 1C
	DIMENSION SHAPE(4,1), SG(3,3),S(3)	INS 2C
	DO 101 I = 1,NDIM	INS 3C
	SHAPE(4,I) = 1. - S(I)**2	INS 4C
	DO 101 J = 1,NDIM	INS 5C
101	SHAPE(I,J) = -2.0*SG(J,I)*S(J)	INS 6C
	RETURN	INS 7C
	END	INS 8C
	SUBROUTINE INCOMP(A,H,C,S,F,ME,NE,ISW)	INC 1C
	DIMENSION A(9,ME),B(9,NE),C(ME),S(NE,NE),F(NE)	INC 2C
	GO TO (100,200,100), ISW	INC 3C
C.....	REDUCE ARRAYS	INC 4C
100	DO 100 NE=1,ME	INC 5C
	P = A(NE,N)	INC 6C
	IF(P.EQ.0.0) GO TO 105	INC 7C
	IF(N.EQ.ME) GO TO 103	INC 8C
	NP = N+1	INC 9C
	DO 102 I=NP,ME	INC 10C
	AP = A(I,N)/P	INC 11C
	IF(AP.EQ.0.0) GO TO 103	INC 12C
	C(I) = C(I) - AP*C(N)	INC 13C
	DO 101 J=1,ME	INC 14C
101	A(I,J) = A(I,J) - A(N,J)*Ap	INC 15C
	A(J,I) = A(I,J)	INC 16C
	DO 102 J=1,NE	INC 17C
102	B(I,J) = B(I,J) - B(N,J)*Ap	INC 18C
103	CONTINUE	INC 19C
	IF(ISA.NE.1) GO TO 105	INC 20C
	DO 104 I = 1,NE	INC 21C
	AP = B(N,I)/P	INC 22C
	F(I) = F(I) - AP*C(N)	INC 23C

	DO 104 J = 1,NE	INC 24C
	S(I,J) = S(I,J) - H(N,J)*AP	INC 25C
104	S(J,1) = S(I,J)	INC 26C
105	CONTINUE	INC 27C
	RETURN	INC 28C
C...	RECOVER INCOMPATIBLE DISPLACEMENTS	INC 29C
200	DO 201 I = 1,NE	INC 30C
	DO 201 J = 1,NE	INC 31C
201	C(I) = C(I) - B(I,J)*F(J)	INC 32C
C...	BACKSUBSTITUTE	INC 33C
	N = NE	INC 34C
202	C(N) = C(N)/A(N,N)	INC 35C
	IF(N*LE*1) RETURN	INC 36C
	I = N	INC 37C
	N = N-1	INC 38C
	DO 203 J = 1,NE	INC 39C
203	C(N) = C(N) - A(N,J)*C(J)	INC 40C
	GO TO 202	INC 41C
	END	INC 42C
	SUBROUTINE INSTIF(FSTIF,FORCE,SGO,STUW,LINT,NDF,NDIM,NEL,NSIDE,MM,	INS 1C
	1 C11,C12,C33)	INS 2C
	DIMENSION ESTIF(4,1),FORCE(1),SGO(3,3),STUW(4,1)	INS 3C
	COMMON/SHAP/ XJAC,SHAPE(4*20),SG(3,3),SN(3,3),X(3*20),LD(120)	INS 4C
	ZN = 0.0	INS 5C
	A42 = 0.0	INS 6C
	DO 305 L = 1,LINT	INS 7C
	CALL BRICK2(STUW(1,L),STUW(2,L),STUW(3,L),NDIM,NEL,NSIDE)	INS 8C
	CALL INSHAP(STUW(1,L),SGO,SHAPE(1,NEL*1),NDIM)	INS 9C
	DV = STUW(4,L)/XJAC	INS 10C
	J1 = 1	INS 11C
	NELP = NEL * NDIM	INS 12C
	DO 304 J = 1,NELP	INS 13C
	I1 = 1	INS 14C
	XN = SHAPE(1,J)*DV	INS 15C
	YN = SHAPE(2,J)*DV	INS 16C
	A11 = C11*XN	INS 17C
	A12 = C12*XN	INS 18C
	A21 = C33*YN	INS 19C
	A22 = C33*YN	INS 20C
	A31 = C12*XN	INS 21C
	A32 = C11*XN	INS 22C
	IF(NDIM*EQ*2) GO TO 301	INS 23C
	ZN = SHAPE(3,J)*DV	INS 24C
	A13 = C12*ZN	INS 25C
	A42 = C33*ZN	INS 26C
	A53 = C11*ZN	INS 27C
301	DO 303 I = 1,NDIM	INS 28C
	XN = SHAPE(1,I*NEL)	INS 29C
	YN = SHAPE(2,I*NEL)	INS 30C
	IF(NDIM*EQ*3) ZN = SHAPE(3,I*NEL)	INS 31C
	ESTIF(I1 ,J1) = ESTIF(I1 ,J1) + XN*A11 + YN*A21 + ZN*A42	INS 32C
	ESTIF(I1 ,J1+1) = ESTIF(I1 ,J1+1) + XN*A12 + YN*A22	INS 33C
	ESTIF(I1+1,J1) = ESTIF(I1+1,J1) + XN*A21 + YN*A31	INS 34C
	ESTIF(I1+1,J1+1) = ESTIF(I1+1,J1+1) + XN*A22 + YN*A32 + ZN*A42	INS 35C
	IF(NDIM*EQ*2) GO TO 303	INS 36C
	ESTIF(I1 ,J1+2) = ESTIF(I1 ,J1+2) + XN*A13 + ZN*A22	INS 37C
	ESTIF(I1+1,J1+2) = ESTIF(I1+1,J1+2) + YN*A13 + ZN*A21	INS 38C
	ESTIF(I1+2,J1) = ESTIF(I1+2,J1) + ZN*A31 + XN*A42	INS 39C
	FSTIF(I1+2,J1+1) = ESTIF(I1+2,J1+1) + YN*A42 + ZN*A12	INS 40C
	FSTIF(I1+2,J1+2) = ESTIF(I1+2,J1+2) + YN*A21 + ZN*A53 + XN*A22	INS 41C
303	I1 = I1 + NDF	INS 42C
304	J1 = J1 + NDF	INS 43C
305	CONTINUE	INS 44C
	RETURN	INS 45C
	END	INS 46C
	SUBROUTINE PSTRES(NDIM,SIG,P1,P2,P3)	PST 1C
	DIMENSION SIG(6)	PST 2C
	DATA RT/1.414213562373097,PI/2/2.09439510239321/	PST 3C
C...	STRESSES MUST BE STORED IN ARRAY SIG(6) IN THE ORDER	PST 4C
C	TAU-XX,TAU-XY,TAU-XZ,TAU-YY,TAU-YZ,TAU-ZZ FOR 3-D PROBLEMS	PST 5C
	IF(NDIM*LT*2*OR*NDIM*GT*3) RETURN	PST 6C
	IF(NDIM*EQ*3) GO TO 100	PST 7C

C....	COMPUTE PRINCIPLE STRESSES FOR 2-D PROBLEMS	PST 8C
	TEMP = 22.5/ATAN(1.0)	PST 9C
	X11 = (SIG(1) + SIG(3))/2.	PST 10C
	X12 = (SIG(1) - SIG(3))/2.	PST 11C
	RHO = SQRT(X12*X12 + SIG(2)*SIG(2))	PST 12C
	P1 = X11 + RHO	PST 13C
	P2 = X11 - RHO	PST 14C
	P3 = 45.0	PST 15C
	IF(X12.NE.0.0) P3 = TEMP*ATAN2(SIG(2),X12)	PST 16C
	RETURN	PST 17C
C....	COMPUTE PRINCIPLE STRESSES FOR 3-D PROBLEMS.	PST 18C
100	RHO = 0.	PST 19C
	X11 = (SIG(1) + SIG(4) + SIG(6))/3.0	PST 20C
	X12 = SIG(1)*(SIG(4)*SIG(6)) + SIG(4)*SIG(6) - SIG(2)**2 - SIG(3)**2	PST 21C
	1. -SIG(5)**2	PST 22C
	X13 = SIG(1)*SIG(4)*SIG(6) + 2.*SIG(2)*SIG(3)*SIG(5)	PST 23C
	1. -SIG(1)*SIG(5)**2 - SIG(4)*SIG(3)**2 - SIG(6)*SIG(2)**2	PST 24C
	D12 = 3.*X11*X11 - X12	PST 25C
	TAU0 = 0.	PST 26C
	IF(D12.EQ.0.0) GO TO 200	PST 27C
	TAU0 = SQRT(2.*D12/3.)	PST 28C
	TEMP = (X13 + (D12 - X11*X11)*X11)*RT2/TAU0**3	PST 29C
	RHO = SQRT(ABS(1. - TEMP*TEMP))	PST 30C
	RHO = ATAN2(RHO,TEMP)/3.	PST 31C
C....	COMPUTE AND RETURN PRINCIPAL STRESSES	PST 32C
200	P1 = X11 + TAU0*R12*COS(RHO)	PST 33C
	P2 = X11 + TAU0*R12*COS(RHO + PI/3)	PST 34C
	P3 = X11 + TAU0*R12*COS(RHO + PI/3)	PST 35C
	RETURN	PST 36C
	END	PST 37C