

TECHNICAL LIBRARY

AD

TECHNICAL REPORT ARLCB-TR-80019

VARIATIONAL METHODS OF CONVOLUTION INTEGRAL AND OF LARGE SPRING CONSTANTS - A NUMERICAL COMPARISON

Julian J. Wu

June 1980



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
LARGE CALIBER WEAPON SYSTEMS LABORATORY
BENÉT WEAPONS LABORATORY
WATERVLIET, N. Y. 12189

AMCMS No. 36KA7000204
DA Project No. 156401813GRN
PRON No. 1A0215641A1A

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The use of trade name(s) and/or manufacturer(s) does not constitute an official indorsement or approval.

DISPOSITION

Destroy this report when it is no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ARLCB-TR-80019	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) VARIATIONAL METHODS OF CONVOLUTION INTEGRAL AND OF LARGE SPRING CONSTANTS - A NUMERICAL COMPARISON		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Julian J. Wu		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Benet Weapons Laboratory Watervliet Arsenal, Watervliet, NY 12189 DRDAR-LCB-TL		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS AMCMS No. 36KA7000204 DA Project No. 156401813GRN PRON No. 1A0215641A1A
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Armament Research and Development Command Large Caliber Weapon Systems Laboratory Dover, NJ 07801		12. REPORT DATE June 1980
		13. NUMBER OF PAGES 14
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Presented at the Army Numerical Analysis & Computer Conference, NASA Ames Research Center, Moffett Field, CA, 20-21 February 1980.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Variational Methods Finite Elements Convolution Integrals Initial Value Problems <i>Boundary Value Probls</i>		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Finite element solution formulations have been carried out for a simple initial value problem based on two different variational statements: that of convolutional integral developed by Gurtin and that of large spring constants adapted by this writer for initial value problems. Numerical results indicate that both generate convergent solution to the given initial value problem of a spring-mass system subjected to a harmonic forcing function.		

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

	<u>Page</u>
SUMMARY	1
INTRODUCTION	1
VARIATIONAL FORMULATION OF CONVOLUTIONAL INTEGRALS	2
VARIATIONAL FORMULATION WITH A LARGE "SPRING" CONSTANT	3
PROCESS OF FINITE ELEMENT DISCRETIZATION	3
NUMERICAL RESULTS	11
REFERENCES	13

FIGURES

1. Area of integration for a double integral of convolution: $t*u(t)*\delta u(t)$.	7
2. Area of integration using finite elements.	7

TABLES

1. NUMERICAL COMPARISONS BETWEEN TWO UNCONSTRAINED VARIATIONAL METHODS: $y(t)$; $0 \leq t \leq 10$, 10 elements.	11
2. NUMERICAL COMPARISONS BETWEEN TWO UNCONSTRAINED VARIATIONAL METHODS: $y'(t)$; $0 \leq t \leq 10$, 10 elements.	11
3. NUMERICAL COMPARISONS BETWEEN TWO UNCONSTRAINED VARIATIONAL METHODS: $y(t)$; $0 \leq t \leq 2$, 10 elements.	12
4. NUMERICAL COMPARISONS BETWEEN TWO UNCONSTRAINED VARIATIONAL METHODS: $y'(t)$; $0 \leq t \leq 2$, 10 elements.	12

VARIATIONAL METHODS OF CONVOLUTION INTEGRAL AND OF
LARGE SPRING CONSTANTS - A NUMERICAL COMPARISON

Julian J. Wu
U.S. Army Armament Research and Development Command
Benet Weapons Laboratory, LCWSL
Watervliet, NY 12189

SUMMARY. Finite element solution formulations have been carried out for a simple initial value problem based on two different variational statements: that of convolutional integral developed by Gurtin and that of large spring constants adapted by this writer for initial value problems. Numerical results indicate that both generate convergent solution to the given initial value problem of a spring-mass system subjected to a harmonic forcing function.

1. INTRODUCTION. Through a simple initial value problem, this note demonstrates the use of the finite element discretization in conjunction with two variational formulations and compares the numerical results. The variational principles of convolutional integral for initial problems were developed by Gurtin some sixteen years ago (ref. 1 and 2). Since then these formulations have been applied to obtain solution of transient problems (ref. 3 and 4). However, the time dimension was treated separately from the spatial dimensions in the finite element approximation schemes. The viewpoint adopted in this note is that the separate treatment of spatial and time coordinates is unnecessary. Since the initial value problems are nonself-adjoint, the corresponding variational problems can be formulated with the help of adjoint field variables and thus can be used in Ritz-finite element solutions. One such formulation is used here to compare with the formulation using convolution integral in terms of numerical results for a simple initial value problem.

Let us consider a simple mass-spring system. The differential equation of the displacement $u(t)$, a function of time t is

$$m\ddot{u} + ku = f_0 \cos \omega_f t \quad (1)$$

where m is the mass, k , the spring constant. A dot ($\dot{}$) denotes differentiation with respect to t . The parameters f_0 and ω_f denote magnitude and frequency respectively, of the forcing function. The initial conditions are given as

$$u(0) = u_0, \quad \dot{u}(0) = u_1 \quad (2)$$

We shall further use the equation

$$\omega^2 = \frac{k}{m}, \quad f = \frac{f_0}{m}$$

Thus Eq. (1) has the form

$$\ddot{u} + \omega^2 u = f \cos \omega_f t \quad (3)$$

2. VARIATIONAL FORMULATION OF CONVOLUTIONAL INTEGRALS. The variational principle for the problem defined by Eqs. (3) and (2) is (ref. 2):

$$\delta I(u) = 0 \quad (4a)$$

where

$$I = \frac{1}{2} [u(t) * u(t) + \omega^2 t * u(t) * u(t)] - [u_0 + \frac{f}{\omega_f^2} + u_1 t - \frac{f}{\omega_f^2} \cos \omega_f t] * u(t) \quad (4b)$$

The operator $*$ defines a convolution integral in the following equation

$$u(t) * v(t) = \int_0^t u(t-\tau) v(\tau) d\tau \quad (5)$$

where $u(t)$ and $v(t)$ are two arbitrary functions of t .

To see that the variational problem of Eqs. (4) is indeed equivalent to the original problem defined by Eqs. (3) and (2), one writes, from Eqs. (4):

$$\delta I = [u(t) + \omega^2 t * u(t) - (u_0 + \frac{f}{\omega_f^2} + u_1 t - \frac{f}{\omega_f^2} \cos \omega_f t)] * \delta u(t) = 0$$

for arbitrary $\delta u(t)$. Thus, $\delta I = 0$ leads to Eq. (6)

$$u(t) + \omega^2 t * u(t) - (u_0 + \frac{f}{\omega_f^2} + u_1 t - \frac{f}{\omega_f^2} \cos \omega_f t) = 0 \quad (6)$$

It is clear from Eq. (6) that $u(0) = u_0$.

Differentiate Eq. (6) once, one has

$$\dot{u}(t) + \omega^2 \int_0^t u(\tau) d\tau - u_1 - \frac{f}{\omega_f} \cos \omega_f t = 0 \quad (7)$$

Eq. (7) gives $u(0) = u_1$. Thus both of the initial conditions are satisfied. The differential equation is recovered when Eq. (7) is differentiated once more. Note that in obtaining Eq. (7) the following differentiation formula has been used.

Let

$$F(t) = \int_0^t v(t-\tau)u(\tau)d\tau$$

Then

$$\frac{dF}{dt} = - \int_0^t \frac{\partial v}{\partial \tau} (t-\tau)u(\tau)d\tau + v(0)u(t)$$

3. VARIATIONAL FORMULATION WITH A LARGE "SPRING" CONSTANT. Consider the following variational problem

$$\delta I(u,v) = 0 \quad (8a)$$

with

$$I(u,v) = - \int_0^1 \dot{u}\dot{v} dt + \int_0^1 (\omega^2 u - f)v dt + \alpha[u(0) - u_0]v(1) - u_1 v(0)$$

In Eqs. (8), $u(t)$ is the physical field variable and $v(t)$ is the adjoint variable. This variational problem is unconstrained since the trial functions of neither $u(t)$ nor $v(t)$ are subject to any end condition requirements. To see that the set of Eqs. (8) is equivalent to the original initial value problem, it is only necessary to carry out the first variation and perform once integration-by-part. Thus, one has

$$\begin{aligned} \delta I(u,v) &= 0 \\ &= \int_0^1 (\ddot{u} + \omega^2 u - f)\delta v dt \\ &\quad + \{\alpha[u(0) - u_0] - \dot{u}(1)\}\delta v(1) + [\dot{u}(0) - u_1]\delta v(0) \\ &\quad + \int_0^1 (\ddot{v} + \omega^2 v)\delta u dt \\ &\quad + \{\alpha v(1) + \dot{v}(0)\}\delta u(0) - \dot{v}(1)\delta u(1) \end{aligned} \quad (9)$$

It is clear then if one chooses $v(t) = 0$ and let $\delta(t)$ be completely arbitrary, Eqs. (9) reduce to the original initial value problem as α approach to infinity.

4. PROCESS OF FINITE ELEMENT DISCRETIZATION. In case of convolutional integral, the variational equation used is Eq. (6) in Section 2. Rewrite Eq. (6) as

$$\delta I = [u(t) + \omega^2 t * u(t) - F(t)] * \delta u(t) = 0 \quad (10a)$$

where

$$F(t) = u_0 + \frac{f}{\omega_f^2} + u_1 t - \frac{f}{\omega_f^2} \cos \omega_f t \quad (10b)$$

In Eq. (10a), there are three convolution integrals to be evaluated:

(a) $u(t)*\delta u(t)$; (b) $\omega^2 t*u(t)*\delta u(t)$; and (c) $F(t)*\delta u(t)$.

(a) For $u(t)*\delta u(t)$:

$$u(t)*\delta u(t) = \int_0^t u(t-\tau) du(\tau) d\tau$$

Let

$$\bar{\tau} = \tau/t$$

one has then

$$u(t)*\delta u(t) = t \int_0^1 \bar{u}(1-\bar{\tau}) \delta \bar{u}(\bar{\tau}) d\bar{\tau}$$

Consider

$$I = \int_0^1 \bar{u}(1-\bar{\tau}) \delta \bar{u}(\bar{\tau}) d\bar{\tau}$$

This integral is evaluated by finite element discretization.

$$I = \sum_{i=1}^L \int_{\ell_{i-1}}^{\ell_i} \bar{u}(1-\bar{\tau}) \delta \bar{u}(\bar{\tau}) d\bar{\tau}$$

Let

$$\ell_0 = 0, \quad \ell_L = 1, \quad \ell_i = \frac{i}{L}$$

$$\xi = \xi^{(i)} = L \bar{\tau} - i + 1$$

$$\bar{\tau} = \frac{1}{L} [\xi + i - 1]$$

$$d\bar{\tau} = \frac{1}{L} d\xi$$

Hence

$$\bar{u}(\bar{\tau}) = \bar{u}\left[\frac{1}{L} (\xi + i - 1)\right] = \bar{u}^{(i)}(\xi)$$

$$\bar{u}(1-\bar{\tau}) = \bar{u}\left[\frac{1}{L} (L - \xi - i + 1)\right]$$

$$= \bar{u}\left[\frac{1}{L} (1 - \xi + L - i + 1)\right] = \bar{u}^{(L-i+1)}(1-\xi)$$

Thus

$$I = \sum_{i=1}^L \frac{1}{L} \int_0^1 \bar{u}^{(L-i+1)}(1-\xi) \delta \bar{u}^{(i)}(\xi) d\xi$$

Use the matrix representations for the shape function and generalized coordinates. One writes

$$\bar{u}^{(i)}(\xi) = \tilde{a}^T(\xi) \tilde{U}^{(i)}$$

and

$$\bar{u}^{(L-i+1)}(1-\xi) = \tilde{a}^T(1-\xi) \tilde{U}^{(L-i+1)}$$

Thus

$$I = \sum_{i=1}^L \frac{1}{L} \delta \tilde{U}^{(i)} \int_0^1 \tilde{a}(\xi) \tilde{a}^T(1-\xi) d\xi \tilde{U}^{(L-i+1)}$$

Or

$$I = \frac{1}{L} \sum_{i=1}^L \delta \tilde{U}^{(i)T} \tilde{A} \tilde{U}^{(L-i+1)}$$

where

$$\tilde{A} = \int_0^1 \tilde{a}(\xi) \tilde{a}^T(1-\xi) d\xi \quad (11a)$$

Hence

$$\tilde{u}(t) * \delta \tilde{u}(t) = tI = \frac{t}{L} \sum_{i=1}^L \tilde{U}^{(i)T} \tilde{A} \tilde{U}^{(L-i+1)} \quad (11b)$$

(b) For $\omega^2 t * u(t) * \delta u(t)$:

The evaluation of this double convolution integral is somewhat more complicated. First consider

$$t * u(t) = \int_0^t (t-\tau) u(\tau) d\tau$$

Then

$$\begin{aligned} I &= [t * u(t)] * \delta u(t) \\ &= \int_0^t \left\{ \int_0^{t-\lambda} (t-\lambda-\tau) u(\tau) d\tau \right\} \delta u(\lambda) d\lambda \\ &= \int_0^t \int_0^{t-\lambda} (t-\lambda-\tau) u(\tau) \delta u(\lambda) d\tau d\lambda \end{aligned}$$

Again let

$$\bar{\tau} = \frac{\tau}{t}, \quad \bar{\lambda} = \frac{\lambda}{t}$$

Thus $u(\tau)$ becomes $\bar{u}(\bar{\tau})$, $\delta u(\lambda)$ to $\delta \bar{u}(\bar{\lambda})$, etc. One has

$$I = t^3 \int_0^1 \int_0^{1-\bar{\lambda}} (1-\bar{\lambda}-\bar{\tau}) \bar{u}(\bar{\tau}) \delta \bar{u}(\bar{\lambda}) d\bar{\tau} d\bar{\lambda} \quad (12)$$

It should be pointed out that the change of variables from τ, λ to $\bar{\tau}, \bar{\lambda}$ (so that the limit of integration is changed from t to unit) is carried out after writing down explicitly the double convolutional integral and not before. This is due to the fact that the definition of a convolution integral requires that t appears explicitly in the integrals. To evaluate I of Eq. (12) we write

$$I = t^3 \bar{I}$$

and work on $\bar{I}$ instead.

$$\bar{I} = \int_0^1 \int_0^{1-\bar{\lambda}} (1-\bar{\lambda}-\bar{\tau}) \bar{u}(\bar{\tau}) \delta \bar{u}(\bar{\lambda}) d\bar{\tau} d\bar{\lambda}$$

The area of integration in $(\bar{\lambda}, \bar{\tau})$ plane is the triangle bounded by lines $\bar{\lambda} = 0$, $\bar{\tau} = 0$ and $\bar{\tau} = 1 - \bar{\lambda}$ (shown in shaded area in Figure 1). Using the step function

$$H(1-\bar{\lambda}-\bar{\tau}) = \begin{cases} 1, & \bar{\tau} < 1 - \bar{\lambda} \\ 0, & \bar{\tau} > 1 - \bar{\lambda} \end{cases}$$

one can write

$$\bar{I} = \int_0^1 \int_0^1 H(1-\bar{\lambda}-\bar{\tau}) (1-\bar{\lambda}-\bar{\tau}) \bar{u}(\bar{\tau}) \delta \bar{u}(\bar{\lambda}) d\bar{\tau} d\bar{\lambda} \quad (13)$$

Equation (13) will be used for finite element discretization. We shall divide the unit square in $(\bar{\lambda}, \bar{\tau})$ plane into smaller squares of $L \times L$ (Figure 2). Let

$$\begin{aligned} \xi &= \xi^{(1)} = L\bar{\lambda} - i + 1 \\ \eta &= \eta^{(1)} = L\bar{\tau} - j + 1 \end{aligned} \quad (14)$$

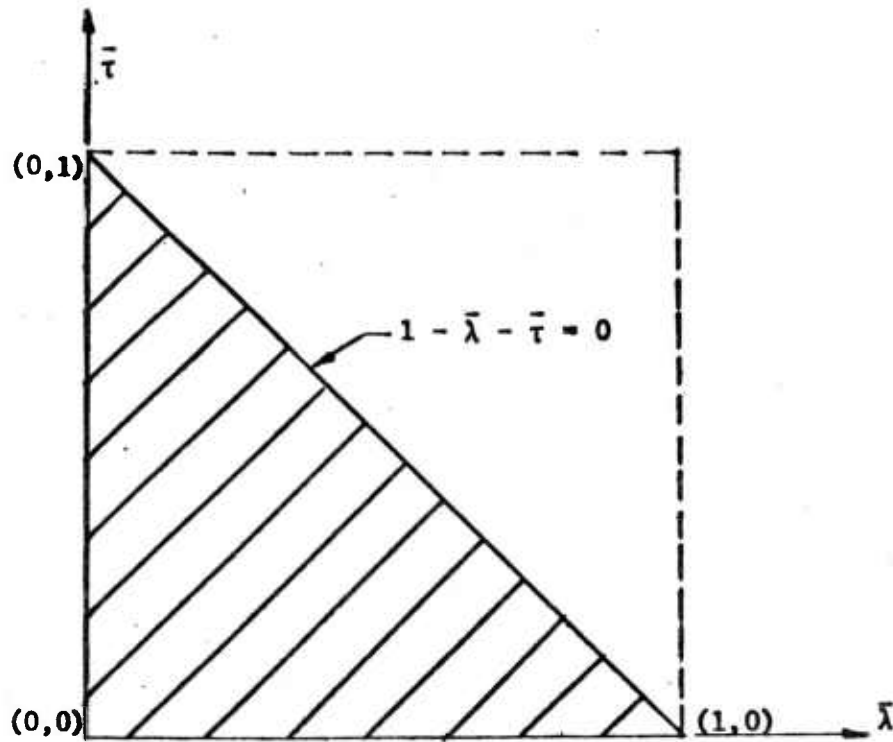


Figure 1. Area of integration for a double integral of convolution: $t * u(t) * \delta u(t)$.

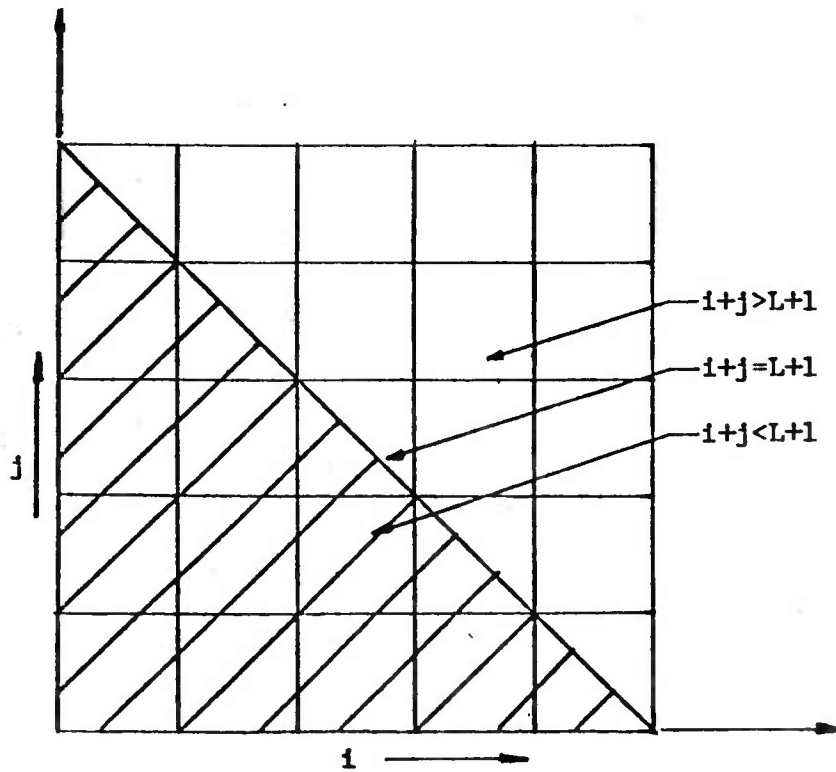


Figure 2. Area of integration using finite elements.

Thus

$$\begin{aligned}\delta \bar{y}(\bar{\lambda}) &\rightarrow \delta \bar{y}^{(1)}(\xi) \\ \bar{y}(\bar{\tau}) &\rightarrow \bar{y}^{(j)}(\eta) \\ 1 - \bar{\lambda} - \bar{\tau} &= \frac{1}{L} \{L + 1 - i - j + (1 - \xi - \eta)\}\end{aligned}$$

and

$$\begin{aligned}\bar{I} &= \frac{1}{L^3} \sum_{i=1}^L \sum_{j=1}^L \int_0^1 \int_0^1 H^{(ij)}(L+1-i-j+1-\xi-\eta) \cdot \\ &\cdot (L+1-i-j+1-\xi-\eta) \bar{y}^{(j)}(\eta) \delta y^{(1)}(\xi) d\eta d\xi\end{aligned}\quad (15)$$

Or,

$$\bar{I} = \sum_{i=1}^L \sum_{j=1}^L I_{ij} / L^3 \quad (16)$$

with

$$\begin{aligned}I_{ij} &= \int_0^1 \int_0^1 H^{(ij)}(L+1-i-j+1-\xi-\eta) \cdot \\ &\cdot (L+1-i-j+1-\xi-\eta) \bar{y}^{(j)}(\eta) \delta y^{(1)}(\xi) d\xi d\eta\end{aligned}\quad (17)$$

since $1 - \bar{\lambda} - \bar{\tau} = 0$, $L + 1 - i - j + (1 - \xi - \eta) = 0$.

Or,

$$1 - \xi - \eta = i + j - (L+1)$$

Thus, three cases to consider for $H^{(ij)}$

$$\begin{aligned}(i) \quad H^{(ij)} &= 1 \quad , \quad i + j < L + 1 \\ (ii) \quad H^{(ij)} &= 0 \quad , \quad i + j > L + 1 \\ (iii) \quad H^{(ij)} &= H(1 - \xi - \eta) \quad , \quad i + j = L + 1\end{aligned}\quad (18)$$

For case (i), one has

$$\begin{aligned}\bar{I}_{ij} &= \int_0^1 \int_0^1 (L+2-i-j) \bar{y}^{(j)}(\eta) \delta \bar{y}^{(1)}(\xi) d\eta d\xi \\ &= \delta \tilde{Y}^{(i)T} \int_0^1 \int_0^1 (L+2-i-j-\xi-\eta) \tilde{a}(\xi) \tilde{a}^T(\eta) d\eta d\xi \tilde{Y}^{(j)} \\ &= \delta \tilde{Y}^{(i)} \tilde{A}^{(ij)} \tilde{Y}^{(j)}\end{aligned}$$

$$\bar{A}^{(ij)} = \int_0^1 \int_0^1 (L+2-i-j-\xi-\eta) \underline{a}(\xi) \underline{a}^T(\eta) d\eta d\xi$$

For case (ii),

$$I_{ij} = 0$$

For case (iii),

$$I_{ij} = \int_0^1 \int_0^1 H(1-\xi-\eta) (1-\xi-\eta) \bar{y}^{(j)}(\eta) \delta \bar{y}^{(i)}(\xi) d\eta d\xi$$

$$= \int_0^1 \int_0^{1-\xi} (1-\xi-\eta) \bar{y}^{(j)}(\eta) \delta \bar{y}^{(i)}(\xi) d\eta d\xi$$

$$= \delta \underline{Y}^{(i)T} \int_0^1 \underline{a}(\xi) \int_0^{1-\xi} (1-\xi-\eta) \underline{a}^T(\eta) d\eta d\xi \underline{Y}^{(j)}$$

$$= \delta \underline{Y}^{(i)T} \bar{A} \underline{Y}^{(j)}$$

$$\bar{A} = \int_0^1 \underline{a}(\xi) \int_0^{1-\xi} (1-\xi-\eta) \underline{a}^T(\eta) d\eta d\xi$$

Consequently,

$$I = t^3 \bar{I}_1 = \frac{t^3}{L^3} \sum_{i=1}^L \sum_{j=1}^L I_{ij} \quad (19)$$

$$i+j < L+1 \rightarrow I_{ij} = \delta \underline{Y}^{(i)} \bar{A}^{(ij)} \underline{Y}^{(j)}$$

$$i+j > L+1 \rightarrow I_{ij} = 0 \quad (20)$$

$$i+j = L+1 \rightarrow I_{ij} = \delta \underline{Y}^{(i)} \bar{A} \underline{Y}^{(j)}$$

$$\bar{A}^{(ij)} = \int_0^1 \int_0^1 (L+2-i-j-\xi-\eta) \underline{a}(\xi) \underline{a}^T(\eta) d\xi d\eta$$

$$\bar{A} = \int_0^1 \underline{a}(\xi) \int_0^{1-\xi} (1-\xi-\eta) \underline{a}^T(\eta) d\eta d\xi \quad (21)$$

And thus

$$\omega^2 t * u(t) * \delta u(t) = \omega^2 t^3 \bar{I} = \frac{\omega^2 t^3}{L^3} \sum_{i=1}^L \sum_{j=1}^L I_{ij} \quad (22)$$

(c) For $F(t) * \delta u(t)$ with $F(t)$ given in Eq. (10b), one has

$$\begin{aligned} F(t) * \delta u(t) &= (a + bt + c \cos \omega_f t) * \delta u(t) \\ &= a[1 * \delta u(t)] + b[t * \delta u(t)] + c[\cos \omega_f t * \delta u(t)] \end{aligned} \quad (23)$$

where, from Eq. (10b):

$$a = u_0 + \frac{f}{\omega_f^2}, \quad b = u_1, \quad c = -\frac{f}{\omega_f^2} \quad (24)$$

Now, for Eq. (23), one has

$$1 * \delta u(t) = \frac{t}{L} \sum_{i=1}^L \delta U^{(i)T} \int_0^1 \underline{a}(\xi) d\xi \quad (25)$$

$$t * \delta u(t) = \frac{t^2}{L^2} \sum_{i=1}^L \delta U^{(i)T} \left\{ (L-i+1) \int_0^1 \underline{a}(\xi) d\xi - \int_0^1 \xi \underline{a}(\xi) d\xi \right\} \quad (26)$$

and

$$\cos \omega_f t * \delta u(t) = \frac{t}{L} \sum_{i=1}^L \delta U^{(i)T} \int_0^1 \underline{a}(\xi) \cos \left[\frac{\omega_f t}{L} (L-i+1-\xi) \right] d\xi \quad (27)$$

Now, Eqs. (11b), (22), (23) through (27), a global matrix equation can be written as

$$\delta \underline{U}^T \underline{K} \underline{U} = \delta \underline{U}^T \underline{F} \quad (28)$$

Or

$$\underline{K} \underline{U} = \underline{F} \quad (29)$$

which is then solved.

The finite element discretization procedure for the variational formulation using a large spring constant has been described elsewhere (see, for example, ref. 5) and will not be repeated here.

5. NUMERICAL RESULTS. Numerical values of the parameters in the given example as stated in Section 1 are as the following:

$$m = 1.0, k = 1.0, f_0 = 1.0, \omega_f = 0.5$$

$$y_0 = 1.0, y_1 = 1.0$$

Computational results are presented in Tables 1 through 4. Table 1 and 2 compare results of the two methods in an interval of $0 \leq t \leq 10$, which is about the time for a complete forcing cycle. The results for $y(t)$ and $\dot{y}(t)$ are excellent for both methods. As the interval becomes shorter, $0 \leq t \leq 2$ as shown in Table 3 and 4, the convergence is further improved.

TABLE 1. NUMERICAL COMPARISONS BETWEEN TWO UNCONSTRAINED VARIATIONAL METHODS

$0 \leq t \leq 10.0$		10 Elements	
$y(t)$ t	Convo Integ. M	Spring Const. M	Exact Solution
0	0.999	1.000	1.000
2.0	1.769	1.770	1.768
4.0	-1.094	-1.094	-1.094
6.0	-1.920	-1.920	-1.919
8.0	0.167	0.167	0.167
10.0	0.113	0.114	0.114

TABLE 2. NUMERICAL COMPARISONS BETWEEN TWO UNCONSTRAINED VARIATIONAL METHODS

$0 \leq t \leq 1.0$		10 Elements	
$y'(t)$ t	Convo Integ. M	Spring Const. M	Exact Solution
0	1.011	1.004	1.000
2.0	-0.675	-0.675	-0.674
4.0	-1.520	-1.518	-1.512
6.0	0.780	0.778	0.773
8.0	0.691	0.690	0.689
10.0	-0.391	-0.385	-0.381

TABLE 3. NUMERICAL COMPARISONS BETWEEN TWO
UNCONSTRAINED VARIATIONAL METHODS

$0 \leq t \leq 2.0$		10 Elements	
$y(t)$ t	Convo Integ. M	Spring Const. M	Exact Solution
0	1.000000	1.000000	1.000000
0.4	1.389154	1.389154	1.389153
0.8	1.713203	1.713203	1.713203
1.2	1.911703	1.911702	1.911701
1.6	1.938251	1.938251	1.938249
2.0	1.768413	1.768416	1.768416

TABLE 4. NUMERICAL COMPARISONS BETWEEN TWO
UNCONSTRAINED VARIATIONAL METHODS

$0 \leq t \leq 2.0$		10 Elements	
$y'(t)$ t	Convo Integ. M	Spring Const. M	Exact Solution
0	0.999999	1.000000	1.000000
0.4	0.91844	0.91843	0.91842
0.8	0.67623	0.67622	0.67621
1.2	0.29662	0.29662	0.29661
1.6	-0.17425	-0.71424	-0.17425
2.0	-0.67425	-0.67413	-0.67403

In conclusion, we have observed that the numerical convergence of the method of large spring constants, in the simple example given, is at least as good as that of the formulation through the variational principle of convolutional integrals. Both are easily adapted for finite element discretization. Due to the fact that the variational principles of convolutional integrals can be formulated only for a very restricted class of problems (of constant coefficients, for example). The alternate approach of large spring constants appears to be quite attractive to obtain solutions of non-self-adjoint problems in general and of initial value problems and initial boundary value problems in particular.

REFERENCES

1. M. E. Gurtin, "Variational Principles for Linear Elastodynamics," Archive for Rational Mechanics and Analysis, 16 (1), p. 34, 1964.
2. M. E. Gurtin, "Variational Principles for Linear Initial-Value Problems," Quarterly of Applied Mathematics, 22 (3), p. 352, 1964.
3. R. E. Nickell and J. L. Sackman, "The Extended Ritz Method Applied to Transient Coupled Thermoelastic Boundary Value Problems," SEL Report 67-3, University of California, Berkeley, CA, 1967.
4. J. Ghahoussi and E. L. Wilson, "Variational Formulation of Dynamics of Fluid-Saturated Porous Elastic Solids," Journal of Engineering Mechanics Division, Proceedings of the American Society of Civil Engineers, EM4, p. 947, 1972.
5. J. J. Wu, "Solutions to Initial Value Problems by Use of Finite Element-Unconstrained Variational Formulations," Journal of Sound and Vibration, Vol. 53, 1977, p. 341-356.

TECHNICAL REPORT INTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>
COMMANDER	1
CHIEF, DEVELOPMENT ENGINEERING BRANCH	1
ATTN: DRDAR-ICB-DA	1
-DM	1
-DP	1
-DR	1
-DS	1
-DC	1
CHIEF, ENGINEERING SUPPORT BRANCH	1
ATTN: DRDAR-ICB-SE	1
-SA	1
CHIEF, RESEARCH BRANCH	2
ATTN: DRDAR-ICB-RA	1
-RC	1
-RM	1
-RP	1
CHIEF, LWC MORTAR SYS. OFC.	1
ATTN: DRDAR-ICB-M	1
CHIEF, IMP. 81MM MORTAR OFC.	1
ATTN: DRDAR-ICB-I	1
TECHNICAL LIBRARY	5
ATTN: DRDAR-ICB-TL	
TECHNICAL PUBLICATIONS & EDITING UNIT	2
ATTN: DRDAR-ICB-TL	
DIRECTOR, OPERATIONS DIRECTORATE	1
DIRECTOR, PROCUREMENT DIRECTORATE	1
DIRECTOR, PRODUCE ASSURANCE DIRECTORATE	1

NOTE: PLEASE NOTIFY ASSOC. DIRECTOR, BENET WEAPONS LABORATORY, ATTN:
DRDAR-ICB-TL, OF ANY REQUIRED CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>		<u>NO. OF COPIES</u>
ASST SEC OF THE ARMY RESEARCH & DEVELOPMENT ATTN: DEP FOR SCI & TECH THE PENTAGON WASHINGTON, D.C. 20315	1	COMMANDER US ARMY TANK-AUTMV R&D CMD ATTN: TECH LIB - DRDTA-UL MAT LAB - DRDTA-RK WARREN MICHIGAN 48090	1 1
COMMANDER US ARMY MAT DEV & READ. CMD ATTN: DRUDE 5001 EISENHOWER AVE ALEXANDRIA, VA 22333	1	COMMANDER US MILITARY ACADEMY ATTN: CHMN, MECH ENGR DEPT WEST POINT, NY 10996	1
COMMANDER US ARMY ARRADCOM ATTN: DRDAR-IC -ICA (PLASTICS TECH EVAL CEN) -LCE -LCM -ICS -LCW -TSS(STINFO) DOVER, NJ 07801	1 1 1 1 1 2	COMMANDER REDSTONE ARSENAL ATTN: DRSMI-RB -RRS -RSM ALABAMA 35809 COMMANDER ROCK ISLAND ARSENAL ATTN: SARRI-ENM (MAT SCI DIV) ROCK ISLAND, IL 61202	2 1 1 1
COMMANDER US ARMY ARRCOM ATTN: DRSAR-LEP-L ROCK ISLAND ARSENAL ROCK ISLAND, IL 61299	1	COMMANDER HQ, US ARMY AVN SCH ATTN: OFC OF THE LIBRARIAN FT RUCKER, ALABAMA 36362	1
DIRECTOR US Army Ballistic Research Laboratory ATTN: DRDAR-TSB-S (STINFO) ABERDEEN PROVING GROUND, MD 21005	1	COMMANDER US ARMY FGN SCIENCE & TECH CEN ATTN: DRXST-SD 220 7TH STREET, N.E. CHARLOTTESVILLE, VA 22901	1
COMMANDER US ARMY ELECTRONICS CMD ATTN: TECH LIB FT MONMOUTH, NJ 07703	1	COMMANDER US ARMY MATERIALS & MECHANICS RESEARCH CENTER ATTN: TECH LIB - DRXMR-PL WATERTOWN, MASS 02172	2
COMMANDER US ARMY MOBILITY EQUIP R&D CMD ATTN: TECH LIB FT BELVOIR, VA 22060	1		

NOTE: PLEASE NOTIFY COMMANDER, ARRADCOM, ATTN: BENET WEAPONS LABORATORY, DRDAR-LCB-TL, WATERVLIET ARSENAL, WATERVLIET, N.Y. 12189, OF ANY REQUIRED CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST (CONT)

	NO. OF <u>COPIES</u>		NO. OF <u>COPIES</u>
COMMANDER US ARMY RESEARCH OFFICE P.O. BOX 12211 RESEARCH TRIANGLE PARK, NC 27709	1	COMMANDER DEFENSE TECHNICAL INFO CENTER ATTN: DTIA-TCA CAMERON STATION ALEXANDRIA, VA 22314	12
COMMANDER US ARMY HARRY DIAMOND LAB ATTN: TECH LIB 2800 POWDER MILL ROAD ADELPHIA, MD 20783	1	METALS & CERAMICS INFO CEN BATTELLE COLUMBUS LAB 505 KING AVE COLUMBUS, OHIO 43201	1
DIRECTOR US ARMY INDUSTRIAL BASE ENG ACT ATTN: DRXPE-MT ROCK ISLAND, IL 61201	1	MECHANICAL PROPERTIES DATA CTR BATTELLE COLUMBUS LAB 505 KING AVE COLUMBUS, OHIO 43201	1
CHIEF, MATERIALS BRANCH US ARMY R&S GROUP, EUR BOX 65, FPO N.Y. 09510	1	MATERIEL SYSTEMS ANALYSIS ACTV ATTN: DRXSY-MP ABERDEEN PROVING GROUND MARYLAND 21005	1
COMMANDER NAVAL SURFACE WEAPONS CEN ATTN: CHIEF, MAT SCIENCE DIV DAHLGREN, VA 22448	1		
DIRECTOR US NAVAL RESEARCH LAB ATTN: DIR, MECH DIV CODE 26-27 (DOC LIB) WASHINGTON, D. C. 20375	1 1		
NASA SCIENTIFIC & TECH INFO FAC P. O. BOX 8757, ATTN: ACQ BR BALTIMORE/WASHINGTON INTL AIRPORT MARYLAND 21240	1		

NOTE: PLEASE NOTIFY COMMANDER, ARRADCOM, ATTN: BENET WEAPONS LABORATORY, DRDAR-ICB-TL, WATERVLIET ARSENAL, WATERVLIET, N.Y. 12189, OF ANY REQUIRED CHANGES.