

② LEVEL II

AD A110857

GENERATION OF CORRELATED LOG-NORMAL SEQUENCES FOR THE SIMULATION OF CLUTTER ECHOES

Frederick M. Bomse

DTIC
ELECTE
S FEB 11 1982
B

AD A110857

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited



CENTER FOR NAVAL ANALYSES

82 02 11 089

The ideas expressed in this paper are those of the author.
The paper does not necessarily represent the views of either
the Center for Naval Analyses or the Department of Defense.

PROFESSIONAL PAPER 323 / December 1981

**GENERATION OF
CORRELATED LOG-NORMAL
SEQUENCES FOR THE
SIMULATION OF CLUTTER
ECHOES**

Frederick M. Bomse



Operations Evaluation Group

CENTER FOR NAVAL ANALYSES

2000 North Beauregard Street, Alexandria, Virginia 22311

TABLE OF CONTENTS

	<u>Page</u>
Introduction.....	1
Background	3
Mathematical Techniques.....	5
Log-Normal/Normal Relationships.....	5
Discrete Fourier Transforms.....	7
Generating Correlated Sequences.....	10
Examples of Correlated Sequences.....	15
General.....	15
Autocorrelation, Spectral Density and Resolution.....	15
Example 1, Specified Autocorrelation Function.....	17
Example 2, Log-Normal Sequence With Specified Autocorrelation.....	21
References	29

✓

PER LETTER

SEARCHED	SERIALIZED	INDEXED
FILED	CLASSIFIED	EXTENDED
A		



LIST OF ILLUSTRATIONS

	<u>Page</u>
1 Specified Correlation Function and Spectral Density for Example 1.....	19
2 Sample Autocorrelation Function Compared With Specified Autocorrelation Function for Example 1.....	20
3 Probability Density for Mean 1, Variance 1 Process of Example 1.....	22
4 Specified Correlation Functions and Spectral Density for Example 2.....	24
5 Sample Autocorrelation Functions Compared With Specified Autocorrelation Function for Example 2.....	26
6 Probability Density for Mean 1, Variance 1 Log-Normal Process (Sample A).....	27
7 Probability Density for Mean 2, Variance 2 Log-Normal Process (Sample B).....	28

INTRODUCTION

The investigation of digital signal processing algorithms requires the computer simulation of sensor signals having certain stochastic properties. The construction of such signals by Monte-Carlo methods generally entails the use of computer generated sequences of random numbers. Although most computer library systems have subroutines available for generating random sequences according to a variety of probability amplitude distributions, almost without exception, their elements are uncorrelated. This enables the rapid and economical simulation of combinations of primary and interfering signals (e.g., noise) in which the former is deterministic and the latter, random and uncorrelated. Alternatively both the primary and interfering signals can be represented by uncorrelated random sequences. An example would be a radar echo in which the signal of interest is random due to random fluctuations in the target cross section and the interfering signal is white Gaussian noise.

Between these two extremes is a class of interesting signals which must be represented by random, but correlated sequences. This class poses a problem for computer signal simulations because in general there is no computationally feasible way to construct a sequence of random numbers having both a specified probability amplitude distribution and a specified autocorrelation function. It is not difficult however to

generate a normally distributed sequence with a specified auto-
correlation function.

BACKGROUND

The present investigation arose in connection with an attempt to simulate radar clutter echoes. Such echoes are random and usually correlated over several radar pulses. Among the detector envelope probability amplitude distributions which have been used in radar clutter modeling and analysis are the log-normal and Weibull distributions [1,2].

That clutter echoes can often be described by a log-normal distribution leads to a convenient way of simulating them. Because of the very simple transformation which relates a log-normally distributed random variable to one which is merely normally distributed, it is easy to construct log-normal sequences with specified autocorrelation functions.

This problem has in fact been addressed in the literature [3, 4]. In both of those references, the method involved the direct generation of a normally distributed sequence with a specified covariance matrix followed by an appropriate transformation. This paper adopts a slightly different approach based on a Discrete Fourier Transform of the appropriate spectral density. Since this can be implemented by means of a standard FFT routine it may be faster than the direct method.

The remainder of this paper will not deal in detail with properties of radar clutter per se, but rather with the techniques of generating correlated log-normal sequences by using correlated normal sequences. Further discussion with particular quantitative application to radar clutter modeling will be presented in a forthcoming paper.

In the following sections the relationships between the means, variances and autocorrelation functions of normal and log-normal random variables are given. The generation of correlated normal sequences using the power spectral density is discussed. The relationship between the autocorrelation functions is then invoked to produce appropriately correlated log-normal sequences. Illustrations of the method are presented in the final section. The discussion is limited to sequences which represent wide-sense stationary processes. These are processes whose means are independent of time and whose correlation functions depend only on the time interval between samples.

MATHEMATICAL TECHNIQUES

LOG-NORMAL/NORMAL RELATIONSHIPS

Let $z_1 \equiv z(t)$ and $z_2 \equiv z(t+\tau)$ be mean zero normally distributed random variables from a wide sense stationary process $\{z(t)\}$ with variance σ_z^2 and correlation coefficient $\rho = \rho(\tau)$. The probability density function of z_1, z_2 is

$$p_z(z_1, z_2) = \frac{1}{2\pi\sigma_z^2 \sqrt{1-\rho^2}} \exp - \frac{1}{2(1-\rho^2)\sigma_z^2} \left[z_1^2 - 2\rho z_1 z_2 + z_2^2 \right] \quad (1)$$

The autocorrelation function is

$$\overline{z_1 z_2} = \overline{z(t)z(t+\tau)} = R_z(\tau) = \sigma_z^2 \rho(\tau) \quad (2)$$

in which the over-bar denotes statistical expectation.

Upon setting $\ln y_1 = z_1 + a$ and $\ln y_2 = z_2 + a$ ($a = \text{constant}$) the variables $y_1 \equiv y(t)$ and $y_2 \equiv y(t+\tau)$ are found to be log-normally distributed with joint density function:

$$p_y(y_1, y_2) = \frac{1}{2\pi\sigma_z^2 \sqrt{1-\rho^2} y_1 y_2} \exp - \frac{1}{2(1-\rho^2)\sigma_z^2} \left[(\ln y_1 - a)^2 - 2\rho(\ln y_1 - a)(\ln y_2 - a) + (\ln y_2 - a)^2 \right] \quad (3)$$

By performing suitable integrations it is easy to show that y_1 and y_2 are each separately log-normal. Furthermore, the statistics of the $\{y\}$ process are simply related to those of the $\{z\}$ process as follows:

$$\bar{y}_1 = \bar{y}_2 = \bar{y} = e^{\frac{a+\sigma^2}{2}} \quad (a)$$

$$\bar{y}_1^{-2} = \bar{y}_2^{-2} = \bar{y}^{-2} = e^{-2(a+\sigma^2)} \quad (b)$$

$$\sigma_y^2 = \bar{y}^{-2} - (\bar{y})^{-2} = e^{-2a} \left[e^{2\sigma^2} - e^{\sigma^2} \right] \quad (c)$$

(4)

$$R_y(\tau) = \sigma_y^2 \rho_y(\tau) + (\bar{y})^{-2} = (\bar{y})^{-2} e^{R_z(\tau)} \quad (d)$$

or

$$R_z(\tau) = \frac{\ln R_y(\tau)}{(\bar{y})^{-2}} = \ln \left[1 + \frac{\sigma_y^2}{(\bar{y})^{-2}} \rho_y(\tau) \right] \quad (e)$$

Equations (4, a-e) contain the key to the procedure. The relevant statistics are related by simple exponential or logarithmic transformations. For example, if $\{y\}$ is a log-normal process with

autocorrelation function $R_y(\tau)$, then under the transformation $\ln y \rightarrow z+a$, $\{z\}$ will be a normal process with autocorrelation function $R_z(\tau)$ given by (4e).

DISCRETE FOURIER TRANSFORMS

The primary tool required for the generation of correlated sequences is the finite Discrete Fourier Transform (DFT). The properties of this transform follow logically from those of the infinite interval continuous Fourier Transform. The latter are well known. A few definitions are given here mainly to establish the notation.

Assuming the existence of all integrals, the standard Fourier transform pair $\{x(t), X(\omega)\}$ is

$$x(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} X(\omega) e^{i\omega t} d\omega \quad (a)$$

(5)

$$X(\omega) = \int_{-\infty}^{\infty} x(t) e^{-i\omega t} dt \quad (b)$$

One important property of the pair (5a, 5b) is that for a real time function $x(t)$

$$X(-\omega) = X^*(\omega) \quad (\text{real } x(t)) \quad (6)$$

where the asterisk denotes complex conjugation. If in addition, $x(t)$ is even then $X(\omega)$ is also real and even:

$$X(-\omega) = X(\omega) \quad (\text{real, even } x(t)) \quad (7)$$

Given a wide sense stationary process with autocorrelation function $R(\tau)$, the spectral density $S(\omega)$ is obtained from $R(\tau)$ by a transform like (5b):

$$S(\omega) = \int_{-\infty}^{\infty} (R(\tau)e^{-i\omega\tau}) d\tau \quad (8)$$

and, since $R(\tau)$ is real and even so is $S(\omega)$.

One way of effecting passage to the finite DFT is to approximate (5b) by a discrete sum over an interval $(-T/2, T/2)$. One sets $T = N\Delta t$ and $t = n\Delta t$, $n = -N/2 \dots N/2-1$ and evaluates the resulting summation at the discrete set of frequencies $\omega_k = k\Delta\omega = \frac{2\pi k}{T}$. The result is:

$$X(k\Delta\omega) = \Delta t \sum_{n=-\frac{N}{2}}^{\frac{N}{2}-1} x(n\Delta t) e^{-\frac{i2\pi kn}{N}} \quad (9)$$

Standard practice is to shift the index n so that it runs from 0 to $N-1$. Setting $X(k\Delta\omega)/\Delta t = X_k$ and $x(n\Delta t) = x_n$ in (9) and performing this shift leads to the usual form of the DFT and its inverse:

$$X_k = \sum_{n=0}^{N-1} x_n e^{-\frac{2\pi i k n}{N}} \quad (a)$$

(10)

$$x_n = \frac{1}{N} \sum_{k=0}^{N-1} X_k e^{\frac{2\pi i k n}{N}} \quad (b)$$

Corresponding to (6) and (7) for real, and real and even $x(t)$ are analogous relations for x_n

$$X_k = X_{N-k}^* \quad k = 1, 2, \dots, \frac{N}{2} - 1 \quad (\text{real } x_n) \quad (11)$$

$$X_k = X_{N-k} \quad k = 1, 2, \dots, \frac{N}{2} - 1 \quad (\text{real, even } x_n) \quad (12)$$

Equations (10a) and (10b) together with the condition (12) are used extensively in the following paragraphs.

GENERATING CORRELATED SEQUENCES

To generate a correlated sequence with a specified autocorrelation function, the first step is to compute the corresponding spectral density. For this purpose equation (8) can be used provided the integration can be performed. Otherwise, an approximation using (10a) with $x_n = R_n = R(n\Delta\tau)$ will suffice. In either case, samples $S_k = S(k\Delta\omega)$ of the spectral density will be related to the given autocorrelation function by

$$R_n = \frac{1}{N} \sum_{k=0}^N S_k e^{\frac{2\pi i k n}{N}} \quad (13)$$

which is simply equation (10b) applied to the transform pair $\{R_n, S_k\}$. With these spectral density samples in hand generate two independent sequences of zero mean uncorrelated random variables $\{X_k\}$, $\{Y_k\}$ according to any arbitrary probability amplitude distribution, and form the complex random variable U_k as follows:

$$U_k = X_k \quad k=0, k=\frac{N}{2} \quad (14)$$

$$U_k = X_k + i Y_k \quad k = 1, 2, \dots, N/2-1$$

The X_k and Y_k must be scaled so that for each k

$$\overline{U_k U_k^*} = |U_k|^2 = 1 \quad (15)$$

Using samples of the spectral density S_k obtained from the given autocorrelation function R_n form a new set of complex variables Z_k by scaling the U_k this way:

$$Z_k = \sqrt{S_k} U_k \quad k=0,1,\dots,N/2 \quad (16)$$

For $k = N/2+1, N/2+2, \dots, N-1$ set

$$Z_k = Z_{N-k}^* \quad (17)$$

Now perform an inverse DFT on the Z_k normalized as shown:

$$z_n = \sqrt{N} \left[\frac{1}{N} \sum_{k=0}^{N-1} Z_k e^{\frac{2\pi i k n}{N}} \right] \quad (18)$$

The sequence $\{z_n\}$ resulting from this procedure is real, and furthermore has the prescribed autocorrelation function R_n . That the z_n are real, follows immediately from (11) in light of condition (17).

That R_n (corresponding to S_k) is indeed the autocorrelation function of the z_n can also be easily demonstrated. For the correlation function of this sequence at a lag l say is

$$\begin{aligned} \overline{z_n z_{n+l}} &= \frac{1}{N} \sum_{k,m} \overline{z_k z_m^*} e^{\frac{2\pi knl}{N}} e^{-\frac{2\pi im(n+l)}{N}} \\ &= \frac{1}{N} \sum_{k,m} \overline{z_k z_m^*} e^{\frac{2\pi in(k-m)}{N}} e^{-\frac{2\pi iml}{N}} \end{aligned}$$

But $\overline{z_k z_m^*} = \sqrt{S_k S_m} \overline{U_k U_m^*} = \sqrt{S_k S_m} \delta_{km}$, since the U_k are uncorrelated zero mean random variables. Therefore

$$\overline{z_n z_{n+l}} = \frac{1}{N} \sum_{k,m} \sqrt{S_k S_m} \delta_{km} e^{\frac{2\pi in(k-m)}{N}} e^{-\frac{2\pi iml}{N}}$$

or

$$\overline{z_n z_{n+l}} = \frac{1}{N} \sum_k S_k e^{-\frac{2\pi ikl}{N}} \equiv R_l \quad (19)$$

In other words $\overline{z_n z_{n+l}}$ is identical with the inverse transform of S_k , and this is precisely R_l .

The only remaining question is the probability amplitude distribution of $\{z_n\}$. Recall that $\{X_k\}$ in frequency space which spawned $\{z_n\}$ were zero mean uncorrelated sequences. But their probability distribution was not specified. The z_n however are linear combinations of the X_k and Y_k and hence the Central Limit Theorem implies that for some value N , of the size of the sequence, $\{z_n\}$ will tend toward a normal distribution. The mean of this distribution will be zero and its variance will be given by equation (19) evaluated at zero lag:

$$\sigma_z^2 = \overline{z_n^2} = \frac{1}{N} \sum_{k=0}^{N-1} S_k \quad (20)$$

An example of a sequence $\{z_n\}$ with a given correlation function, constructed from two uniformly distributed sequences $\{X_k\}$ and $\{Y_k\}$ will be given in the next section.

The technique described above for generating correlated sequences together with equation (4) relating the statistics of the log-normal and normal distributions enables the generation of correlated log-normal sequences with little difficulty. The method is summarized below.

- Given a desired log-normal process $\{y(t)\}$ with mean \bar{y} , variance σ_y^2 and autocorrelation function $R_y(\tau)$, use equation (4e) to find the autocorrelation function

$R_z(\tau)$ of the underlying zero-mean normal process $\{z(t)\}$.

- Either by direct integration of equation (8) or use of the discrete transform (10a) compute samples $S_z(k)$ of the power spectral density of the $\{z(t)\}$ process.
- Apply equations (14) - (18) to obtain the sequence $\{z_n\}$. In particular, generate the sequences $\{X_k\}$ and $\{Y_k\}$ as zero mean NORMAL processes. Since a linear combination of normally distributed random variables is always itself normally distributed, this guarantees that the z_n are normally distributed zero-mean random variables.
- Set $y_n = e^{z_n + a}$ for $n = 0, 1, \dots, N-1$. The constant a is determined by \bar{y} and σ_y^2 . According to equations (1) - (4) the y_n will be log-normally distributed with the statistics \bar{y} , σ_y^2 and $R_y(\tau)$. The relationships between the z and y statistics are as expressed in (4).

An example of this procedure is given in the next section.

EXAMPLES OF CORRELATED SEQUENCES

GENERAL

Two examples of the preceding methods are presented in this section. The first one, intended for comparison purposes, illustrates the generation of a random sequence with a specified autocorrelation function but with no attempt to shape the final probability amplitude distribution function. The second illustrates the generation of a log-normal sequence with this same autocorrelation. To make the comparison complete, both the mean and variance of each of the final distributions were set equal to 1.

To obtain reasonable statistical samples an ensemble of 100 sequences was generated for each example. Each of the sequences had 64 elements leading to a total of 6400 samples. The choice of sequence length is related to the specified autocorrelation function and spectral density and to the desired resolution in time and frequency, as explained below.

AUTOCORRELATION, SPECTRAL DENSITY AND RESOLUTION

A Gaussian correlation function was chosen primarily because radar clutter autocorrelation functions are often well approximated by this shape [5]. Specifically the autocorrelation function was:

$$R(\tau) = e^{-2\pi^2 \alpha^2 \tau^2} \quad (21)$$

with corresponding power spectral density $S(\omega)$ whose shape is also Gaussian:

$$S(\omega) = \frac{1}{\alpha\sqrt{2\pi}} e^{-\omega/8\pi^2 \alpha^2} \quad (22)$$

Note that $R(\tau)$ is normalized such that $R(0) = 1$.

A $\Delta\tau$ of 1 was chosen for the correlation function samples so that $\tau_n = n\Delta\tau = n$. The halfwidth of $R(\tau)$ is defined as that value of τ for which $R(\tau)/R(0) = .5$. Clearly, the choice of τ depends upon α . In both examples the value of α was chosen so that the halfwidth occurred at $\tau = 3$. (This is in rough agreement with the number of pulses over which clutter echoes are typically correlated). The resulting value of α is then determined by $\alpha^2 = \ln 2 / 18\pi^2$. The resolution in τ is such that four samples (at $\tau = 0, 1, 2, 3$) fall within the halfwidth.

The halfwidth of $S(\omega)$ also depends on α , and for the value specified above it occurs at $\omega = (2\ln 2)/3$. Now the frequency bin

width $\Delta\omega$ is equal to $2\pi/N\Delta\tau = 2\pi/N$, since $\Delta\tau = 1$. To obtain about the same resolution in ω as in τ one merely sets:

$$\frac{\omega_{1/2}}{\Delta\omega} = \frac{\tau_{1/2}}{\Delta\tau}$$

where $\omega_{1/2}$, $\tau_{1/2}$ are the halfwidths of $S(\omega)$ and $R(\tau)$ and $\Delta\omega$, $\Delta\tau$ the respective bin widths. Substituting $\Delta\tau = 1$, $\Delta\omega = 2\pi/N$ and using the values of $\omega_{1/2}$ and $\tau_{1/2}$ mentioned in the preceding paragraph, a sequence length $N \approx 41$ samples is obtained. Since the Fast Fourier Transform (FFT) algorithm used to compute the DFT operates most efficiently when N is a power of 2, the sequence length for this analysis was chosen to be the next higher power of 2 greater than 41 or $2^5 = 64$.

Approximately 99.7% of the total power is contained within radian frequencies less than or equal to 3 standard deviations of the Gaussian in (22). This equates to an actual frequency $f = \omega/2\pi$ of .187 Hz. Twice this value or .375 Hz would be the corresponding Nyquist frequency. But the actual sampling frequency is 1 Hz so the spectrum is essentially free from aliasing.

EXAMPLE 1, SPECIFIED AUTOCORRELATION FUNCTION

This example illustrates the generation of a mean 1, variance 1 process with a Gaussian shaped correlation coefficient as expressed in

(21). The autocorrelation function differs from this coefficient only by the addition of the square of the mean value of the process. The correlation coefficient is shown in figure 1a. For this example the uncorrelated sequences $\{X_k\}$ and consequently $\{U_k\}$ were generated according to a uniform probability amplitude distribution. Samples of the spectral density given in (22) and shown in figure 1b, were used to weight the U_k . A DFT was performed on the weighted samples to obtain a correlated, mean zero time sequence. Finally, each sample was shifted by one unit to obtain a sequence with mean 1.

The sample autocorrelation function (solid curve) is compared with the desired autocorrelation function (dashed curve) in figure 2. This sample autocorrelation was computed in the following way. For each sequence k of the ensemble an estimate of the correlation function at lag l was made:

$$\hat{R}_k(l) = \frac{1}{N-l} \sum_{i=0}^{N-l} x_i x_{i+l} \quad (23)$$

This estimate is unbiased. The estimates for each sequence were then averaged over the ensemble at each l :

$$\bar{\hat{R}}(l) = \frac{1}{100} \sum_{k=1}^{100} R_k(l) \quad (24)$$

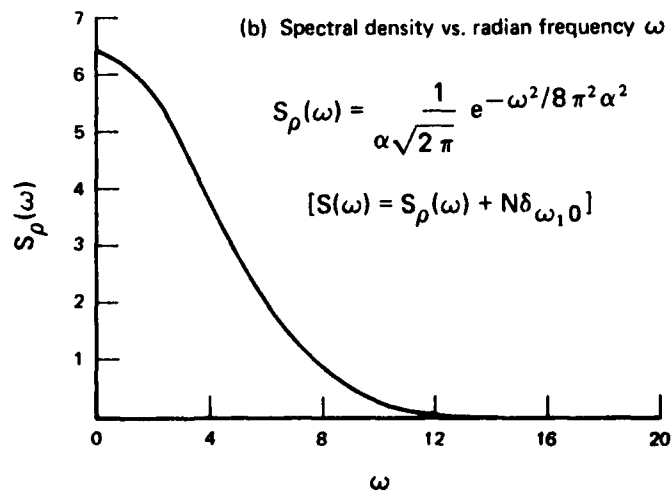
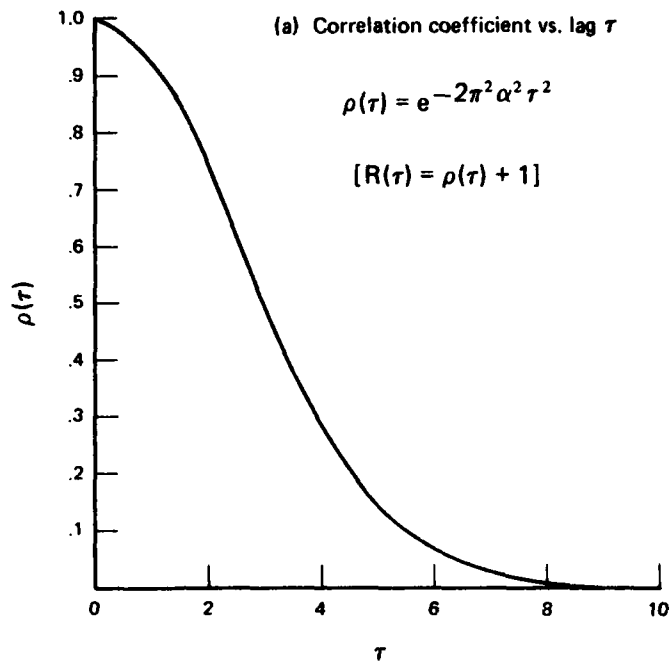


FIG. 1: SPECIFIED CORRELATION FUNCTIONS AND SPECTRAL DENSITY FOR EXAMPLE 1

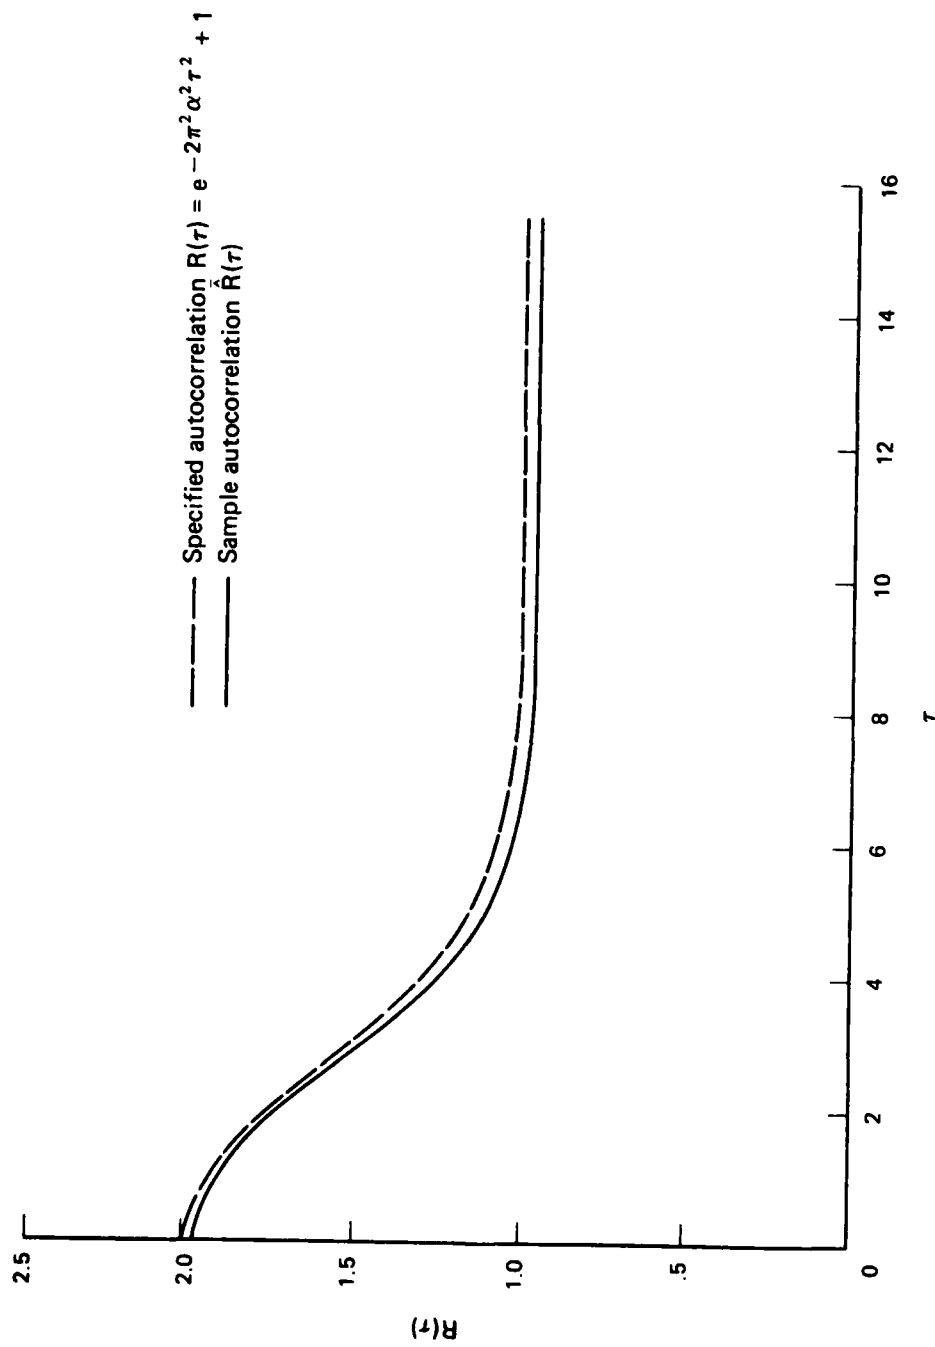


FIG. 2: SAMPLE AUTOCORRELATION FUNCTION COMPARED WITH SPECIFIED AUTOCORRELATION FUNCTION FOR EXAMPLE 1

The maximum absolute difference between these curves is about .05 or 5%.

The probability density function is shown in figure 3. The histogram is a frequency plot of the random samples and the solid curve is a theoretical normal density function with mean and standard deviation equal to 1. This theoretical curve is normalized to the area of the histogram. The left hand ordinate scale is calibrated in numbers of samples. The right scale gives $p(y)\Delta y$, the theoretical probability of finding a sample value between y and $y+\Delta y$. Here, Δy is the bin width of the histogram. Although the frequency samples were uniformly distributed, the samples in figure 3 were obtained by linear combinations of them (the DFT) and hence by the Central Limit Theorem would be expected to tend to normality. For sequences of length 64, the figure indicates that agreement with the normal distribution is excellent. However, as clutter samples these would fail in some respects. Although they are appropriately correlated as shown in figure 2, the probability density is not characteristic of clutter echoes. Not only do 16 percent of the samples have negative values, but the long positive tail often seen in clutter distributions is not present.

EXAMPLE 2, LOG-NORMAL SEQUENCE WITH SPECIFIED AUTOCORRELATION

This example illustrates the generation of a mean 1, variance 1 log-normal process with the same Gaussian shaped correlation coefficient $\rho_y(\tau)$ as used for example 1. In this case however, the

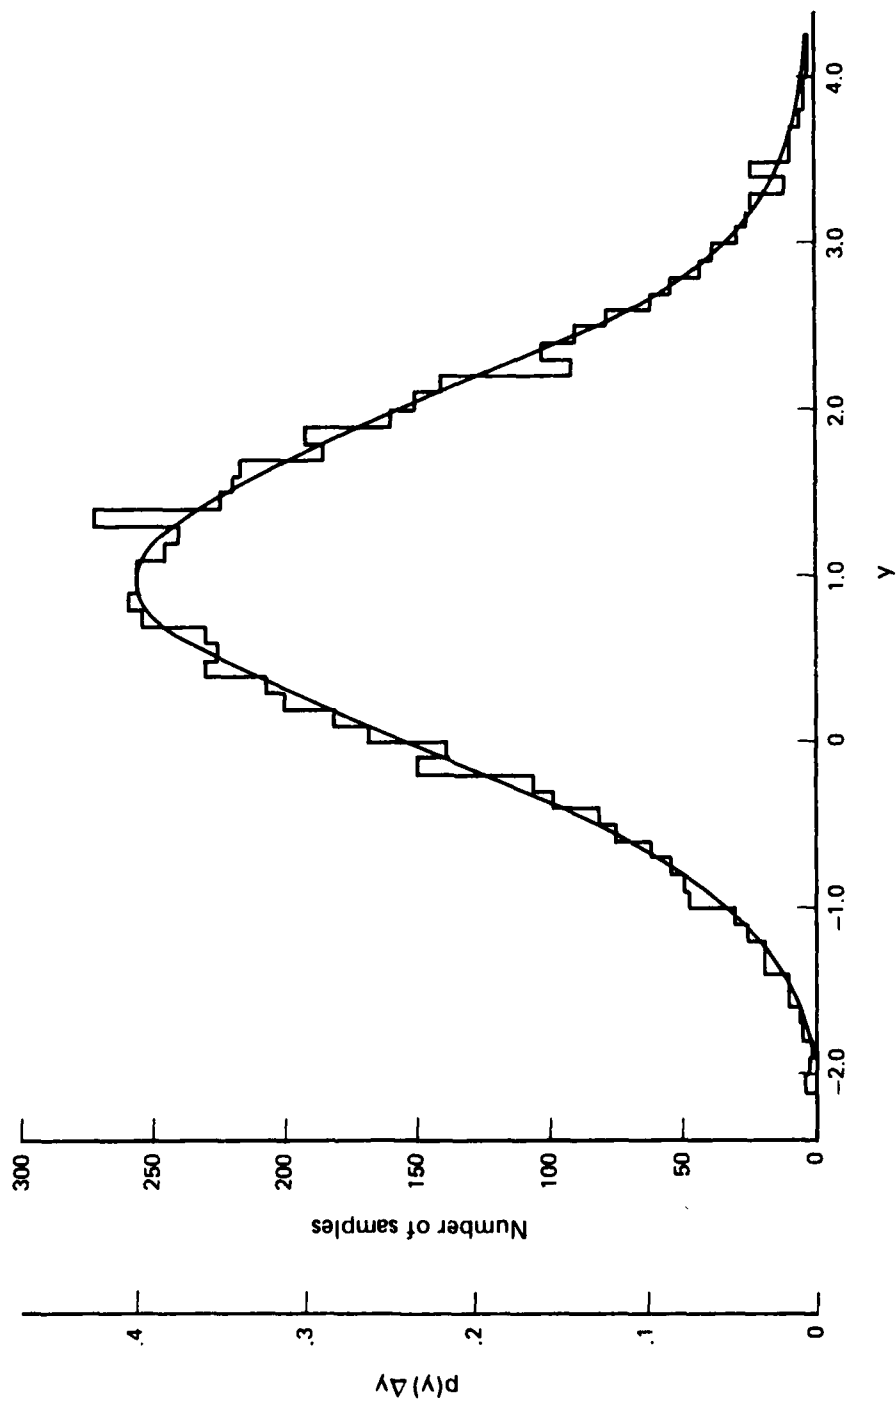


FIG. 3: PROBABILITY DENSITY FOR MEAN 1, VARIANCE 1 PROCESS OF EXAMPLE 1

spectral density of the underlying normal process must be used to weight the frequency samples. It is obtained from the autocorrelation function of that process, $R_z(\tau)$ which is related to $\rho_y(\tau)$ by equation (4e). For a mean 1, variance 1 log-normal process and the specific form of ρ_y used here (4e) becomes

$$R_z(\tau) = \ln \left[1 + e^{-2\pi^2 \alpha^2 \tau^2} \right] \quad (25)$$

$R_z(\tau)$ (solid curve) is compared with $\rho_y(\tau)$ (dashed curve) in figure 4a. Note that the two become equal for τ greater than about 4. This can be verified quantitatively by expanding $\ln(1+x)$ for small x .

The approximate spectral density corresponding to (25) was obtained by a DFT of that equation. It is shown in figure 4b. The independent frequency samples $\{X_k\}$, $\{Y_k\}$ and $\{U_k\}$ were generated according to a mean zero normal distribution and weighted with appropriate values of this spectral density. A DFT of the weighted samples resulted in a mean zero normally distributed time sequence whose autocorrelation function was the $R_z(\tau)$ of equation (25). The transformation

$$y = e^{(z+1)} \quad (26)$$

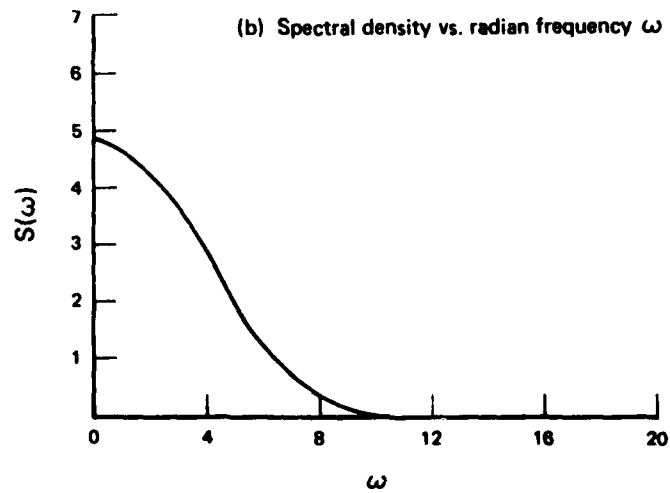
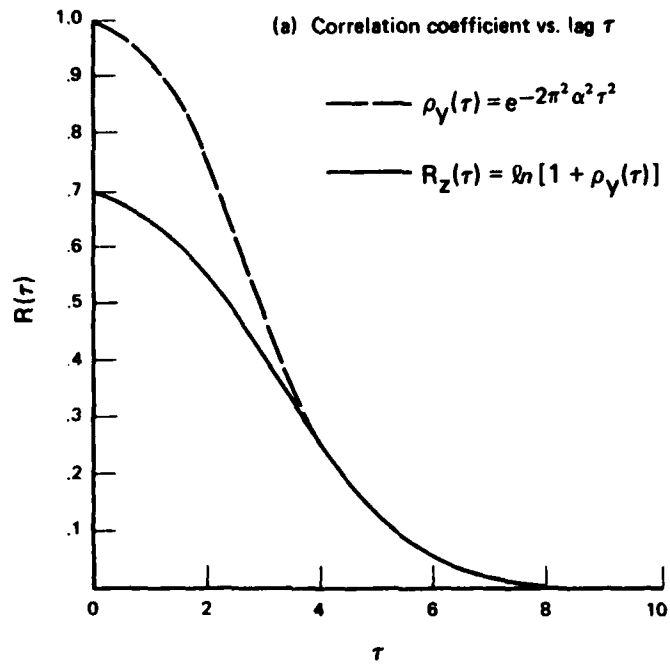


FIG. 4: SPECIFIED CORRELATION FUNCTIONS AND SPECTRAL DENSITY FOR EXAMPLE 2

applied to this sequence resulted in the desired log-normal sequence with mean 1, variance 1 and autocorrelation function $R_y(\tau) = \rho_y(\tau)+1$.

The sample autocorrelation function (solid curves) is compared with the specified autocorrelation (dashed curve) in figure 5. Two ensembles of 100 sequences each, and labeled A and B in the figure, are shown, to illustrate the statistical variability. In this case, the maximum deviation from the specified function is about 13 percent. The probability distributions of each of these ensembles is presented in figures 6 and 7. As before the histograms are frequency plots of the random samples. The solid curves are theoretical log-normal density functions with mean and variance both equal to 1. The scales on the left and right hand ordinates are exactly as described in figure 3. The agreement between the histograms and theoretical curves is excellent in both cases.

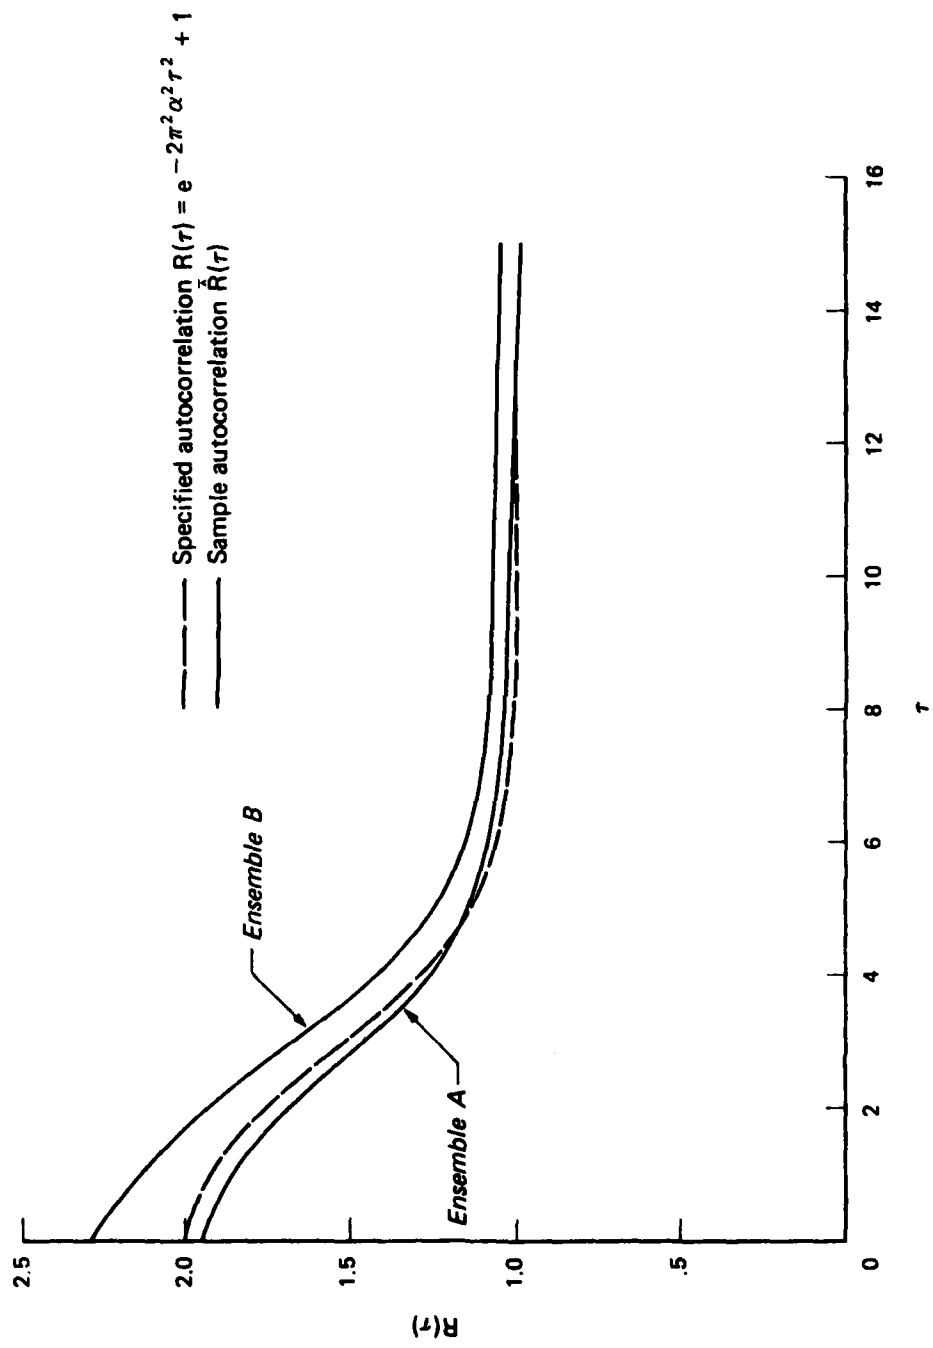


FIG. 5: SAMPLE AUTOCORRELATION FUNCTIONS COMPARED WITH SPECIFIED AUTO CORRELATION FUNCTION FOR EXAMPLE 2

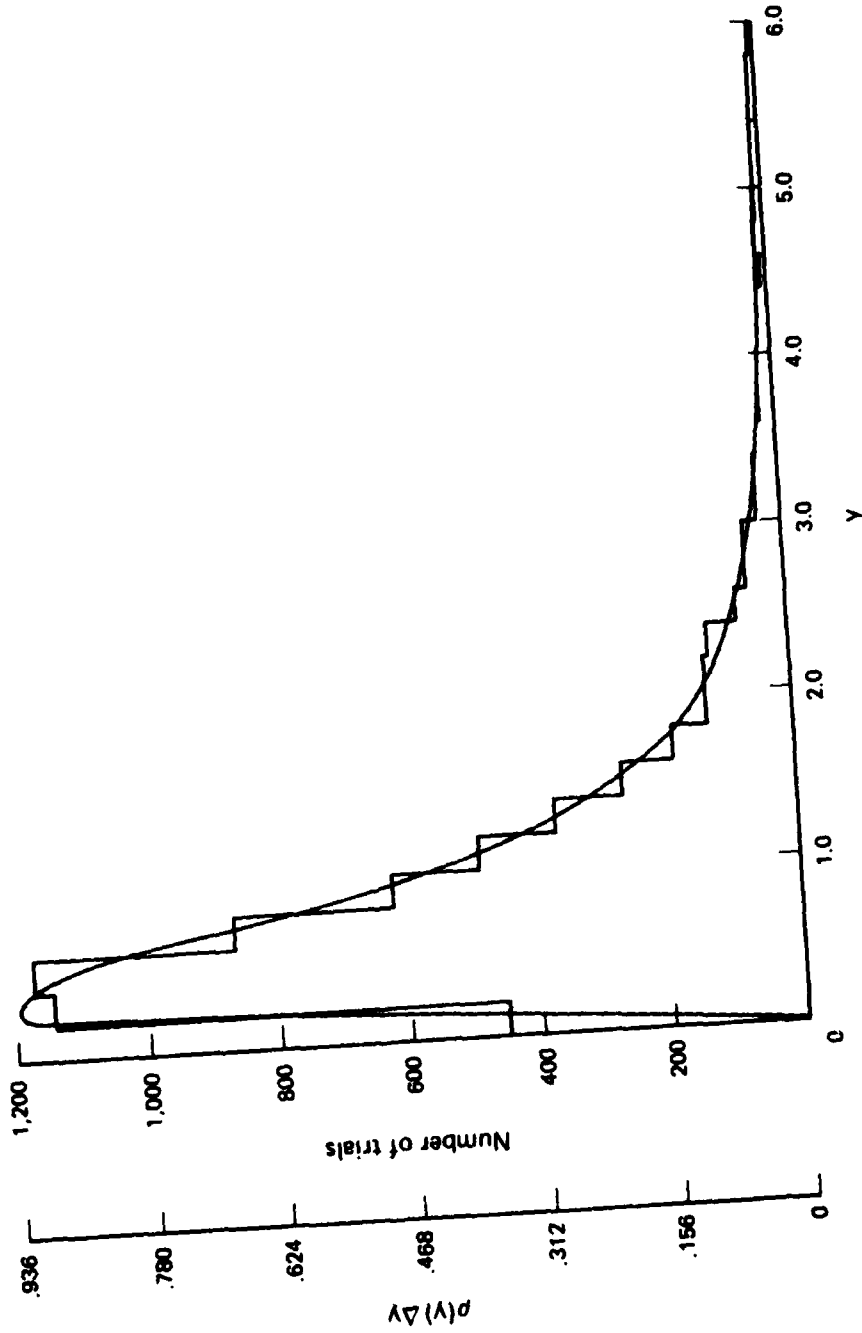


FIG. 6: PROBABILITY DENSITY FOR MEAN 1, VARIANCE 1
LOG-NORMAL PROCESS
(SAMPLE A)

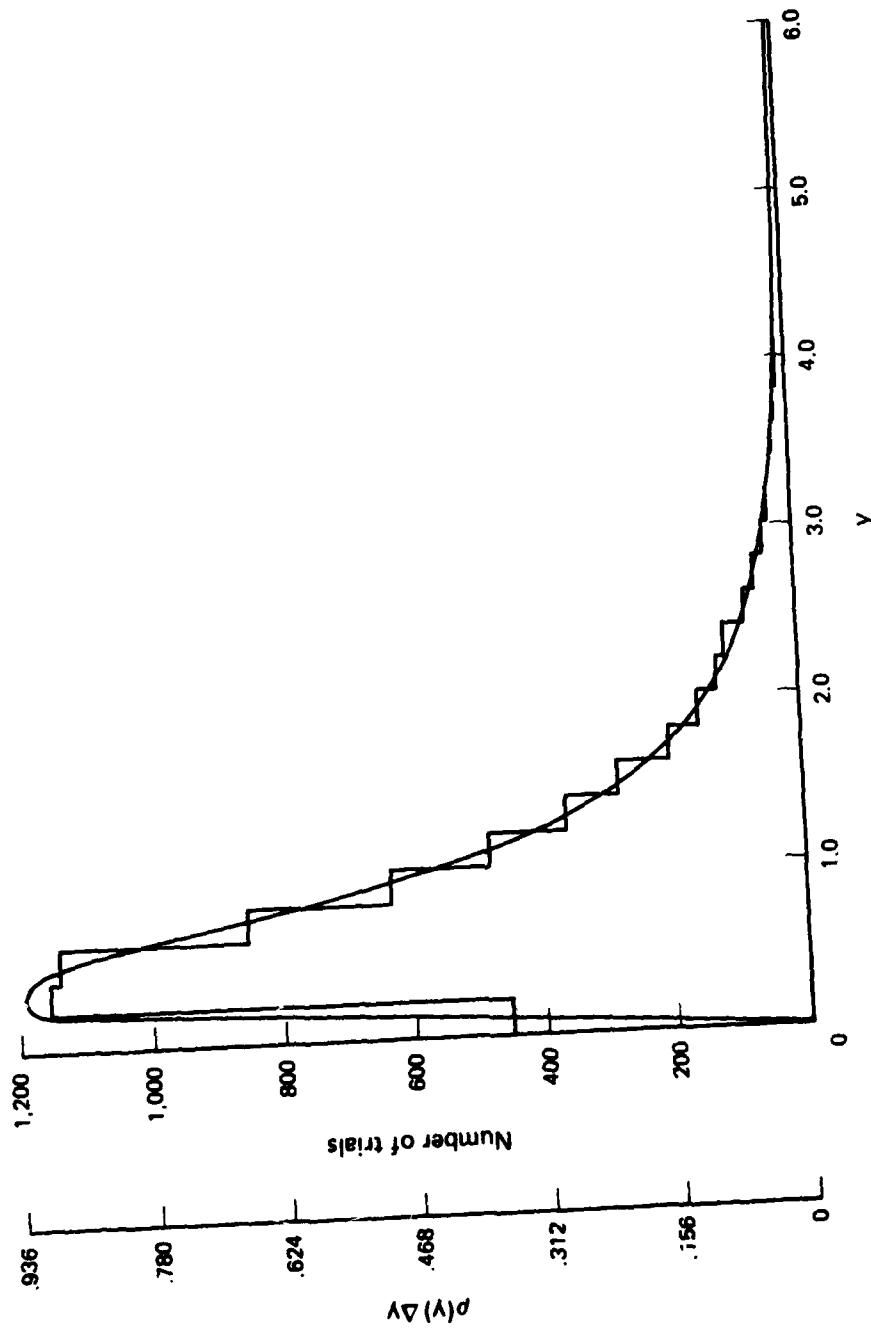


FIG. 7: PROBABILITY DENSITY FOR MEAN 1, VARIANCE 1
LOG-NORMAL PROCESS
(SAMPLE B)

REFERENCES

- [1] Trunk, Gerard V. "Detection of Targets in Non-Rayleigh Sea Clutter," IEEE 1971 EasCon Conference Proceedings, 239-245
- [2] Goldstein, G.B. "False Alarm Regulation in Log-Normal and Weibull Clutter," IEEE Transactions on Aerospace and Electronic Systems Vol AES-9, No.2 (January 1973) 84-91
- [3] Peebles, P. Z., "The Generation of Correlated Log-Normal Clutter for Radar Simulations," IEEE Transactions on Aerospace and Electronic Systems, Nov 1971, 1215-1217
- [4] Szajnowski, W. J., "Generation of Correlated Log-Normal Clutter Samples," Electronic Letters Vol 12, No. 9, (Sept 1976) 497-498
- [5] Blake, Lamont V. Radar Range Performance Analysis. Massachusetts: Lexington Books, 1980

CNA PROFESSIONAL PAPERS - 1976 TO PRESENT*

- PP 211
Mizrahi, Maurice M., "On Approximating the Circular Coverage Function," 14 pp., Feb 1978, AD A054 429
- PP 212
Mengel, Marc, "On Singular Characteristic Initial Value Problems with Unique Solution," 20 pp., Jun 1978, AD A058 535
- PP 213
Mengel, Marc, "Fluctuations in Systems with Multiple Steady States. Application to Lancaster Equations," 12 pp., Feb 78 (Presented at the First Annual Workshop on the Information Linkage Between Applied Mathematics and Industry, Naval PG School, Feb 23-25, 1978), AD A071 472
- PP 214
Weinland, Robert G., "A Somewhat Different View of The Optimal Naval Posture," 37 pp., Jun 1978 (Presented at the 1976 Convention of the American Political Science Association (APSA/IUS Panel on "Changing Strategic Requirements and Military Posture"), Chicago, Ill., September 2, 1976), AD A056 228
- PP 215
Colle, Russell C., "Comments on: Principles of Information Retrieval by Manfred Kochen," 10 pp., Mar 78 (Published as a Letter to the Editor, Journal of Documentation, Vol. 31, No. 4, pages 298-301), December 1975), AD A054 426
- PP 216
Colle, Russell C., "Lotke's Frequency Distribution of Scientific Productivity," 18 pp., Feb 1978 (Published in the Journal of the American Society for Information Science, Vol. 28, No. 6, pp. 366-370, November 1977), AD A054 425
- PP 217
Colle, Russell C., "Bibliometric Studies of Scientific Productivity," 17 pp., Mar 78 (Presented at the Annual meeting of the American Society for Information Science held in San Francisco, California, October 1976), AD A054 442
- PP 218 - Classified
- PP 219
Hurtzinger, R. LeVar, "Market Analysis with Rational Expectations: Theory and Estimation," 60 pp., Apr 78, AD A054 422
- PP 220
Maurer, Donald E., "Diagonalization by Group Matrices," 26 pp., Apr 78, AD A054 443
- PP 221
Weinland, Robert G., "Superpower Naval Diplomacy in the October 1973 Arab-Israeli War," 76 pp., Jun 1978 (Published in Superpower in the Mediterranean: Political Utility and Military Constraints, The Washington Papers No. 61, Beverly Hills and London: Sage Publications, 1979) AD A055 564
- PP 222
Mizrahi, Maurice M., "Correspondence Rules and Path Integrals," 30 pp., Jun 1978 (Invited paper presented at the CNRS meeting on "Mathematical Problems in Feynman's Path Integrals," Marseille, France, May 22-26, 1978) (Published in Springer Verlag Lecture Notes in Physics, 106, (1979), 234-253) AD A055 536
- PP 223
Mengel, Marc, "Stochastic Mechanics of Molecule-Molecule Reactions," 21 pp., Jun 1978, AD A056 227
- PP 224
Mengel, Marc, "Aggregation, Bifurcation, and Extinction in Exploited Animal Populations," 48 pp., Mar 1978, AD A058 536
"Portions of this work were started at the Institute of Applied Mathematics and Statistics, University of British Columbia, Vancouver, B.C., Canada
- PP 225
Mengel, Marc, "Oscillations, Fluctuations, and the Hopf Bifurcation," 45 pp., Jun 1978, AD A058 537
"Portions of this work were completed at the Institute of Applied Mathematics and Statistics, University of British Columbia, Vancouver, Canada.
- PP 226
Reiston, J. M. and J. W. Mann, "Temperature and Current Dependence of Degradation in Red-Emitting GaP LEDs," 34 pp., Jun 1978 (Published in Journal of Applied Physics, 50, 3630, May 1979) AD A058 538
"Bell Telephone Laboratories, Inc.
- PP 227
Mengel, Marc, "Uniform Treatment of Fluctuations at Critical Points," 50 pp., May 1978, AD A058 539
- PP 228
Mengel, Marc, "Relaxation at Critical Points: Deterministic and Stochastic Theory," 54 pp., Jun 1978, AD A058 540
- PP 229
Mengel, Marc, "Diffusion Theory of Reaction Rates, I: Formulation and Einstein-Smoluchowski Approximation," 50 pp., Jan 1978, AD A058 541
- PP 230
Mengel, Marc, "Diffusion Theory of Reaction Rates, II: Ornstein-Uhlenbeck Approximation," 34 pp., Feb 1978, AD A058 542
- PP 231
Wilson, Desmond P., Jr., "Naval Projection Forces: The Case for a Responsive MAF," Aug 1978, AD A054 543
- PP 232
Jacobson, Louis, "Can Policy Changes Be Made Acceptable to Labor?" Aug 1978 (Submitted for publication in Industrial and Labor Relations Review), AD A061 528

*CNA Professional Papers with an AD number may be obtained from the National Technical Information Service, U.S. Department of Commerce, Springfield, Virginia 22151. Other papers are available from the Management Information Office, Center for Naval Analysis, 2000 North Beauregard Street, Alexandria, Virginia 22311. An index of Selected Publications is also available on request. The index includes a listing of Professional Papers with abstracts; issued from 1968 to June 1981.

- PP 233
Jacobson, Louis, "An Alternative Explanation of the Cyclical Pattern of Quits," 23 pp., Sep 1978
- PP 234 - Revised
Jondrow, James and Levy, Robert A., "Does Federal Expenditure Displace State and Local Expenditure: The Case of Construction Grants," 29 pp., Oct 1979, AD A061 529
- PP 235
Mizrahi, Maurice M., "The Semiclassical Expansion of the Anharmonic-Oscillator Propagator," 41 pp., Oct 1978 (Published in Journal of Mathematical Physics 20 (1979) pp. 844-859), AD A061 538
- PP 237
Maurer, Donald, "A Matrix Criterion for Normal Integral Bases," 10 pp., Jan 1979 (Published in the Illinois Journal of Mathematics, Vol. 22 (1978), pp. 672-681)
- PP 238
Utgoff, Kathleen Classen, "Unemployment Insurance and The Employment Rate," 20 pp., Oct 1978 (Presented at the Conference on Economic Indicators and Performance: The Current Dilemma Facing Government and Business Leaders, presented by Indiana University Graduate School of Business), AD A061 527
- PP 239
Troost, R. P. and Werner, J. T., "The Effects of Military Occupational Training on Civilian Earnings: An Income Selectivity Approach," 38 pp., Nov 1979k, AD A077 831
- PP 240
Powers, Bruce, "Goals of the Center for Naval Analyses," 13 pp., Dec 1978, AD A063 759
- PP 241
Mangel, Marc, "Fluctuations at Chemical Instabilities," 24 pp., Dec 1978 (Published in Journal of Chemical Physics, Vol. 69, No. 8, Oct 15, 1978), AD A063 787
- PP 242
Slapson, William R., "The Analysis of Dynamically Interactive Systems (Air Combat by the Numbers)," 160 pp., Dec 1978, AD A063 760
- PP 243
Slapson, William R., "A Probabilistic Formulation of Murphy Dynamics as Applied to the Analysis of Operational Research Problems," 18 pp., Dec 1978, AD A063 761
- PP 244
Sherman, Allan and Horowitz, Stanley A., "Maintenance Costs of Complex Equipment," 20 pp., Dec 1978 (Published By The American Society of Naval Engineers, Naval Engineers Journal, Vol. 91, No. 6, Dec 1979) AD A071 473
- PP 245
Slapson, William R., "The Accelerometer Methods of Obtaining Aircraft Performance from Flight Test Data (Dynamic Performance Testing)," 403 pp., Jun 1979, AD A075 226
- PP 246
Brechling, Frank, "Layoffs and Unemployment Insurance," 35 pp., Feb 1979 (Presented at the Nber Conference on "Low Income Labor Markets," Chicago, Jun 1978), AD A096 629
- PP 248
Thomas, James A., Jr., "The Transport Properties of Dilute Gases in Applied Fields," 183 pp., Mar 1979, AD A096 464
- PP 249
Glasser, Kenneth S., "A Secretary Problem with a Random Number of Choices," 23 pp., Mar 1979
- PP 250
Mangel, Marc, "Modeling Fluctuations in Macroscopic Systems," 26 pp., Jun 1979
- PP 251
Troost, Robert P., "The Estimation and Interpretation of Several Selectivity Models," 37 pp., Jun 1979, AD A075 941
- PP 252
Nunn, Walter R., "Position Finding with Prior Knowledge of Covariance Parameters," 5 pp., Jun 1979 (Published in IEEE Transactions on Aerospace & Electronic Systems, Vol. AES-15, No. 3, Mar 1979)
- PP 253
Glasser, Kenneth S., "The d-Choice Secretary Problem," 32 pp., Jun 1979, AD A075 225
- PP 254
Mangel, Marc and Quanbeck, David B., "Integration of a Bivariate Normal Over an Offset Circle," 14 pp., Jun 1979, AD A096 471
- PP 255 - Classified, AD B051 441L
- PP 256
Maurer, Donald E., "Using Personnel Distribution Models," 27 pp., Feb 1980, AD A082 218
- PP 257
Thaler, R., "Discounting and Fiscal Constraints: Why Discounting is Always Right," 10 pp., Aug 1979, AD A075 224
- PP 258
Mangel, Marc S. and Thomas, James A., Jr., "Analytical Methods in Search Theory," 86 pp., Nov 1979, AD A077 832
- PP 259
Glass, David V.; Hsu, Ih-Ching; Nunn, Walter R., and Parin, David A., "A Class of Commutative Markov Matrices," 17 pp., Nov 1979, AD A077 833
- PP 260
Mangel, Marc S. and Ope, Davis K., "Detection Rate and Sweep Width in Visual Search," 14 pp., Nov 1979, AD A077 834
- PP 261
Vile, Carlos L.; Zvijec, David J. and Ross, John, "Frank-Condon Theory of Chemical Dynamics. VI. Angular Distributions of Reaction Products," 14 pp., Nov 1979 (Reprinted from Journal Chemical Phys. 70(12), 15 Jun 1979), AD A076 267
- PP 262
Peterson, Charles C., "Third World Military Elites in Soviet Perspective," 50 pp., Nov 1979, AD A077 835
- PP 263
Robinson, Kathy L., "Using Commercial Tankers and Container-ships for Navy Underway Replenishment," 29 pp., Nov 1979, AD A077 836

- PP 264
Weinland, Robert G., "The U.S. Navy in the Pacific: Past, Present, and Glimpses of the Future," 31 pp., Nov 1979 (Delivered at the International Symposium on the Sea, sponsored by the International Institute for Strategic Studies, The Brookings Institution and the Yomiuri Shimbun, Tokyo, 16-20 Oct 1978) AD A066 837
- PP 265
Weinland, Robert G., "War and Peace in the North: Some Political Implications of the Changing Military Situation in Northern Europe," 18 pp., Nov 1979 (Prepared for presentation to the Conference of the Nordic Balance in Perspective: The Changing Military and Political Situation," Center for Strategic and International Studies, Georgetown University, Jun 15-16, 1978) AD A077 838
- PP 266
Utgoff, Kathy Classen, and Brechling, Frank, "Taxes and Inflation," 25 pp., Nov 1979, AD A081 194
- PP 267
Trust, Robert P., and Vogel, Robert C., "The Response of State Government Receipts to Economic Fluctuations and the Allocation of Counter-Cyclical Revenue Sharing Grants," 12 pp., Dec 1979 (Reprinted from the Review of Economics and Statistics, Vol. LXI, No. 3, August 1979)
- PP 268
Thomson, James S., "Seaport Dependence and Inter-State Cooperation: The Case of Sub-Saharan Africa," 141 pp., Jan 1980, AD A081 193
- PP 269
Weiss, Kenneth G., "The Soviet Involvement in the Ogaden War," 42 pp., Jan 1980 (Presented at the Southern Conference on Slavic Studies in October, 1979), AD A082 219
- PP 270
Ramek, Richard, "Soviet Policy in the Horn of Africa: The Decision to Intervene," 52 pp., Jan 1980 (To be published in "The Soviet Union in the Third World: Success or Failure," ed. by Robert H. Donaldson, Westview Press, Boulder, Co., Summer 1980), AD A081 195
- PP 271
McConnell, James, "Soviet and American Strategic Doctrines: One More Time," 43 pp., Jan 1980, AD A081 192
- PP 272
Weiss, Kenneth G., "The Azores in Diplomacy and Strategy, 1940-1945," 46 pp., Mar 1980, AD A085 094
- PP 273
Nakada, Michael K., "Labor Supply of Wives with Husbands Employed Either Full Time or Part Time," 39 pp., Mar 1980, AD A082 220
- PP 275
Goldberg, Lawrence, "Recruiters Advertising and Navy Enlistments," 34 pp., Mar 1980, AD A082 221
- PP 276
Goldberg, Lawrence, "Delaying an Overhaul and Ship's Equipment," 40 pp., May 1980, AD A085 095
- PP 277
Mangel, Marc, "Small Fluctuations in Systems with Multiple Limit Cycles," 19 pp., Mar 1980 (Published in SIAM J. Appl. Math., Vol. 38, No. 1, Feb 1980) AD A086 229
- PP 278
Mizrahi, Maurice, "A Targeting Problem: Exact vs. Expected-Value Approaches," 23 pp., Apr 1980, AD A085 096
- PP 279
Walt, Stephen M., "Causal Inferences and the Use of Force: A Critique of Force Without War," 50 pp., May 1980, AD A085 097
- PP 280
Goldberg, Lawrence, "Estimation of the Effects of a Ship's Steaming on the Failure Rate of Its Equipment: An Application of Econometric Analysis," 25 pp., Apr 1980, AD A085 098
- PP 281
Mizrahi, Maurice M., "Comment on 'Discretization Problems of Functional Integrals in Phase Space'," 2 pp., May 1980, published in "Physical Review D", Vol. 22 (1980), AD A094 994
- PP 283
Dimukes, Bradford, "Expected Demand for the U.S. Navy to Serve as An Instrument of U.S. Foreign Policy: Thinking About Political and Military Environmental Factors," 30 pp., Apr 1980, AD A085 099
- PP 284
J. Kellison,* W. Nunn, and U. Samita,** "The Legendre Transform," 119 pp., May 1980, AD A085 100
*The Graduate School of Management, University of Rochester and the Center for Naval Analyses
**The Graduate School of Management, University of Rochester
- PP 285
Ramek, Richard B., "Superpower Security Interests in the Indian Ocean Area," 26 pp., Jun 1980, AD A087 113
- PP 286
Mizrahi, Maurice M., "On the WKB Approximation to the Propagator for Arbitrary Hamiltonians," 25 pp., Aug 1980 (Published in Journal of Math. Phys., 22(1) Jan 1981), AD A091 307
- PP 287
Cope, Davis, "Limit Cycle Solutions of Reaction-Diffusion Equations," 35 pp., Jun 1980, AD A087 114
- PP 288
Golman, Walter, "Don't Let Your Slides Flip You: A Painless Guide to Visuals That Really Aid," 28 pp., Oct 1980, AD A092 752
- PP 289
Robinson, Jack, "Adequate Classification Guidance - A Solution and a Problem," 7 pp., Aug 1980, AD A091 212
- PP 290
Watson, Gregory M., "Evaluation of Computer Software in an Operational Environment," 17 pp., Aug 1980, AD A091 213
- PP 291
Meddala, G. S.* and Trust, R. P., "Some Extensions of the Narlove Press Model," 17 pp., Oct 1980, AD A091 946
*University of Florida
- PP 292
Thomas, James A., Jr., "The Transport Properties of Binary Gas Mixtures in Applied Magnetic Fields," 10 pp., Sept 1980 (Published in Journal of Chemical Physics 72(10), 15 May 1980)

- PP 293
Thomas, James A., Jr., "Evaluation of Kinetic Theory Collision Integrals Using the Generalized Phase Shift Approach," 12 pp., Sept 1980 (Printed in Journal of Chemical Physics 72(10), 15 May 1980)
- PP 294
Roberts, Stephen S., "French Naval Policy Outside of Europe," 30 pp., Sept 1980 (Presented at the Conference of the Section on Military Studies, International Studies Association Kluweh Island, S.C.), AD A091 306
- PP 295
Roberts, Stephen S., "An Indicator of Informal Empire: Patterns of U.S. Navy Cruising on Overseas Stations, 1869-1897," 40 pp., Sept 1980 (Presented at Fourth Naval History Symposium, US Naval Academy, 26 October 1979, AD A091 316
- PP 296
Dismukes, Bradford and Petersen, Charles C., "Maritime Factors Affecting Iberian Security," (Factores Maritimos Que Afectan La Seguridad Iberica) 14 pp., Oct 1980, AD A092 733
- PP 297 - Classified
- PP 298
Mizrahi, Maurice M., "A Markov Approach to Large Missile Attacks," 31 pp., Jan 1981, AD A096,159
- PP 299
Jondrow, James M. and Levy, Robert A., "Wage Leadership in Construction, 19 pp., Jan 1981, AD A094 797
- PP 300
Jondrow, James and Schmidt, Peter, "On the Estimation of Technical Inefficiency in the Stochastic Frontier Production Function Model," 11 pp., Jan 1981, AD A096 159
*Michigan State University
- PP 301
Jondrow, James M.; Levy, Robert A. and Hughes, Claire, "Technical Change and Employment in Steel, Autos, Aluminum, and Iron Ore, 17 pp., Mar 1981, AD A099 394
- PP 302
Jondrow, James M. and Levy, Robert A., "The Effect of Imports on Employment Under Rational Expectations," 19 pp., Apr 1981, AD A099 392
- PP 303
Thomson, James, "The Rarest Commodity in the Coming Resource Wars," 3 pp., Aug 1981 (Published in the Washington Star, April 13, 1981)
- PP 304
Duffy, Michael K.; Greenwood, Michael J. and McDowell, John M., "A Cross-Sectional Model of Annual Interregional Migration and Employment Growth: Intertemporal Evidence of Structural Change, 1958-1975," 31 pp., Apr 1981, AD A099 393
*University of Colorado
**Arizona State University
- PP 305
Munn, Laura M., "An Introduction to the Literature of Search Theory," 32 pp., Jun 1981
- PP 306
Anger, Thomas E., "What Good Are Warfare Models?" 7 pp., May 1981
- PP 307
Thomson, James, "Dependence, Risk, and Vulnerability," 43 pp., Jun 1981
- PP 308
Mizrahi, M.M., "Correspondence Rules and Path Integrals," Jul 1981. Published in "Nuovo Cimento B", Vol. 61 (1981)
- PP 309
Weinland, Robert G., "An (The?) Explanation of the Soviet Invasion of Afghanistan," 44 pp., May 1981
- PP 310
Stanford, Janette M. and Tai Te Wu, "A Predictive Method for Determining Possible Three-dimensional Foldings of Immunoglobulin Backbones Around Antibody Combining Sites," 19 pp., Jun 1981 (Published in J. theor. Biol. (1981) 88, 421-439
*Northwestern University, Evanston, IL
- PP 311
Bowes, Marianne, Brechling, Frank P. R., and Utgoff, Kathleen P. Classen, "An Evaluation of UI Funds," 13 pp., May 1981 (Published in National Commission on Unemployment Compensation's Unemployment Compensation: Studies and Research, Volume 2, July 1980)
- PP 312
Jondrow, James; Bowes, Marianne and Levy, Robert, "The Optimum Speed Limit," 23 pp., May 1981
- PP 313
Roberts, Stephen S., "The U.S. Navy in the 1980s," 36 pp., Jul 1981
- PP 314
Jahn, Christopher; Morowitz, Stanley A. and Lockman, Robert F., "Examining the Draft Debate," 20 pp., Jul 1981
- PP 315
Buck, Ralph V., Capt., "Le Catastrophe by any other name...", 4 pp., Jul 1981
- PP 316
Roberts, Stephen S., "Western European and NATO Navies, 1980," 20 pp., Aug 1981
- PP 317
Roberts, Stephen S., "Superpower Naval Crisis Management in the Mediterranean," 35 pp., Aug 1981
- PP 318
Vago, Milan N., "Yugoslavia and the Soviet Policy of Force in the Mediterranean Since 1961," 187 pp., Aug 1981
- PP 319
Smith, Michael M., "Anti-air Warfare Defense of Ships at Sea," 48 pp., Sep 1981 (This talk was delivered at the Naval Warfare System and Technology Conference of the American Institute of Aeronautics and Astronautics in Washington on December 12, 1980; in Boston on January 20, 1981; and in Los Angeles on June 12, 1981.)
- PP 320
Trost, R.P.; Lurie, Philip and Berger, Edward, "A Note on Estimating Continuous Time Decision Models," 19 pp., Sep 1981

- PP 321
Duffy, Michael K. and Ledman, Jerry R., "The Simultaneous Determination of Income and Employment in United States--Mexico Border Region Economies," 34 pp., Sep 1981
*Associate Professor of Economics, Arizona State University, Tempe, AZ.
- PP 322
Werner, John T., "Issues in Navy Manpower Research and Policy: An Economist's Perspective," 66 pp., Dec 1981
- PP 323
Bosse, Frederick M., "Generation of Correlated Log-Normal Sequences for the Simulation of Clutter Echoes," 33 pp., Dec 1981
- PP 324
Horowitz, Stanley A., "Quantifying Seepover Readiness," 6 pp., Dec 1981 (Published in Defense Management Journal, Vol. 18, No. 2)

DATE
FILMED
- 8