

UNCLASSIFIED

AD 409 598

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

CATALOGED BY DDC
AS AD No. 409598

63-4-2

Office of Naval Research

Contract Nonr 1866 (02)


Technical Report No. 16

ANALYSIS OF A STRUCTURE
WITH A RANDOM GEOMETRY

By

J. Lyell Sanders Jr.

409 598



Division of Engineering and Applied Physics
Harvard University
Cambridge, Massachusetts

April - 1963

OFFICE OF NAVAL RESEARCH

Contract Nonr 1866(02)

Technical Report No. 16

ANALYSIS OF A STRUCTURE WITH A RANDOM GEOMETRY

by

J. Lyell Sanders Jr.

Division of Engineering and Applied Physics
Harvard University
Cambridge, Mass.

April 1963

Reproduction in whole or in part
is permitted for any purpose of
the United States Government

ANALYSIS OF A STRUCTURE WITH A RANDOM GEOMETRY*

by

J. Lyell Sanders Jr.

Introduction

A metal polycrystal, a nonwoven fabric such as felt, a suspension of particles of random size, shape, and location in a viscous fluid, are examples of what we mean by a structure with a random geometry. The problem of interest in connection with such structures is the determination of some average property such as the effective Young's modulus or the effective viscosity or perhaps the probability density function of these properties. Solutions satisfactory for practical purposes to a fair number of such problems have appeared in the literature, but the author knows of no instance in which some (nontrivial) average property of a random structure has been determined exactly. The difficulty is not in solving some known mathematical equation, but rather in reducing such problems to exact mathematical terms. The purpose of the present paper is to become better acquainted with the nature of the problem by means of an exact analysis of a very simple random structure.

The paper is concerned with the analysis of a structure which is essentially one-dimensional. It turns out that the analysis of this structure is much like the analysis of a Markov process. The fact that a spacial coordinate replaces the time-like independent variable of a Markov process makes for some complication as might be expected since boundary value problems are generally more complicated than initial value problems. The results obtained give no

-----●-----

* This work was sponsored by the Office of Naval Research under Contract Nonr 1866(02).

clear indication of how to approach the exact analysis of any physical problem but suggest that the next step should probably be to invent some two-dimensional problem sufficiently simple to be analyzed and not so complicated as a real physical problem is likely to be.

Analysis of a Random Structure

The structure to be considered is composed of a uniform elastic rod pin-jointed to a series of elastic beams which are built-in to a rigid foundation as shown in Figure 1.

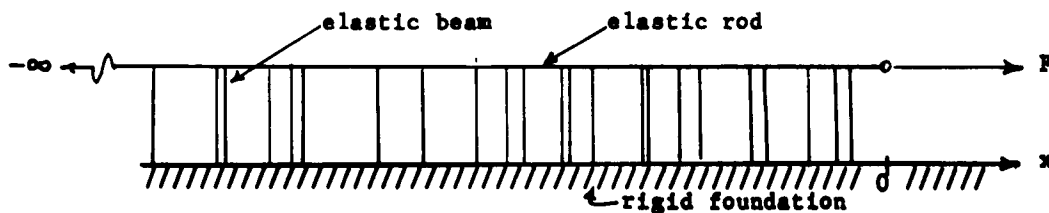


Figure 1

- The beams are randomly spaced with, on the average, N beams per unit length. In other words the probability of finding a beam in a length δx is equal to $N\delta x$. If the random variable y is the distance between successive beams then, as is well known in such cases, the probability density function (p.d.f.) of y is given by the Poisson law Ne^{-Ny} . • For the present suppose the rod is semi-infinite with one end at the origin. Let a force F be applied to the rod at the origin and let the resulting displacement of the end be u . Let $\sigma = F/u$ be called the stiffness of the structure. Consider the problem of finding the p.d.f. $P(\sigma)$ of the random variable σ . First add on a beam at the origin. The stiffness of the augmented structure σ' is

$$\sigma' = \sigma + \alpha \quad (1)$$

where α is the stiffness of a beam with respect to a load at its tip. The p.d.f. σ' is thus

$$Q(\sigma') = P(\sigma) \frac{d\sigma}{d\sigma'} = P(\sigma' - \alpha) \quad (2)$$

Now add a piece of rod of length y . The stiffness σ'' of the augmented structure is now given by

$$\frac{1}{\sigma''} = \frac{1}{\sigma'} + \frac{1}{\kappa/y} \quad (3)$$

where κ/L is the stiffness of a rod of length L . The conditional probability density function (c.p.d.f.) of σ'' given σ' is

$$T(\sigma''; \sigma') = R(y) \left| \frac{dy}{d\sigma''} \right| = R\left(\frac{\kappa}{\sigma''} - \frac{\kappa}{\sigma'}\right) \frac{\kappa}{(\sigma'')^2} \quad (4)$$

where

$$R(y) = \begin{cases} N e^{-Ny} & y \geq 0 \\ 0 & y < 0 \end{cases} \quad (5)$$

and the p.d.f. of σ'' is

$$\int T(\sigma''; \sigma') Q(\sigma') d\sigma' \quad (6)$$

Now the augmented structure with the beam and rod added is statistically the same as the original structure, therefore the p.d.f. of σ'' must be the same as the p.d.f. of σ and hence

$$P(\sigma) = \frac{\kappa N}{2} \int_{\sigma}^{\infty} e^{-N\kappa\left(\frac{1}{\sigma} - \frac{1}{\sigma'}\right)} P(\sigma' - \alpha) d\sigma' \quad (7)$$

The integral equation (7) is easily reducible to the following differential-difference equation

$$(\sigma^2 P)' - \kappa N P = -\kappa N P(\sigma - \alpha) \quad (8)$$

where a prime denotes differentiation with respect to σ . If the beams have a random stiffness β with p.d.f. $S(\beta)$ we obtain instead of (8) the following

$$(\sigma^2 P)' - \kappa N P = -\kappa N \int_0^\sigma P(\xi) S(\sigma - \xi) d\xi \quad (9)$$

Equations (8) or (9) must be solved subject to the normalization condition

$$\int_0^\infty P(\sigma) d\sigma = 1 \quad (10)$$

Let $P_L(p)$ denote the Laplace transform of $P(\sigma)$. We have

$$\left. \begin{aligned} P_L(p) &= \int_0^\infty P(\sigma) e^{-p\sigma} d\sigma \\ P_L'(0) &= - \int_0^\infty \sigma P(\sigma) d\sigma = -\bar{\sigma} \\ P_L(0) &= 1 \\ P_L''(0) &= \int_0^\infty \sigma^2 P(\sigma) d\sigma = \overline{\sigma^2} \end{aligned} \right\} \quad (11)$$

where a bar over a quantity indicates its mean value. Taking the Laplace transform of Eq. (9) leads to

$$P_L'' - \kappa N \frac{1 - S_L}{p} P_L = 0 \quad (12)$$

In the special case $S(\beta) = \frac{1}{\alpha} e^{-\beta/\alpha}$ for which $\bar{\beta} = \alpha$ the exact solution for $P(\sigma)$ is

$$P(\sigma) = \frac{\sqrt{\alpha \kappa N}}{2\sigma^2 K_1(\sqrt{\frac{4\kappa N}{\alpha}})} e^{-\left(\frac{\kappa N}{\sigma} + \frac{\sigma}{\alpha}\right)} \quad (13)$$

where K_1 is the modified Bessel function of the second kind.

It is interesting to make some comparisons with the stiffness of a similar structure with uniformly spaced beams. Let the beams be spaced uniformly at a

distance $1/N$ and have a uniform stiffness α , then the stiffness of the structure (with no beam at the finite end) is

$$\sigma = (\alpha \kappa N + \frac{\alpha^2}{4})^{1/2} - \frac{\alpha}{2} \quad (14)$$

Now let $\alpha \rightarrow 0$, $N \rightarrow \infty$ and require αN to remain finite, then

$$\sigma^2 \rightarrow \alpha \kappa N \quad (15)$$

From Eq. (12) and with $\bar{\beta} = -S'_L(0) = \alpha$

$$\bar{\sigma}^2 = \lim_{p \rightarrow 0} p''_L = \alpha \kappa N \quad (16)$$

the same result as in (15), but in general $(\bar{\sigma})^2 \neq \sigma^2$.

Structure of Finite Length

The solution of the problem in the preceding section for a semi-infinite structure depended on a special device which will not work for a structure of finite length. Consider now a somewhat more complicated problem for the structure shown in Figure 2.

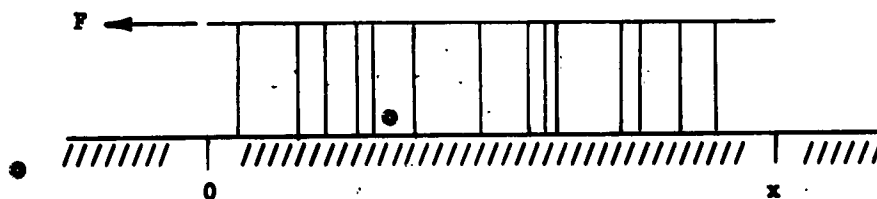


Figure 2

Let it be required to find the joint p.d.f. $R(\sigma, u, x)$ where σ and u are the stiffness and displacement at the right end. The left end of the structure is subjected to a load F as shown and u is taken positive to the left. This time augment the structure by an infinitesimal piece in such a way as to leave

the statistical character of the structure undisturbed. Let $R_1(\sigma, u, x + \delta x)$ be the new R on condition there is no beam in the added piece of length δx , and R_2 be the new R on condition there is a beam in the added length. The unconditional new R is given by

$$R(\sigma, u, x + \delta x) = R_1(\sigma, u, x + \delta x)(1 - N\delta x) + R_2(\sigma, u, x + \delta x)N\delta x \quad (17)$$

since we do not or do include a beam in the added piece with probabilities $1 - N\delta x$ and $N\delta x$ respectively. Expressions for R_1 and R_2 are found as follows.

1. No beams added. Let σ' and u' be the new displacement and stiffness. These are related to σ and u as follows

$$\left. \begin{aligned} u' &= u \\ \frac{1}{\sigma'} &= \frac{1}{\sigma} + \frac{\delta x}{\kappa} \end{aligned} \right\} \text{ or } \left. \begin{aligned} u &= u' \\ \sigma &= \frac{\kappa \sigma'}{\kappa - \sigma' \delta x} \end{aligned} \right\} \quad (18)$$

According to the calculus of probabilities

$$R_1(\sigma', u', x + \delta x) d\sigma' du' = R(\sigma, u, x) d\sigma du \quad (19)$$

where

$$d\sigma du = J \left(\frac{\sigma, u}{\sigma', u'} \right) d\sigma' du' = \left(\frac{\kappa}{\kappa - \sigma' \delta x} \right)^2 d\sigma' du' \quad (20)$$

and where J is the Jacobian of the change of variable. From this it follows

$$R_1(\sigma', u', x + \delta x) = R \left(\frac{\kappa \sigma'}{\kappa - \sigma' \delta x}, u', x \right) \left(\frac{\kappa}{\kappa - \sigma' \delta x} \right)^2 \quad (21)$$

2. Beam added. In this case the change in stiffness due to the added rod may be neglected and we have

$$\sigma' = \sigma + \alpha \quad (22)$$

The added beam exerts a force $\alpha u'$ on the old structure and causes a displacement to the right by an amount

-7-

$$u'' = \frac{\alpha u'}{\sigma} \quad (23)$$

but

$$u' = u - u'' \quad (24)$$

therefor

$$u' = u - \frac{\alpha u'}{\sigma} \quad \text{or} \quad u = \frac{\sigma u'}{\sigma' - \alpha} \quad (24)$$

In this case

$$J = \frac{\sigma'}{\sigma' - \alpha} \quad (25)$$

and

$$R_2(\sigma', u', x + \delta x) = R(\sigma, u, x) \frac{\sigma'}{\sigma' - \alpha} = R(\sigma' - \alpha, \frac{\sigma' u'}{\sigma' - \alpha}, x) \frac{\sigma'}{\sigma' - \alpha} \quad (26)$$

Primes can now be dropped with no loss in sense and (17) becomes

$$R(\sigma, u, x + \delta x) = R(\frac{\kappa \sigma}{\kappa - \sigma \delta x}, u, x) (\frac{\kappa}{\kappa - \sigma \delta x})^2 (1 - N \delta x) + \frac{\sigma}{\sigma - \alpha} R(\sigma - \alpha, \frac{\sigma u}{\sigma - \alpha}, x) N \delta x \quad (27)$$

Subtract $R(\sigma, u, x)$ from both sides, divide by δx and let $\delta x \rightarrow 0$, the result is

$$\frac{\partial R}{\partial x} - \frac{1}{\kappa} \frac{\partial}{\partial \sigma} (\sigma^2 R) + NR = \frac{N\sigma}{\sigma - \alpha} R(\sigma - \alpha, \frac{\sigma u}{\sigma - \alpha}, x) \quad (28)$$

If the beam stiffness is random with p.d.f. $S(\beta)$ then the result is

$$\frac{\partial R}{\partial x} - \frac{1}{\kappa} \frac{\partial}{\partial \sigma} (\sigma^2 R) + NR = N\sigma \int_0^\sigma R(\sigma - \xi, \frac{\sigma u}{\sigma - \xi}, x) S(\xi) \frac{d\xi}{\sigma - \xi} \quad (29)$$

These equations are to be solved subject to the usual normalizing condition and the initial condition $R(\sigma, u, 0) = 0$ for $\sigma u \neq F$. The equation for the marginal distribution $P(\sigma, x)$ may be obtained from (29) by integration over all values of u . The result is

$$\frac{\partial P}{\partial x} - \frac{1}{\kappa} \frac{\partial}{\partial \sigma} (\sigma^2 P) - NP + N \int_0^\sigma P(\sigma - \xi) S(\xi) d\xi \quad (30)$$

Appropriate conditions on the solution of this equation are $P(\sigma, 0)$ given and

$$\int_0^{\infty} P(\sigma, x) d\sigma = 1 .$$

If the left end is attached to a spring of stiffness σ^* ,

for example, the initial condition is $P(\sigma, 0) = \delta(\sigma - \sigma^*)$. No solutions of Eq. (30) have been obtained by the author except the one given in the last section for the semi-infinite structure when Eq. (30) reduces to Eq. (9) because

$$\frac{\partial P}{\partial x} = 0 .$$

Properties at an Interior Point

Let us now turn our attention to the problem of determining the joint p.d.f. of σ , u , and force f (in the rod) at a point x interior to a structure of finite length L . This problem may be solved in terms of previously determined

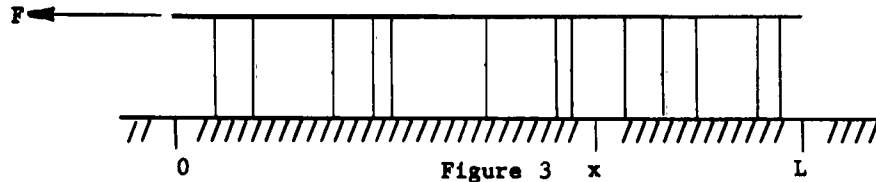


Figure 3

probability density functions if we make a cut in the structure at the point x and then determine the forces and displacements necessary to restore continuity and equilibrium.

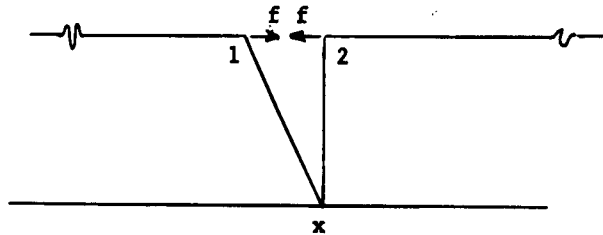


Figure 4

Figure 4 shows the cut structure near the point x . Let:

σ_1 = the stiffness at the point 1

σ_2 = the stiffness at the point 2

σ = the stiffness of the continuous structure at x

f = the force necessary to effect the closure which equals the force at x on the continuous structure

u_0 = the gap between 1 and 2 before the two pieces of the structure are joined together

u = the displacement at x of the continuous structure (positive to the left)

u_1 = displacement of point 1 after the force f is applied

u_2 = displacement of point 2 after the force f is applied

We have

$$u_1 = u_0 - f/\sigma_1 \quad (31)$$

$$u_2 = f/\sigma_2 \quad (32)$$

The structure will be continuous and in equilibrium if f and u are determined from

$$u_1 = u_2 = u \quad (33)$$

This gives

$$f = \frac{\sigma_1 \sigma_2 u_0}{\sigma_1 + \sigma_2} \quad (34)$$

$$u = \frac{\sigma_1 u_0}{\sigma_1 + \sigma_2} \quad (35)$$

The stiffness of the joined structure is obviously

$$\sigma = \sigma_1 + \sigma_2 \quad (36)$$

Now since σ_1 and u_0 are independent of σ_2 we may write

$$p(\sigma, u, f, x) = R(\sigma_1, u_0, x) P(\sigma_2, L-x) J\left(\frac{u_0, \sigma_1, \sigma_2}{\sigma, u, f}\right) \quad (37)$$

where p is the required p.d.f. and R and P have been previously defined.

Equations (34), (35) and (36) may be solved for σ_1 , σ_2 and u_0 with the result

$$\begin{aligned} u_0 &= \sigma u^2 / (\sigma u - f) \\ \sigma_1 &= \sigma - f/u \\ \sigma_2 &= f/u \end{aligned} \quad (38)$$

From (38) we calculate J to be

$$J = \sigma / (\sigma u - f) \quad (39)$$

The result is thus

$$\begin{aligned} p(\sigma, u, f, x) &= R\left(\sigma - \frac{f}{u}, \frac{\sigma u^2}{\sigma u - f}, x\right) P\left(\frac{f}{u}, L-x\right) \frac{\sigma}{\sigma u - f} \quad ; \quad \sigma > \frac{f}{u} > 0 \\ &= 0 \quad \frac{f}{u} < 0 \quad \text{or} \quad \sigma < \frac{f}{u} \end{aligned} \quad (40)$$

With a sufficient amount of effort one can derive an equation resembling a Fokker-Planck equation satisfied by p , but the results for L finite or infinite differ from each other. The author has been unable to arrive at these equations from first principles or to determine whether or not these equations together with certain boundary conditions constitute an appropriate formulation of the problem. The equation in question contains $\frac{\partial p}{\partial x}$ but not $\frac{\partial^2 p}{\partial x^2}$ and the association of such an equation with two point boundary conditions seems inappropriate. On the other hand there does not seem to be any reasonable second-order Fokker-Planck equation satisfied by p .

Chief of Naval Research Department of the Navy Washington 25, D.C. Attn: Code 138 (2)	Commanding Officer Office of Naval Research Branch Office 495 Summer Street Boston 10, Massachusetts (2)	Commanding Officer DM Branch Office John C. Weaver Library Building 86 East Randolph Street Chicago 11, Illinois (1)	Commander U.S. Naval Proving Grounds Dahlgren, Virginia (1)	Superintendent Naval Ordnance Washington 25, D.C. (1)	Commander Naval Ordnance Test Station Yuma, California (1)	Commander Naval Ordnance Test Station 3600 S. Fort Hill Boulevard Pomona 8, California Attn: Structures Division (1)
Commanding Officer Office of Naval Research Branch Office 316 Broadway New York 13, N.Y. (1)	Commanding Officer Office of Naval Research Branch Office 1000 E. Green Street Pasadena, California (1)	Commanding Officer Office of Naval Research Branch Office 1000 Geary Street San Francisco, California (1)	Commanding Officer and Director Naval Engineering Experiment Station Annapolis, Maryland (1)	Superintendent Naval Postgraduate School Monterey, California (1)	Mr. E.L. Engstrom, Secretary Holding Research Council of The Engineering Foundation 39 W. 39th Street New York 18, New York (8)	Commandant Marine Corps Schools Quantico, Virginia Attn: Director, Marine Corps Development Center (1)
Commanding Officer Office of Naval Research Navy No. 100, Fleet Post Office New York, N.Y. (25)	Director Naval Research Laboratory Washington 25, D.C. Attn: Tech. Div. Office (4)	Director Naval Research Laboratory Washington 25, D.C. Attn: Code 6800 (1)	Commanding General U.S. Air Force Washington 25, D.C. Attn: Research and Development Division (1)	Commander U.S. Air Force Res. of Technol. Wright-Patterson Air Force Base Dayton, Ohio (1)	Director of Intelligence U.S. Air Force Washington 25, D.C. Attn: Chief, Appl. Mechanics Div. (Air Targets Division) (1)	Prof. Walter T. Danks School of Engineering and Architecture Howard University Washington 1, D.C. (1)
Director Naval Research Laboratory Washington 25, D.C. Attn: Code 6805 (1)	Director Naval Research Laboratory Washington 25, D.C. Attn: Code 6830 (1)	Director Naval Research Laboratory Washington 25, D.C. Attn: Code 6860 (1)	Commander Air Research and Development P.O. Box 1395 Baltimore 1, Maryland Attn: RDR (1)	U.S. Atomic Energy Commission Washington 25, D.C. Attn: Director of Research (8)		
Armed Services Technical Infor- mation Agency Arlington Hall Station Arlington 13, Virginia (5)	Office of Technical Services Department of Commerce Washington 25, D.C. (1)	Office of the Secretary of Defense Research and Development Div. The Pentagon Washington 25, D.C. Attn: Technical Library (1)	Director National Bureau of Standards Washington 25, D.C. Attn: Division of Mechanics (1)	Director National Bureau of Standards Washington 25, D.C. Attn: Engineering Mechanics Section (1)	Director National Bureau of Standards Washington 25, D.C. Attn: Aircraft Structures (1)	
Chief, Armed Forces Special Weapons Project The Pentagon Washington 25, D.C. Attn: Tech. Div. (1)	Office, Secretary of the Army Department of the Army Washington 25, D.C. Attn: Army Library (1)	Chief of Staff Department of the Army Washington 25, D.C. Attn: Development Branch (R and S Div.) (1)	Director National Bureau of Standards Washington 25, D.C. Attn: Division of Mechanics (1)	Director National Bureau of Standards Washington 25, D.C. Attn: Engineering Mechanics Section (1)	Director National Bureau of Standards Washington 25, D.C. Attn: Aircraft Structures (1)	
Chief of Staff Department of the Army Washington 25, D.C. Attn: Research Branch (R and S Div.) (1)	Chief of Staff Department of the Army Washington 25, D.C. Attn: Special Weapons Branch (R and S Div.) (1)	Office, Chief of Engineers Department of the Army Washington 25, D.C. Attn: ESO-M Library Br., Adm. Serv. Div. (1)	Commander, U.S. Coast Guard 1300 B Street, N.W. Washington 25, D.C. Attn: Chief, Testing and Naval Structures Division (1)	U.S. Maritime Administration General Administration Office Bldg. Washington 25, D.C. Attn: Division of Preload Design (1)	N.A.S.A. 1200 S Street, N.W. Washington 25, D.C. Attn: Loads and Structures Division (1)	
Office, Chief of Engineers Department of the Army Washington 25, D.C. Attn: ESO-M Engr. Div., Civil Works (1)	Office, Chief of Engineers Department of the Army Washington 25, D.C. Attn: ESO-M Planning Div., Civil Works (1)	Office, Chief of Engineers Department of the Army Washington 25, D.C. Attn: ESO-M Pres. Comm. Br., Engr. Div., Mil. Comm. (1)	Director Langley Aeronautical Lab. Langley Field, Virginia Attn: Structures Division (8)	Director Naval Postgraduate School Monterey, California (1)	Civil Aeronautics Administration Department of Commerce Washington 25, D.C. Attn: Chief, Airframe and Equipment Branch (1)	
Office, Chief of Engineers Department of the Army Washington 25, D.C. Attn: ESO-M Structures Br., Engr. Div., Mil. Comm. (1)	Office, Chief of Engineers Department of the Army Washington 25, D.C. Attn: ESO-M Engr. Div., Engr. R and S Div. (1)	Commanding Officer Engineer Research Development Laboratory Fort Belvoir, Virginia (1)	National Science Foundation 1200 S Street, N.W. Washington 25, D.C. Attn: Engineering Sciences Division (1)	National Academy of Sciences 2100 Constitution Avenue Washington 25, D.C. Attn: Technical Director, Com- on Ships' Structural Design (1)	Professor Igon S. Sioda Fritz Engineering Lab. Lehigh University Bethlehem, Pennsylvania (1)	
Office, Chief of Ordnance Department of the Army Washington 25, D.C. Attn: Research and Technical Branch (Ord R and S Div.) (1)	Office, Chief of Ordnance Department of the Army Washington 25, D.C. Attn: Research and Technical Division (1)	Commanding Officer Veterans Aeronautics Department of the Army Attn: Laboratory Division (1)	Professor R.L. Mappin Department of Aeronautical Eng. Massachusetts Institute of Technology Cambridge 39, Massachusetts (1)	Professor R.L. Mappin Department of Civil Engineering Columbia University New York 27, N.Y. (1)	Professor R.L. Mappin Department of Civil Engineering Columbia University New York 27, N.Y. (1)	
Commanding Officer Frydberg Arsenal Frydberg, Pennsylvania Attn: Laboratory Division (1)	Office of Ordnance Research 2127 Myrtle Drive Dale Station Washington 25, D.C. Attn: Div. of Eng. Sciences (1)	Commanding Officer Signal Laboratory Fort Monmouth, New Jersey Attn: Components and Materials Branch (1)	Professor C.J. Carver Pierce Hall Harvard University Cambridge 38, Massachusetts (1)	Professor Herbert Dorevich Northwestern University Evanston, Illinois (1)	Professor D.C. Bruckner Division of Engineering Brown University Providence 12, Rhode Island (1)	
Director Naval Research Station P.O. Box 411 Vicksburg, Mississippi Attn: Library (1)	Chief, Bureau of Ships Department of the Navy Washington 25, D.C. Attn: Code 300 (1)	Chief, Bureau of Ships Department of the Navy Washington 25, D.C. Attn: Code 307 (1)	Professor A.C. Bragman Department of Aeronautical Engineering Purdue University Lafayette, Indiana (1)	Professor V. Flinn Department of Mechanical Engineering Stanford University Stanford, California (1)	Professor J.H. Gossard Department of Mechanical Engineering Stanford University Stanford, California (1)	
Chief, Bureau of Ships Department of the Navy Washington 25, D.C. Attn: Code 372 (1)	Chief, Bureau of Ships Department of the Navy Washington 25, D.C. Attn: Code 300 (1)	Chief, Bureau of Ships Department of the Navy Washington 25, D.C. Attn: Code 307 (1)	Professor L.H. Gossard Engineering Department Station University of Minnesota Minneapolis, Minnesota (1)	Professor R. Bortner The Technological Institute Northwestern University Evanston, Illinois (1)	Professor R. Bortner The Technological Institute Northwestern University Evanston, Illinois (1)	
Chief, Bureau of Ships Department of the Navy Washington 25, D.C. Attn: Code 372 (1)	Chief, Bureau of Ships Department of the Navy Washington 25, D.C. Attn: Code 300 (1)	Chief, Bureau of Ships Department of the Navy Washington 25, D.C. Attn: Code 307 (1)	Professor R.L. Hoff, Head Division of Aeronautical Eng. Stanford University Stanford, California (1)	Professor J. Kumpner Dept. of Aeronaut. Eng., Appl. Sci. Pennsylvania State Univ. University Park, Pa. (1)	Professor R.L. Langhaar Department of Theoretical and Applied Mechanics University of Illinois Urbana, Illinois (1)	
Chief, Bureau of Aeronautics Department of the Navy Washington 25, D.C. Attn: DM-3 (1)	Chief, Bureau of Aeronautics Department of the Navy Washington 25, D.C. Attn: DM-3 (1)	Chief, Bureau of Aeronautics Department of the Navy Washington 25, D.C. Attn: DM (1)	Professor R.M. Lee Division of Applied Mathematics Stanford University Stanford, California (1)	Professor George M. Lee Director of Research Researcher Polytechnic Institute Troy, New York (1)	Mr. M.M. Lomax Department of Research 3600 Colburn Road San Antonio 6, Texas (1)	
Chief, Bureau of Ordnance Department of the Navy Washington 25, D.C. Attn: No (1)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D.C. Attn: No (1)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D.C. Attn: No (1)	Professor R.J. Mindlin Department of Civil Engineering Columbia University New York 27, N.Y. (1)	Dr. J. Mead 134 Cherry Valley Road Pittsburgh 26, Pennsylvania (1)	Professor Paul H. Mephi Department of Engineering University of California Berkeley, California (1)	
Chief, Bureau of Ordnance Department of the Navy Washington 25, D.C. Attn: SP (1)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D.C. Attn: Code D-310 (1)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D.C. Attn: Code D-310 (1)	Professor William A. Nash Department of Engineering Mech. University of Florida Gainesville, Florida (1)	Professor R.H. Munn Department of Civil Engineering University of Illinois Urbana, Illinois (1)	Professor R.H. Munn Department of Civil Engineering University of Illinois Urbana, Illinois (1)	
Chief, Bureau of Ordnance Department of the Navy Washington 25, D.C. Attn: Code D-310 (1)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D.C. Attn: Code D-310 (1)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D.C. Attn: Code D-310 (1)	Professor V. Prager Brown University Providence 12, Rhode Island (1)	Professor R. S. Stein Department of Mechanical Engineering Massachusetts Institute of Technology Cambridge 39, Massachusetts (1)	Professor R. S. Stein Department of Mechanical Engineering Massachusetts Institute of Technology Cambridge 39, Massachusetts (1)	
Chief, Bureau of Ordnance Department of the Navy Washington 25, D.C. Attn: Code D-310 G (1)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D.C. Attn: Code D-310 (1)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D.C. Attn: Code D-310 (1)	Prof. Bernard V. Shaffer Dept. of Naval Engineering New York University University Heights New York 23, New York (1)	Professor R.H. Stein Department of Civil Engineering University of Illinois Urbana, Illinois (1)	Professor R.H. Stein Department of Civil Engineering University of Illinois Urbana, Illinois (1)	
Commanding Officer and Director David Taylor Model Basin Washington 1, D.C. Attn: Code 647 (1)	Commanding Officer and Director David Taylor Model Basin Washington 1, D.C. Attn: Code 700 (1)	Commanding Officer and Director David Taylor Model Basin Washington 1, D.C. Attn: Code 700 (1)	Professor A.S. Volozin Department of Civil Engineering University of Illinois Urbana, Illinois (1)	Professor R.H. Stein Department of Civil Engineering University of Illinois Urbana, Illinois (1)	Dr. John F. Smith Department of Engineering University of California Los Angeles, California (1)	
Commander U.S. Naval Ordnance Laboratory White Oak, Maryland Attn: Technical Library (8)	Commander U.S. Naval Ordnance Laboratory White Oak, Maryland Attn: Tech. Evaluation Dept. (1)	Director Naval Ordnance Laboratory New York Naval Arsenal Brooklyn 1, New York (1)	Mr. Martin S. Seldin, Vice President Southwest Research Institute 1370 Colburn Road San Antonio, Texas (1)	Prof. J.B. Smith Dept. of Civil Engineering University of Illinois Urbana, Illinois (1)	Professor R.H. Stein Department of Civil Engineering University of Illinois Urbana, Illinois (1)	
Office-in-Charge Naval Air Engineering Research and Dev. Lab., U.S. Naval Comm. Division Center Fort Monmouth, California (8)	Director Naval Air Engineering Research and Dev. Lab., U.S. Naval Comm. Division Center Fort Monmouth, California (1)	Office-in-Charge Naval Air Engineering Research and Dev. Lab., U.S. Naval Comm. Division Center Fort Monmouth, California (1)	Prof. R.P. Harrington, Head Dept. of Aeronautical Engineering University of Illinois Urbana, Illinois (1)	Prof. R.P. Harrington, Head Dept. of Aeronautical Engineering University of Illinois Urbana, Illinois (1)	Professor R.H. Stein Department of Civil Engineering University of Illinois Urbana, Illinois (1)	
			Commander Wright-Patterson AFB, Ohio Attn: WMSD (1)	Commander Wright-Patterson AFB, Ohio Attn: WMSD (1)	Legislative Reference Service Washington 25, D.C. Attn: Mr. S. Bush (1)	