


AD610595

STRUCTURAL STUDIES OF INORGANIC OXIDIZERS

QUARTERLY REPORT NO. 2
M.R.I. Project No. 2790-C
Contract No. AF 04(611)-10215

1 October 1964 - 31 December 1964

Sponsored by
ADVANCED RESEARCH PROJECTS AGENCY
Propellant Chemistry Office
Washington, D. C. 20301
ARPA Order No. 24

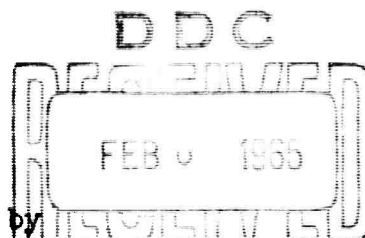

Monitored by
Air Force Systems Command
Research and Technology Division
ROCKET PROPULSION LABORATORY
Edwards, California



MIDWEST RESEARCH INSTITUTE

425 VOLKER BOULEVARD/KANSAS CITY, MISSOURI 64110/AC 816 LO 1-0202

COPY	2	OF	3	181
HARD COPY			\$. 2 . 00	
MICROFICHE			\$. 0 . 50	

ARCHIVE COPY

26 P

STRUCTURAL STUDIES OF INORGANIC OXIDIZERS

Quarterly Report No. 2
M.R.I. Project No. 2790-C
Contract No. AF 04(611)-10215

1 October 1964 - 31 December 1964

Sponsored by
ADVANCED RESEARCH PROJECTS AGENCY
Propellant Chemistry Office
Washington, D. C. 20301
ARPA Order No. 24

Monitored by
Air Force Systems Command
Research and Technology Division
ROCKET PROPULSION LABORATORY
Edwards, California

PREFACE

This program has been conducted under the general supervision of Mr. R. L. Hughes, Head, Physical and Inorganic Section. Dr. F. I. Metz, Principal Chemist is project leader; Dr. F. E. Welsh, Associate Chemist, has been responsible for the EPR analysis; Dr. W. B. Rose and Dr. John Nebgen are responsible for preparation and purification of materials and the visible-ultraviolet and infrared spectroscopic studies. Mr. J. Hennon has been assisting in all phases of the program. The Air Force Project Monitor is Lt. Eugene A. Irene (RPCL). This report has been prepared by project personnel.

Approved for:

MIDWEST RESEARCH INSTITUTE



F. V. Morriss, Director
Chemistry Division

28 January 1965

TABLE OF CONTENTS

	<u>Page No.</u>
I. Introduction	1
II. Technical Accomplishments	1
A. Preparation and Purification of Materials	1
B. Ultraviolet-Visible Absorption Spectrum of Liquid OF_2	4
C. Infrared Studies	14
D. Electron Paramagnetic Resonance	15
III. Future Work	21

I. INTRODUCTION

The compounds of interest in this study of the structure of inorganic oxidizers are: OF_2 , O_2F_2 , O_3F_2 , O_4F_2 , NF_3 , N_2F_4 , N_2F_2 and N_3F . Each of these compounds is a potential source of O-F or N-F ionic species. The object of the present program is the investigation of stable ions, such as NF_4^+ , NF_2^+ and OF^+ .

The experimental approach to structural studies has been the assumption that the ions will exist in solution. A suitable solvent system for the detection of O-F or N-F ions is the oxidizer itself. The present study has, therefore, been concerned with the analysis of ion or radical species present in the pure liquid oxidizers and in the liquid systems: $\text{OF}_2\text{-NF}_3$, $\text{O}_2\text{F}_2\text{-NF}_3$ and $\text{O}_3\text{F}_2\text{-NF}_3$.

II. TECHNICAL ACCOMPLISHMENTS

A. Preparation and Purification of Materials

The OF_2 , NF_3 and N_2F_4 used in this investigation have been obtained commercially. The O_2F_2 and O_3F_2 are prepared (by the technique described below) from premixed commercial oxygen and fluorine.

The OF_2 is bled slowly from the storage tank through an HF trap (Fig. 1) and condensed on the cold vertical column. (The HF trap removes hydrogen fluoride and silicon tetrafluoride,^{1/} while the cold column separates any carbon dioxide present.) This vertical column is at 77°K and jacketed with a Dewar. The OF_2 condenses and drains below the cold region of the tube where it refluxes and slowly distills into the first liquid nitrogen trap. Following Schoenfelder's procedure for N_2F_4 ,^{2/} the OF_2 is next chromatographed. Table I shows the relative elution times of the impurities found to be present. Prior to introduction into the system, the helium carrier gas is passed over reduced copper oxide wire at 500°C^{3/} to remove oxygen; Linde molecular sieves are used to remove water from the helium.

^{1/} A. G. Streng, Chem. Rev., **63** 607-624 (1963).

^{2/} C. W. Schoenfelder, J. of Chromatography, **7**, 281 (1962).

^{3/} K. A. C. Elliott, Can. J. of Research, **27F**, 299 (1949).

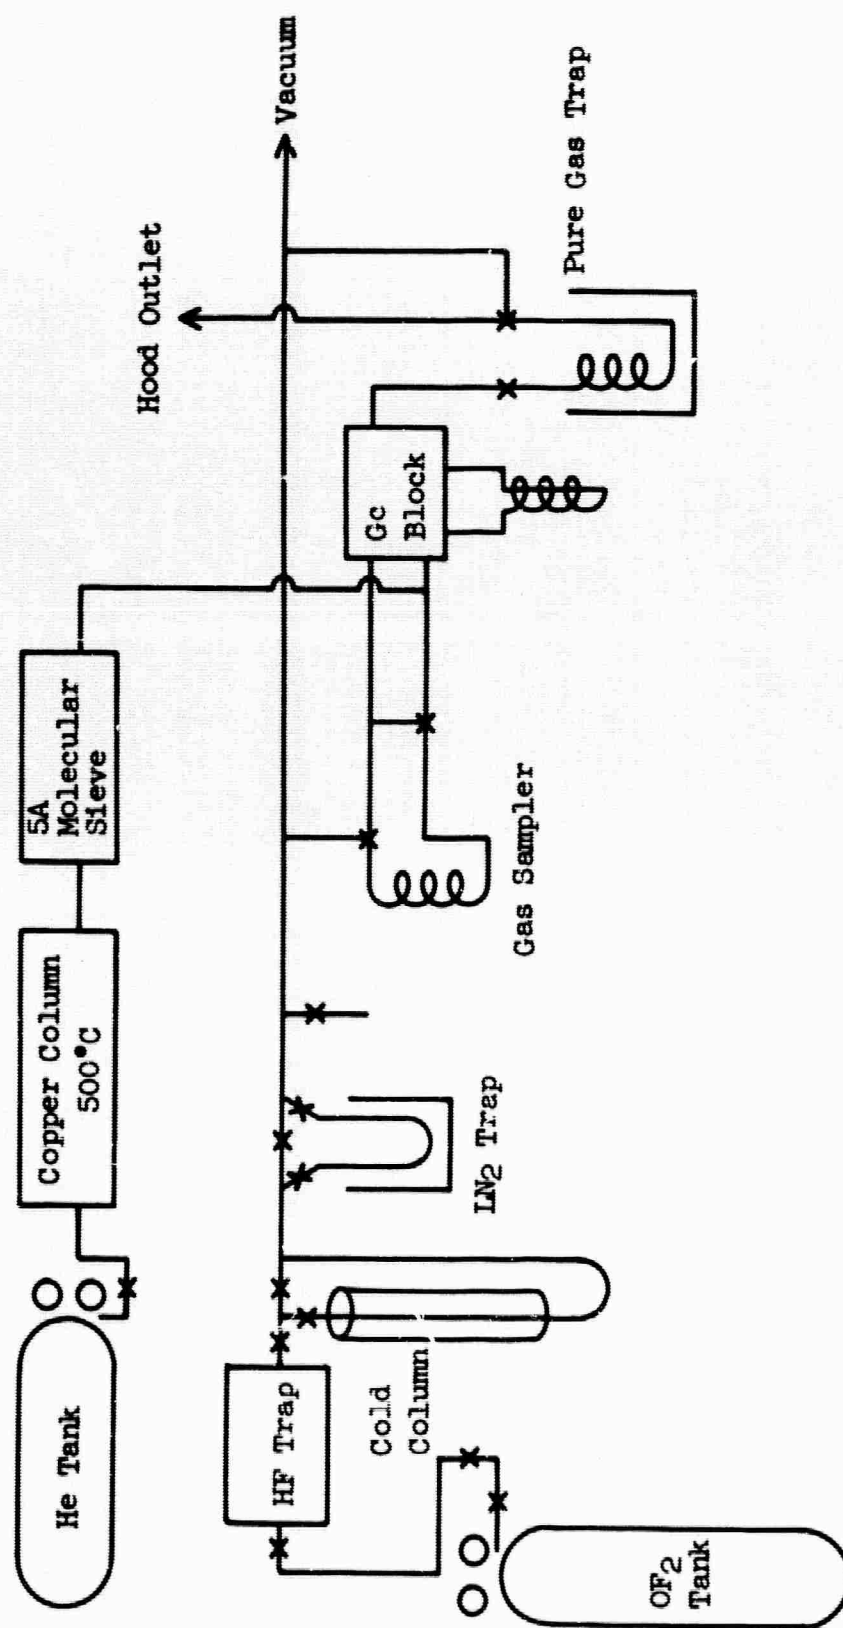


Fig. 1 - Schematic of Purification System and Vacuum Line

TABLE I

RELATIVE ELUTION TIMES ON 1/2 IN. x 10 FT. SILICA GEL COLUMN,
FLOW RATE 150 ML/MIN

<u>Substance</u>	<u>Elution Time of Maximum (min.)</u>
O ₂	4.7
N ₂	5.1
OF ₂	10.8
F ₂	13.0
CF ₄	16.5
CO ₂	120.0
SiF ₄	>120.0

O¹⁷F₂ is being prepared for studies of the isotope effect on the OF₂ EPR signal. The electrolysis process was chosen in preference to the hydrolysis of fluorine because of the reactant requirements.^{4/} Of the two processes the electrolysis requires far less water, and thus reduces the cost of preparation of the O¹⁷F₂ enriched samples.

The electrolysis technique for OF₂ production is similar to that of the "medium temperature method"^{5/} for the preparation of fluorine, with the exception of the presence of water. Oxygen difluoride, rather than fluorine, is produced at the positive electrode if water is present in the cell. The other product at this electrode is oxygen. According to Engelbrecht^{4/} the water content may be as low as 1 per cent and OF₂ is 53 per cent of the gas evolved. The low water concentration requirement thus makes the process quite acceptable for this particular reaction.

The electrolyte mixture in the cell is HF(anhydrous), 72 per cent; KF(anhydrous), ~10 per cent; and H₂O, 18 per cent. The ratio of the two components (H₂O and HF) may be varied, but Engelbrecht^{4/} states that the optimum electrolysis is obtained with approximately 75 - 80 per cent HF.

^{4/} A. Engelbrecht and E. Nachbaur, Monatshefte für Chemie, (Vienna) 90, 367 (1959).

^{5/} G. H. Cady, "Inorganic Chemistry," I, 1st Ed., H. S. Booth, Ed., McGraw-Hill, New York, N.Y. (1939), pp. 142-147.

The apparatus has been joined to the vacuum line as diagrammed in Fig. 2. The carrier gas (helium) and electrolysis products are passed through the HF trap,^{4/} a cold column (77°K)^{5/} and a U-trap immersed in liquid nitrogen.^{6/} This procedure removes HF and SiF₄ from the gas phase,^{4/} any substance that is solid at liquid nitrogen temperatures,^{5/} and those materials which are liquids at the temperature of liquid nitrogen.^{6/} It is in the U-tube that OF₂ is collected.

The electrolysis is performed at 0°C with a low positive helium pressure above the electrolyte. The current varies between 2 - 4 amps and the potential of the cell between 6 - 10 volts.

The reactor vessel and Dewar for the preparation of O₃F₂ and O₂F₂ are shown in Figs. 3 and 4, respectively. The reactor vessel is a modification of that reported by Tiner and English.^{7/} The essential modification of their design is that the Dewar joins directly to the reactor vessel. This has been shown to be an essential modification, since the transfer of the O₂F₂ and O₃F₂ (without appreciable decomposition) is extremely difficult. The O₃F₂ or O₂F₂ is removed through the bottom of the system and is collected in an appropriate storage container. The materials require no further purification.

B. Ultraviolet-Visible Absorption Spectrum of Liquid OF₂

Work is currently in progress on the ultraviolet-visible absorption spectrum of liquid OF₂. This work is being done in lieu of the flash photolysis of liquid OF₂. As was previously reported, the flash photolysis studies of liquid OF₂ were unsuccessful due to our inability to concentrate enough photolysis energy into the liquid sample.^{8/}

6/ J. W. Mellor, "Inorganic and Theoretical Chemistry," II, Longmans, Green and Company, New York, N.Y. (1946), pp. 516-517.

7/ N. A. Tiner, and W. D. English, "Compatibility of Structural Materials with High Performance of Liquid Oxidizers," Quarterly Report.

8/ Midwest Research Institute, Contract No. AF 04(611)-10215, Structural Studies of Inorganic Oxidizers, Quarterly Report No. 1, 1 July - 30 September 1964.

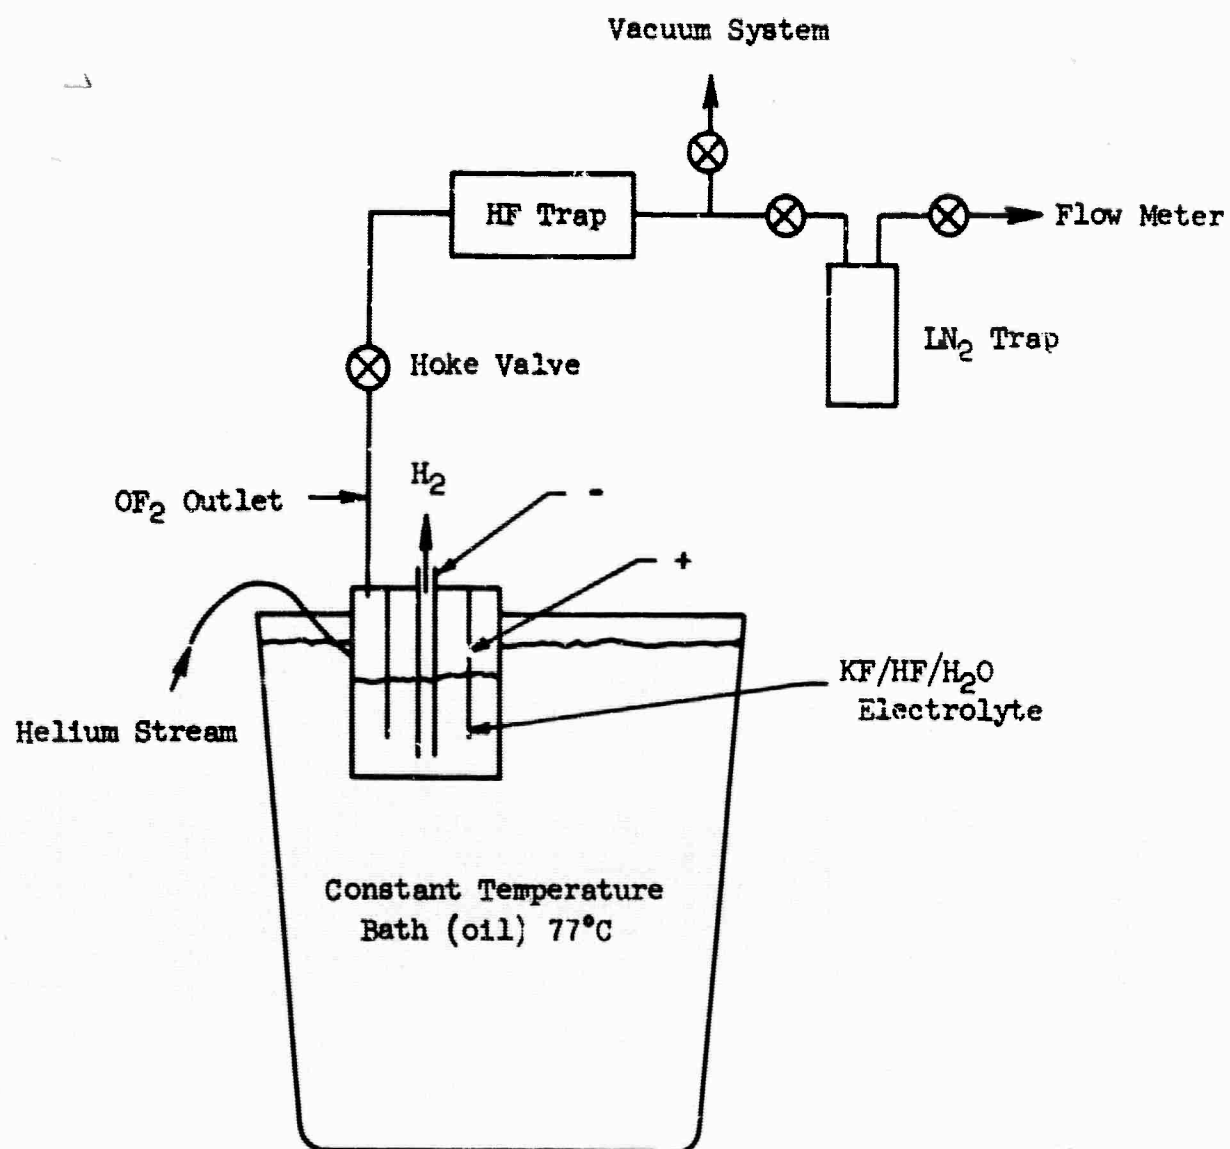


Fig. 2 - Drawing of Apparatus for Electrolytic Production of OF₂

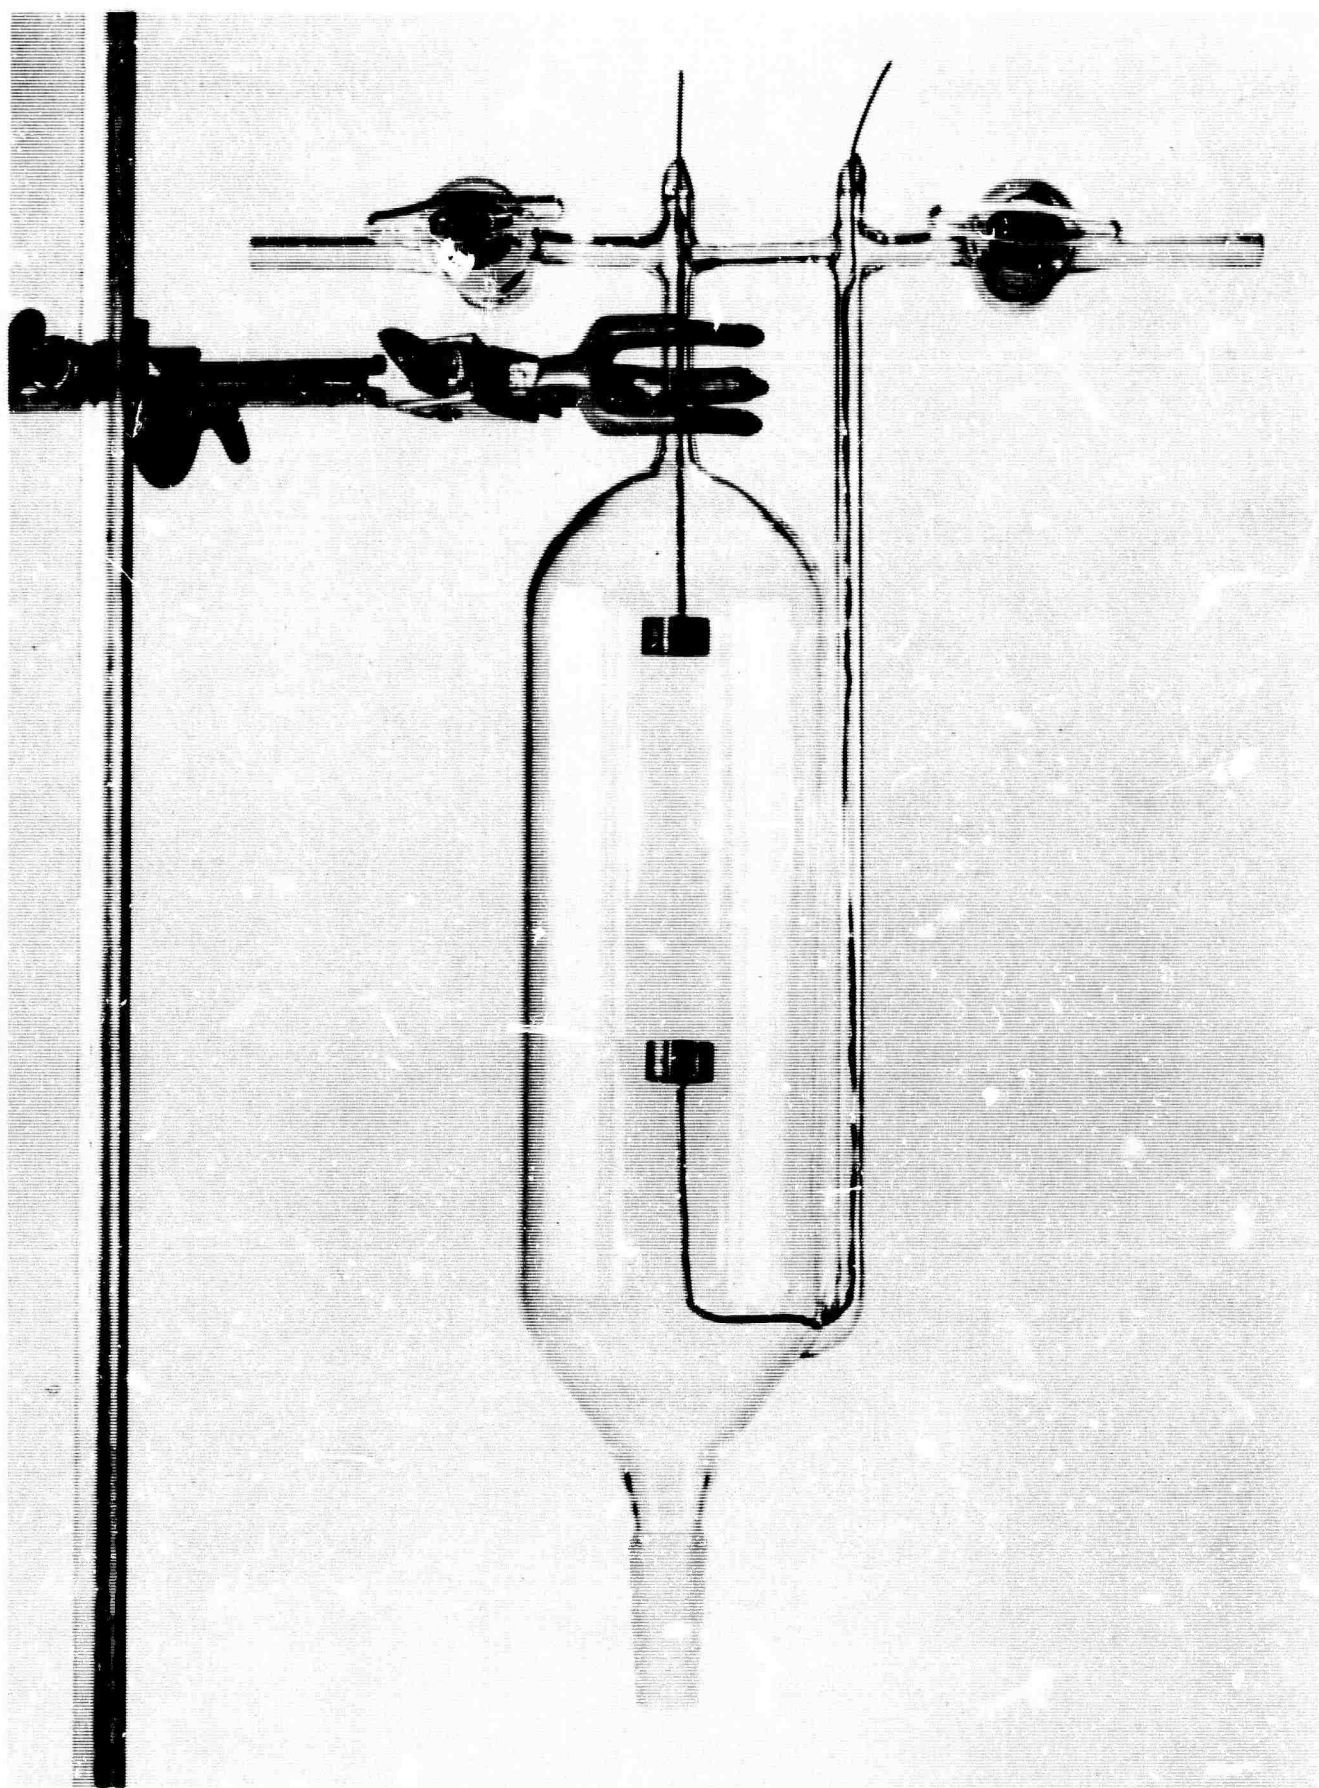


Fig. 3 - O_3F_2 (O_2F_2) Reactor Vessel

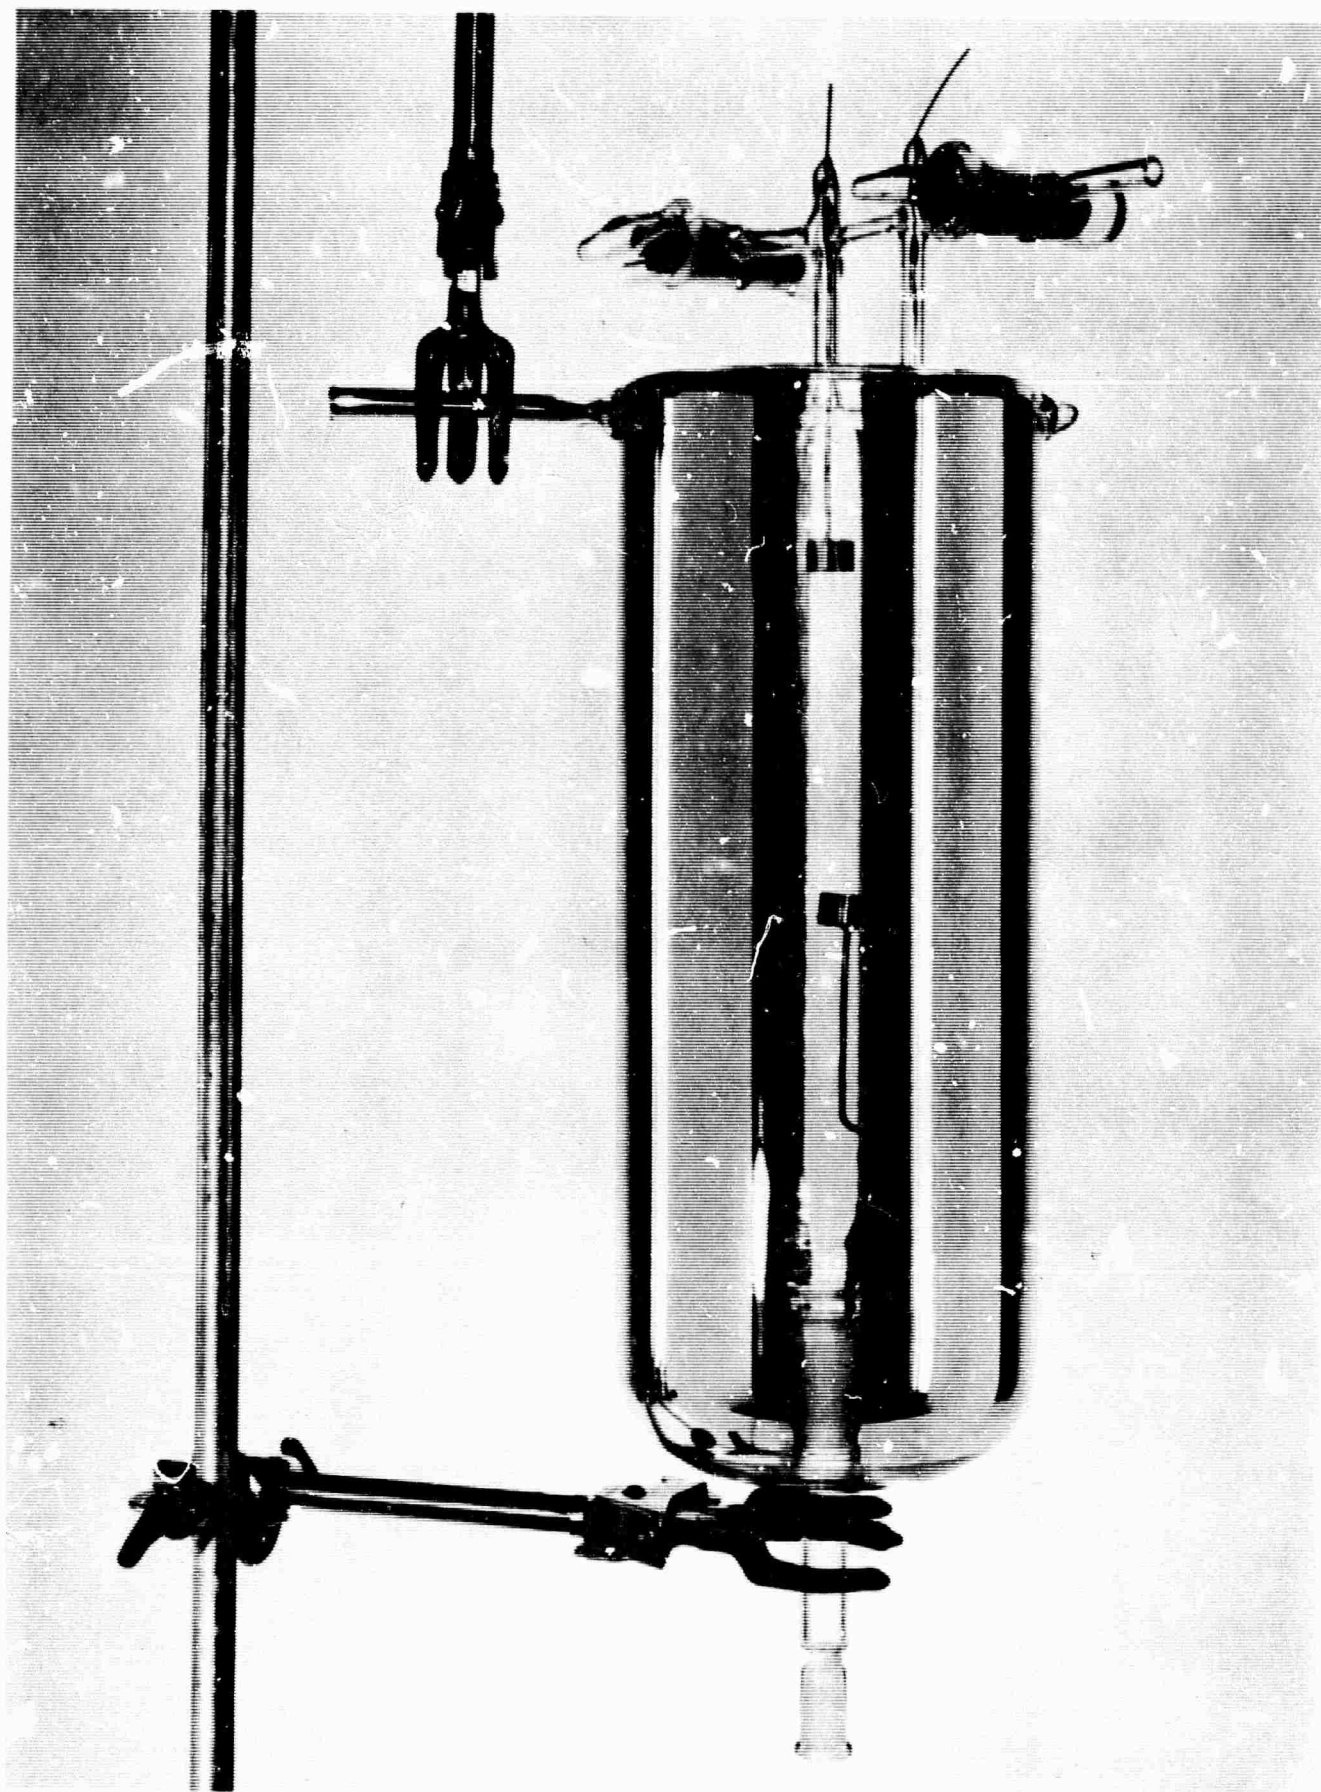


Fig. 4 - O_3F_2 Reactor Vessel and Dewar

The UV-visible spectra are taken with a Beckman DU spectrophotometer adapted to hold the low temperature cell designed for the flash photolysis studies.^{8/} The temperature of liquid OF₂ is 77°K (b.p. of liquid N₂). The readings are recorded point by point throughout the range of 220 mμ to 1,000 mμ. The readings are taken every 5 mμ from 220 to 400 mμ, every 10 mμ from 400 to 500 mμ, every 20 mμ from 500 to 600 mμ, every 25 mμ from 600 to 700 mμ, and every 50 mμ from 700 to 1,000 mμ. Currently we have one 2-mm. and one 5-mm. path cell available for use. Only the 2-mm. cell has been used so far. We will shortly have a 1-mm. cell available for studies in the far UV region (below 300 mμ).

The absorbances and extinction coefficients of OF₂ in the 2-mm. cell are presented in Table II. The extinction coefficients are calculated in the following manner

$$A = \epsilon \cdot C \cdot l, \quad (1)$$

where A = absorbance

ϵ = molar extinction coefficient in liters/mole-cm.

C = molar concentration in moles/liter

l = path length in cm. of sample absorbing light

The quantity A is experimentally measured, l is known, and C is calculated in the following manner:

$$C = \frac{\text{Density of OF}_2 \text{ at } 77^\circ\text{K}}{\text{Molecular weight OF}_2} = \frac{1787 \text{ g/liter}}{54.00 \text{ g/mole}} \quad (2)$$

Putting values into Eq. (2), the molar concentration becomes 33.1 moles/liter. Substituting this value for C into Eq. (1), and using a path length of 0.2 cm., the following expression is derived for calculating the molar extinction coefficient for liquid OF₂.

$$\epsilon = 0.151 A. \quad (3)$$

UV-VISIBLE SPECTRA OF LIQUID OF₂ IN A 2 MM. CELL

Hydrogen Lamp

The spectra were taken with a tungsten light source for the visible and near UV, and a hydrogen lamp for the UV regions. The energy output of the tungsten lamp is low in the UV region and a peak at 330 mμ was resolved. It is believed that this peak is not real, and is only a consequence of the great absorption (~97 per cent) of the sample at this point. Therefore, the absorbances below 340 mμ are thought to be invalid. Utilizing the hydrogen lamp resulted in a continuing increase in absorption in this region. Since the energy output of the hydrogen lamp is somewhat greater, it is believed that these readings are more valid. At 315 mμ, the absorption of light is greater than 99.6 per cent and thus can be assumed to be virtually complete. This complete absorption was noted throughout the rest of the spectrum down to 220 mμ. With the 1 mm. cell, it should be possible to go further into the UV before complete absorption is attained, and thus, a better understanding can be obtained of the region where the two lamps overlap.

The molar extinction coefficients for liquid OF₂ compare quite favorably to those reported by Glissmann and Schumacher^{9/} for gaseous OF₂. These authors report extinction coefficients as

$$A = \epsilon' \cdot p \cdot l, \quad (4)$$

where A and l are the same as in Eq. (1), but p is the concentration at 1 mm. Hg pressure and 0°C, and ϵ' is a "pressure dependent" extinction coefficient. Comparable values of ϵ can be calculated from the molar concentration of OF₂ at 1 mm. Hg and 0°C. If OF₂ is assumed to be a perfect gas, the molar concentration under the described conditions becomes 5.87×10^{-5} moles/liter. The extinction coefficients reported by Glissmann and Schumacher were divided by 5.87×10^{-5} to convert them into the same molar absorption coefficients as were calculated for liquid OF₂. The corrected values are reported in Table III.

The comparison of extinction coefficients is shown in Fig. 5. Only the region in which reliable values of the extinction coefficients (600 mμ to 250 mμ) is presented. The most striking feature of this graph is that the molar extinction coefficient for gaseous OF₂ and liquid OF₂ are almost the same. There are maxima of gaseous OF₂ at 421 mμ and 294 mμ. Some unresolved fine structure is present at 358 mμ in gaseous OF₂. Fine structure is totally lacking in liquid OF₂. The slope of the curve changes in the region 390 mμ to 440 mμ indicating that possibly the maxima in the gas at 421 mμ might be affecting the extinction. We have not been able to observe spectra below 315 mμ since the absorption of light is virtually complete at this point in a 2 mm path cell.

^{9/} A. Glissmann, and H. J. Schumacher, Z. Physik. Chem., B24, 328 (1934).

TABLE III
UV-VISIBLE SPECTRUM OF GASEOUS OF₂

Wavelength mμ	Extinction Coefficient Reported ϵ'	Molar Extinction Coefficient ϵ	Wavelength mμ	Extinction Coefficient Reported ϵ'	Molar Extinction Coefficient ϵ
546.0	0.08×10^{-5}	0.0136	265.5	2.28×10^{-5}	0.388
513.5	0.06×10^{-5}	0.0136	257.6	3.20×10^{-5}	0.545
491.6	0.14×10^{-5}	0.0238	253.7	4.10×10^{-5}	0.698
471.5	0.18×10^{-5}	0.0306	248.2	5.70×10^{-5}	0.970
458.0	0.23×10^{-5}	0.0392	244.7	7.70×10^{-5}	1.31
445.0	0.26×10^{-5}	0.0443	239.9	10.0×10^{-5}	1.70
435.0	0.27×10^{-5}	0.0460	237.8	12.0×10^{-5}	2.04
428.0	0.32×10^{-5}	0.0545	234.5	17.5×10^{-5}	2.98
421.0	0.35×10^{-5}	0.0596	229.5	20.0×10^{-5}	3.40
404.0	0.30×10^{-5}	0.0511	225.3	27.0×10^{-5}	4.60
399.0	0.31×10^{-5}	0.0528	223.6	30.0×10^{-5}	5.11
395.0	0.36×10^{-5}	0.0613	221.0	34.0×10^{-5}	5.79
387.0	0.51×10^{-5}	0.0868	218.1	40.0×10^{-5}	6.81
380.0	0.67×10^{-5}	0.114	216.5	42.0×10^{-5}	7.15
378.0	0.84×10^{-5}	0.143	213.7	47.0×10^{-5}	8.00
365.0	0.98×10^{-5}	0.167	211.4	52.0×10^{-5}	8.85
350.0	1.10×10^{-5}	0.187	210.2	75.0×10^{-5}	12.8
334.0	1.33×10^{-5}	0.226			
313.1	1.74×10^{-5}	0.296			
302.7	1.85×10^{-5}	0.315			
296.7	1.87×10^{-5}	0.318			
292.5	1.88×10^{-5}	0.320			
289.3	1.90×10^{-5}	0.324			
280.6	1.80×10^{-5}	0.306			
275.9	1.79×10^{-5}	0.305			
270.0	2.07×10^{-5}	0.352			

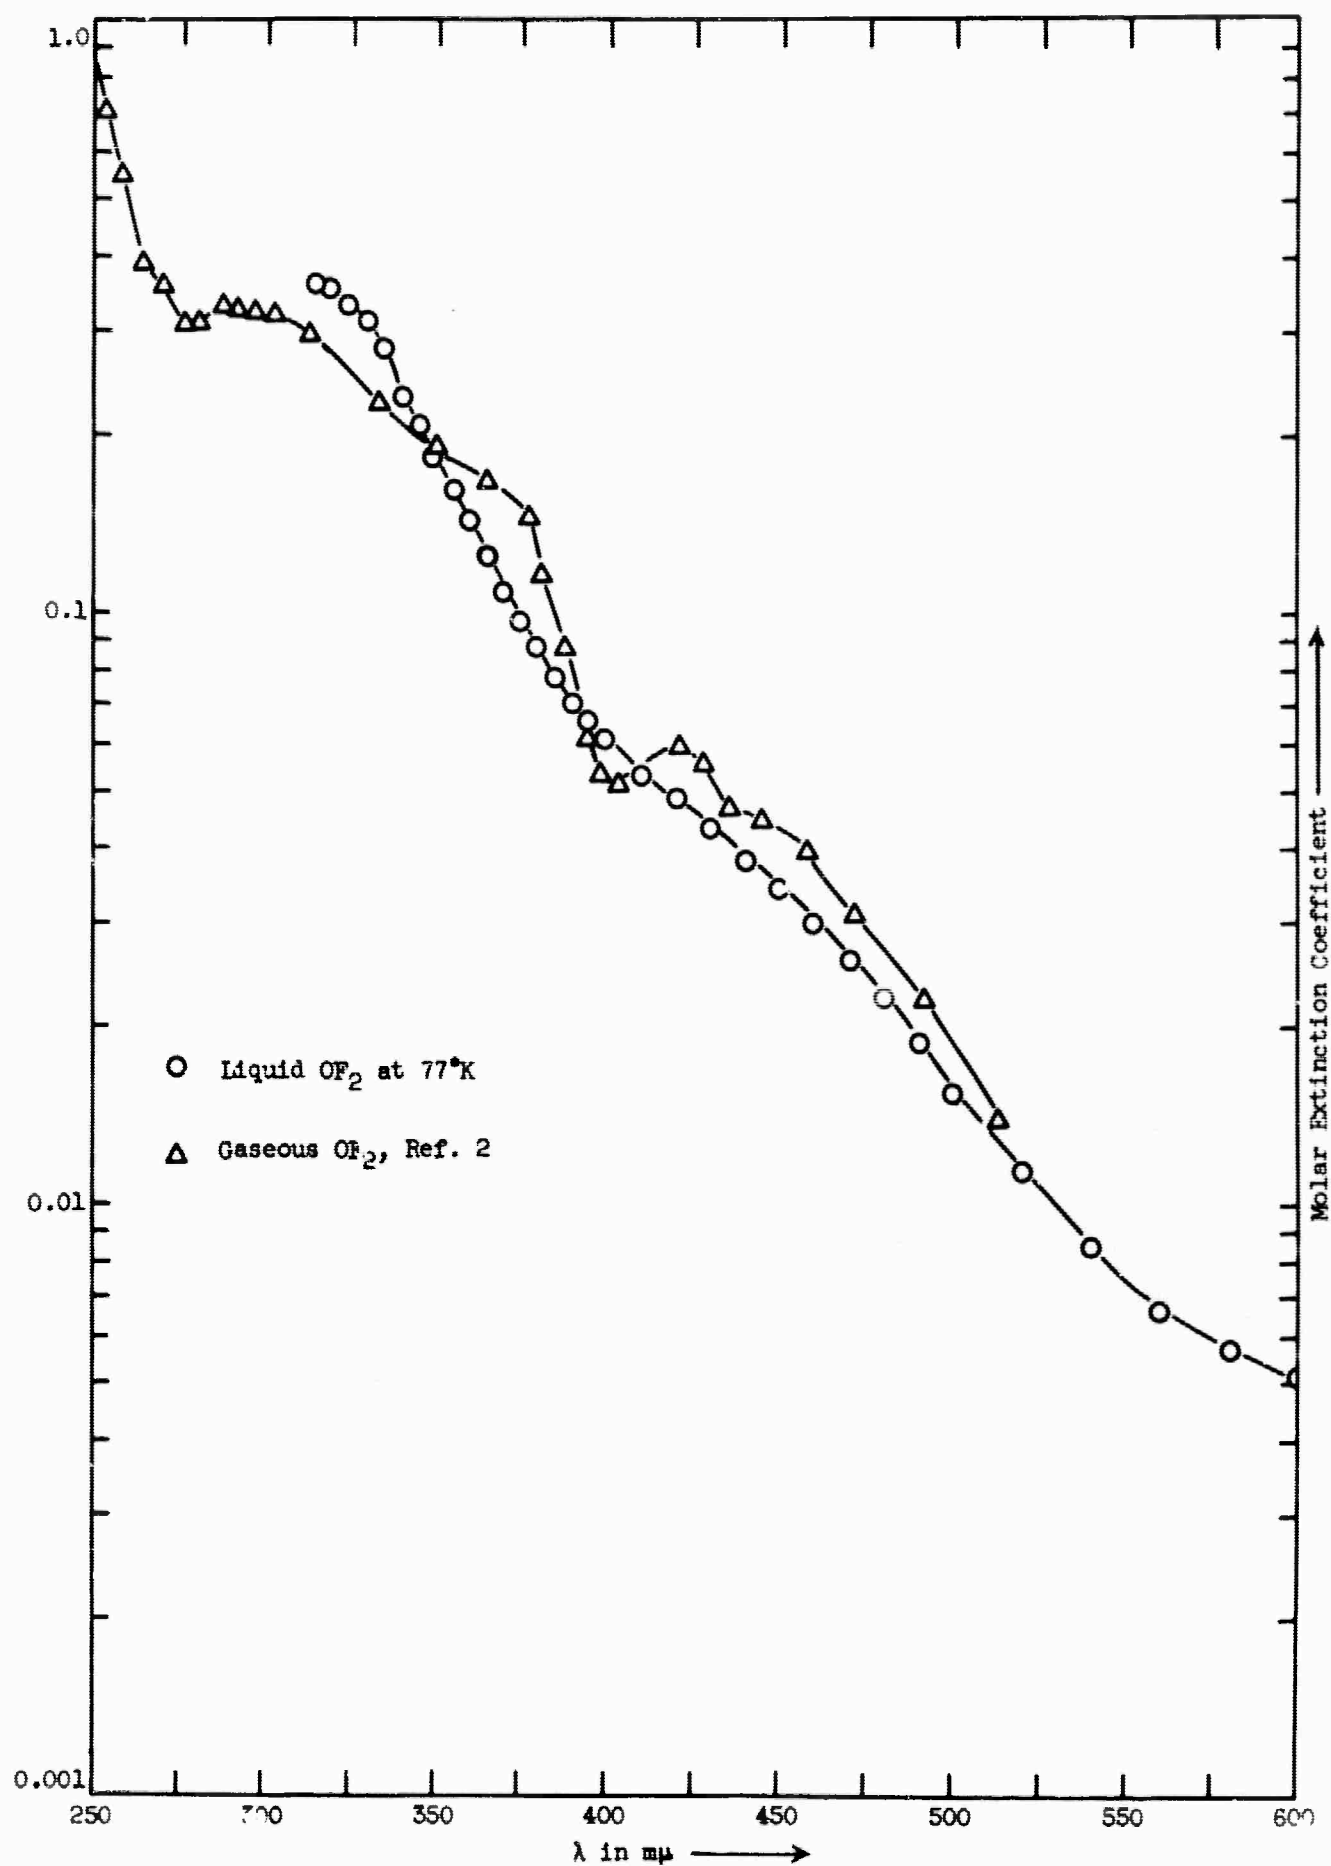


Fig. 5 - Comparison of Extinction Coefficients in Gaseous and Liquid OF_2

It may be possible to resolve some fine structure around 420 mμ if points are chosen closer together, say every 1 mμ. Similarly, changes in slope might be observed in the region between 350 and 360 mμ. With the 1 mm. cell, it may be possible to resolve fine structure below 300 mμ. On the other hand, the UV-visible spectra of liquids tend to wipe out the fine structure that appear in the spectra of gases resulting in an "envelope" of absorption. Therefore, it is equally probable that fine structure cannot be resolved in liquid OF₂.

The position where OF₂ begins to absorb light is of importance in the understanding of the photolysis reactions observed in the EPR studies. The absorption of light corresponds to electronic transitions from the ground state to an excited electronic state. This excited electronic state may be connected in some way to the appearance of radical species in photolyzed liquid OF₂. The nature of this electronic transition is not understood fully at this time.

The magnitude of the extinction coefficients is small compared to those usually associated with permitted electronic transitions. Normally, one thinks of absorption coefficients of the order of 10^3 liter mole⁻¹ cm⁻¹. Those which we observe in the liquid and have been observed in the gas^{9/} are of the order of 10^{-1} liter mole⁻¹ cm⁻¹. Low extinction coefficients are usually associated with forbidden electronic transitions. A forbidden transition is one where simple theory forbids the transition to occur. Since the probability is low that these transitions will occur, the absorption is weak and exhibits a small extinction coefficient. A forbidden transition may explain the weak maxima at 294 mμ, 358 mμ, and 421 mμ in gaseous OF₂.

A second conclusion can be drawn establishing that the color of liquid OF₂ is the same as that of gaseous OF₂. The extinction coefficients of liquid and gaseous OF₂ agree very closely. Therefore, we can say that the color is the same. The apparent difference in color (gaseous OF₂ being "colorless," and liquid OF₂ being "pale yellow") can be attributed solely to the difference in concentration of absorbing species. Both liquid and gaseous OF₂ absorb in the blue-green region of the visible spectrum which would cause the transmitted light to appear a pale yellow. Since the concentration of absorbing species in gaseous OF₂ is several orders of magnitude less than liquid OF₂, the absorption of blue and green light is not noticed by the eye.

Finally, this work is in good agreement with the observations made during flash photolysis experiments.^{8/} There we observed virtually complete absorption below 360 mμ. Above 450 mμ, the spectrographic light output diminished rapidly so that no conclusion about the visible spectra of OF₂ could be drawn.

The effect of photolysis on the spectra of liquid OF_2 is not known. The samples which we have used have been either chromatographed or have been merely put through the HF trap and distilled without further purification. Apparently there is no difference in the UV-visible spectrum of samples prepared in these two ways. We did find, in one sample in which air had been dissolved accidentally in liquid OF_2 , an increase in absorbance especially in the near infrared (700 to 1,000 $\text{m}\mu$). This increase was believed due to the O_2 species, since O_2 transitions are known in the near infrared, and since the absorbances approached those usually observed on liquid OF_2 samples with increasing time. The latter is explained by the continuous refluxing of the sample in the cell. The more volatile oxygen would reflux out and remain out of solution above the OF_2 sample. Further it was noted that if the OF_2 in the cell "bumped," the absorbance would increase again probably due to the redissolution of the O_2 . If no air was brought in with the sample, or if the sample were thoroughly degassed before recording the spectra, no significant difference between chromatographed OF_2 and distilled OF_2 could be found.

During the next quarter, we shall be concerned with studying the UV-visible spectra of liquid OF_2 in the 5 mm. and 1 mm. path cells. This study will enable us to determine more accurately the extinction coefficients. Furthermore, we will look at regions of promise using smaller intervals of wavelength. This work will resolve any fine structure present in the liquid OF_2 . We will also photolyze liquid OF_2 and determine whether any change occurs in the UV-visible spectrum.

Similar studies with NF_3 and $\text{NF}_3\text{-OF}_2$ solutions will also be undertaken.

C. Infrared Studies

The cryogenic optical Dewar and associated equipment have been previously described.^{10/} The difficulties experienced with the optical windows in the variable transmission cell have prompted us to design a simple fixed thickness cell. This cell has been fabricated from two silver support strips which enclose the AgCl windows and a spacer of a desired (1,2,5, etc. mm.) thickness. The problem of cryogenic sealing has been solved by heating the

^{10/} Contract No. AF 04(611)-9372, "Structural Studies of Inorganic Oxidizers," Annual Summary Report, Midwest Research Institute, RPL-TDR-64-98, 29 June 1964, pp. 1-8.

edge of the windows during the application of a thin strip of silver solder. In addition, the same basic design has been used in conjunction with the new, inexpensive, disposable (AgCl) cells which have recently appeared on the market. This latter design has not been too successful, since the cells are normally filled with a syringe, a technique we cannot use with the oxidizer materials.

The difficulties experienced in the transfer of OF_2 and NF_3 into the sample cells are currently being resolved and detailed results on this phase of the program will be forthcoming in the next quarter.

D. Electron Paramagnetic Resonance

EPR measurements have been made using a Varian V-4502 X-band spectrometer equipped with a 6-in. magnet and using 100 kc. field modulation. Frequencies used are of the order of 9.1 Gc. The sample tube is a standard 3.0 mm. I.D. quartz EPR tube connected to a stopcock and a male ground glass joint by means of a graded seal. Sample volumes are of the order of 0.05 ml. For measurements at 77°K, the sample tube is placed in a small quartz Dewar which is inserted into the cavity. Measurements in the range from 88°K to 138°K were made using a V-4557 variable temperature accessory. Peroxylamine disulfonate in a capillary affixed to the outside of the Dewar is used for the scan calibration and as a standard for the g-value determination. The total width of the peroxylamine disulfonate spectrum is taken to be 26.0 gauss and the g-value used is 2.0055.^{11/} The frequency is determined with a Hewlett-Packard Model X X-532-B wavemeter. The g-value of polycrystalline DPPH is determined as a check on the procedure. Concentration measurements are made relative to a Varian 0.1 per cent pitch sample in KCl, with the number of spins taken to be 3×10^{15} spins/cm length of sample. The accuracy of this value is estimated to be ± 25 per cent.^{12/} However, we are more interested in relative values of the intensities of the OF_2 spectra at various temperatures (compared to the same pitch standard) than we are in absolute values of the spin concentrations.

Photolysis studies were performed using a PEK-110-100 watt high pressure mercury arc lamp. The 3660 angstrom line was selected by means of a Bausch and Lomb second order interference filter.

^{11/} Varian Associates, EPR at Work No. 28.

^{12/} Instruction Manual for V-4502 EPR Spectrometer Systems, pp. 5-11; Varian Associates, Palo Alto, California.

A sample of chromatographed liquid OF_2 prepared in the absence of light shows a strong doublet (Fig. 6) with a splitting of 13.5 gauss when photolyzed. The linewidth is temperature dependent with values in the range of 1.6 - 3.6 gauss. The line center of the doublet has a g-value of 2.0036. The line shape closely approximates a Lorentzian curve. The spectra were examined at various modulation amplitudes and microwave power levels in order to ensure that no distortion due to over-modulation or power saturation had occurred. The intensity of the doublet increases with time during photolysis. The concentration of paramagnetic species is calculated to be on the order of 10^{16} unpaired electrons per sample, corresponding to a concentration of about 0.001 mole per cent. An EPR spectrum of chromatographed liquid OF_2 prepared in normal room light is similar to that obtained from the photolyzed samples.

The change in the signal intensity with photolysis is shown in Fig. 7 for several temperatures. The rate of formation of the radical species increases with temperature. The single intensity behavior after photolysis is strongly temperature dependent. At 77°K the signal strength increases rapidly, then more slowly after the lamp is turned off. At intermediate temperatures (87°K, 100°K, and 105°K) the intensity levels off after photolysis. The curves fall off more rapidly at 121°K in the absence of light. The decay at 77°K does not proceed to zero intensity, but usually reaches a value which persists even after several days storage of the sample in the dark. The signal may be caused to vanish, or at least reach a very low level, by vaporization and recondensation of the sample in the absence of light.

Figure 8 shows the signal strength as a function of continued photolysis at 77°K. A peak concentration is reached at about 10 min. photolysis, after which time additional photolysis produces a diminution of the signal. At 24-1/2 min., the signal strength indicates the presence of approximately 10^{12} unpaired electrons. After the lamp is extinguished, the concentration immediately increases to the order of 5×10^{13} unpaired electrons. The concentration continues to increase in the absence of light. If the sample is irradiated again, the signal level rapidly drops off to its previous low value.

In general, the intensity of the EPR resonance increases with continued photolysis, reaches a maximum, and drops off to very low levels. The intensity at the maximum is temperature dependent. In a series of experiments, spectra of OF_2 were taken during 7-1/2 min. of photolysis and afterwards in the absence of light for sufficient time to observe trends in the signal intensity. The rate of formation increases with temperature. After the photolysis lamp is turned off, the intensity may increase, level off gradually, or decrease more rapidly, depending on the temperature.

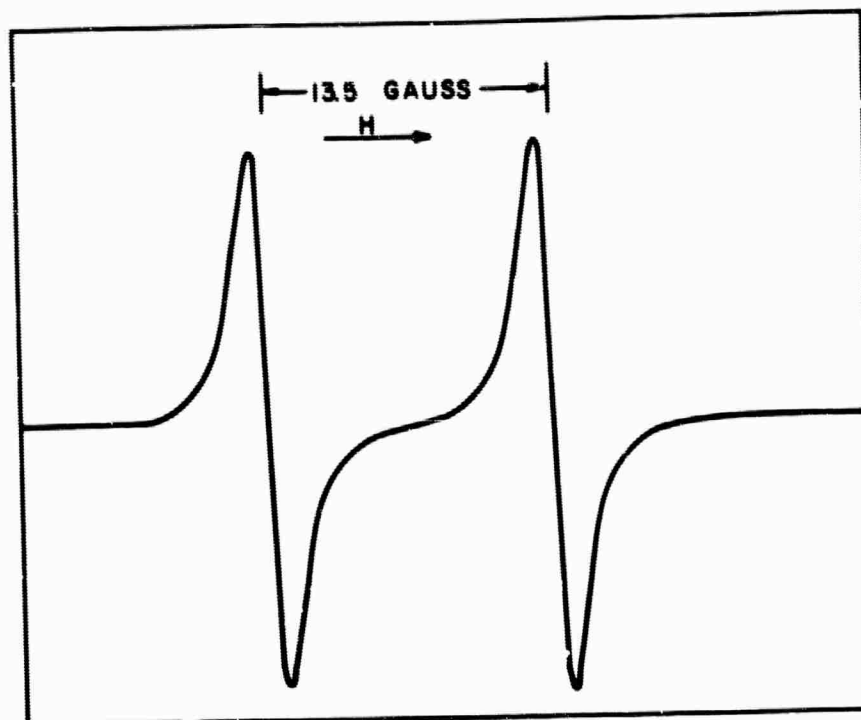


Fig. 6 - EPR Spectrum of Liquid OF_2 at 77°K

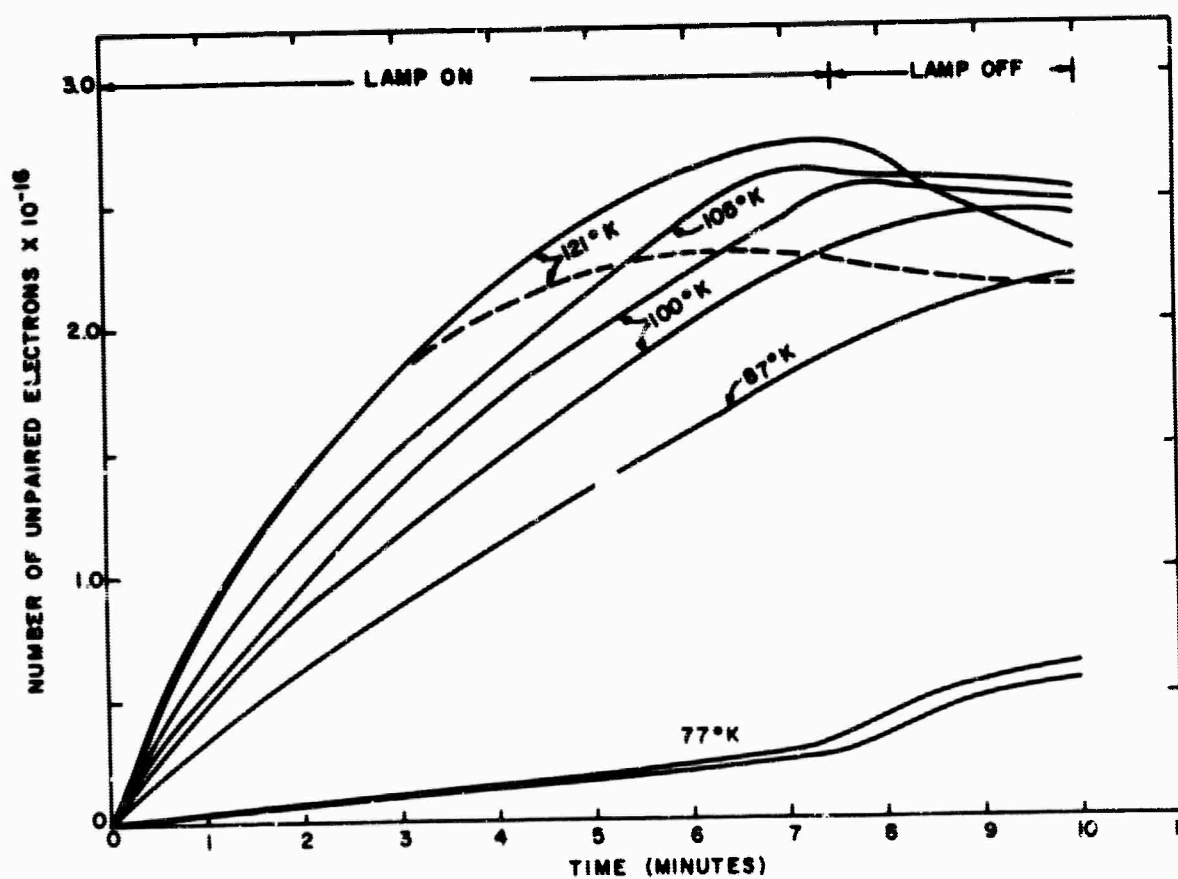


Fig. 7 - Photolysis of Liquid OF_2 as a Function of Temperature

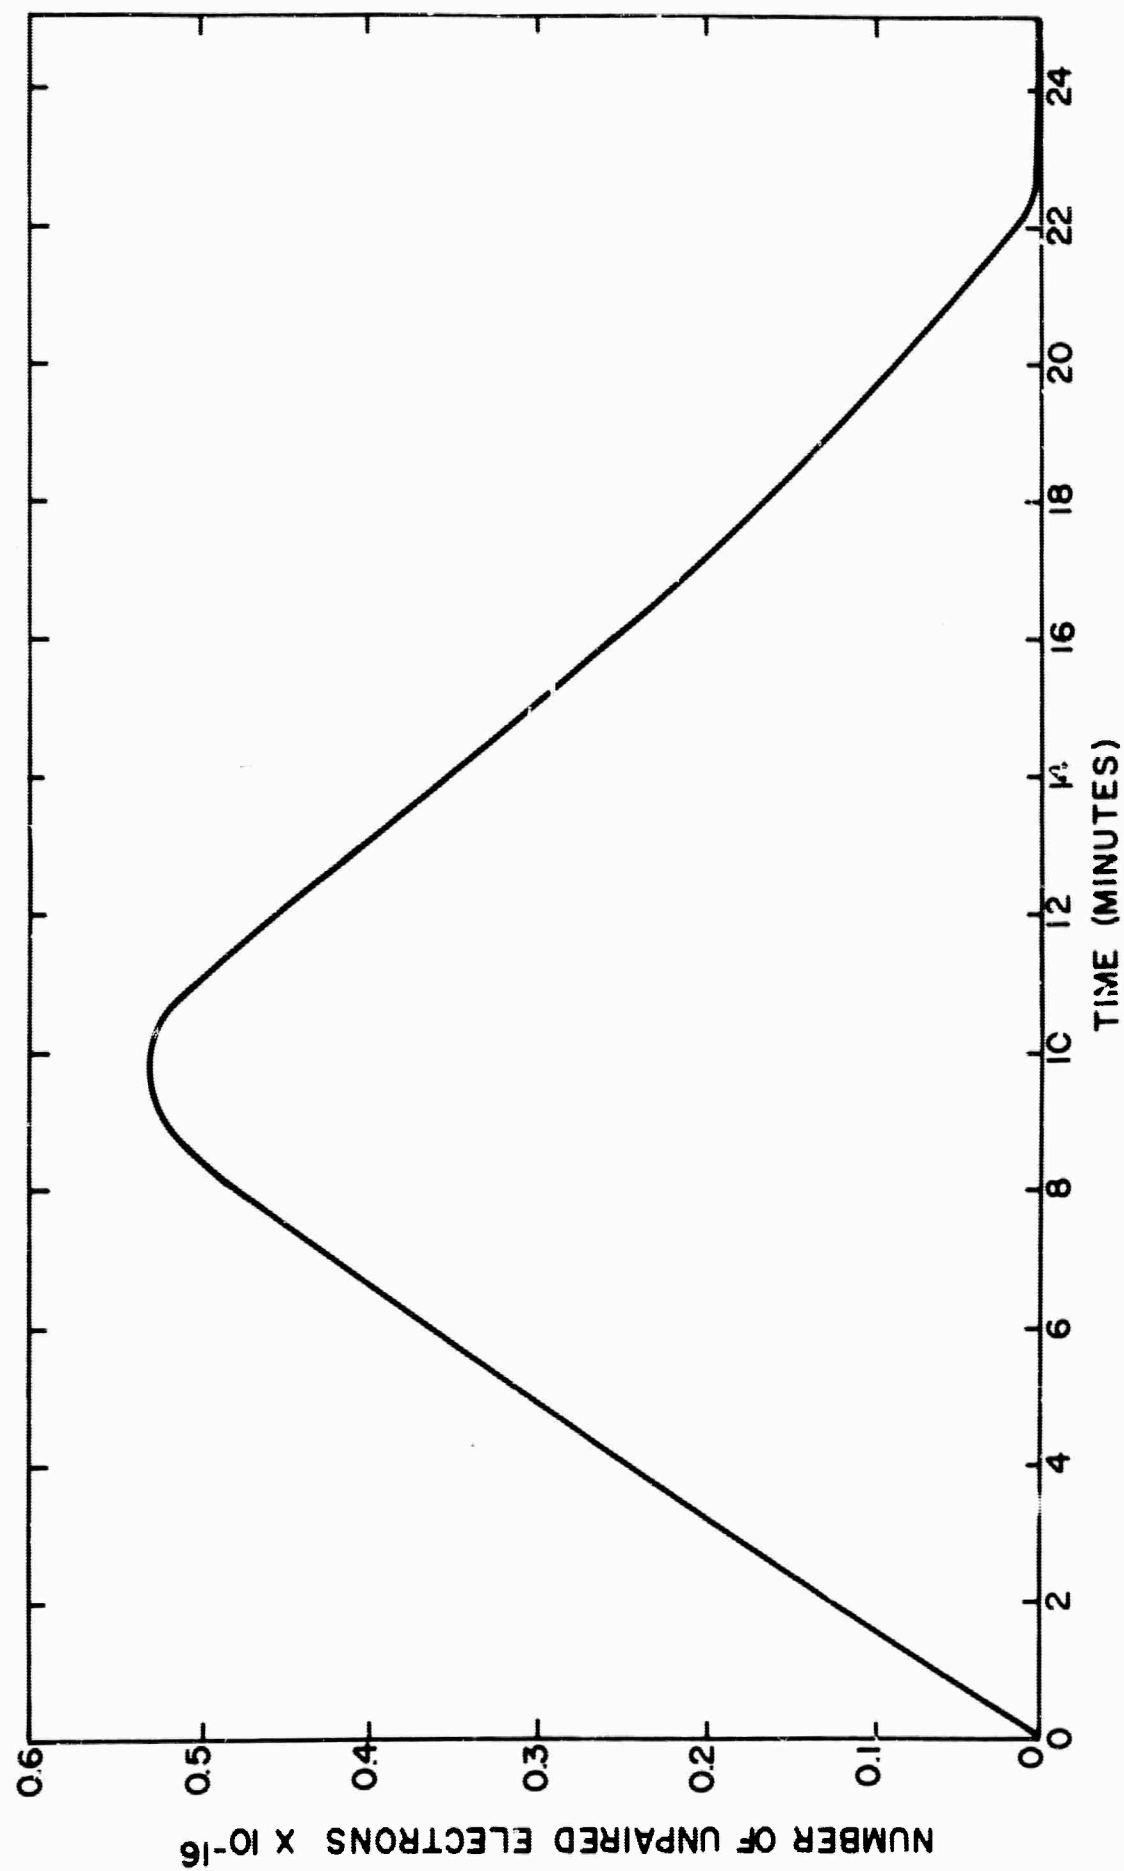


Fig. 8 - Continued Photolysis of Liquid OF_2 at 77°K

The effect of the presence of oxygen on the results of these experiments is difficult to assess at this time. However, since it is possible that oxygen may alter the mechanism of the photolytic reactions, or may broaden the EPR signal, rigorous measures described in Section A were undertaken to affect its removal.

The lack of an EPR signal in the spectra of samples chromatographed in the absence of light is strong evidence that liquid OF_2 is not paramagnetic. In addition, one would expect a hyperfine triplet from a paramagnetic species such as OF_2 rather than the observed doublet. Considering the system involved, a doublet could arise from $\text{O}_x\text{F}\cdot$ or $\text{F}\cdot$ radicals due to hyperfine interaction with the fluorine nucleus having a spin of $1/2$. However, it is to be expected that the fluorine atom would react (to form F_2) much more rapidly than would the $\text{CF}\cdot$ radical. The fluorine radical has not been observed in the condensed phase, but has been observed in the gas phase^{13/} as six well-spaced resonances around a g -value of $4/3$, with the lowest component appearing at 4159 gauss. A frequency of 9.249 Gc. was used.

We also have studied the EPR of liquid F_2 at 77°K . Tank fluorine and fluorine run through an HF trap and distilled have exhibited a weak signal with a linewidth of about 75 gauss and a g -value near 2.0. The signal strength increases with photolysis and seems to broaden. It is probable that the observed resonances in liquid fluorine are due to impurities. Present efforts to chromatograph liquid fluorine are being made more difficult by the high vapor pressure (280 mm. Hg) of F_2 at 77°K .

The small value of the coupling constant in OF_2 (13.5 gauss) is not what one would expect from hyperfine interaction of an e^- on with a fluorine radical. As a comparison, the hyperfine splitting due to two equivalent fluorine nuclei in liquid $\text{NF}_2\cdot$ is 64 ± 2 gauss.^{14/} The hyperfine interaction due to a fluorine radical should be large, since the value calculated by assuming that the unpaired electron wholly in the $2s$ orbital of the fluorine atom is 17,050 gauss.^{15/} From a consideration of the above arguments, it is quite probable that the unpaired electron species is $\text{O}_x\text{F}\cdot$.




The most obvious radical species in photolyzed OF_2 is $\text{OF}\cdot$, from the dissociation $\text{OF}_2 \xrightarrow{h\nu} \text{OF}\cdot + \text{F}\cdot$. However, we cannot uniquely identify the number of oxygens on the radical at this time. $^{17}\text{OF}_2$ is being prepared to make possible a more unambiguous identification of the paramagnetic species in photolyzed liquid OF_2 .

^{13/} N. Vanderkooi, Jr., and J. S. MacKenzie, Adv. Chem. Series, **36**, 98 (1962).

^{14/} H. E. Doorenbos and B. R. Loy, J. Chem. Phys. **39**, 2393 (1963).

^{15/} J. R. Morton, Chem. Revs., **64**, 453 (1964).

The kinetics of the photolysis reaction suggests the following as possible reactions:



As the temperature is increased, the photolysis proceeds more rapidly. More energy is available to increase the rate of reaction (1). In addition, dependent upon the temperature, reaction (1) must be able to proceed in the absence of light. Hence, the continued increase in the rate of formation at 77°K after the lamp is extinguished. Reaction (3) and/or reaction (4) are the photolytic decay schemes which compete with reaction (1) when the lamp is on. With the lamp off at 77°K, the rate of formation increases rapidly for a short while, then drops back to a lower rate. This behavior can be explained by the fact that reactions (3) and (4) are not operating in the absence of light. Of course, other slower temperature dependent decay schemes may be operating, i.e., reaction (5).

At higher temperatures, (87°K, 100°K, 105°K) the decay of the signal is slow in the absence of light. Finally, at 120°K, the signal decays more rapidly after photolysis. The rate of the decay reactions must then be both temperature and photolytically dependent.

In Fig. 8 it is seen that continued photolysis causes the signal to reach very low levels. Thus, there must be a critical concentration which allows decay processes to predominate over the formation reactions.

The EPR studies on $\text{OF}_2\text{-NF}_3$ are now in progress. No resonance signal is observed in equimolar mixtures of OF_2 and NF_3 . However, photolysis of the mixture results in an EPR signal. This signal, like that of pure OF_2 increases linearly (at a slower rate) with time during photolysis. (Photolysis of liquid NF_3 does not produce a resonance signal.) The temperature and concentration dependence of this photolytic system are being determined.

In addition, EPR studies have begun on O_2F_2 and O_3F_2 . The results from this work are not considered reliable at this time because considerable decomposition of the materials took place during the actual resonance measurements, and the materials were not prepared in the complete absence of room light. Both of these faults have been remedied and results on these materials will be presented in the next report.

III. FUTURE WORK

During the next quarter the visible-UV spectra of liquid OF_2 , NF_3 , OF_2-NF_3 , O_2F_2 , O_3F_2 and N_2F_4 will be examined. The studies will include the effect of photolysis on the spectra, and a more accurate determination of the extinction coefficients. The infrared studies will continue; the systems above will be studied.

The EPR work will also continue with the investigation of O_3F_2 , O_2F_2 and various systems (mixtures). The emphasis in these studies will be on the determination of mechanism of the observed photolytic behavior. A brief study of $^{17}OF_2$ will also be made.

DISTRIBUTION LIST

Quarterly Report No. 1, Contract No. AF 04(611)-10215

U. S. Department of the Interior 1 Bureau of Mines 4800 Forbes Avenue Pittsburgh, Pennsylvania 15213 Attn: M. M. Dolinar Repts. Librarian Explosives Research Center	Nat'l Aeronautics and Space Admin. 3 Langley Research Center Langley Air Force Base Virginia 23365 Attn: Library
Central Intelligence Agency 1 2430 E Street, N. W. Washington, D. C. 20505 Attn: OCD, Standard Dist.	Nat'l Aeronautics and Space Admin. 1 Washington, D. C. 20546 Attn: Office of Technical Information and Education Programs, Code ETL
Office of the Director of Defense 1 Research and Engineering Washington, D. C. 20301 Attn: W. E. Sheehan Office of Asst. Dir. (Chemical Technology)	Scientific and Technical 2 Information Facility P. O. Box 5700 Bethesda, Maryland 20014 Attn: NASA Representative
Nat'l Aeronautics and Space Admin. 1 Lewis Research Center 21000 Brookpark Road Cleveland, Ohio 44135 Attn: Library	Nat'l Aeronautics and Space Admin. 1 Washington, D. C. 20546 Attn: R. W. Ziem (RPS)
John F. Kennedy Space Center, NASA 1 Cocoa Beach, Florida 32931 Attn: Library	Nat'l Aeronautics and Space Admin. 1 Goddard Space Flight Center Greenbelt, Maryland 20771 Attn: Library
Nat'l Aeronautics and Space Admin. 1 Manned Spacecraft Center P.O. Box 1537 Houston, Texas 77001 Attn: Library	Defense Documentation Center 20 Cameron Station Alexandria, Virginia 22314
Nat'l Aeronautics and Space Admin. 1 George C. Marshall Space Flight Center Huntsville, Alabama 35800 Attn: Library	RTD (RTNF) 1 Bolling Air Force Base Washington, D. C.
	AFRPL (RPR) 1 Edwards, California 92523
	AFRPL (RFM) 1 Edwards, California 92523

AFFTC (FTEAT-2)	1	Commanding Officer	1
Edwards Air Force Base		Frankford Arsenal	
California 93523		Philadelphia, Pennsylvania 19137	
Office of Research Analysis (OAR)	1	Attn: Propellant and Explosives	
Attn: RRRT		Section, 1331	
Holloman Air Force Base		Commanding Officer	1
New Mexico 88330		Picatinny Arsenal	
Air Force Missile Test Center	1	Dover, New Jersey 07801	
Attn: MTBAT		Attn: Library	
Patrick Air Force Base		Commanding Officer	1
Florida 32925		Picatinny Arsenal	
Air Force Materials Laboratory	1	Liquid Rocket Propulsion Laboratory	
Wright-Patterson Air Force Base		Dover, New Jersey 07801	
Ohio 45433		Attn: Technical Library	
Attn: MAAE		U. S. Army Missile Command	4
Commanding Officer	1	Redstone Scientific Information Center	
Ballistic Research Laboratories		Redstone Arsenal, Alabama 35808	
Aberdeen Proving Ground		Attn: Chief, Document Section	
Maryland 21005		Commanding General	1
Attn: AMXBR-1		White Sands Missile Range	
Commanding Officer	1	New Mexico 88002	
Harry Diamond Laboratories		Attn: Technical Library	
Washington, D. C. 20438		Bureau of Naval Weapons	2
Attn: AMXDO-TIB		Department of the Navy	
Commanding Officer	1	Washington, D. C. 20360	
U. S. Army Research Office (Durham)		Attn: DLI-3	
Box CM, Duke Station		Bureau of Naval Weapons	2
Durham, North Carolina 27706		Department of the Navy	
Commanding Officer	1	Washington, D. C. 20360	
U. S. Army Chemical Research and		Attn: RMMP-2	
Development Laboratories		Bureau of Naval Weapons	1
Edgewood Arsenal, Maryland 21010		Department of the Navy	
Attn: Chief, Physicochemical		Washington, D. C. 20360	
Research Division		Attn: RMMP-3	

Bureau of Naval Weapons Department of the Navy Washington, D. C. 20360 Attn: RMMP-4	1	Director (Code 6180) U. S. Naval Research Laboratory Washington, D. C. 20390 Attn: H. W. Carhart	1
Bureau of Naval Weapons Department of the Navy Washington, D. C. 20360 Attn: RRRE-6	1	Director Special Projects Office Department of the Navy Washington, D. C. 20360	1
Commander U. S. Naval Missile Center Point Mugu, California 93041 Attn: Technical Library	2	Commanding Officer U. S. Naval Underwater Ordnance Station New Port, Rhode Island 02844 Attn: W. W. Bartlett	1
Commander U. S. Naval Ordnance Laboratory White Oak Silver Spring, Maryland 20910 Attn: Library	2	Aerojet-General Corporation P.O. Box 296 Azusa, California 91703 Attn: F. M. West, Chief Librarian	1
Commander U. S. Naval Ordnance Test Station China Lake, California 93557 Attn: Code 45	5	Aerojet-General Corporation 11711 South Woodruff Avenue Downey, California 90241 Attn: Florence Walsh, Librarian	1
Commander (Code 753) U. S. Naval Ordnance Test Station China Lake, California 93557 Attn: Technical Library	2	Aerojet-General Corporation F.O. Box 1947 Sacramento, California 95809 Attn: Technical Information Office	3
Superintendent U. S. Naval Postgraduate School Naval Academy Monterey, California	1	Aeronutronic Div. Philco Corp. Ford Road Newport Beach, California 92600 Attn: Dr. L. H. Linder, Manager Technical Information Dept.	1
Commanding Officer U. S. Naval Propellant Plant Indian Head, Maryland 20640 Attn: Technical Library	1	Aeroprojects, Inc. 310 East Rosedale Avenue West Chester, Pennsylvania 19380 Attn: C. D. McKinney	1
Commanding Officer Office of Naval Research 1030 E. Green Street Pasadena, California 91101	1	Aerospace Corporation P.O. Box 95085 Los Angeles, California 90045 Attn: Library-Documents	2

Allied Chemical Corporation General Chemical Division Research Laboratory P.O. Box 405 Morristown, New Jersey 07960 Attn: L. J. Wiltrakis Security Officer	1	Bell Aerosystems Box 1 Buffalo, New York 14205 Attn: T. Reinhardt	1
Amcel Propulsion Company Box 3049 Asheville, North Carolina 28802	1	The Boeing Company Aero Space Division P.O. Box 3707 Seattle, Washington 98124 Attn: R. R. Barber, Lib. Ut. Ch.	1
American Cyanamid Company 1937 W. Main Street Stamford, Connecticut 06902 Attn: Security Officer	1	Chemical Propulsion Information Agency Applied Physics Laboratory 8621 Georgia Avenue Silver Spring, Maryland 20910	3
IIT Research Institute Technology Center Chicago, Illinois 60616 Attn: C. K. Hersh Chemistry Division	1	Defense Metals Information Center Battelle Memorial Institute 505 King Avenue Columbus, Ohio 42301	1
ARO, Inc. Arnold Engineering Dev. Center Arnold Air Force Station Tennessee 37389 Attn: Dr. B. H. Goethert Director of Engineering	1	Douglas Aircraft Company, Inc. Santa Monica Division 3000 Ocean Park Boulevard Santa Monica, California 90405 Attn: Mr. J. L. Waisman	1
Atlantic Research Corporation Shirley Highway and Edsall Road Alexandria, Virginia 22314 Attn: Library	2	The Dow Chemical Company Security Section Box 31 Midland, Michigan 48641 Attn: Dr. R. S. Karpiuk 1710 Building	1
Atlantic Research Corporation Western Division 48-506 Easy Street El Monte, California Attn: H. Niederman	1	E. I. duPont deNemours and Company Eastern Laboratory Gibbstown, New Jersey 08027 Attn: Mrs. Alice R. Steward	1
Battelle Memorial Institute 505 King Avenue Columbus, Ohio 43201 Attn: Report Library, Room 6A	1	Esso Research and Engineering Co. Special Projects Unit P.O. Box 8 Linden, New Jersey 07036 Attn: Mr. D. L. Baeder	1

General Dynamics/Astronautics P.O. Box 1128 San Diego, California 92112 Attn: Library and Information Services (128-00)	1	Martin Company Baltimore, Maryland 21203 Attn: Science - Technology Library - Mail 398	1
General Electric Company Flight Propulsion Division Evendale Cincinnati, Ohio 45215	1	Minnesota Mining and Manufacturing Company 900 Bush Avenue St. Paul, Minnesota 55106 Attn: Code 0013 R & D VIA: H. C. Zeman Security Administrator	2
Hercules Powder Company Allegany Ballistics Laboratory P.O. Box 210 Cumberland, Maryland 21501 Attn: Library	1	Monsanto Research Corporation Boston Labs., Everett Station Chemical Lane Boston, Massachusetts 02149 Attn: Library	1
Hercules Powder Company Research Center Wilmington, Delaware 19899 Attn: Dr. Herman Skolnik, Manager Technical Information Division	1	New York University Dept. of Chemical Engineering New York, New York 10053 Attn: P. F. Winternitz	1
Jet Propulsion Laboratory 4800 Oak Grove Drive Pasadena, California 91103 Attn: Library (TDS) Mr. N. E. Devereux	1	North American Aviation, Inc. Space and Information Systems Division 12214 Ladewood Boulevard Downey, California 90242 Attn: W. H. Morita	1
Arthur D. Little, Inc. 15 Acorn Park Cambridge, Massachusetts 02140 Attn: W. H. Varley	1	Rocketdyne 6633 Canoga Avenue Canoga Park, California 91304 Attn: Library, Dept. 596-306	3
Lockheed Propulsion Company P.O. Box 111 Redlands, California 92374 Attn: Miss Belle Berlad Librarian	3	Rohm and Haas Company Redstone Arsenal Research Division Huntsville, Alabama 36808 Attn: Librarian	1
Marquardt Corporation 16555 Saticoy Street Box 2013 - South Annex Van Nuys, California 91404	1	Space Technology Laboratory, Inc. 1 Space Park Redondo Beach, California 90200 Attn: STL Tech. Lib. Doc. Acquisitions	2

Texaco Experiment Incorporated	1	Union Carbide Chemicals Co.	1
P.O. Box 1-T		P.O. Box 8584 (Technical Center)	
Richmond, Virginia 23202		South Charleston	
Attn: Librarian		West Virginia 25303	
		Attn: Dr. H. W. Schulz	
United Technology Center	1	United Aircraft Corporation	1
P.O. Box 358		Pratt and Whitney Florida Res. and	
Sunnyvale, California 94088		Dev. Ctr.	
Attn: Librarian		P.O. Box 2691	
Thiokol Chemical Corporation	1	W. Palm Beach, Florida 33402	
Alpha Division, Huntsville Plant		Attn: Library	
Huntsville, Alabama 35800			
Attn: Technical Director		United Aircraft Corporation	1
Thiokol Chemical Corporation	1	Corporation Library	
Alpha Division		400 Main Street	
Space Booster Plant		East Hartford, Connecticut 06118	
Brunswick, Georgia 31500		Attn: Dr. David Rix	
Thiokol Chemical Corporation	1	General Electric Company	1
Elkton Division		Apollo Support Department	
Elkton, Maryland 21921		P.O. Box 2500	
Attn: Librarian		Daytona Beach, Florida 32015	
Thiokol Chemical Corporation	1	British Defence Staff	4
Reaction Motors Division		British Embassy	
Denville, New Jersey 07834		3100 Massachusetts Avenue	
Attn: Librarian		Washington, D. C. 20008	
Thiokol Chemical Corporation	1	Attn: Scientific Information Officer	
Rocket Operations Center		VIA: Headquarters	
P.O. Box 1640		Air Force Systems Command	
Ogden, Utah 84401		Attn: SCS-41(3-1833)	
Attn: Librarian		Andrews Air Force Base	
		Washington, D. C. 20331	
Thiokol Chemical Corporation	2	Defence Research Member	4
Wasatch Division		Canadian Joint Staff (W)	
P.O. Box 524		2450 Massachusetts Avenue	
Brigham City, Utah 84302		Washington, D. C. 20008	
Attn: Library Section		VIA: Headquarters	
		Air Force Systems Command	
		Attn: SCS-41(3-1833)	
		Andrews Air Force Base	
		Washington, D. C. 20331	

Headquarters, U. S. Air Force Washington, D. C. 20330 Attn: AFRSTD	1	Pennsalt Chemicals Corporation Technological Center 900 First Avenue King of Prussia, Pennsylvania 19406	1
AFRPL (RPCL) Edwards, California 92523	2	Shell Development Company 1400 53rd Street Emeryville, California 94608	1
AFRPL (RPCS) Edwards, California 92523	1	Texaco, Inc. P.O. Box 509 Beacon, New York 12508 Attn: Dr. R. E. Conary, Manager	1
Callery Chemical Company Research and Development Callery, Pennsylvania 16024 Attn: Document Control	1	Los Alamos Scientific Laboratory University of California P.O. Box 1663 Los Alamos, New Mexico 87544	1
Chem. Research and Dev. Center FMC Corporation P.O. Box 8 Princeton, New Jersey 08540 Attn: Security Officer	1	Aerojet-General Nucleonics Foot of Fostoria Way San Ramon, California 94583 Attn: Dr. Carpenter	1
Ethyl Corporation P.O. Box 3091 Istrouma Branch Baton Rouge, Louisiana 70805	1	Purdue University Lafayette, Indiana 47907 Attn: Henry Feuer	1
Hynes Research Corporation 308 Bon Air Avenue Durham, North Carolina 27704	1	Union Carbide Corporation P.O. Box 278 Tarrytown, New York 10592 Attn: Dr. R. G. Breckenridge, Dir.	1
Walter Kidde Company 675 Main Street Belleville, New Jersey 07109 Attn: Security Librarian	1	Peninsular Chem. Research, Inc. P.O. Box 14318 University Station Gainesville, Florida 32003 Attn: Security Officer	1
Olin Mathieson Chemical Corp. Research Library 1-K-3 275 Winchester Avenue New Haven, Connecticut 06511 Attn: Mail Control Room Miss Laura M. Kajuti	1	RTD (RTTG) Bolling Air Force Base Washington, D. C. 20332	1

Director 6
Advanced Research Projects Agency
Washington, D. C. 20301

Arnold Eng. Development Center 1
Attn: AEOIM
Air Force Systems Command
Tullahoma, Tennessee 37389

Midwest Research Institute 1
Attn: Chemistry Division File

Midwest Research Institute 3
Attn: Dr. Florence Metz

Midwest Research Institute 1
Attn: Library