

AD 730363

AD

USAAVLABS TECHNICAL REPORT 70-74D
STABILITY AND CONTROL OF HELICOPTERS
IN STEEP APPROACHES

VOLUME IV
DERIVATIVES AND TRANSFER FUNCTIONS
FOR THE AH-56A COMPOUND HELICOPTER,
AND DATA ON LOW-ALTITUDE TURBULENCE REPRESENTATION

By

Julian Wolkevitch

John A. Hoffman

May 1971

EUSTIS DIRECTORATE

U. S. ARMY AIR MOBILITY RESEARCH AND DEVELOPMENT LABORATORY
FORT EUSTIS, VIRGINIA

CONTRACT DAAJ02-69-C-0004


MECHANICS RESEARCH, INC.

LOS ANGELES, CALIFORNIA

Approved for public release;
distribution unlimited.



Reproduced by
NATIONAL TECHNICAL
INFORMATION SERVICE
Springfield, Va. 22151



205

**Best
Available
Copy**



**DEPARTMENT OF THE ARMY
U. S. ARMY AIR MOBILITY RESEARCH & DEVELOPMENT LABORATORY
EUSTIS DIRECTORATE
FORT EUSTIS, VIRGINIA 23604**

The report has been reviewed by the Eustis Directorate, U. S. Army Air Mobility Research and Development Laboratory, and is judged to be technically sound.

The primary effort is to examine the behavior of rotary-wing aircraft in steep approaches, from the standpoint of aerodynamics and dynamics, and the resultant effects on human and automatic control.

The report is presented in four volumes. Volume I summarizes the main results of the study. Volume II describes the MOSTAB program. Volume III presents derivatives and transfer functions for the YHC-1A tandem-rotor helicopter and the S-58 single-rotor helicopter. Volume IV presents derivatives and transfer functions for the AH-56A compound helicopter and data on low-altitude turbulence representation.

The program was conducted under the technical management of Mr William D. Vann, Aeromechanics Division.

DISCLAIMERS

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission, to manufacture, use, or sell any patented invention that may in any way be related thereto.

DISPOSITION INSTRUCTIONS

Destroy this report when no longer needed. Do not return it to the originator.

ACCESSION for	
CFSTI	WHITE SECTION ☒
DDG	BUFF SECTION ☐
UNAN. GED.	☐
JUSTIFICATION.....	
BY.....	
DISTRIBUTION/AVAILABILITY CODES	
DIST.	AVAIL. and/or SPECIAL
A	23

Project 1F162204A142
Contract DAAJ02-69-C-0004
USAAVLABS Technical Report 70-74D
May 1971

STABILITY AND CONTROL OF HELICOPTERS IN
STEEP APPROACHES

VOLUME IV

DERIVATIVES AND TRANSFER FUNCTIONS FOR THE AH-56A COMPOUND HELICOPTER,
AND DATA ON LOW-ALTITUDE TURBULENCE REPRESENTATION

MRI REPORT NO. 2284-1

By

Julian Wolkovitch
John A. Hoffman

NOT REPRODUCIBLE

Prepared by

Mechanics Research, Inc.
Los Angeles, California

for

EUSTIS DIRECTORATE
U.S. ARMY AIR MOBILITY RESEARCH AND DEVELOPMENT LABORATORY
FORT EUSTIS, VIRGINIA

Approved for public release; distribution unlimited.

ABSTRACT

Derivatives and transfer functions are presented for the Lockheed AH-56A helicopter. The flight conditions considered include airspeeds of from 0 to 100 knots and descent rates from 0 to 28.8 fps. A critical review is given of published data on low-altitude turbulence.

UNCLASSIFIED
Security Classification

4. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
HELICOPTER STABILITY AND CONTROL HELICOPTER AERODYNAMICS HELICOPTER STABILITY DERIVATIVES HELICOPTER TRANSFER FUNCTIONS V/STOL STEEP APPROACH VORTEX-RING STATE SIKORSKY S-58 STABILITY AND CONTROL LOCKHEED AH-56A STABILITY AND CONTROL BOEING-VERTOL YHO-1A STABILITY AND CONTROL MOSTAB DIGITAL COMPUTER PROGRAM						

UNCLASSIFIED
Security Classification

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Mechanics Research, Inc. 9841 Airport Blvd. Los Angeles, California		2a. REPORT SECURITY CLASSIFICATION Unclassified	
		2b. GROUP NA	
3. REPORT TITLE STABILITY AND CONTROL OF HELICOPTERS IN STEEP APPROACHES VOLUME IV. DERIVATIVES AND TRANSFER FUNCTIONS FOR THE AH-56A COMPOUND HELICOPTER, AND DATA ON LOW-ALTITUDE TURBULENCE REPRESENTATION.			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Final Report			
5. AUTHOR(S) (First name, middle initial, last name) Julian Wolkovitch John A. Hoffman			
6. REPORT DATE May 1971		7a. TOTAL NO. OF PAGES 203	7b. NO. OF REFS 5
8a. CONTRACT OR GRANT NO. DAAJ02-69-C-0004		9a. ORIGINATOR'S REPORT NUMBER(S) USAAVLABS Technical Report 70-74D	
A. PROJECT NO. 1F162204A142		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) MRI Report No. 2284-1	
10. DISTRIBUTION STATEMENT Approved for public release; distribution unlimited.			
11. SUPPLEMENTARY NOTES Volume IV of a 4-volume report		12. SPONSORING MILITARY ACTIVITY Eustis Directorate U.S. Army Air Mobility R&D Laboratory Fort Eustis, Virginia	
13. ABSTRACT Derivatives and transfer functions are presented for the Lockheed AH-56A helicopter. The flight conditions considered include airspeeds of from 0 to 100 knots and descent rates from 0 to 28.8 fps. A critical review is given of data on low altitude turbulence. ()			

DD FORM 1473

REPLACES DD FORM 1473, 1 JAN 64, WHICH IS OBSOLETE FOR ARMY USE.

UNCLASSIFIED

Security Classification

NOTICE TO USERS

Portions of this document have been judged by the NTIS to be of poor reproduction quality and not fully legible. However, in an effort to make as much information as possible available to the public, the NTIS sells this document with the understanding that if the user is not satisfied, the document may be returned for refund.

If you return this document, please include this notice together with the IBM order card (label) to:

National Technical Information Service

U.S. Department of Commerce

Attn: 952.12

Springfield, Virginia 22151

FOREWORD

This research was performed by Mechanics Research, Inc. under United States Army Aviation Materiel Laboratories*Contract DAAJ02-69-C-0004, Project 1F162204A142. The AVIABS Project Monitor was Mr. W. D. Vann.

The authors express their gratitude to Mr. Vann and Mr. Robert P. Smith of AVIABS for constant encouragement and assistance. The authors thank their colleagues at Mechanics Research, Inc. who contributed to this report: in particular, Mr. H. B. Amey and Mr. D. W. Lochtie who gave significant technical support.

Published as received
by NTIS
Largely illegible

*Redesignated Eustis Directorate, U.S. Army Air Mobility Research and Development Laboratory

TABLE OF CONTENTS

	Page
ABSTRACT	iii
FOREWORD	v
LIST OF SYMBOLS	viii
 PART VII. LOCKHEED AH-56A DERIVATIVES AND TRANSFER FUNCTIONS . .	1
COMPUTER PRINT-OUT DATA	3
PART VIII. LOW-ALTITUDE TURBULENCE REPRESENTATION	183
LITERATURE CITED	193
DISTRIBUTION	194

LIST OF SYMBOLS

A	Constant relating σ_w and V
A_{1s}	Lateral cyclic pitch, radians
B_{1s}	Longitudinal cyclic pitch, radians
C	Constant relating σ_u and U^*
C_p	Specific heat coefficient, BTU's/°F-lb
f	Reduced frequency = nZ/V cycles
g	Gravitational constant, ft/sec ²
h^1	Function relating σ_w and V
H	Heat flux, BTU's/ft ² -sec
k	Von Karman constant
K_h	Eddy conductivity $-H/C_p \frac{\partial \theta}{\partial Z}$, ft ² /sec
K_m	Eddy viscosity $U^{*2} / \left(\frac{\partial v}{\partial Z} \right)$, ft ² /sec
L	Scaling length, ft
L	Rolling moment or acceleration, as appropriate
L^1	$= IK_h/K_m$, ft
M	Pitching moment or acceleration, as appropriate
n	Frequency, cycles per second
N	Yawing moment or acceleration, as appropriate
p	Exponent in wind speed-altitude relationship
P	Roll rate

Q	Pitch rate
R	Yaw rate
R_f	Flux Richardson number-ratio of shear energy to buoyant energy
R_1	Gradient Richardson number $\frac{g}{\theta} \frac{\partial \theta}{\partial z} / \left(\frac{\partial U}{\partial r_3} \right)^2$
r_3	Vertical coordinate of distance vector, ft
S	Spectral density
T	Temperature, °F
T^*	Scaling temperature $-H/kU^*C_p\rho$, °F
T_e	Trimmed iteration column vector
U	Trimmed velocity along x-axis
U^*	Friction velocity, $\sqrt{\tau/\rho}$, ft/sec
U, V	Mean wind amplitude, ft/sec
u	Perturbation velocity along x-axis
V	Trimmed velocity along y-axis
v	Perturbation velocity along y-axis
W	Trimmed velocity along z-axis
w	Perturbation velocity along z-axis
x	x-axis force or acceleration, as appropriate
y	y-axis force or acceleration, as appropriate
z	z-axis force or acceleration, as appropriate

Z	Elevation, ft
Z_o	Roughness length, ft
β	Constant relating V and Z
β^1	$= \beta K_h / K_m$
θ	Potential temperature of air, °F
θ_o	Potential temperature at Z_o , °F
θ_{op}	Pusher propeller collective pitch, radian
θ_{otr}	Tail rotor collective pitch, radians
ρ	Density of air, lb/ft ³
σ	Standard deviation
τ	Horizontal surface stress, lb/ft ²
ϕ	Bank angle, radians
θ	Pitch angle, radians
ψ	Function relating V and Z

Special Subscripts

u	Subscript for longitudinal wind direction
v	Subscript for lateral wind direction
w	Subscript for lateral wind direction

VII. LOCKHEED AH-56A DERIVATIVES AND TRANSFER FUNCTIONS

INTRODUCTION

For brevity, this section describes only those features of the AH-56A derivative and transfer function print-out which differ from the corresponding printouts for the S-58 given in Part VI. It is therefore essential for the reader to at least skim through Part VI before reading further.

Derivatives, residues, eigenvectors, and transfer functions were calculated for the AH-56A in the flight conditions indicated below. As with the S-58, V_{TAS} is the total airspeed, not the horizontal component.

TABLE I	AH-56A FLIGHT CONDITIONS; SPEED AND DESCENT RATE				
V_{TAS} Knots	0	20	40	60	100
Rate of	9.6	9.6	9.6	9.6	9.6
Descent	19.2	19.2	19.2	19.2	19.2
fps	28.8	28.8	28.8	28.8	28.8

TABLE II	AH-56A FLIGHT CONDITIONS; SPEED AND DESCENT ANGLE				
V_{TAS} Knots	0	20	40	60	100
Descent	-90	-16.5	-8.05	-5.41	-3.25
Angle	-90	-33.5	-16.5	-10.9	-6.52
Degrees	-90	-58.3	-25.1	-16.6	-9.81

This Part presents derivatives for all the above flight conditions. In addition, the 28.8-fps vertical descent case and the 40-knot case at the same descent rate ($\gamma = -25.1$ degrees) were re-run without the cyclic variation of tip losses. Space limitations precluded a full presentation of all the transfer functions, residues, and eigenvectors for all of these cases. Therefore, only the following data are presented here.

- (1) Derivatives for all the above flight conditions
- (2) Transfer function numerators relating u , v , w , p , q , and r (measured in stability axes) to all control inputs for speeds of 0, 20, 40, 60, and 100 knots in level flight and at 28.8 fps rate of descent. The control inputs include longitudinal and lateral cyclic pitch, main rotor collective pitch, tail rotor collective pitch, and collective pitch of the pusher propeller.
- (3) Eigenvalues (transfer function denominator roots) for the above flight conditions. Eigenvalues for the remaining flight condition are included in Chapter VIII, Table XXII, which compares all the eigenvalues.

Residues and eigenvectors of particular significance are given in Chapter VIII, but none are included in this Part, although all the residues were calculated at each flight condition.

Explanation of the Print-Out Format

The print-out format is identical to that of Part VII with the following exception:

The controls are denoted as follows:

$C(1) = \theta_o =$ main rotor collective pitch, radians

$C(2) = B_{1s} =$ longitudinal cyclic pitch, radians

$C(3) = A_{1s} =$ lateral cyclic pitch, radians

$C(4) = \theta_{otr} =$ tail rotor collective pitch, radians

$C(5) = \theta_{op} =$ pusher propeller collective pitch, radians

The trimmed iteration column vector, as for the S-58, contains $C(1)$, $C(2)$, $C(3)$, $C(4)$, θ , and ϕ in that order.

Note that the comment of Part VI regarding the root-locus gains also applies to the AH-56A data of this Part.

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAB-B DERIVATIVES
CASE 1 SPEED= 67.8 FT/SEC. H-DOT=-28.8 FT/SEC, GAMMA=-25.1 DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.1109+03	.1309+01	-.7964+02	-.1307+03	.1745+04	.3392+03
Y	-.1465+01	-.3566+02	-.1032+01	-.1392+04	-.1243+03	.1372+04
Z	-.1610+03	-.1139+01	-.1824+03	.7995+02	-.6143+03	.6523+03
L	-.1420+03	-.4584+02	-.9569+02	-.7471+05	.9128+04	.2501+05
M	.1676+03	-.3230+02	-.8663+02	-.7067+04	-.8791+05	.5979+04
N	-.1962+03	.5116+03	-.2264+03	.2466+05	-.2201+04	-.3236+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.4000-01	.2279-03	-.8829-01	-.2404+02	.2321+01	.1096+02
Y	.2108-01	.6738-04	.4606-01	-.1896+01	-.3018+02	.8645-00
Z	.2604-01	.4635-03	.5536-01	.1367+02	-.1962-00	-.6225+01
L	.2723+01	.2199-02	.5967+01	.2448+04	-.1228+04	-.1113+04
M	.1695+01	-.1010-02	.3695+01	.1250+04	.2986+04	-.5699+03
N	-.1354+01	-.1592-02	-.2965+01	-.1198+04	.5821+03	.5551+03

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.5069+05	-.5488+04	.1995+05	-.9903+02	-.8801+04
Y	-.1533+04	.1459+05	.6296+04	.6863+04	.1455-02
Z	-.1074+06	.3158+04	.9953+04	.1088+02	.4171+04
L	-.9136+04	.5989+06	.2532+06	-.8069+05	-.4287+04
M	.1839+06	.2724+06	-.6766+06	-.1345+04	.1301+05
N	.6210+05	-.2901+06	-.9290+05	-.1918+06	-.9397+03

THE INERTIA TENSOR

.1899+05	-.1278-05	.1642+05
-.1278-05	.5000+05	.6769-06
.1642+05	.6769-06	.4751+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.6169+02	-.2794-08	.2814+02	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1295-00	-.1217-02	.1142-01	.1407-01	-.1077-01	-.4171-02
----------	-----------	----------	----------	-----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= -.4387-00 PHI= -.4607-02
AIRCRAFT INERTIAL SPEED= .6780+02

NOT REPRODUCIBLE

DENOMINATOR CHARACTERISTIC ROOTS

REAL PART	IMAGINARY PART
-.6279-01	.0000
-.9903+01	.0000
-.1894+01	.0000
-.4087-01	.2621-00
-.4087-01	-.2621-00
-.2328-00	.7577-00
-.2328-00	-.7577-00
-.5257-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NUMERATORS

(NOTE- NUMERATOR ROOTS LESS THAN 1.0E-7 TIMES THE
LARGEST NUMERATOR ROOT ARE NOT INCLUDED IN THE BODF GAIN).

X(1)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .1043+03

BODE GAIN = -.1031+04

ROOTS

REAL PART	IMAGINARY PART
-.3151-07	.0000
-.9925+01	.0000
-.2481-00	.8153-00
-.2481-00	-.8153-00
-.4914-00	.6966-00
-.4914-00	-.6966-00
-.7523-00	.0000
-.6864-01	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .3403+01

BODE GAIN = .5134+02

ROOTS

REAL PART	IMAGINARY PART
.8965-02	.0000
-.5841+02	.0000
-.7281-00	.7000
-.6550-01	.3195-00
-.6550-01	-.3195-00
-.2621+01	.1821+01
-.2621+01	-.1821+01
.0000	.0000
-.3801-08	.0000
.0000	.0000

NOT REPRODUCIBLE

X(3)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .2219+03

BODE GAIN = .4364+03

ROOTS

REAL PART	IMAGINARY PART
-.9540-01	.0000
-.9972+01	.0000
-.2181-00	.0000
-.2300-00	.7472-00
-.2300-00	-.7472-00
-.9535-00	.0000
.4454-00	.0000
-.1735-07	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .3979+01

BODE GAIN = .1587-04

ROOTS

REAL PART	IMAGINARY PART
.3666-05	.0000
-.1288+01	.0000
-.6900-00	.0000
-.2692-00	.1593-00
-.2692-00	-.1593-00
.2260+01	.0000
-.6182-01	.3844-00
-.6182-01	-.3844-00
.0000	.0000
.0000	.0000

X(5)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.3750+01

BODE GAIN = -.4252-01

ROOTS

REAL PART	IMAGINARY PART
.1342-01	.0000
-.1062+02	.0000
-.2452-00	.7604-00
-.2452-00	-.7604-00
-.5212-00	.0000
-.7422-01	.3231-01
-.7422-01	-.3231-01
.0000	.0000
.1341-06	.0000
-.5402-07	.0000

X(6)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.2879+01

BODE GAIN = .7001-05

ROOTS

REAL PART	IMAGINARY PART
.7585-06	.0000
-.1190+00	.2957-00
-.1190+00	-.2957-00
.5699-01	.3391-00
.5699-01	-.3391-00
-.2290+01	.2200+01
-.2290+01	-.2200+01
-.7243-00	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .1548+02

BODE GAIN = -.1284+04

ROOTS

REAL PART	IMAGINARY PART
-.2089-06	.0000
-.3325-00	.0000
-.1013+00	.0000
-.1829-00	.7536-00
-.1829-00	-.7536-00
-.8066+01	.0000
-.1035+01	.3581+01
-.1035+01	-.3581+01
.0000	.0000
.0000	.0000

X(2)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= $-.2928+02$

BODE GAIN = $.2788+04$

ROOTS

REAL PART	IMAGINARY PART
$-.2403-01$	$.2522-00$
$-.2403-01$	$-.2522-00$
$-.2526-00$	$.0000$
$-.7362+02$	$.0000$
$-.2180+01$	$.0000$
$-.8386-00$	$.5461-00$
$-.8386-00$	$-.5461-00$
$.0000$	$.0000$
$.0000$	$.0000$
$.0000$	$.0000$

X(3)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= $-.8901+01$

BODE GAIN = $.1433+04$

ROOTS

REAL PART	IMAGINARY PART
$-.1210+00$	$.0000$
$-.6055+02$	$.0000$
$-.5525+01$	$.0000$
$-.1952-00$	$.7688-00$
$-.1952-00$	$-.7688-00$
$-.2084-00$	$.3600-00$
$-.2084-00$	$-.3600-00$
$.0000$	$.0000$
$.0000$	$.0000$
$.0000$	$.0000$

NOT REPRODUCIBLE

X(4)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.6982+02

BODE GAIN = .2402+02

ROOTS

REAL PART	IMAGINARY PART
-.4563-01	.2755-00
-.4563-01	-.2755-00
-.2118-00	.0000
-.5418-00	.0000
-.1942+01	.0000
-.1110+00	.7278-00
-.1110+00	-.7278-00
.0000	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(5)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.8042+01

BODE GAIN = -.2358-00

ROOTS

REAL PART	IMAGINARY PART
.3765-01	.0000
-.9270-01	.5926-01
-.9270-01	-.5926-01
-.5384+01	.0000
-.2016-00	.7549-00
-.2016-00	-.7549-00
-.5359-00	.0000
-.1118-07	.0000
.0000	.0000
-.7451-08	.0000

X(6)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .3227+02

BODE GAIN = .1176-04

ROOTS

REAL PART	IMAGINARY PART
.2297-06	.0000
-.2077+01	.0000
-.5749-00	.8193-00
-.5749-00	-.8193-00
-.4092-01	.2692-00
-.4092-01	-.2692-00
.6603-00	.0000
-.4262-00	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.3927+02

BODE GAIN = .2684+04

ROOTS

REAL PART	IMAGINARY PART
-.7622-07	.0000
-.3300-00	.0000
-.6035-01	.0000
-.1020+02	.0000
-.1901-00	.3879+01
-.1901-00	-.3879+01
-.2335-00	.7461-00
-.2335-00	-.7461-00
.0000	.0000
.5859-07	.0000

X(2)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= $-.1369+02$

BODE GAIN = $.4674+03$

ROOTS

REAL PART	IMAGINARY PART
.3532-08	.0000
-.6856+02	.0000
-.4872-01	.1017+00
-.4872-01	-.1017+00

.1753-00	.4451-00
.1753-00	-.4451-00
-.1773+01	.1242+01
-.1773+01	-.1242+01
.0000	.0000
.0000	.0000

X(3)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= $-.2160+02$

BODE GAIN = $-.2482+04$

ROOTS

REAL PART	IMAGINARY PART
-.5917-01	.0000
.4217+02	.0000
-.2300-00	.7480-00
-.2300-00	-.7480-00
-.1075+02	.0000
-.2166-00	.3803-00
-.2166-00	-.3803-00
-.1482-09	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.3087+02

BODE GAIN = .4101+01

ROOTS

REAL PART	IMAGINARY PART
.5423-02	.1539-00
.5423-02	-.1539-00
-.3281-00	.4163-01
-.3281-00	-.4163-01
-.8947-01	.9575-00
-.8947-01	-.9575-00
-.1516+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(5)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .1340+02

BODE GAIN = -.4027-01

ROOTS

REAL PART	IMAGINARY PART
-.1334-01	.0000
-.2171-01	.0000
-.1121+02	.0000
-.2336-00	.7504-00
-.2336-00	-.7504-00
-.5362-00	.0000
-.7655-01	.0000
.1718-06	.0000
-.4040-09	.0000
.0000	.0000

X(6)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .1373+02

BODE GAIN = .6741+01

ROOTS

REAL PART	IMAGINARY PART
-.1432-02	.1610-00
-.1432-02	-.1610-00
-.1309-00	.4115-00
-.1309-00	-.4115-00
-.1418+01	.1229+01
-.1418+01	-.1229+01
.1023+01	.0000
-.1863-08	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .2440-00

BODE GAIN = .9822+02

ROOTS

REAL PART	IMAGINARY PART
-.1153-06	.0000
-.9699+01	.3368+01
-.9699+01	-.3368+01
-.2666+01	.0000
-.2807-00	.0000
.1938+01	.0000
-.1286-00	.2356-00
-.1286-00	-.2356-00
.4657-09	.0000
.0000	.0000

X(2)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.1416+02

BODE GAIN = .2053+02

ROOTS

REAL PART	IMAGINARY PART
-.3279-02	.0000
-.1894+02	.0000
-.8761+01	.0000
-.1887+01	.0000
-.5451-00	.0000
-.4128-01	.2630-00
-.4128-01	-.2630-00
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.4491-01

BODE GAIN = -.1263+03

ROOTS

REAL PART	IMAGINARY PART
-.2197-07	.0000
.1357+03	.0000
-.1904-00	.4257-00
-.1904-00	-.4257-00
-.1049+00	.2335-00
-.1049+00	-.2335-00
-.1381+02	.0000
-.2483+01	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .9095-00

BODE GAIN = -.3884+01

ROOTS

REAL PART	IMAGINARY PART
-.4112-01	.2642-00
-.4112-01	-.2642-00
-.2441-00	.1837-00
-.2441-00	-.1837-00
-.1711+02	.0000
-.1905+01	.0000
-.5369-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(5)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .7414-02

BODE GAIN = .3813-01

ROOTS

REAL PART	IMAGINARY PART
.8734-08	.0000
-.8473+02	.0000
-.3856+01	.0000
-.5503-00	.0000
-.1274-00	.2112-00
-.1274-00	-.2112-00
-.1783-00	.0000
.7218-01	.0000
.8568-07	.0000
.0000	.0000

X(6)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .3744+01

BODE GAIN = -.8277+01

ROOTS

REAL PART	IMAGINARY PART
-.4374-01	.2642-00
-.4374-01	-.2642-00
-.7661-02	.2997-00
-.7661-02	-.2997-00
-.9143+01	.0000
-.1886+01	.0000

-.5450-00	.0000
.7477-10	.0000
-.5891-08	.0000
.0000	.0000

X(1)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .1814+02

BODE GAIN = -.5021+02

ROOTS

REAL PART	IMAGINARY PART
.6527-07	.0000
-.9916+01	.0000
-.1736-00	.0000
-.5800-01	.0000
-.1057+01	.3124-00
-.1057+01	-.3124-00
-.2355-00	.7542-00
-.2355-00	-.7542-00
.0000	.0000
.0000	.0000

X(2)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .1443-01

BODE GAIN = -.2710+01

ROOTS

REAL PART	IMAGINARY PART
.1791-06	.0000
-.5848+03	.0000
-.1143+01	.1119+01
-.1143+01	-.1119+01

.4429-01	.0000
.1649+01	.0000
.3395-00	.0000
.1387-00	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.8595+01

BODE GAIN = .4826+02

ROOTS

REAL PART	IMAGINARY PART
-.5703-01	.0000
-.9596+01	.0000
-.4776+01	.0000
-.2299-00	.7564-00
-.2299-00	-.7564-00
-.2210-00	.2128-00
-.2210-00	-.2128-00
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .4331-00

BODE GAIN = -.7678-01

ROOTS

REAL PART	IMAGINARY PART
-.7591-07	.0000
-.3223-00	.1083+00
-.3223-00	-.1083+00
.1312-00	.1089+00
.1312-00	-.1089+00
-.2711-00	.1015+01
-.2711-00	-.1015+01
-.1308+01	.0000
.0000	.0000
.0000	.0000

X(5)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.2635-00

BODE GAIN = .7536-03

ROOTS

REAL PART	IMAGINARY PART
.1449-02	.0000
-.1082+02	.0000
-.2299-00	.7535-00
-.2299-00	-.7535-00
-.5328-00	.0000
.2329-00	.0000
-.6488-01	.0000
-.1441-08	.0000
.2184-06	.0000
.3592-07	.0000

X(6)-T0-C(5) NUMERATOR

ROOT LOCUS GAIN = -.1457-00

BODE GAIN = -.1636-00

ROOTS

REAL PART	IMAGINARY PART
.1374-00	.1124+00
.1374-00	-.1124+00
-.7308-01	.4040-00
-.7308-01	-.4040-00
.2997+01	.0000
-.9940-00	.9713-00
-.9940-00	-.9713-00
.0000	.0000
.0000	.0000
.0000	.0000

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAR-B DERIVATIVES
CASE 2 SPEED= 28.8 FT/SEC, H-DOT=-28.8 FT/SEC, GAMMA=-90.0 DEG,
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.7513+02	.9704+01	-.5058+01	.1011+04	-.6809+02	-.1705+03
Y	.2825+01	-.2100+02	.2974+01	.4367+03	-.1948+03	.1632+04
Z	-.2626+01	-.2556+01	-.3706+01	.5236+02	-.1664+04	-.4034+03
L	-.2280+03	.3516+03	-.3561+02	-.1227+05	-.4563+04	-.1849+04
M	-.1201+03	-.5593+02	-.5100+03	.5707+04	-.8952+05	.1075+05
N	-.2371+02	.3998+03	-.3163+02	-.1258+04	-.1159+05	-.8650+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.1073+03	.2261+04	.4161+05	.3059+01	.4676+00	.9090+01
Y	-.1038+01	-.3476+03	-.5900+04	.1279+01	-.2587+02	-.4791+00
Z	.1663+01	-.1415+03	-.2919+03	-.4234+00	.5322+00	-.2588+02
L	.3891+03	.5335+02	.2727+02	.1549+02	-.1137+03	.1382+03
M	.1163+00	.6497+02	-.1977+02	-.1668+03	.2938+04	-.1425+04
N	.1182+00	.3169+02	-.2009+03	-.1806+02	.1430+04	.2952+04

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.1128+06	-.5360+03	-.1971+03	-.5756+03	.1232+03
Y	-.5595+04	.1826+05	.5659+04	.8039+04	.4163+01
Z	.4081+03	.5621+04	-.1831+05	.1237+02	.5086+04
L	.2347+06	-.2937+05	.2556+05	-.2429+06	-.2594+04
M	-.7536+04	.2740+06	-.6723+06	-.2167+05	.5528+04
N	-.5486+04	-.6730+06	-.2749+06	-.3850+04	.1192+03

THE INERTIA TENSOR

	.5497+05	.2437+03	-.7611+03
	.2437+03	.5001+05	-.3728+02
	-.7611+03	-.3728+02	.1151+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
-.5040+00	-.1409+01	.2876+02	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.2135+00	.8854+03	-.7529+02	.1343+00	.1750+01	-.4895+01
----------	----------	-----------	----------	----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= .1572+01 PHI .0000
AIRCRAFT INERTIAL SPEED= .2880+02

DENOMINATOR CHARACTERISTIC ROOTS

REAL PART	IMAGINARY PART
-.8006-01	.3619-00
-.6006-01	-.3619-00
-.3925-01	.4387-00
-.3925-01	-.4387-00
-.1805-00	.9069-01
-.1805-00	-.9069-01
-.9824+01	.0000
-.1905+01	.0000
.1490-07	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NUMERATORS

(NOTE- NUMERATOR ROOTS LESS THAN $1.0E-7$ TIMES THE
LARGEST NUMERATOR ROOT ARE NOT INCLUDED IN THE BODE GAIN).

X(1)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .2328+03

BODE GAIN = -.9600+03

ROOTS

REAL PART	IMAGINARY PART
-.1659-00	.0000
-.9823+01	.0000
-.1905+01	.0000
-.3698-01	.4405-00
-.3698-01	-.4405-00
-.8356-01	.3624-00
-.8356-01	-.3624-00
.0000	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .1152+02

BODE GAIN = .2197+03

ROOTS

REAL PART	IMAGINARY PART
.7696-06	.0000
-.9177+01	.0000
-.2010+01	.0000
-.3622-00	.1236+00

-.3622-00	-.1236+00
-.8173-01	.4515-00
-.8173-01	-.4515-00
.6822-00	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.8468-00

BODE GAIN = .6502+03

ROOTS

REAL PART	IMAGINARY PART
-.7557-01	.3741-00
-.7557-01	-.3741-00
-.2597-00	.0000
-.1233+01	.0000
-.1022+02	.0000
.1342+01	.5565+01
.1342+01	-.5565+01
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.4267+01

BODE GAIN = .4138+02

ROOTS

REAL PART	IMAGINARY PART
-.7722-01	.3851-00
-.7722-01	-.3851-00
-.2714-01	.4302-00
-.2714-01	-.4302-00
-.9839+01	.0000
-.1918+01	.0000
-.3648-00	.0000
-.4478-06	.0000
-.2611-08	.0000
.3725-08	.0000

X(5)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .1889-00

BODE GAIN = .1040-03

ROOTS

REAL PART	IMAGINARY PART
.1876-03	.2281-02
.1876-03	-.2281-02
-.1042+02	.0000
-.2585-00	.0000
.5460+01	.0000
-.7498-01	.3741-00
-.7498-01	-.3741-00
.1132-06	.0000
-.3992-08	.0000
.9779-08	.0000

X(6)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN = .3062-00

BODE GAIN = -.6456-04

ROOTS

REAL PART	IMAGINARY PART
.1432-03	.0000
-.9392-00	.2705+01
-.9392-00	-.2705+01
-.8576-01	.4519-00
-.8576-01	-.4519-00
-.3684-00	.0000
.4689-01	.0000
-.8149-08	.0000
.5588-08	.0000
-.6802-08	.0000

X(1)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN = .1113+01

BODE GAIN = .7291+03

ROOTS

REAL PART	IMAGINARY PART
-.4130-01	.4320-00
-.4130-01	-.4320-00
-.6524-00	.0000
.1326+02	.0000
-.1075+01	.1729+01
-.1075+01	-.1729+01
-.1973+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= $-.3733 \times 10^2$

BODE GAIN = $.1968 \times 10^4$

ROOTS

REAL PART	IMAGINARY PART
$-.1900-00$	$.8143-01$
$-.1900-00$	$-.8143-01$
$-.6145+02$	$.0000$
$-.1943+01$	$.0000$
$-.1099+01$	$.0000$
$-.3808-01$	$.4356-00$
$-.3808-01$	$-.4356-00$
$.0000$	$.0000$
$.0000$	$.0000$
$.0000$	$.0000$

X(3)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= $-.1575 \times 10^2$

BODE GAIN = $.5833 \times 10^3$

ROOTS

REAL PART	IMAGINARY PART
$-.1257-00$	$.0000$
$-.2184+02$	$.0000$
$-.3480+01$	$.0000$
$-.1076+01$	$.0000$
$.1490-01$	$.4510-00$
$.1490-01$	$-.4510-00$
$-.3602-00$	$.0000$
$.0000$	$.0000$
$.0000$	$.0000$
$.0000$	$.0000$

X(4)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .1854+01

BODE GAIN = .3875+02

ROOTS

REAL PART	IMAGINARY PART
-.1411-00	.0000
-.2642+01	.3357-00
-.2642+01	-.3357-00
-.9161-00	.0000
.2430+01	.0000
-.3842-01	.4352-00
-.3842-01	-.4352-00
-.1315-06	.0000
.6577-09	.0000
.0000	.0000

X(5)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.8119+01

BODE GAIN = .9711-04

ROOTS

REAL PART	IMAGINARY PART
-.4933-03	.0000
-.4944+01	.0000
.1444-01	.4555-00
.1444-01	-.4555-00
-.3525-00	.0000
-.1214+00	.0000
-.1123-01	.0000
.6634-07	.0000
.3551-08	.0000
.1164-08	.0000

NOT REPRODUCIBLE

X(6)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .7741+02

BODE GAIN = -.6054-04

ROOTS

REAL PART	IMAGINARY PART
-.5056-03	.0000
-.1970+01	.0000
-.3806-01	.4359-00
-.3806-01	-.4359-00
-.1985-00	.7020-01
-.1985-00	-.7020-01
-.1682-02	.0000
.4700-08	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(1)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .4261-00

BODE GAIN = .3305+03

ROOTS

REAL PART	IMAGINARY PART
.1316-05	.0000
.2685+02	.0000
-.3440-01	.3778-00
-.3440-01	-.3778-00
-.6037-00	.3595-00
-.6037-00	-.3595-00
-.2686+01	.6959-00
-.2686+01	-.6959-00
.0000	.0000
.0000	.0000

X(2)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN = $-.1242+02$

BODE GAIN = $.4852+03$

ROOTS

REAL PART	IMAGINARY PART
.3213-06	.0000
-.8022+02	.0000
-.1578+01	.0000
-.8716-00	.0000

-.1967-00	.7347-01
-.1967-00	-.7347-01
.5821-02	.4042-00
.5821-02	-.4042-00
.0000	.0000
.0000	.0000

X(3)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN = $.3597+02$

BODE GAIN = $-.1297+04$

ROOTS

REAL PART	IMAGINARY PART
-.9549-01	.3574-00
-.9549-01	-.3574-00
-.1680-00	.1078+00
-.1680-00	-.1078+00
-.9855+01	.4086+01
-.9855+01	-.4086+01
-.1182+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .1150-01

BODE GAIN = .1361+02

ROOTS

REAL PART	IMAGINARY PART
-.1314-00	.0000
.7179+03	.0000
-.3865-00	.6296-00
-.3865-00	-.6296-00
-.3014+01	.0000
-.7549-02	.3939-00
-.7549-02	-.3939-00
-.5960-07	.0000
.0000	.0000
.0000	.0000

X(5)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .1327+02

BODE GAIN = .3548-04

ROOTS

REAL PART	IMAGINARY PART
.1201-07	.0000
.3858-06	.0000
-.1130+02	.0000
-.9573-01	.3583-00
-.9573-01	-.3583-00
-.1687-00	.1065+00
-.1687-00	-.1065+00
.1279-01	.0000
-.6880-04	.0000
-.4657-09	.0000

X(6)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .3440+02

BODE GAIN = -.2127-04

ROOTS

REAL PART	IMAGINARY PART
-.2268-03	.0000
-.1199+01	.0000
-.2117-00	.4451-01
-.2117-00	-.4451-01
.5897-02	.4089-00
.5897-02	-.4089-00
-.5916-02	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .1189+01

BODE GAIN = -.2437+03

ROOTS

REAL PART	IMAGINARY PART
-.7443-01	.3883-00
-.7443-01	-.3883-00
-.1586-01	.4303-00
-.1586-01	-.4303-00
-.8637+01	.1000+01
-.8637+01	-.1000+01
-.1904+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.1660+02

BODE GAIN = -.9462+02

ROOTS

REAL PART	IMAGINARY PART	REAL PART	IMAGINARY PART
-.2082-06	.0000	-.2082-06	.0000
-.1130+02	.0000	-.1130+02	.0000
-.1896+01	.0000	-.1896+01	.0000
-.1621-00	.0000	-.1621-00	.0000
-.3990-00	.0000	-.3990-00	.0000
-.5886-01	.4312-00	-.5886-01	.4312-00
-.5886-01	-.4312-00	-.5886-01	-.4312-00
.4420-00	.0000	.4420-00	.0000
.0000	.0000	.0000	.0000
.0000	.0000	.0000	.0000

X(3)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.7713-01

BODE GAIN = -.1704+03

ROOTS

REAL PART	IMAGINARY PART	REAL PART	IMAGINARY PART
-.1159+00	.0000	-.1159+00	.0000
.1409+03	.0000	.1409+03	.0000
-.6178-01	.3726-00	-.6178-01	.3726-00
-.6178-01	-.3726-00	-.6178-01	-.3726-00
-.1159+02	.0000	-.1159+02	.0000
-.1592+01	.0000	-.1592+01	.0000
-.1046+01	.0000	-.1046+01	.0000
.0000	.0000	.0000	.0000
.0000	.0000	.0000	.0000
.0000	.0000	.0000	.0000

X(4)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .4432+01

BODE GAIN = -.1748+02

ROOTS

REAL PART	IMAGINARY PART
-.5075-08	.0000
.5410-08	.0000
-.9778+01	.0000
-.1903+01	.0000
-.3032-01	.4355-00
-.3032-01	-.4355-00
-.6536-01	.3806-00
-.6536-01	-.3806-00
-.1518-00	.0000
.0000	.0000

X(5)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .3951-00

BODE GAIN = -.4397-04

ROOTS

REAL PART	IMAGINARY PART
-.7858-03	.0000
-.1152+02	.0000
-.1448+01	.0000
-.6114-01	.3722-00
-.6114-01	-.3722-00
-.1105+00	.0000
-.1099-01	.0000
.8601-09	.7139-08
.8601-09	-.7139-08
-.1624-06	.0000

X(6)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .9024-00

BODE GAIN = .2731-04

ROOTS

REAL PART	IMAGINARY PART
-.3602-03	.0000
.2100+01	.0000
-.1736-01	.0000
-.1368-00	.0000
-.1806+01	.0000
-.6018-01	.4315-00

-.6018-01	-.4315-00
-.8212-08	.0000
.3725-08	.0000
.5052-08	.0000

X(1)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.2544-00

BODE GAIN = -.1372+01

ROOTS

REAL PART	IMAGINARY PART
-.2262-06	.0000
-.9758+01	.0000
-.1923+01	.0000
-.1133+00	.3265-00
-.1133+00	-.3265-00
.6167-00	.0000
.2236-01	.2809-00
.2236-01	-.2809-00
.2171-07	.0000
.0000	.0000

X(2)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.2185-02

BODE GAIN = .8635-00

ROOTS

REAL PART	IMAGINARY PART
.3055-05	.0000
.3308+03	.0000
.9341+01	.0000
-.1127+00	.6528-01

-.1127+00	-.6528-01
-.1373+01	.0000
-.1751-00	.2849-00
-.1751-00	-.2849-00
.0000	.0000
.0000	.0000

X(3)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.1050+02

BODE GAIN = .8973+01

ROOTS

REAL PART	IMAGINARY PART
-.1450-00	.5824-01
-.1450-00	-.5824-01
-.2477-00	.0000
-.8387-01	.3664-00
-.8387-01	-.3664-00
-.9612+01	.0000
-.2076+01	.0000
.3632-07	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .4747-01

BODE GAIN = -.1872-00

ROOTS

REAL PART	IMAGINARY PART
-.1482-00	.3894-00
-.1482-00	-.3894-00
.2266-01	.3462-00
.2266-01	-.3462-00
-.1010+02	.0000
-.2138+01	.0000
-.1780-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(5)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.1170+00

BODE GAIN = .3201-00

ROOTS

REAL PART	IMAGINARY PART
.3678-06	.0000
-.1010+02	.0000
.0000	.0000
.1007+01	.0000
-.8313-01	.3649-00
-.8313-01	-.3649-00
-.1758-00	.9057-01
-.1758-00	-.9057-01
.1881-08	.0000
.7178-08	.0000

X(6)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.2986-01

BODE GAIN = .2924-06

ROOTS

REAL PART	IMAGINARY PART
.6266-04	.0000
.8683+01	.0000
-.2087-00	.3069-00
-.2087-00	-.3069-00
-.5160-02	.1276-00
-.5160-02	-.1276-00
-.1630-00	.0000
-.9003-08	.0000
.3260-08	.0000
.2971-08	.0000

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAB-B DERIVATIVES
CASE 9 SPEED= 0.0 FT/SEC, W-DOT= 0.0 FT/SEC, GAMMA= 0.0 DEG.
GROSS WEIGHT=19600, SEA LEVEL, DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.7472+01	.1497+01	-.1463+01	-.5297+03	.1477+04	-.3821+01
Y	-.1286+01	-.2319+02	-.2918+00	-.1461+04	-.4988+03	.3697+03
Z	-.5452+01	.5622-01	-.1196+03	.1114+03	-.6026+02	.1113+04
L	-.8811+02	-.4463+03	.1557+01	-.8668+05	.1095+05	.2073+04
M	.4719+03	-.8280+02	-.5912+02	-.9807+04	-.8756+05	.2043+04
N	-.6690+01	.3419+03	-.7923+01	.5119+03	-.3515+04	-.1261+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.5022-03	-.1685-03	-.1560-01	-.2309+02	-.2106+01	.4496-00
Y	-.5985-04	.7061-04	-.7837-02	.2101+01	-.2317+02	-.4429-01
Z	.1504-02	.1420-02	.1967-02	.7802-00	.3748-00	.5083-01
L	.8433-02	.8390-02	.8830-02	.2963+04	-.1429+04	-.6241+02
M	.7970-02	.1109-05	.3172-00	.1430+04	.2957+04	-.2799+02
N	-.1131-02	-.1099-03	.2448-02	-.7558+02	.3245+02	.9843+01

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.4503+03	-.5280+04	.1958+05	-.8316+01	-.4335+04
Y	-.2294+03	.1960+05	.5283+04	.9279+04	.1139-02
Z	-.1114+06	.1099+03	-.4693+03	-.6556+01	.8758+02
L	.2598+04	.6926+06	.2757+06	.2273+04	-.3081+03
M	-.1539+05	.2757+06	-.6928+06	-.6124+04	.3686+04
N	.2881+06	-.1954+05	-.7500+04	-.2807+06	.4575+01

THE INERTIA TENSOR

.1152+05	.0000	.9126+03
.0000	.5000+05	.0000
.9126+03	.0000	.5498+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.9998+00	-.0000	.2098-01	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.2381-00	.5286-03	-.4719-02	.1735-00	.2094-01	-.6410-01
----------	----------	-----------	----------	----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= .1959-05 PHI =-.6409-01
AIRCRAFT INERTIAL SPEED= .1000+01

DENOMINATOR CHARACTERISTIC ROOTS

REAL PART	IMAGINARY PART
-.2348-00	.0000
-.2047-00	.0000
.3452-01	.4150-00
.3452-01	-.4150-00
-.1825-01	.3937-00
-.1825-01	-.3937-00
-.1001+02	.0000
-.2010+01	.0000
.2177-07	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NUMERATORS

(NOTE- NUMERATOR ROOTS LESS THAN 1.0E-7 TIMES THE
LARGEST NUMERATOR ROOT ARE NOT INCLUDED IN THE BODE GAIN).

X(1)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .9044-00

BODE GAIN = -.4880+03

ROOTS

REAL PART	IMAGINARY PART
-.2241-00	.0000
-.9363-02	.4055-00
-.9363-02	-.4055-00
-.9924+01	.0000
-.4648+01	.0000
.1047+01	.2676+01
.1047+01	-.2676+01
.0000	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .4551-00

BODE GAIN = .1912+03

ROOTS

REAL PART	IMAGINARY PART
.1091-06	.0000
-.2448-00	.0000
.5471-02	.4507-00
.5471-02	-.4507-00

-.4956+01	.4518+01
-.4956+01	-.4518+01
-.3728+01	.0000
.1312+01	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .2299+03

BODE GAIN = -.6408+03

ROOTS

REAL PART	IMAGINARY PART
-.1337-00	.0000
-.1001+02	.0000
-.2012+01	.0000
-.1971-01	.3929-00
-.1971-01	-.3929-00
.3304-01	.4159-00
.3304-01	-.4159-00
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(1) NUMEPATOR

ROOT LOCUS GAIN= .2376-00

BODE GAIN = -.5731-04

ROOTS

REAL PART	IMAGINARY PART
.1421-03	.0000
.4294+01	.0000
.8923-02	.4511-00
.8923-02	-.4511-00
-.3070+01	.0000
-.2391-00	.0000
-.6886-01	.0000
.2771-07	.0000
.9740-08	.0000
.1872-08	.0000

NOT REPRODUCIBLE

X(5)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .3390-00

BODE GAIN = -.1873+01

ROOTS

REAL PART	IMAGINARY PART
-.4008-00	.0000
-.2903-00	.0000
-.8566-02	.4060-00
-.8566-02	-.4060-00
-.9617+01	.0000
.8486-00	.2436-00
.8486-00	-.2436-00
-.9504-09	.0000
.0000	.0000
.0000	.0000

X(6)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.5245+01

BODE GAIN = .2919+02

ROOTS

REAL PART	IMAGINARY PART
-.1086-01	.4090-00
-.1086-01	-.4090-00
.4852-01	.4054-00
.4852-01	-.4054-00
-.9995+01	.0000
-.2014+01	.0000
-.2576-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(1)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .1474+02

BODE GAIN = -.1017+04

ROOTS

REAL PART	IMAGINARY PART
.1834-07	.0000
-.1114+02	.0000
-.1222+01	.2612+01
-.1222+01	-.2612+01
.1008+00	.4432-00
.1008+00	-.4432-00
-.4162-00	.0000
-.2256-00	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.4041+02

BODE GAIN = .1916+04

ROOTS

REAL PART	IMAGINARY PART
.4600-08	.0000
.9657-07	.0000
-.1850+01	.7672+01
-.1850+01	-.7672+01
.3831-01	.4082-00
.3831-01	-.4082-00
-.2110+01	.0000
-.2360-00	.1408-01
-.2360-00	-.1408-01
-.2098-07	.0000

X(3)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.3616-00

BODE GAIN = .5304+03

ROOTS

REAL PART	IMAGINARY PART
.0000	.0000
-.4505-07	.0000
-.5735+02	.0000
-.9202+01	.0000
-.1715+01	.0000
-.1365-00	.4801-00
-.1365-00	-.4801-00
.4587-01	.4089-00
.4587-01	-.4089-00
.0000	.0000

X(4)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= $-.7976+02$

BODE GAIN = $-.1011+03$

ROOTS

REAL PART	IMAGINARY PART
.1748-06	.0000
-.2072+01	.0000
-.2310-00	.7127-02
-.2310-00	-.7127-02
-.3150-01	.0000
.3824-01	.4085-00
.3824-01	-.4085-00
.5622-04	.0000
.6054-08	.0000
.0000	.0000

X(5)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= $-.8286+01$

BODE GAIN = $-.3303+01$

ROOTS

REAL PART	IMAGINARY PART
-.2555-00	.0000
.2754-00	.0000
.7938-01	.4414-03
.7938-01	-.4414-00
-.5165+01	.0000
-.3124-00	.2106-00
-.3124-00	-.2106-00
.1863-08	.0000
.0000	.0000
.0000	.0000

X(6) = TO-C(2) NUMERATOR

ROOT LOCUS GAIN = .1784+01

BODE GAIN = .5147+02

ROOTS

REAL PART	IMAGINARY PART
-.6672-08	.0000
-.1793+01	.0000
-.2483-00	.0000
.3999+01	.4085-00
.3999-01	-.4085-00
-.1812+01	.1708+01
-.1812-01	-.1708+01
.1615+01	.0000
.0000	.0000
.0000	.0000

X(1) = TO-C(3) NUMERATOR

ROOT LOCUS GAIN = -.3883+02

BODE GAIN = .1391+04

ROOTS

REAL PART	IMAGINARY PART
-.1913-00	.0000
-.2312-00	.0000
-.3474-01	.4021-00
-.3474-01	-.4021-00
-.9847+01	.0000
-.2380-00	.3618+01
-.2380-00	-.3618+01
-.4221-13	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.1171+02

BODE GAIN = .4227-02

ROOTS

REAL PART	IMAGINARY PART
.1140-04	.0000
-.1511+01	.1050+02
-.1511+01	-.1050+02
.4871-01	.3398-00

.4871-01	-.3398-00
-.1113+01	.0000
-.2357-00	.1528-01
-.2357-00	-.1528-01
-.1878-08	.0000
.0000	.0000

X(3)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .9235-00

BODE GAIN = .1643+02

ROOTS

REAL PART	IMAGINARY PART
.5696-01	.0000
-.1019+02	.2299+01
-.1019+02	-.2299+01
-.7313-01	.4063-00
-.7313-01	-.4063-00
.4636-00	.4711-00
.4636-00	-.4711-00
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.3459+02

BODE GAIN = -.1746-04

ROOTS

REAL PART	IMAGINARY PART
-.1218-06	.0000
-.1319+01	.0000
-.2306-00	.7493-02
-.2306-00	-.7493-02
-.3359-01	.0000
.5222-01	.3424-00
.5222-01	-.3424-00
.4644-04	.0000
.1723-07	.0000
.0000	.0000

X(5)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .1368+02

BODE GAIN = -.5688-00

ROOTS

REAL PART	IMAGINARY PART
.2955-01	.9544-01
.2955-01	-.9544-01
-.2370-00	.2447-01
-.2370-00	-.2447-01
-.1141+02	.0000
-.3392-01	.4079-00
-.3392-01	-.4079-00
.1627-08	.0000
-.3765-09	.0000
.0000	.0000

X(6)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .7663-00

BODE GAIN = -.3401-05

ROOTS

REAL PART	IMAGINARY PART
-.6301-08	.0000
-.3837-06	.0000
-.3799+01	.0000
-.2510-00	.0000
.5794-01	.3188-00
.5794-01	-.3188-00
.3139+01	.0000
-.5245-00	.8262-00
-.5245-00	-.8262-00
.0000	.0000

X(1)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .6276-01

BODE GAIN = .3906+03

ROOTS

REAL PART	IMAGINARY PART
.5937-09	.0000
-.2384+02	.0000
-.8792+01	.0000
-.1749+01	.0000
-.2263-00	.0000
.1238+02	.0000
.7058-04	.3972-00
.7058-04	-.3972-00
.0000	.0000
.0000	.0000

X(2)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.1916+02

BODE GAIN = -.1576+03

ROOTS

REAL PART	IMAGINARY PART
-.1940-07	.0000
-.9623+01	.0000
-.2030+01	.0000
-.7729-00	.0000
-.2413-00	.0000
.1444-01	.4207-00
.1444-01	-.4207-00
.3317-00	.0000
.3381-13	.0000
.0000	.0000

X(3)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .1270-01

BODE GAIN = -.2715+03

ROOTS

REAL PART	IMAGINARY PART
-.1306-01	.4040-00
-.1306-01	-.4040-00
.3826-01	.4279-00
.3826-01	-.4279-00
-.9195+03	.0000
-.1002+02	.0000
-.2002+01	.0000
.4001-07	.0000
-.1749-09	.0000
.0000	.0000

NOT REPRODUCIBLE

X(4)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.8661-00

BODE GAIN = .5314-04

ROOTS

REAL PART	IMAGINARY PART
-.3885-08	.0000
.2816+01	.0000
-.2373-00	.0000
-.1213+00	.0000
.5606-04	.0000
-.1966+01	.0000
.1461-01	.4225-00
.1461-01	-.4225-00
.2137-07	.0000
.4191-08	.0000

NOT REPRODUCIBLE

X(5)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .1000+00

BODE GAIN = .1736+01

ROOTS

REAL PART	IMAGINARY PART
-.2562-00	.0000
-.1654+02	.0000
-.1044+01	.2237-00
-.1044+01	-.2237-00
.1005-02	.3978-00
.1005-02	-.3978-00
.5872-00	.0000
.5472-07	.0000
.1079-07	.0000
.0000	.0000

X(6)=T0-C(4) NUMERATOR

ROOT LOCUS GAIN= .5122+01

BODE GAIN = -.2706+02

ROOTS

REAL PART	IMAGINARY PART
-.2445-02	.4028-00
-.2445-02	-.4028-00
.4942-01	.4103-00
.4942-01	-.4103-00
-.9965+01	.0000
-.2010+01	.0000

-.2478-00	.0000
-.1597-08	.0000
.1863-08	.0000
.0000	.0000

X(1)=T0-C(5) NUMERATOR

ROOT LOCUS GAIN= .8946+01

BODE GAIN = -.7967+01

ROOTS

REAL PART	IMAGINARY PART
-.9811-08	.0000
-.1000+02	.0000
-.1714+01	.0000
-.2141-00	.0000
-.2452-00	.0000
-.2298-01	.4058-00
-.2298-01	-.4058-00
-.1559-00	.0000
-.6265-12	.0000
.0000	.0000

X(2)-T0-C(5) NUMERATOR

ROOT LOCUS GAIN= ,388A-02

BODE GAIN = ,9842-00

ROOTS

REAL PART	IMAGINARY PART
-.2344-07	.0000
.6269+01	.2337+02
.6269+01	-.2337+02
.2800+01	.0000
-.1886-00	.2394-00
-.1886-00	-.2394-00
-.2418-00	.0000
-.1791-00	.0000
.7177-09	.0000
.0000	.0000

X(3)-T0-C(5) NUMERATOR

ROOT LOCUS GAIN= -.1807-00

BODE GAIN = ,1385+01

ROOTS

REAL PART	IMAGINARY PART
-.1830-00	.0000
-.9998+01	.0000
-.2647+01	.0000
-.4157-01	.4903-00
-.4157-01	-.4903-00
-.7550-01	.4055-00
-.7550-01	-.4055-00
-.1019-10	.0000
-.5087-07	.0000
.0000	.0000

X(4)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .4897-01

BODE GAIN = -.6060-07

ROOTS

REAL PART	IMAGINARY PART
.6062-04	.0000
.3188+01	.0000
-.1366-00	.0000
-.2447-00	.1446-00
-.2447-00	-.1446-00
-.2404-00	.0000
-.6283-01	.0000
.3492-09	.2122-08
.3492-09	-.2122-08
-.7519-08	.0000

X(5)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.7686-01

BODE GAIN = -.1986-02

ROOTS

REAL PART	IMAGINARY PART
-.7053-02	.0000
-.1046+02	.0000
-.2313-00	.0000
-.2088-00	.0000
.1145+01	.0000
-.2305-01	.4052-00
-.2305-01	-.4052-00
.6352-08	.0000
-.1564-08	.0000
.0000	.0000

NOT REPRODUCIBLE

X(6)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.1009-02

BODE GAIN = .3095-01

ROOTS

REAL PART	IMAGINARY PART
.2501-07	.0000
-.0002-07	.0000
.8131+01	.0000
.2191+01	.0000
-.1390-00	.0000
-.2684-00	.0000
-.4505+01	.0000
-.1897-00	.4802-00
-.1897-00	-.4802-00
.0000	.0000

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAB-B DERIVATIVES
CASE A SPEED= 33.6 FT/SEC. H-DOT= 0.0 FT/SEC. GAMMA= 0.0 DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.3264+02	.1739+01	-.4546+01	-.4565+03	.1559+04	-.3215+02
Y	.3881+01	-.2999+02	-.9127-00	-.1551+04	-.4347+03	.5097+03
Z	-.1103+03	-.1016+01	.1742+03	.2095+02	.7170+02	.9901+03
L	-.8124+02	-.4130+03	-.5713+01	-.8602+05	.1009+05	.1204+04
M	.3872+03	-.7177+02	-.1040+03	-.9465+04	-.9104+05	.2396+04
N	-.2094+03	.3463+03	-.4293+02	-.3981+02	-.1408+04	-.1651+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.7724-03	.1432-03	-.5680-01	-.2447+02	-.1226+01	.3508-00
Y	.8408-03	.1283-04	.5788-01	.1329+01	-.2486+02	-.3315-01
Z	.2364-03	-.1179-02	.1668-01	.5917+01	.1027+01	-.1032-01
L	.6179-01	.2949-02	.4202+01	.2971+04	-.1417+04	-.4676+02
M	.2835-01	-.4172-01	.2251+01	.1424+04	.2965+04	-.1973+02
N	-.7220-03	-.1581-02	-.1460-00	-.8690+02	.2634+02	.1003+02

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.1371+04	-.5469+04	.1833+05	-.2170+03	-.6624+04
Y	-.7189+03	.1885+05	.5495+04	.8205+04	.6254-03
Z	-.1058+06	.1296+04	.4231+04	.1311+02	.1000+03
L	-.1588+05	.6904+06	.2748+06	.3285+04	-.1414+04
M	.8321+05	.2762+06	-.6927+06	-.4021+04	.5690+04
N	.2486+06	-.2114+05	.4184+04	-.2494+06	-.2227+02

THE INERTIA TENSOR

	.1151+05	.0000	.6790+03
	.0000	.5000+05	.0000
	.6790+03	.0000	.5499+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.3380+02	-.0000	.5276-00	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.2184-00	-.2581-02	.1298-01	.1401-00	.1559-01	-.5144-01
----------	-----------	----------	----------	----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= .2442-05 PHI =.5143-01
AIRCRAFT INERTIAL SPEED= .3380+02

DENOMINATOR CHARACTERISTIC
ROOTS

REAL PART	IMAGINARY PART
-.1106+00	.0000
-.9938+01	.0000
-.2021+01	.0000
-.1151+00	.5842-00
-.1151+00	-.5842-00
.9455-02	.3617-00
.9455-02	-.3617-00
-.3995-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

NUMERATORS

(NOTE- NUMERATOR ROOTS LESS THAN $1.0E-7$ TIMES THE
LARGEST NUMERATOR ROOT ARE NOT INCLUDED IN THE BODE GAIN).

X(1)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .2672+01

BODE GAIN = -.6672+03

ROOTS

REAL PART	IMAGINARY PART
.4215-07	.0000
-.8022-00	.0000
-.1934-00	.0000
-.1467-00	.5047-00
-.1467-00	-.5047-00
-.9918+01	.0000
.6122-00	.4925+01
.6122-00	-.4925+01
.0000	.0000
.0000	.0000

X(2)=TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .1604+01

BODE GAIN = .1417+03

ROOTS

REAL PART	IMAGINARY PART
.1826-07	.0000
-.8742+02	.0000
-.1133+02	.0000
-.1959+01	.0000

-.4540-00	.0000
.1864-01	.3996-00
.1864-01	-.3996-00
.2582-01	.0000
.2065-07	.0000
.0000	.0000

X(3)=TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .2184+03

BODE GAIN = -.2261+02

ROOTS

REAL PART	IMAGINARY PART
-.5958-02	.0000
-.9963+01	.0000
-.1803+01	.0000
+.1121+00	.5859-00
-.1121+00	-.5859-00
-.8790-02	.3345-00
-.8790-02	-.3345-00
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .2633+01

BODE GAIN = -.6589-04

ROOTS

REAL PART	IMAGINARY PART
.1030-08	.0000
-.1474+01	.6957-00
-.1474+01	-.6957-00
-.4854-00	.0000
.2364-05	.0000
.2036+01	.0000
.1653-01	.4071-00
.1653-01	-.4071-00
.0000	.0000
.1257-07	.0000

X(5)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.1677+01

BODE GAIN = -.1386+01

ROOTS

REAL PART	IMAGINARY PART
-.1732-00	.2243-00
-.1732-00	-.2243-00
-.1096+02	.0000
-.1861-00	.5525-00
-.1861-00	-.5525-00
-.6204-00	.0000
.1850-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(6)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.4560+01

BODE GAIN = .2692+02

ROOTS

REAL PART	IMAGINARY PART
-.9706-08	.0000
-.9847+01	.0000
-.2036+01	.0000
-.3319-01	.3960-00
-.3319-01	-.3960-00
.4901-01	.4027-00
.4901-01	-.4027-00
-.4667-00	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .1533+02

BODE GAIN = -.1021+04

ROOTS

REAL PART	IMAGINARY PART
.2197-07	.0000
-.1009+02	.0000
-.1219+01	.2760+01
-.1219+01	-.2760+01
-.4190-02	.5664-00
-.4190-02	-.5664-00
-.3840-00	.0000
-.2426-00	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.3870+02

BODE GAIN = .1943+04

ROOTS

REAL PART	IMAGINARY PART
-.2017-06	.0000
-.2160+01	.7961+01
-.2160+01	-.7961+01
-.2107+01	.0000
-.4128-00	.0000
.1625-01	.3361-00
.1625-01	-.3361-00
-.3085-00	.0000
.0000	.0000
.8754-07	.0000

X(3)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.3665+01

BODE GAIN = .9324+03

ROOTS

REAL PART	IMAGINARY PART
.2823-02	.4312-00
.2823-02	-.4312-00
-.9690-01	.5924-00
-.9690-01	-.5924-00
-.8147+02	.0000
-.5439+01	.0000
-.3530-00	.0000
.2114-07	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.7961+02

BODE GAIN = -.1229-03

ROOTS

REAL PART	IMAGINARY PART
.2280-05	.0000
-.2085+01	.0000
-.2081-00	.4508-00
-.2081-00	-.4508-00
.4306-01	.3672-00
.4306-01	-.3672-00
-.3972-00	.0000
-.8124-08	.0000
.4717-08	.0000
.0000	.0000

X(5)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.8283+01

BODE GAIN = -.2586+01

ROOTS

REAL PART	IMAGINARY PART
-.3924-00	.0000
-.2128-00	.2424-00
-.2128-00	-.2424-00
.2055-00	.0000
-.5200+01	.0000
-.4778-01	.5406-00
-.4778-01	-.5406-00
-.3893-09	.0000
.0000	.0000
.0000	.0000

X(6)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .1490+01

BODE GAIN = .5023+02

ROOTS

REAL PART	IMAGINARY PART
.1089-01	.3705-00
.1089-01	-.3705-00
-.3951-00	.0000
-.2389+01	.0000
-.1977+01	.1564+01
-.1977+01	-.1564+01
.1685+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.3613+02

BODE GAIN = .1773+04

ROOTS

REAL PART	IMAGINARY PART
-.1184+00	.0000
-.9916+01	.0000
-.2007-00	.3753+01
-.2007-00	-.3753+01
-.1113+00	.5791-00
-.1113+00	-.5791-00
-.3505-00	.0000
.0000	.0000
.2197-07	.0000
.0000	.0000

X(2)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.1214+02

BODE GAIN = .3109+03

ROOTS

REAL PART	IMAGINARY PART
-.5395-01	.0000
-.2100+01	.1022+02
-.2100+01	-.1022+02
-.4294-02	.6639-00

-.4294-02	-.6639-00
-.1407+01	.0000
-.2695-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(3)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.9126+01

BODE GAIN = -.1174+04

ROOTS

REAL PART	IMAGINARY PART
-.1240+00	.0000
.5124+02	.0000
-.1138+00	.5632-00
-.1138+00	-.5632-00
-.1093+02	.0000
-.1399-01	.4647-00
-.1399-01	-.4647-00
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.345⁺02

BODE GAIN = .3237-04

ROOTS

REAL PART	IMAGINARY PART
-.3389-07	.0000
-.1249+01	.0000
-.6843-00	.0000
-.2088-00	.0000
.2360-05	.0000
-.7174-01	.6154-00
-.7174-01	-.6154-00
.2390-00	.0000
.0000	.0000
-.4191-08	.0000

X(5)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .1368+02

BODE GAIN = .6809-00

ROOTS

NOT REPRODUCIBLE

REAL PART	IMAGINARY PART
-.1190+00	.8146-01
-.1190+00	-.8146-01
.7173-01	.0000
-.3474-00	.0000
-.1131+02	.0000
-.1146+00	.5800-00
-.1146+00	-.5800-00
-.4657-09	.0000
.0000	.0000
.0000	.0000

X(6)=TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .5634-00

BODE GAIN = -.1323+02.

ROOTS

REAL PART	IMAGINARY PART
-.2280-00	.0000
-.6984-01	.4544-00
-.6984-01	-.4544-00
-.2643+01	.1759+01
-.2643+01	-.1759+01
.1406+01	.1142+00
.1406+01	-.1142+00
.0000	.0000
.0000	.0000
.0000	.0000

X(1)=TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .4905-00

BODE GAIN = .2770+03

ROOTS

REAL PART	IMAGINARY PART
-.1026-06	.0000
-.1001+02	.0000
-.5046+01	.0000
-.2082+01	.0000
-.3302-00	.0000
.4850+01	.0000
-.8364-01	.3620-00
-.8364-01	-.3620-00
.0000	.0000
.0000	.0000

X(2)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.1694+02

BODE GAIN = -.7497+02

ROOTS

REAL PART	IMAGINARY PART
.1748-01	.0000
-.9434+01	.1660+01
-.9434+01	-.1660+01
-.2021+01	.0000
.9171-02	.3698-00
.9171-02	-.3698-00
-.4107-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.3653-01

BODE GAIN = -.2859+03

ROOTS

REAL PART	IMAGINARY PART
-.2757-01	.3713-00
-.2757-01	-.3713-00
-.9043-01	.5586-00
-.9043-01	-.5586-00
.3116+03	.0000
-.1130+02	.0000
-.2062+01	.0000
-.1397-07	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.7812-00

BODE GAIN = .2062+02

ROOTS

REAL PART	IMAGINARY PART
.2218-07	.0000
-.2316+01	.0000
-.1988+01	.0000
-.4163-00	.0000
.0000	.0000
.4107+01	.0000
.8699-02	.3716-00
.8699-02	-.3716-00
-.4074-08	.0000
-.1397-07	.0000

X(5)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .5995-01

BODE GAIN = .1006+01

ROOTS

REAL PART	IMAGINARY PART
-.6719-01	.3412-00
-.6719-01	-.3412-00
-.5715-00	.9752-01
-.5715-00	-.9752-01
-.1946+02	.0000
-.2180+01	.0000
.4004-00	.0000
-.2445-08	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(6)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .4547+01

BODE GAIN = -.1953+02

ROOTS

REAL PART	IMAGINARY PART
-.1090-01	.3803-00
-.1090-01	-.3803-00
.1981-01	.3839-00
.1981-01	-.3839-00
-.9912+01	.0000
-.2021+01	.0000

-.4129-00	.0000
-.8163-09	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .1366+02

BODE GAIN = -.1461+02

ROOTS

REAL PART	IMAGINARY PART
.1713-07	.0000
-.9938+01	.0000
-.1721+01	.0000
-.1696-00	.0000
-.9781-01	.0000
-.1048+00	.5809-00
-.1048+00	-.5809-00
-.4455-00	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .6426-02

BODE GAIN = -.4520-00

ROOTS

REAL PART	IMAGINARY PART
-.2687-01	.0000
-.5236-01	.0000
.2027+02	.3410+02
.2027+02	-.3410+02

-.1119+01	.1170+01
-.1119+01	-.1170+01
-.4991-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.2044-00

BODE GAIN = .1066+02

ROOTS

REAL PART	IMAGINARY PART
.3803-08	.0000
-.3557+02	.0000
-.1059+02	.0000
-.1189+00	.5861-00
-.1189+00	-.5861-00
-.1576-00	.3629-00
-.1576-00	-.3629-00
-.1018+00	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .1849-00

BODE GAIN = -.9114-13

ROOTS

REAL PART	IMAGINARY PART
-.3011-07	.0000
.2516-06	.0000
-.9461-00	.0000
-.5101-00	.0000
-.8028-01	.0000
.2362-05	.0000
-.2443-00	.8698-00
-.2443-00	-.8698-00
.1080+01	.0000
.3073-08	.0000

X(5)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.1154+00

BODE GAIN = -.7591-02

ROOTS

REAL PART	IMAGINARY PART
-.1834-06	.0000
-.1083+02	.0000
-.3844-00	.0000
-.1187+00	.0000
-.1744-01	.0000
-.1019+00	.5845-00
-.1019+00	-.5845-00
.8932-00	.0000
.3291-08	.0000
.0000	.0000

X(6)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.2226-02

BODE GAIN = .1475-00

ROOTS

REAL PART	IMAGINARY PART
-.7976-01	.0000
-.1537-01	.4289-00
-.1537-01	-.4289-00
-.5057-00	.0000
-.9247+01	.1170+02
-.9247+01	-.1170+02
-.1651+01	.0000
-.5577-08	.0000
.0000	.0000
.0000	.0000

LOCKHEED AH56A HELICOPTER JUNE 10 1970 YOSTAB-H DERIVATIVES
CASE 7 SPEED= 67.8 FT/SEC. W-DOT= 0.0 FT/SEC. GAMMA= 0.0 DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.5455+01	.1975+01	-.6974+01	-.3769+03	.1833+04	.2740+02
Y	.2336+01	-.4016+02	-.2003+01	-.1720+04	-.3291+03	.7446+03
Z	-.8543+02	-.1667+01	-.2714+03	-.2952+03	.1340+02	.9385+03
L	-.7168+02	-.3586+03	-.1603+02	-.8488+05	.9335+04	.1047+04
M	.4621+03	-.5614+02	-.9420+02	-.9127+04	-.9449+05	.3156+04
N	-.2411+03	.4613+03	-.1836+03	.1617+03	.1057+04	-.2266+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.2114-02	.7536-04	-.1086+05	-.2574+02	.3133-00	.5528-00
Y	.2036-02	.4582-04	.1019+00	.4736-01	-.2807+02	-.6376-02
Z	.2034-03	-.1261-02	.1063-01	.1965+01	.9481-00	-.9516-02
L	.1696-00	.9922-02	.8397+01	.2985+04	-.1400+04	-.5943+02
M	.7925-01	-.4330-01	.4253+01	.1614+04	.2978+04	-.2725+02
N	-.1222-01	-.5319-02	-.4423-00	-.1369+03	.4022+02	.1123+02

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.1094+05	-.6204+04	.1891+05	-.2742+03	-.8825+04
Y	-.1464+04	.1779+05	.6050+04	.7612+04	.3080-02
Z	-.1153+06	.4350+03	.1825+05	.1790+02	.1757+03
L	-.3321+05	.6879+06	.2739+06	.2017+04	-.2942+04
M	.1635+06	.2770+06	.6933+06	-.1740+04	.7722+04
N	.1798+06	-.3136+05	.4861+04	-.2318+06	-.6205+02

THE INERTIA TENSOR

.1152+05	.0000	.8657+03
.0000	.5000+05	.0000
.8657+03	.0000	.5498+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.6779+02	-.0000	.1349+01	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1670-00	-.5276-02	.2692-01	.7512-01	.1990-01	-.3157-01
----------	-----------	----------	----------	----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- Θ THETA= .1285-04 Φ PHI =-.3156-01

AIRCRAFT INERTIAL SPEED= .6780+02

NOT REPRODUCIBLE

DENOMINATOR CHARACTERISTIC ROOTS

REAL PART	IMAGINARY PART
-.7186-01	.0000
-.9818+01	.0000
-.2066+01	.0000
.3199-01	.3790-00
.3199-01	-.3790-00
-.2039-00	.8160-00
-.2039-00	-.8160-00
-.6124-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NUMERATORS
(NOTE- NUMERATOR ROOTS LESS THAN $1.0E-7$ TIMES THE
LARGEST NUMERATOR ROOT ARE NOT INCLUDED IN THE BODE GAIN).

X(1)=TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .2222+02

BODE GAIN = -.6104+03

ROOTS

REAL PART	IMAGINARY PART
-.3463-07	.0000
-.9874+01	.0000
-.4571-00	.2221+01
-.4571-00	-.2221+01
-.2816-00	.7791-00
-.2816-00	-.7791-00
-.6996-00	.0000
-.1030+00	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .3264+01

BODE GAIN = .7356+02

ROOTS

REAL PART	IMAGINARY PART
-.6297-08	.0000
-.6162+02	.0000
-.1163+02	.0000
-.2171+01	.0000

-.7195-00	.0000
.4252-01	.4577-00
.4252-01	-.4577-00
.8706-02	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .2380+03

BODE GAIN = -.1742+03

ROOTS

REAL PART	IMAGINARY PART
.2775-07	.0000
-.9892+01	.0000
-.4248-01	.0000
-.1761-00	.7843-00
-.1761-00	-.7843-00
-.1234+01	.0000
.8369-01	.4388-00
.8369-01	-.4388-00
.0000	.0000
.0000	.0000

X(4)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .5032+01

BODE GAIN = -.4260-16

ROOTS

REAL PART	IMAGINARY PART
.3677-06	.2365-06
.3677-06	-.2365-06
-.1312+01	.8794-00
-.1312+01	-.8794-00
-.7628-00	.0000
.3238-01	.4736-00
.3238-01	-.4736-00
.1524+01	.0000
.6192-05	.0000
.2692-08	.0000

X(5)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.3302+01

BODE GAIN = -.5466-00

ROOTS

REAL PART	IMAGINARY PART
-.8214-01	.1212+00
-.8214-01	-.1212+00
.1363-00	.0000
-.1068+02	.0000
-.2464-00	.8167-00
-.2464-00	-.8167-00
-.6658-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(6)-T0-C(1) NUMERATOR

ROOT LOCUS GAIN= -.3367+01

BODE GAIN = .1731+02

ROOTS

REAL PART	IMAGINARY PART
-.3966-01	.3739-00
-.3966-01	-.3739-00
.6994-01	.4507-00
.6994-01	-.4507-00
-.9482+01	.0000
-.2319+01	.0000
-.7262-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(1)-T0-C(2) NUMERATOR

ROOT LOCUS GAIN= .1752+02

BODE GAIN = -.8933+03

ROOTS

REAL PART	IMAGINARY PART
-.1676-00	.0000
-.8793+01	.0000
-.1138+01	.2852+01
-.1138+01	-.2852+01
-.1217+00	.7753-00
-.1217+00	-.7753-00
-.5444-00	.0000
.6147-07	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.3625+02

BODE GAIN = .2180+04

ROOTS

REAL PART	IMAGINARY PART
.5417-01	.3359-00
.5417-01	-.3359-00
-.3569-00	.0000
-.2788+01	.8340+01
-.2788+01	-.8340+01
-.1958+01	.0000
-.8784-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.1236+01

BODE GAIN = .4424+03

ROOTS

REAL PART	IMAGINARY PART
.2458-01	.2988-00
.2458-01	-.2988-00
-.2379-00	.0000
-.4181+03	.0000
-.5612+01	.0000
-.1503-00	.7931-00
-.1503-00	-.7931-00
.0000	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(4)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= $-.7944+02$

BODE GAIN = $.1589-09$

ROOTS

REAL PART	IMAGINARY PART
.4636-08	.0000
.3195-07	.0000
-.2532-06	.0000
-.2138+01	.0000
-.2689-00	.7265-00
-.2689-00	-.7265-00
.5066-01	.3978-00
.5066-01	-.3978-00
-.5860-00	.0000
.5967-05	.0000

X(5)-TO-C(2) NUMERATOR

NOT REPRODUCIBLE

ROOT LOCUS GAIN= $-.8281+01$

BODE GAIN = $-.1542+01$

ROOTS

REAL PART	IMAGINARY PART
-.1284-00	.1873-00
-.1284-00	-.1873-00
.1765-00	.0000
-.5665-00	.0000
-.5205+01	.0000
-.1682-00	.7783-00
-.1682-00	-.7783-00
-.1863-08	.0000
.0000	.0000
.0000	.0000

X(6)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .2014+01

BODE GAIN = .4884+02

ROOTS

REAL PART	IMAGINARY PART
.2611-01	.3835-00
.2611-01	-.3835-00
-.5434-00	.0000
-.3058+01	.0000
-.1577+01	.1794+01
-.1577+01	-.1794+01
.1582+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.3697+02

BODE GAIN = .1509+04

ROOTS

REAL PART	IMAGINARY PART
-.7242-01	.0000
-.1000+02	.0000
-.1632-00	.3715+01
-.1632-00	-.3715+01
+.2020-00	.0024-00
-.2020-00	-.0024-00
-.5439-00	.0000
.3604-09	.0000
-.3851-06	.0000
.0000	.0000

X(2)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.1329+02

BODE GAIN = .4750+03

ROOTS

REAL PART	IMAGINARY PART
-.6482-01	.0000
-.2352+01	.9392+01
-.2352+01	-.9392+01
.2804-00	.8384-00

.2804-00	-.8384-00
-.2533+01	.0000
-.2714-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.3778+02

BODE GAIN = -.4192+03

ROOTS

REAL PART	IMAGINARY PART
-.7310-01	.0000
.2411+02	.0000
-.2035-00	.8064-00
-.2035-00	-.8064-00
-.1060+02	.0000
.1003-01	.2798-00
.1003-01	-.2798-00
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.3444+02

BODE GAIN = -.1889-16

ROOTS

REAL PART	IMAGINARY PART
-.1401-06	.0000
-.1013+00	.0000
.3294-05	.0000
.7940-05	.0000
.1289-00	.0000
-.1146+01	.4080-00
-.1146+01	-.4080-00
-.7033-01	.8380-00
-.7033-01	-.8380-00
.0000	.0000

X(5)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .1370+02

BODE GAIN = .8766-01

ROOTS

REAL PART	IMAGINARY PART
-.5223-01	.9444-02
-.5223-01	-.9444-02
.4820-01	.0000
-.1115+02	.0000
-.2062-00	.8084-00
-.2062-00	-.8084-00
-.5547-00	.0000
-.3492-09	.0000
.0000	.0000
.0000	.0000

X(6)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .5500-00

BODE GAIN = -.2776+01

ROOTS

REAL PART	IMAGINARY PART	TRAIL
-.1065+00	.0000	0000.
-.1007+00	.3803-00	0000.
-.1007+00	-.3803-00	0000.
.3933-00	.0000	0000.
-.2431+01	.3658+01	0000.
-.2431+01	-.3658+01	0000.
.3686+01	.0000	0000.
.0000	.0000	0000.
.0000	.0000	0000.
.0000	.0000	0000.

X(1)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .6122-00

BODE GAIN = .1392+03

ROOTS

REAL PART	IMAGINARY PART	TRAIL
.4866-07	.0000	0000.
-.9454+01	.0000	0000.
-.3233+01	.1110+01	0000.
-.3233+01	-.1110+01	0000.
-.5467-00	.0000	0000.
.3332+01	.0000	0000.
-.1097+00	.3021-00	0000.
-.1097+00	-.3021-00	0000.
.0000	.0000	0000.
.0000	.0000	0000.

X(2)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.1571+02

BODE GAIN = -.4340+02

ROOTS

REAL PART	IMAGINARY PART
.7260-02	.0000
-.1778+02	.0000
-.1011+02	.0000
-.2063+01	.0000
.3094-01	.3856-00
.3094-01	-.3856-00
-.6258-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.3979-01

BODE GAIN = -.8469+02

ROOTS

REAL PART	IMAGINARY PART
.5323-01	.3167-00
.5323-01	-.3167-00
-.2023-00	.3963-00
-.2023-00	-.3963-00
.2430+03	.0000
-.1257+02	.0000
-.3118+01	.0000
.4191-08	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.6971-00

BODE GAIN = .1527-03

ROOTS

REAL PART	IMAGINARY PART
.1380-07	.0000
-.2063-06	.0000
-.3523+01	.0000
-.1977+01	.0000
-.6304-00	.0000
.6080-05	.0000
.4980+01	.0000
.3033-01	.3867-00
.3033-01	-.3867-00
.6898-08	.0000

X(5)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .1360-01

BODE GAIN = .3754-00

ROOTS

REAL PART	IMAGINARY PART
-.6766-01	.2823-00
-.6766-01	-.2823-00
-.5744-00	.1876-00
-.5744-00	-.1876-00
-.5650+02	.0000
-.4467+01	.0000
.3246-00	.0000
.5413-08	.0000
.0000	.0000
.0000	.0000

X(6)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .4230+01

BODE GAIN = -.1109+02

ROOTS

REAL PART	IMAGINARY PART
-.1539-01	.3654-00
-.1539-01	-.3654-00
.3594-01	.3882-00
.3594-01	-.3882-00
-.9786+01	.0000
-.2061+01	.0000

-.6262-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .1819+02

BODE GAIN = -.1638+02

ROOTS

REAL PART	IMAGINARY PART
.4324-07	.0000
-.9824+01	.0000
-.1717+01	.0000
-.7018-00	.0000
-.1615-00	.0000
-.2005-00	.8112-00
-.2005-00	-.8112-00
-.6162-01	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .8894-02

BODE GAIN = -.5210+01

ROOTS

REAL PART	IMAGINARY PART
-.3379-01	.6567-01
-.3379-01	-.6567-01
-.7490-00	.9650-00
-.7490-00	-.9650-00

.3901+02	.2694+02
.3901+02	-.2694+02
-.2925+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.3615-00

BODE GAIN = .5878+01

ROOTS

REAL PART	IMAGINARY PART
-.6407-01	.0000
-.3970+02	.0000
-.1084+02	.0000
-.1936-00	.8220-00
-.1936-00	-.8220-00
.1729-00	.2136-00
.1729-00	-.2136-00
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .3728-00

BODE GAIN = -.9942-12

ROOTS

REAL PART	IMAGINARY PART
-.1951-07	.0000
.1212-04	.0000
.3093-05	.0000
-.6138-02	.0000
-.3200-00	.1007+01
-.3200-00	-.1007+01
-.1019+01	.4911-00
-.1019+01	-.4911-00
.7405-00	.0000
-.3089-07	.0000

X(5)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.1530-00

BODE GAIN = -.5635-03

ROOTS

REAL PART	IMAGINARY PART
-.8992-03	.0000
-.1105+02	.0000
-.7979-01	.0000
-.5673-00	.0000
-.1943-00	.8148-00
-.1943-00	-.8148-00
.1067+01	.0000
.7496-07	.0000
.5904-08	.0000
-.2980-07	.0000

X(6)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.5783-02

BODE GAIN = .1784-01

ROOTS

REAL PART	IMAGINARY PART
-.8042-02	100.0000
-.5832+01	-.1051+02
-.5832+01	-.1051+02
-.8525-00	-.8689-00
-.8525-00	-.8689-00
-.3445-01	-.4092-00
-.3445-01	-.4092-00
.0000	.0000
.0000	.0000
.0000	.0000

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAB-B DERIVATIVES
CASE B SPEED=101.5 FT/SEC. W-DOT= 0.0 FT/SEC. GAMMA= 0.0 DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES) (2 23-07-16) JK

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.4008+02	.2132+01	-.2276+02	-.3193+03	.1720+04	-.5985+02
Y	.9695-00	-.5148+02	-.2986+01	-.1691+04	-.2942+03	.9358+03
Z	-.4112+02	-.2088+01	-.3271+03	-.6424+03	-.9839+02	.1006+04
L	-.6280+02	-.3478+03	-.2099+02	-.9051+05	.8688+04	.1359+03
M	.2342+03	-.4468+02	-.1852+03	-.8254+04	-.9894+05	.2602+04
N	-.1215+03	.5793+03	-.2132+03	-.6710+02	.4148+04	-.2923+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	.5346-03	.3695-04	-.1624-00	-.2829+02	.5070-00	-.1088+00
Y	-.4126-03	.1091-04	.1320-00	.5661-01	-.2736+02	-.1015-02
Z	.2992-04	-.1185-02	-.7980-02	-.2529+01	.1754+01	-.1316-01
L	-.3629-01	.1167-01	.1240+02	.3003+04	-.1377+04	.9935+01
M	-.2538-01	-.4017-01	.6412+01	.1409+04	.2901+04	.4532+01
N	.3251-02	.1138-02	-.5710-00	-.1164+03	.1213+02	.8008+01

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.3191+04	-.6042+04	.1603+05	-.3648+03	-.1245+05
Y	-.2588+04	.1698+05	.6090+04	.9286+04	.3642-02
Z	-.1372+06	-.4912+03	.3567+05	.1968+02	-.5424+02
L	-.5486+05	.6866+06	.2696+06	.8980+04	-.7352+04
M	.3387+06	.2770+06	-.7256+06	-.6137+03	.1048+05
N	.1176+06	-.2227+05	.2886+05	-.2828+06	.1089+02

THE INERTIA TENSOR

.1150+05	-.3502-07	-.1438+03
-.3502-07	.5000+05	-.1308-09
-.1438+03	-.1308-09	.5500+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.1015+03	-.9231-10	-.3356-00	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1781-00	-.6380-02	.3553-01	.4949-01	-.3305-02	-.2485-01
----------	-----------	----------	----------	-----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= .3711-06 PHI -.2485-01
AIRCRAFT INERTIAL SPEED= .1015+03

NOT REPRODUCIBLE

DENOMINATOR CHARACTERISTIC ROOTS

REAL PART	IMAGINARY PART
-.5207-01	.0000
-.1051+02	.0000
-.9338-00	.0000
-.3657-01	.2580-00
-.3657-01	-.2580-00
-.2812-00	.1060+01
-.2812-00	-.1060+01
-.1883+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

NUMERATORS
(NOTE- NUMERATOR ROOTS LESS THAN $1.0E-7$ TIMES THE
LARGEST NUMERATOR ROOT ARE NOT INCLUDED IN THE BODE GAIN).

X(1)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .5938+01

BODE GAIN = -.1872+04

ROOTS

REAL PART	IMAGINARY PART
.1954-08	.0000
-.7678-00	.0000
-.5997-01	.0000
-.3016-00	.1040+01
-.3016-00	-.1040+01
-.1076+02	.0000
.2243+01	.6133+01
.2243+01	-.6133+01
.3107-08	.0000
.0000	.0000

X(2)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .5811+01

BODE GAIN = .1846+03

ROOTS

REAL PART	IMAGINARY PART
-.9869-07	.0000
-.2356+02	.0000
-.1912+02	.0000
-.2745+01	.0000

NOT REPRODUCIBLE

-.6814-00	.0000
-.6320-02	.4141-00
-.6320-02	-.4141-00
.1727-01	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .2831+03

BODE GAIN = -.1349+03

ROOTS

REAL PART	IMAGINARY PART
-.3250-07	.0000
-.1062+02	.0000
-.2909-00	.1025+01
-.2909-00	-.1025+01
-.3904-00	.0000
.4104-00	.2766-00
.4104-00	-.2766-00
-.3249-01	.0000
-.4018-08	.0000
.0000	.0000

X(4)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .7954+01

BODE GAIN = -.5155+02

ROOTS

REAL PART	IMAGINARY PART
-.2029-07	.0000
.9336-07	.0000
-.6343-00	.0000
.2887-02	.5268-00
.2887-02	-.5268-00
-.1185+01	.1215+01
-.1185+01	-.1215+01
.1005+01	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(5)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.6928+01

BODE GAIN = -.4074-00

ROOTS

REAL PART	IMAGINARY PART
-.7726-08	.0000
-.1118+02	.0000
-.2951-00	.1057+01
-.2951-00	-.1057+01
.3695-01	.0000
-.8103-00	.0000
-.8839-01	.6047-01
-.8839-01	-.6047-01
.0000	.0000
.0000	.0000

X(6)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.2139+01

BODE GAIN = .1639+02

ROOTS

REAL PART	IMAGINARY PART
-.1292-00	.3906-00
-.1292-00	-.3908-00
.1358-00	.3795-00
.1358-00	-.3795-00
-.1048+02	.0000
-.3100+01	.0000
-.6735-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .1710+02

BODE GAIN = -.1518+04

NOT REPRODUCIBLE

ROOTS

REAL PART	IMAGINARY PART
-.6910-07	.0000
-.5853-00	.0000
-.9773-01	.0000
-.9043+01	.0000
-.1127+01	.3289+01
-.1127+01	-.3289+01
-.2343-00	.1030+01
-.2343-00	-.1030+01
.0000	.0000
.0000	.0000

X(2)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.3455+02

BODE GAIN = .2218+04

ROOTS

REAL PART	IMAGINARY PART
.1093-02	.2373-00
.1093-02	-.2373-00
-.3779-00	.0000
-.1712+01	.8919+01
-.1712+01	-.8919+01
-.1539+01	.7105-00
-.1539+01	-.7105-00
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .1399+01

BODE GAIN = .3242+03

ROOTS

REAL PART	IMAGINARY PART
-.1435-01	.1679-00
-.1435-01	-.1679-00
-.1658-00	.0000
.5210+03	.0000
-.6470+01	.0000
-.2498-00	.1042+01
-.2498-00	-.1042+01
.1863-08	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.7944+02

BODE GAIN = -.1517+03

ROOTS

REAL PART	IMAGINARY PART
-.2971-01	.2796-00
-.2971-01	-.2796-00
-.8446-00	.0000
-.3337-00	.1003+01
-.3337-00	-.1003+01
-.2010+01	.0000
.1044-06	.0000
-.2275-08	.0000
.4235-08	.0000
.0000	.0000

X(5)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.8274+01

BODE GAIN = -.1168+01

ROOTS

REAL PART	IMAGINARY PART
.9329-01	.0000
-.1085+00	.1160+00
-.1085+00	-.1160+00
-.5868+01	.0000
-.2646-00	.1040+01
-.2646-00	-.1040+01
-.6961-00	.0000
.2794-08	.0000
-.4404-09	.0000
.0000	.0000

NOT REPRODUCIBLE

X(6)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .3635-00

BODE GAIN = .4697+02

ROOTS

REAL PART	IMAGINARY PART
-.3459-01	.2713-00
-.3459-01	-.2713-00
-.9177+01	.0000
-.2239+01	.2116+01
-.2239+01	-.2116+01
.2298+01	.0000
-.6783-00	.0000
-.1339-07	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(1)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.3105+02

BODE GAIN = .3016+04

ROOTS

REAL PART	IMAGINARY PART
.3576-07	.0000
-.5978-00	.0000
-.5325-01	.0000
-.1581+02	.0000
-.8439-01	.4339+01
-.8439-01	-.4339+01
-.2802-00	.1049+01
-.2802-00	-.1049+01
.0000	.0000
.0000	.0000

X(2)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.1341+02

BODE GAIN = .2485+03

ROOTS

REAL PART	IMAGINARY PART
-.2771-01	.0000
.6986-00	.8364+01
.6986-00	-.8364+01
.5760-00	.7034-00

.5760-00	-.7034-00
-.3838+01	.0000
-.2351-00	.0000
.1397-08	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.7339+02

BODE GAIN = -.2854+03

ROOTS

REAL PART	IMAGINARY PART
-.5657-01	.0000
.1900+02	.0000
-.3203-01	.1430-00
-.3203-01	-.1430-00
-.1117+02	.0000
-.2812-00	.1052+01
-.2812-00	-.1052+01
-.6752-08	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.3419+02

BODE GAIN = -.9588-11

ROOTS

REAL PART	IMAGINARY PART
-.7133-06	.0000
.9713-06	.0000
-.1357-00	.1049+01
-.1357-00	-.1049+01
.9179-01	.0000
-.1229+01	.8263-00
-.1229+01	-.8263-00
-.1412-00	.0000
.1288-06	.0000
.0000	.0000

X(5)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .1440+02

BODE GAIN = .1127+00

ROOTS

REAL PART	IMAGINARY PART
.1198-01	.0000
-.1177+02	.0000
-.2829-00	.1055+01
-.2829-00	-.1055+01
-.6862-00	.0000
-.6750-01	.2777-01
-.6750-01	-.2777-01
.0000	.0000
-.1118-07	.0000
.0000	.0000

X(6)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.5379-00

BODE GAIN = -.4535+01

ROOTS

REAL PART	IMAGINARY PART
.1180+00	.0000
-.1488-00	.0000
-.1079+02	.0000
.2176-00	.3538+01
.2176-00	-.3538+01
-.1412-00	.5082-00
-.1412-00	-.5082-00
.0000	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .8080-00

BODE GAIN = .1767+03

ROOTS

REAL PART	IMAGINARY PART
.1787-06	.0000
-.1013+02	.0000
-.6255-00	.0000
-.1442-00	.2323-00
-.1442-00	-.2323-00
-.2745+01	.1628+01
-.2745+01	-.1628+01
.3562+01	.0000
.1887-08	.0000
.0000	.0000

X(2)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.1917+02

BODE GAIN = -.5864-00

ROOTS

REAL PART	IMAGINARY PART	REAL PART
.6813-04	.0000	.6813-04
-.2687+02	.0000	-.2687+02
-.1069+02	.0000	-.1069+02
-.1869+01	.0000	-.1869+01
-.9544-00	.0000	-.9544-00
-.3670-01	.2599-00	-.3670-01
-.3670-01	-.2599-00	-.3670-01
.0000	.0000	.0000
.0000	.0000	.0000
.0000	.0000	.0000

X(3)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.3575-01

BODE GAIN = -.5299+02

ROOTS

REAL PART	IMAGINARY PART	REAL PART
.1509-07	.0000	.1509-07
.2961+03	.0000	.2961+03
-.2316-02	.2100-00	-.2316-02
-.2316-02	-.2100-00	-.2316-02
-.2120-00	.3255-00	-.2120-00
-.2120-00	-.3255-00	-.2120-00
-.1508+02	.0000	-.1508+02
-.3917+01	.0000	-.3917+01
.0000	.0000	.0000
.0000	.0000	.0000

X(4)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.9614-00

BODE GAIN = .3154+02

ROOTS

REAL PART	IMAGINARY PART
-.3663-01	.2612-00
-.3663-01	-.2612-00
-.4528+01	.0000
.4699+01	.0000
-.1791+01	.0000
-.9728-00	.0000
.0000	.0000
.1152-06	.0000
.5626-07	.0000
.0000	.0000

X(5)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.1525-01

BODE GAIN = .2485-00

ROOTS

REAL PART	IMAGINARY PART
-.5731-00	.2889-00
-.5731-00	-.2889-00
-.9789-01	.2122-00
-.9789-01	-.2122-00
.4768+02	.0000
-.5724+01	.0000
.2086-00	.0000
.2794-08	.0000
.0000	.0000
.0000	.0000

X(6)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .5142+01

BODE GAIN = -.9999+01

ROOTS

REAL PART	IMAGINARY PART	REAL PART
-.3739-01	.2629-00	-.3739-01
-.3739-01	.2629-00	-.3739-01
-.1934-01	.3394-00	-.1934-01
-.1934-01	.3394-00	-.1934-01
-.1051+02	.0000	-.1051+02
-.1867+01	.0000	-.1867+01

-.9553-00
.0000
.0000
.0000

.0000
.0000
.0000
.0000
.0000

.0000
.0000
.0000
.0000
.0000

X(1)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .2565+02

BODE GAIN = -.4076+02

ROOTS

REAL PART	IMAGINARY PART	REAL PART
-.2336-07	.0000	-.2336-07
-.1052+02	.0000	-.1052+02
-.1237+00	.0000	-.1237+00
-.4334-01	.0000	-.4334-01
-.1326+01	.2847-00	-.1326+01
-.1326+01	-.2847-00	-.1326+01
-.2807-00	.1060+01	-.2807-00
-.2807-00	-.1060+01	-.2807-00
.0000	.0000	.0000
.0000	.0000	.0000

X(2)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .111E-01

BODE GAIN = -.1402+02

ROOTS

REAL PART	IMAGINARY PART
-.2808-01	.7763-01
-.2808-01	-.7763-01
.2426+03	.0000
.1550+02	.0000

-.3340+01	.0000
-.3693-00	.1008+01
-.3693-00	-.1008+01
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .1066+00

BODE GAIN = .4573+01

ROOTS

REAL PART	IMAGINARY PART
.1682-06	.0000
.2164+03	.0000
.1254-00	.9663-01
.1254-00	-.9663-01
-.4291-01	.0000
-.1198+02	.0000
-.2818-00	.1062+01
-.2818-00	-.1062+01
.0000	.0000
.0000	.0000

X(4)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .8971-00

BODE GAIN = .4788-00

ROOTS

REAL PART
-.1765-07
-.1407-06
.1142-06
-.3036-00
-.3036-00
-.1284+01
-.1284+01
.2276-00
.7335-01
-.4705-08

IMAGINARY PART
.0000
.0000
.0000
.1054+01
-.1054+01
.6620-00
-.6620-00
.0000
.0000
.0000
.0000

X(5)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.1960-00

BODE GAIN = .3503-02

ROOTS

REAL PART
.4236-02
-.1279+02
-.2811-00
-.2811-00
-.6956-00
.4988-00
-.6195-01
.1414-06
-.1213-07
.0000

IMAGINARY PART
.0000
.0000
.1061+01
-.1061+01
.0000
.0000
.0000
.0000
.0000
.0000

X(6)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .2061-03

BODE GAIN = -.1410-00

ROOTS

REAL PART	IMAGINARY PART
.5128-01	.0000
.3745+03	.0000
.1125+00	.4420-00
.1125+00	-.4420-00
-.1113+02	.0000
-.4288-00	.1012+01
-.4288-00	-.1012+01
-.1048-06	.0000
.0000	.0000
.0000	.0000

LOCKHEED AH56A HELICOPTER JUN 10 1970 POSTAB-B DERIVATIVES
CASE 9 SPEED=169.0 FT/SEC. H-ROT= 0.0 FT/SEC. GAMMA= 0.0 DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.3933+02	.2112+01	-.1004+02	-.3461+03	.1401+04	-.7934+02
Y	.2632+02	-.7188+02	-.4676+01	-.1395+04	-.3105+03	.1287+04
Z	-.2410+02	-.3327+01	-.4259+03	-.1245+04	-.4227+03	.9934+03
L	-.5695+02	-.3575+03	-.2509+02	-.9066+05	.6977+04	-.6762+03
M	.1563+03	-.3236+02	-.2365+03	-.5995+04	-.1068+04	.2365+04
N	-.8039+02	.7339+03	-.1005+03	-.3108+04	.7712+04	-.4083+05
	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	.9264+02	-.6105+04	-.2215+00	-.2378+02	.7664+02	-.1027+01
Y	-.7761+02	-.9309+04	.1805+05	-.6160+01	-.2153+02	.6349+01
Z	.1223+02	-.2123+02	-.5049+01	-.6271+01	.3566+01	-.3094+00
L	-.8775+00	-.2072+01	.2004+02	.3046+04	-.1312+04	.1291+03
M	-.4194+00	-.3234+01	.0993+01	.1385+04	.3023+04	.5746+02
N	.2206+01	-.7512+03	-.5165+00	-.5898+02	-.3871+02	.6021+01
	C (1)	C (2)	C (3)	C (4)	C (5)	
X	-.7084+04	-.5032+04	.1418+05	-.6918+03	-.1657+05	
Y	-.4102+04	.1534+05	.5426+04	.1261+05	.9509+02	
Z	-.1630+06	-.1223+04	.7735+05	.2551+02	-.7979+03	
L	-.8114+05	.6822+06	.2523+06	.2707+05	-.1610+05	
M	.5917+06	.2720+06	-.7985+06	.1530+04	.1150+05	
N	.7634+05	-.3583+04	.5164+05	-.3844+06	.9744+02	

THE INERTIA TENSOR

.1150+05	.0000	-.1841+04
.0000	.5000+05	.0000
-.1841+04	.0000	.5492+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.1688+03	-.0000	-.7160+01	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1844+00	-.9394+02	.5553+01	.3771+01	-.4237+01	-.2507+01
----------	-----------	----------	----------	-----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= .0345+05 PHI= -.2505+01
AIRCRAFT INERTIAL SPEED= .1690+03

DENOMINATOR CHARACTERISTIC ROOTS

REAL PART	IMAGINARY PART
-.3692-01	.0000
-.1062+02	.0000
-.4014-00	.1510+01
-.4014-00	-.1510+01
-.4126-01	.1881-00
-.4126-01	-.1881-00
-.1580+01	.5560-00
-.1580+01	-.5560-00
.0000	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NUMERATORS
(NOTE- NUMERATOR ROOTS LESS THAN $1.0E-7$ TIMES THE
LARGEST NUMERATOR ROOT ARE NOT INCLUDED IN THE BODE GAIN).

X(1)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .1388+02

BODE GAIN = -.4430+04

ROOTS

REAL PART	IMAGINARY PART
.3456-07	.0000
-.9212-00	.0000
-.4117-01	.0000
-.4148-00	.1492+01
-.4148-00	-.1492+01
-.1070+02	.0000
.4492-00	.5697+01
.4492-00	-.5697+01
.0000	.0000
.0000	.0000

X(2)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .9172+01

BODE GAIN = .4403+03

ROOTS

REAL PART	IMAGINARY PART
-.1004-06	.0000
.6410-01	.4604-00
.6410-01	-.4604-00
.3066-01	.0000

-.4942-00	.0000
-.1250+02	.1502+02
-.1250+02	-.1502+02
-.3823+01	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .3362+03

BODE GAIN = -.1197-02

ROOTS

REAL PART	IMAGINARY PART
.1340-04	.0000
-.1078+02	.0000
-.1619-00	.0000
-.2211-01	.0000
.7003-01	.0000
.4060+01	.0000
-.4114-00	.1499+01
-.4114-00	-.1499+01
.0000	.0000
.0000	.0000

X(4)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .1193+02

BODE GAIN = -.1569-03

ROOTS

REAL PART	IMAGINARY PART
-.4046-00	.0000
.5038-00	.0000
.7023-01	.9470-00
.7023-01	-.9470-00
-.1255+01	.1718+01
-.1255+01	-.1718+01
.1574-05	.0000
.2466-07	.0000
.0000	.0000
.2887-07	.0000

X(5)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.1215+02

BODE GAIN = -.4713-00

ROOTS

REAL PART	IMAGINARY PART
.2220-01	.0000
-.7029-01	.3768-01
-.7029-01	-.3768-01
-.1115+02	.0000
-.4094-00	.1507+01
-.4094-00	-.1507+01
-.1006+01	.0000
.1456-07	.0000
-.9313-07	.0000
.0000	.0000

X(6)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.9975-00

BODE GAIN = .1881+02

ROOTS

REAL PART	IMAGINARY PART
-.2210-00	.4607-00
-.2210-00	-.4607-00
-.4607-00	.0000
.3056-00	.3350-00
.3056-00	-.3350-00
-.1755+02	.0000
-.4327+01	.0000
.0000	.0000
-.6985-09	.0000
.0000	.0000

X(1)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .1428+02

BODE GAIN = -.2325+04

ROOTS

REAL PART	IMAGINARY PART
-.1089-06	.0000
-.7662-00	.0000
-.6498-01	.0000
-.9999+01	.0000
-.1284+01	.3532+01
-.1284+01	-.3532+01
-.3635-00	.1475+01
-.3635-00	-.1475+01
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(2)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.3156+02

BODE GAIN = .2163+04

ROOTS

REAL PART	IMAGINARY PART
-.6119-02	.1834-00
-.6119-02	-.1834-00
-.4083-00	.0000
.4978+01	.9134+01
.4978+01	-.9134+01
-.1759+01	.1221+01
-.1759+01	-.1221+01
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .3492+01

BODE GAIN = .2170+03

ROOTS

REAL PART	IMAGINARY PART
-.1526-01	.9454-01
-.1526-01	-.9454-01
-.1200+00	.0000
.3318+03	.0000
-.7140+01	.0000
-.3840-00	.1492+01
-.3840-00	-.1492+01
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN = $-.7926+02$

BODE GAIN = $.4878-09$

ROOTS

REAL PART	IMAGINARY PART
.1413-05	.0000
-.1519-05	.0000
-.4542-00	.1476+01
-.4542-00	-.1476+01
-.3841-01	.2070-00
-.3841-01	-.2070-00
-.1603+01	.3632-00
-.1603+01	-.3632-00
.4098-07	.0000
.0000	.0000

X(5)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN = $-.8129+01$

BODE GAIN = $-.1058+01$

ROOTS

REAL PART	IMAGINARY PART
.6390-01	.0000
-.8735-01	.8341-01
-.8735-01	-.8341-01
-.6393+01	.0000
-.3923-00	.1494+01
-.3923-00	-.1494+01
-.9113-00	.0000
-.1316-07	.0000
.1130-07	.0000
.0000	.0000

X(6)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.2501+01

BODE GAIN = .4221+02

ROOTS

REAL PART	IMAGINARY PART
.1820-07	.0000
.2579-06	.0000
-.4014-01	.2041-00
-.4014-01	-.2041-00
-.2171+01	.1483+01
-.2171+01	-.1483+01
.1674+01	.1799+01
.1674+01	-.1799+01
-.9310-00	.0000
.0000	.0000

X(1)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.2759+02

BODE GAIN = .5165+04

ROOTS

REAL PART	IMAGINARY PART
.7815-07	.0000
-.8120-00	.0000
-.3877-01	.0000
-.4024-00	.1499+01
-.4024-00	-.1499+01
-.1074+02	.0000
-.1551-00	.4764+01
-.1551-00	-.4764+01
.0000	.0000
.0000	.0000

X(2)-TO-C(3) NUMERATOR

ROTAREMUM (E) 13-07-13 7X

ROOT LOCUS GAIN = $-.1207+02$

BODE GAIN = $-.8300+02$

ROOTS

REAL PART	IMAGINARY PART	REAL PART
.6749-02	.00000000	70-0000
.2166+02	.00000000	80-0000
.5549-00	.00000000	90-0000
-.2373-00	.00000000	00-0000
-.4680+01	.0000	00-0000
.1629+01	.2225+01	00-0000
.1629+01	-.2225+01	10-0000
-.3562-07	.0000	10-0000
.0000	.0000	00-0000
.0000	.0000	00-0000

X(3)-TO-C(3) NUMERATOR

ROTAREMUM (E) 13-07-13 7X

ROOT LOCUS GAIN = $-.1385+03$

BODE GAIN = $-.1574+03$

ROOTS

REAL PART	IMAGINARY PART	REAL PART
-.2950-01	.5947-01	10-0000
-.2950-01	-.5947-01	20-0000
-.5248-01	.0000	30-0000
.1817+02	.0000	40-0000
-.1111+02	.0000	50-0000
-.4032-00	.1504+01	60-0000
-.4032-00	-.1504+01	70-0000
.0000	.0000	80-0000
.0000	.0000	90-0000
.0000	.0000	00-0000

X(4)=TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.3281+02

BODE GAIN = .1170-15

ROOTS

REAL PART	IMAGINARY PART
-.2380-07	.0000
.4733-06	.0000
.1514-05	.0000
.3206-05	.0000
-.2439-00	.1447+01
-.2439-00	-.1447+01
-.1334+01	.1333+01
-.1334+01	-.1333+01
-.1761-00	.0000
.1146+00	.0000

X(5)=TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .1600+02

BODE GAIN = .2419-00

ROOTS

REAL PART	IMAGINARY PART
.1252-01	.0000
-.1163+02	.0000
-.4039-00	.1506+01
-.4039-00	-.1506+01
-.9100-00	.0000
-.6395-01	.2416-01
-.6395-01	-.2416-01
.0000	.0000
.2561-06	.0000
.0000	.0000

X(2)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN = $-.2603+02$

BODE GAIN = $.6202+02$

ROOTS

REAL PART	IMAGINARY PART
$-.4665-02$	$.0000$
$-.4477+02$	$.0000$
$-.1077+02$	$.0000$
$-.1579+01$	$.5755-01$
$-.1579+01$	$-.5755-01$
$-.4116-01$	$.1888-01$
$-.4116-01$	$-.1888-01$
$.0000$	$.0000$
$.0000$	$.0000$
$.0000$	$.0000$

X(3)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN = $-.3733-01$

BODE GAIN = $-.3344+02$

ROOTS

REAL PART	IMAGINARY PART
$-.1345-01$	$.1416-01$
$-.1345-01$	$-.1416-01$
$.1928+03$	$.0000$
$-.2086-00$	$.2899-00$
$-.2086-00$	$-.2899-00$
$-.2823+02$	$.0000$
$-.6351+01$	$.0000$
$.0000$	$.0000$
$.0000$	$.0000$
$.0000$	$.0000$

NOT REPRODUCIBLE

X(6)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.2015+01

BODE GAIN = -.9655+01

ROOTS

REAL PART	IMAGINARY PART
.1240+00	.0000
-.1822-00	.0000
-.1985-00	.6045-00
-.1985-00	-.6045-00
-.6177+01	.0000
.4683-00	.2868+01
.4683-00	-.2868+01
.0000	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .1490+01

BODE GAIN = .2286+03

ROOTS

REAL PART	IMAGINARY PART
.2476-06	.0000
-.1053+02	.0000
-.1246+00	.1944-00
-.1246+00	-.1944-00
-.9741-00	.0000
-.2516+01	.1812+01
-.2516+01	-.1812+01
.2904+01	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(4) GENERATOR

ROOT LOCUS GAIN = -.1557+01

BODE GAIN = .7179-04

ROOTS

REAL PART	IMAGINARY PART
-.2555-07	.9103-08
-.2555-07	-.9103-08
.1603-05	.0000
-.6004+01	.0000
-.1551+01	.6033-00
-.1551+01	-.6033-00
.4572+01	.0000
-.4066-01	.1894-00
-.4066-01	-.1894-00
.0000	.0000

X(5)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN = -.6990-01

BODE GAIN = .2145-00

ROOTS

REAL PART	IMAGINARY PART
-.6480-00	.3386-00
-.6480-00	-.3386-00
-.8055-01	.1731-00
-.8055-01	-.1731-00
.1113+02	.0000
-.7540+01	.0000
.1800-00	.0000
-.7451-00	.0000
.4435-07	.0000
.9313-09	.0000

X(6)-Y0-C(4) NUMERATOR

ROOT LOCUS GAIN= .6950+01

BODE GAIN = -.8562+01

ROOTS

REAL PART	IMAGINARY PART
-.4046-01	.1903-00
-.4048-01	-.1903-00
-.3819-01	.3255-00
-.3819-01	-.3255-00
-.1068+02	.0000
-.1579+01	.5762-00
-.1579+01	-.5762-00
.0000	.0000
.0000	.0000
.0000	.0000

X(1)-Y0-C(5) NUMERATOR

ROOT LOCUS GAIN= .3411+02

BODE GAIN = -.6390+02

ROOTS

REAL PART	IMAGINARY PART
-.7786+08	.0000
-.1063+02	.0000
-.4005-00	.1512+01
-.4005-00	-.1512+01
-.2645-01	.0000
-.1522+01	.7318-00
-.1522+01	-.7318-00
-.9518-01	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .1477-01

BODE GAIN = -.3377+02

ROOTS

REAL PART	IMAGINARY PART
-.2417-01	.8547-01
-.2417-01	-.8547-01
.1038+04	.0000
.7510+01	.0000
-.3197+01	.0000
-.4642-00	.9707-00
-.4642-00	-.9707-00
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .1620+01

BODE GAIN = .7837-00

ROOTS

REAL PART	IMAGINARY PART
.1139-01	.0000
.2262+02	.0000
.2687-00	.0000
-.2256-01	.0000
-.1254+02	.0000
-.4103-00	.1513+01
-.4103-00	-.1513+01
-.1697-00	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .1930+01

BODE GAIN = .4006-05

ROOTS

REAL PART	IMAGINARY PART
.5621-01	.1255-00
.5621-01	-.1255-00
-.4300-00	.1451+01
-.4300-00	-.1451+01
-.1502+01	.9182-00
-.1502+01	-.9182-00
.1522-05	.0000
-.5633-07	.0000
-.2142-07	.0000
.0000	.0000

X(5)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.167P-00

BODE GAIN = .1202-01

ROOTS

REAL PART	IMAGINARY PART
.1005-01	.0000
-.1514+02	.0000
-.4072-00	.1514+01
-.4072-00	-.1514+01
-.9068-00	.0000
.3692-00	.0000
-.5088-01	.0000
.2261-07	.0000
-.7272-06	.0000
.0000	.0000

X(6)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .6098-01

BODE GAIN = -.4800-00

ROOTS

REAL PART	IMAGINARY PART
.7916-01	.1428-00
.7916-01	-.1428-00
.4974-01	.0000
.9808-00	.0000
-.4328-01	.0000
-.6891-00	.9577-00
-.6891-00	-.9577-00
.3493-07	.0000
.0000	.0000
.0000	.0000

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAB-B DERIVATIVES
CASE 10 SPEED= 9.6 FT/SEC. H-DOT= -9.6 FT/SEC. GAMMA=-90.0 DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.1035+03	-.1469+01	-.3507-00	.1054+04	.2779+01	-.1959+03
Y	-.2949+01	-.2208+02	.2302+01	.4388+03	-.3731+03	.1514+04
Z	-.1160+01	-.1758+01	-.5789+01	.9805+02	-.1569+04	-.4832+03
L	-.1032+03	.3336+03	.7244+01	-.1217+05	-.8920+03	-.1181+04
M	-.7856+02	-.6321+02	-.4838+03	.6409+04	-.8794+05	.1001+05
N	-.2806+02	.4281+03	-.0585+02	-.1152+04	-.1094+05	-.8655+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	.6702-03	.6339-04	-.2193-04	-.2676-01	.1518+01	-.2967-00
Y	-.9814-02	-.8471-03	.3777-03	.1390+01	-.2404+02	-.1540+01
Z	.1403-01	.2794-03	-.8386-04	-.4536-00	.1514+01	-.2406+02
L	-.1263-02	.8701-02	-.4591-02	.1863+02	-.1434+03	.1468+03
M	.1781-00	-.9041-02	.1673-01	-.1934+03	.2944+04	-.1422+04
N	.1123+00	.5952-02	-.1635-02	-.3257+02	.1428+04	.2960+04

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.1113+06	-.1069+04	-.6620+03	-.6002+03	.5480+02
Y	-.6650+04	.1904+05	.5364+04	.0933+04	.2367+01
Z	.6675+02	.5404+04	-.1908+05	.5136+01	.2504+04
L	.2684+06	-.3231+05	.3323+05	-.2698+06	-.8440+03
M	-.3058+04	.2738+06	-.6847+06	-.2355+05	.2575+04
N	-.3364+04	-.6855+06	-.2752+06	-.3691+04	-.3001+02

THE INERTIA TENSOR

	.5497+05	.2900+03	-.7388+03
	.2900+03	.5002+05	-.4310+02
	-.7388+03	-.4310+02	.1151+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

	U	V	W	P	Q	R
	-.1631-00	-.5591-00	.9582+01	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

	.2286-00	.5642-03	-.5838-02	.1617-00	.1699-01	-.5828-01
--	----------	----------	-----------	----------	----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= .1572+01 PHI .0000
AIRCRAFT INERTIAL SPEED= .9600+01

NOT REPRODUCIBLE

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAB-B DERIVATIVES
CASE 11 SPEED= 33.6 FT/SEC, H-DOT= -9.6 FT/SEC, GAMMA=-16.5 DEG,
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.8079+02	.1432+01	-.2732+02	-.2874+03	.1559+04	.3199+03
Y	.5335+01	-.2851+02	-.8629-00	-.1402+04	-.3472+03	.9266+03
Z	-.1605+03	-.1380+01	-.1085+03	.4110+03	-.2843+03	.7961+03
L	-.1421+03	-.2762+03	.6715+01	-.7962+05	.9176+04	.1989+05
M	.3060+03	-.6649+02	-.5966+02	-.8533+04	-.8683+05	.4952+04
N	-.2144+03	.4310+03	-.3425+02	.1896+05	-.5168+04	-.2177+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.1494-01	-.6614-04	-.4810-01	-.2077+02	-.3065-00	.6435+01
Y	.1468-01	.1347-03	.4690-01	.6518-00	-.2580+02	-.2071-00
Z	.1067-01	-.9861-03	.3429-01	.1481+02	.1049+01	-.4501+01
L	.1112+01	.4930-03	.3603+01	.2700+04	-.1347+04	-.8354+03
M	.6547-00	-.2867-01	.2105+01	.1356+04	.2963+04	-.4179+03
N	-.3714-00	-.2485-02	-.1194+01	-.8763+03	.4238+03	.2804+03

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.3008+05	-.4790+04	.1737+05	-.1846+03	-.6235+04
Y	-.6861+03	.1811+05	.5607+04	.7754+04	.7283-03
Z	-.9802+05	.3381+04	-.2966+04	.2297+02	.1967+04
L	.4812+05	.6494+06	.2615+06	-.6307+05	-.1516+04
M	.7875+05	.2754+06	-.6850+06	-.4741+04	.6710+04
N	.2194+06	-.2114+06	-.8157+05	-.2270+06	-.4283+03

THE INERTIA TENSOR

	.1532+05	-.3822-05	.1231+05
	-.3822-05	.5000+05	.1357-05
	.1231+05	.1357-05	.5118+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.3228+02	-.3725-08	.1002+02	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.2049-00	-.1744-02	.1020-01	.1254-00	.1254-01	-.4383-01
----------	-----------	----------	----------	----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= -.2881-00 PHI -.4571-01
AIRCRAFT INERTIAL SPEED= .3380+02

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAR-B DERIVATIVES
CASE 12 SPEED= 67.8 FT/SEC, H-DOT= -9.6 FT/SEC, GAMMA= -8.05DEG,
GROSS WEIGHT=15600, SEA LEVEL, DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	J	V	W	P	Q	R
X	-.6395+02	.1807+01	-.4495+02	-.2853+03	.1855+04	.9453+02
Y	.9959-00	-.3479+02	-.1721+01	-.1666+04	-.2405+03	.9718+03
Z	-.1103+03	-.1275+01	-.2497+03	-.1357+03	-.2308+03	.8893+03
L	-.9118+02	-.2510+03	-.3882+02	-.8715+05	.9451+04	.9968+04
M	.1801+03	-.4532+02	-.1927+03	-.8416+04	-.9408+05	.3708+04
N	-.1937+03	.4994+03	-.2070+03	.1086+05	.4188+03	-.2385+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.1787-01	-.1056-04	-.1143+00	-.2801+02	.1119+01	.4365+01
Y	.1239-01	-.1266-03	.8001-01	-.8424-00	-.2923+02	.1300-00
Z	.4514-02	-.8483-03	.2888-01	.6153+01	.9143-00	-.9372-00
L	.1234+01	.1298-02	.7919+01	.2905+04	-.1367+04	-.4529+03
M	.5836-00	-.2551-01	.4374+01	.1387+04	.2980+04	-.2161+03
N	-.2391-00	.4422-03	-.1534+01	-.5432+03	.2294+03	.9331+02

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.1432+05	-.6019+04	.1752+05	-.1992+03	-.9673+04
Y	-.1663+04	.1667+05	.8249+04	.7283+04	.3017-02
Z	-.1180+06	.1330+04	.1650+05	.1790+02	.1564+04
L	-.1878+05	.6690+06	.2716+06	-.2778+05	-.3954+04
M	.2217+06	.2763+06	-.6970+06	-.1792+04	.1020+05
N	.1245+06	-.1220+06	-.2564+05	-.2197+06	-.3730+03

THE INERTIA TENSOR

.1254+05	-.2058-05	.6637+04
-.2058-05	.5000+05	.3647-06
.6637+04	.3647-06	.5396+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.6699+02	-.3725-08	.1047+02	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1648-00	-.2967-02	.1915-01	.5098-01	.1295-01	-.2007-01
----------	-----------	----------	----------	----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= -.1421-00 PHI -.2027-01
AIRCRAFT INERTIAL SPEED= .6730+02

NOT REPRODUCIBLE

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAH-B DERIVATIVES
CASE 13 SPEED=101.5 FT/SEC. H-DOT= -9.6 FT/SEC. GAMMA= -5.41DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.4197+02	.1716+01	-.3752+02	-.3163+03	.1710+04	.6598+02
Y	.7185-01	-.4990+02	-.3083+01	-.1566+04	-.2284+03	.1054+04
Z	-.7087+02	-.1215+01	-.3213+03	-.5238+03	-.2479+03	.9326+03
L	-.6465+02	-.2552+03	-.3674+02	-.8812+05	.8800+04	.5133+04
M	.1541+03	-.3582+02	-.1628+03	-.7736+04	-.9713+05	.3055+04
N	-.1057+03	.5966+03	-.2416+03	.4130+04	.3953+04	-.2918+03

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.1283-01	-.1780-03	-.1720-00	-.2782+02	.1094+01	.2033+01
Y	.7451-02	-.2166-03	.1034+00	-.4923-00	-.2670+02	.3637-01
Z	.4393-03	-.8071-03	.5693-02	-.3619-00	.2002+01	.2462-01
L	.8756-00	-.2062-02	.1201+02	.2983+04	-.1343+04	-.2187+03
M	.4874-00	-.1563-01	.6502+01	.1377+04	.2998+04	-.1013+03
N	-.1095+00	.2879-02	-.1508+01	-.3542+03	.1176+03	.3439+02

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.1676+05	-.5890+04	.1812+05	-.2804+03	-.1230+05
Y	-.2558+04	.1543+05	.5909+04	.9225+04	.4737-02
Z	-.1379+06	-.2411+02	.3471+05	.1834+02	.9504+03
L	-.4820+05	.8722+06	.2668+06	-.1247+05	-.7185+04
M	.3323+06	.2724+06	-.7134+06	-.8973+03	.1225+05
N	.8067+05	-.7241+05	.1229+05	-.2804+06	-.2124+03

THE INERTIA TENSOR

.1173+05	-.2107-05	.3181+04
-.2107-05	.5000+05	.1751-06
.3181+04	.1751-06	.5477+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.1012+03	-.5588-08	.7441+01	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1572-00	-.3394-02	.2530-01	.3443-01	-.2135-01	-.1637-01
----------	-----------	----------	----------	-----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= -.9474-01 PHI -.1644-01
AIRCRAFT INERTIAL SPEED= .1015+03

NOT REPRODUCIBLE

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAB-B DERIVATIVES
CASE 14 SPEED=169.0 FT/SEC, W-DOT= -9.6 FT/SEC, GAMMA= -3.25DEG,
GROSS WEIGHT=15600, SEA LEVEL, DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.3326+02	.1525+01	-.1871+02	-.3528+03	.1318+04	.9991+01
Y	.3373-00	-.6991+02	-.4841+01	-.1211+04	-.2281+03	.1339+04
Z	-.5078+02	-.1402+01	-.4275+03	-.1133+04	-.5014+03	.8842+03
L	-.5286+02	-.2616+03	-.2977+02	-.8756+05	.6966+04	.2025+04
M	.6579+02	-.2202+02	-.2242+03	-.5310+04	-.1038+06	.2269+04
N	-.5775+02	.7445+03	-.2033+03	-.1312+04	.7714+04	-.4034+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.5139-03	-.1213-03	-.2311-00	-.2217+02	.4567-00	.2245+01
Y	-.5342-04	-.3091-03	.1278-00	.8441-00	-.1960+02	-.2550-02
Z	-.1898-02	-.2675-02	-.4115-01	-.5039+01	.4327+01	-.2300-01
L	.1484-01	-.9680-02	.1957+02	.3054+04	-.1264+04	-.4409+01
M	.1627-01	-.2434-01	.1005+02	.1339+04	.3035+04	-.2884+01
N	-.5113-03	.2935-02	-.1400+01	-.1981+03	.1970+02	.8711+01

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.1628+05	-.4638+04	.1601+05	-.5347+03	-.1655+05
Y	-.3921+04	.1311+05	.5000+04	.1260+05	.7933-02
Z	-.1650+06	-.9644+03	.6752+05	.2260+02	.1312+02
L	-.7425+05	.6663+06	.2455+06	.1037+05	-.1600+05
M	.5847+06	.2638+06	-.7826+06	.6736+03	.1411+05
N	.3471+05	-.2922+05	.4484+05	-.3842+06	-.2732+01

THE INERTIA TENSOR

	.1150+05	-.4243-06	.6538+02
	-.4243-06	.5000+05	.7206-09
	.6538+02	.7206-09	.5500+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.1690+03	-.1863-08	.2540-00	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1570-00	-.4032-02	.3558-01	.2631-01	-.5533-01	-.1706-01
----------	-----------	----------	----------	-----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= -.5683-01 PHI -.1706-01
AIRCRAFT INERTIAL SPEED= .1690+03

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAB-B DERIVATIVES
CASE 15 SPEED= 19.2 FT/SEC. M-DOT=-19.2 FT/SEC. GAMMA=-90.0 DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.8870+02	.3770+01	-.2216+01	.1029+04	-.3486+02	-.1879+03
Y	.2292-00	-.2128+02	.2596+01	.4297+03	-.2773+03	.1575+04
Z	-.1976+01	-.2131+01	-.7394+01	.9108+02	-.1619+04	-.4410+03
L	-.1727+03	.3356+03	-.1586+02	-.1201+05	-.2919+04	-.1518+04
M	-.9954+02	-.5989+02	-.4954+03	.6044+04	-.8870+05	.1034+05
N	-.2571+02	.4126+03	-.8350+02	-.1198+04	-.1125+05	-.8649+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	.1870-02	.1220-03	-.3818-04	.1661-02	.1086+01	-.1913-00
Y	-.9939-02	-.4853-03	.1955-03	.1330+01	-.2497+02	-.9922-00
Z	.1513-01	.1269-03	-.2853-03	-.4308-00	.9960-00	-.2498+02
L	-.2522-02	.1762-02	.2191-03	.1688+02	-.1276+03	.1413+03
M	.1685-00	.1549-01	-.8926-02	-.1788+03	.2941+04	-.1423+04
N	.1172+00	.1718-01	-.1355-01	-.2504+02	.1428+04	.2956+04

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.1119+06	-.8415+03	-.5022+03	-.5907+03	.8869+02
Y	-.6071+04	.1861+05	.5522+04	.8516+04	.3290+01
Z	.2119+03	.5518+04	-.1865+05	.9227+01	.3779+04
L	.2505+06	-.3068+05	.2912+05	-.2573+06	-.1686+04
M	-.5571+04	.2738+06	-.6783+06	-.2271+05	.4059+04
N	-.4513+04	-.6790+06	-.2749+06	-.3844+04	.4860+02

THE INERTIA TENSOR

	.5497+05	.2650+03	-.7452+03
	.2650+03	.5001+05	-.3970+02
	-.7452+03	-.3970+02	.1151+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
-.3289-00	-.1022+01	.1917+02	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.2204-00	.6522-03	-.6575-02	.1486-00	.1713-01	-.5324-01
----------	----------	-----------	----------	----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= .1572+01 PHI .0000
AIRCRAFT INERTIAL SPEED= .1920+02

LOCKHEED AH56A HELICOPTER JUNE 10 1970 POSTAB-B DERIVATIVES
CASE 16 SPEED= 33.8 FT/SEC. W-DOT=-19.2 FT/SEC. GAMMA=-33.5 DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.1416+03	.9202-00	.2667+01	.7652+02	.1362+04	.5120+03
Y	.2969+01	-.2704+02	-.9930-01	-.1092+04	-.2698+03	.1326+04
Z	-.1560+03	-.1802+01	-.2699+02	.6640+03	-.9406+03	.4283+03
L	-.2050+03	-.1205+03	.3633+02	-.6200+05	.6457+04	.3356+05
M	.2567+03	-.6472+02	-.2293+03	-.6021+04	-.8859+05	.7515+04
N	-.1623+03	.4820+03	-.1795+02	.3291+05	-.9328+04	-.3862+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.1769-01	-.1554-02	-.2230-01	-.1140+02	.2742-00	.8135+01
Y	.2210-01	-.7102-04	.3132-01	.1868-00	-.2652+02	-.1321-00
Z	.2685-01	-.3182-02	.4162-01	.2034+02	.6615-00	-.1438+02
L	.1564+01	.6923-02	.2191+01	.1955+04	-.1147+04	-.1387+04
M	.1111+01	-.2533-01	.1562+01	.1158+04	.2959+04	-.8215+03
N	-.1145+01	-.2680-02	-.1610+01	-.1421+04	.8250+03	.1020+04

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.5764+05	-.3061+04	.1310+05	-.1626+03	-.5191+04
Y	-.6008+03	.1771+05	.5696+04	.7516+04	.1571-02
Z	-.4231+05	.5403+04	-.1089+05	.2632+02	.3770+04
L	.1091+06	.5464+06	.2220+06	-.1266+06	-.1840+04
M	.6423+05	.2754+06	-.6790+06	-.5695+04	.7502+04
N	.1817+06	-.3992+06	-.1603+06	-.1899+06	-.7201+03

THE INERTIA TENSOR

.2614+05	-.5260-05	.2055+05
-.5260-05	.5000+05	.4531-05
.2055+05	.4531-05	.4036+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.2753+02	-.7451-06	.1961+02	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1978-00	-.1298-02	.7760-02	.1182+00	.1417-01	-.3980-01
----------	-----------	----------	----------	----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= -.6042-00 PHI -.4836-01
AIRCRAFT INERTIAL SPEED= .3380+02

NOT REPRODUCIBLE

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAB-B DERIVATIVES
CASE 17 SPEED= 67.8 FT/SEC. R-DOT=-19.2 FT/SEC. GAMMA=-16.45DEG.
GROSS WEIGHT=15400. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.8230+02	.1577+01	-.6925+02	-.2211+03	.1747+04	.2363+03
Y	-.3172-00	-.3724+02	-.1666+01	-.1537+04	-.1773+03	.1168+04
Z	-.1394+03	-.9735-00	-.2124+03	-.9251+01	-.1847+03	.7808+03
L	-.1124+03	-.1482+03	-.6600+02	-.8193+05	.9417+04	.1781+05
M	.1329+03	-.3807+02	.5877+02	-.7822+04	-.8515+05	.4747+04
N	-.1899+03	.5136+03	-.2221+03	.1808+05	-.5959+03	-.2692+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.3200-01	.1756-03	-.1100+00	-.2654+02	.1746+01	.7763+01
Y	.1787-01	.3504-04	.6091-01	-.1405+01	-.2950+02	.4106-00
Z	.1480-01	.1007-02	.4504-01	.9911+01	.6084-00	-.2882+01
L	.2076+01	.9817-03	.7099+01	.2732+04	-.1309+04	-.7975+03
M	.1244+01	-.6827-02	.4216+01	.1330+04	.2984+04	-.3890+03
N	-.6925-00	-.1074-02	-.2363+01	-.8914+03	.4018+03	.2694+03

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.3268+05	-.5805+04	.1899+05	-.1453+03	-.9349+04
Y	-.1618+04	.1552+05	.6237+04	.7058+04	-.7713-03
Z	-.1148+06	.2193+04	.1374+05	.1545+02	.2845+04
L	-.1162+05	.6402+06	.2645+06	-.5410+05	-.4092+04
M	.2070+06	.2738+06	-.6865+06	-.1658+04	.1147+05
N	.9157+05	-.2043+06	-.5810+05	-.2074+06	-.6603+03

THE INERTIA TENSOR

.1493+05	-.1927-05	.1173+05
-.1927-05	.5000+05	.6446-06
.1173+05	.6446-06	.5157+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.6507+02	-.3725-08	.1905+02	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1463-00	-.1291-02	.1326-01	.3274-01	-.2301-02	-.1166-01
----------	-----------	----------	----------	-----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= -.2871-00 PHI -.1216-01
AIRCRAFT INERTIAL SPEED= .6780+02

NOT REPRODUCIBLE

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAB-B DERIVATIVES
CASE 18 SPEED=101.5 FT/SEC. 4-DOT=-19.2 FT/SEC. GAMMA=-10.9 DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.4934+02	.1497+01	-.5419+02	-.2913+03	.1710+04	.1765+03
Y	-.8717-00	-.4822+02	-.3096+01	-.1422+04	-.1552+03	.1174+04
Z	-.1053+03	-.2159-00	-.3107+03	-.4065+03	-.4331+03	.8216+03
L	-.6694+02	-.1507+03	-.6210+02	-.8464+05	.8984+04	.1047+05
M	.6734+02	-.2634+02	-.1735+03	-.7153+04	-.9528+05	.3515+04
N	-.9992+02	.6085+03	-.2742+03	.8588+04	.3794+04	-.3000+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.2948-01	-.2777-03	-.1784-00	-.2698+02	.1866+01	.4408+01
Y	.1156-01	-.1526-03	.7148-01	-.1141+01	-.2609+02	.1863-00
Z	.3077-02	-.1275-02	.2381-01	.2131+01	.2157+01	-.3497-00
L	.1848+01	-.6724-02	.1135+02	.2915+04	-.1296+04	-.4758+03
M	.1067+01	-.6388-02	.6472+01	.1332+04	.3006+04	-.2180+03
N	-.4063-00	.2660-02	-.2498+01	-.6210+03	.2339+03	.1100+03

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.3253+05	-.5704+04	.2046+05	-.1982+03	-.1222+05
Y	-.2506+04	.1374+05	.5736+04	.9162+04	.1781-02
Z	-.1366+06	.5173+03	.3299+05	.1442+02	.2116+04
L	-.4770+05	.6526+06	.2628+06	-.3689+05	-.7356+04
M	.3220+04	.2674+06	.7003+06	-.9590+03	.1443+05
N	.3863+05	-.1282+06	-.6355+04	-.2758+06	-.4498+03

THE INERTIA TENSOR

.1264+05	-.2057-05	.6935+04
-.2057-05	.5000+05	.3818-06
.6935+04	.3818-06	.5386+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.1002+03	-.5588-08	.1640+02	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1337-00	-.1087-03	.1375-01	.1961-01	-.2807-01	-.7701-02
----------	-----------	----------	----------	-----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= -.1903-00 PHI -.7839-02
AIRCRAFT INERTIAL SPEED= .1015+03

NOT REPRODUCIBLE

LOCKHEED AH564 HELICOPTER JUN 10 1970 POSTAB-8 DERIVATIVES
CASE 19 SPEED=169.0 FT/SEC. W-DOT=-19.2 FT/SEC. GAMMA=-6.52DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.4017+02	.1241+01	-.3062+02	-.3376+03	.1278+04	.8694+02
Y	-.2215-00	-.6768+02	-.4997+01	-.9938+03	-.1197+03	.1394+04
Z	-.8511+02	.1054+01	-.4281+03	-.1004+04	-.6073+03	.7251+03
L	-.4687+02	-.1455+03	-.4052+02	-.8337+05	.6942+04	.5077+04
M	-.4109+02	-.1106+02	-.2006+03	-.4548+04	-.1003+06	.2122+04
N	-.4269+02	.7503+03	-.2388+03	.7209+03	.7893+04	-.4015+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.1411-01	-.1844-03	-.2432-00	-.2021+02	.1264+01	.1147+01
Y	.3280-02	-.3788-03	.6231-01	-.1999-00	-.1742+02	.9615-02
Z	-.2715-02	-.1402-02	-.3160-01	-.3380+01	.5312+01	.1756-00
L	.1062+01	-.1322-01	.1886+02	.3046+04	-.1201+04	-.1736+03
M	.5706-00	-.1239-01	.9935+01	.1277+04	.3051+04	-.7354+02
N	-.1392-00	.4194-02	-.2465+01	-.3756+03	.8937+02	.2991+02

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.2839+05	-.4178+04	.1852+05	-.3869+03	-.1653+05
Y	-.3682+04	.1034+05	.4517+04	.1259+05	.4008-02
Z	-.1668+06	-.6027+03	.6743+05	.1806+02	.1039+04
L	-.7138+05	.6474+06	.2369+06	-.1080+05	-.1604+05
M	.5756+06	.2535+06	-.7647+06	-.2198+02	.1745+05
N	-.2068+05	-.6020+05	.3837+05	-.3829+06	-.1326+03

THE INERTIA TENSOR

.1164+05	-.8455-06	.2479+04
-.8455-06	.5000+05	.5465-07
.2479+04	.5465-07	.5486+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.1687+03	-.3725-08	.9647+01	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1229+00	.2606-02	.1053-01	.1559-01	-.5674-01	-.8892-02
----------	----------	----------	----------	-----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= -.1139+00 PHI =-.8936-02
AIRCRAFT INERTIAL SPEED= .1690+03

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAH-B DERIVATIVES
CASE 20 SPEED= 33.8 FT/SEC. W-DOT=-28.8 FT/SEC. GAMMA=-58.3 DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.1337+03	.3086-00	.7174+02	.6582+03	.7098+03	.4258+03
Y	.3495+01	-.2534+02	.1963+01	-.4827+03	-.2097+03	.1655+04
Z	-.6700+02	-.1909+01	.1552+02	.6370+03	-.1538+04	-.8672+02
L	-.2195+03	.9020+02	.4481+02	-.3239+05	.2876+03	.3149+05
M	.1321+03	-.6836+02	-.3434+03	-.3568+04	-.8914+05	.1010+05
N	-.8347+02	.4997+03	-.5301+02	.3102+05	-.1299+05	-.6791+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.2287-02	-.4195-04	-.1325-02	-.7477-00	.4427-00	.1363+01
Y	.1755-01	-.1761-04	.1025-01	.8093-01	-.2657+02	-.1154+00
Z	.3709-01	-.9187-03	.2161-01	.1467+02	.3739-00	-.2503+02
L	.8555-00	.4482-02	.4990-00	.7439+03	-.7109+03	-.1264+04
M	.1105+01	-.1697-01	.6450-00	.7214+03	.2949+04	-.1234+04
N	-.1500+01	.1667-02	-.8768-00	-.1289+04	.1232+04	.2221+04

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.9099+05	-.3645+03	.4768+04	-.1674+03	-.3094+04
Y	-.4425+03	.1782+05	.5708+04	.7694+04	.3659-03
Z	-.5436+05	.6285+04	-.1713+05	.2056+02	.5454+04
L	.1812+06	.3328+06	.1353+06	-.1977+06	-.2536+04
M	.3285+05	.2758+06	-.6746+06	-.7805+04	.7733+04
N	.1186+06	-.5838+06	-.2387+06	-.1239+06	-.6062+03

THE INERTIA TENSOR

.4398+05	-.7962-05	.1892+05
-.7962-05	.5000+05	.2502-04
.1892+05	.2502-04	.2252+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.1701+02	-.4470-07	.2921+02	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.2028-00	-.2950-03	.2579-02	.1237+00	.2194-01	-.4239-01
----------	-----------	----------	----------	----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= -.1020+01 PHI -.8105-01
AIRCRAFT INERTIAL SPEED= .3380+02

DENOMINATOR CHARACTERISTIC ROOTS

REAL PART	IMAGINARY PART
-.1695-00	.1004+00
-.1695-00	-.1004+00
-.9783+01	.0000
-.1898+01	.0000
-.1526-00	.4775-00
-.1526-00	-.4775-00
-.3251-01	.3680-00
-.3251-01	-.3680-00
.0000	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

NUMERATORS

(NOTE- NUMERATOR ROOTS LESS THAN 1.0E-7 TIMES THE
LARGEST NUMERATOR ROOT ARE NOT INCLUDED IN THE BODE GAIN).

X(1)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .1878+03

BODE GAIN = -.3712+03

ROOTS

REAL PART	IMAGINARY PART
-.3593-07	.0000
-.9783+01	.0000
-.1674+01	.0000
-.1448-00	.5119-00
-.1448-00	-.5119-00
-.7411-01	.3632-00
-.7411-01	-.3632-00
-.6652-01	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .9564-00

BODE GAIN = .1883+03

ROOTS

REAL PART	IMAGINARY PART
.6490-01	.0000
-.1120+03	.0000
-.6253+01	.0000
-.1904+01	.0000
-.4545-01	.3763-00
-.4546-01	-.3763-00
-.3908-00	.0000
.4221-07	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .1123+03

BODE GAIN = .3790+03

ROOTS

REAL PART	IMAGINARY PART
-.1048+00	.2517-00
-.1048+00	-.2517-00
-.9810+01	.0000
-.1837+01	.0000
-.1898-00	.4548-00
-.1898-00	-.4548-00
.2565-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.2654+01

BODE GAIN = .2260+02

ROOTS

REAL PART	IMAGINARY PART
-.1021+00	.3593-00
-.1021+00	-.3593-00
-.3144-01	.3930-00
-.3144-01	-.3930-00
-.1276+02	.0000
-.1859+01	.0000
-.4089-00	.0000
.1118-07	.0000
.1551-06	.0000
.9486-08	.0000

X(5)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.6475-00

BODE GAIN = -.1123+01

ROOTS

REAL PART	IMAGINARY PART
-.1931-00	.2840-00
-.1931-00	-.2840-00
-.2574-00	.3828-00
-.2574-00	-.3828-00
-.1115+02	.0000
-.6488-00	.0000
.2362-00	.0000
-.2461-08	.0000
.0000	.0000
.0000	.0000

X(6)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.325E+01

BODE GAIN = .1383+02

ROOTS

REAL PART	IMAGINARY PART
-.6236-01	.3712-00
-.6236-01	-.3712-00
.2135-01	.4009-00
.2135-01	-.4009-00
-.5659+01	.0000
-.1976+01	.0000
-.4109-00	.0000
-.3492-09	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(1)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .9929-00

BODE GAIN = .8523+03

ROOTS

REAL PART	IMAGINARY PART
-.1954-02	.4776-00
-.1954-02	-.4776-00
-.3446-00	.0000
-.9355+01	.0000
.2250+01	.1386+01
.2250+01	-.1386+01
.4128+01	.0000
-.1490-07	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.3635+02

BODE GAIN = .2041+04

ROOTS

REAL PART	IMAGINARY PART
-.2545-01	.3631-00
-.2545-01	-.3631-00
-.2579-00	.1008+00
-.2579-00	-.1008+00
-.6355+02	.0000
-.1909+01	.0000
-.1127+01	.0000
-.6712-07	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(3)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.1761+02

BODE GAIN = .1334+04

ROOTS

REAL PART	IMAGINARY PART
-.3457-00	.1446-00
-.3457-00	-.1446-00
-.2239+02	.0000
-.3690+01	.0000
-.3342-01	.4833-00
-.3342-01	-.4833-00
-.6519-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.3878+02

BODE GAIN = .2967+02

ROOTS

REAL PART	IMAGINARY PART
-.1911-00	.0000
-.1988+01	.0000
-.5835-00	.0000
-.3700-01	.3755-00
-.3700-01	-.3755-00
.1648-00	.7563-00
.1648-00	-.7563-00
.0000	.0000
.0000	.0000
.0000	.0000

X(5)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.8210+01

BODE GAIN = -.1475+01

ROOTS

REAL PART	IMAGINARY PART
-.1893-00	.0000
-.4971+01	.0000
-.5550-01	.4754-00
-.5550-01	-.4754-00
-.2392-00	.2180-00
-.2392-00	-.2180-00
.1967-00	.0000
-.3439-08	.0000
.0000	.0000
.0000	.0000

X(6)-TC-C(2) NUMERATOR

ROOT LOCUS GAIN= .6687+02

BODE GAIN = .1816+02

ROOTS

REAL PART	IMAGINARY PART
-.1957-00	.0000
-.1953+01	.0000
-.3655-00	.4272-00
-.3655-00	-.4272-00
-.2931-01	.3734-00
-.2931-01	-.3734-00
.3987-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(1)-TC-C(3) NUMERATOR

ROOT LOCUS GAIN= -.9719+01

BODE GAIN = -.7913+03

ROOTS

REAL PART	IMAGINARY PART
-.1115+00	.0000
-.1497-00	.4747-00
-.1497-00	-.4747-00
.3642-00	.0000
-.9819+01	.0000
.2005-00	.4388+01
.2005-00	-.4388+01
.0000	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= $-.1252 \times 10^2$

BODE GAIN = $.5460 \times 10^3$

ROOTS

REAL PART	IMAGINARY PART
.2313-06	.0000
-.8056+02	.0000
-.1827+01	.0000
-.8763-00	.0000
-.1110+00	.4952-00
-.1110+00	-.4952-00
.6643-02	.1800-00
.6643-02	-.1800-00
.0000	.0000
.0000	.0000

X(3)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= $.3331 \times 10^2$

BODE GAIN = $-.1955 \times 10^4$

ROOTS

REAL PART	IMAGINARY PART
-.1362-00	.0000
-.1150+02	.4061+01
-.1150+02	-.4061+01
-.1502-00	.4747-00
-.1502-00	-.4747-00
-.5361-00	.3689-01
-.5361-00	-.3689-01
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.1721+02

BODE GAIN = .7371-12

ROOTS

REAL PART	IMAGINARY PART
.1885-06	.1528-07
.1885-06	-.1528-07
-.3631-00	.9424-00
-.3631-00	-.9424-00
-.1560-00	.4310-00
-.1560-00	-.4310-00
-.1054+01	.0000
.1583-00	.3256-00
.1583-00	-.3256-00
-.3725-08	.0000

X(5)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .1329+02

BODE GAIN = -.1025+01

ROOTS

REAL PART	IMAGINARY PART
-.1308-07	.0000
-.1125+02	.0000
-.1513-00	.4751-00
-.1513-00	-.4751-00
-.2080-00	.1421-00
-.2080-00	-.1421-00
.3776-01	.9650-01
.3776-01	-.9650-01
.0000	.0000
.0000	.0000

X(6)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN = .2970+02

BODE GAIN = .1262+02

ROOTS

REAL PART	IMAGINARY PART
.7802-01	.3274-00
.7802-01	-.3274-00
-.1259-00	.4641-00
-.1259-00	-.4641-00
-.1320+01	.0000
-.7182-00	.0000
.4201-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN = .3489-00

BODE GAIN = -.2618+03

ROOTS

REAL PART	IMAGINARY PART
-.1021+00	.3532-00
-.1021+00	-.3532-00
.2943-00	.5408-00
.2943-00	-.5408-00
-.2121+02	.0000
-.9816+01	.0000
-.1739+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.1589+02

BODE GAIN = -.8203+02

ROOTS

REAL PART	IMAGINARY PART
.4668-01	.0000
-.1206+02	.0000
-.3920+01	.0000
-.1899+01	.0000
-.3839-01	.3706-00
-.3839-01	-.3706-00
-.2194-00	.0000
-.1743-06	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.9593-01

BODE GAIN = -.3633+03

ROOTS

REAL PART	IMAGINARY PART
-.1014+00	.3367-00
-.1014+00	-.3367-00
-.6689-00	.2240-00
-.6689-00	-.2240-00
.9159+02	.0000
-.1185+02	.0000
-.1402+01	.0000
.4008-07	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .3208+01

BODE GAIN = -.1248+02

ROOTS

REAL PART	IMAGINARY PART
-.1810-07	.0000
-.1129+02	.0000
-.1892+01	.0000
-.8834-01	.3605-00
-.8834-01	-.3605-00
-.3376-01	.3816-00
-.3376-01	-.3816-00
-.2228-00	.0000
-.2204-10	.0000
.0000	.0000

X(5)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .1385-00

BODE GAIN = .6207-00

ROOTS

REAL PART	IMAGINARY PART
-.2542-00	.0000
-.1396+02	.0000
-.8086-00	.2648-00
-.8086-00	-.2648-00
-.9747-01	.3296-00
-.9747-01	-.3296-00
.3651-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(6)-TO-C(4) NUMERATOR

ROOT-LOCUS GAIN= .2919+01

BODE GAIN = -.7642+01

ROOTS

REAL PART	IMAGINARY PART
-.4691-01	.3671-00
-.4691-01	-.3671-00
.1754-01	.3973-00
.1754-01	-.3973-00
-.6999+01	.0000
-.1909+01	.0000
-.2236-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(1)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .6386+01

BODE GAIN = .8866+01

ROOTS

REAL PART	IMAGINARY PART
-.9012-01	.0000
-.9783+01	.0000
-.1541+01	.0000
-.1412-00	.4715-00
-.1412-00	-.4715-00
-.3949-00	.0000
.2641-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .8849-02

BODE GAIN = -.6037-00

ROOTS

REAL PART	IMAGINARY PART
.1371-05	.0000
-.2728+03	.0000
-.1837+01	.0000
-.2704-00	.0000
.9904-02	.0000
.5090+01	.0000
.6253-01	.4930-00
.6253-01	-.4930-00
.0000	.0000
.0000	.0000

X(3)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.1125+02

BODE GAIN = .2039+02

ROOTS

REAL PART	IMAGINARY PART
-.9399-01	.0000
-.9751+01	.0000
-.2288+01	.0000
-.1436-00	.4739-00
-.1436-00	-.4739-00
-.2568-00	.1453-00
-.2568-00	-.1453-00
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .9698-01

BODE GAIN = -.2760-00

ROOTS

NOT REPRODUCIBLE

REAL PART	IMAGINARY PART
-.3084-07	.0000
-.1102+00	.3985-00
-.1102+00	-.3985-00
-.2791-00	.0000
.3063-00	.2953-00
.3063-00	-.2953-00
-.2139+01	.1888+01
-.2139+01	-.1888+01
.0000	.0000
.0000	.0000

X(5)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.1609-00

BODE GAIN = .1372-01

ROOTS

REAL PART	IMAGINARY PART
.2929-01	.0000
-.1029+02	.0000
-.1872-00	.1098+00
-.1872-00	-.1098+00
-.1425-00	.4763-00
-.1425-00	-.4763-00
.6008-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(6)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.7643-01

BODE GAIN = -.1689-00

ROOTS

REAL PART	IMAGINARY PART
-.2793-00	.0000
-.5900-01	.4446-00
-.5900-01	-.4446-00
.2258-00	.2527-00
.2258-00	-.2527-00
.6245+01	.0000
-.1356+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAB-H DERIVATIVES
CASE 21 SPEED=101.5 FT/SEC. W-DOT=-28.8 FT/SEC. GAMMA=-16.55DEG.
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.6396+02	.1486+01	-.7705+02	-.2426+03	.1532+04	.2516+03
Y	-.1750+01	-.4648+02	-.2906+01	-.1267+04	-.8028+02	.1291+04
Z	-.1412+03	.5764+00	-.2759+03	-.3126+03	-.1629+03	.6844+03
L	-.7410+02	-.4018+02	-.9772+02	-.7984+05	.9203+04	.1573+05
M	.3735+01	-.1764+02	.2924+03	-.6515+04	-.8108+05	.4071+04
N	-.1090+03	.6037+03	-.3069+03	.1300+05	.3333+04	-.3187+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.4915+01	-.3392+03	-.1812+00	-.2575+02	.2754+01	.6931+01
Y	.1108+01	.7717+04	.4090+01	-.1814+01	-.2571+02	.4876+00
Z	.4638+02	-.9223+03	.2021+01	.4849+01	.1977+01	-.1306+01
L	.2790+01	-.1179+02	.1037+02	.2782+04	-.1236+04	-.7470+03
M	.1682+01	.7964+02	.6198+01	.1273+04	.3015+04	-.3427+03
N	-.9203+00	-.1246+02	-.3416+01	-.8972+03	.3587+03	.2500+03

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.4970+05	-.5490+04	.2282+05	-.1251+03	-.1186+05
Y	-.2405+04	.1203+05	.5588+04	.9090+04	.3414+02
Z	-.1323+06	.1126+04	.3030+05	.8397+01	.3383+04
L	-.5487+05	.6268+06	.2574+06	-.6380+05	-.7360+04
M	.3046+06	.2625+06	-.6844+06	-.7929+03	.1661+05
N	-.5244+04	-.1889+06	-.2680+05	-.2681+06	-.7371+03

THE INERTIA TENSOR

	.1444+05	.8157+07	.1092+05
	.8157+07	.5000+05	-.2505+07
	.1092+05	-.2505+07	.5206+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.9801+02	.2328+09	.2639+02	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1092+00	.2615+02	.3553+02	.6179+02	-.2465+01	.4073+03
----------	----------	----------	----------	-----------	----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= -.2877+00 PHI .4246+03
AIRCRAFT INERTIAL SPEED= .1015+03

**DENOMINATOR CHARACTERISTIC
ROOTS**

REAL PART	IMAGINARY PART
-.3726-01	.0000
-.9702+01	.0000
-.2159+01	.0000
-.3073-00	.1027+01
-.3073-00	-.1027+01
-.2697-00	.1980-00
-.2697-00	-.1980-00
.2494-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NUMERATORS

(NOTE- NUMERATOR ROOTS LESS THAN $1.0E-7$ TIMES THE
LARGEST NUMERATOR ROOT ARE NOT INCLUDED IN THE BODE GAIN).

X(1)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN = .1020+03

BODE GAIN = .1067+04

ROOTS

REAL PART	IMAGINARY PART
-.3649-01	.0000
-.9727+01	.0000
-.6753-00	.1283+01
-.6753-00	-.1283+01
-.3230-00	.1039+01
-.3230-00	-.1039+01
-.2963-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .5292+01

BODE GAIN = -.4169+03

ROOTS

REAL PART	IMAGINARY PART
-.4203-01	.0000
-.3679+02	.0000
-.1234+01	.3119+01
-.1234+01	-.3119+01
.6206-00	.0000
-.1984-00	.3785-00
-.1984-00	-.3785-00
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .2731+03

BODE GAIN = -.1069+04

ROOTS

REAL PART	IMAGINARY PART
-.3697-01	.0000
-.9807+01	.0000
-.3082-00	.1019+01
-.3082-00	-.1019+01
.1221+01	.0000
-.2733-00	.3470-00
-.2733-00	-.3470-00
-.1022-07	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .7252+01

BODE GAIN = -.9891-07

ROOTS

NOT REPRODUCIBLE

REAL PART	IMAGINARY PART
-.9223-01	.0000
-.9673-01	.0000
-.8616-00	.2474-00
-.8616-00	-.2474-00
-.7642-01	.7820-00
-.7642-01	-.7820-00
.3717-00	.0000
.0000	.0000
.2075-06	.0000
.2819-07	.0000

X(5)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.6235+01

BODE GAIN = -.6839-03

ROOTS

REAL PART	IMAGINARY PART
-.2836-03	.0000
-.1029+02	.0000
-.3121-00	.1028+01
-.3121-00	-.1028+01
-.3691-00	.0000
-.6011-01	.0000
-.3676-01	.0000
-.1613-06	.0000
-.2581-08	.0000
.0000	.0000

X(6)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.1616+01

BODE GAIN = -.1612+01

ROOTS

REAL PART	IMAGINARY PART
-.8022-01	.0000
-.7039-00	.3189+01
-.7039-00	-.3189+01
-.2533-00	.3859-00
-.2533-00	-.3859-00
.8776-00	.0000
.1560-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .1547+02

BODE GAIN = .2427+04

ROOTS

REAL PART	IMAGINARY PART
.1241-06	.0000
-.4135-00	.0000
-.6881-01	.0000
-.2758-00	.1030+01
-.2758-00	-.1030+01
-.8347+01	.0000
-.1102+01	.3649+01
-.1102+01	-.3649+01
.0000	.0000
.0000	.0000

X(2)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.2413+02

BODE GAIN = .2798+04

ROOTS

REAL PART	IMAGINARY PART
-.1778-00	.1543-00
-.1778-00	-.1543-00
-.8371+02	.0000
-.2631+01	.0000
-.8081-00	.7148-00
-.8081-00	-.7148-00
.2043-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.3144+01

BODE GAIN = -.1170+04

ROOTS

REAL PART	IMAGINARY PART
.1625-06	.0000
-.2287+03	.0000
-.5923+01	.0000
-.2879-00	.1036+01
-.2879-00	-.1036+01
-.1190+00	.2910-00
-.1190+00	-.2910-00
-.6020-01	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.7327+02

BODE GAIN = .1684+02

ROOTS

REAL PART	IMAGINARY PART
-.9170-01	.0000
-.2581-00	.2034-00
-.2581-00	-.2034-00
.2451-00	.0000
-.2208+01	.0000
-.2620-00	.1002+01
-.2620-00	-.1002+01
.1254-06	.0000
.3514-07	.0000
.0000	.0000

NOT REPRODUCIBLE

X(5)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.7720+01

BODE GAIN = .2416-01

ROOTS

REAL PART	IMAGINARY PART
.5265-02	.0000
-.5542+01	.0000
-.2890-00	.1027+01
-.2890-00	-.1027+01
-.6264-00	.0000
-.7829-01	.0000
-.4810-01	.0000
-.2235-07	.0000
.1118-07	.0000
.0000	.0000

X(6)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .2030+02

BODE GAIN = .5691+02

ROOTS

REAL PART	IMAGINARY PART
-.2453-00	.1912-00
-.2453-00	-.1912-00
.2589-00	.0000
-.2441+01	.0000
-.6747-00	.1036+01
-.6747-00	-.1036+01
.7508-00	.0000
-.8382-08	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.4522+02

BODE GAIN = -.3905+04

ROOTS

REAL PART	IMAGINARY PART
-.3239-01	.0000
-.4065-00	.0000
-.9884+01	.0000
-.2648-00	.3827+01
-.2648-00	-.3827+01
-.3133-00	.1015+01
-.3133-00	-.1015+01
-.2523-06	.0000
.5538-09	.0000
.1224-07	.0000

X(2)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.1214+02

BODE GAIN = .1944+04

ROOTS

REAL PART	IMAGINARY PART
-.1032+00	.0000
-.6633+02	.0000
-.2820-02	.2729-00
-.2820-02	-.2729-00
-.1997+01	.1949+01
-.1997+01	-.1949+01
.1010+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.6282+02

BODE GAIN = .2291+04

ROOTS

REAL PART	IMAGINARY PART
-.3382-01	.0000
.2178+02	.0000
-.1169+00	.3043-00
-.1169+00	-.3043-00
-.1032+02	.0000
-.3088-00	.1017+01
-.3088-00	-.1017+01
-.2568-06	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.3138+02

BODE GAIN = .9180+01

ROOTS

REAL PART	IMAGINARY PART
-.9188-01	.0000
-.3735-00	.5279-01
-.3735-00	-.5279-01
.2773-00	.0000
-.1083+00	.1098+01
-.1083+00	-.1098+01
-.1660+01	.0000
.6694-08	.1166-06
.6694-08	-.1166-06
.1863-07	.0000

X(5)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .1369+02

BODE GAIN = .1317-01

ROOTS

REAL PART	IMAGINARY PART
-.2096-02	.0000
-.1079+02	.0000
-.3120-00	.1021+01
-.3120-00	-.1021+01
-.6195-00	.0000
-.4948-01	.0000
-.3048-01	.0000
-.9872-07	.0000
.0000	.0000
-.2235-07	.0000

NOT REPRODUCIBLE

X(6)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .7774+01

BODE GAIN = .3103+02

ROOTS

REAL PART	IMAGINARY PART
-.2236-00	.0000
.2180-00	.0000
-.1773-00	.3910-00
-.1773-00	-.3910-00
-.1613+01	.1873+01
-.1613+01	-.1873+01
.1819+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(1)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .3106-00

BODE GAIN * -.1556+03

ROOTS

REAL PART	IMAGINARY PART
-.1153-07	.0000
-.8534+01	.2767+01
-.8534+01	-.2767+01
-.3078+01	.0000
-.4373-00	.0000
.2302+01	.0000
-.5130-01	.2183-00
-.5130-01	-.2183-00
.0000	.0000
.0000	.0000

X(2)-TQ-C(4) NUMERATOR

ROOT LOCUS GAIN= -.1876+02

BODE GAIN = .8413+02

ROOTS

REAL PART	IMAGINARY PART
-.7114-02	.0000
-.2794+02	.0000
-.9170+01	.0000
-.2153+01	.0000
-.2736-00	.1965-00
-.2736-00	-.1965-00
.2522-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TQ-C(4) NUMERATOR

ROOT LOCUS GAIN= -.2722-01

BODE GAIN = .6660+02

ROOTS

REAL PART	IMAGINARY PART
-.3439-08	.0000
.2272+03	.0000
-.6157-01	.3661-00
-.6157-01	-.3661-00
-.8250-01	.1636-00
-.8250-01	-.1636-00
-.1737+02	.0000
-.3357+01	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .3824-00

BODE GAIN = -.2331+01

ROOTS

REAL PART	IMAGINARY PART
-.9560-01	.0000
-.3484+02	.0000
-.2178+01	.0000
-.7351-00	.0000
-.2747-00	.1991-00
-.2747-00	-.1991-00
.2485-00	.0000
-.4657-09	.0000
.0000	.0000
.0000	.0000

X(5)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.9865-02

BODE GAIN = -.3346-02

ROOTS

REAL PART	IMAGINARY PART
-.5535-08	.0000
.6499+02	.0000
.1107-01	.0000
-.4785-01	.0000
-.6831-01	.2444-00
-.6831-01	-.2444-00
-.4252+01	.0000
-.8999-00	.0000
.1863-08	.0000
.0000	.0000

X(6)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .5087+01

BODE GAIN = -.7879+01

ROOTS

REAL PART	IMAGINARY PART
-.2103-01	.2607-00
-.2103-01	-.2607-00
-.2741-00	.1969-00
-.2741-00	-.1969-00
-.9238+01	.0000
-.2152+01	.0000
.2502-00	.0000
.1368-08	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .2443+02

BODE GAIN = .9705+02

ROOTS

REAL PART	IMAGINARY PART
-.3009-06	.0000
-.9715+01	.0000
-.2649-00	.2974-00
-.2649-00	-.2974-00
-.3128-01	.0000
-.3084-00	.1031+01
-.3084-00	-.1031+01
-.1781+01	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .1406-01

BODE GAIN = -.5115+02

NOT REPRODUCIBLE

ROOTS

REAL PART	IMAGINARY PART
-.5671-01	.1652-00
-.5671-01	-.1652-00
-.2327-00	.0000
-.1129+04	.0000
-.1547+01	.1867+01
-.1547+01	-.1867+01
.1915+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.6975+01

BODE GAIN = -.5458+02

ROOTS

REAL PART	IMAGINARY PART
-.3245-01	.0000
-.8564+01	.1856+01
-.8564+01	-.1856+01
-.3083-00	.1022+01
-.3083-00	-.1022+01
-.1905-00	.1808-00
-.1905-00	-.1808-00
-.1689-06	.0000
.1496-07	.0000
-.3725-08	.0000

X(4)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .8473-00

BODE GAIN = -.2686-00

ROOTS

REAL PART	IMAGINARY PART
-.9215-01	.0000
-.3194-00	.2083-00
-.3194-00	-.2083-00
.2921-00	.0000
-.1493-00	.1068+01
-.1493-00	-.1068+01
-.1744+01	.0000
.8005-08	.0000
-.6713-07	.3571-07
-.6713-07	-.3571-07

X(5)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.3293-00

BODE GAIN = -.3860-03

ROOTS

REAL PART	IMAGINARY PART
-.4148-03	.0000
-.1094+02	.0000
-.3109-00	.1021+01
-.3109-00	-.1021+01
-.4692-00	.0000
-.3288-00	.0000
-.3680-01	.0000
.3556-09	.0000
.2679-07	.3855-07
.2679-07	-.3855-07

X(6)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.1613-00

BODE GAIN = -.9079-00

ROOTS

REAL PART	IMAGINARY PART
-.3919-00	.0000
-.2091-00	.3000-00
-.2091-00	-.3000-00
.2098-00	.0000
.2842+01	.0000
-.1203+01	.1602+01
-.1203+01	-.1602+01
.0000	.0000
.0000	.0000
.0000	.0000

LOCKHEED AH56A HELICOPTER JUNE 10 1970 MOSTAB-B DERIVATIVES
CASE 22 SPEED=169.0 FT/SEC, W-DOT=-28.8 FT/SEC, GAMMA= -9.81DEG,
GROSS WEIGHT=15600. SEA LEVEL. DYNAMIC TIP LOSS (YES)

STABILITY DERIVATIVE MATRICES-

	U	V	W	P	Q	R
X	-.4236+02	.1285+01	-.3647+02	-.3224+03	.1190+04	.1079+03
Y	-.4353-00	-.6710+02	-.5054+01	-.8979+03	-.6785+02	.1414+04
Z	-.1013+03	.2195+01	-.4280+03	-.9451+03	-.6615+03	.6440+03
L	-.4454+02	-.9339+02	-.4814+02	-.8129+05	.6915+04	.6343+04
M	-.8798+02	-.6778+01	-.1864+03	-.4231+04	-.9865+05	.2048+04
N	-.4110+02	.7502+03	-.2576+03	.1569+04	.8030+04	-.4021+05

	U DOT	V DOT	W DOT	P DOT	Q DOT	R DOT
X	-.2110-01	-.3853-03	-.2485-00	-.1929+02	.1748+01	.1600+01
Y	.2227-02	-.4448-03	.3222-01	-.7042-00	-.1650+02	.5432-01
Z	-.4989-02	-.3099-02	-.2715-01	-.2503+01	.5844+01	.1937-00
L	.1515+01	-.2106-01	.1847+02	.3037+04	-.1170+04	-.2522+03
M	.8374-00	.7252-02	.9825+01	.1247+04	.3059+04	-.1043+03
N	-.2441-00	-.4044-03	-.2934+01	-.4584+03	.1204+03	.4670+02

	C(1)	C(2)	C(3)	C(4)	C(5)
X	-.3424+05	-.3967+04	.1974+05	-.3372+03	-.1651+05
Y	-.3570+04	.9066+04	.4311+04	.1258+05	.1404-01
Z	-.1675+06	-.3991+03	.6727+05	.1620+02	.1518+04
L	-.7268+05	.6393+06	.2329+06	-.2067+05	-.1608+05
M	.5710+06	.2484+06	-.7570+06	-.1706+03	.1902+05
N	-.4763+05	-.7417+05	.3608+05	-.3820+06	-.1908+03

THE INERTIA TENSOR

	.1180+05	-.8421-06	.3599+04
	-.8421-06	.5000+05	.7933-07
	.3599+04	.7933-07	.5470+05

TRIMMED VELOCITIES WITH RESPECT TO OVERALL VEHICLE REFERENCE AXES-

U	V	W	P	Q	R
.1684+03	-.3725-08	.1403+02	-.0000	.0000	-.0000

TRIMMED ITERATION COLUMN VECTOR, TE-

.1073+00	.5612-02	-.9721-03	.1199-01	-.5221-01	-.5821-02
----------	----------	-----------	----------	-----------	-----------

STABILITY AXIS SYSTEM EULER ANGLES- THETA= -.1353-00 PHI -.5867-02
AIRCRAFT INERTIAL SPEED= .1690+03

DENOMINATOR CHARACTERISTICS
ROOTS

REAL PART	IMAGINARY PART
-.2494-01	.0000
-.9564+01	.0000
-.4314-00	.1492+01
-.4314-00	-.1492+01
.7332-01	.0000
-.1502+01	.5799-00
-.1502+01	-.5799-00
-.1291-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000
.0000	.0000

NUMERATORS

(NOTE- NUMERATOR ROOTS LESS THAN $1.0E-7$ TIMES THE
LARGEST NUMERATOR ROOT ARE NOT INCLUDED IN THE BODE GAIN).

X(1)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .7003+02

BODE GAIN = .1394+05

ROOTS

REAL PART	IMAGINARY PART
-.2176-01	.0000
-.9566+01	.0000
-.7348-00	.2747+01
-.7348-00	-.2747+01
-.4348-00	.1483+01
-.4348-00	-.1483+01
-.6990-00	.0000
.1286-11	.0000
.1166-06	.0000
.0000	.0000

X(2)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .7779+01

BODE GAIN = -.3016+04

ROOTS

REAL PART	IMAGINARY PART
-.9897-01	.0000
.1742-01	.2117-00
.1742-01	-.2117-00
-.1490+02	.0000
.1680-00	.4065+01
.1680-00	-.4065+01
.4974+01	.0000
.5453-07	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .3455+03

BODE GAIN = .2191-01

ROOTS

NOT REPRODUCIBLE

REAL PART	IMAGINARY PART
-.5592-05	.0000
-.9626+01	.0000
-.2258-01	.0000
-.8670-01	.2647-00
-.8670-01	-.2647-00
.3940+01	.0000
-.4292-00	.1487+01
-.4292-00	-.1487+01
.0000	.0000
.0000	.0000

X(4)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .1050+02

BODE GAIN = .1411-04

ROOTS

REAL PART	IMAGINARY PART
-.2529-01	.0000
-.1080+00	.1445+01
-.1080+00	-.1445+01
.2610-00	.0000
-.9903-00	.1301+01
-.9903-00	-.1301+01
-.2203-00	.0000
.0000	.0000
-.2215-05	.0000
.6519-08	.0000

NOT REPRODUCIBLE

X(5)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= -.1181+02

BODE GAIN = .2745-00

ROOTS

REAL PART	IMAGINARY PART
.6200-02	.0000
-.9959+01	.0000
-.4320-00	.1489+01
-.4320-00	-.1489+01
-.1016+01	.0000
-.6507-01	.0000
-.3345-01	.0000
-.3129-06	.0000
.4191-07	.0000
.0000	.0000

X(6)-TO-C(1) NUMERATOR

ROOT LOCUS GAIN= .401E-01

BODE GAIN = -.4679+02

ROOTS

REAL PART	IMAGINARY PART
-.2234-00	.0000
.1879-00	.0000
-.1505-00	.4475-00
-.1505-00	-.4475-00
-.1638+03	.0000
.1928-00	.3271+01
.1928-00	-.3271+01
-.9313-09	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .1117+02

BODE GAIN = .7353+04

ROOTS

REAL PART	IMAGINARY PART
-.5228-07	.0000
-.6259-00	.0000
-.3443-01	.0000
-.4095-00	.1488+01
-.4095-00	-.1488+01
-.9518+01	.0000
-.1457+01	.4112+01
-.1457+01	-.4112+01
.0000	.0000
.0000	.0000

X(2)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= -.1835+02

BODE GAIN = .2120+04

ROOTS

REAL PART	IMAGINARY PART
.4965-01	.0000
-.1470-00	.0000
-.2472-00	.0000
-.6174+02	.0000
-.3885+01	.0000
-.1213+01	.1516+01
-.1213+01	-.1516+01
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .1126+01

BODE GAIN = -.1757+04

ROOTS

REAL PART	IMAGINARY PART
.1060-05	.0000
.9484+03	.0000
-.3262-01	.0000
-.6732-01	.2008-00
-.6732-01	-.2008-00
-.6586+01	.0000
-.4191-00	.1495+01
-.4191-00	-.1495+01
.0000	.0000
.0000	.0000

X(4)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= $-.7501+02$

BODE GAIN = $-.1349-04$

ROOTS

REAL PART	IMAGINARY PART
$-.2528-01$	$.0000$
$-.4278-00$	$.1467+01$
$-.4278-00$	$-.1467+01$
$-.1523+01$	$.4733-00$
$-.1523+01$	$-.4733-00$
$-.1202+00$	$.0000$
$.5913-01$	$.0000$
$-.2381-05$	$.0000$
$.2874-08$	$.0000$
$-.4657-08$	$.0000$

X(5)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= $-.7299+01$

BODE GAIN = $-.2442-00$

ROOTS

REAL PART	IMAGINARY PART
$-.9861-02$	$.1879-01$
$-.9861-02$	$-.1879-01$
$-.5995+01$	$.0000$
$-.4223-00$	$.1491+01$
$-.4223-00$	$-.1491+01$
$-.9192-00$	$.0000$
$-.7929-01$	$.0000$
$-.2490-07$	$.0000$
$.2118-07$	$.0000$
$.0000$	$.0000$

X(6)-TO-C(2) NUMERATOR

ROOT LOCUS GAIN= .6910+01

BODE GAIN = .4162+02

ROOTS

REAL PART	IMAGINARY PART
.5994-01	.0000
-.1198+00	.0000
-.8750-00	.0000
-.2851+01	.0000
-.9947-00	.1763+01
-.9947-00	-.1763+01
.1159+01	.0000
.1071-07	.0000
.0000	.0000
.0000	.0000

NOT REPRODUCIBLE

X(1)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.3943+02

BODE GAIN = -.1647+05

ROOTS

REAL PART	IMAGINARY PART
-.2088-01	.0000
-.6537-00	.0000
-.4325-00	.1482+01
-.4325-00	-.1482+01
-.9569+01	.0000
-.4701-00	.4328+01
-.4701-00	-.4328+01
-.1495-06	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.9386+01

BODE GAIN = .4410+04

ROOTS

REAL PART	IMAGINARY PART
-.1064+00	.0000
.6004-01	.1974-00
.6004-01	-.1974-00
-.3251+02	.0000
-.2474+01	.4135+01
-.2474+01	-.4135+01
.1942+01	.0000
-.9313-09	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= -.1385+03

BODE GAIN = .4350+04

ROOTS

REAL PART	IMAGINARY PART
-.2171-01	.0000
.1732+02	.0000
-.6203-01	.2138-00
-.6203-01	-.2138-00
-.9946+01	.0000
-.4297-00	.1486+01
-.4297-00	-.1486+01
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-T0-C(2) NUMERATOR

ROOT LOCUS GAIN= $-.2961 \times 10^2$

BODE GAIN = $-.4617 \times 10^4$

ROOTS

REAL PART	IMAGINARY PART
$-.2528 \times 10^1$	$.0000$
$-.2853 \times 10^0$	$.1505 \times 10^1$
$-.2853 \times 10^0$	$-.1505 \times 10^1$
$.1534 \times 10^0$	$.0000$
$-.1256 \times 10^1$	$.1114 \times 10^1$
$-.1256 \times 10^1$	$-.1114 \times 10^1$
$-.1835 \times 10^0$	$.0000$
$-.4682 \times 10^3$	$.0000$
$-.3568 \times 10^8$	$.0000$
$.3725 \times 10^8$	$.0000$

X(5)-T0-C(3) NUMERATOR

ROOT LOCUS GAIN= $.1531 \times 10^2$

BODE GAIN = $-.4250 \times 10^0$

ROOTS

REAL PART	IMAGINARY PART
$.7550 \times 10^2$	$.0000$
$-.1032 \times 10^2$	$.0000$
$-.4319 \times 10^0$	$.1488 \times 10^1$
$-.4319 \times 10^0$	$-.1488 \times 10^1$
$-.9306 \times 10^0$	$.0000$
$-.6215 \times 10^1$	$.0000$
$-.3626 \times 10^1$	$.0000$
$.7916 \times 10^8$	$.5703 \times 10^7$
$.7916 \times 10^8$	$-.5703 \times 10^7$
$.0000$	$.0000$

X(6)-TO-C(3) NUMERATOR

ROOT LOCUS GAIN= .1580+01

BODE GAIN = .7244+02

ROOTS

REAL PART	IMAGINARY PART
.1360-00	.0000
-.1838-00	.0000
-.2052-00	.5379-00
-.2052-00	-.5379-00
-.1779+01	.3736+01
-.1779+01	-.3736+01
.4565+01	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .7483-00

BODE GAIN = -.3027+03

ROOTS

REAL PART	IMAGINARY PART
-.2371-06	.0000
-.9543+01	.0000
-.6563-00	.0000
-.7273-01	.1600-00
-.7273-01	-.1600-00
-.3460+01	.1419+01
-.3460+01	-.1419+01
.2111+01	.0000
.0000	.0000
.0000	.0000

X(2)-T0-C(4) NUMERATOR

ROOT LOCUS GAIN= $-.2596+02$

BODE GAIN = $.1949+03$

ROOTS

REAL PART	IMAGINARY PART
$-.9736-02$	$.0000$
$-.4585+02$	$.0000$
$-.9450+01$	$.0000$
$-.1505+01$	$.5970-00$
$-.1505+01$	$-.5970-00$
$-.1289-00$	$.0000$
$.7437-01$	$.0000$
$.0000$	$.0000$
$.0000$	$.0000$
$.0000$	$.0000$

X(3)-T0-C(4) NUMERATOR

ROOT LOCUS GAIN= $-.2706-01$

BODE GAIN = $.6863+02$

ROOTS

REAL PART	IMAGINARY PART
$-.7366-01$	$.7693-01$
$-.7366-01$	$-.7693-01$
$.2085+03$	$.0000$
$.1388-00$	$.3519-00$
$.1388-00$	$-.3519-00$
$-.2567+02$	$.0000$
$-.4126+01$	$.0000$
$.0000$	$.0000$
$.0000$	$.0000$
$.0000$	$.0000$

X(4)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.7325-00

BODE GAIN = -.8197-00

ROOTS

REAL PART	IMAGINARY PART
.4600-06	.0000
.1216+02	.0000
.7098-01	.0000
.0000	.0000
-.2300+01	.0000
-.1424+01	.6264-00
-.1424+01	-.6264-00
-.1302-00	.0000
-.2528-01	.0000
.1956-07	.0000

X(5)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= -.3147-01

BODE GAIN = .3532-01

ROOTS

REAL PART	IMAGINARY PART
-.1644-01	.6376-01
-.1644-01	-.6376-01
.1949+02	.0000
-.1799-00	.2016-00
-.1799-00	-.2016-00
-.4904+01	.0000
-.5237-00	.0000
.2401-07	.0000
-.6462-06	.0000
.3440-06	.0000

X(6)-TO-C(4) NUMERATOR

ROOT LOCUS GAIN= .7044+01

BODE GAIN = -.6020+01

ROOTS

REAL PART	IMAGINARY PART
.7155-01	.0000
-.1301-00	.0000
-.9418+01	.0000
-.1505+01	.5971-00
-.1505+01	-.5971-00
-.3938-01	.2258-00
-.3938-01	-.2258-00
.5093-10	.0000
.0000	.0000
.0000	.0000

X(1)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .3400+02

BODE GAIN = .3724+03

ROOTS

REAL PART	IMAGINARY PART
-.1819-01	.0000
-.9565+01	.0000
-.4327-00	.1494+01
-.4327-00	-.1494+01
-.1402+01	.8359-00
-.1402+01	-.8359-00
-.1379-00	.0000
-.2615-11	.0000
.0000	.0000
.0000	.0000

X(2)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .9109-02

BODE GAIN = -.1593+03

ROOTS

REAL PART	IMAGINARY PART
-.1272-00	.0000
-.8051-02	.2694-00
-.8051-02	-.2694-00
-.2202+04	.0000
-.3023+01	.2958+01
-.3023+01	-.2958+01
.6787-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(3)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.3148+01

BODE GAIN = -.9808+02

ROOTS

REAL PART	IMAGINARY PART
-.1919-01	.0000
-.2171+02	.0000
-.1194+02	.0000
-.4312-00	.1486+01
-.4312-00	-.1486+01
-.2416-00	.0000
-.1529-00	.0000
.0000	.0000
.0000	.0000
.0000	.0000

X(4)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= .1943+01

BODE GAIN = -.1641-04

ROOTS

REAL PART	IMAGINARY PART
-.2532-01	.0000
-.3716-00	.1475+01
-.3716-00	-.1475+01
-.1387+01	.8440-00
-.1387+01	-.8440-00
.1343-00	.0000
-.1309-00	.0000
.0000	.0000
.4392-04	.0000
-.4373-08	.0000

X(5)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.3533-00

BODE GAIN = .1608-01

ROOTS

REAL PART	IMAGINARY PART
.6332-02	.0000
-.1161+02	.0000
-.4332-00	.1487+01
-.4332-00	-.1487+01
-.9466-00	.0000
-.1246+00	.0000
-.3089-01	.0000
.5539-07	.0000
-.1535-07	.0000
.0000	.0000

X(6)-TO-C(5) NUMERATOR

ROOT LOCUS GAIN= -.1416-00

BODE GAIN = -.2741+01

ROOTS

REAL PART	IMAGINARY PART
.8924-08	.0000
-.4440-00	.6432-00
-.4440-00	-.6432-00
-.1310-00	.0000
.1236+00	.0000
-.2042+01	.2760+01
-.2042+01	-.2760+01
.2346+01	.0000
.0000	.0000
.0000	.0000

VIII. LOW-ALTITUDE TURBULENCE REPRESENTATION

INTRODUCTION

This Part summarizes some of the recent observations of the atmospheric environment pertinent to V/STOL aircraft. A number of formulas for wind-shear and turbulence parameters have been gleaned from the references and are presented here. In many cases, however, the data were obtained under special environmental or climatic conditions. Estimating the influence of temperature, wind speed and direction, seasonal and geographic variations, elevation, stability, etc., on the various parameters is presently a formidable task. A massive program of data collection and analyses will be required before any degree of confidence can be assigned to the various meteorological descriptors. Wind shears can reverse direction (see Reference 3) - a phenomenon which cannot be explained by present theoretical or empirical relationships. Consequently, in using the relationships herein, one should expect results that are, at best, qualitatively significant.

The principal conclusion formed after surveying the data presented here is that satisfactory data are conspicuous by their absence, and that published empirical relationships that have been used to fit the limited available data are in forms which are inconvenient for flight control system analysis.

WIND PROFILES NEAR THE GROUND

Much of the recent progress in understanding the wind (and temperature) distribution is due to the Monin-Obukhov similarity theory (Reference 1). This theory states that there exists, near the ground, a velocity U^* , a length L , and a temperature T^* that are essentially invariant with height. When the principal variables are divided by these quantities, a series of nondimensional quantities results that is of general validity in the boundary layer. The variables are defined as follows:

- a. Friction Velocity $U^* = \sqrt{\tau/\rho}$ independent of Z
- b. Scaling Length $L = U^{*3} C_p \rho T / k g H$, $k \approx .4$
- c. Scaling Temperature $T^* = -H / k U^* C_p \rho$

From this theory a number of conclusions are reached on the basis of dimensional analysis. While many of the results are realistic, others are somewhat misleading or incorrect.

1. Richardson Number

The Richardson number represents the ratio of buoyant force to the shear and, as such, is a measure of the local stability of the atmosphere. The stability regions, in turn, have a significant effect on the wind profiles and statistical properties. The gradient Richardson number R_1 , which is easily measured, is usually used in preference to the traditional Richardson number R_t . It is defined as

$$R_1 = \frac{g}{\theta} \frac{\partial \theta}{\partial Z} / \left(\frac{\partial U}{\partial r_3} \right)^2$$

where r_3 is orthogonal to the wind direction and for horizontal winds is parallel with Z . The potential temperature, θ , is defined by

$$\frac{1}{\theta} \frac{\partial \theta}{\partial Z} = \frac{1}{T} \frac{\partial T}{\partial Z} - \frac{R}{c_p} \frac{1}{p} \frac{\partial p}{\partial Z}$$

such that $T/\theta = \text{Const } (p)^{R/c_p}$. Linearized theory states that the air is unstable and turbulent if $R_1 < 0$, stable if $R_1 > \frac{1}{4}$, and possibly unstable if $0 < R_1 < \frac{1}{4}$.

For V/STOL approach conditions, the Richardson number can be assumed negative and negligibly small. This corresponds to instability with strong winds overhead, the two conditions which produce the greatest turbulence.

2. Velocity Profiles According to Panofsky

For Neutral Air

$$V = \frac{U^*}{k} \ln \frac{Z + Z_0}{Z_0} \quad \frac{\partial V}{\partial Z} = \frac{U^*}{K(Z + Z_0)}$$

Near Neutral Conditions:

For small Z/L , $Z \gg Z_0$

$$V = \frac{U^*}{k} \left(\ln \frac{Z}{Z_0} + \beta \frac{Z}{L} \right) = \frac{U^*}{k} \left(\ln \frac{Z}{Z_0} + \beta' \frac{Z}{L'} \right)$$

$$\theta - \theta_0 = T^* \left(\ln \frac{Z}{Z_0} + \beta' \frac{Z}{L'} \right)$$

$$R_1 = \frac{Z/L'}{1 + \beta' Z/L'}$$

where

$$L' = \frac{K_h}{K_m} L \quad \beta' \approx 4.5$$

$$K_m = U^{*2} / \frac{\partial V}{\partial Z} \quad (\text{Eddy viscosity})$$

$$K_h = - H / C_p \rho \frac{\partial \theta}{\partial Z} \quad (\text{Eddy conductivity})$$

Free Convection:

$$\frac{\partial V}{\partial Z} = \frac{K_h}{K_m} U^{*2} \left(\frac{gH}{\rho C_p T} \right)^{-\frac{1}{3}} Z^{-\frac{4}{3}}$$

Unstable Air (Neutral Equilibrium - Free Convection):

$$v = \frac{U^*}{k} \left(\ln \frac{Z}{Z_0} - \psi \frac{Z}{L'} \right)$$

where ψ is determined from R_1 by graphs (Lumley and Panofsky, page 113).

Stable Air:

$$v = \frac{U^*}{k} \ln \frac{Z}{Z_0} + \beta' \frac{Z}{L'} \quad \frac{Z}{L'} = \frac{R_1}{1 - \beta' R_1} \quad \frac{Z}{L'} \leq .3 \quad 4.5 < \beta' < 7$$

$$R_1 \sim .1$$

The wind profile may be complicated above $Z/L' > .3$ (See Reference 1, page 118)

3. Calculation According to Skelton Panofsky's formula,

$$U(Z) = \frac{U^*}{k} \ln (Z/Z_0) - \psi$$

is valid for all thermal stability conditions for the first few meters of the atmosphere. One must choose a reference altitude Z_1 , the velocity $U(Z_1)$, a roughness length Z_0 , and the Richardson number R_1 at that altitude. After calculating U^* and L' (via graphs), they are assumed constant with altitude.

For neutral air - the condition which produces the greatest turbulence, $R_1 = 0$, and

$$U(Z) = \frac{U^*}{k} \ln (Z/Z_0)$$

The roughness length, Z_0 , will be assumed to vary from .03 to 5 meters. The probability distribution at 9.1 m altitude with a roughness length of .03 m is assumed to be that obtained by drawing a straight line on normal probability paper between 4 m/s at .5 likelihood and 12 m/s at .01 likelihood (Reference 5). At any other altitude, $Z < 100$ m,

$$U(Z) = U(9.1) \left(\frac{Z}{9.1} \right)^{.12}$$

$$\left(\text{Expansion of } U(Z) = \frac{U^*}{k} \ln \left(Z/Z_0 \right) \right)$$

where the exponent can vary between .12 for smooth terrain and .38 for rough terrain. Hence,

$$\text{Prob} \left\{ U(Z) < \alpha \right\} = \text{Prob} \left\{ U(9.1) < \alpha \left(\frac{9.1}{Z} \right)^{.12} \right\}$$

For the lowest few meters of the atmosphere where the above expansion is invalid, $p = 1/\ln(Z/Z_0)$. This is approximated by

$$p(Z_0) = .9/(4 - \ln Z_0)$$

and the wind profile is

$$U(Z) = U(Z_1) \left(\frac{Z}{Z_1} \right)^{p(Z_0)}$$

The wind probability distribution at 100 m will be assumed to be the same everywhere. If we take the mean airspeed at 9.1 meters to be $\bar{U} = 4$ m/sec for smooth terrain, the mean airspeed at 100 meters is

$$\bar{U}(100 \text{ m}) = \left(\frac{100}{9.1} \right)^{.12} \times 4 = 5.33 \text{ m/sec}$$

Assuming that the 100 meter value applies for both smooth and rough terrain, we obtain for rough terrain at 9.1 meters

$$\bar{U}_{\text{Rough}}(9.1 \text{ m}) = \left(\frac{9.1}{100} \right)^{.38} \times 5.33 = 2.15 \text{ m/sec}$$

Below 9.1 meters,

$$U(Z) = U(9.1) \left(\frac{Z}{9.1} \right)^{\frac{.9}{4 - \ln Z_0}}$$

4. Measured Variations Between Rural and Urban Areas - Bowne
The principal results of Reference 3 are:

- a. The mean wind speed was reduced at all elevations in the city by the increased roughness.
- b. At neutral stability ($R_1 \sim 0$), the maximum value of U^* is the same in city and country.
- c. The city influence is more noticeable for stable rural conditions; U^* is then greater in the city.
- d. City stability is always less than rural stability.
- e. Reynolds stress varies significantly with height in both city and country.
- f. All σ_u/U^* , σ_v/U^* , and σ_w/U^* measurements are comparable to those obtained elsewhere.

5. Comments

Test data (e.g., Bowne) show considerable scatter; consequently, results are qualitative at best. Slight changes in wind direction or in temperature can have profound effects on measured results. For example, the wind shear can be constant with altitude. At higher temperatures, the Bowne data show reversals or highly variable wind profiles.

TURBULENT FLUCTUATIONS

The relationship between the longitudinal, lateral, and vertical spectra and the elevation, stability, and ground roughness is not accurately known at present. Available data is limited and the similarity theory is useful in only a limited sense.

1. Turbulence Scales

Horizontal scales increase linearly with altitude. No information exists on the effect of wind speed except for very low speeds where the scale is unaffected. Ratios of the variances are approximately

$$\sigma_u/\sigma_v/\sigma_w/U^* \approx 2.8/2.0/1.3/1.0$$

These values are chosen by Skelton together with the assumption that the covariances $E(UV)$ and $E(VW)$ are zero. Since U^{*2} is the negative of $E(UW)$ (see Reference 2, page 16), the correlation matrix can be given approximately as

$$E \left\{ \begin{bmatrix} U \\ V \\ W \end{bmatrix} \begin{bmatrix} U & V & W \end{bmatrix} \right\} = .4 p(Z_0) U^2(Z) \begin{bmatrix} 7.8 & 0 & -1 \\ 0 & 4 & 0 \\ -1 & 0 & 1.7 \end{bmatrix}$$

2. Variance of Vertical Velocity

From dimensional analysis,

$$\sigma_w = \frac{A k V h'(Z/L')}{\ln Z/Z_0 - \psi(Z/L')}$$

where A and h' are to be determined, preferably from data. In neutrally stable air, the expression

$$\sigma_w = \frac{.4 A V}{\ln Z/Z_0} \text{ yields } A \approx 1.05 \text{ (experiment)}$$

In unstable air, σ_w increases slowly with increasing height; in stable air, it decreases upward.

3. Variance of Lateral Velocity

From test results,

$$\sigma_v = .03 V^{3/2} \text{ or } .07 V^{3/2} \text{ at 11 meters, stable air}$$

The standard deviation increases with increasing wind speed at constant stability. It is much larger in unstable air. Vertical variation and surface roughness are of little influence. Data in unstable air show enormous variability.

4. Variance of Longitudinal Velocity

The properties of longitudinal gustiness are indeterminate, in general. It is assumed that

$$\sigma_u = CU^*$$

where C is independent of height but varies with terrain. With the approximation $C \approx 2.5$,

$$\sigma_u = \frac{VV}{\ln Z/Z_0} \text{ (near neutral air)}$$

5. Spectra

Vertical Velocity

The scale increases with height, but the spectrum is independent of height up to a few hundred meters. A decrease in stability and Richardson number shifts the spectrum to lower frequencies. A suggested spectral shape is

$$nS_w(n) = \sigma_w^2 \frac{f/f_{\max}}{(1 + f/f_{\max})^2}$$

Lateral Velocity

The spectrum is independent of height, at least under neutral and unstable conditions. Increasing instability greatly increases the low-frequency portion of the spectrum, but has no effect on the high-frequency portions. The high-frequency portions are sensitive to roughness and wind speed. A number of spectra are shown for varying conditions in Reference 1.

Longitudinal Velocity

Low frequencies are affected by stability somewhat more than high frequencies; the low-frequency portions increase with decreasing stability. The scale of longitudinal velocities is not proportional to height. One approximation to measured spectra (at 10 meters elevation) is

$$nS_u(n) = 4.0 U_*^2 \frac{\left(\frac{1200 \cdot n}{V}\right)^2}{\left(1 + \left(\frac{1200 \cdot n}{V}\right)^2\right)^{4/3}}$$

A number of spectral plots are illustrated on pages 168 - 183 of Reference 1. Two of these are reproduced below:

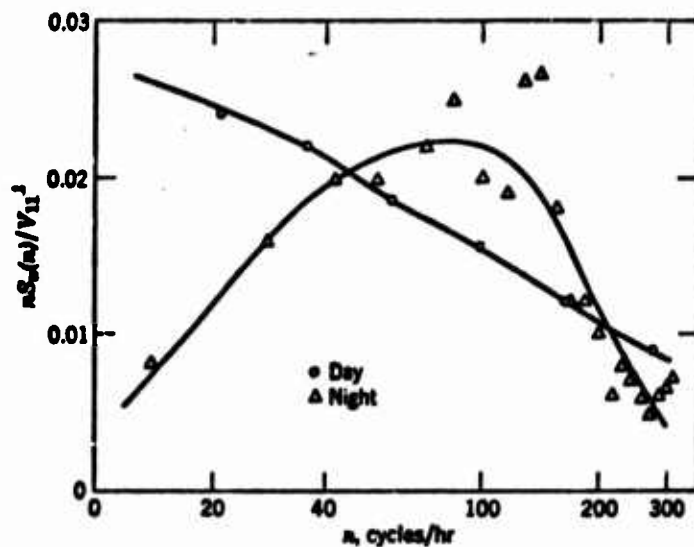


Figure 1. Spectrum of Longitudinal Velocity at 91 m at Brookhaven, Divided by Square of Wind Speed at 11 m. (According to Panofsky and Deland, 1959)

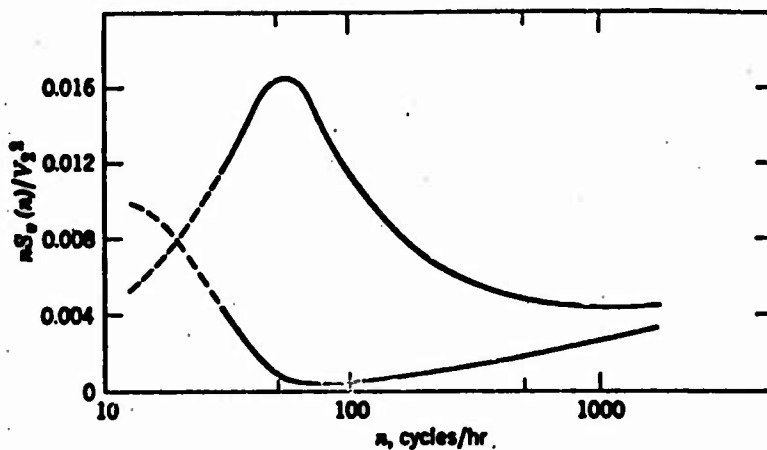


Figure 2. Typical Spectra of Lateral Velocity at O'Neill, Divided by Square of Wind Speed at 2 m. Upper curve, daytime; lower curve, night with gradual fluctuations of wind direction.

6. Gaps in Knowledge

Gust intensities depend on thermal stability, roughness and the mean wind. Statistical data on only the latter are available.

The effects of altitude on probability distributions of mean winds and wind shears are not known, and one cannot deduce gust intensities and severity.

The form of spectra (and cospectra) in other than the down-wind direction and their dependence upon stability, wind speed and wind shear are not known.

It is difficult to determine the validity of the various models for high-wind-speed and/or high-turbulence-intensity conditions.

7. Measured Variations Between Rural and Urban Areas - Bowne

- a. The average turbulence intensity was higher in the city than in the rural area, but usually decreased more rapidly with height.
- b. Slopes for the high-frequency portion of the three component spectra were very close to the theoretical - $5/3$ prediction.
- c. The lateral and longitudinal spectra, V and U, were not too different in the two regimes.

CONCLUSIONS

1. The available data are limited in quality and are presented in forms which are intended for ease of correlation with various meteorological theories. Unfortunately these forms are inconvenient for aircraft flight control analysis, where one would prefer power spectra expressed as factorable functions of the frequency variable, plus simple wind-shear descriptions.
2. Extreme variability of wind-shear profiles is common, and profile reversals should be included in test conditions for flight control design criteria.

LITERATURE CITED

1. Lumley, John L., and Hans A. Panofsky, The Structure of Atmospheric Turbulence, John Wiley, 1964.
2. Skelton, Grant B., Investigation of the Effects of Gusts on V/STOL Craft in Transition and Hover, Air Force Technical Report AFFDL-TR-68-85, 1968.
3. Bowne, Norman E., John T. Ball, and Gerald E. Anderson, Some Measurements of the Atmospheric Boundary Layer in an Urban Complex, " U.S. Army Dugway Proving Ground, Contract No. DAAD 09-67-C-0108(R), 1968.
4. Slade, David H., "Meteorology and Atomic Energy 1968", U.S. Atomic Energy Commission, Division of Technical Information.
5. Scroggins, C. et al, Terrestrial Environment (Climatic) Criteria Guidelines for use in Space Vehicle Development, 1966 Revision, Marshall Space Flight Center, Huntsville Alabama, May 1, 1966. (NASA TMX-53328)