

Will Rust Solve Software Security?

JUNE 13, 2023

Joseph Sible, David Svoboda, Garret Wassermann



Copyright 2023 Carnegie Mellon University

This material is based upon work funded and supported by the Department of Defense under Contract No. FA8702-15-D-0002 with Carnegie Mellon University for the operation of the Software Engineering Institute, a federally funded research and development center. The view, opinions, and/or findings contained in this material are those of the author(s) and should not be construed as an official Government position, policy, or decision, unless designated by other documentation.

NO WARRANTY. THIS CARNEGIE MELLON UNIVERSITY AND SOFTWARE ENGINEERING INSTITUTE MATERIAL IS FURNISHED ON AN "AS-IS" BASIS. CARNEGIE MELLON UNIVERSITY MAKES NO WARRANTIES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, AS TO ANY MATTER INCLUDING, BUT NOT LIMITED TO, WARRANTY OF FITNESS FOR PURPOSE OR MERCHANTABILITY, EXCLUSIVITY, OR RESULTS OBTAINED FROM USE OF THE MATERIAL. CARNEGIE MELLON UNIVERSITY DOES NOT MAKE ANY WARRANTY OF ANY KIND WITH RESPECT TO FREEDOM FROM PATENT, TRADEMARK, OR COPYRIGHT INFRINGEMENT.

[DISTRIBUTION STATEMENT A] This material has been approved for public release and unlimited distribution. Please see Copyright notice for non-US Government use and distribution.

This material may be reproduced in its entirety, without modification, and freely distributed in written or electronic form without requesting formal permission. Permission is required for any other use. Requests for permission should be directed to the Software Engineering Institute at permission@sei.cmu.edu.

DM23-0506

Agenda

- **Introduction**
- **The Rust Security Model**
- **Limitations of the Rust Security Model**
- **Rust in the Current Vulnerability Ecosystem**
- **Rust Stability and Maturity**
- **Conclusion**

Will Rust Solve Software Security?

Introduction

**Carnegie
Mellon
University**
Software
Engineering
Institute


Background

- Easy to write vulnerable code in traditional languages
- Languages with strong type systems tended to be heavyweight and garbage collected
- Mozilla Research set out to create the best of both worlds

The Rust Language

A multi-paradigm systems-level language designed to eliminate certain kinds of security vulnerabilities.


- Compiles directly to machine code, not interpreted
- No garbage collection making it attractive for systems-level programming
- Takes cues from modern languages
 - Functional paradigm supported (& often encouraged)
 - Robust typing system
 - Uses its own build system called cargo, with libraries/packages available at crates.io

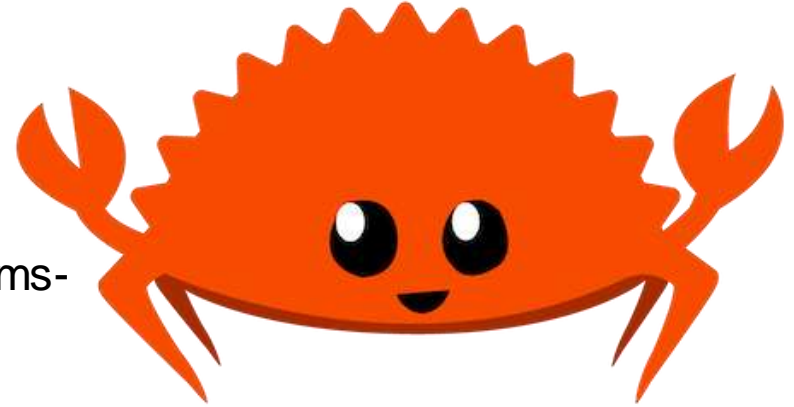

*Ferris the Crab: the unofficial Rust mascot
([Released to public domain](#))*

Safe Rust vs. Unsafe Rust

- Most code in Rust written entirely in Safe Rust
 - Exceptions: standard library implementation, C FFI, etc.
- Rust's safety guarantee:
 - Safe Rust can never cause Undefined Behavior
 - For Safe Rust, this is a guarantee
 - For Unsafe Rust, this is an obligation
 - Unsafe Rust must be *sound*

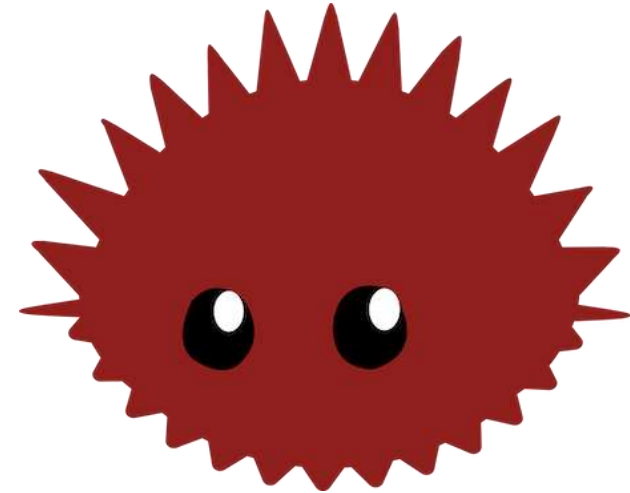

Corro the Unsafe Rusturchin
([Released to public domain](#))

The borrow checker

- Rust's most significant contribution to programming is the borrow checker
- Every object is owned in one place, and can be borrowed for use elsewhere
- Borrows can be immutable (read-only) or mutable (read-write)
- The two key rules of borrowing:
 1. Borrows must not outlast the original owner's lifetime
 2. Either a single mutable borrow or multiple immutable borrows may exist at any given time, but not both

Will Rust Solve Software Security?

The Rust Security Model

Comparison with other languages

- Traditional programming languages are often memory-unsafe
 - C
 - C++
- Memory safety used to require expensive runtime checks
 - Java
- Rust brings compile-time safety to the table

Iterator invalidation (C++11)

```
#include <cassert>
#include <iostream>
#include <vector>

int main() {
    std::vector<int> v{1,2,3};
    std::vector<int>::iterator it = v.begin();
    assert(*it++ == 1);
    v.push_back(4);
    assert(*it++ == 2);
}
```

Compiles without warnings.
Undefined Behavior at runtime!

Iterator invalidation (Rust)

```
fn main() {  
    let mut v = vec![1, 2, 3];  
    let mut it = v.iter();  
    assert_eq!(*it.next().unwrap(), 1);  
    v.push(4);  
    assert_eq!(*it.next().unwrap(), 2);  
}
```

Using an invalidated iterator

Iterator invalidation (Rust)

error[E0502]: cannot borrow `v` as mutable because it is also borrowed as immutable

--> rs.rs:5:5

```

3 |     let mut it = v.iter();
  |                   ----- immutable borrow occurs here
4 |     assert_eq!(*it.next().unwrap(), 1);
5 |     v.push(4);
  |     ^^^^^^^^^ mutable borrow occurs here
6 |     assert_eq!(*it.next().unwrap(), 2);
  |                   ----- immutable borrow later used here

```

Does not compile!
Runtime bug avoided

error: aborting due to previous error

For more information about this error, try `rustc --explain E0502`.

Use-after-free (C)

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
```

```
int main(void) {
    char *x = strdup("Hello");
    free(x);
    printf("%s\n", x);
}
```

Compiles without warnings.
Undefined Behavior at runtime!

Use-after-free (Rust)

```
fn main() {  
    let x = String::from("Hello");  
    drop(x);  
    println!("{}", x);  
}
```

x has already been freed here

Use-after-free (Rust)

```
error[E0382]: borrow of moved value: `x`
  --> src/main.rs:4:20
```

```
2     let x = String::from("Hello");
    - move occurs because `x` has type `String`, which
does not implement the `Copy` trait
3     drop(x);
    - value moved here
4     println!("{}", x);
    ^ value borrowed here after move
```

Does not compile!
Runtime bug avoided

= note: this error originates in the macro `$crate::format_args_nl` which comes from the expansion of the macro `println!` (in Nightly builds, run with `-Z macro-backtrace` for more info)

For more information about this error, try `rustc --explain E0382`.

Other kinds of mistakes

- The billion dollar mistake: NULL
 - No such thing in Rust – uses Option instead. Compiler enforces:
 - Uses of optional variables must handle their absence
 - Non-optional variables must always have a value
- Concurrency
 - Data races
 - Prevented by having either exactly one writer, or an arbitrary number of readers
 - Mutexes, etc.
 - Present in other languages like C, but can be forgotten
 - Rust encodes their invariants into the type system, preventing misuse

Will Rust Solve Software Security?

Limitations of the Rust Security Model

Limitations

- Doesn't address features enabled by **unsafe** keyword (by design)
- Only addresses memory safety and concurrency safety (e.g. data races)
 - Doesn't address other security issues
 - SQL injections (and other injection attacks)
 - Floating-point errors
 - [TOCTOU](#) file race conditions (b/c not data race in memory)
 - Unsafe cryptography (e.g. [MD5](#))
- Borrow Checker Limitations

Borrow Checker Limitation (C++11)

```
#include <cassert>
#include <iostream>
#include <vector>

int main() {
    std::vector<int> v{1,2,5};
    std::vector<int>::iterator it = v.begin();
    assert(*it++ == 1);
    v[2] = 3;
    assert(*it++ == 2);
}
```

Some operations invalidate C++ iterators
but not member assignment

This code compiles, runs cleanly, and is memory-safe.

Borrow Checker Limitation (Rust)

Workarounds:

- Use the `vec<>::split_at_mut()` method
- Using indices rather than iterators
- Wrap vector elements in `std::cell`

```
fn main() {  
    let mut v = vec![1, 2, 5];  
    let mut it = v.iter();  
    assert_eq!(*it.next().unwrap(), 1);  
    v[2] = 3; Memory-safe  
    assert_eq!(*it.next().unwrap(), 2);  
}
```

immutable borrow of `v` occurs here

mutable borrow of `v` occurs here

This code does not compile, it is rejected by the borrow checker

Rust Protection in Context

Protection	C	Java	Python	Rust
Memory Corruption Corruption	None	Full	Full	Full*
Integer Overflow	None	None	Full	Optional
Data Races	None	Some	None	Full*
Injection Attacks	None	Some	Some	Some
Misuse of 3rd-Party Party Code	None	None	None	None

*Full protection is offered for Rust code that does not use the `unsafe` keyword

Will Rust Solve Software Security?

Rust in the Current Vulnerability Ecosystem

Expanding Rust Use – and Attack Surface?

Rust is now being adopted by many important software projects.

- Rust support in the Linux kernel since 6.2 (January 2023)
- Rust support in Microsoft Windows code/API in 2023
- Rust support for [UEFI](#) in progress
 - UEFI bytecode compilation target for [rustc](#) as of 2022
- Experimental GCC compiler for release in GCC 14 (March 2023)
 - The reference compiler `rustc` is built on LLVM

Reverse Engineering Challenges

Evidence that malware authors are increasingly adopting Rust.

- Rust's features ironically make more reliable/reproducible code
- Rust code seen in 2022 malware packages like [BlackCat](#), [Hive](#), [RustyBuer](#), [Luna](#)

Source code is not always available to aid malware analysis, and there are gaps and challenges in providing Rust reverse engineering support

- Many tools assume C/C++ conventions and standards which are incorrect and/or not used by Rust
- Research needed in recognizing Rust code and abstractions in binary/machine code, and reconstructing those abstractions (decompile)

Will Rust Solve Software Security?

Rust Stability and Maturity

Signs of Maturity

- **Working reference implementation**
 - *Such as a compiler or interpreter*
- **Complete written specification**
 - *Documents how the language is to be interpreted*
- **Committee or group**
 - *Manages evolution of the language*
- **Transparent process**
 - *for evolving the language*
- **Test suite**
 - Determines the compliance of third-party implementations
- **Meta-process**
 - Allows the committee to rate and improve its own processes
- **Technology**
 - Surveys how the language is being used in the wild
- **Repository**
 - of free third-party libraries

Table of Maturity

Language	C	Java	Python	Rust
First Appearance	1972	1995	1991	2010
Reference Implementation	None	JDK / HotSpot VM	cpython	rustc
Complete Specification	ISO/IEC 9899:2017	JLS	Python Language Reference	The Rust Reference (incomplete)
Language Maintenance Group	ISO / IEC / JTC1 / SC22 / WG14	Sun , Oracle	Python Software Foundation	The Rust Project
Transparent Evolution Process	ISO	JCP	PEP Process	Request For Comments (RFC) process
Compliance Test Suite	Third-party commercial test suites	JavaTest Harness	None	None
Meta-process to Improve Committee	ISO	None	None	None
Language Survey Technology	None	None	None	crater
Third-party Code Repository	None	None	Python Package Index (PyPI)	crates.io

Rust Stability Policies

- [crater](#) scans all code in [crates.io](#) and [github.com](#)
 - Any such code with a test that:
 - **passes** under the stable build
 - but **fails** under the nightly build
 - indicates a bug in the nightly build of the Rust compiler
 - or a change that would break code.
 - **This is limited to OSS code on crates.io and github.com**
- [crates.io](#) guarantees that crates will not become unavailable,
 - Even if they become deprecated. This prevents the [Leftpad fiasco](#).
- To use an experimental Rust feature, you must add:
`#! [feature (...)]`
in your code.


Rust Maturity Conclusion

- For non-OSS Rust code:
 - Rust offers stability and maturity comparable to Python
 - The code might break when upgraded to a new version of Rust.
- **BUT** for OSS code published to crates.io and github.com
- Rust's stability is considerably stronger
 - The code will not break on new versions of Rust without notification and the Rust community can provide assistance in fixing the code.
- Rust's stability will be comparable to C or Java once Rust gains:
 - Complete written specification
 - GCC's proposed Rust extension should spur the Rust community to create a spec
 - Official compliance test suite

Will Rust Solve Software Security?

Conclusion

Key takeaways

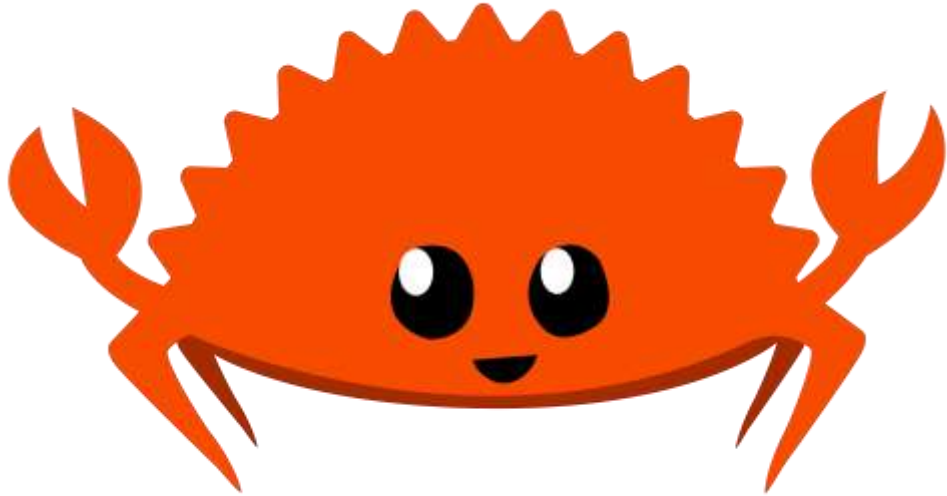

- Rust is significantly safer than C, but it's not a panacea
- Some vulnerabilities will probably never be totally preventable by a language
- Tooling is very good given how new Rust is, but it will still take time to be as rich as much older languages

Production readiness

- Being used in production by major companies such as Amazon and Google
- Lots of high-profile programs now use Rust in some capacity
 - Firefox
 - Linux kernel
 - Windows kernel

Contact Us



Joseph Sible
Associate Software Engineer



David Svoboda
Software Security Engineer



Garret Wasserman
Vulnerability Analyst

Email: info@sei.cmu.edu

Will Rust Solve Software Security?

Backup Slides

Updating the Distribution Statement in the Footers

To update the distribution statement in the footers of your presentation, follow these steps:

1. From the Home tab, select Replace at the right side of the toolbar.
2. Paste [DISTRIBUTION STATEMENT Please copy and paste the appropriate distribution statement into this space.] in the Find What field.
3. Paste a short version of the distribution statement provided by the Document Marking System in the Replace With field. (See the table on the next slide for the short statements you can use. If you have questions, send email to DMARR-Team@sei.cmu.edu.)
4. Click the Replace All button. Voilà! You're done!

You can adapt these instructions to update other information (e.g., title, date, copyright) in your presentation without having to access slide master pages.

Short Distribution Statements

Statement in Document Markings System

[DISTRIBUTION STATEMENT A] This material has been approved for public release and unlimited distribution.

[INTERNAL SEI-USE ONLY] Further dissemination requires re-submittal through DM-RRO.

Short Statement You Can Use

[DISTRIBUTION STATEMENT A] Approved for public release and unlimited distribution.

[INTERNAL SEI-USE ONLY] DM-RRO REQUIRED.

The “Introduction” Layout

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Vestibulum euismod, arcu non imperdiet suscipit, ex erat semper nisi, sed tempus orci ligula fermentum erat. Nullam iaculis rutrum turpis, ultrices fermentum purus elementum vel. Donec id fringilla arcu, vitae blandit leo. Nunc vitae fringilla quam, eu aliquet erat. Ut eleifend metus id sem molestie, sed luctus massa varius.

CMU/SEI Colors

CMU Core Colors



Carnegie Red
R: 136
G: 18
B: 48
Hex: C41230

Black
R: 0
G: 0
B: 0
Hex: 000000

Steel Gray
R: 129
G: 190
B: 192
Hex: BCBEC0



Iron Gray
R: 109
G: 110
B: 113
Hex: 6D6E71

Tartan Palette



Scots Rose
R: 239
G: 57
B: 71
Hex: EF947

Gold Thread
R: 233
G: 181
B: 22
Hex: FDB516

Green Thread
R: 0
G: 151
B: 71
Hex: 009747



Teal Thread
R: 109
G: 110
B: 113
Hex: 6D6E71

Blue Thread
R: 0
G: 143
B: 145
Hex: 008F91

Highlands Sky Blue
R: 2
G: 139
B: 192
Hex: 028BC0

Campus Palette



Machinery Hall Tan
R: 239
G: 180
B: 158
Hex: BCB49E

Kittinging Brick Beige
R: 228
G: 218
B: 196
Hex: E4DAC4

Hombostel Teal
R: 31
G: 76
B: 75
Hex: 1F4C48




Palladian Green
R: 112
G: 160
B: 148
Hex: 70A094

Weaver Blue
R: 24
G: 43
B: 75
Hex: 182B4B

Skibo Red
R: 148
G: 18
B: 31
Hex: 94121F

CMU Color Palettes

These colors comprise the standard CMU palettes. If you want to use colors that aren't provided in the template, you can use these.

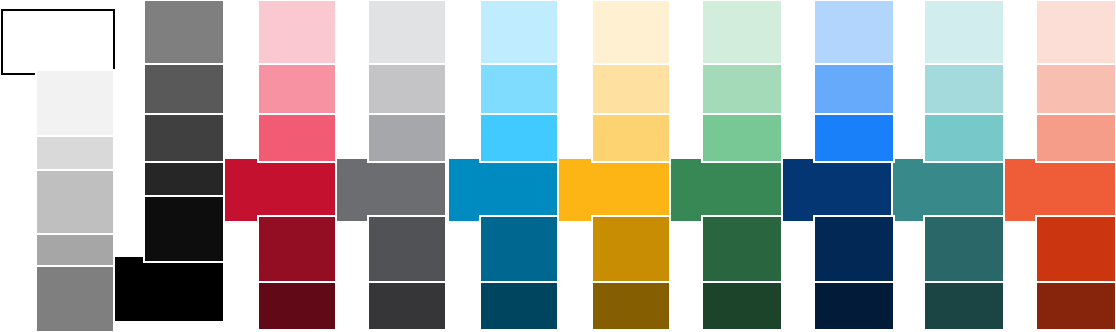

SEI PowerPoint Colors

These colors are included in the template.

Obtaining Copyright Permission to Use Images Sourced from Most Publishers, Websites, and Vendors

Right: Citation and Copyright Permission

Wrong: Citation Only


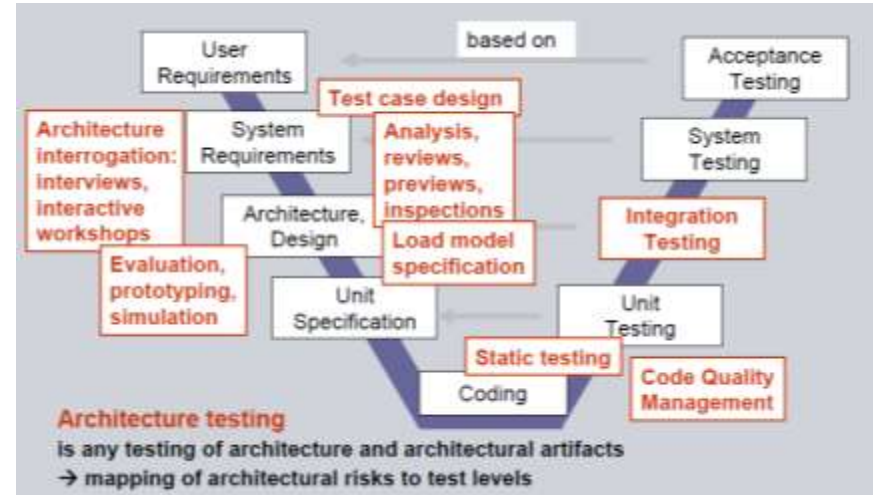


Figure 6: The V-Model Overlaid with Testing Activities [Source: Zimmerer 2011. © 2011 by IEEE Computer Society. Reprinted with permission.]

Figure 6: The V-Model Overlaid with Testing Activities [Zimmerer 2011]

The “Image and Text” Layout

20 pt Subtitle Text Can Go Here

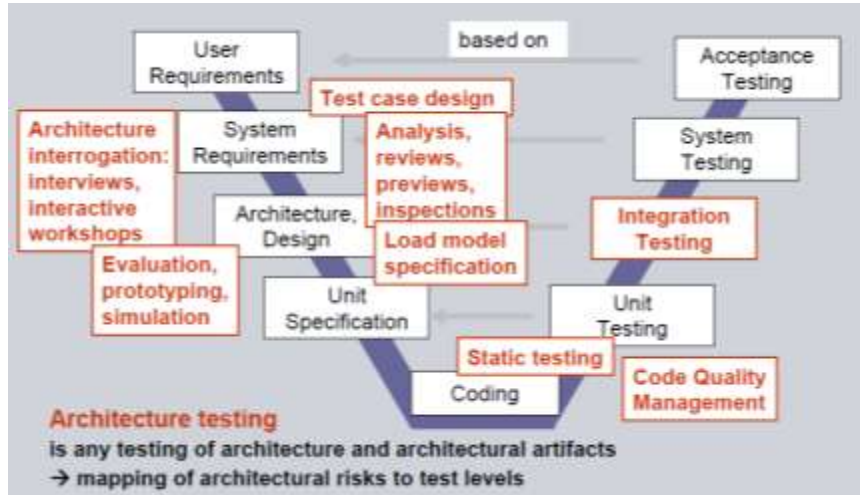

The “Image and Text” layout includes a caption text box with extra space so that you can align it to the bottom of the image for consistent spacing.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Vestibulum euismod, arcu non imperdiet suscipit, ex erat semper nisi, sed tempus orci ligula fermentum erat. Nullam iaculis rutrum turpis, ultrices fermentum purus elementum vel. Donec id fringilla arcu, vitae blandit leo. Nunc vitae fringilla quam, eu aliquet erat.

The “Basic Layout”

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Vestibulum euismod, arcu non imperdiet suscipit, ex erat semper nisi, sed tempus orci ligula fermentum erat.

- Nullam iaculis rutrum turpis, ultrices fermentum purus elementum vel.
- Donec id fringilla arcu, vitae blandit leo.

The “Two Column” Layout

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Vestibulum euismod, arcu non imperdiet suscipit, ex erat semper nisi, sed tempus orci ligula fermentum erat.

Nullam iaculis rutrum turpis, ultrices fermentum purus elementum vel. Donec id fringilla arcu, vitae blandit leo. Cras ante purus, dictum id diam vitae, faucibus fermentum magna.

The “Three Column” Layout

Phasellus facilisis enim odio,
eu euismod massa consequat
a. Vestibulum elementum
laoreet est ultricies fermentum.
Fusce sodales ac augue
interdum placerat. Nam nunc
augue, laoreet et venenatis ut,
aliquet sit amet urna.

In eu tincidunt dolor. Phasellus
pharetra posuere congue.
Proin quis fermentum purus.
Etiam fringilla ipsum eu velit
elementum venenatis. Integer
tristique ac nunc nec
consectetur.

Aenean rutrum est sed ligula
mattis, eu dapibus quam
fringilla. Donec volutpat quam
eu viverra tincidunt. Donec in
facilisis risus, a hendrerit tortor.
Cras ante purus, dictum id
diam vitae, faucibus fermentum
magna.

The “Four Column” Layout

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Vestibulum euismod, arcu non imperdiet suscipit, ex erat semper nisi, sed tempus orci ligula fermentum erat.

Aenean posuere, velit nec bibendum molestie, nunc erat suscipit sapien, mollis condimentum lorem turpis ut urna. Nunc et urna tellus.

Donec varius accumsan leo, sit amet tempor tortor efficitur id. Maecenas at dolor commodo, euismod orci nec, cursus ligula. Praesent vel blandit tellus, non pellentesque purus.

Morbi quis mi neque. Etiam at venenatis libero, vitae viverra ligula. Curabitur commodo tellus a tellus malesuada, vitae vestibulum dui convallis.


The “Image and Text” Layout



Caption with Built-In Spacing

Etiam vel erat gravida, semper erat sed, blandit tellus. Maecenas euismod rutrum gravida. Vivamus non lacus condimentum, lobortis tellus a, tincidunt dui. Duis accumsan nulla ut mi bibendum, sed consectetur sapien sodales. Donec est mi, sagittis id nisl elementum, eleifend tincidunt mi. Nullam justo purus, fermentum pharetra tellus id, sodales imperdiet mi.

Color-Background Sample

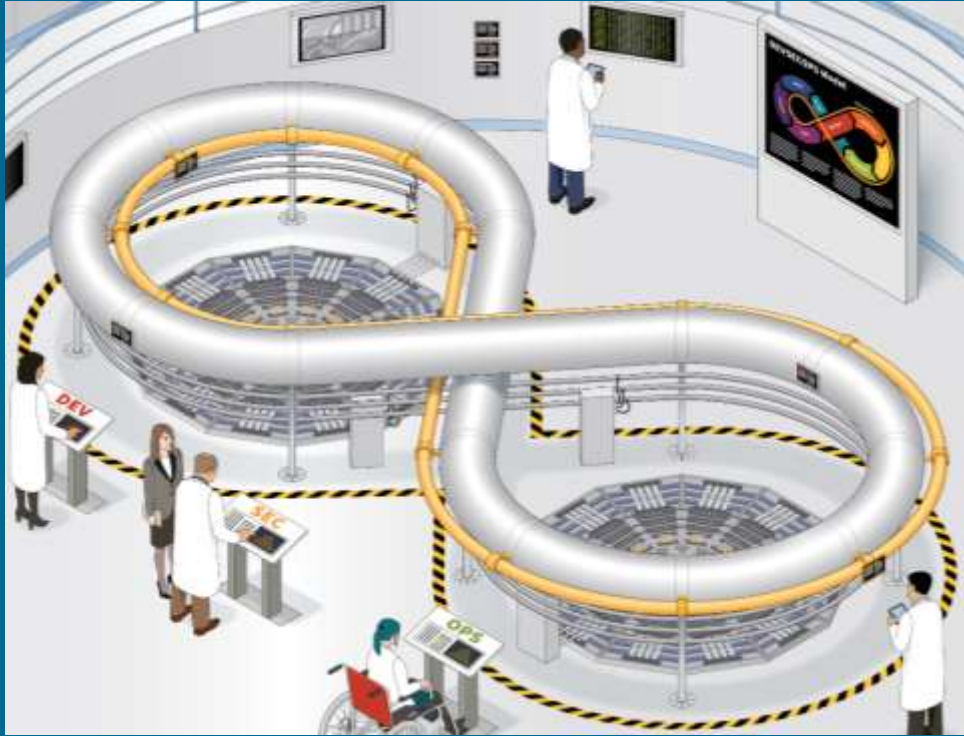

This format works well when you want to highlight something in your presentation. This slide is not a selectable layout, but we created it for you to use as a starting point.

Mac Instructions

To change the background color,

1. Click the background image.
2. Select a color.

To change the image,

1. Select the placeholder image.
2. Select the Picture Image tab.
3. Choose the appropriate option (e.g., "From a File," "This Device").
4. Select the new image. (It will resize automatically.)

PC Instructions

To change the background color,

1. Click the background image.
2. On the Home tab, click Shape Fill.
3. Select a color.

To change the image,

1. Right-click the placeholder image.
2. Select Change Picture.
3. Choose the appropriate option (e.g., "This Device," "From Stock Images").
4. Select the new image. (It will resize automatically.)

Full-Photo Background Sample

This slide is not a selectable layout, but we created it for you to use as a starting point.



Mac Instructions

To change the background color,

1. Click the background image.
2. Select a color.

To change the image,

1. Select the placeholder image.
2. Select the Picture Image tab.
3. Choose the appropriate option (e.g., “From a File,” “This Device”).
4. Select the new image. (It will resize automatically.)

PC Instructions

To change the background color,

1. Click the background image.
2. On the Home tab, click Shape Fill.
3. Select a color.

To change the image,

1. Right-click the placeholder image.
 2. Select Change Picture.
 3. Choose the appropriate option (e.g., “This Device,” “From Stock Images”).
 4. Select the new image. (It will resize automatically.)
-

Contact Sample



FirstName LastName
Title



FirstName LastName
Title



FirstName LastName
Title



FirstName LastName
Title

Telephone: +1 412.268.XXXX
Email: info@sei.cmu.edu

To change the image, follow these instructions.

Mac Instructions	PC Instructions
<ol style="list-style-type: none"> 1. Select the placeholder image. 2. Select the Picture Image tab. 3. Choose the appropriate option (e.g., "From a File," "This Device"). 4. Select the new image. (It will resize automatically.) 	<ol style="list-style-type: none"> 1. Right-click the placeholder image. 2. Select Change Picture. 3. Choose the appropriate option (e.g., "This Device," "From Stock Images"). 4. Select the new image. (It will resize automatically.)

The photos should be in grayscale. To convert a color image to grayscale, follow these instructions.

Mac Instructions	PC Instructions
<ol style="list-style-type: none"> 1. Select the placeholder image. 2. Select the Picture Format tab. 3. Choose Color. 4. Select the rightmost image under Color Saturation. 	<ol style="list-style-type: none"> 1. Select the placeholder image. 2. Select the Picture Format tab. 3. Choose the Color dropdown. 4. Select the first image under Color Saturation.
