

TECHNICAL  
LIBRARY

AD-A033 367

# CONTACT PROBLEM FOR AN ORTHOTROPIC PLATE WITH A CIRCULAR HOLE LOADED BY A BOLT

KANU R. GANDHI

ENGINEERING MECHANICS DIVISION

May 1976

Approved for public release; distribution unlimited.

ARMY MATERIALS AND MECHANICS RESEARCH CENTER  
Watertown, Massachusetts 02172

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

Mention of any trade names or manufacturers in this report shall not be construed as advertising nor as an official indorsement or approval of such products or companies by the United States Government.

#### DISPOSITION INSTRUCTIONS

Destroy this report when it is no longer needed.  
Do not return it to the originator.

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

| REPORT DOCUMENTATION PAGE                                                                                                                                                                                            |  | READ INSTRUCTIONS<br>BEFORE COMPLETING FORM                                                                             |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------|--|
| 1. REPORT NUMBER<br><br>AMMRC TR 76-14.                                                                                                                                                                              |  | 2. GOVT ACCESSION NO.<br><br>                                                                                           |  |
| 4. TITLE (and Subtitle)<br><br>CONTACT PROBLEM FOR AN ORTHOTROPIC PLATE WITH A CIRCULAR HOLE LOADED BY A BOLT                                                                                                        |  | 3. RECIPIENT'S CATALOG NUMBER<br><br>                                                                                   |  |
|                                                                                                                                                                                                                      |  | 5. TYPE OF REPORT & PERIOD COVERED<br><br>Final Report                                                                  |  |
| 7. AUTHOR(s)<br><br>Kanu R. Gandhi                                                                                                                                                                                   |  | 6. PERFORMING ORG. REPORT NUMBER<br><br>                                                                                |  |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS<br><br>Army Materials and Mechanics Research Center<br>Watertown, Massachusetts 02172<br>DRXMR-TE                                                                        |  | 8. CONTRACT OR GRANT NUMBER(s)<br><br>                                                                                  |  |
| 11. CONTROLLING OFFICE NAME AND ADDRESS<br><br>Army Materiel Development and Readiness<br>Command, Alexandria, Virginia 22333                                                                                        |  | 10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS<br>D/A Project: 1T161102B33A<br>AMCMS Code: 611102.11.85800 |  |
| 14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)                                                                                                                                          |  | 12. REPORT DATE<br>May 1976                                                                                             |  |
|                                                                                                                                                                                                                      |  | 13. NUMBER OF PAGES<br>14                                                                                               |  |
|                                                                                                                                                                                                                      |  | 15. SECURITY CLASS. (of this report)<br><br>Unclassified                                                                |  |
| 16. DISTRIBUTION STATEMENT (of this Report)<br><br>Approved for public release; distribution unlimited.                                                                                                              |  | 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE                                                                              |  |
| 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)                                                                                                                           |  |                                                                                                                         |  |
| 18. SUPPLEMENTARY NOTES<br><br>Presented at the 14th Midwestern Conference, College of Engineering,<br>University of Oklahoma, March 24-26, 1975.                                                                    |  |                                                                                                                         |  |
| 19. KEY WORDS (Continue on reverse side if necessary and identify by block number)<br><br>Anisotropy                      Structural plates<br>Elasticity                       Stress analysis<br>Complex variables |  |                                                                                                                         |  |
| 20. ABSTRACT (Continue on reverse side if necessary and identify by block number)                                                                                                                                    |  |                                                                                                                         |  |
| (SEE REVERSE SIDE)                                                                                                                                                                                                   |  |                                                                                                                         |  |

Block No. 20

## ABSTRACT

The contact problem associated with a bolt bearing on a circular frictionless hole in a rectangular orthotropic plate has been examined. The problem has been formulated by the well-known methods of Muskhelishvili and Lekhnitskii using functions of complex variables. The orthotropic stress functions are expanded in Laurent series and boundary conditions satisfied by boundary collocation. A simple iterative process has been utilized with success to find the contact angle. The process utilizes the physical fact that the radial stress in the contact region is compressive and reduces to zero in a well-behaved manner at the point where the bolt begins to separate from the plate. The problem was motivated by the growing need in composite designs to gain analytical understanding of the joint. Some interesting results concerning the stress concentrations occurring in plates with various geometries and material parameters are presented. The results show the importance of complex interactions and the necessity of employing the particular method to estimate stress concentrations in problems of this nature.

## NOMENCLATURE

|                                                                               |                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $a_{ij} (i, j = 1, 2, 6)$                                                     | Effective compliance coefficients of orthotropic laminates                                                                                                                                                |
| $D$                                                                           | Fastener diameter                                                                                                                                                                                         |
| $E_1, E_2$                                                                    | Young's moduli of individual layers of laminate along material axes                                                                                                                                       |
| $e$                                                                           | Edge distance, pin center to free edge lying in the direction of applied load                                                                                                                             |
| $G_{12}$                                                                      | Shear moduli of individual layers of laminate referred to material axis system                                                                                                                            |
| $K_{NS}$                                                                      | $\sigma_x)_{90}/\bar{\sigma}_{NS}$ , $K_{so} = \tau_{xy})_{max}/\bar{\tau}_{so}$ , $K_B = \sigma_B)_{max}/\bar{\sigma}_B$<br>Stress concentration factors for net section, shearout, and bearing stresses |
| $K'_{NS}$                                                                     | $\sigma_x)_{90}/\sigma_A$ , $K_{so} = \tau_{xy})_{max}/\sigma_A$ , $K_B = \sigma_B)_{max}/\sigma_A$<br>Ratios of peak net section, shearout, and bearing stresses to applied tension in laminate          |
| $P$                                                                           | Pin load                                                                                                                                                                                                  |
| $P_R, q_K$                                                                    | Coefficients relating displacement to Airy stress function                                                                                                                                                |
| $R$                                                                           | Pin radius                                                                                                                                                                                                |
| $r$                                                                           | Radial distance from center of pin                                                                                                                                                                        |
| $s$                                                                           | "Side" distance, i.e., lateral distance from pin to free edge (single pin case) or symmetry line (multipin case) in direction normal to load                                                              |
| $s_k (k = 1, 2)$                                                              | Coefficients in expressions for complex characteristics, $z_k$                                                                                                                                            |
| $t$                                                                           | Laminate thickness                                                                                                                                                                                        |
| $U$                                                                           | Airy stress function                                                                                                                                                                                      |
| $U_k (k = 1, 2)$                                                              | Complex components of Airy stress function                                                                                                                                                                |
| $u, v$                                                                        | Displacements in rectangular coordinate system                                                                                                                                                            |
| $x, y$                                                                        | Rectangular coordinates                                                                                                                                                                                   |
| $z_k (k = 1, 2) = x + s_k y$                                                  | Complex characteristics of partial differential equation expressing compatibility in terms of $U$                                                                                                         |
| $\alpha'_k, \beta'_k (k = 1, 2)$                                              | Real and imaginary parts of $s_k$                                                                                                                                                                         |
| $\alpha_n, \beta_n, \gamma_n, \delta$                                         | Coefficients in Laurent series expansion for $\phi_1$ and $\phi_2$                                                                                                                                        |
| $\zeta_k (k = 1, 2)$                                                          | Conformal mapping functions with arguments $s_k$                                                                                                                                                          |
| $\eta$                                                                        | Angle of contact at fastener-hole boundary                                                                                                                                                                |
| $\theta$                                                                      | Angular polar coordinate                                                                                                                                                                                  |
| $\sigma_A$                                                                    | Uniform tension applied to loaded edge of plate                                                                                                                                                           |
| $\bar{\sigma}_B = (2s/D)\sigma_A$                                             | Mean bearing stress                                                                                                                                                                                       |
| $\bar{\sigma}_{ns} = \left[ \frac{2s}{D/(1 - \frac{2s}{D})} \right] \sigma_A$ | Mean net section stress                                                                                                                                                                                   |
| $\sigma_B)_{max}$                                                             | Peak bearing stress (i.e., peak compression) at hole                                                                                                                                                      |
| $\sigma_x)_{90}$                                                              | Axial stress at $\theta = 90^\circ$ , $r = R$ , usually equal to peak net section tension                                                                                                                 |
| $\tau_{so} = (s/e)\sigma_A$                                                   | Mean shearout stress                                                                                                                                                                                      |
| $\tau_{xy})_{max}$                                                            | Maximum shear stress along hole ( $r = R$ , usually equivalent to maximum shear stress in the laminate)                                                                                                   |
| $\omega_k (k = 1, 2)$                                                         | Inverse mapping function describing $z_k$ as a function of $\zeta_k$                                                                                                                                      |
| $\nu_{12}, \nu_{21}$                                                          | Poisson's ratio                                                                                                                                                                                           |

## INTRODUCTION

With the advent of modern composites it has become important to have analytical solutions which can describe the elastic behavior of practical types of composite structures under load. As composites are orthotropic in behavior, an anisotropic formulation becomes imperative. Earlier works done for isotropic materials for a single bolt in an infinite plate by Bickley<sup>1</sup> and extensions of his analysis to treat finite boundaries.<sup>2-4</sup> The present paper treats a mixed-boundary value problem connected with the rigid bolt in a finite rectangular plate using the Lekhnitskii complex variable approach.<sup>5</sup> For plane problems of orthotropy, Lekhnitskii<sup>5</sup> has developed a solution in terms of analytic functions of complex variable theory along the lines of the well-known techniques of Muskhelishvili.<sup>6</sup>

The problem considered here is the problem of a rigid bolt in a finite rectangular sheet. The load is imposed by the bolt and its effect is represented as a known displacement on the hole of the same diameter as the bolt. The plate is kept in equilibrium by a uniform stress on one edge of the plate. Two types of boundary conditions have been considered at the lateral outer boundaries, one corresponding to a single bolt in a rectangular sheet and the other to a series of bolts equally spaced in a direction normal to the direction of the applied load. The boundary conditions are satisfied by a collocation method used by the author in Reference 7.

## FORMULATION

Standard elements of a mechanical fastening system are shown in Figure 1. The essential part is an orthotropic plate with a circular cutout to accommodate a rigid circular bolt of the same radius. Force is applied to the plate by a translation displacement applied to the bolt, which causes a deformation on the circular hole whose pattern is known. A frictionless contact has been assumed. The plate is kept in equilibrium by a uniform tensile stress  $\sigma_A$  applied on the left edge of the plate in Figure 1. In practice such plates are fabricated of several layers, each having orthotropic properties and varying angles of inclination. The axis of symmetry in this particular problem is the x-axis.

In Figure 1 two types of joint configurations have been shown, a single pin and a periodic array of pins. Figure 1c shows an isolated pin well removed from the boundaries where an infinite plate solution will apply.\*

\*OPLINGER, D. W., and GANDHI, K. R. *Analytical Failure Studies in Mechanically Fastened Composite Plates*. Unpublished research.

1. BICKLEY, W. G. Transaction of Royal Society of London, v. 227A, 1928, p. 282.
2. HOWLAND, R. C. J. *On Stresses in Flat Plates Containing Rivet Holes*. Proceedings of Third International Congress of Applied Mechanics, v. 2, 1930, p. 74-79.
3. KNIGHT, R. C. Phil. Mag., series 7, v. 19, 1935, p. 517.
4. THEOCARIS, P. *The Stress Distribution in a Strip Loaded in Tension by Means of a Central Pin*. ASME, J. Applied Mechanics, Paper No. 55-A-34.
5. LEKHNITSKII, S. *Theory of Elasticity of an Anisotropic Elastic Body*. Holden-Day, Inc., 1965.
6. MUSKHELISHVILI, N. I. *Some Basic Problems of Mathematical Theory of Elasticity*. P. Noordhoff & Co., Groningen, 1963.
7. GANDHI, K. R. *Analysis of an Inclined Crack Centrally Placed in an Orthotropic Rectangular Plate*. J. Strain Analysis, v. 7, no. 3, 1972, p. 157-162.

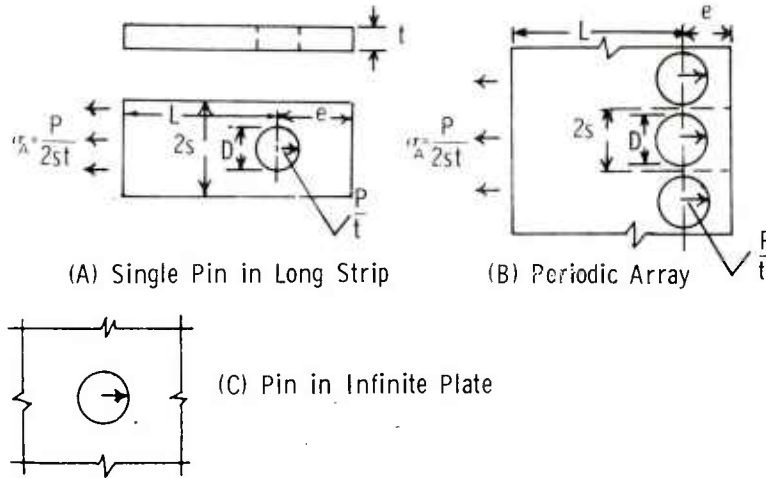


Figure 1. Mechanical joint configurations under consideration.

The problem has been treated as a plane problem ignoring the effect of out-of-plane and shear deformations. Mathematically, the problem has been formulated using the functions of complex variables. Adopting the conventional notation, the material properties can be described by the elastic constants  $E_1$ ,  $E_2$ ,  $\nu_{12}$ ,  $\nu_{21}$ , and  $G_{12}$ . By symmetry of the constitutive matrix,  $\nu_{12}/E_1 = \nu_{21}/E_2$ .

The formulation of the analysis will now be briefly summarized. The Airy stress function for two-dimensional problems of rectilinear anisotropy can be written as

$$U(x,y) = \text{Re } U_1\{z_1\} + U_2\{z_2\}, \quad (1)$$

where  $U_1$  and  $U_2$  are analytic functions of the complex variables  $z_1$  and  $z_2$ . The variables  $z_1$  and  $z_2$  correspond to

$$\begin{aligned} z_1 &= x + s_1 y \\ z_2 &= x + s_2 y, \end{aligned} \quad (2)$$

where  $s_1$  and  $s_2$  are the complex roots of the characteristic equation

$$a_{11}\mu^4 - 2a_{16}\mu^3 + (2a_{12} + a_{66})\mu^2 - 2a_{26}\mu + a_{22} = 0. \quad (3)$$

Equation 3 defines the condition required for the Airy function  $U$  to satisfy the two-dimensional compatibility equation.

In Equation 3 the  $a_{ij}$  are the compliance coefficients occurring in the generalized Hooke's Law. Assuming unequal roots in Equation 3, we have

$$s_1 = \mu_1 = \alpha_1' + i\beta_1'$$

$$s_2 = \mu_2 = \alpha_2' + i\beta_2'$$

$$s_3 = \bar{s}_1 \quad s_4 = \bar{s}_2, \quad (4)$$

where  $\alpha_j'$  and  $\beta_j'$  are real constants. Without loss of generality we assume that  $\beta_1' > 0$  and  $\beta_2' > 0$ .

To simplify notation the new functions introduced are:

$$\phi_1(z_1) = dU_1/dz_1, \quad \phi_2(z_2) = dU_2/dz_2. \quad (5)$$

Then, from the definition of the Airy stress function, the stresses can be written as

$$\begin{aligned} \sigma_x &= 2\operatorname{Re} \{s_1^2 \phi_1'(z_1) + s_2^2 \phi_2'(z_2)\} \\ \sigma_y &= 2\operatorname{Re} \{\phi_1'(z_1) + \phi_2'(z_2)\} \\ \tau_{xy} &= -2\operatorname{Re} \{s_1 \phi_1'(z_1) + s_2 \phi_2'(z_2)\}, \end{aligned} \quad (6)$$

where, henceforth, primes will be used to denote differentiation with respect to the indicated arguments.

Another useful relation is the following expression for the force resultant as a function of arc length on an arbitrary curve:

$$\begin{aligned} (1+is_1)\phi_1(z_1) + (1+is_2)\phi_2(z_2) + (1+i\bar{s}_1)\overline{\phi_1(z_1)} + (1+i\bar{s}_2)\overline{\phi_2(z_2)} \\ = i\int^S (X_n + iY_n)ds = f_1(s) + if_2(s). \end{aligned} \quad (7)$$

The displacements are expressed as

$$\begin{aligned} u &= 2\operatorname{Re}[p_1\phi_1 + p_2\phi_2] \\ v &= 2\operatorname{Re}[q_1\phi_1 + q_2\phi_2], \end{aligned}$$

with  $p_k$  and  $q_k$  ( $k=1,2$ ) given by

$$\begin{aligned} p_k &= a_{11}s_k^2 + a_{12} - a_{16}s_k \\ q_k &= a_{11}s_k^2 + a_{22}/s_k - a_{26}. \end{aligned} \quad (8)$$

### METHOD OF ANALYSIS

We now need to determine  $\phi_1(z_1)$  and  $\phi_2(z_2)$  so as to satisfy the stress and displacement boundary conditions. Since the circular boundary is transformed to an elliptical shape in the  $z_1$  and  $z_2$  planes, the first step consists of finding a simple mapping function which maps elliptical contours in the  $z_k$  plane on a unit circle in the plane of an auxiliary parameter  $\zeta_k(z_k)$ . The following accomplishes this step:

$$z_k = \omega(\zeta_k) = (R(1-is_k)/2)\zeta_k + (R/2)(1+is_k)(1/\zeta_k) \quad (9)$$

where  $R$  is the radius of the hole. The following are useful notations:

$$\begin{aligned}\phi_1(z_1) &= \phi_1[\omega(\zeta_1)] = \phi_1(\zeta_1) \\ \phi_2(z_2) &= \phi_2[\omega(\zeta_2)] = \phi_2(\zeta_2).\end{aligned}\tag{10}$$

Thus

$$\begin{aligned}\phi_1'(z_1) &= \phi_1'(\zeta_1)/\omega'(\zeta_1) \\ \phi_2'(z_2) &= \phi_2'(\zeta_2)/\omega'(\zeta_2).\end{aligned}\tag{11}$$

The transformed expression for the stresses can now be written as

$$\sigma_x = 2\text{Re}\{(s_1^2\phi_1'(\zeta_1)/\omega'(\zeta_1)) + (s_2^2\phi_2'(\zeta_2)/\omega'(\zeta_2))\}\tag{12}$$

The resultant force, Equation 7, becomes

$$\begin{aligned}(1+is_1)\phi_1(\zeta_1) + (1+is_2)\phi_2(\zeta_2) + (1+i\bar{s}_1)\overline{\phi_1(\zeta_1)} \\ + (1+i\bar{s}_2)\overline{\phi_2(\zeta_2)} = f_1(s) + if_2(s).\end{aligned}\tag{13}$$

The boundary conditions involved in the analysis included specifications of normal and tangential stresses at the rectangular outer boundary together with mixed boundary conditions on the circular inner boundary. On the inner boundary the conditions are:

$$\begin{aligned}r = R, 0 \leq \theta \leq \pi; \tau_{R\theta} &= 0 \text{ (frictionless case)} \\ \eta \leq \theta \leq \pi; \sigma_R &= 0 \\ 0 \leq \theta \leq \eta; u_R &= \delta \cos\theta.\end{aligned}$$

The second and third of these conditions imply that the contact angle is identified with  $\eta$ . With  $\delta$  taken to be the rigid body displacement of the pin, the radial displacement  $u_R$  is given to a good approximation (neglecting higher order terms in  $\delta/R$ ) by  $\delta \cos\theta$  in the contact region. The value of  $\eta$  is an unknown in the problem and was determined by a method described later.

On the outer boundary the boundary conditions are:

$$\begin{aligned}x = e, 0 \leq y \leq s; \sigma_x = \tau_{xy} &= 0 \\ x = -L, 0 \leq y \leq s; \sigma_x = \sigma_A, \tau_{xy} &= 0 \\ -L \leq x \leq e, y = 0; v = \tau_{xy} &= 0 \\ -L \leq x \leq e, y = s; \tau_{xy} = 0, \text{ (single pin)} \quad \sigma_y &= 0 \\ -L \leq x \leq e, y = s; \tau_{xy} = 0, \text{ (multipin)} &= \text{constant.}\end{aligned}$$

This implies that the loaded end of the plate is located at  $x = -L$ . The third equation represents the assumption that the  $x$ -axis is a line of symmetry for the problem. In the last equation the single pin case corresponds to a free boundary at  $y = s$ , while in the multipin (i.e., periodic array) case  $y = s$  represents a second line of symmetry. In the case of the contact angle, the value of  $v$  in the latter situation is an unknown. More precisely, it is required that the constant value of  $v$  at  $y = s$  be adjusted so that the mean value of  $\sigma_y$  along this boundary is zero. In the approach used here, two trial values for  $v$  were assumed and the total vertical force  $f_y$  on the boundary was calculated as part of the solution. Since  $f_y$  is a linear function of  $v$ , a straight line relation was thereby established which determined the value of  $v$  required to set  $f_y$  (and therefore the mean  $\sigma_y$ ) equal to zero. In the infinite plate case, of course, the outer boundary conditions do not enter. Correspondingly, the positive powers in the Laurent series, Equation 14, are eliminated. Other simplifications which were used to advantage in the infinite plate case are described in Equation 13.

The boundary condition equations contain the unknown stress functions  $\phi_1(\zeta_1)$  and  $\phi_2(\zeta_2)$ , which are the analytic functions of their arguments in a doubly connected region. Since we are dealing with this type of region, a Laurent series of the following form has been selected:

$$\phi_1(\zeta_1) = A_1 \log \zeta_1 + \sum_{n=-\infty}^{+\infty} (\alpha_n + i\beta_n) \zeta_1^n$$

$$\phi_2(\zeta_2) = A_2 \log \zeta_2 + \sum_{n=-\infty}^{+\infty} (\gamma_n + i\delta_n) \zeta_2^n$$

A further simplification can be made knowing the symmetries in the elastic properties of composite materials. The following major kinds are considered here. Both of them ensure that  $x$ -axis is the axis of symmetry:

a. when the characteristic roots  $s_1$  and  $s_2$  are purely imaginary, i.e.,  $\alpha_1 = \alpha_2 = 0$ ; and

b. when the roots are related by the equation  $s_2 = -\bar{s}_1$ .

The above symmetries are obtained depending upon the manner in which composite materials are put together. Most of the composite designs would fall into one or the other category. In the symmetry of type a it can be shown that under that special condition,  $\alpha_n = \gamma_n = 0$ , while in the symmetry of type b,  $\delta_n = -\gamma_n$  and  $\beta_n = \delta_n$ . Further, the complex coefficients of the log terms  $A_1$  and  $A_2$  are determined by imposing the single value condition on  $f_1$  and  $f_2$  and the displacements  $u$  and  $v$ . As derived by Lekhnitskii,<sup>4</sup> the following equations are relevant. The values of  $A_1$  and  $A_2$  depend entirely on the magnitude of the pin load  $P = 2s\sigma_A$ .

$$A_1 + A_2 - \bar{A}_1 - \bar{A}_2 = 0$$

$$s_1 A_1 + s_2 A_2 - \bar{s}_1 \bar{A}_1 - \bar{s}_2 \bar{A}_2 = -P/2\pi i$$

$$P_1 A_1 + P_2 A_2 - \bar{P}_1 \bar{A}_1 - \bar{P}_2 \bar{A}_2 = 0$$

$$q_1 A_1 + q_2 A_2 - \bar{q}_1 \bar{A}_1 - \bar{q}_2 \bar{A}_2 = 0$$

Now the problem simplifies to selecting the unknowns  $\alpha_n$ ,  $\beta_n$ ,  $\gamma_n$ , and  $\delta_n$  in Equation 14 so that the external boundary conditions are satisfied with sufficient accuracy. A least-squares collocation procedure<sup>7</sup> was used and found satisfactory. It consists of the following steps.

1. Truncation of the infinite expansion in Equation 14 to a suitable finite number of positive and negative powers.

2. Selection of points or stations around the external boundary in a fairly uniform manner and writing force equations at each location. The number of such equations was always arranged to provide more than twice the number of unknowns.

3. Solutions of unknowns in such a manner that the equations in step 2 are satisfied in a least-squares sense.

## ANGLE OF CONTACT

As in any contact problem, the determination of the region of contact is a part of the solution. As the contact length depends on the load, the problem strictly speaking is nonlinear. In our problem we employed a simple iterative procedure which, within a few trials, succeeded in arriving at a close approximation to the true contact angle  $\eta$  starting with an assumed value close to  $90^\circ$ . The method relies on the obvious physical fact that the radial stress  $\sigma_r$  in the contact region is always compressive and approaches zero at the end of contact in a well-behaved manner. Therefore, the procedure consists of starting with a value of  $\eta$  denoted by  $\eta_1$ , solving the problem, and examining the sign of  $\sigma_r$  at  $\theta = \eta_1$ . If the sign of  $\sigma_r$  is compressive, it can be concluded that the true value of  $\eta$  is greater than the assumed value  $\eta_1$ . In either case a solution is obtained with a new trial value of  $\eta$ , say  $\eta_2$ . In all the cases tried, the two trial values,  $\eta_1$  and  $\eta_2$ , were sufficient to give a relatively accurate estimate of the true value of  $\eta$ . This approach amounts to a procedure similar to the Newton Raphson method for nonlinear algebraic equations. In the region close to the true value of  $\eta$ , the assumed contact angle plotted against  $\sigma_r$  at  $\theta = \eta$  gives a nearly linear plot. The iterative method converges quite rapidly.

## NUMERICAL RESULTS

On the basis of the foregoing analysis, a computer code was developed to determine the coefficients of the stress functions. The procedure consisted of selecting discrete stations around the boundary at which the prescribed boundary conditions were specified. At each of these stations two equations expressing the pertinent boundary conditions were written. The stations were roughly equally spaced and their numbers so arranged that they gave a large number of equations, more than twice the number of known coefficients in the stress function. The resulting redundant system was solved by the least-squares collaction procedure.<sup>7</sup> To investigate the accuracy of the solution, some arbitrary points on the boundary were examined for boundary conditions. For the range of the results presented encompassing different material and geometrical configurations, a fairly high order of accuracy was obtained even with the truncation of the series to  $-10 \leq n \leq +10$ .

The practical motivation in carrying out this analysis was to develop a tool to predict the complicated behavior of mechanical joints of laminated composites typical of aircraft structural applications. The elastic properties of layers are given in Table 1. The fabrication of laminates for a joint is usually done by

Table 1. ASSUMED MECHANICAL CONSTANTS OF FIBER-REINFORCED MATERIALS

| Elastic Constants                          | Graphite Epoxy | Glass Epoxy |
|--------------------------------------------|----------------|-------------|
| $E_L$ , $10^6$ psi (GN/m <sup>2</sup> )    | 25.0 (172)     | 7.00 (48.2) |
| $E_T$ , $10^6$ psi (GN/m <sup>2</sup> )    | 1.0 (6.89)     | 2.50 (17.2) |
| $G_{LT}$ , $10^6$ psi (GN/m <sup>2</sup> ) | 0.7 (4.82)     | 1.20 (8.26) |
| $\nu_{LT}$                                 | 0.2            | 0.25        |

stacking layers at different angles of inclination to the axis of the joint. The elastic properties of such a joint were estimated by doing the usual property transformations.<sup>8</sup> A simple laminate theory was used to estimate the average elastic properties of the laminate. This simple theory ignores the out-of-plane phenomena such as interlaminar shear stresses, etc.

Figure 2 shows the general distribution of stresses on the fastener hole periphery. In some cases the distribution of  $\sigma_r$  has the appearance of "half cosine" distribution. As is true in the anisotropic solutions, sizable variations can take place in any direction depending upon the configuration of material and geometries. An example of interest is given in Figure 2 for the curve marked with squares, where  $e = 1.5$  and the material is  $0^\circ$  glass epoxy. In Figure 2 where  $e/R = 1.5$ , the method of solution places certain limitations on geometry for its successful results. One limitation is due to the convergence of a Laurent series for any awkward shape. For example, when either  $e/r$  or  $s/r$  is close to unity, the boundary conditions are satisfied in a poor way. One more observation suggests that for large values of  $e$  and  $s$  the solution gradually merges into the solution for infinite plate. The method of solution was relatively faster in convergence for periodic arrays than for the single pin case with the same number of terms needed for a given level of accuracy in the satisfaction of the boundary conditions. The bulk of the results tried were for the perfect fit case, i.e., pin radius equals the hole radius. This method was demonstrated to be suitable for

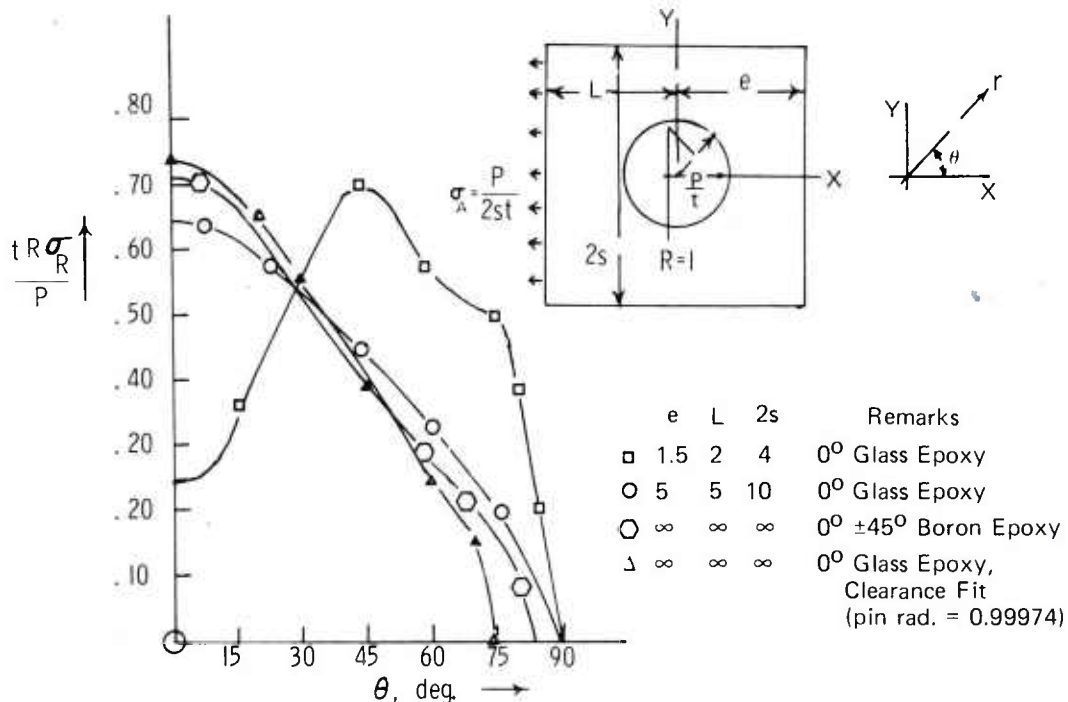


Figure 2. Radial stress distribution around fastener hole ( $D = 2$ ).

clearance fit cases, particularly when the difference between pin and hole radius was small. One such example is shown in Figure 2 labeled with triangles, applying to a pin radius of 0.99974.

It is customary to compute stress concentration factors, which in turn help in estimating the stress peaks in comparison with the mean value of stresses. Now we shall define the following parameters which are of practical interest to the designers of composite materials.

$$\text{Mean Net Section Tension, } \bar{\sigma}_{NS} = P/2(s-D/2)t$$

$$\text{Mean Bearing Stress, } \bar{\sigma}_B = P/2Dt$$

$$\text{Mean Shearout Stress, } \bar{\tau}_{so} = P/2et$$

Further, these mean stresses can be divided by the applied load  $\sigma_A$ .

$$k_{NS} = \bar{\sigma}_{NS}/\sigma_A = s/(s-D/2)$$

$$k_B = \bar{\sigma}_B/\sigma_A = 2s/D$$

$$k_{so} = \bar{\tau}_{so}/\sigma_A = s/e.$$

The following ratios defined as stress concentration factors are the ratio of the peak stresses to the corresponding mean values.

$$K'_{NS} = \sigma_{\theta})_{\theta = 90, r = R}/\sigma_A$$

$$K'_B = \sigma_B)_{\max}/\sigma_A$$

$$K'_{so} = \tau_{xy})_{\max}/\sigma_A.$$

The quantity  $\sigma_B)_{\max}$  is defined as the compressive axial stress, i.e., maximum compressive value of  $\sigma_n$  along the circular hole ( $r = R$ ) in the contact region. Similarly,  $\tau_{xy})_{\max}$  is the maximum shear at  $r = R$ . It was observed that the maximum  $\tau_{xy}$  occurs between polar angles of about  $40^\circ$  to  $70^\circ$  in the region of contact.

Finally, the ratios of  $\sigma_{\theta})_{\theta = 90^\circ, r = R}$ ,  $\sigma_B)_{\max}$ , and  $\tau_{xy})_{\max}$  to  $\sigma_A$  are of interest. These are denoted as

$$K_{NS} = \sigma_{\theta})_{\theta = 90, r = R}/\bar{\sigma}_{NS}$$

$$K_B = \sigma_B)_{\max}/\bar{\sigma}_B$$

$$K_{so} = \tau_{xy})_{\max}/\bar{\tau}_{so}.$$

The following relations are apparent:

$$K'_{NS} = k_{NS} K_{NS}$$

$$K'_B = k_B K_B$$

$$K'_{so} = k_{so} K_{so}$$

Solutions were computed for various geometries. The important parameters for observation are  $e/D$  and  $s/D$ . The material was high-modulus graphite and the fiber orientation was  $0_2 \pm 45$ . The relevant elastic properties are shown in Table 1. The boundary condition was for the multiple pin case. The effect of varying the geometry is shown in Figures 3 and 4. Figure 3 shows the effect of  $s/D$  on the stress concentration factors  $K_{NS}$ ,  $K_B$ , and  $K_{so}$ . These curves stop at the indicated dotted lines because  $s$  cannot be less than  $D/2$ . Figure 3 also indicates the linear trends predicted by the infinite plate solution which shows the values of  $s/D$  for which the finite plate solution merges with the infinite plane solution. Figure 4 shows the variation of the stress ratios with normalized edge distance ( $e/d$ ) corresponding to  $s/D = 1$ . It is interesting to note that the curves fast approach a constant level for  $e/D \geq 2$ .

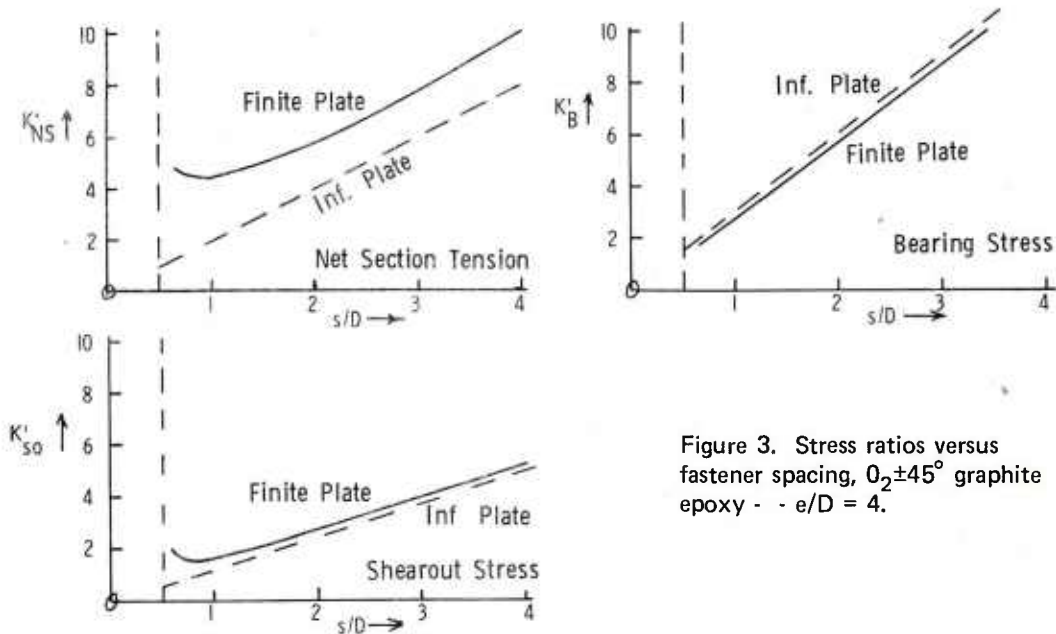


Figure 3. Stress ratios versus fastener spacing,  $0_2 \pm 45^\circ$  graphite epoxy - -  $e/D = 4$ .

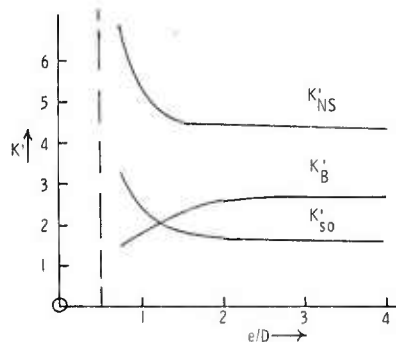


Figure 4. Stress ratios versus edge distance,  $0_2 \pm 45^\circ$  graphite epoxy - -  $s/D = 1$ .

Figure 5 shows some variations of  $\sigma_x$  at various cross sections. We have observed that at a distance equal to twice the diameter away from the hole the stresses become nearly uniform.

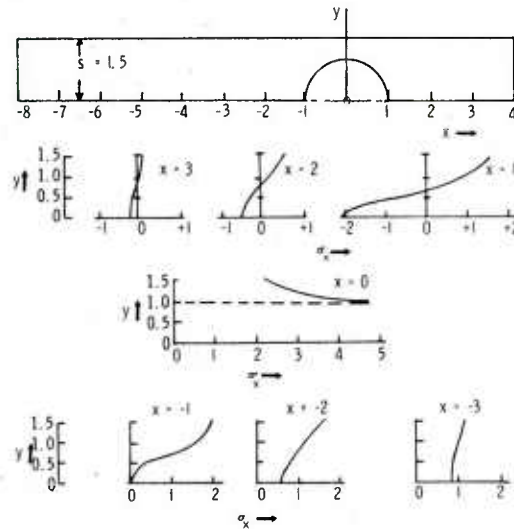


Figure 5. Variation of axial stress profile along x-axis,  $O_2 \pm 45^\circ$  graphite epoxy,  $e/D = 2$ ,  $s/D = 0.75$ ,  $L/D = 4$  (multipin).

## CONCLUSIONS

The results show the complicated nature of the strain distributions in composite joints. The Laurent series approach brings out the sensitive points in the analytic model such as the normal stress distribution around the hole as well as variation of the contact angle. The normal stress  $\sigma_x$  is often shown to be far from the usual cosine distribution. The angle of contact is peculiar to the elastic properties of the material at the aspect ratio in consideration. Theoretically, it is also dependent upon the load level, but for the elastic properties of the composites considered and the magnitude of the load the joint would be called upon to withstand, the contact angle can reasonably be considered constant. The method gives good solutions in the range of geometries encountered in practical engineering design situations. The solution scheme breaks down when the geometry is too unsymmetrical about the center of the hole. When the geometry enlarges about the center fairly uniformly in all directions, the solution merges with the solution for infinite plate.

## DISTRIBUTION LIST

| No. of<br>Copies | To                                                                                                                         | No. of<br>Copies | To                                                                                                                                                          |
|------------------|----------------------------------------------------------------------------------------------------------------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                | Office of the Director, Defense Research and Engineering,<br>The Pentagon, Washington, D. C. 20301                         |                  | Commander, U. S. Army Aeromedical Research Unit,<br>P. D. Box 577, Fort Rucker, Alabama 36460                                                               |
| 12               | Commander, Defense Documentation Center, Cameron Station,<br>Building S, 5010 Duke Street, Alexandria, Virginia 22314      | 1                | ATTN: Technical Library                                                                                                                                     |
| 1                | Metals and Ceramics Information Center, Battelle Memorial<br>Institute, 505 King Avenue, Columbus, Ohio 43201              |                  | Director, Eustis Directorate, U. S. Army Air Mobility<br>Research and Development Laboratory, Fort Eustis,<br>Virginia 23604                                |
|                  | Chief of Research and Development, Department of the Army,<br>Washington, D. C. 20310                                      | 1                | ATTN: Mr. J. Robinson, SAVDL-EU-SS                                                                                                                          |
| 2                | ATTN: Physical and Engineering Sciences Division                                                                           | 1                | Mr. R. Berresford                                                                                                                                           |
|                  | Commander, Army Research Office, P.O. Box 12211, Research<br>Triangle Park, North Carolina 27709                           |                  | Librarian, U. S. Army Aviation School Library, Fort Rucker,<br>Alabama 36360                                                                                |
| 1                | ATTN: Information Processing Office                                                                                        | 1                | ATTN: Building S907                                                                                                                                         |
|                  | Commander, U. S. Army Materiel Development and Readiness<br>Command, 5001 Eisenhower Avenue, Alexandria,<br>Virginia 22333 |                  | Commander, U. S. Army Board for Aviation Accident Research,<br>Fort Rucker, Alabama 36360                                                                   |
| 1                | ATTN: ORCOE-L, Light Armor Coordination Office                                                                             | 1                | ATTN: Library, Bldg. 5505                                                                                                                                   |
| 1                | DRCOE-TC                                                                                                                   |                  | Commander, USACDC Air Defense Agency, Fort Bliss, Texas 79916                                                                                               |
| 1                | DRCSA-S, Dr. R. B. Oillaway, Chief Scientist                                                                               | 1                | ATTN: Technical Library                                                                                                                                     |
|                  | Commander U. S. Army Electronics Command, Fort Monmouth,<br>New Jersey 07703                                               |                  | Commander, U. S. Army Engineer School, Fort Belvoir,<br>Virginia 22060                                                                                      |
| 1                | ATTN: ORSEL-GG-00                                                                                                          | 1                | ATTN: Library                                                                                                                                               |
| 1                | ORSEL-GG-DM                                                                                                                |                  | Commander, U. S. Army Engineer Waterways Experiment Station,<br>Vicksburg, Mississippi 39180                                                                |
| 1                | ORSEL-GG-E                                                                                                                 | 1                | ATTN: Research Center Library                                                                                                                               |
| 1                | ORSEL-GG-EA                                                                                                                |                  | Commander, U. S. Army Mobility Equipment Research and<br>Development Center, Fort Belvoir, Virginia 22060                                                   |
| 1                | ORSEL-GG-ES                                                                                                                | 1                | ATTN: ORXFB-MM, Materials Research Laboratory,<br>Mr. William H. Baer                                                                                       |
| 1                | ORSEL-GG-EG                                                                                                                |                  | Aeronautic Structures Laboratories, Naval Air Engineering<br>Center, Philadelphia, Pennsylvania 19112                                                       |
|                  | Commander, U. S. Army Missile Command, Redstone Arsenal,<br>Alabama 35809                                                  | 1                | ATTN: Library                                                                                                                                               |
| 1                | ATTN: Technical Library                                                                                                    |                  | Naval Air Development Center, Aero Materials Department,<br>Warminster, Pennsylvania 18974                                                                  |
| 1                | ORSMI-RSM, Mr. E. J. Wheelahan                                                                                             | 1                | ATTN: J. Viglione                                                                                                                                           |
|                  | Commander, U. S. Army Natick Research and Development<br>Command, Natick, Massachusetts 01760                              |                  | Naval Ship Research and Development Laboratory, Annapolis,<br>Maryland 21402                                                                                |
| 1                | ATTN: Technical Library                                                                                                    | 1                | ATTN: Dr. H. P. Chu                                                                                                                                         |
| 1                | Dr. E. W. Ross                                                                                                             | 1                | Mr. R. Gross                                                                                                                                                |
| 1                | DRXNM-AAP, Mr. J. Falcone                                                                                                  |                  | Naval Underwater Systems Center, New London,<br>Connecticut 06320                                                                                           |
|                  | Commander, U. S. Army Satellite Communications Agency,<br>Fort Monmouth, New Jersey 07703                                  | 1                | ATTN: R. Kasper                                                                                                                                             |
| 1                | ATTN: Technical Document Center                                                                                            |                  | Naval Research Laboratory, Washington, D. C. 20375                                                                                                          |
|                  | Commander, U. S. Army Tank-Automotive Development Center,<br>Warren, Michigan 48090                                        | 1                | ATTN: C. D. Beachem                                                                                                                                         |
| 1                | ATTN: DROTA-R                                                                                                              | 1                | Dr. J. M. Krafft - Code B43D                                                                                                                                |
| 2                | DROTA, Research Library Branch                                                                                             |                  | Chief of Naval Research, Arlington, Virginia 22217                                                                                                          |
|                  | Commander, U. S. Army Armament Command, Rock Island,<br>Illinois 61201                                                     | 1                | ATTN: Code 471                                                                                                                                              |
| 2                | ATTN: Technical Library                                                                                                    |                  | Naval Weapons Laboratory, Washington, D. C. 20390                                                                                                           |
|                  | Commander, White Sands Missile Range, New Mexico 88002                                                                     | 1                | ATTN: H. W. Romine                                                                                                                                          |
| 1                | ATTN: STEWS-W5-VT                                                                                                          |                  | Director, Structural Mechanics Research Office of Naval<br>Research, 800 North Quincy Street, Arlington, Virginia 22203                                     |
|                  | Commander, Aberdeen Proving Ground, Maryland 21005                                                                         | 1                | ATTN: Dr. N. Perrone                                                                                                                                        |
| 1                | ATTN: STEAP-TL, Bldg. 305                                                                                                  |                  | Ship Structure Committee, Maritime Transportation Research<br>Board, National Research Council, 2101 Constitution Avenue,<br>N. W., Washington, D. C. 20418 |
|                  | Commander, Edgewood Arsenal, Maryland 21010                                                                                | 1                | Air Force Materials Laboratory, Wright-Patterson Air Force<br>Base, Ohio 45433                                                                              |
| 1                | ATTN: Mr. F. E. Thompson, Dir. of Eng. & Ind. Serv.,<br>Chem-Mun Br                                                        | 2                | ATTN: AFML (MXE), E. Morrissey                                                                                                                              |
|                  | Commander, Frankford Arsenal, Philadelphia,<br>Pennsylvania 19137                                                          | 1                | AFML (LC)                                                                                                                                                   |
| 1                | ATTN: Library, H1300, B1. S1-2                                                                                             | 1                | AFML (LLP), D. M. Forney, Jr.                                                                                                                               |
| 1                | SARFA-L300, Mr. J. Corrie                                                                                                  | 1                | AFML (LNC), T. J. Reinhart                                                                                                                                  |
|                  | Commander, U. S. Army Ballistic Research Laboratory,<br>Aberdeen Proving Ground, Maryland 21005                            | 1                | AFOL/FB, Dr. J. C. Halpin                                                                                                                                   |
| 1                | ATTN: Dr. J. Frasier                                                                                                       | 1                | AFML (MBC), Mr. Stanley Schulman                                                                                                                            |
| 1                | Dr. R. Vitali                                                                                                              | 1                | Dr. S. Tsai                                                                                                                                                 |
| 1                | Dr. G. L. Filbey                                                                                                           | 1                | Dr. N. Pagano                                                                                                                                               |
| 1                | Dr. R. Karpp                                                                                                               |                  | Air Force Flight Dynamics Laboratory, Wright-Patterson<br>Air Force Base, Ohio 45433                                                                        |
| 1                | Dr. W. Gillich                                                                                                             | 1                | ATTN: AFFOL (FBC), C. Wallace                                                                                                                               |
|                  | Commander, Harry Diamond Laboratories, 2800 Powder Mill<br>Road, Adelphi, Maryland 20783                                   | 1                | AFFDL (FBCB), G. D. Sendeckyj                                                                                                                               |
| 1                | ATTN: Technical Information Office                                                                                         |                  | National Aeronautics and Space Administration,<br>Washington, D. C. 20546                                                                                   |
|                  | Commander, Picatinny Arsenal, Dover, New Jersey 07801                                                                      | 1                | ATTN: Mr. B. G. Achhammer                                                                                                                                   |
| 1                | ATTN: SARPA-RT-S                                                                                                           | 1                | Mr. G. C. Deutsch - Code RR-1                                                                                                                               |
| 1                | Mr. A. Devine                                                                                                              |                  | National Aeronautics and Space Administration, Marshall<br>Space Flight Center, Huntsville, Alabama 35812                                                   |
| 1                | Mr. A. M. Anzalone, SARPA-FR-M-O, PLASTEC                                                                                  | 1                | ATTN: R-P&VE-M, R. J. Schwinghamer                                                                                                                          |
|                  | Commander, Redstone Scientific Information Center,<br>U. S. Army Missile Command, Redstone Arsenal, Alabama 35809          | 1                | S&E-ME-MM, Mr. W. A. Wilson, Building 4720                                                                                                                  |
| 4                | ATTN: DRSMI-RBLO, Document Section                                                                                         |                  | National Aeronautics and Space Administration, Langley<br>Research Center, Hampton, Virginia 23365                                                          |
|                  | Commander, Watervliet Arsenal, Watervliet, New York 12189                                                                  | 1                | ATTN: Mr. H. F. Hardrath, Mail Stop 129                                                                                                                     |
| 1                | ATTN: SARWW-ROT, Technical Information Services Office                                                                     | 1                | Mr. R. Foye, Mail Stop 188A                                                                                                                                 |
| 1                | Dr. T. Davidson                                                                                                            |                  |                                                                                                                                                             |
| 1                | Mr. O. P. Kendall                                                                                                          |                  |                                                                                                                                                             |
| 1                | Mr. J. F. Throop                                                                                                           |                  |                                                                                                                                                             |
| 1                | SARWW-ROR, Dr. F. W. Schmiedeshoff                                                                                         |                  |                                                                                                                                                             |
|                  | Commander, U. S. Army Foreign Science and Technology Center,<br>220 7th Street, N. E., Charlottesville, Virginia 22901     |                  |                                                                                                                                                             |
| 1                | ATTN: ORXST-S03                                                                                                            |                  |                                                                                                                                                             |

| No. of<br>Copies | To                                                                                                                               |
|------------------|----------------------------------------------------------------------------------------------------------------------------------|
|                  | National Aeronautics and Space Administration, Lewis Research Center, 21000 Brook Park Road, Cleveland, Ohio 44135               |
| 1                | ATTN: Mr. S. S. Manson                                                                                                           |
| 1                | Or. J. E. Srawley, Mail Stop 10S-1                                                                                               |
| 1                | Mr. W. F. Brown, Jr.                                                                                                             |
|                  | Panametrics, 221 Crescent Street, Waltham, Massachusetts 02154                                                                   |
| 1                | ATTN: Mr. K. A. Fowler                                                                                                           |
|                  | Wyman-Gordon Company, Worcester, Massachusetts 01601                                                                             |
| 1                | ATTN: Technical Library                                                                                                          |
|                  | Lockheed-Georgia Company, Marietta, Georgia 30060                                                                                |
| 1                | ATTN: Advanced Composites Information Center, Dept. 72-14 - Zone 402                                                             |
|                  | Honeywell, Inc., Research Dept., 56RC, Mail Stop A3 340, 2345 Walnut Street, Saint Paul, Minnesota 55113                         |
| 1                | ATTN: Mr. Gene Fisher                                                                                                            |
|                  | National Bureau of Standards, U. S. Department of Commerce, Washington, D. C. 20234                                              |
| 1                | ATTN: Mr. J. A. Bennett                                                                                                          |
| 1                | Mr. W. F. Anderson, Atomics International, Canoga Park, California 91303                                                         |
|                  | Midwest Research Institute, 425 Coker Boulevard, Kansas City, Missouri 64110                                                     |
| 1                | ATTN: Mr. C. Q. Bowles                                                                                                           |
| 1                | Mr. J. C. Grosskreutz                                                                                                            |
| 1                | Mr. A. Hurlich, General Dynamics Convair, Mail Zone S72-00, P. O. Box 1128, San Diego, California 92112                          |
|                  | Virginia Polytechnic Institute and State University, Dept. of Engineering Mechanics, 23D Norris Hall, Blacksburg, Virginia 24061 |
| 1                | ATTN: Prof. R. M. Barker                                                                                                         |
| 1                | Assoc. Prof. G. W. Swift                                                                                                         |
|                  | Southwest Research Institute, 8500 Culebra Road, San Antonio, Texas 78284                                                        |
| 1                | ATTN: Mr. G. C. Grimes                                                                                                           |
| 1                | IIIT Research Institute, Chicago, Illinois 60616                                                                                 |
| 1                | ATTN: Dr. I. M. Daniel                                                                                                           |
| 1                | Dr. R. E. Johnson, Mgr., Mechanics of Materials-AEG, Mail Drop M88, General Electric Company, Cincinnati, Ohio 45215             |
| 1                | Mr. J. G. Kaufman, Alcoa Research Laboratories, New Kensington, Pennsylvania 15068                                               |
| 1                | Mr. G. M. Orner, MANLAB5, 21 Erie Street, Cambridge, Massachusetts 02139                                                         |
| 1                | Mr. P. N. Randall, TRW Systems Group - O-1/2210, One Space Park, Redondo Beach, California 90278                                 |
|                  | TRW Equipment, TRW Inc., 23555 Euclid Avenue, Cleveland, Ohio 44117                                                              |
| 1                | ATTN: Or. E. A. Steigerwald, T/M-3296                                                                                            |
| 1                | Or. I. S. Tuba, Basic Technology, Inc., 7125 Saltsburg Road, Pittsburgh, Pennsylvania 15235                                      |
| 1                | Mr. W. A. Van der Sluys, Research Center, Babcock and Wilcox, Alliance, Ohio 44601                                               |
| 1                | Mr. B. M. Wundt, 2346 Shirl Lane, Schenectady, New York 12309                                                                    |
|                  | Battelle Memorial Institute, SDS King Avenue, Columbus, Ohio 43201                                                               |
| 1                | ATTN: Or. E. Rybicki                                                                                                             |
| 1                | Or. K. R. Merckx, Battelle Northwest Institute, Richland, Washington 99352                                                       |
|                  | General Electric Company, Schenectady, New York 12010                                                                            |
| 1                | ATTN: Mr. A. J. Brothers, Materials and Processes Lab.                                                                           |
|                  | General Electric Company, Knolls Atomic Power Laboratory, P. O. Box 1072, Schenectady, New York 12301                            |
| 1                | ATTN: Mr. F. J. Mehringer                                                                                                        |
| 1                | Mr. L. F. Coffin, General Electric Research Laboratory, P. O. Box 1088, Schenectady, New York 12301                              |
|                  | United States Steel Corporation, Monroeville, Pennsylvania 15146                                                                 |
| 1                | ATTN: Or. A. K. Shoemaker, Applied Research Laboratory                                                                           |
|                  | Westinghouse Electric Company, Bettis Atomic Power Laboratory, P. O. Box 109, West Mifflin, Pennsylvania 15122                   |
| 1                | ATTN: Mr. M. L. Parrish                                                                                                          |

| No. of<br>Copies | To                                                                                                                                                    |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  | Westinghouse Electric Company, Pittsburgh, Pennsylvania 15235                                                                                         |
| 1                | ATTN: Mr. R. E. Peterson, Research Laboratories                                                                                                       |
| 1                | Mr. E. T. Wessel, Research and Development Center                                                                                                     |
| 1                | Mr. B. F. Langer, Westinghouse Nuclear Energy Systems, P. D. Box 355, Pittsburgh, Pennsylvania 15230                                                  |
| 1                | Mr. M. J. Manjoine, Westinghouse Research Laboratory, Churchill Boro, Pittsburgh, Pennsylvania 15235                                                  |
|                  | Brown University, Providence, Rhode Island 02912                                                                                                      |
| 1                | ATTN: Prof. J. R. Rice                                                                                                                                |
| 1                | Prof. W. N. Findley, Division of Engineering, Box D                                                                                                   |
|                  | Carnegie-Mellon University, Department of Mechanical Engineering, Schenley Park, Pittsburgh, Pennsylvania 15213                                       |
| 1                | ATTN: Dr. J. L. Swedlow                                                                                                                               |
| 1                | Prof. J. Dvorak, Chemical Engineering Department, Duke University, Durham, North Carolina 27706                                                       |
|                  | George Washington University, School of Engineering and Applied Sciences, Washington, D. C. 20006                                                     |
| 1                | ATTN: Or. H. Liebowitz                                                                                                                                |
|                  | Lehigh University, Bethlehem, Pennsylvania 18015                                                                                                      |
| 1                | ATTN: Prof. George R. Irwin                                                                                                                           |
| 1                | Prof. G. C. Sih                                                                                                                                       |
| 1                | Prof. F. Erodgan                                                                                                                                      |
|                  | Massachusetts Institute of Technology, Cambridge, Massachusetts 02139                                                                                 |
| 1                | ATTN: Prof. T. H. H. Pian, Department of Aeronautics and Astronautics                                                                                 |
| 1                | Prof. F. J. McGarry                                                                                                                                   |
| 1                | Prof. A. S. Argon, Room 1-312                                                                                                                         |
| 1                | Mr. William J. Walker, Air Force Office of Scientific Research, 1400 Wilson Boulevard, Arlington, Virginia 22209                                      |
| 1                | Prof. R. Greif, Dept. of Mech. Eng., Tufts University, Medford, Massachusetts 02155                                                                   |
| 1                | Dr. D. E. Johnson, AVCO Systems Division, Wilmington, Massachusetts 01887                                                                             |
| 1                | Prof. B. Pipes, Dept. of Mech. Eng., Drexel University, Philadelphia, Pennsylvania 19104                                                              |
| 1                | Prof. A. Tetelman, Dept. of Materials Science, University of California, Los Angeles, California 90024                                                |
| 1                | Prof. W. Goldsmith, Dept. of Mech. Eng., University of California, Berkeley, California 94700                                                         |
| 1                | Prof. A. J. McEvilly, University of Connecticut, Storrs, Connecticut 06268                                                                            |
| 1                | Prof. D. Drucker, Dean of School of Engineering, University of Illinois, Champaign, Illinois 61820                                                    |
| 1                | University of Illinois, Urbana, Illinois 61820                                                                                                        |
| 1                | ATTN: Prof. H. T. Corten, Dept. of Theoretical and Applied Mechanics, 212 Talbot Laboratory                                                           |
| 1                | Or. M. L. Williams, Dean of Engineering, 240 Benedum Hall, University of Pittsburgh, Pittsburgh, Pennsylvania 15261                                   |
| 1                | Prof. A. Kobayashi, Dept. of Mechanical Engineering, University of Washington, Seattle, Washington 98105                                              |
| 1                | Mr. W. A. Wood, Baillieu Laboratory, University of Melbourne, Melbourne, Australia                                                                    |
| 1                | Mr. Elmer Wheeler, Airesearch Manufacturing Company, 402 S. 36th Street, Phoenix, Arizona 85034                                                       |
| 1                | Mr. Charles D. Roach, U.S. Army Scientific and Technical Information Team, 60DD Frankfurt/Main, I.G. Hochhaus, Room 750, West Germany (APO 09710, NY) |
| 1                | Prof. R. Jones, Dept. of Civil Eng., Ohio State University, 206 W 18th Avenue, Columbus, Ohio 43210                                                   |
|                  | State University of New York at Stony Brook, Stony Brook, New York 11790                                                                              |
| 1                | ATTN: Prof. Fu-Pen Chiang, Dept. of Mechanics                                                                                                         |
|                  | E. I. Du Pont de Nemours and Company, Wilmington, Delaware 19898                                                                                      |
| 1                | ATTN: Dr. Carl Zweren, Industrial Fibers Div., Textile Fibers Dept.                                                                                   |
|                  | Washington University, St. Louis, Missouri 63130                                                                                                      |
| 1                | ATTN: Prof. E. M. Wu                                                                                                                                  |
|                  | Director, Army Materials and Mechanics Research Center, Watertown, Massachusetts 02172                                                                |
| 1                | ATTN: DRXMR-PL                                                                                                                                        |
| 1                | DRXMR-AG                                                                                                                                              |
| 1                | Author                                                                                                                                                |

Army Materials and Mechanics Research Center,  
Watertown, Massachusetts 02172  
CONTACT PROBLEM FOR AN ORTHOTROPIC PLATE  
WITH A CIRCULAR HOLE LOADED BY A BOLT -  
Kanu R. Gandhi

AO

UNCLASSIFIED  
UNLIMITED DISTRIBUTION

Key Words

Technical Report AMMRC TR 76-14, May 1976, 14 pp -  
illus-tables, O/A Project TT161102B33A,  
AMCMS Code 611102.11.85800

Anisotropy  
Elasticity  
Complex variables

The contact problem associated with a bolt bearing on a circular frictionless hole in a rectangular orthotropic plate has been examined. The problem has been formulated by the well-known methods of Muskhelishvili and Lekhnitskii using functions of complex variables. The orthotropic stress functions are expanded in Laurent series and boundary conditions satisfied by boundary collocation. A simple iterative process has been utilized with success to find the contact angle. The process utilizes the physical fact that the radial stress in the contact region is compressive and reduces to zero in a well-behaved manner at the point where the bolt begins to separate from the plate. The problem was motivated by the growing need in composite designs to gain analytical understanding of the joint. Some interesting results concerning the stress concentrations occurring in plates with various geometries and material parameters are presented. The results show the importance of complex interactions and the necessity of employing the particular method to estimate stress concentrations in problems of this nature.

Army Materials and Mechanics Research Center,  
Watertown, Massachusetts 02172  
CONTACT PROBLEM FOR AN ORTHOTROPIC PLATE  
WITH A CIRCULAR HOLE LOADED BY A BOLT -  
Kanu R. Gandhi

AO

UNCLASSIFIED  
UNLIMITED DISTRIBUTION

Key Words

Technical Report AMMRC TR 76-14, May 1976, 14 pp -  
illus-tables, O/A Project TT161102B33A,  
AMCMS Code 611102.11.85800

Anisotropy  
Elasticity  
Complex variables

The contact problem associated with a bolt bearing on a circular frictionless hole in a rectangular orthotropic plate has been examined. The problem has been formulated by the well-known methods of Muskhelishvili and Lekhnitskii using functions of complex variables. The orthotropic stress functions are expanded in Laurent series and boundary conditions satisfied by boundary collocation. A simple iterative process has been utilized with success to find the contact angle. The process utilizes the physical fact that the radial stress in the contact region is compressive and reduces to zero in a well-behaved manner at the point where the bolt begins to separate from the plate. The problem was motivated by the growing need in composite designs to gain analytical understanding of the joint. Some interesting results concerning the stress concentrations occurring in plates with various geometries and material parameters are presented. The results show the importance of complex interactions and the necessity of employing the particular method to estimate stress concentrations in problems of this nature.