


AD-A075 813

TEXAS UNIV AT AUSTIN DEPT OF CHEMISTRY  
SEMICONDUCTOR ELECTRODES. 27. THE P- AND N-GAAS- N,N'-DIMETHYL---ETC(U)  
OCT 79 F F FAN , B REICHMAN , A J BARD  
TR-3

F/G 20/12  
N00014-78-C-0592  
NL

UNCLASSIFIED

| OF |  
ADA  
075813

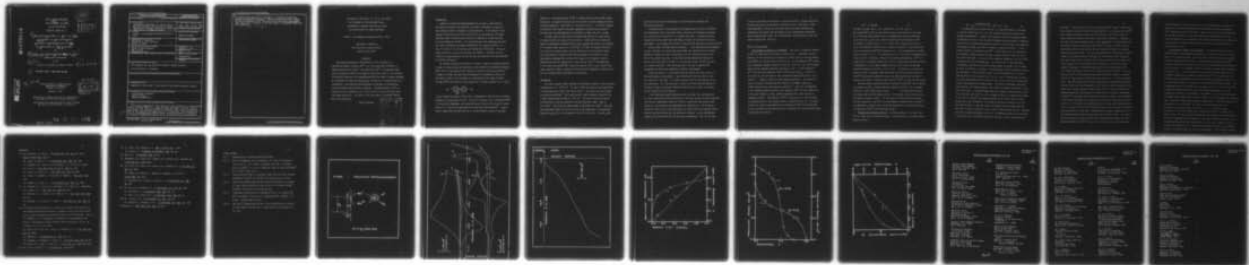

END  
DATE  
FILMED  
12-79  
DDC

12

OFFICE OF NAVAL RESEARCH  
Contract <sup>15</sup> N00014-78-C-0592

Task No. NR 051-693

TECHNICAL REPORT No. 3

LEVEL 4

AD A 075813

6 Semiconductor Electrodes, 27. The p- and n-GaAs-  
N,N'-Dimethyl-4,4'-Bipyridinium System.  
Enhancement of Hydrogen Evolution on p-GaAs  
and Stabilization of n-GaAs Electrodes,  
by

10 Fu-Ren F. Fan, Benjamin Reichman, Allen J. Bard  
Prepared for Publication

12 26 in the  
Journal of the American Chemical Society

11 1 OCT 79

9 Technical rept. 1 Sep 79-31 Aug 80,

14 TR-3

The University of Texas at Austin  
Department of Chemistry  
Austin, Texas 78712

October 1, 1979

DDC  
RECEIVED  
OCT 31 1979  
A

Reproduction in whole or in part is permitted for  
any purpose of the United States Government.

This document has been approved for public release  
and sale; its distribution is unlimited.

DDC FILE COPY

347 830 79 10 31 025

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 3	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Semiconductor Electrodes. 27. The p- and n-GaAs-N,N'-Dimethyl-4,4'-Bipyridinium System. Enhancement of Hydrogen Evolution on p-GaAs and Stabilization of n-GaAs Electrodes.		5. TYPE OF REPORT & PERIOD COVERED 1 Sept. 1979 - 31 Aug. 1980
7. AUTHOR(s) Fu-Ren F. Fan, Benjamin Reichman and Allen J. Bard		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Department of Chemistry University of Texas at Austin Austin, TX 78712		8. CONTRACT OR GRANT NUMBER(s) N00014-78-C-0592
11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research 800 N. Quincy Arlington, VA 22217		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE October 1, 1979
		13. NUMBER OF PAGES 26
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) This document has been approved for public release and sale; its distribution is unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Prepared for publication in the Journal of the American Chemical Society.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) semiconductor electrodes methyl viologen photoelectrochemistry		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The photoelectrochemical (PEC) behavior of N,N'-dimethyl-4,4'-bipyridinium (methyl viologen, MV <sup>2+</sup> ) at p- and n-type GaAs electrodes in aqueous solutions was studied. The reduction of MV <sup>2+</sup> at irradiated p-GaAs occurs at potentials ~450 mV less negative than those found at a Pt electrode. The catalyzed reaction of the photogenerated MV <sup>•+</sup> with water to produce hydrogen by irradiation of p-GaAs was demonstrated and the use of the MV-system as an intermediate in		

the photoassisted generation of hydrogen at semiconductors with high hydrogen overpotentials suggested. The photooxidation of  $MV^{2+}$  at n-GaAs occurred at potentials  $\sim 0.8$  V less positive to those where the oxidation takes place at Pt. PEC cells of the form n-GaAs or p-GaAs/ $MV^{2+}$ ,  $MV^{2+}/M$  were also constructed.

approx.

Semiconductor Electrodes. 27. The p- and n-GaAs-  
N,N'-Dimethyl-4,4'-Bipyridinium System.

Enhancement of Hydrogen Evolution on p-GaAs  
and Stabilization of n-GaAs Electrodes.

Fu-Ren F. Fan, Benjamin Reichman and Allen J. Bard

Department of Chemistry  
The University of Texas at Austin  
Austin, Texas 78712

(ABSTRACT)

The photoelectrochemical (PEC) behavior of N,N'-dimethyl-4,4'-bipyridinium (methyl viologen,  $MV^{2+}$ ) at p- and n-type GaAs electrodes in aqueous solutions was studied. The reduction of  $MV^{2+}$  at irradiated p-GaAs occurs at potentials  $\sim 450$  mV less negative than those found at a Pt electrode. The catalyzed reaction of the photogenerated  $MV^{\dagger}$  with water to produce hydrogen by irradiation of p-GaAs was demonstrated and the use of the MV-system as an intermediate in the photoassisted generation of hydrogen at semiconductors with high hydrogen overpotentials suggested. The photooxidation of  $MV^{\dagger}$  at n-GaAs occurred at potentials  $\sim 0.8$  V less positive to those where the oxidation takes place at Pt. PEC cells of the form n-GaAs or p-GaAs/ $MV^{2+}$ ,  $MV^{\dagger}/M$  were also constructed.


(End of Abstract)

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DDC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	<input type="checkbox"/>
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or special
A	

## INTRODUCTION

Attempts to promote the photodecomposition of water at semiconductor electrodes are based on the reduction of protons to hydrogen at p-type and the oxidation of water to oxygen at n-type materials. In the design of such systems difficulties arise from instability of the semiconductor electrodes themselves under irradiation and low rates of hydrogen or oxygen evolution at the semiconductor surfaces. The large band gap n-type semiconductors which are stable and provide the needed overpotential for oxygen evolution, e.g.,  $\text{TiO}_2$ <sup>1</sup> or  $\text{SrTiO}_3$ <sup>2</sup>, do not utilize solar energy very efficiently. The use of p-type materials in such cells has been less studied. Generally the efficiencies of p-type materials are low and they are apparently poor photocathodes for hydrogen evolution.<sup>3</sup>

We recently discussed the behavior of p-GaAs in aqueous solutions containing a number of redox couples and showed that stable operation of photoelectrochemical (PEC) cells for the conversion of radiant to electrical energy was possible.<sup>4</sup> A number of studies have described the production of hydrogen by reaction of the radical cation of N,N'-dimethyl-4,4'-bipyridinium (also known as methyl viologen,  $\text{MV}^{2+}$ ) with protons in the presence of a suitable catalyst (e.g.,  $\text{PtO}_2$ ).<sup>5</sup>



In such systems the radical cation,  $\text{MV}^{\cdot+}$ , is generated by reaction with a suitable reductant in the presence of light. Since this reductant (e.g., triethanolamine<sup>5a</sup>) is irreversibly decomposed, such processes may not involve net storage of radiant energy (i.e., they may be photocatalytic rather than photosynthetic<sup>6</sup>). However they do demonstrate the applicability of the  $\text{MV}^{\cdot+}$ /catalyst system for hydrogen

generation. The photoreduction of  $MV^{2+}$  at p-GaAs would provide the  $MV^{\cdot+}$  without the need of a consumable reductant and thus provide a path to hydrogen evolution at the semiconductor. The process is illustrated in Fig. 1. A similar strategy utilizing p-Si has recently also been suggested by Wrighton and co-workers.<sup>7</sup> We report here the photogeneration of hydrogen at p-GaAs with such a system.

A second aspect of the research discussed here pertains to stabilization of n-GaAs and PEC cells based on this material. Stabilization of n-GaAs with respect to photoanodic decomposition has been accomplished either by the addition of a suitable redox couple (e.g.,  $Se^{2-}/Se_2^{2-}$ ,  $Te^{2-}/Te_2^{2-}$ ) to aqueous solutions,<sup>8</sup> or by the use of aprotic media, such as acetonitrile, as the solution phase. This stabilization is based on the relative energetics and kinetics of the semiconductor decomposition reaction with respect to the capture of photo-generated holes by the reduced form of the solution couple.<sup>9</sup> We demonstrate in this paper that the  $MV^{2+}/MV^{\cdot+}$  couple can play the role of such a stabilizing redox system for n-GaAs in aqueous solutions and that regenerative (photovoltaic) PEC cells showing stable performance can be devised.

#### EXPERIMENTAL

The single crystal p-GaAs, obtained from Atomergic Chemicals, had an acceptor concentration of  $3 \times 10^{18} \text{ cm}^{-3}$ . The ohmic contact was made by electroplating Au on the polished rear side of the single crystal. The crystal was then mounted as previously described.<sup>4</sup> The single crystal n-GaAs (Atomergic Chemicals) had a donor concentration of about  $2 \times 10^{18} \text{ cm}^{-3}$ . The ohmic contact was made by electroplating In and Au successively and then heating at  $400^\circ\text{C}$  under  $H_2$  for 2 hours. The crystal was then mounted as described for p-GaAs.<sup>4</sup> Both GaAs electrodes were etched for 10-15 sec prior to the experiments in concentrated  $H_2SO_4:30\% H_2O_2:H_2O$  (3:1:1) followed by 6 M HCl for 10-15 sec. The  $MVCl_2$  used

was from K & K Rare and Fine Chemicals and solutions were prepared with triply distilled water.

The potentiostatic electrochemical measurements were done with a PAR Model 173 potentiostat using a saturated calomel electrode (sce) reference electrode and a platinum coil or gold foil as a counter electrode. Nitrogen was passed through the solution before the experiments and above the solutions during the experiments. The voltages and currents of two-electrode photocells were measured with a Keithley Model 179 TRMS Digital Multimeter. In the experiments where hydrogen gas was collected, the counter electrode chamber was separated from the p-GaAs chamber by a medium porosity sintered-glass disk to prevent oxidation of the  $MV^+$  at the counter electrode. In the two-electrode regenerative photocells, either a gold foil (area,  $\sim 40 \text{ cm}^2$ ) or a mercury pool (area,  $\sim 10 \text{ cm}^2$ ) was used as a counter electrode. These electrodes were also used to generate  $MV^+$  coulometrically before the regenerative photocell measurements.


A 450 W Xe lamp or a 1.6 mW He-Ne laser was used as the light source for the electrochemical measurements. Neutral density filters were used to vary the intensity of the light. A 1.6 kW Xe lamp was used for the hydrogen collection experiment. The light was water filtered to eliminate heating because of the near IR light; and further filtered by 420 nm cut-off filter to eliminate any UV irradiation of the solution.

In the experiments where hydrogen gas was collected, the electrochemical cell was a conventional three electrode cell (with the counter electrode separated from the main compartment) which was carefully sealed with high vacuum grease (Apizon N), and connected to a graduated buret containing Hg. The system was checked for leaks prior to the experiments, by pressurizing with hydrogen from an external tank and checking for any decrease of pressure.  $N_2$  was then bubbled through the solution while the cell was open to atmosphere. The cell was then

closed and the height of the mercury in the buret marked. Hydrogen generation could be observed by the decrease of the mercury level in the buret. After these experiments, the gas was collected into an evacuated tube which was connected to the system, and was analyzed by gas chromatography (Aerograph-Varian Autoprep Model A-700, 13X Linde Molecular Sieve 40-60 mesh column with thermal conductivity detector).

## RESULTS AND DISCUSSION


Electrochemical behavior of p-GaAs/MV<sup>2+</sup>. The cyclic voltammetric behavior of MV<sup>2+</sup> at p-GaAs and Pt electrodes is shown in Fig. 2. Consider first the behavior of a Pt electrode in a solution of 1 M KCl at pH 2.5 with and without 0.074 M MV<sup>2+</sup> (as chloride salt) (curves d,e,f). In the absence of MV<sup>2+</sup> a small wave, presumably hydrogen evolution, occurs at  $\sim -0.35$  V vs. SCE, with the background current hydrogen evolution occurring at -1.0 V. In the presence of MV<sup>2+</sup>, the reversible reduction of MV<sup>2+</sup> to MV<sup>+</sup> occurs with  $E_{pc} = -0.66$  V vs. sce (curve d), with the peak for the irreversible reduction to MV at -1.03 V (curve e) found on scanning to more negative potentials. The unusual behavior on reversal following the MV<sup>+</sup> reduction is probably caused by a surface effect and has been observed previously.<sup>10</sup> The cyclic voltammogram at an irradiated p-GaAs electrode in the absence of MV<sup>2+</sup> (curve a) shows only a very small cathodic current, probably connected with a very low rate of hydrogen evolution. Upon addition of MV<sup>2+</sup> to the solution, a large increase in the photocurrent in the cathodic region is observed (curve b). This photocurrent can clearly be attributed to the reduction of MV<sup>2+</sup> to the purple MV<sup>+</sup>, as can be observed by the blue-purple color streaming from the electrode surface, according to the reaction



The anodic current due to the oxidation of the  $\text{MV}^{\dagger}$  back to the original  $\text{MV}^{2+}$  occurs on scan reversal both in the dark and in the light, but in the light the oxidation occurs at somewhat less positive potentials. In the dark only a very small current connected with the reduction of  $\text{MV}^{2+}$  is observed at p-GaAs (curve c). As is clear from a comparison of curves b and d, the reduction of  $\text{MV}^{2+}$  occurs at p-GaAs at potentials significantly positive of the reversible  $\text{MV}^{2+}/\text{MV}^{\dagger}$  potential at Pt. The photoreduction at p-GaAs starts at about -0.2 V vs. sce (and peaks at  $\sim -0.5$  V) so that an "underpotential" of about 0.45 V is achieved. Moreover, the direct photoreduction of  $\text{MV}^{2+}$  on p-GaAs occurs at potentials which are positive of those where hydrogen evolution is observed on Pt, and indeed somewhat positive of the reversible hydrogen electrode potential at this pH, -0.39 V vs sce. A comparison of the peak currents on Pt and illuminated p-GaAs shows that the limiting current densities for  $\text{MV}^{2+}$  reduction are essentially equal thus demonstrating that the rate of reduction at p-GaAs is limited by mass transfer of  $\text{MV}^{2+}$  to the electrode surface.

When the p-GaAs electrode was held at potentials where  $\text{MV}^{2+}$  can be reduced and exposed to light, a large current was observed initially but it decayed rapidly to a small steady-state current. This steady-state current was larger, when the solution was stirred. This decrease in the current can be attributed to several sources: (a) the onset of a back-reaction associated with the oxidation of the  $\text{MV}^{\dagger}$  at the semiconductor electrode back to the  $\text{MV}^{2+}$ ; (b) absorption of light by the colored  $\text{MV}^{\dagger}$  generated at the electrode surface; (c) depletion of  $\text{MV}^{2+}$  at the electrode surface.

Photoassisted hydrogen evolution. As mentioned above, it is known that  $\text{MV}^{\dagger}$  can reduce water to produce hydrogen in the presence of a suitable heterogeneous catalyst:



The photoreduction of water directly at p-type semiconductor electrodes is slow and inefficient (e.g., Fig. 2a), because these materials have high hydrogen overpotentials. However, the generation of  $\text{MV}^{\dagger}$  at irradiated p-GaAs at potentials positive of the reversible hydrogen evolution potential suggested that by using a suitable heterogeneous catalyst in the solution, bulk generation of hydrogen at p-GaAs, with  $\text{MV}^{\dagger}$  as a mediator, should be possible. In this process the  $\text{MV}^{\dagger}$  is oxidized back to  $\text{MV}^{2+}$ , so that there is no net consumption of the methyl viologen species, and some suitable oxidation process occurs at the counter electrode. To carry out this scheme we assembled a cell to collect and measure the evolved hydrogen gas. The solution was 1 M KCl containing 0.074 M  $\text{MVC1}_2$  with 20 mg of platinized  $\text{Al}_2\text{O}_3$  powder (10 weight % of Pt) added to ~25 ml of solution as catalyst. The solution was stirred continuously during the experiments. With the p-GaAs (area,  $\sim 0.3 \text{ cm}^2$ ) exposed to the 1.6 kW Xe lamp and held at a bias potential of -0.6 V vs. sce, irradiation was continued for 3 days during which time  $0.5 \text{ cm}^3$  of  $\text{H}_2$  gas (1 atm., 25°C) was collected and clearly identified by gas chromatography. In identical experiments conducted with solutions not containing  $\text{MVC1}_2$ , only traces of hydrogen ( $\sim 0.002 \text{ cm}^3$ , 1 atm., 25°C) were found. In the experiments made with solutions containing  $\text{MVC1}_2$ , the initial current ( $\sim 8 \text{ mA/cm}^2$ ) at -0.6 V, dropped quickly to a steady state current of  $\sim 0.5 \text{ mA}$  ( $\sim 1.5 \text{ mA/cm}^2$ ) and remained constant at this level (within  $\pm 10\%$ ). During this 3 day illumination, the p-GaAs electrode was biased at -0.6 V for only totally about 1.5 days and it was disconnected from the potentiostat for the other 1.5 days during which time no current flowed through the cell. Moreover, after the prolonged experiments, the cyclic voltammograms both on the irradiated p-GaAs and on the Pt disk were essentially the same as those taken before the

experiment. This shows that (a) the concentration of  $MV^{2+}$  doesn't change during the extended irradiation and the photogenerated  $MV^{\dagger}$  is oxidized back to the  $MV^{2+}$  while reducing the water, without any side reactions; and (b) the p-GaAs is stable during this process for at least 3 days under illumination. Although it was clear from these experiments that a great enhancement in the hydrogen evolution rate at p-GaAs is achieved by using the  $MV^{2+}$  system, we couldn't obtain quantitative results which describe the real maximum efficiency for hydrogen production with this system. This is mainly attributable to the relative inefficiency of the catalyst we used,  $Pt/Al_2O_3$ , for the reaction of  $MV^{\dagger}$  with water. Thus, after about 30 min. from the start of the irradiation of the p-GaAs, the solution began to turn blue-purple and the intensity of the solution color gradually increased. This demonstrated that the rate of generation of  $MV^{\dagger}$  ( $\sim 1.5 \text{ mA/cm}^2$ ) was higher than the rate of reduction of water by  $MV^{\dagger}$ . This accumulation of  $MV^{\dagger}$  in the solution decreased the efficiency, because it absorbed some of the light and also enhanced the back reaction (i.e., surface recombination). When the concentration of  $MV^{\dagger}$  became high, the photocurrent decreased, and the circuit had to be disconnected until the blue color dissipated and the steady state current returned to the original value. A better efficiency for hydrogen production could probably be achieved with the catalysts recommended elsewhere.<sup>5a</sup> Even under these unoptimized conditions, however, the enhancement in the rate of production of  $H_2$  compared to solutions not containing  $MVCl_2$  was striking. For solutions not containing  $MVCl_2$ , the steady state photocurrent at  $-0.6 \text{ V}$  was only  $\sim 0.01 \text{ mA}$  ( $\sim 0.03 \text{ mA/cm}^2$ ) and only traces of  $H_2$  were collected for the same periods of irradiation. Attempts were also made to generate  $MV^{\dagger}$  in a two electrode system without using an external electrical supply. This should be possible with a counter electrode with a redox potential negative of that where photoreduction of  $MV^{2+}$  occurs. With a Cu wire as a counter electrode,

we could construct a PEC cell in which a current flowed during irradiation of the p-GaAs in a direction consistent with the p-GaAs being the photocathode ( $MV^{2+}$  reduction) and the Cu the anode. However, the short-circuit photocurrent in this cell was only 1.5  $\mu A$  and the open-circuit photovoltage only 50 mV, since the potential of the unpoised Cu electrode was probably mainly contributed by the  $Cu/Cu^{2+}$  or  $Cu/Cu^+$  couples rather than by the more negative  $Cu/Cu_2O$  or  $Cu/CuO$  couples at pH 3.

Electrochemical behavior of n-GaAs/ $MV^{2+}$ . The standard potential of the  $MV^{2+}/MV^+$  couple as determined on platinum is at a value consistent with stabilization of an n-GaAs electrode. While excellent stability and good efficiencies have been demonstrated with n-GaAs in selenide-containing electrolytes,<sup>8b,8c</sup> alternate solution redox couples for this and other semiconductor electrodes are also of interest. The oxidation of  $MV^+$  at an n-GaAs electrode under irradiation is shown in Fig. 3. In this experiment the solution contained 70 mM  $MV^{2+}$  and 4.5 mM  $MV^+$  (generated by coulometric reduction of  $MV^{2+}$  on large area gold foil electrode) and the photoanodic current for  $MV^+$  oxidation started at about -1.5 V vs. SCE, which is about 0.8 V negative of the reversible  $MV^{2+}/MV^+$  potential. The photodecomposition of the n-GaAs occurs at about -0.5 V vs. sce in this solution. A regenerative photovoltaic cell based on an n-GaAs photoanode, a Au or Hg cathode and a solution of 0.07 M  $MVC1_2$ , 0.005 M  $MVC1$  and 1 M  $KCl$  was constructed and showed stable operation for at least 2 hours. Au and Hg cathodes were selected over Pt because of their higher hydrogen overpotentials. These electrodes are as reversible as Pt for  $MV^{2+}/MV^+$ . The open-circuit photovoltage was 0.4 V and short-circuit photocurrent was 0.21 mA (i.e., 1.3 mA/cm<sup>2</sup> of n-GaAs electrode) in a stirred solution under irradiation with the full power of the 450 W Xe lamp. The short-circuit photocurrent and the open-circuit photovoltage of the cell depended strongly, however, on the light intensity as shown in Fig. 4. The photocurrent-photovoltage characteristic of this cell, as shown in Fig. 5, yields a fill factor of 0.31. Although the photocell was stable in the  $MV^{2+}/MV^+$  solution, this redox couple has several disadvantages. First, the deep color of

solutions containing  $MV^{\dagger}$  absorb visible light strongly, so that either low concentrations of  $MV^{\dagger}$  must be employed, with ensuing mass transport limited currents at the n-type semiconductor, or thin layer photocells must be constructed.

Moreover, with high concentrations of  $MV^{\dagger}$ , some instability of the solution became apparent,<sup>10b</sup> probably because of the occurrence of the disproportionation reaction:



producing a small amount of the neutral amine species which is known to be unstable in aqueous solution.<sup>10</sup> Minimization of this side reaction also requires lower concentrations of  $MV^{\dagger}$  in the photocell.

Photovoltaic cells based on p-GaAs/ $MV^{2+}$ . Regenerative photocells based on the  $MV^{2+}/MV^{\dagger}$  couple, p-GaAs as the photocathode and Hg as an anode were also investigated. As shown in Fig. 5, the fill factor of a p-GaAs/1.0 M KCl, 73 mM  $MV^{2+}$ , 0.5 mM  $MV^{\dagger}$ /Hg PEC cell is about 0.4. A Hg electrode was used here to prevent the Pt-catalyzed oxidation of  $MV^{\dagger}$ . The light intensity dependence of the open-circuit photovoltage and the short-circuit photocurrent of the cell is shown in Fig. 6. The quantum efficiency at 632.8 nm was about 13% without correcting the solution absorption. The power efficiency of this cell at this wavelength under light intensity  $\sim 50 \text{ mW/cm}^2$  is estimated to be about 0.5%. While these efficiencies are rather low, they only represent initial values with no attempts at optimizing cell design. They could clearly be increased significantly by decreasing the optical path length through the solution to the p-GaAs from the value (about 0.5 cm), used in this test cell.

## CONCLUSIONS

The results reported here for p-GaAs, along with those of Wrighton *et. al.* on p-Si,<sup>7</sup> with the methyl viologen system, suggest that this redox couple could provide a useful intermediate to the production of hydrogen with semiconductor electrodes. Since these small band gap materials will not provide holes with sufficiently positive potentials to oxidize water, the intermediate oxidized

form produced at the counter electrode will have to be reduced in a second PEC cell, with oxygen evolution at the counter electrode. This "dual photocell" approach to water photodecomposition has been discussed elsewhere.<sup>6,11</sup> In this context it is important to find a suitable counter electrode reaction with the p-GaAs/MV<sup>2+</sup> system to allow efficient operation without external bias. This couple also may prove useful in PEC photovoltaic cells with n-type semiconductors, although the intense color of the MV<sup>+</sup> species and the possibility of slow decomposition via disproportionation are disadvantages.

#### ACKNOWLEDGMENT

The support of this research, which is a joint project with Professor A.B.P. Lever of York University, by the Office of Naval Research is gratefully acknowledged.

## REFERENCES


- (1) (a) Fujishima, A.; Honda, K. Bull. Chem. Soc. Jpn. 1971, 44, 1148;  
Nature (London) 1972, 238, 37.  
(b) Laser, D.; Bard, A. J. J. Electrochem. Soc. 1976, 123, 1027.  
(c) Wrighton, M.S.; Ginley, D.S.; Wolczanski, P.T.; Ellis, A.B.; Morse, D.L.; Linz, A. Proc. Natl. Acad. Sci. U.S.A. 1975, 72, 1518.  
(d) Frank, S.N.; Bard, A.J. J. Am. Chem. Soc. 1977, 99, 4667.  
(e) Inoue, T.; Watanabe, T.; Fujishima, A.; Honda, K. Chem. Lett. 1977, 1073.  
(f) Hardee, K.L.; Bard, A.J. J. Electrochem. Soc. 1976, 123, 1026.
- (2) (a) Wrighton, M.S.; Ellis, A.B.; Wolczanski, P.T.; Morse, D.L.; Abrahamson, H.B.; Ginley, D.S. J. Am. Chem. Soc. 1976, 98, 2774.  
(b) Mavroides, J.G.; Kafalas, J.A.; Kolesar, D.F. Appl. Phys. Lett. 1976, 28, 241.  
(c) Watanabe, T.; Fujishima, A.; Honda, K. Bull. Chem. Soc. Jpn. 1976, 49, 355.
- (3) For example the photoreduction of couples with potentials well negative of the hydrogen electrode half reaction in aqueous solution have been carried out at p-type semiconductors without the evolution of bulk hydrogen. See, e.g.,  
(a) Memming, R. in "Proceedings of Conference on Electrochemistry and Physics of Semiconductor-Liquid Interface under Illumination," Airlie, Va., A. Heller, ed., 19 , pp. 38-48.  
(b) Bolts, J.M.; Ellis, A.B.; Legg, K.D.; Wrighton, M.S. J. Am. Chem. Soc. 1977, 99, 4826.  
(c) Memming, R. J. Electrochem. Soc. 1978, 125, 117.  
(d) Yoneyama, H.; Sakamoto, H.; Tamura, H. Electrochim. Acta 1975, 20, 341.  
(e) Malpas, R.E.; Itaya, K.; Bard, A.J. J. Am. Chem. Soc. 1979, 101, 2535.
- (4) Fan, F.-R. F.; Bard, A.J. J. Am. Chem. Soc. (submitted).

- (5) (a) Lehn, J.-M.; Sauvage, J.-P. Nouv. J. Chim. 1977, 1, 449.  
(b) Krasna, A.I. Photochem. and Photobiol. 1979, 29, 267.
- (6) Bard, A.J. J. Photochem. 1979, 10, 59.
- (7) Bookbinder, D.C.; Lewis, N.S.; Bradley, M.G.; Bocarsly, A.B.; Wrighton, M.S.  
J. Am. Chem. Soc. (submitted).
- (8) (a) Ellis, A.B.; Bolts, J.M.; Kaiser, S.W.; Wrighton, M.S. J. Am. Chem. Soc.  
1977, 99, 2848.  
(b) Chang, K.C.; Heller, A.; Schwartz, B.; Menezes, S.; Miller, B.  
Science 1977, 196, 1097.  
(c) Parkinson, B.A.; Heller, A.; Miller, B. J. Electrochem. Soc. 1979,  
126, 954.
- (9) (a) Bard, A.J.; Wrighton, M.S. J. Electrochem. Soc. 1977, 124, 1706.  
(b) Gerischer, H. J. Electroanal. Chem. 1977, 82, 133.  
(c) Park, S.-M.; Barber, M.E. J. Electroanal. Chem. 1979, 99, 67.
- (10) (a) Jasinski, R.J. J. Electrochem. Soc. 1977, 124, 637.  
(b) Bruinind, J.; Kregting, C.G.A. J. Electrochem. Soc. 1978, 125, 1397.
- (11) Nozik, A.J. Appl. Phys. Lett. 1977, 30, 567.


## FIGURE CAPTIONS


- Fig. 1 Representation of hydrogen generation scheme.
- Fig. 2 Cyclic voltammograms at Pt and p-GaAs at 0.1 V/sec in solutions of 1 M KCl, pH 2.5. (a) p-GaAs, irradiated; (b) p-GaAs, irradiated, with 0.074 M  $MV^{2+}$ ; (c) as (b) in the dark; (d)(e) Pt with 0.074 M  $MV^{2+}$ ; (f) Pt with 1 M KCl (pH 2.5).
- Fig. 3 Photo-oxidation of  $MV^+$  at irradiated n-GaAs (450 W Xe lamp). Solution contained 0.07 M  $MV^{2+}$  and 5 mM  $MV^+$ , and scan rate was 0.1 V/sec.
- Fig. 4 Open circuit photovoltage and short-circuit photocurrent as function of light intensity (450 W Xe lamp) for PEC cell n-GaAs/0.07 M  $MV^{2+}$ , 5 mM  $MV^+$ , 1 M KCl/Au, with stirred solution.
- Fig. 5 Performance characteristics of GaAs/MV PEC cells. (a) p-GaAs/73 mM  $MV^{2+}$ , 0.5 mM  $MV^+$ , 1 M KCl/Hg; (b) n-GaAs/69 mM  $MV^{2+}$ , 5 mM  $MV^+$ , 1 M KCl/Au. Solutions were stirred.
- Fig. 6 Open circuit photovoltage and short circuit photocurrent as function of light intensity (He-Ne laser, 1.6 mW, 632.8 nm) for photocell of Fig. 6(a).


**p-GaAs / Electrolyte / Catalyst(suspended)**

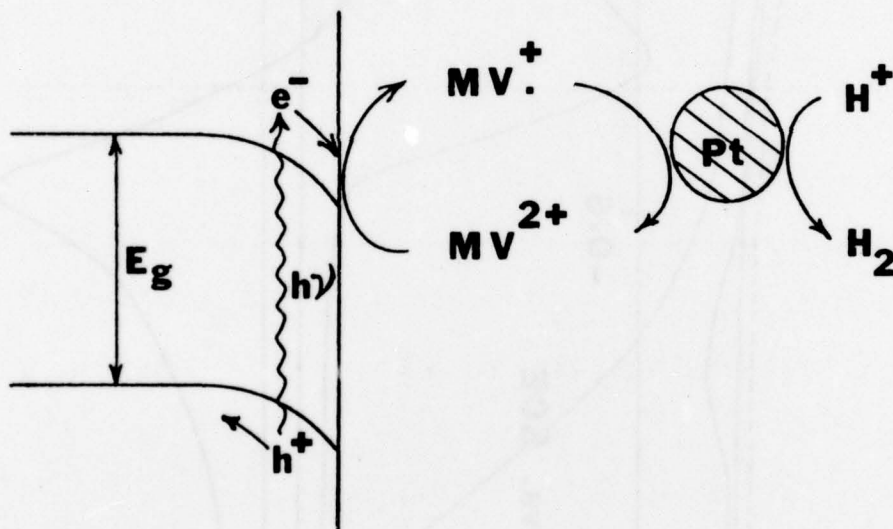



$$h\nu \geq E_g \text{ (band gap)}$$

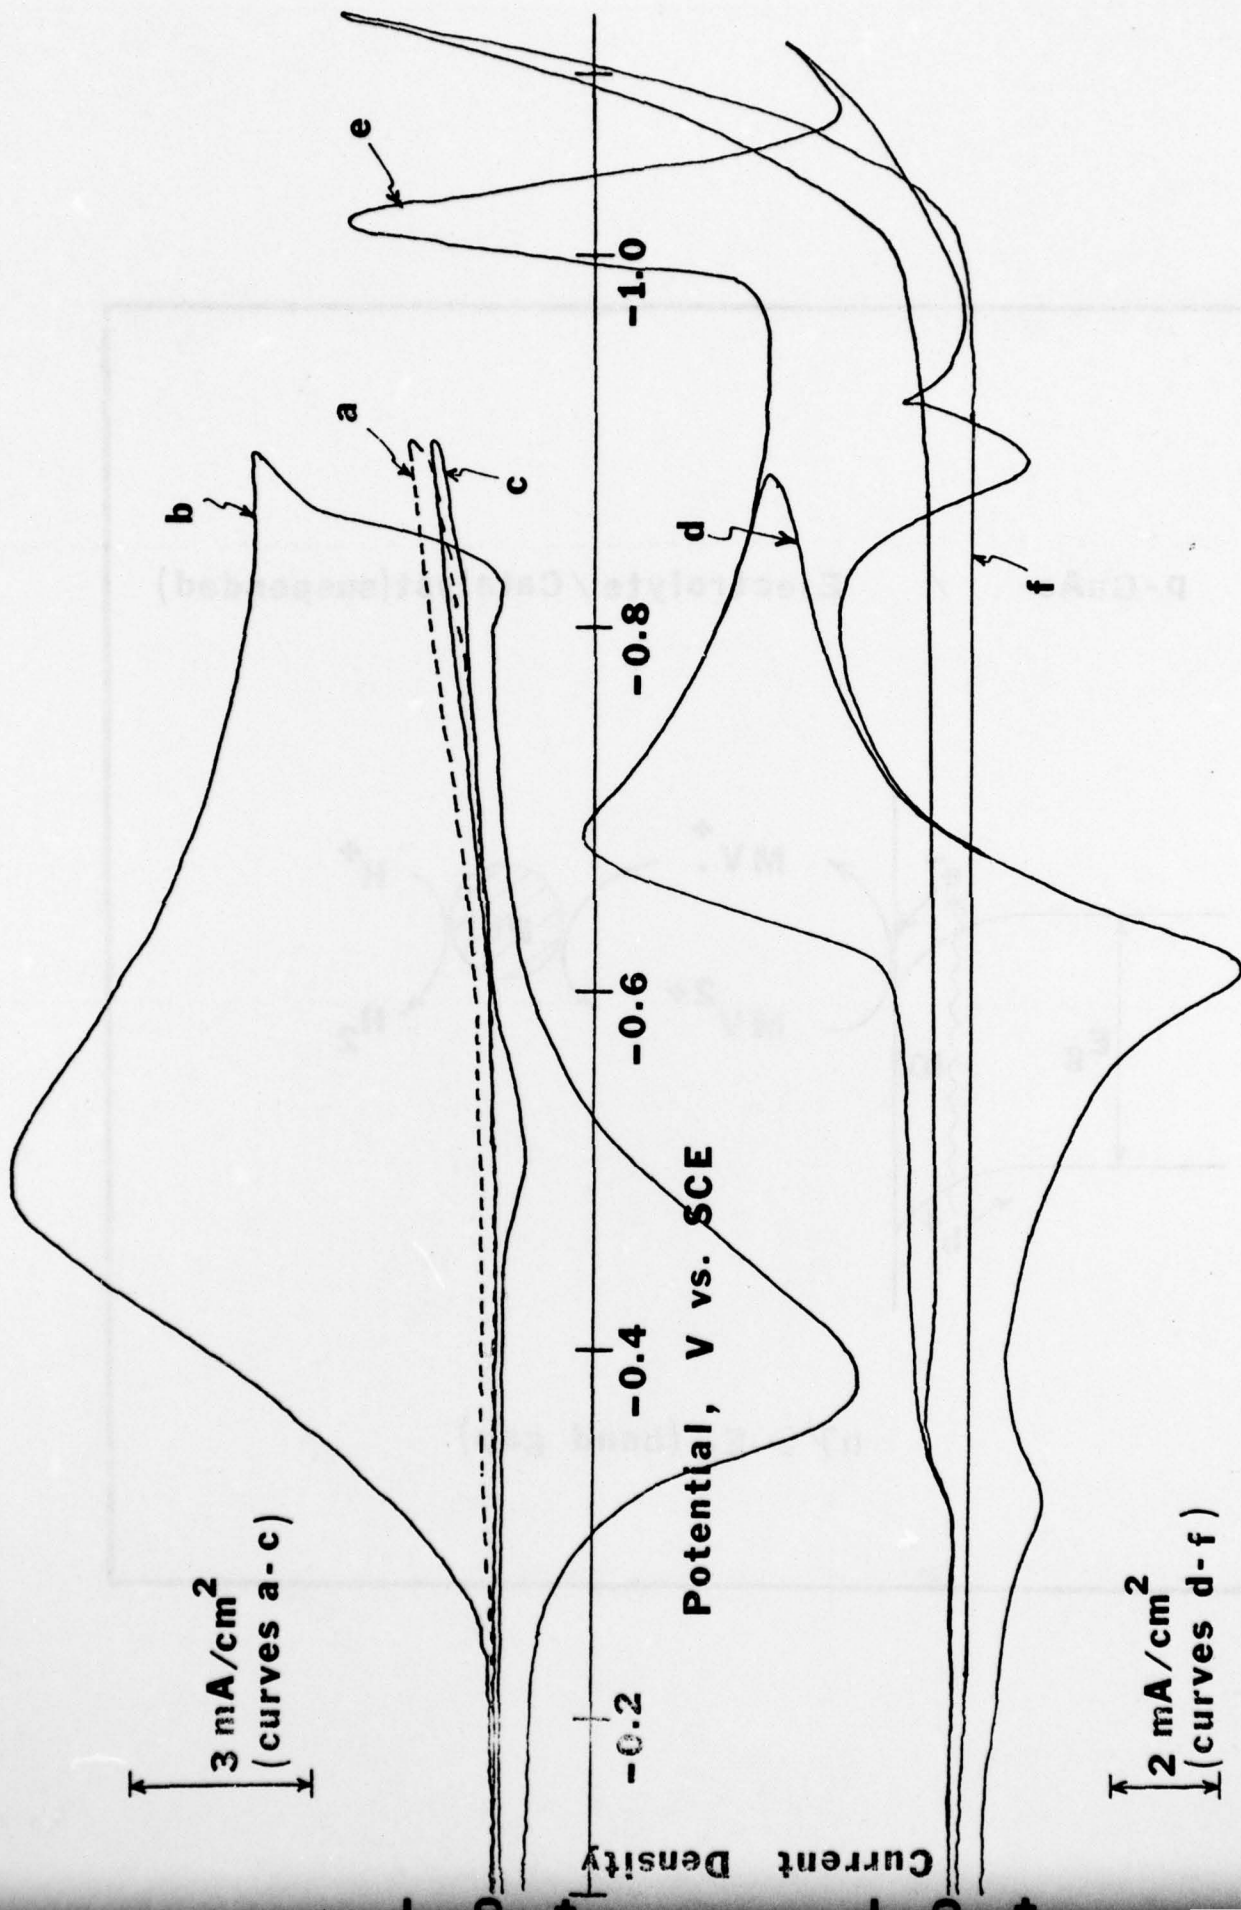

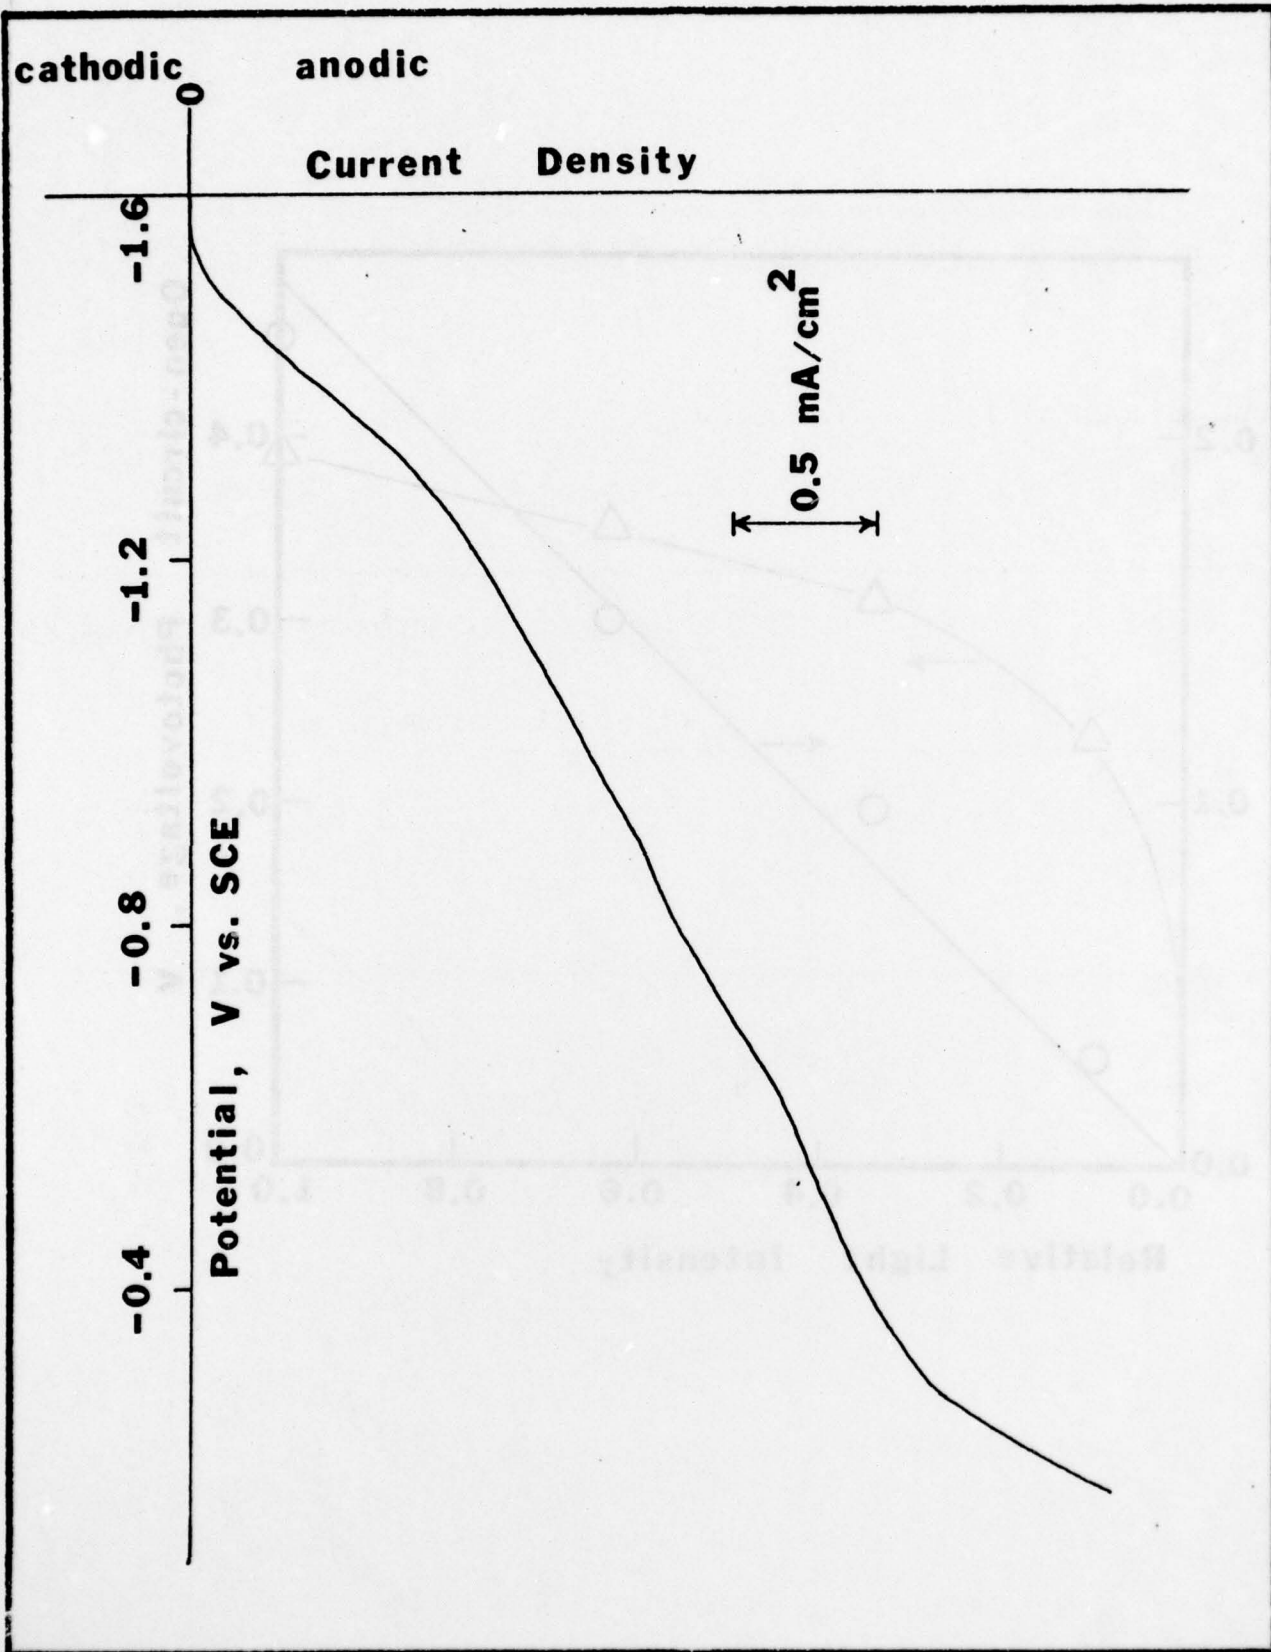

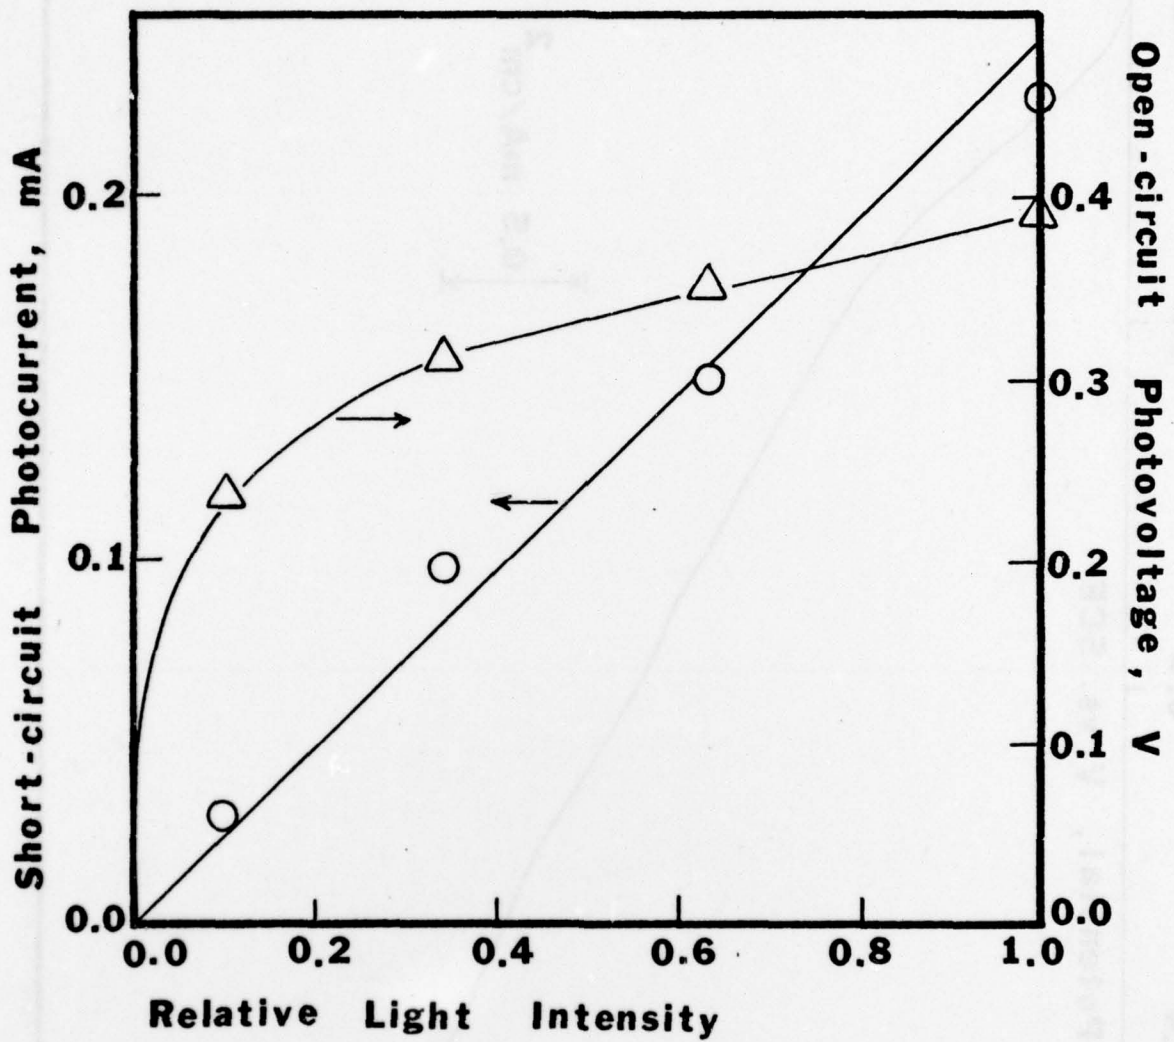

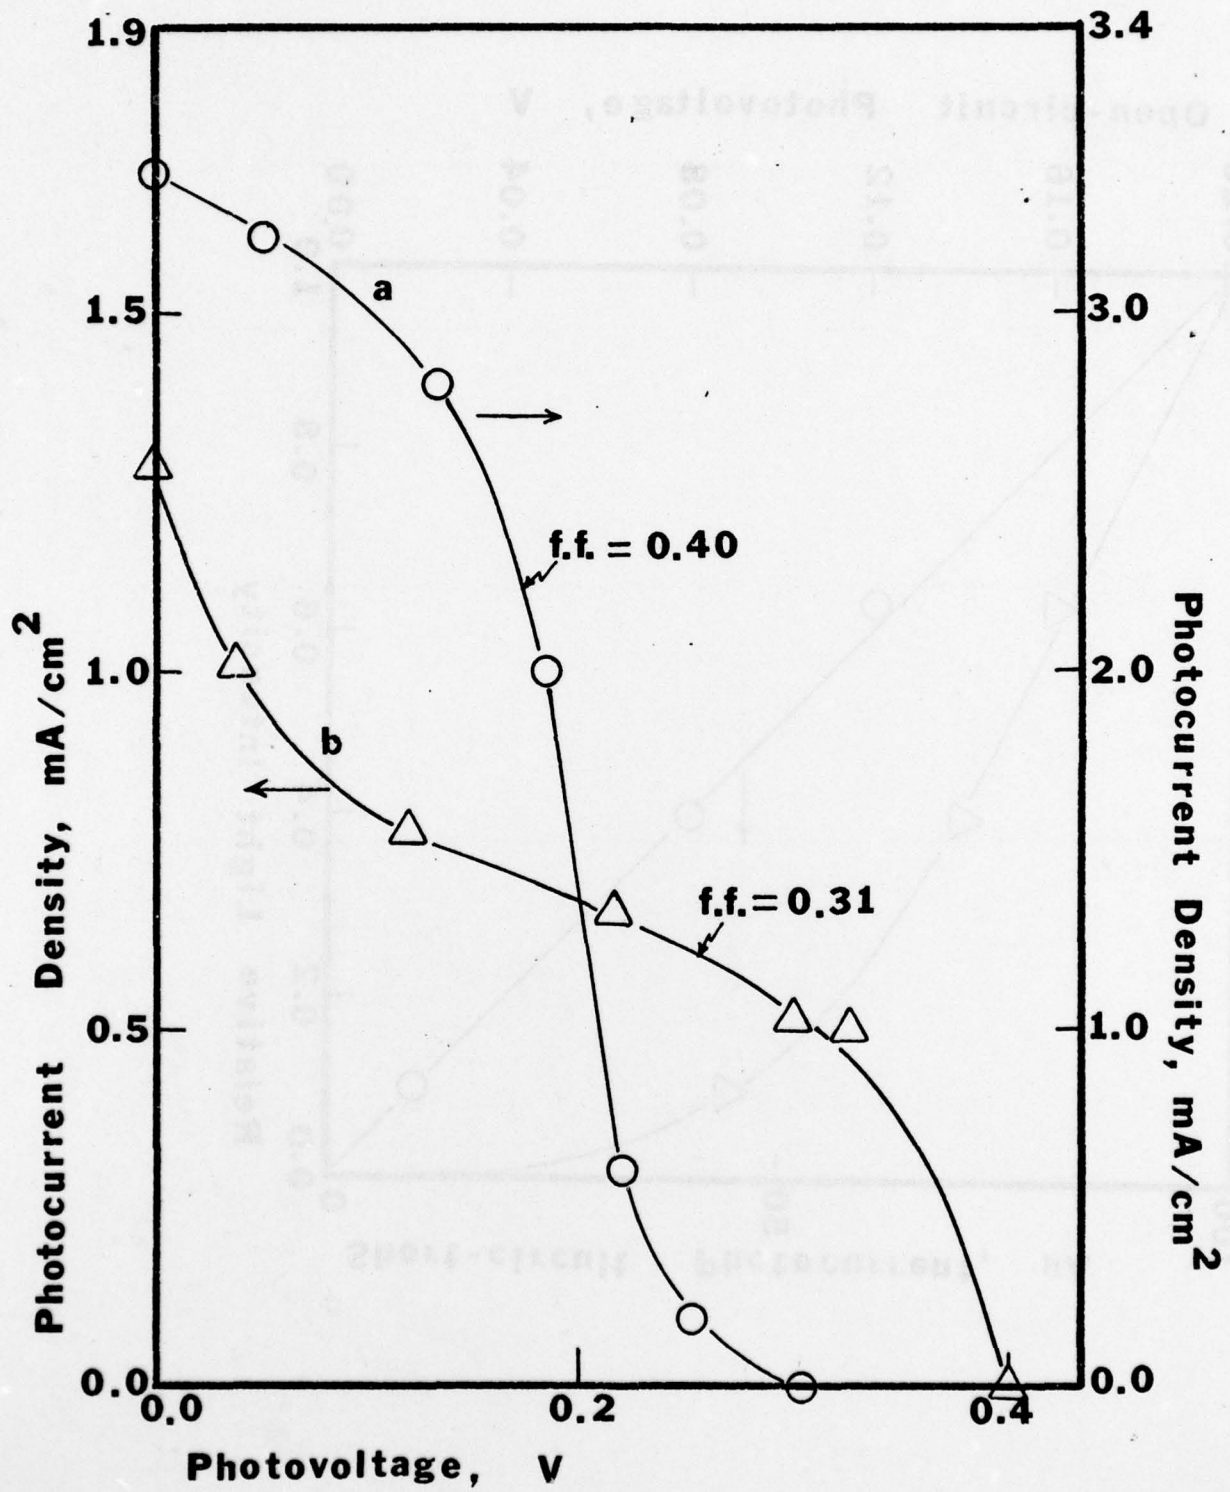

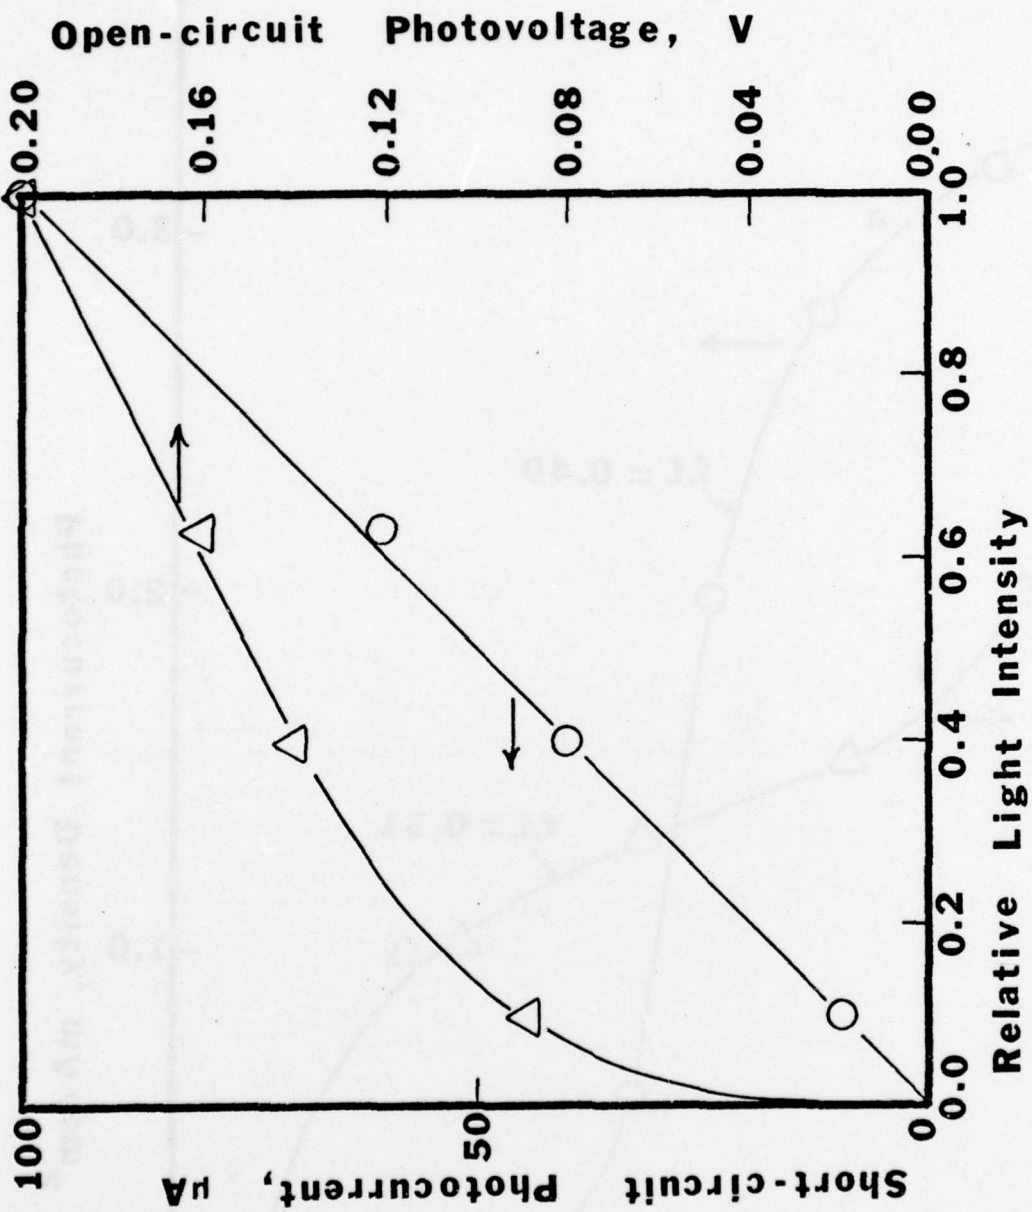

TECHNICAL REPORT DISTRIBUTION LIST, GEN

	<u>No.</u> <u>Copies</u>		<u>No.</u> <u>Copies</u>
Office of Naval Research 800 North Quincy Street Arlington, Virginia 22217 Attn: Code 472	2	Defense Documentation Center Building 5, Cameron Station Alexandria, Virginia 22314	12
ONR Branch Office 536 S. Clark Street Chicago, Illinois 60605 Attn: Dr. George Sandoz	1	U.S. Army Research Office P.O. Box 1211 Research Triangle Park, N.C. 27709 Attn: CRD-AA-IP	1
ONR Branch Office 715 Broadway New York, New York 10003 Attn: Scientific Dept.	1	Naval Ocean Systems Center San Diego, California 92152 Attn: Mr. Joe McCartney	1
ONR Branch Office 1030 East Green Street Pasadena, California 91106 Attn: Dr. R. J. Marcus	1	Naval Weapons Center China Lake, California 93555 Attn: Dr. A. B. Amster Chemistry Division	1
ONR Area Office One Hallidie Plaza, Suite 601 San Francisco, California 94102 Attn: Dr. P. A. Miller	1	Naval Civil Engineering Laboratory Port Hueneme, California 93401 Attn: Dr. R. W. Drisko	1
ONR Branch Office Building 114, Section D 666 Summer Street Boston, Massachusetts 02210 Attn: Dr. L. H. Peebles	1	Professor K. E. Woehler Department of Physics & Chemistry Naval Postgraduate School Monterey, California 93940	1
Director, Naval Research Laboratory Washington, D.C. 20390 Attn: Code 6100	1	Dr. A. L. Slafkosky Scientific Advisor Commandant of the Marine Corps (Code RD-1) Washington, D.C. 20380	1
The Assistant Secretary of the Navy (R,E&S) Department of the Navy Room 4E736, Pentagon Washington, D.C. 20350	1	Office of Naval Research 800 N. Quincy Street Arlington, Virginia 22217 Attn: Dr. Richard S. Miller	1
Commander, Naval Air Systems Command Department of the Navy Washington, D.C. 20360 Attn: Code 310C (H. Rosenwasser)	1	Naval Ship Research and Development Center Annapolis, Maryland 21401 Attn: Dr. G. Bosmajian Applied Chemistry Division	1
		Naval Ocean Systems Center San Diego, California 91232 Attn: Dr. S. Yamamoto, Marine Sciences Division	1


*Encl 1*

TECHNICAL REPORT DISTRIBUTION LIST, 359

	<u>No.</u> <u>Copies</u>		<u>No.</u> <u>Copies</u>
Dr. Paul Delahay New York University Department of Chemistry New York, New York 10003	1	Library P. R. Mallory and Company, Inc. Northwest Industrial Park Burlington, Massachusetts 01803	1
Dr. R. A. Osteryoung Colorado State University Department of Chemistry Fort Collins, Colorado 80521	1	Dr. P. J. Hendra University of Southampton Department of Chemistry Southampton SO9 5NH United Kingdom	1
Dr. E. Yeager Case Western Reserve University Department of Chemistry Cleveland, Ohio 41106	1	Dr. Sam Perone Purdue University Department of Chemistry West Lafayette, Indiana 47907	1
Dr. D. N. Bennion University of California Chemical Engineering Department Los Angeles, California 90024	1	Dr. Royce W. Murray University of North Carolina Department of Chemistry Chapel Hill, North Carolina 27514	1
Dr. R. A. Marcus California Institute of Technology Department of Chemistry Pasadena, California 91125	1	Naval Ocean Systems Center San Diego, California 92152 Attn: Technical Library	1
Dr. J. J. Auburn Bell Laboratories Murray Hill, New Jersey 07974	1	Dr. J. H. Ambrus The Electrochemistry Branch Materials Division, Research & Technology Department Naval Surface Weapons Center White Oak Laboratory Silver Spring, Maryland 20910	1
Dr. Adam Heller Bell Telephone Laboratories Murray Hill, New Jersey 07974	1	Dr. G. Goodman Globe-Union Incorporated 5757 North Green Bay Avenue Milwaukee, Wisconsin 53201	1
Dr. T. Katan Lockheed Missiles & Space Co, Inc. P.O. Box 504 Sunnyvale, California 94088	1	Dr. J. Boechler Electrochimica Corporation Attention: Technical Library 2485 Charleston Road Mountain View, California 94040	1
Dr. Joseph Singer, Code 302-1 NASA-Lewis 21000 Brookpark Road Cleveland, Ohio 44135	1	Dr. P. P. Schmidt Oakland University Department of Chemistry Rochester, Michigan 48063	1
Dr. E. Brummer EIC Incorporated Five Lee Street Cambridge, Massachusetts 02139	1		

TECHNICAL REPORT DISTRIBUTION LIST, 359

	<u>No.</u>
	<u>Copies</u>
H. Richtol istry Department selaer Polytechnic Institute , New York 12181	1
A. B. Ellis istry Department ersity of Wisconsin son, Wisconsin 53706	1
M. Wrighton istry Department achusetts Institute of Technology ridge, Massachusetts 02139	1
y E. Plew l Weapons Support Center 3073, Building 2906 e, Indiana 47522	1
tuby (STOR) E Street ington, D.C. 20545	1
Aaron Wold n University artment of Chemistry vidence, Rhode Island 02192	1
R. C. Chudacek aw-Edison Company on Battery Division Office Box 28 mfield, New Jersey 07003	1
<del>A. J. Bard ersity of Texas artment of Chemistry h, Texas 78712</del>	<del>1</del>
M. M. Nicholson ronics Research Center well International Miraloma Avenue eim, California 92803	1
M. G. Sceats ersity of Rochester artment of Chemistry ester, New York 14627	1

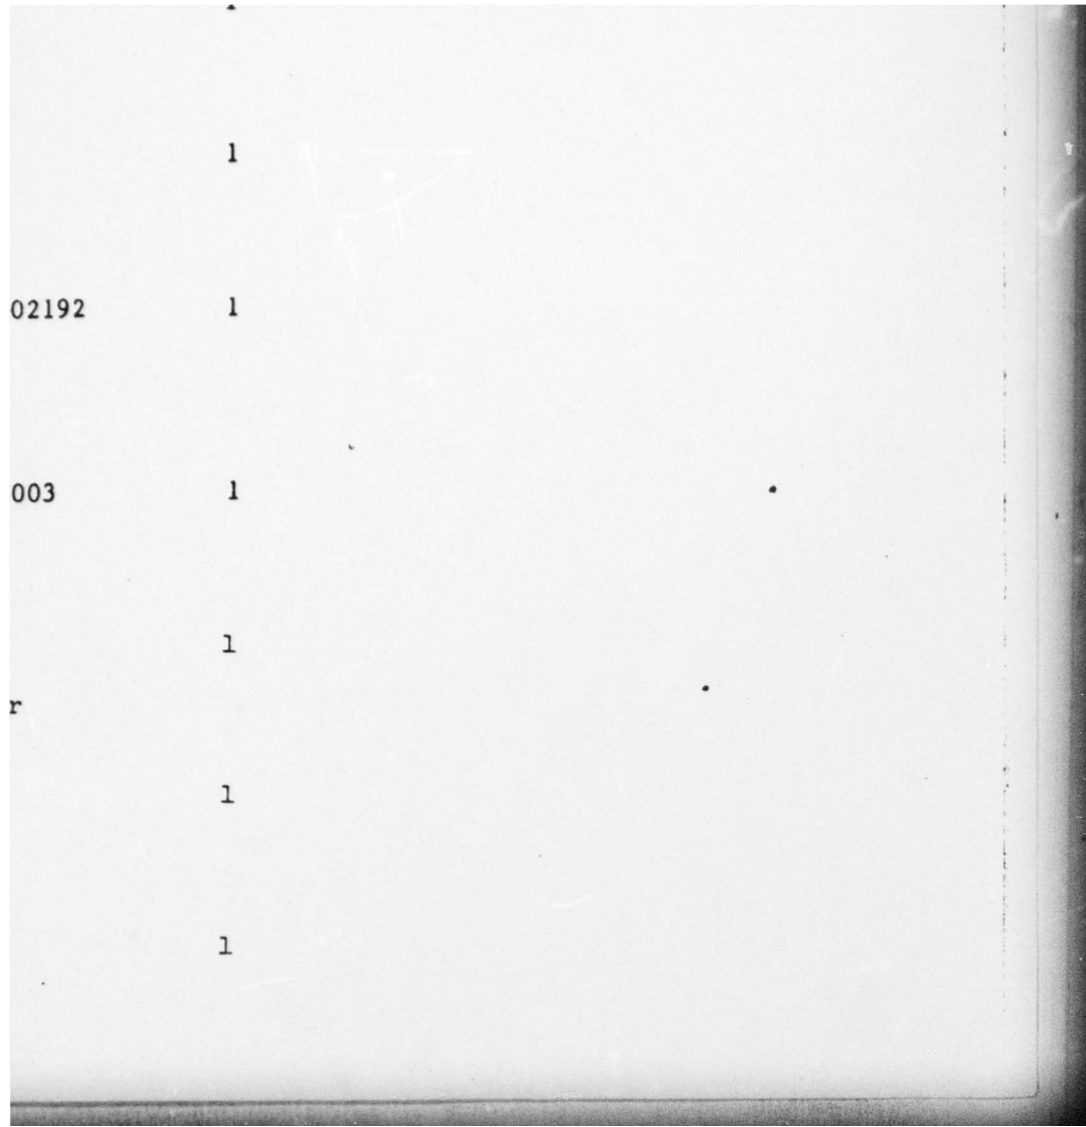

1

02192

1

003

1

1

r

1

1