

AD A 077 397

9

14

DRS MI

2

TECHNICAL REPORT T-CR-77-5

6

THEORETICAL ANALYSIS OF THE
FLOW FIELD OVER A FAMILY OF
OGIVE BODIES - VOLUME II

LEVEL 4

10

R. L. Richardson

B. Z. Jenkins

Technology Laboratory

11

20 August 1979

1258

DDC
RECEIVED
NOV 29 1979
A



U.S. ARMY MISSILE COMMAND

Redstone Arsenal, Alabama 35809

DDC FILE COPY

Approved for Public Release; Distribution unlimited.

393 427

79 11 27 020/B

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER T-CR-77-5	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) THEORETICAL ANALYSIS OF THE FLOW FIELD OVER A FAMILY OF OGIVE BODIES- VOLUME II		5. TYPE OF REPORT & PERIOD COVERED Technical Report
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) R.L. Richardson B.Z. Jenkins		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Commander US Army Missile Command ATTN: DRSMI-TDK (R&D) Redstone Arsenal, Alabama 35809		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS DA AMCMS
11. CONTROLLING OFFICE NAME AND ADDRESS Commander US Army Missile Command ATTN: DRSMI-TI (R&D) Redstone Arsenal, Alabama 35809		12. REPORT DATE 20 August 1979
		13. NUMBER OF PAGES 57
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES (2 deg)		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Tangent ogive bodies Center of pressure Angle -of - attack Analytical methods Pitching moment coefficient Spherically blunted ogives Normal force coefficient Pointed tangent ogive bodies		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) ➤ Local normal force distributions are presented for pointed tangent ogive bodies and spherically blunted tangent ogive bodies at free stream Mach numbers of 2 to 4.5 at 20° angle-of-attack. Also, total or integrated values of normal force coefficients, pitching moment coefficients, and centers of pressure are given for all body shapes as a function of free stream Mach number for the same angle of attack. These data were obtained using the US Army Missile Command three-dimensional method of characteristics computer code. This volume is intended as a second volume to MIRADCOM technical		

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

Report TD-CR-77-5, published August 1977.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

CONTENTS

<u>Section</u>	<u>Page</u>
1. Introduction.....	7
2. Discussion.....	7
3. References.....	47
4. Symbols.....	49

Processed For	
BIBL. CRASH	☒
DOC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Availand/or special
A	

ILLUSTRATIONS

<u>Figure</u>	<u>Page</u>
1. Local Normal Force Coefficient Versus Axial Direction (BS = 3, 6, 9, 12, 16; M = 2; L/D = 2) at $\alpha = 2$	9
2. Local Normal Force Coefficient Versus Axial Direction (BS = 3, 6, 9, 12, 16; M = 2.5; L/D = 2) at $\alpha = 2$	10
3. Local Normal Force Coefficient Versus Axial Direction (BS = 3, 6, 9, 12, 16; M = 3; L/D = 2) at $\alpha = 2$	11
4. Local Normal Force Coefficient Versus Axial Direction (BS = 3, 6, 9, 12, 16; M = 3.5; L/D = 2) at $\alpha = 2$	12
5. Local Normal Force Coefficient Versus Axial Direction (BS = 3, 6, 9, 12, 16; M = 4; L/D = 2) at $\alpha = 2$	13
6. Local Normal Force Coefficient Versus Axial Direction (BS = 3, 6, 9, 12, 16; M = 4.5; L/D = 2) at $\alpha = 2$	14
7. Local Normal Force Coefficient Versus Axial Direction (BS = 2, 5, 8, 11, 15; M = 2; L/D = 3) at $\alpha = 2$	15
8. Local Normal Force Coefficient Versus Axial Direction (BS = 2, 5, 8, 11, 15; M = 2.5; L/D = 3) at $\alpha = 2$	16
9. Local Normal Force Coefficient Versus Axial Direction (BS = 2, 5, 8, 11, 15; M = 3; L/D = 3) at $\alpha = 2$	17

ILLUSTRATIONS

<u>Figure</u>	<u>Page</u>
10. Local Normal Force Coefficient Versus Axial Direction (BS = 2, 5, 8, 11, 15; M = 3.5; L/D = 3) at $\alpha = 2$	18
11. Local Normal Force Coefficient Versus Axial Direction (BS = 2, 5, 8, 11, 15; M = 4; L/D = 3) at $\alpha = 2$	19
12. Local Normal Force Coefficient Versus Axial Direction (BS = 2, 5, 8, 11, 15; M = 4.5; L/D = 3) at $\alpha = 2$	20
13. Local Normal Force Coefficient Versus Axial Direction (BS = 1, 4, 7, 10, 14; M = 2; L/D = 4) at $\alpha = 2$	21
14. Local Normal Force Coefficient Versus Axial Direction (BS = 1, 4, 7, 10, 14; M = 2.5; L/D = 4) at $\alpha = 2$	22
15. Local Normal Force Coefficient Versus Axial Direction (BS = 1, 4, 7, 10, 14; M = 3; L/D = 4) at $\alpha = 2$	23
16. Local Normal Force Coefficient Versus Axial Direction (BS = 1, 4, 7, 10, 14; M = 3.5; L/D = 4) at $\alpha = 2$	24
17. Local Normal Force Coefficient Versus Axial Direction (BS = 1, 4, 7, 10, 14; M = 4; L/D = 4) at $\alpha = 2$	25
18. Local Normal Force Coefficient Versus Axial Direction (BS = 1, 4, 7, 10, 14; M = 4.5; L/D = 4) at $\alpha = 2$	26
19. Local Normal Force Coefficient Versus Axial Direction (BS = 13; M = 2, 2.5, 3, 3.5, 4, 4.5; L/D = .5).....	27
20. Integrated Normal Force Coefficient Versus Free Stream Mach Number (BS = 1, 2, 3) at $\alpha = 2$	28

ILLUSTRATIONS

<u>Figures</u>	<u>Page</u>
21. Integrated Normal Force Coefficient Versus Free Stream Mach Number (BS = 4, 5, 6) at $\alpha = 2$	29
22. Integrated Normal Force Coefficient Versus Free Stream Mach Number (BS = 7, 8, 9) at $\alpha = 2$	30
23. Integrated Normal Force Coefficient Versus Free Stream Mach Number (BS = 10, 11, 12) at $\alpha = 2$	31
24. Integrated Normal Force Coefficient Versus Free Stream Mach Number (BS = 13) at $\alpha = 2$	32
25. Integrated Pitching Moment Coefficient Versus Free Stream Mach Number (BS = 1, 2, 3) at $\alpha = 2$	33
26. Integrated Pitching Moment Coefficient Versus Free Stream Mach Number (BS = 4, 5, 6) at $\alpha = 2$	34
27. Integrated Pitching Moment Coefficient Versus Free Stream Mach Number (BS = 7, 8, 9) at $\alpha = 2$	35
28. Integrated Pitching Moment Coefficient Versus Free Stream Mach Number (BS = 10, 11, 12) at $\alpha = 2$	36
29. Integrated Pitching Moment Coefficient Versus Free Stream Mach Number (BS = 13) at $\alpha = 2$	37
30. Center of Pressure Versus Free Stream Mach Number (BS = 1, 2, 3) at $\alpha = 2$	38
31. Center of Pressure Versus Free Stream Mach Number of (BS = 4, 5, 6) at $\alpha = 2$	39

ILLUSTRATIONS (Concluded)

<u>Figures</u>	<u>Page</u>
32. Center of Pressure Versus Free Stream Mach Number (BS = 7, 8, 9) at $\alpha = 2$	40
33. Center of Pressure Versus Free Stream Mach Number (BS = 10, 11, 12) at $\alpha = 2$	41
34. Center of Pressure Versus Free Stream Mach Number (BS = 13) at $\alpha = 2$	42
35. Integrated Normal Force Coefficient Versus Free Stream Mach Number (BS = 14, 15, 16) at $\alpha = 2$	43
36. Integrated Pitching Moment Coefficient Versus Free Stream Mach Number (BS = 14, 15, 16) at $\alpha = 2$	44
37. Center of Pressure Versus Free Stream Mach Number (BS = 14, 15, 16) at $\alpha = 2$	45

1. INTRODUCTION.

Reference 1 presents drag, surface pressure distribution, and surface Mach number distribution for a family of spherically blunted ogive forebodies for a range of fineness ratios and bluntnesses (including the sharp pointed bodies). Reference 1 also describes the analytical methods used to calculate the data. This report presents further data from the same analytical data base. Specifically, local normal force, total normal force coefficient, total pitching moment coefficient, and center of pressure are given for the supersonic ($M_\infty = 2$ to 4.5) angle of attack ($\alpha = 2^\circ$) cases.

Table 1 lists the configuration parameters for the forebodies included herein. (Reference 1 contained an additional body not included here.) Bluntness ratio is defined as the ratio of the radius of the nose sphere to the radius of the forebody base; fineness ratio as the ratio of the (truncated) length of the forebody to its diameter.

This report is limited to those supersonic cases for which the MICOM Three Dimensional Method of Characteristics Program can be applied providing accurate angle of attack data. Note that under these conditions there is no influence on the forebody flow from the afterbody.

2. DISCUSSION.

Local normal force coefficient, $dC_N/d(x/D)$, is presented in Figures 1 through 19. The hemispherical forebody (#13) is shown in Figure 19 for all free stream Mach numbers on a sliding origin graph for compactness.

Figures 20 through 34 depict integrated values of normal force, moment coefficient, and center of pressure as they vary with free stream Mach number for body shapes 1 through 13. The values of center of pressure are CM/CN . The radial displacement of the center of pressure has been calculated but is sufficiently small at two degrees angle of attack that inclusion in this report is not worthwhile. Figures 35 through 37 show similar data for the pointed forebodies. The values calculated using non-linear slender body potential theory for $M_\infty = 1$ also are indicated on these plots. This program is discussed in the original volume (Reference 1) and Reference 4.

TABLE I. LIST OF BODY SHAPES

BODY SHAPE	BLUNTNESS RATIO	FITNESS RATIO	R _N
1	.2	4	.1
2	.2	3	.1
3	.2	2	.1
4	.4	4	.2
5	.4	3	.2
6	.4	2	.2
7	.6	4	.3
8	.6	3	.3
9	.6	2	.3
10	.8	4	.4
11	.8	3	.4
12	.8	2	.4
13	1.0	.5	.4
14	0	4	0
15	0	3	0
16	0	2	0

MACH = 2.0 ALPHA = 2.0 L/D = 2.0

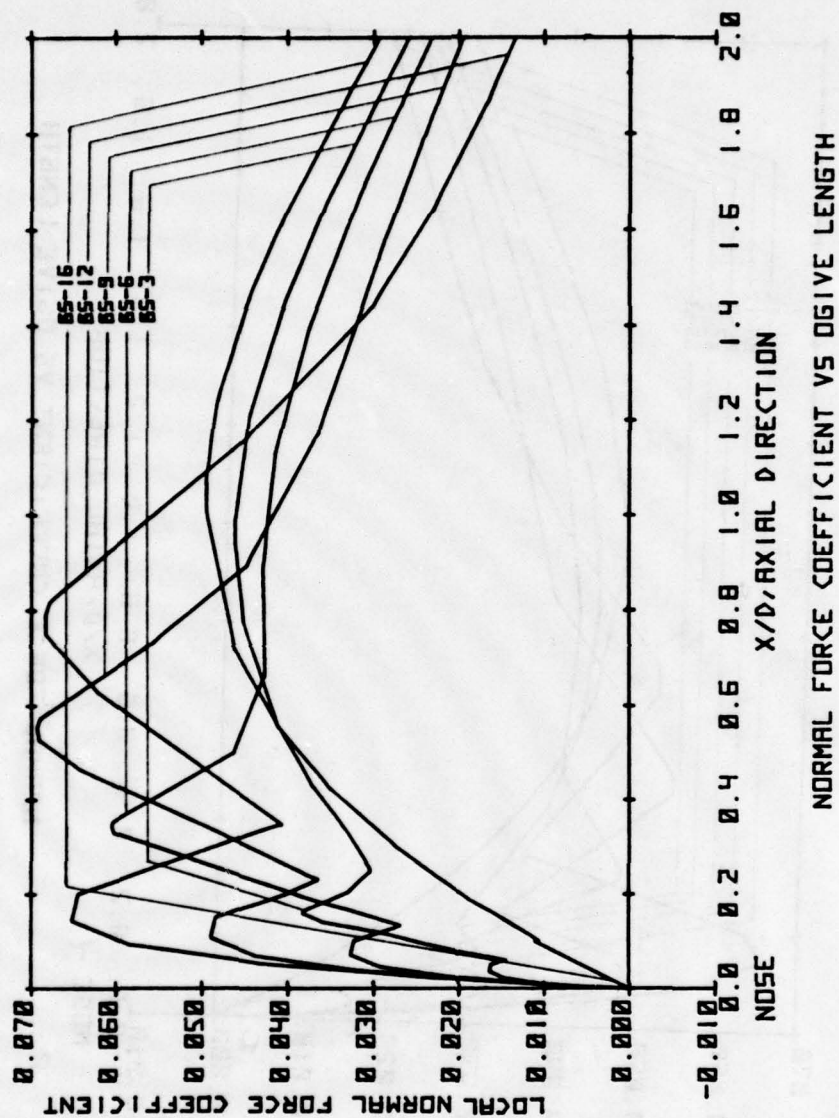


Figure 1. Local normal force coefficient versus axial direction (BS = 3, 6, 9, 12, 16; M = 2; L/D = 2) at $\alpha = 2^\circ$.

MACH = 2.5 ALPHA = 2.0 L/D = 2.0

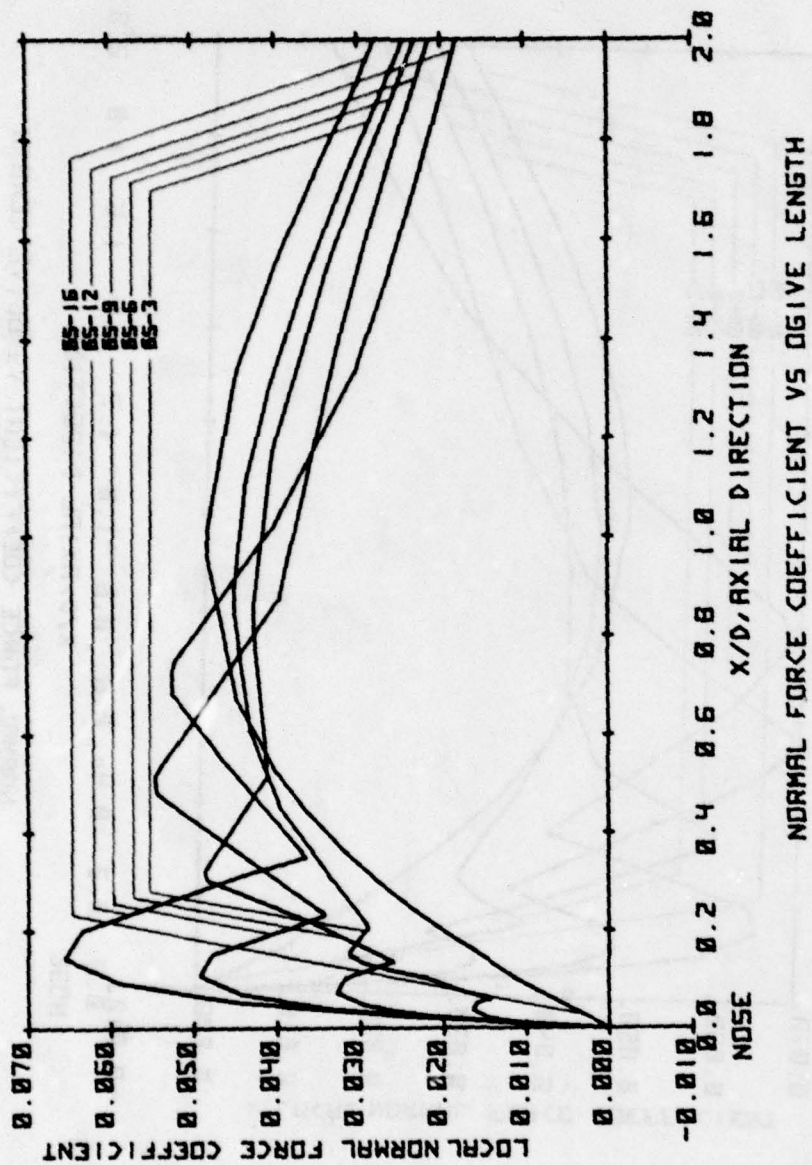


Figure 2. Local normal force coefficient versus axial direction (BS 3, 6, 9, 12, 16; $M = 2.5$; $L/D = 2$) at $\alpha = 2$.

MACH = 3.0 ALPHA = 2.0 L/D = 2.0

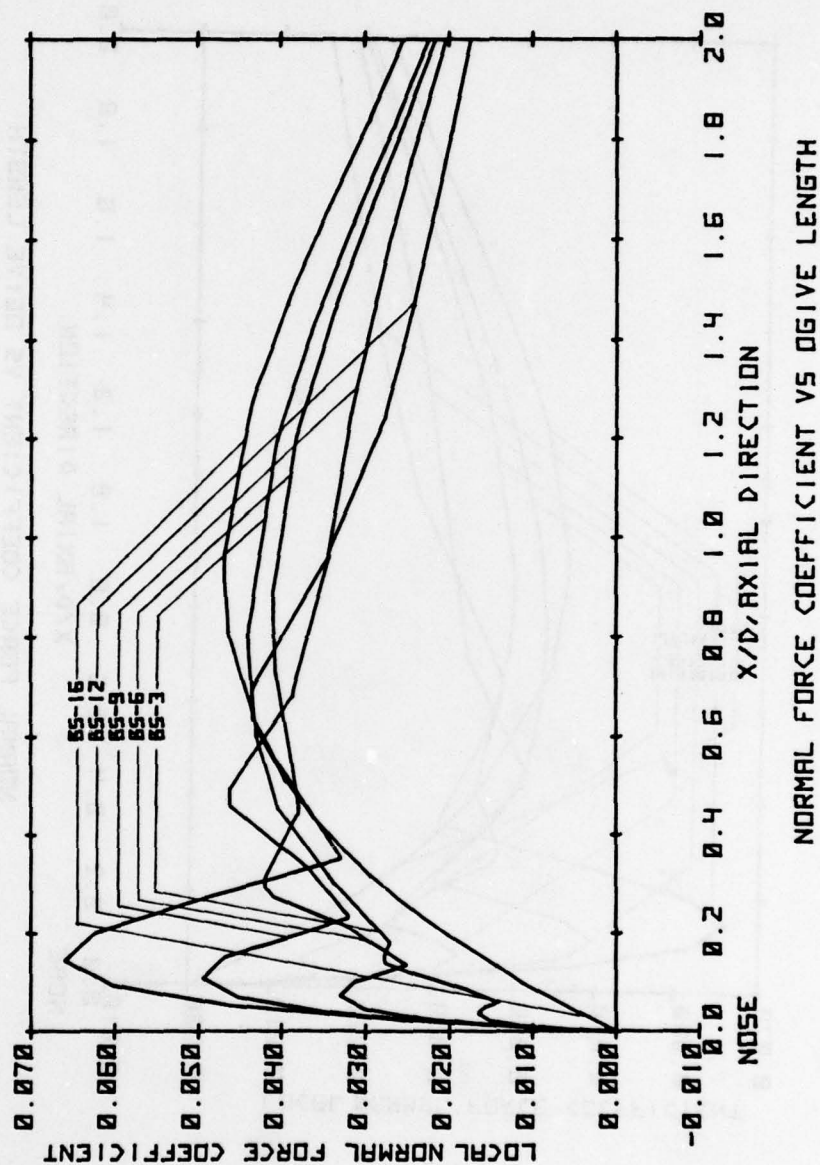


Figure 3. Local normal force coefficient versus axial direction (BS = 3, 6, 9, 12, 16; M = 3; L/D = 2) at $\alpha = 2$.

MACH = 3.5 ALPHA = 2.0 L/D = 2.0

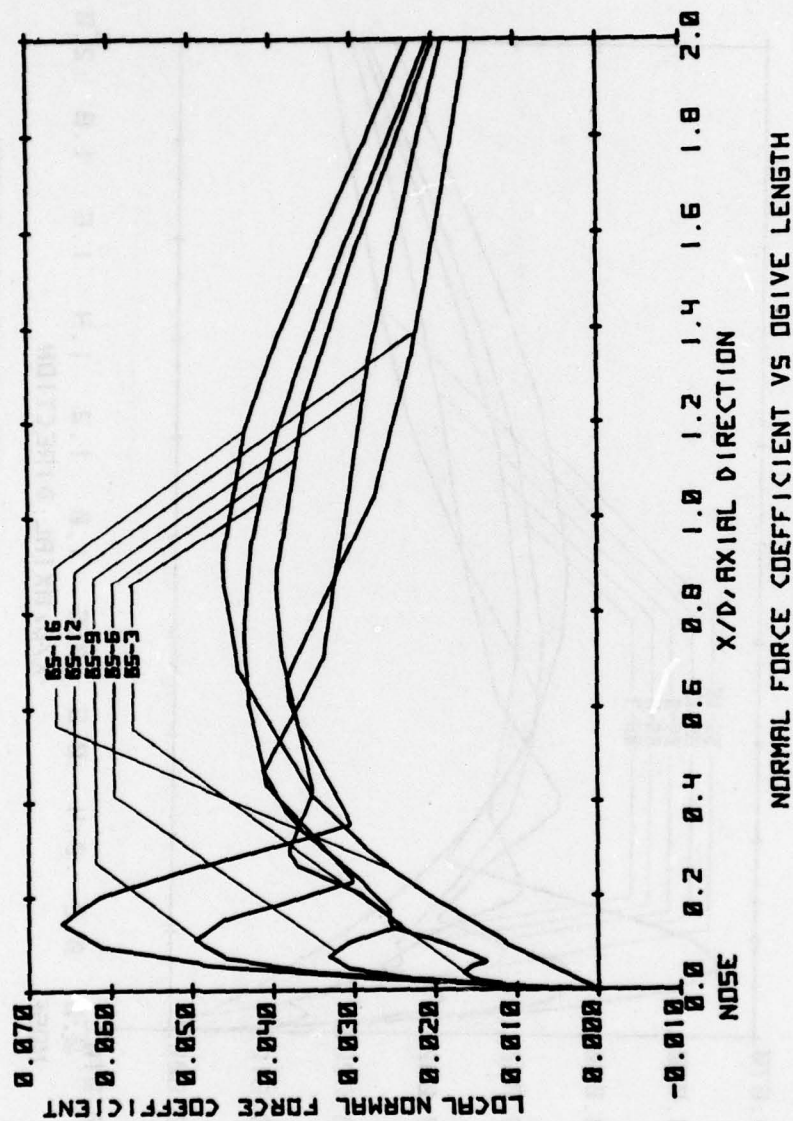


Figure 4. Local normal force coefficient versus axial direction (BS = 3, 6, 9, 12, 16; M = 3.5; L/D = 2) at $\alpha = 2$.

MACH = 4.0 ALPHA = 2.0 L/D = 2.0

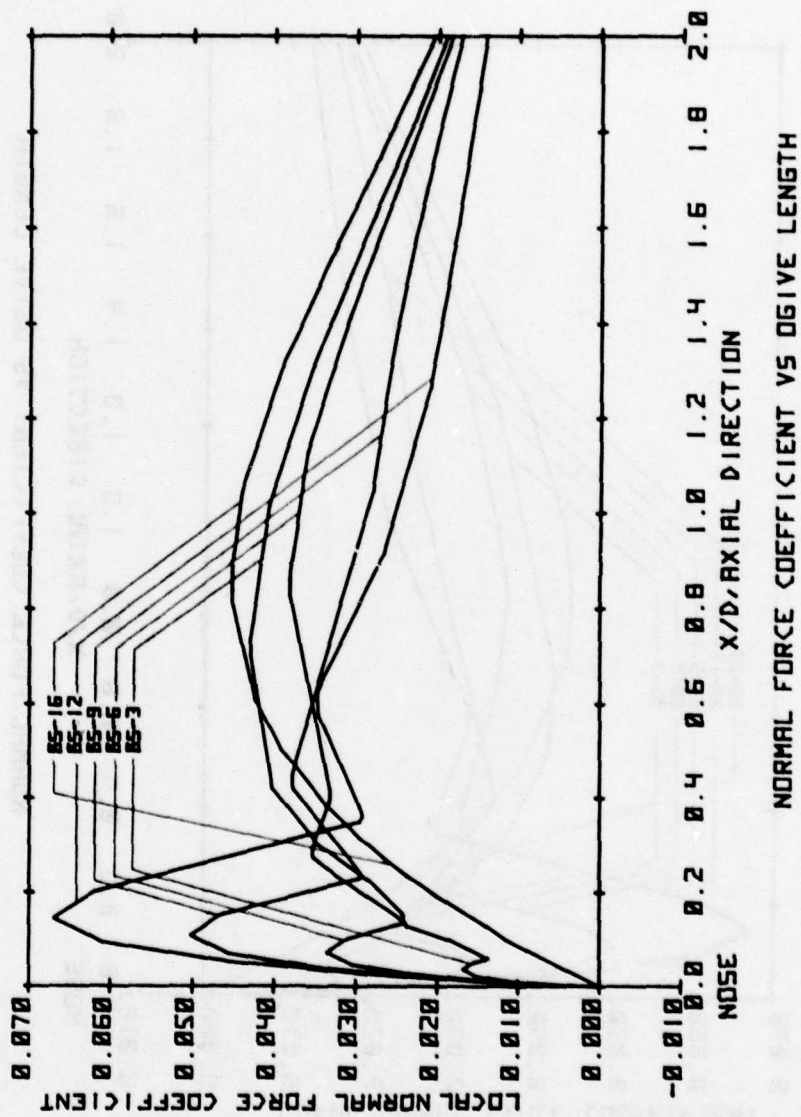


Figure 5. Local normal force coefficient versus axial direction (BS = 3, 6, 9, 12, 16; M = 4; L/D = 2) at $\alpha = 2^\circ$.

MACH = 4.5 ALPHA = 2.0 L/D = 2.0

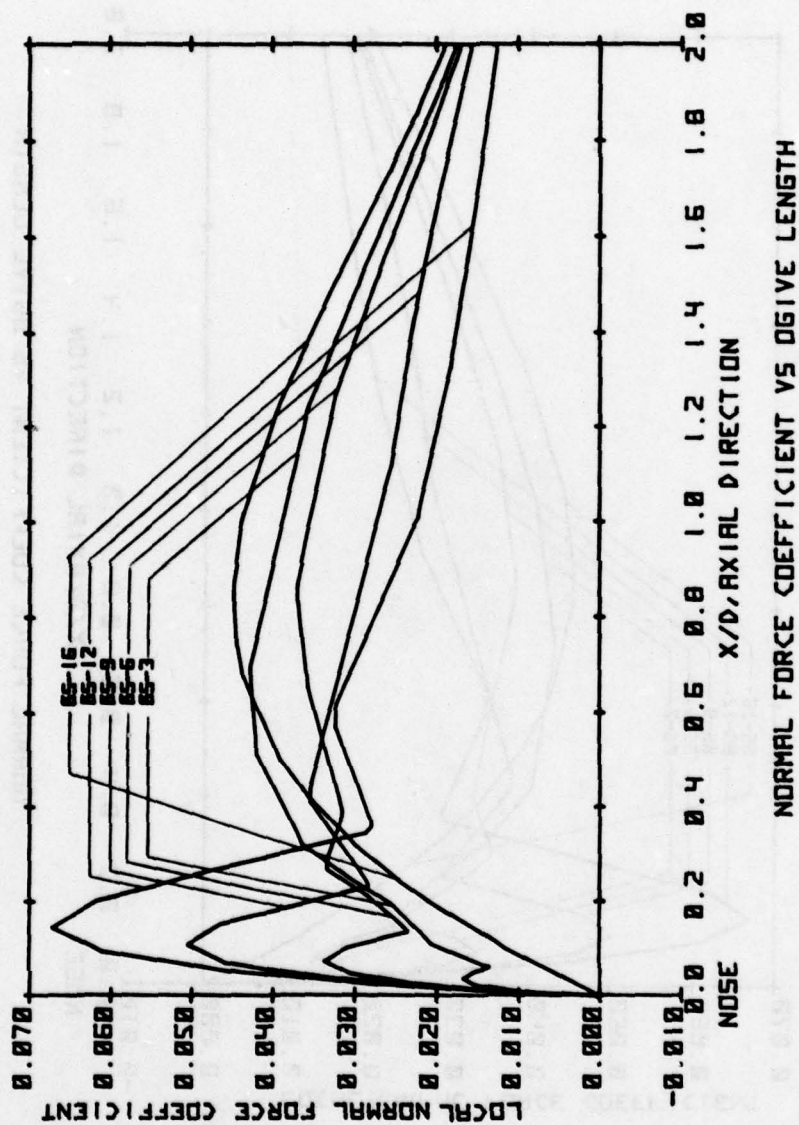


Figure 6. Local normal force coefficient versus axial direction (BS = 3, 6, 9, 12, 16; M = 4.5; L/D = 2) at $\alpha = 2^\circ$.

MACH = 2.0 ALPHA = 2.0 L/D = 3.0

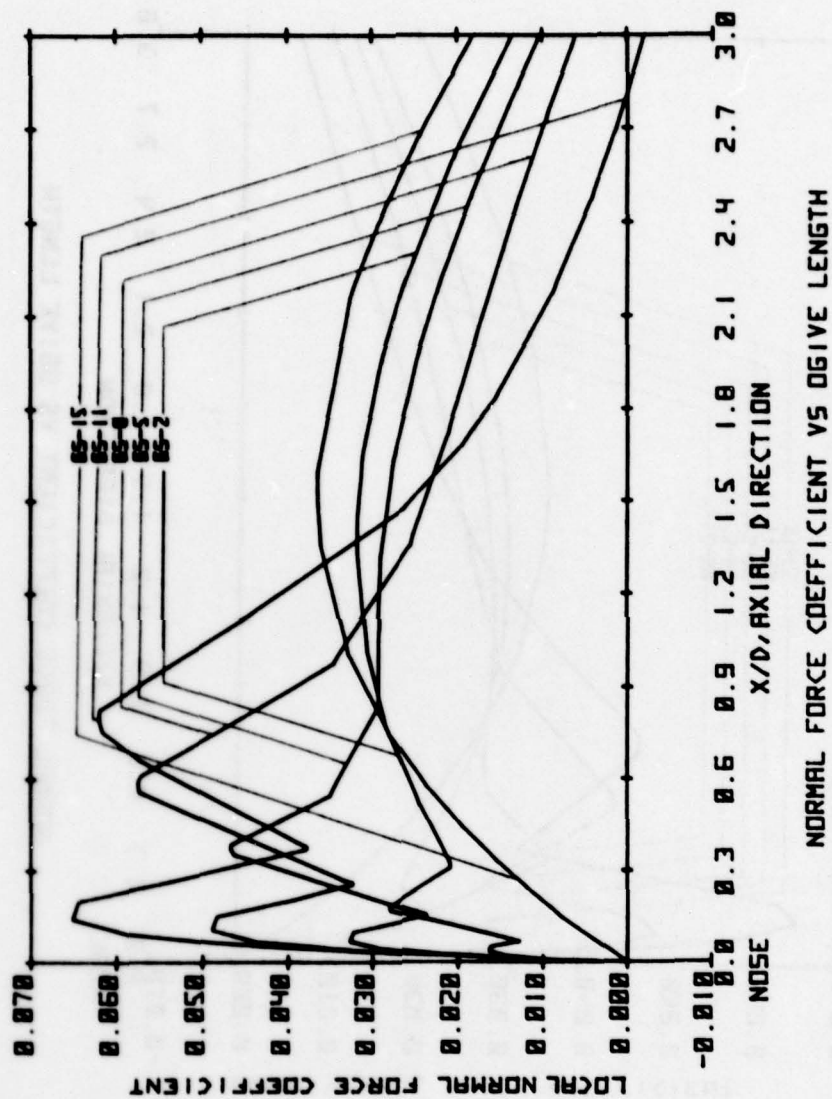


Figure 7. Local normal force coefficient versus axial direction (BS = 2, 5, 8, 11, 15; M = 2; L/D = 3) at $\alpha = 2^\circ$.

MACH = 2.5 ALPHA = 2.0 L/D = 3.0

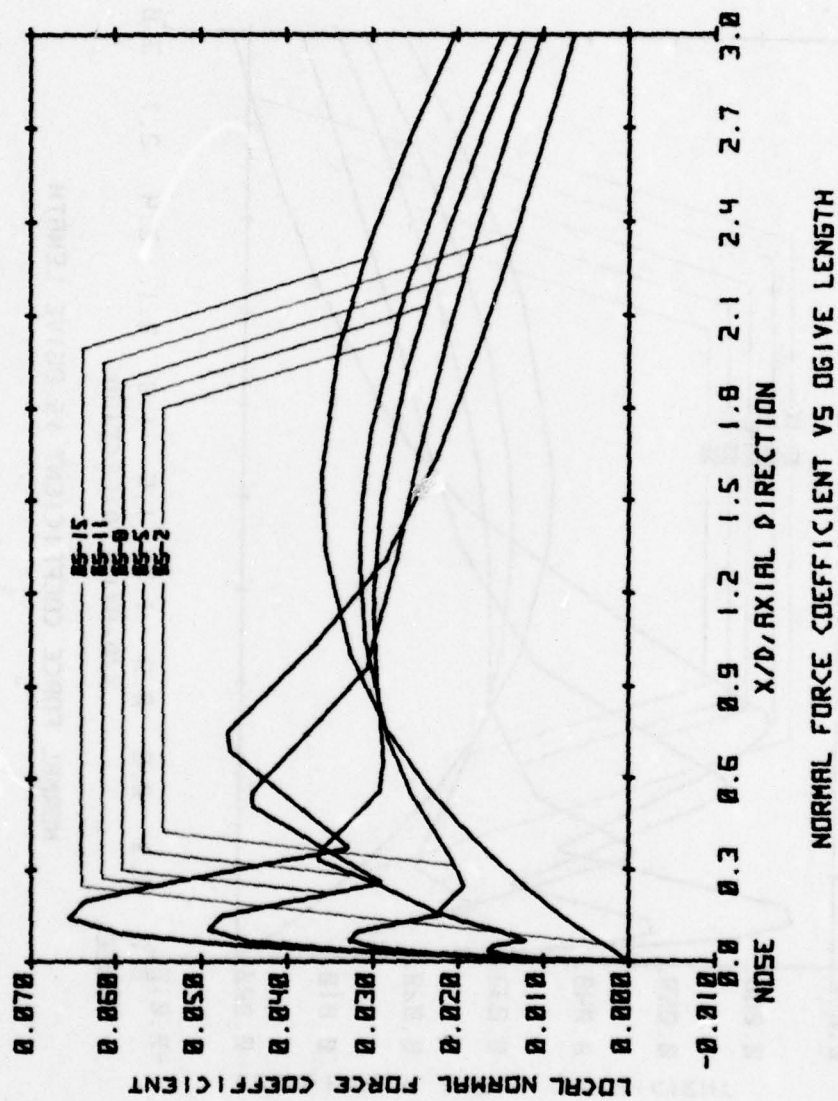


Figure 8. Local normal force coefficient versus axial direction (BS = 2, 5, 8, 11, 15; M = 2.5; L/D = 3) at $\alpha = 2$.

MACH = 3.0 ALPHA = 2.0 L/D = 3.0

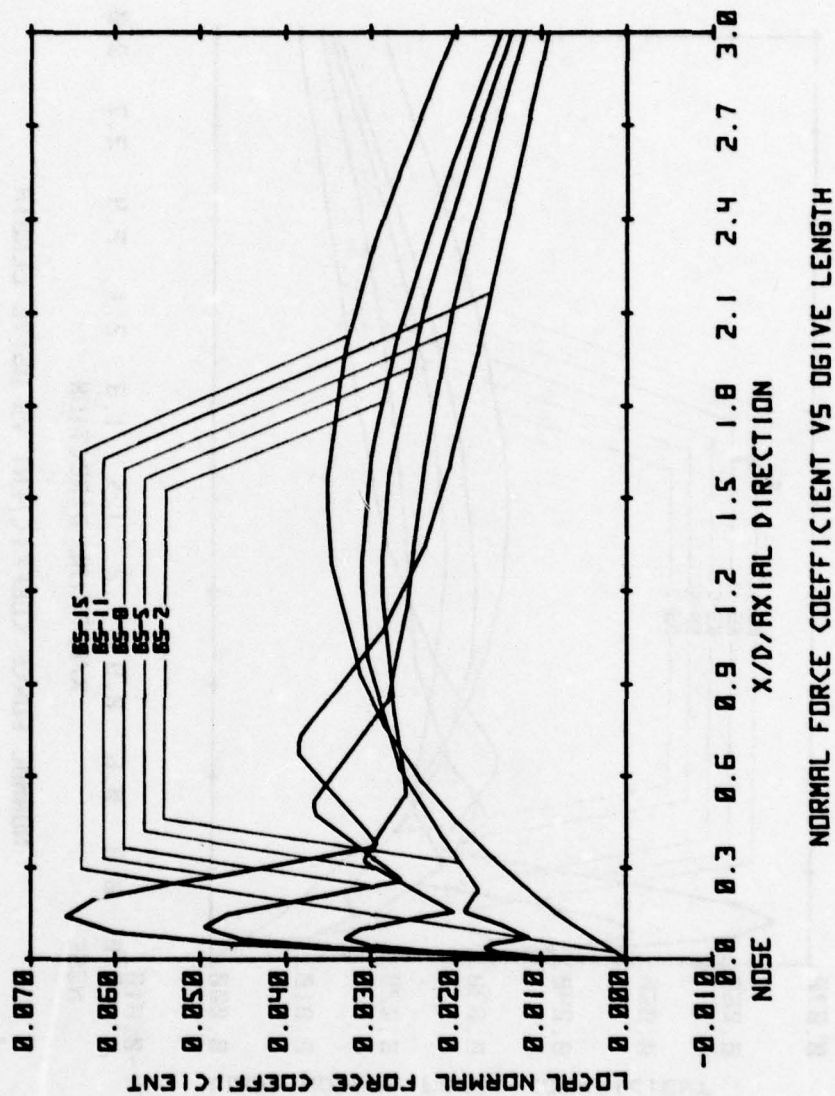


Figure 9. Local normal force coefficient versus axial direction (BS = 2, 5, 8, 11, 15; M = 3; L/D = 3) at $\alpha = 2$.

MACH = 3.5 ALPHA = 2.0 L/D = 3.0

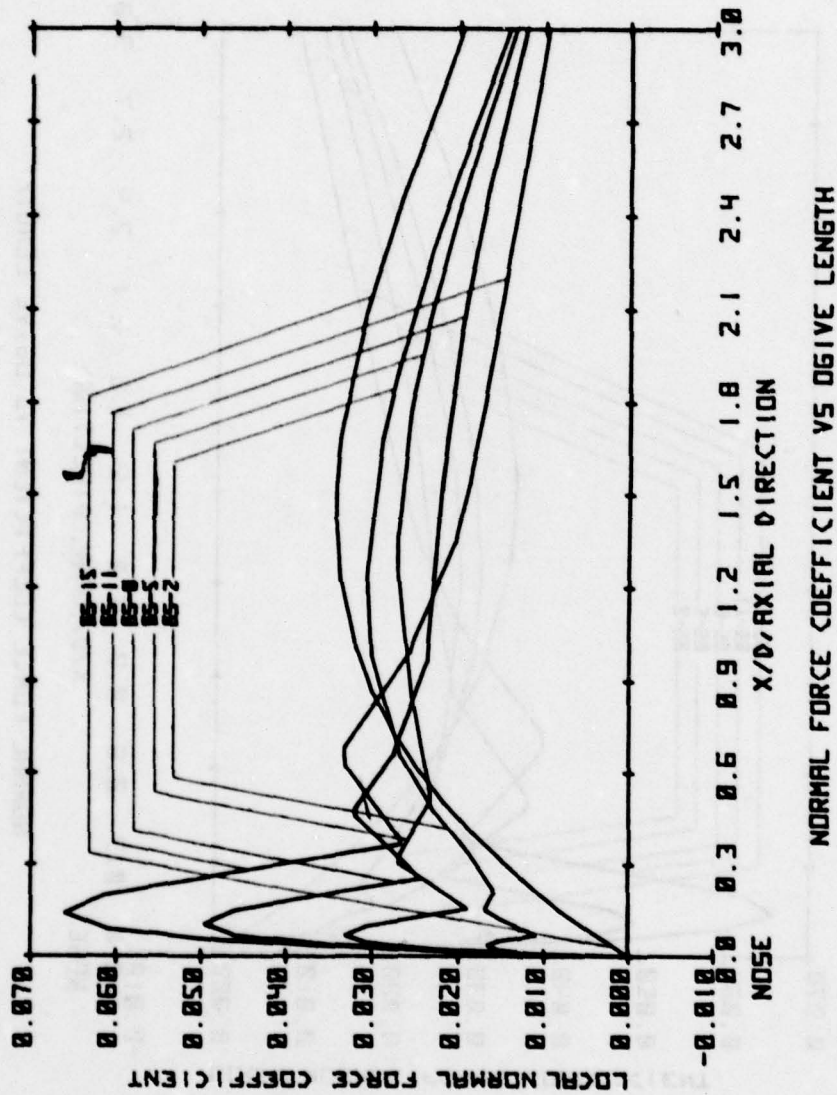


Figure 10. Local normal force coefficient versus axial direction (BS = 2, 5, 8, 11, 15; M = 3.5; L/D = 3) at $\alpha = 2$.

MACH = 4.0 ALPHA = 2.0 L/D = 3.0

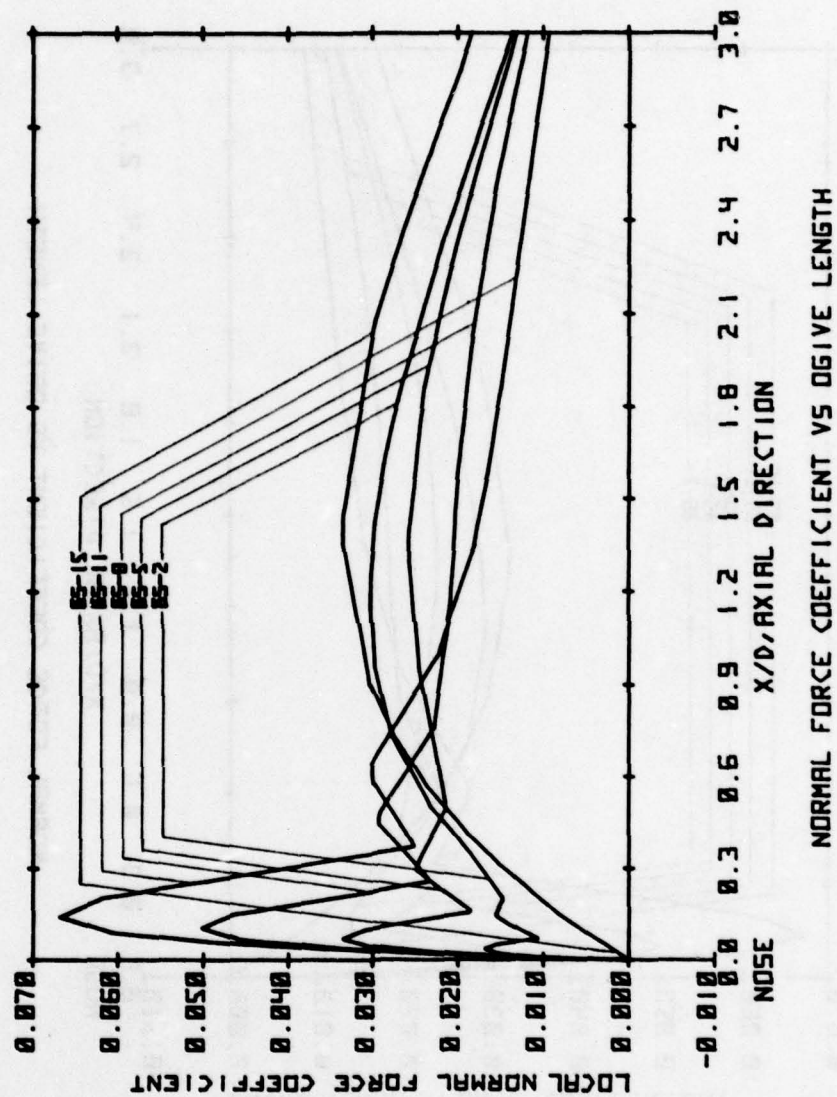


Figure 11. Local normal force coefficient versus axial direction (BS = 2, 5, 8, 11, 15; M = 4; L/D = 3) at $\alpha = 2^\circ$.

MACH = 4.5 ALPHA = 2.0 L/D = 3.0

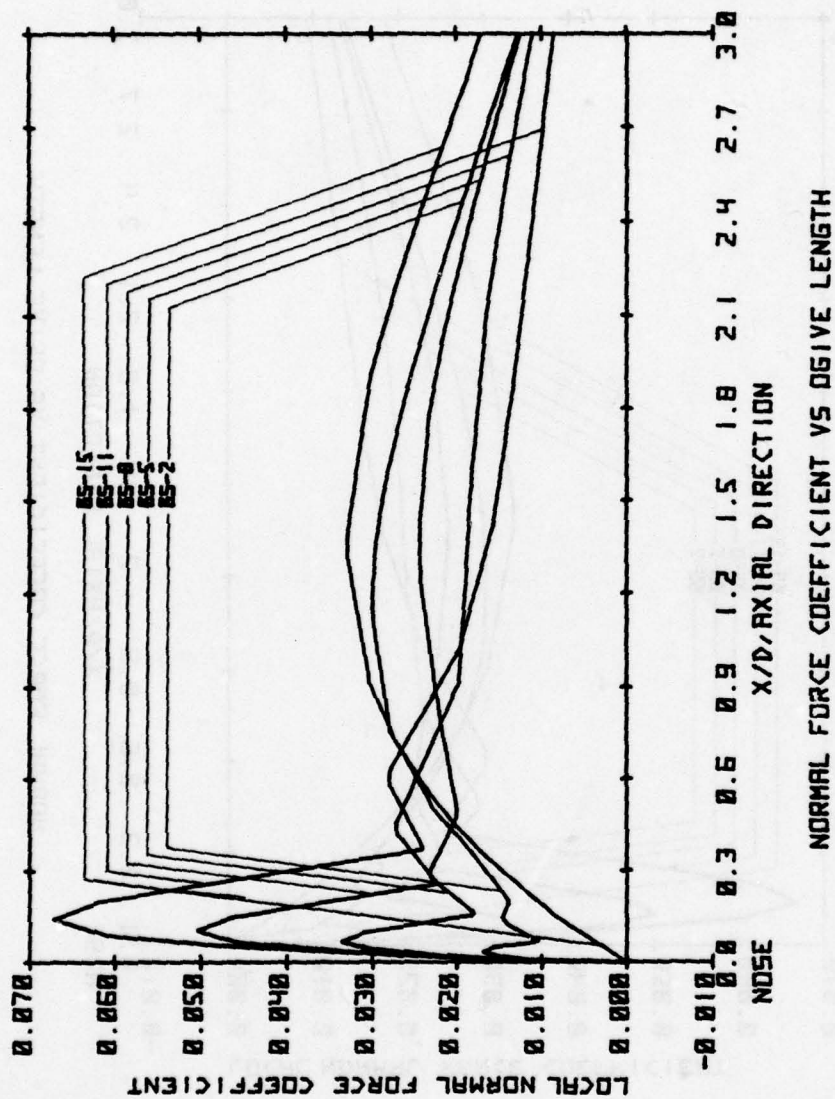


Figure 12. Local normal force coefficient versus axial direction (BS = 2, 5, 8, 11, 15; M = 4.5; L/D = 3) at $\alpha = 2^\circ$.

MACH = 2.0 ALPHA = 2.0 L/D = 4.0

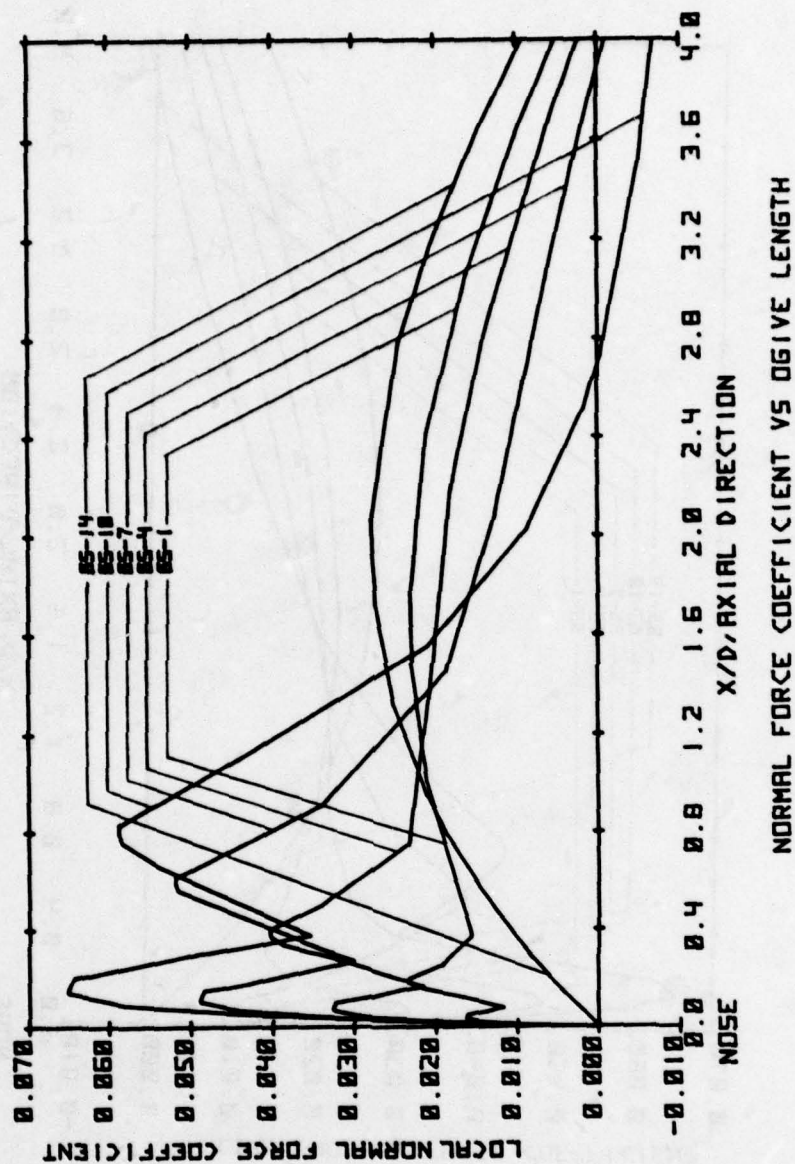


Figure 13. Local normal force coefficient versus axial direction (BS= 1, 4, 7, 10, 14; M = 2; L/D = 4) at $\alpha = 2^\circ$.

MACH = 2.5 ALPHA = 2.0 L/D = 4.0


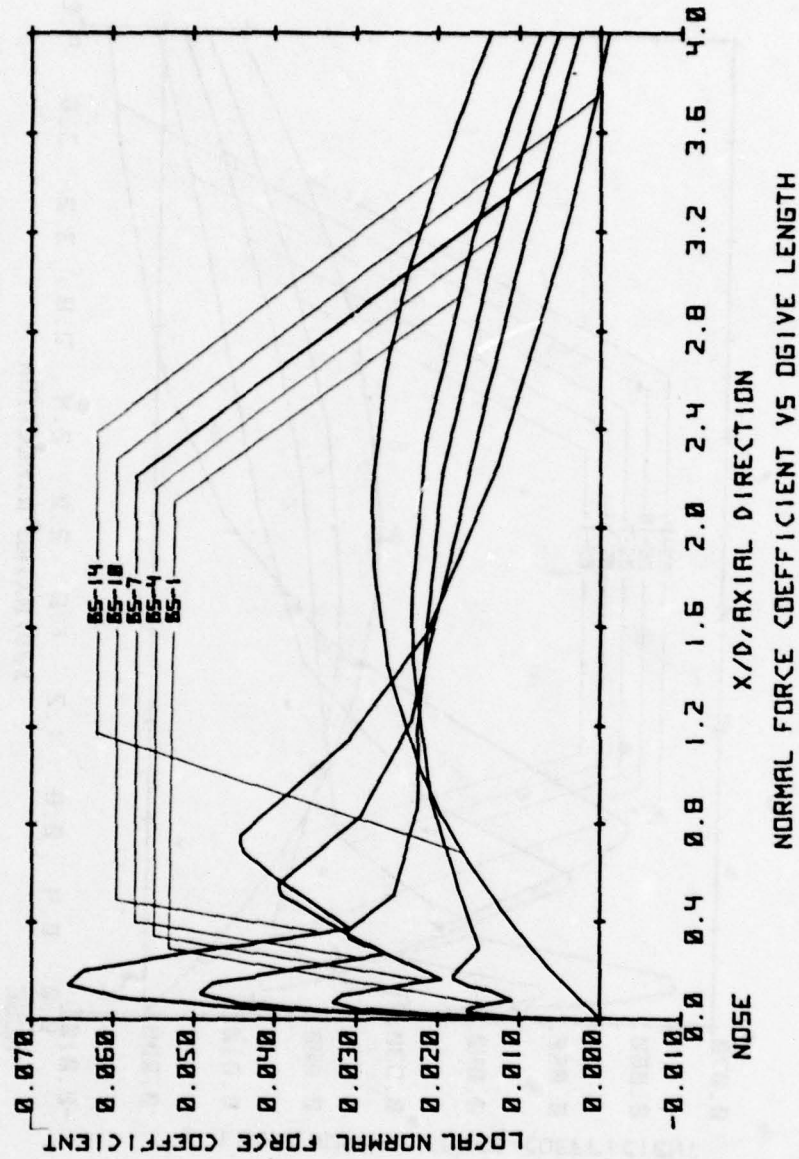


Figure 14. Local normal force coefficient versus axial direction (BS = 1, 4, 7, 10, 14; M = 2.5; L/D = 4) at $\alpha = 2$.


MACH = 3.0 ALPHA = 2.0 L/D = 4.0

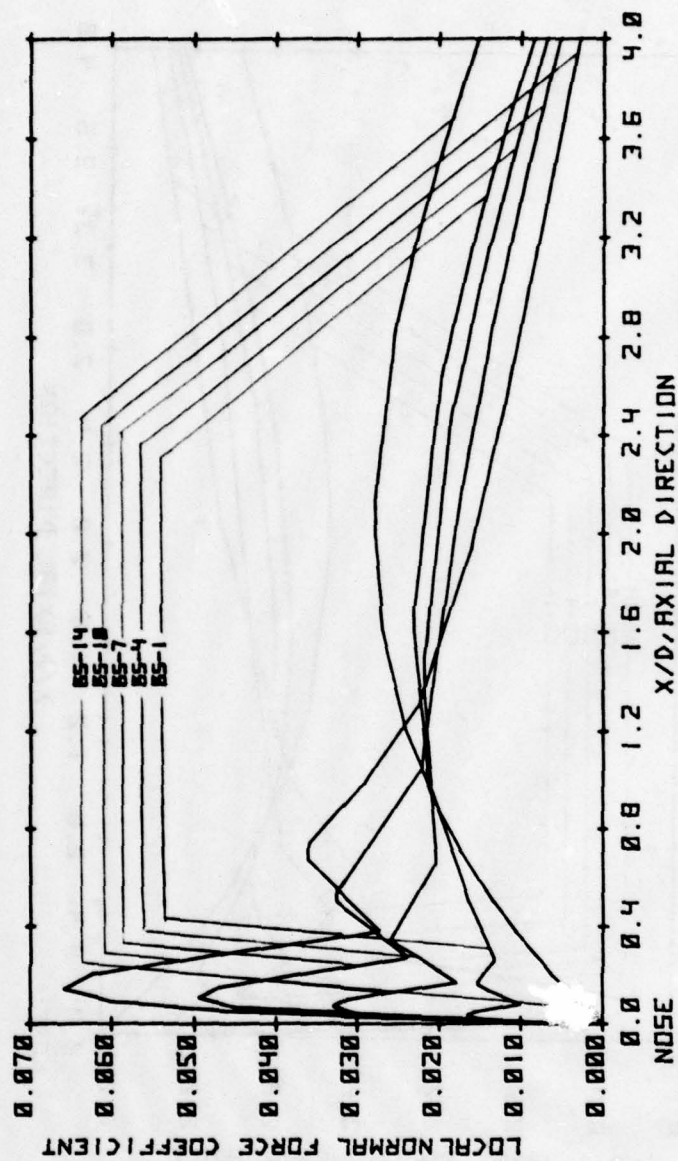

NORMAL FORCE COEFFICIENT VS OGIVE LENGTH

Figure 15. Local normal force coefficient versus axial direction (BS = 1, 4, 7, 10, 14; M = 3; L/D = 4) at $\alpha = 2$.

MACH = 3.5 ALPHA = 2.0 L/D = 4.0

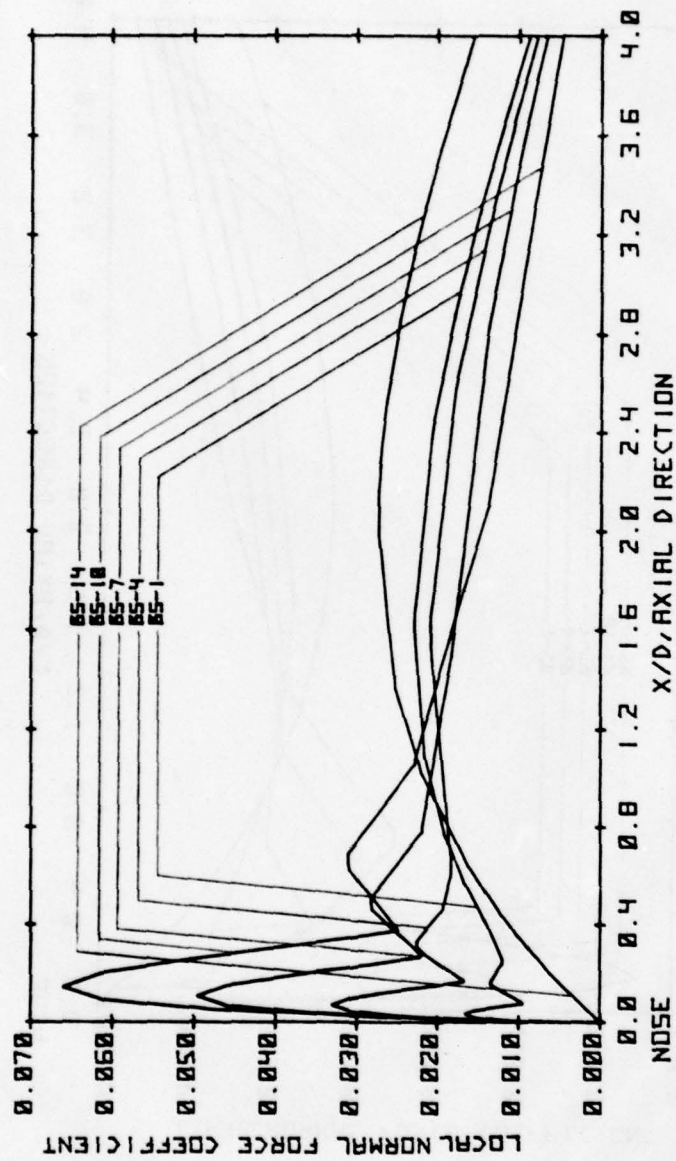

NORMAL FORCE COEFFICIENT VS OGIVE LENGTH

Figure 16. Local normal force coefficient versus axial direction (BS = 1, 4, 7, 10, 14; M = 3.5; L/D = 4) at $\alpha = 2$.

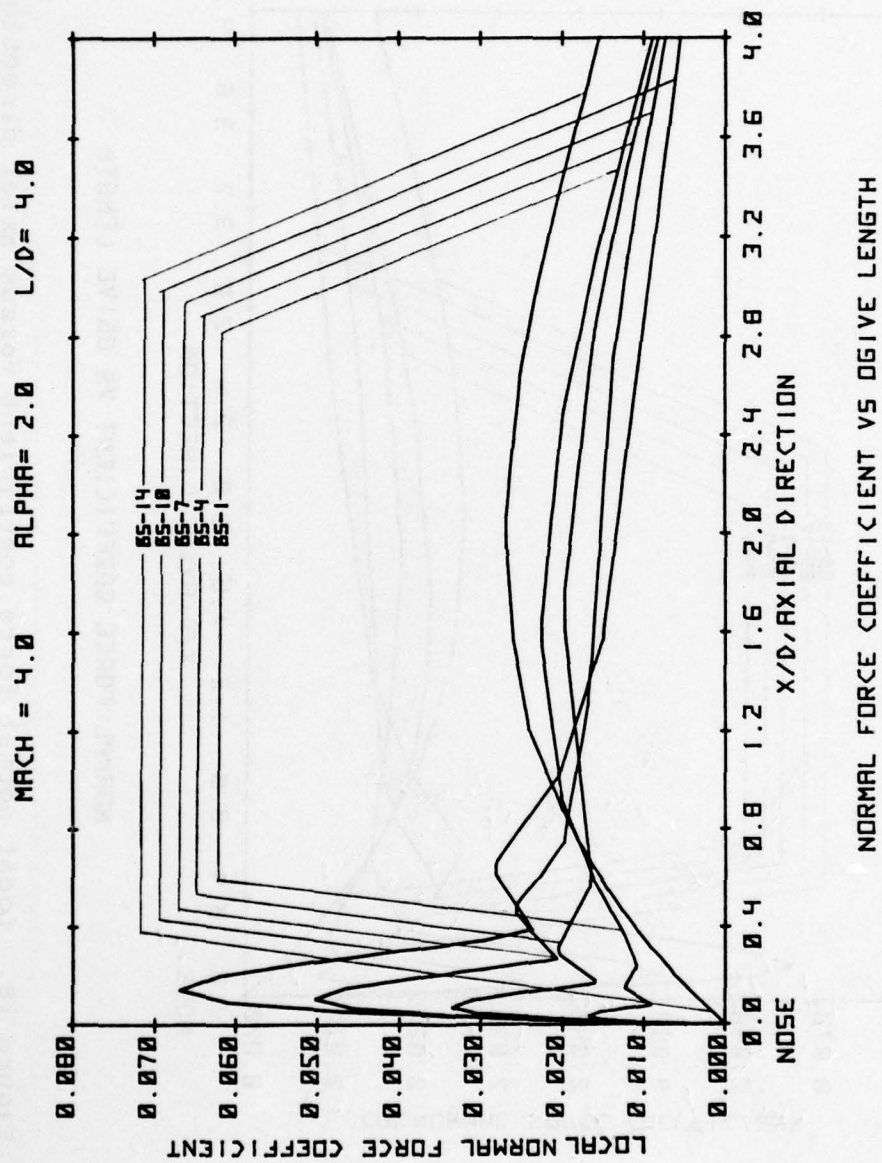


Figure 17. Local normal force coefficient versus axial direction (BS = 1, 4, 7, 10, 14; M = 4; L/D = 4) at $\alpha = 2^\circ$.

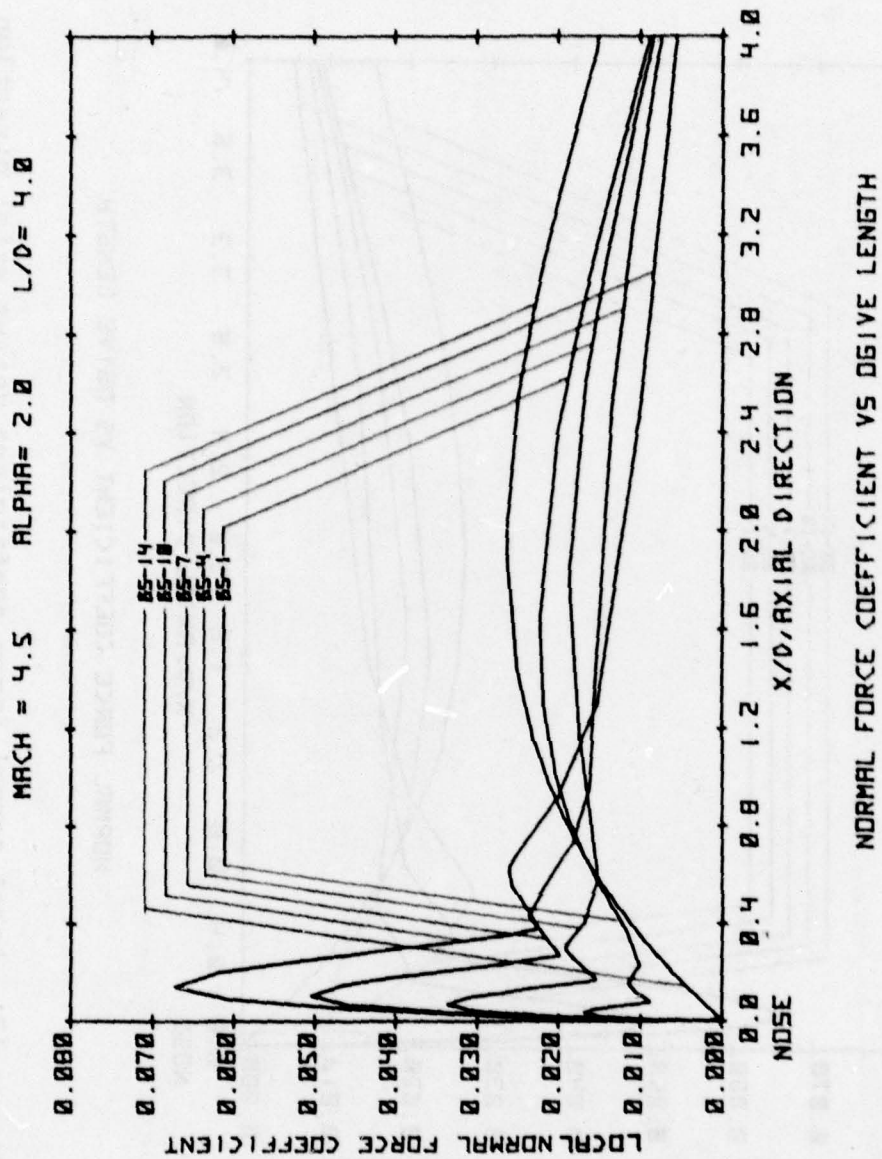


Figure 18. Local normal force coefficient versus axial direction (BS = 1, 4, 7, 10, 14; M = 4.5; L/D = 4) at $\alpha = 2$.



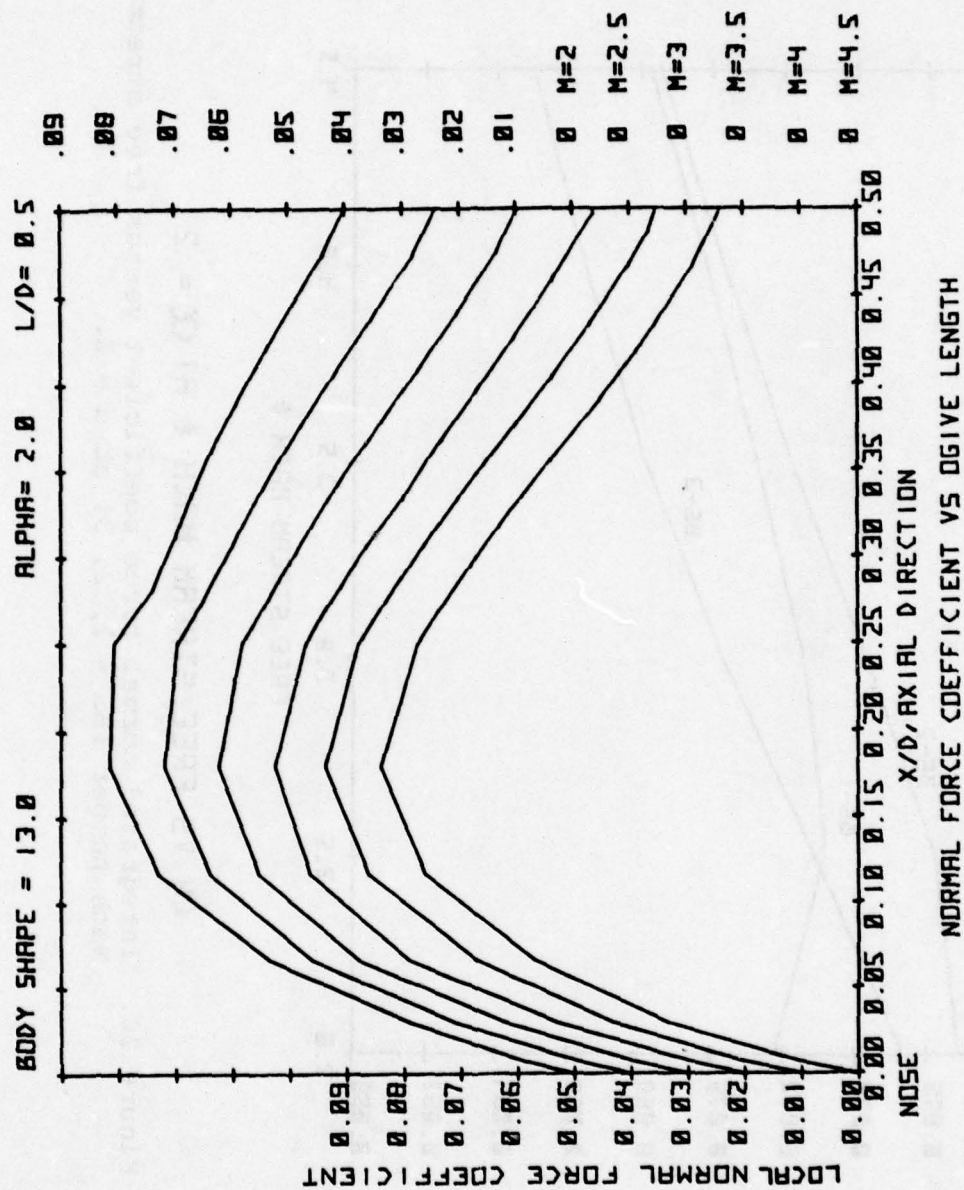


Figure 19. Local normal force coefficient versus axial direction (BS = 13; M = 2, 2.5, 3, 3.5, 4, 4.5; L/D = 5).

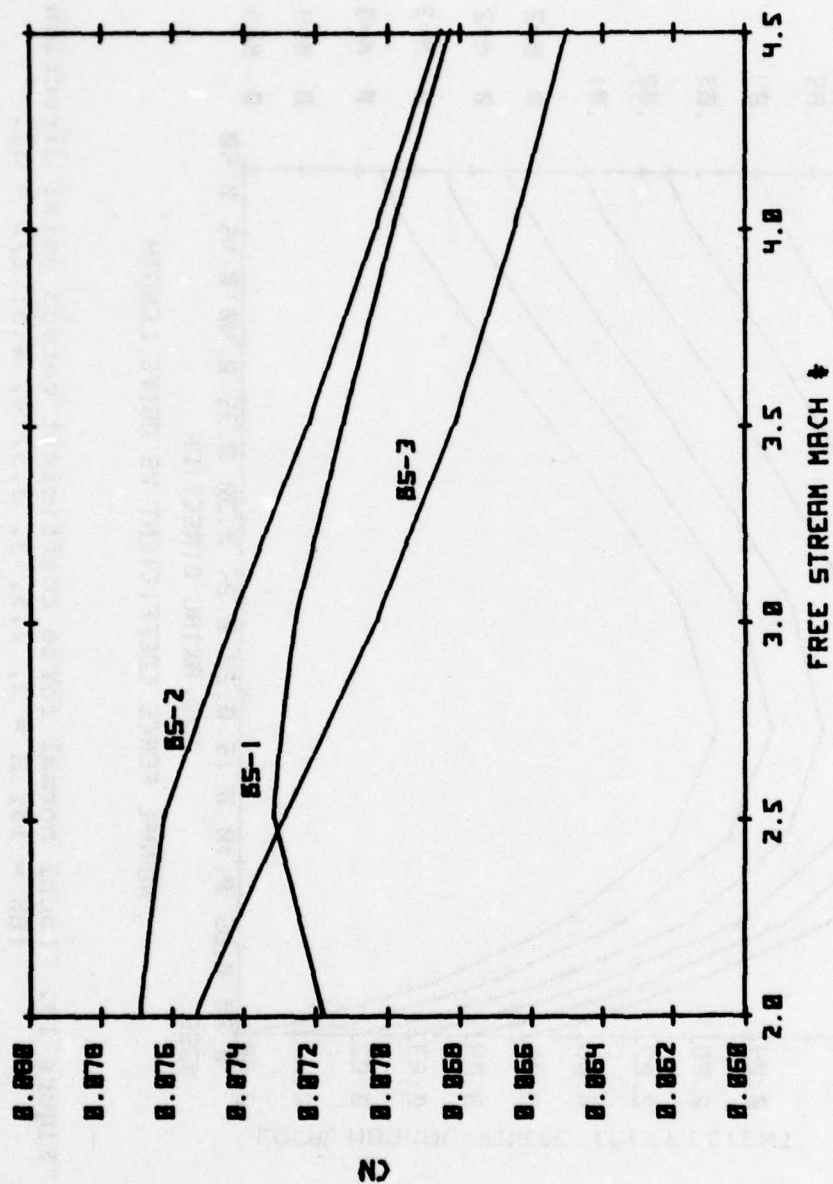


CN VS FREE STREAM MACH # AT $\alpha = 2$

Figure 20. Integrated normal force coefficient versus free stream Mach number (BS = 1, 2, 3) at $\alpha = 2$.

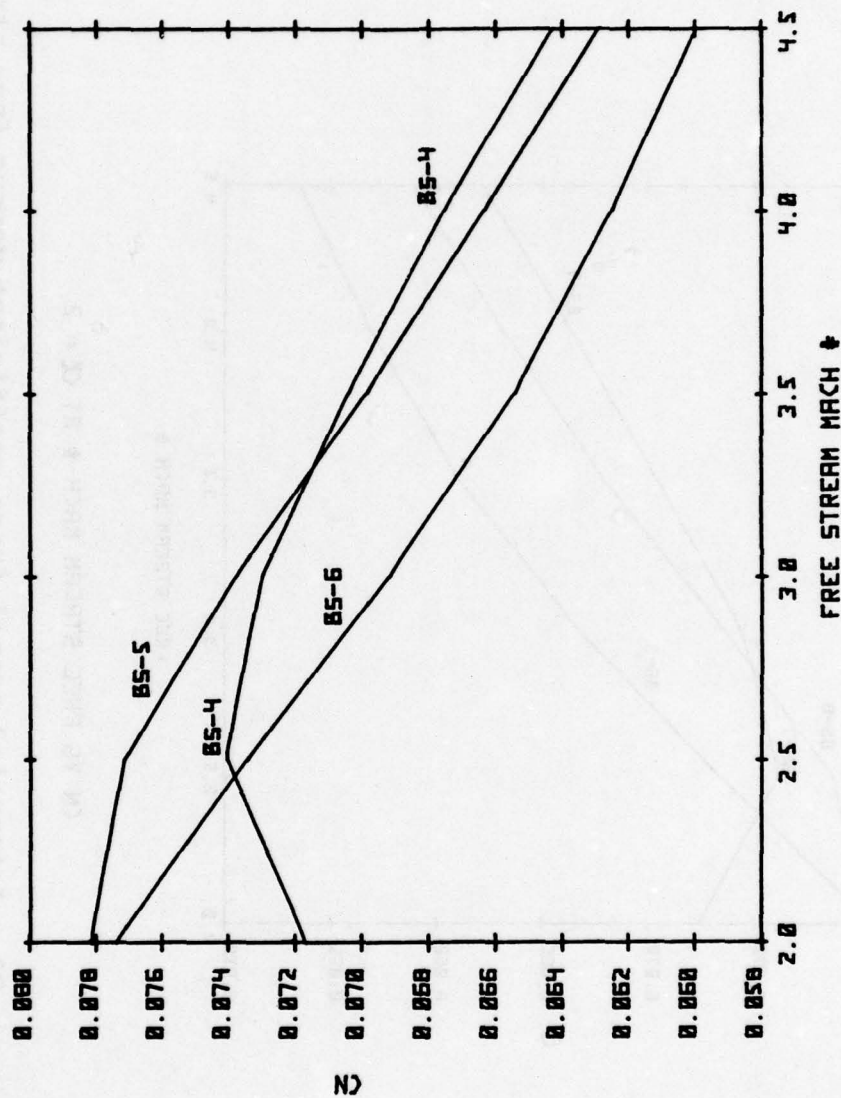


CN VS FREE STREAM MACH # AT $\alpha = 2$

Figure 21. Integrated normal force coefficient versus free stream Mach number (BS = 4, 5, 6) at $\alpha = 2$.

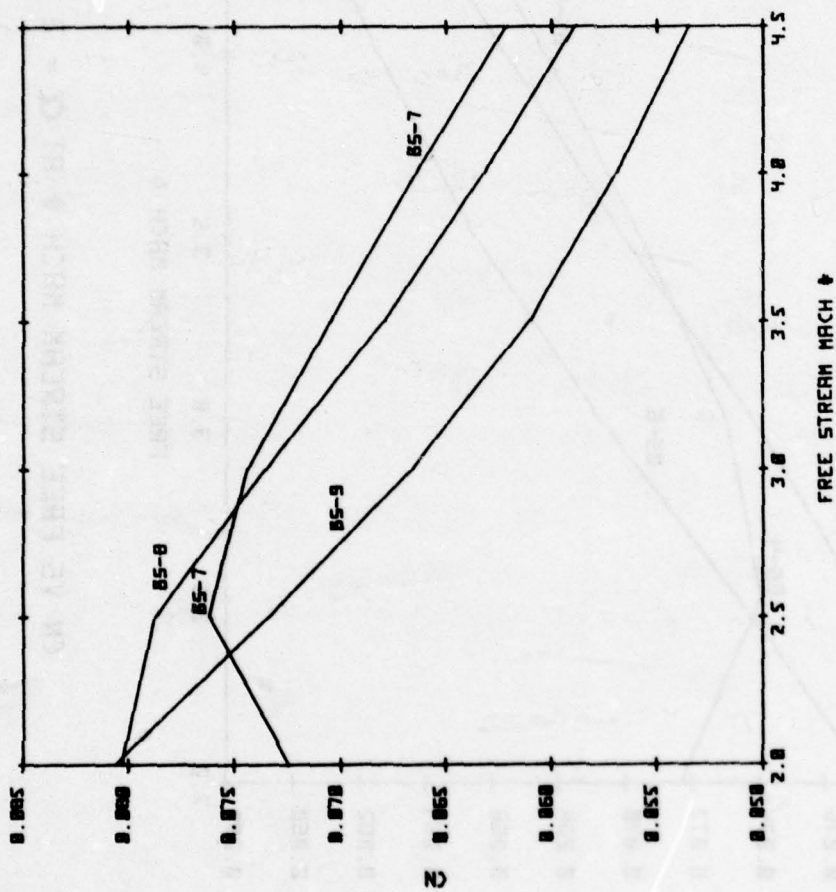

C_n VS FREE STREAM MACH # AT $\alpha = 2$

Figure 22. Integrated normal force coefficient versus free stream Mach number (BS = 7, 8, 9) at $\alpha = 2$.

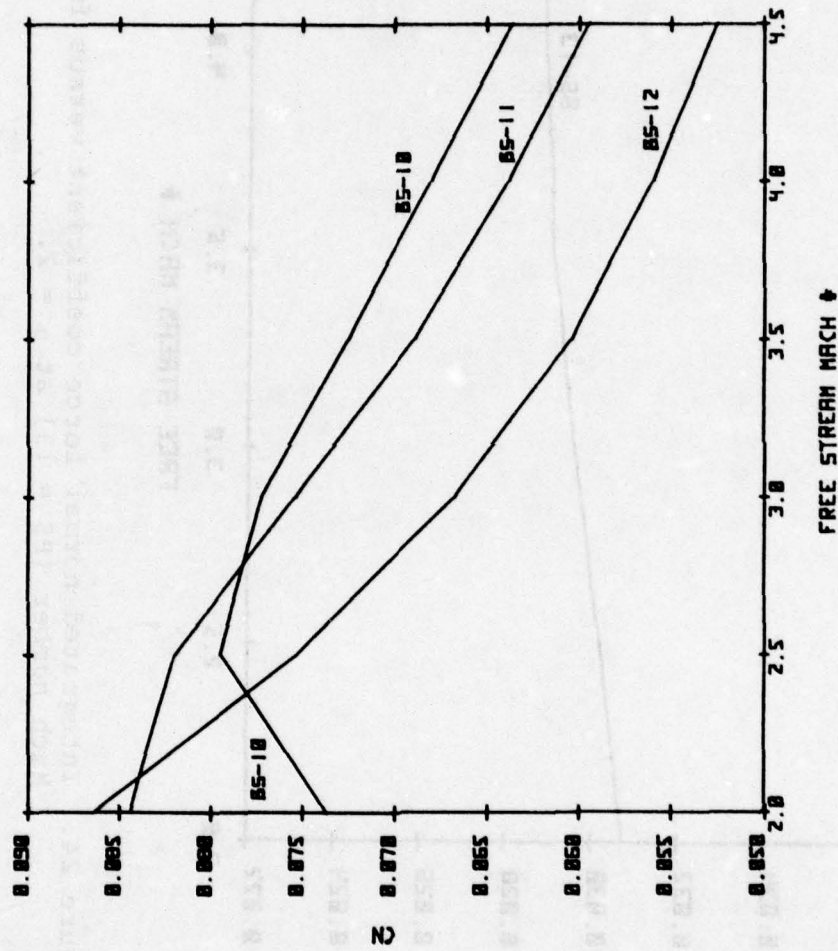

CN VS FREE STREAM MACH # AT $\alpha = 2$

Figure 23. Integrated normal force coefficient versus free stream Mach number (BS = 10, 11, 12) at $\alpha = 2$.


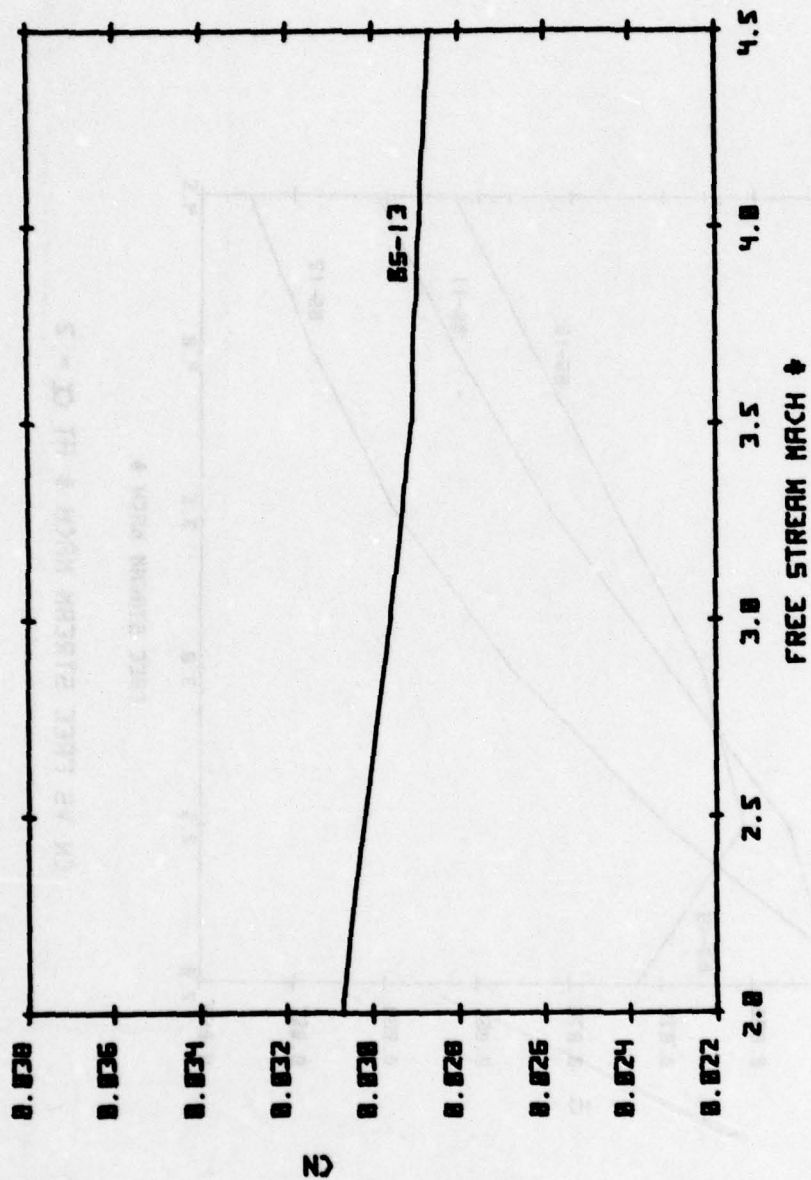


Figure 24. Integrated normal force coefficient versus free stream Mach number (BS = 13) at $\alpha = 2^\circ$.

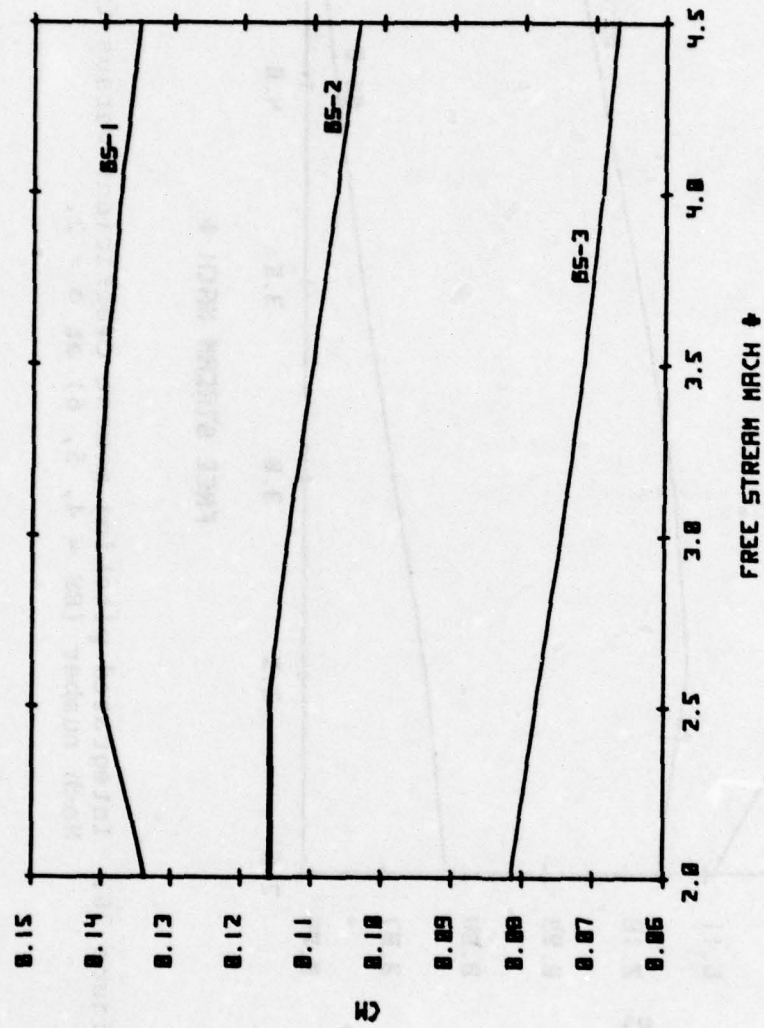

CM VS FREE STREAM MACH # AT $\alpha = 2$

Figure 25. Integrated pitching moment coefficient versus free stream Mach number (BS = 1, 2, 3) at $\alpha = 2$.

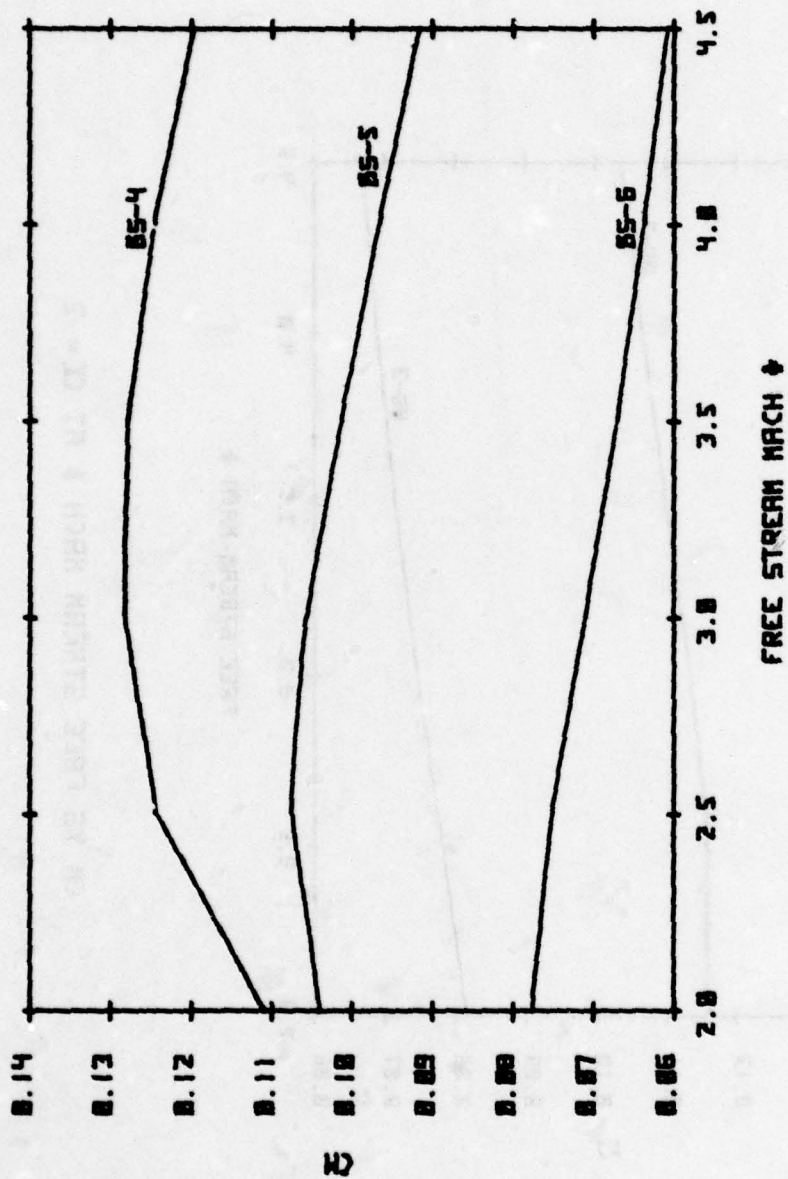


Figure 26. Integrated pitching moment coefficient versus free stream Mach number (BS = 4, 5, 6) at $\alpha = 2^\circ$.

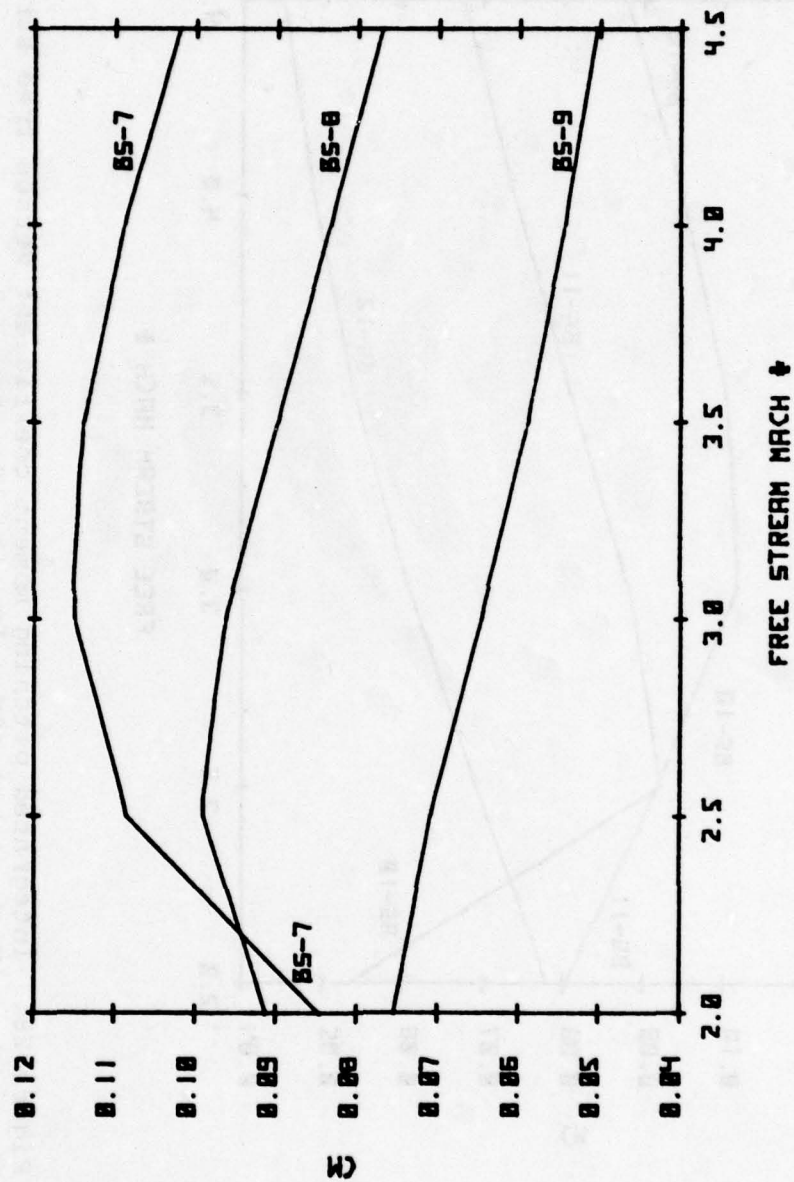


Figure 27. Integrated pitching moment coefficient versus free stream Mach number (BS = 7, 8, 9) at $\alpha = 2^\circ$.



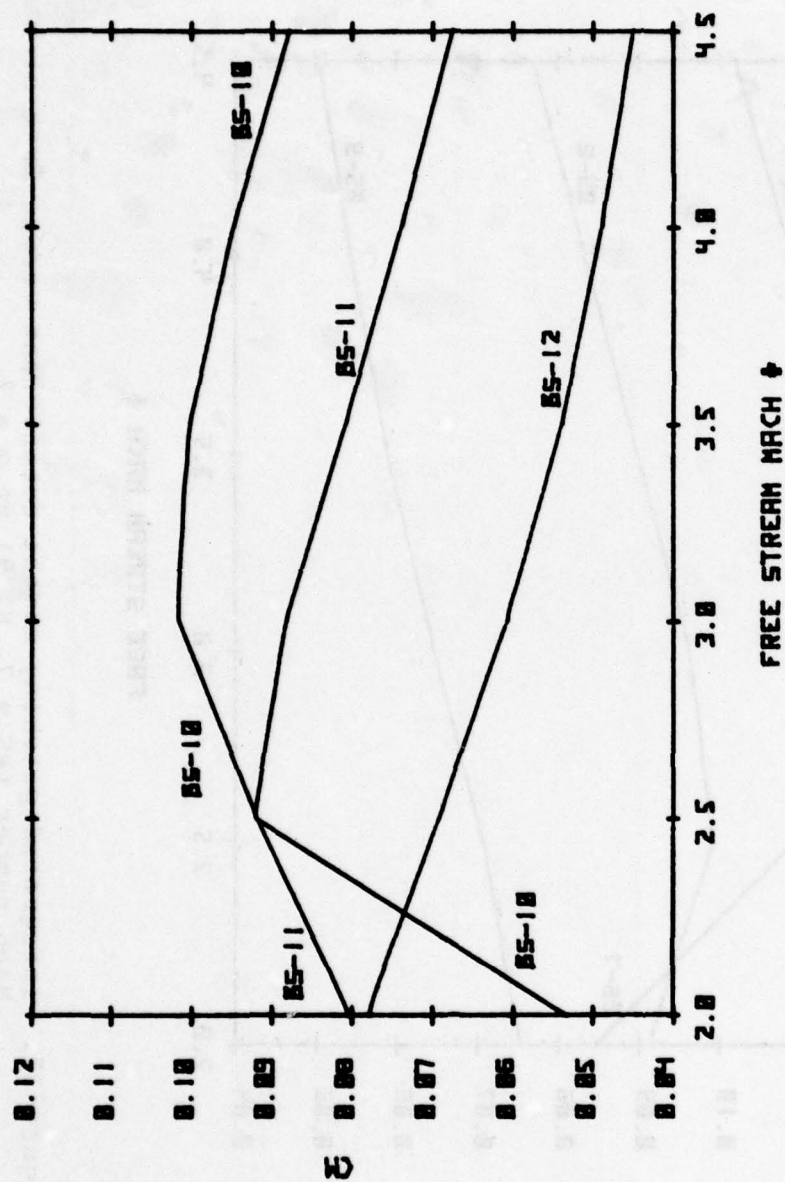


Figure 28. Integrated pitching moment coefficient versus free stream Mach number (BS = 10, 11, 12) at $\alpha = 2^\circ$.

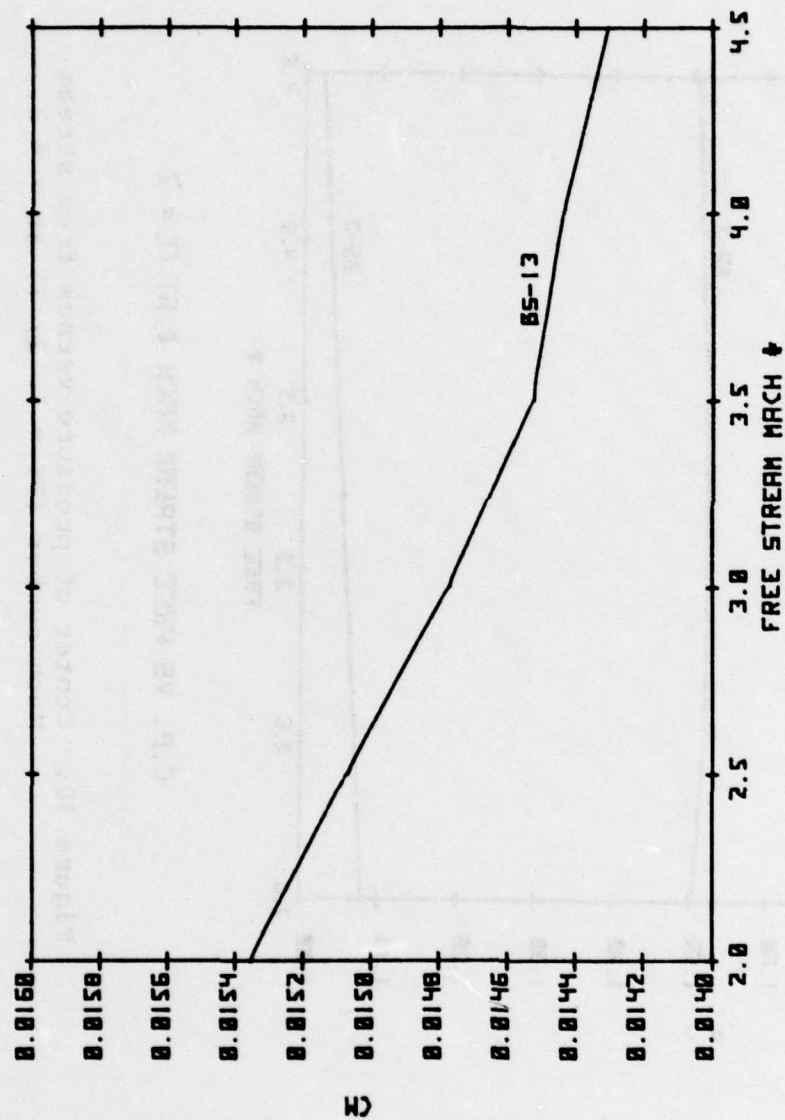


C_m VS FREE STREAM MACH # AT $\alpha = 2$

Figure 29. Integrated pitching moment coefficient versus free stream Mach number (BS = 13) at $\alpha = 2$.

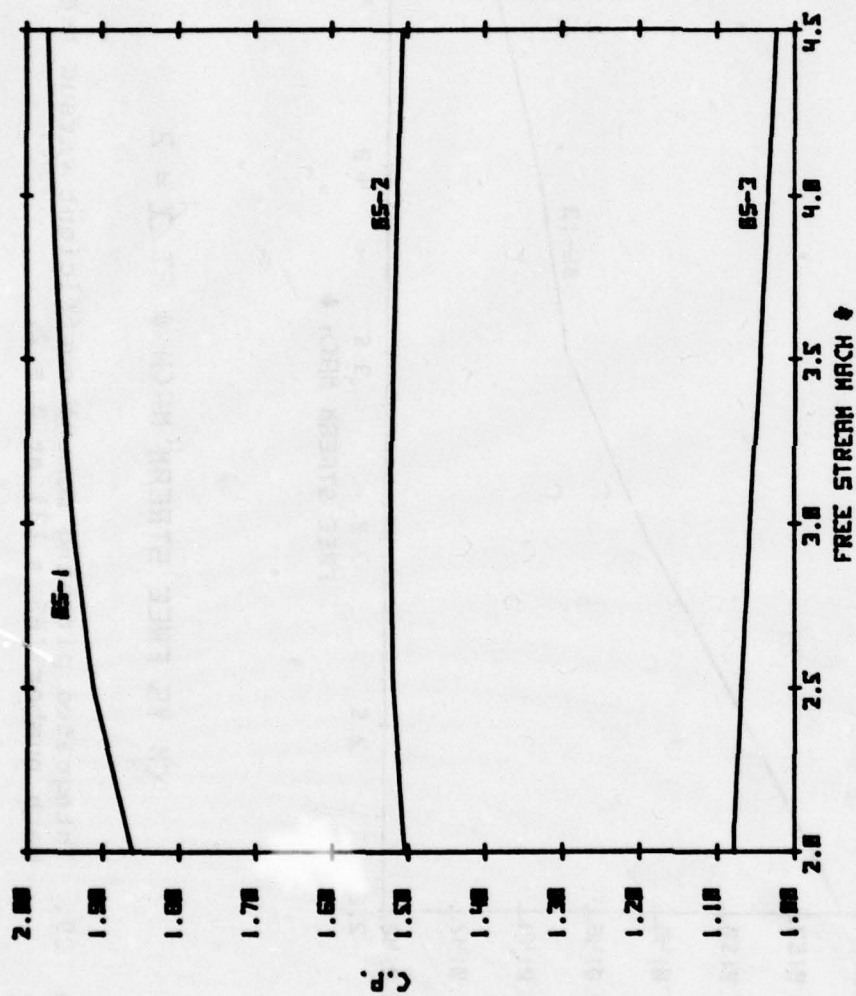


C.P. VS FREE STREAM MACH # AT $\alpha = 2$

Figure 30. Center of pressure versus free stream Mach number (BS = 1, 2, 3) at $\alpha = 2$.

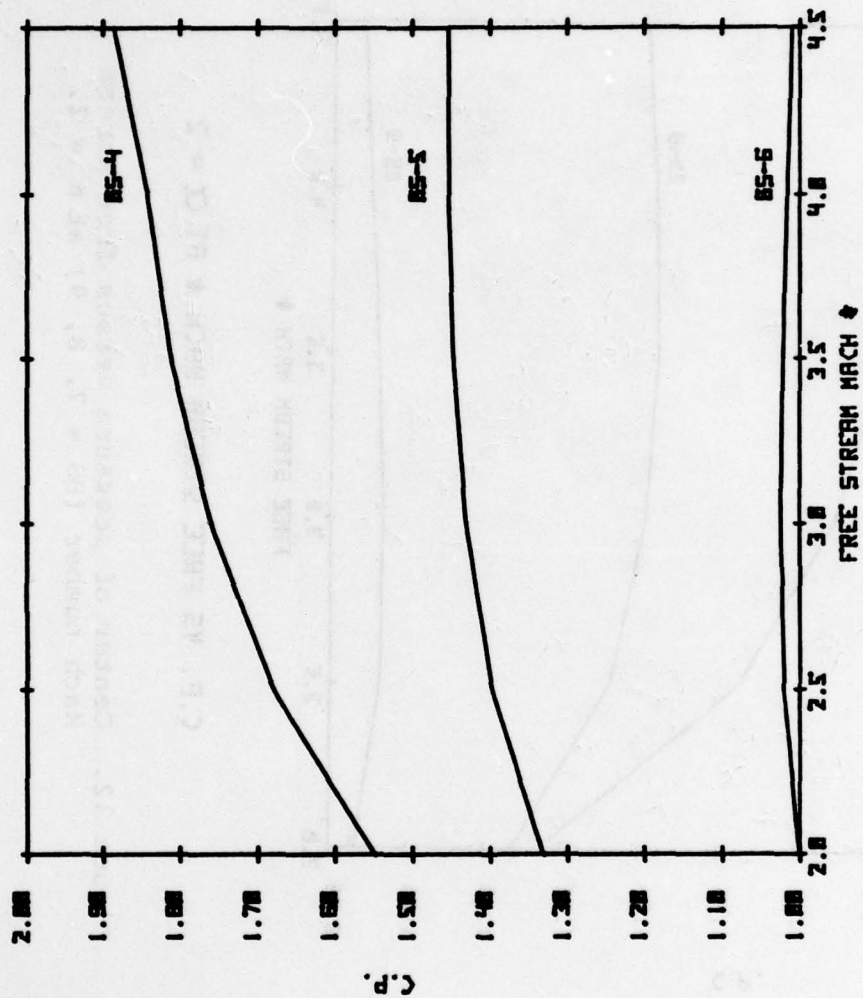


C.P. VS FREE STREAM MACH # AT $\alpha = 2$

Figure 31. Center of pressure versus free stream Mach number (BS = 4, 5, 6) at $\alpha = 2$.

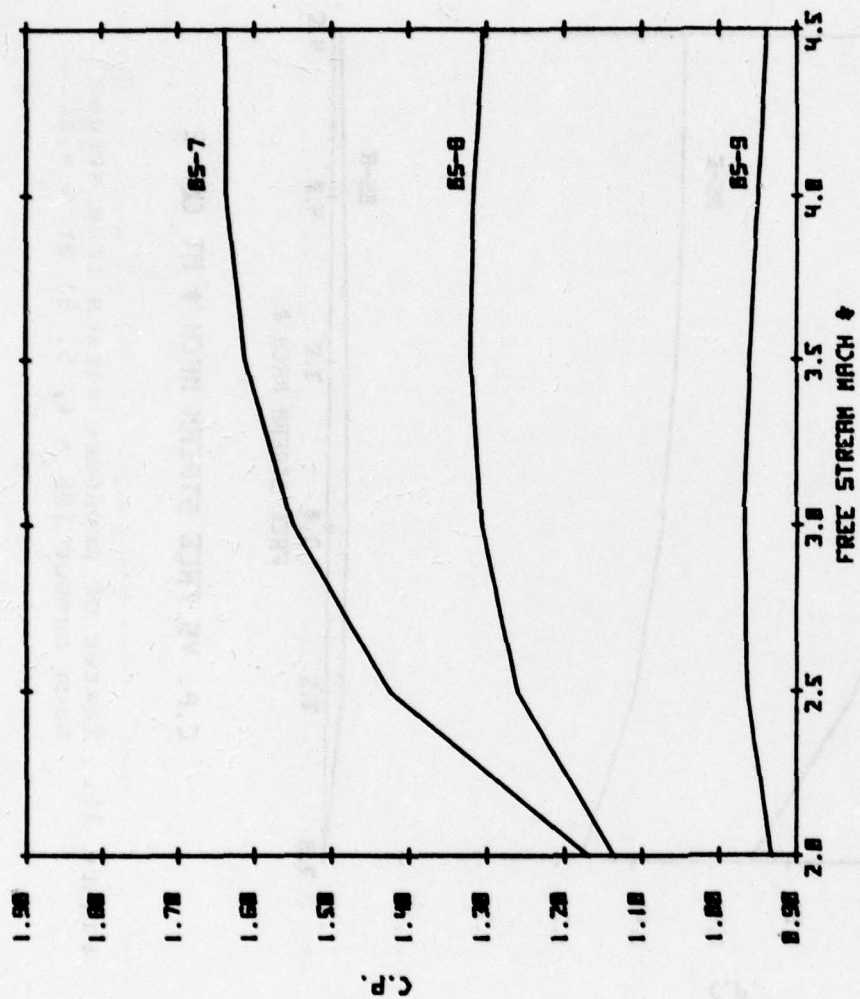


C.P. VS FREE STREAM MACH # AT $\alpha = 2$

Figure 32. Center of pressure versus free stream Mach number (BS = 7, 8, 9) at $\alpha = 2$.

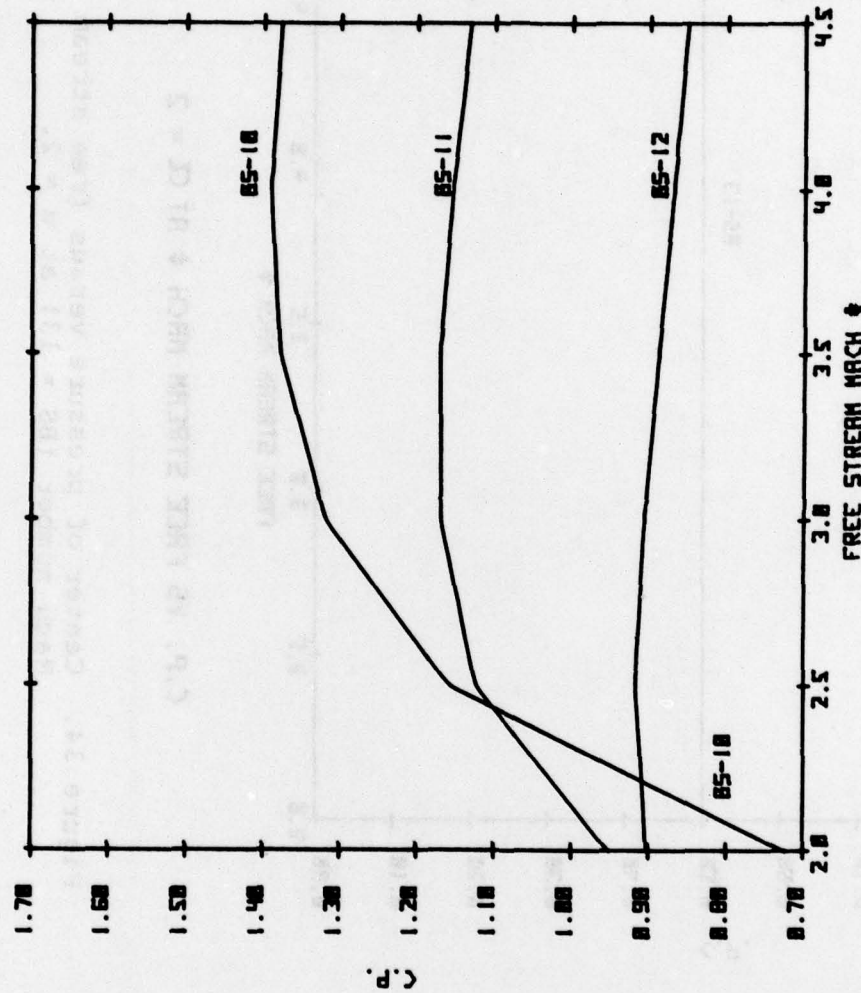

C.P. VS FREE STREAM MACH # AT $\alpha = 2$


Figure 33. Center of pressure versus free stream Mach number (BS = 10, 11, 12) at $\alpha = 2$.

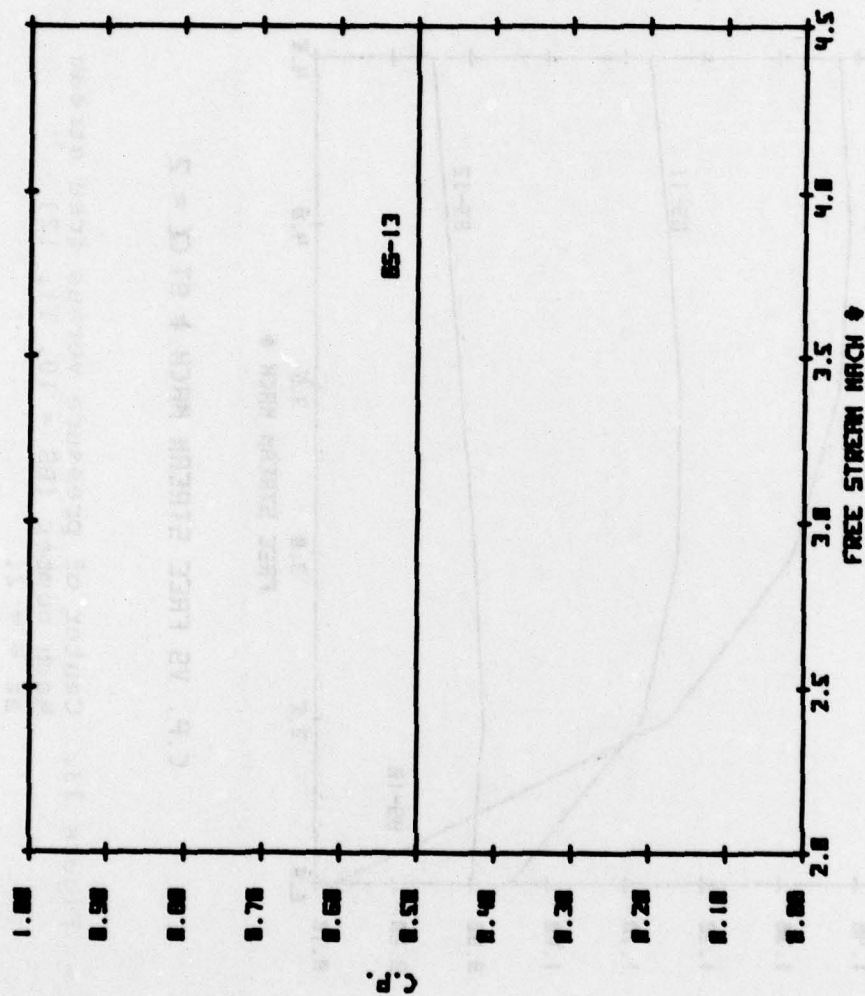

C.P. VS FREE STREAM MACH # AT $\alpha = 2$

Figure 34. Center of pressure versus free stream Mach number (BS = 13) at $\alpha = 2$.


O BS-14
 Δ BS-15
 □ BS-16

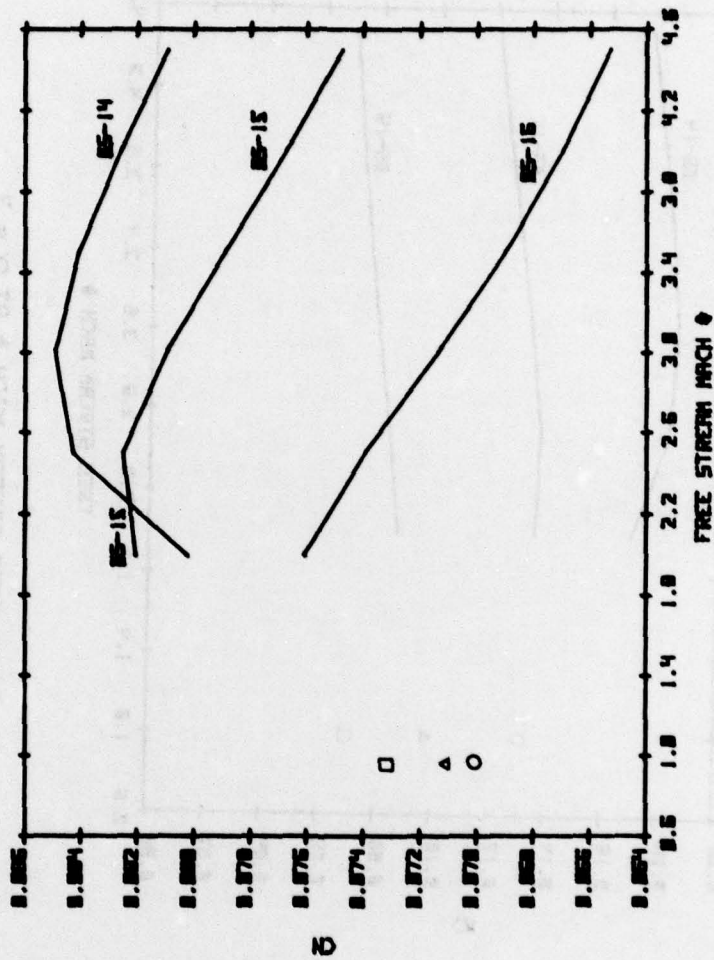

CN VS FREE STREAM MACH # AT $\alpha = 2$

Figure 35. Integrated normal force coefficient versus free stream Mach number (BS = 14, 15, 16) at $\alpha = 2$.


○ BS-14
 △ BS-15
 □ BS-16

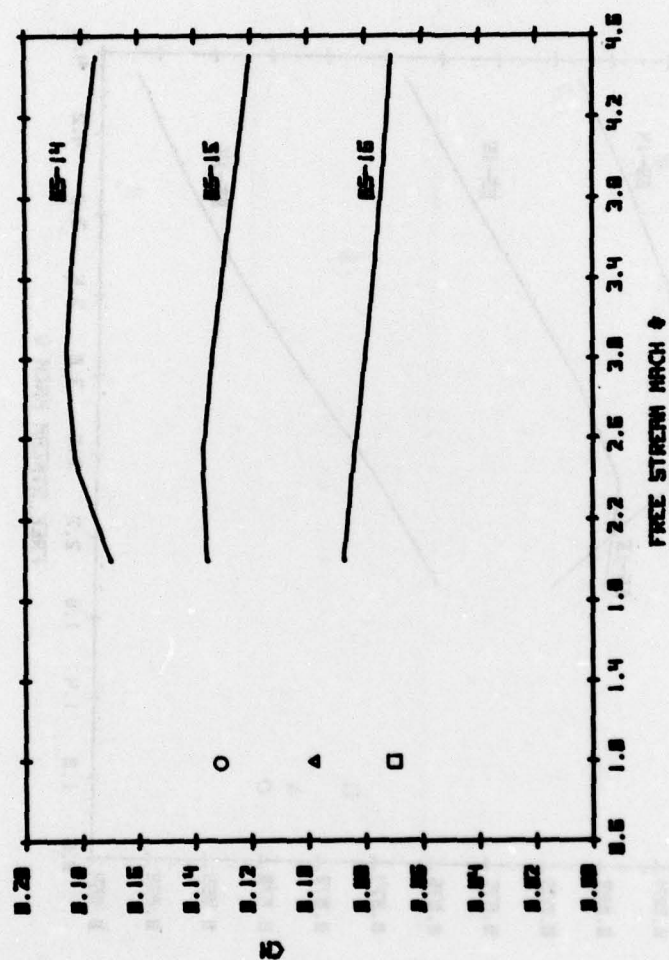

C_m VS FREE STREAM MACH # AT $\alpha = 2$

Figure 36. Integrated pitching moment coefficient versus free stream Mach number (BS = 14, 15, 16) at $\alpha = 2$.

O BS-14
 Δ BS-15
 □ BS-16

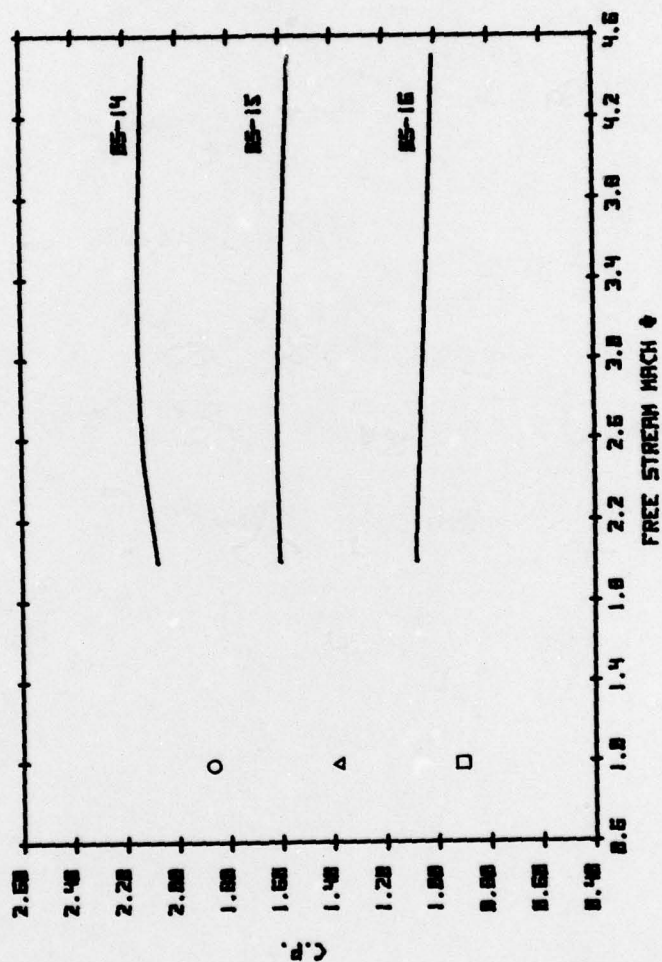

C.P. VS FREE STREAM MACH ♦ AT $\alpha = 2$

Figure 37. Center of pressure versus free stream Mach number (BS = 14, 15, 16) at $\alpha = 2$.

REFERENCES

1. Guy, Ronnie M., Theoretical Analysis of the Flow Field Over a Family of Ogive Bodies, Science Applications, Inc., Huntsville, Alabama, August 1977, Technical Report TD-CR-77-5.
2. Weilerstein, Gertrude, The Addition of Secondary Shock Capability and Modifications to the GASL Three-Dimensional Characteristics Program, Part II: User's and Programmer's Manual, General Applied Science Lab., Inc., August 1967, Technical Report No. 653.
3. Jones, D. J., Numerical Solutions of the Flow Field for Conical Bodies in a Supersonic Stream, National Research Council of Canada, July 1968, Aeronautical Report LR-507, NRC No. 10361.
4. Wu, J. M., Moulden, T. H., and Uchiyama, N., Aerodynamic Performance of Missile Configurations at Transonic Speeds Including the Effects of a Jet Plume, US Army Missile Command, Redstone Arsenal, Alabama, March 1976, Report No. TR-RD-76-23.

SYMBOLS

α	Alpha-Angle of attack
BS	Body shape (see <u>Table I</u>)
CM	Pitching moment coefficient about the nose
CN	Normal force coefficient
C.P.	Center of pressure - non dimensionalized with respect to D
D	Diameter of forebody at the base
L	Forebody length
L/D	Fineness ratio
M or M_∞	Free stream Mach number
X/D	Axial direction (non-dimensional)
R_N	Nose radius/D (non-dimensional)

DISTRIBUTION

	No. Of Copies
Defense Documentation Center Cameron Station Alexandria, Virginia 22314	12
Commander US Army Material Research and Development Command ATTN: DRCRD DRCDL Alexandria, Virginia 22314	1 1
Commanding Officer US Army Picatinny Arsenal ATTN: SMUPA-VC3, Mr. A. Loeb Dover, New Jersey 07801	1
Director US Army Mobility Research and Development Laboratory ATTN: SAVDL-AS Ames Research Center Moffett Field, California 94035	1
Commanding Officer Research Laboratories ATTN: SMUEA-RA, Mr. Abraham Flatau Edgewood Arsenal, Maryland 21010	1
Commanding Officer Air Force Armament Laboratory ATTN: Mr. C. Butler Mr. F. Howard Mr. F. Findley Eglin Air Force Base, Florida 32542	1 1 1
Arnold Engineering and Development Center ATTN: Dr. McKay Library Arnold Air Force Station, Tennessee 37389	1 1

DISTRIBUTION

	No. Of Copies
Air Force Flight Dynamics Laboratory ATTN: FDMM, Mr. Gene Fleeman Wright-Patterson Air Force Base, Ohio 45433	1
Commanding Officer Ballistic Research Laboratories ATTN: DRXRD-BEL, Mr. R. Krieger Aberdeen Proving Ground, Maryland 21005	1
Commanding Officer US Naval Ordnance Laboratories ATTN: Mr. S. Hastings Mr. R. T. Hall Library White Oak Silver Spring, Maryland 20910	1 1 1
NASA-Langley Research Center ATTN: Mr. Leroy Spearman Mr. Charles Jackson Technical Library Hampton, Virginia 23665	1 1 1
Commanding Officer and Director Naval Ship Research and Development Center ATTN: Aerodynamic Laboratory Craderock, Maryland 20007	1
Naval Weapons Center ATTN: Mr. R. Meeker China Lake, California 93555	1
NASA-Ames Research Center ATTN: Technical Library Moffett Field, California 94035	1
NASA-Lewis Research Center ATTN: Technical Library Cleveland, Ohio 44135	1

DISTRIBUTION

	No. Of Copies
NASA-Marshall Space Flight Center	
ATTN: Mr. K. Blackwell	1
Mr. H. Struck	1
Mr. J. Sims	1
Technical Library	1
Marshall Space Flight Center, Alabama 35812	
US Air Force Academy	
ATTN: Lt. Col. W. A. Edgington	
DFAN	1
USAF Academy, Colorado 80840	
Philco Corporation	
Aeronutronic Division	
ATTN: Technical Information	
Services-Acquisitions	
Mr. L. E. Horowitz	1
Ford Road	
Newport Beach, California 92663	
Rockwell International	
Columbus Aircraft Division	
ATTN: Mr. Fred Hessman	1
4300 East Fifth Avenue	
Columbus, Ohio 43216	
Sandia Corporation	
Sandia Base Division 9322	
ATTN: Mr. W. Curry	1
Box 5800	
Albuquerque, New Mexico 87115	
Purdue University	
ATTN: Dr. J. Hoffman,	
Propulsion Center	1
Lafayette, Indiana 47907	
University of Tennessee Space Institute	
ATTN: Dr. J. M. Wu	1
Tullahoma, Tennessee 37388	

DISTRIBUTION

	No. Of Copies
University of Alabama Department of Aerospace Engineering ATTN: Dr. Zien	1
Dr. J. O. Doughty	1
University, Alabama 35486	
Jet Propulsion Laboratory California Institute of Technology ATTN: Mr. R. Martin	1
4800 Oak Grove Drive	
Pasadena, California 91109	
University of Missouri at Columbia Department of Mechanical Engineering ATTN: Dr. D. E. Wollersheim	1
Columbia, Missouri 65201	
University of Illinois College of Engineering ATTN: Dr. A. L. Addy	1
Dr. H. H. Korst	1
Dr. R. A. White	1
Engineering Library	1
Urbana, Illinois 61801	
John Hopkins University Applied Physics Laboratory ATTN: Dr. L. Cronvich	1
Mr. Gordon Dugger	1
Mr. R. Walker	1
Silver Spring, Maryland 20910	
University of Notre Dame Department of Aerospace Engineering ATTN: Dr. T. J. Mueller	1
Notre Dame, Indiana 46556	
Naval Air Systems Command ATTN: Mr. William Volz	6
Air 320-C, Room 778, JP-1	
Washington, D.C. 20361	

DISTRIBUTION

	No. Of Copies
Boeing Company	
ATTN: Library Unit Chief	1
Mr. R. J. Dixon	1
Mr. H. L. Giles	1
P. O. Box 3707	
Seattle, Washington 98124	
Convair, A Division of General Dynamics Corporation	
ATTN: Division Library	1
Pomona, California 91776	
Nielsen Engineering and Research, Inc.	
ATTN: Dr. Jack N. Nielsen	1
510 Clyde Avenue	
Mountain View, California 94043	
Hughes Aircraft Company	
ATTN: Documents Group Technical Library	1
Florence Avenue at Teale Street	
Culver City, California 90230	
Ling-Temco-Vought Aerospace Corporation	
ATTN: Mr. Dick Ellison	1
P.O. Box 404	
Warren, Michigan 48090	
Vought Corporation	
ATTN: D. B. Schoelerman	1
Chief of Flight Technologies	
P.O. Box 5907	
Dallas, Texas 75222	
Lockheed Missiles and Space Company	
Huntsville R&E Center	
ATTN: Mr. Morris Penney	1
4800 Bradford Boulevard, N.W.	
Huntsville, Alabama 35805	

DISTRIBUTION

	No. Of Copies
Lockheed Aircraft Corporation Missile and Space Division ATTN: Technical Information Center P.O. Box 504 Sunnyvale, California 94086	1
The Martin-Marietta Corporation Orlando Division ATTN: D. Tipping L. Gilbert Orlando, Florida 32804	1 1
McDonnellDouglas Company-West ATTN: Library A3-328 5301 Bolsa Avenue Huntington Beach, California 92646	1
McDonnellDouglas Corporation P. O. Box 516 St. Louis, Missouri 63166	1
Rensselaer Polytechnic Institute ATTN: Mr. Leone Troy, New York 12181	1
Northrop Corporation Electro-Mechanical Division ATTN: Mr. E. Clark 500 East Orangethorpe Y20 Anaheim, California 92801	1
Emerson Electric Company ATTN: Mr. Robert Bauman 8100 Florissant St. Louis, Missouri 73136	1

DISTRIBUTION (Concluded)

	No. Of Copies
DRSMI-LP, Mr. Voigt	1
DRSMI-T, (R&D) Dr. Kobler	1
-TDK, (R&D) Mr. Deep	1
Mr. Henderson	1
Mr. Dahlke	4
-TD, (R&D) Mr. Jenkins	30
-C, (R&D) Mr. Sullivan	1
-TBD, (R&D)	3
-TI, (R&D) (Record Set)	1
(Reference Copy)	1