

AD-A081 010

NORTHWESTERN UNIV EVANSTON IL DEPT OF CHEMISTRY

F/6 7/3

NEW CONDUCTIVE POLYMERIC MATERIALS: COFACIAL ASSEMBLY OF MIXED --ETC(U)

JAN 80 T J MARKS, K F SCHOCH, B R KUNDALKAR

N00014-77-C-0231


UNCLASSIFIED

TR-10

NL

OF
AD
A081010





MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

OFFICE OF NAVAL RESEARCH

Contract N00014-77-C-0231
Task No. NR 053-640

TECHNICAL REPORT NO. 10

NEW CONDUCTIVE POLYMERIC MATERIALS:
COFACIAL ASSEMBLY OF MIXED
VALENT METALLOMACROCYCLES.

by

Tobin J. Marks, Karl F. Schoch, Jr., and
Bhagyashree R. Kundalkar

Prepared for Publication
in

Synthetic Metals

Proceedings of the San Jose Conference on Conductive Polymers and Graphite)

Northwestern University
Department of Chemistry
Evanston, Illinois 60201

58 January 22, 1980

Reproduction in whole or in part is permitted for
any purpose of the United States Government

* This document has been approved for public release
and sale; its distribution is unlimited

* This statement should also appear in Item 10 of Document Control Data
- DD Form 1473. Copies of form available from cognizant contract
administrator.

80 2 19 156

260805

Joe

LEVEL

14 TR-10

12 35

DTIC
ELECTE
FEB 21 1980

A

ADA081010

DDC FILE COPY

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

DD FORM 1473
JAN 73

unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

indicates that the iodine has oxidized the polymer chain. Polymer structure has been studied by X-ray powder diffraction, and it is possible to estimate interplanar spacings. Halogen doping of the $[M(Pc)O]_n$ materials is accompanied by electrical conductivity increases as large $10^7(\text{ohm cm})^{-1}$; the general trend is $\sigma_{\text{Si}} > \sigma_{\text{Ge}} > \sigma_{\text{Sn}}$. Variable temperature conductivity and magnetic susceptibility data are reported.

SIGMA

10 To the 7th power (ohm cm)

Accession For	
STIS	GICMI
DDC	TAE
Unannounced	
Justification	
By	
Distribution	
Availability Codes	
Dist	Avail and/or special
A	

unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

NEW CONDUCTIVE POLYMERIC MATERIALS:
COFACIAL ASSEMBLY OF MIXED
VALENT METALLOMACROCYCLES.

Tobin J. Marks,^{*,1} Karl F. Schoch, Jr., and
Bhagyashree R. Kundalkar

Department of Chemistry and the
the Materials Research Center
Northwestern University
Evanston, Illinois 60201

Abstract

This paper reports on an approach to control molecular stacking interactions in low-dimensional mixed valence materials by locking partially oxidized metallomacrocycles together in a cofacial orientation. Iodine doping of the face-to-face linked oligomers $[M(Pc)O]_n$ ($M=Si, Ge, Sn$; Pc = phthalocyaninato) produces electrically conductive polymers $\{[M(Pc)O]I_x\}_n$ with a wide range of x stoichiometries. Resonance Raman spectroscopy indicates that the iodine has oxidized the polymer chain. Polymer structure has been studied by X-ray powder diffraction, and it is possible to estimate interplanar spacings. Halogen doping of the $[M(Pc)O]_n$ materials is accompanied by electrical conductivity increases as large 10^7 (ohm cm)⁻¹; the general

trend is $\sigma_{\text{Si}} \gtrsim \sigma_{\text{Ge}} > \sigma_{\text{Sn}}$. Variable temperature conductivity and magnetic susceptibility data are reported.

Substantial progress has been achieved over the past several years in understanding how organic and metal-organic molecular solids can be imbued with metal-like charge transport properties.² Two features now appear to be requisite for facile charge conduction. First, the molecules must be arrayed in close spacial proximity and in crystallographically similar environments (e.g. molecular stacks). Second, these molecules must exist in formal fractional oxidation states ("mixed valence", "incomplete charge transfer", "partial oxidation"). Our understanding of the importance and workings of these factors is presently at a very qualitative level. Even worse, our ability to test these ideas or to rationally manipulate the various parameters via chemical synthesis is at an extremely primitive stage of development. For example, those molecular and intermolecular forces which govern whether stacks³ form, whether stacks are segregated ("homosoric" $3e$) or integrated ("heterosoric" $3e$), whether stacks consist of D_{nh} or canted arrays, and how stacks are oriented with respect to electron donors and acceptors³, are not well-understood and almost impossible to control. In this paper we report on a new, successful approach to the control of molecular stacking and lattice architecture in low-dimensional mixed valence materials. This approach involves the assembly and partial oxidation of well-characterized and chemically flexible subunits. As such, it capitalizes on a great deal of accumulated knowledge, and offers the

possibility of constructing a large variety of conductive polymers with well-defined and readily manipulatable primary and secondary structures. This approach also offers the possibility of modifying various aspects of the lattice dynamics which are involved in Peierls transitions² and other electron-phonon coupling phenomena.^{2, 4}

Work in our laboratory^{5, 6} and elsewhere⁷ has previously shown that one viable route to conductive molecular solids is the halogen oxidation of planar, conjugated metallomacrocycles. Although this approach is greatly weakened by inability to enforce molecular stacking, in cases where stacks do form, it is known that the metal-ligand units can frequently be brought into fractional oxidation states. Moreover, the form of the halogen acceptor (A) present (A^- , A_3^- , A_5^- , A_2) can be readily deduced using resonance Raman and Mössbauer spectroscopy.⁸ This allows rapid and accurate assessment of the degree of incomplete charge transfer. We now apply this successful oxidative methodology to systems in which the metallomacrocyclic units are joined by strong covalent linkages with bond energies on the order of 80-100 kcal (ca. 3.5-4.5 eV)/mole. Thus, the degree of stacking control is necessarily far greater than in simple stacked systems where weaker covalent bonding is evidenced by bandwidths on the order of only ca. 10 kcal (0.5 eV)/mole². Although we illustrate here with one particular class of metallomacrocycle subunit (the technologically important⁹ phthal-

cyanine, Pc) and one type of linking atom (oxygen), the generalizability of this approach should be evident.

Experimental

The compounds Si(Pc)Cl_2 , Ge(Pc)Cl_2 , and Sn(Pc)Cl_2 were synthesized by the literature procedure¹⁰ or by a new "one-pot" method.¹¹ The dichlorides were next hydrolyzed in pyridine/ NaOH ¹² to yield the corresponding dihydroxides, Si(Pc)(OH)_2 , Ge(Pc)(OH)_2 , and Sn(Pc)(OH)_2 . Condensation^{10, 13} of the monomers was then carried out by dehydration at $300\text{--}400^\circ\text{C}/10^{-3}$ torr to produce the polymers $[\text{Si(Pc)O}]_n$, $[\text{Ge(Pc)O}]_n$, and $[\text{Sn(Pc)O}]_n$ in high yield and purity. The polymer $[\text{Si(Pc)O}(\text{p-C}_6\text{H}_4\text{O})]_n$ was prepared from Si(Pc)Cl_2 and hydroquinone by the literature procedure.^{13b} Halogen doping was achieved by reacting the powdered polymers with solutions of the appropriate halogens or with halogen vapor. Stoichiometry was determined by elemental analysis.

Charge transport measurements were performed on compressed, polycrystalline pellets using standard four-probe ac or dc van der Pauw methods.¹⁴ X-ray powder diffraction studies were carried out with a Picker 6147 diffractometer using filtered $\text{CrK}\alpha$ radiation. Resonance Raman spectra were obtained on spinning samples using $\text{Ar}^+(5145\text{\AA})$ excitation. Static magnetic susceptibility studies were performed with a Faraday balance using HgCo(SCN)_4 as a calibrant. Appropriate corrections were made for diamagnetism.

Results and Discussion

Dehydration of dihydroxy silicon, germanium, and tin phthalocyanines produces phthalocyaninato polysiloxane, polygermyloxane, and polystannyloxane materials^{10, 13} in which the macrocycles are rigidly held in a face-to-face configuration. This geometry is illustrated in Figure 1. In the case of M = silicon, the backbone of the polymer is the well-known, robust silicone structure.¹⁵ The $[M(\text{Pc})\text{O}]_n$ materials are electrical insulators, however doping with iodine or bromine produces dramatic increases in the electrical conductivity (Table I). Depending on the concentrations of reagents employed, the doping can be achieved over a wide range of stoichiometries, as can be seen in Table I. The iodinated phthalocyaninato polymers appear to be indefinitely stable to air and water; the iodine can only be driven off by prolonged heating at temperatures in excess of 100° C.

The effect of the halogenation on the stack electronic structure has been investigated by resonance Raman spectroscopy. These studies^{5, 8} reveal the absence of significant quantities of $I_2(\nu = 207 \text{ cm}^{-1})$. Rather, electron transfer to the halogen has taken place, and the characteristic scattering pattern of the I_3^- totally symmetric stretching fundamental (accompanied by the usual overtone progression) is observed at 108 cm^{-1} (Figure 2). In the case of high iodine concentrations, the 160 cm^{-1}

transition assignable to I_5^- is also detected.^{5,8} Thus, the large increase in electrical conductivity can be directly attributed to oxidation of the cofacial macrocyclic array.

It is important before charge transport properties are discussed further, to establish the polymer structure depicted in Figure 1 in greater metrical detail. X-ray powder diffraction patterns of the $[M(Pc)O]_n$ and $\{[M(Pc)O]I_x\}_n$ materials are nearly identical. Furthermore, these patterns can be indexed in the tetragonal crystal system and are very similar to the powder diffraction patterns of $Ni(Pc)I_{L0}$ ^{6c} and $Ni(dpg)_2I_{L0}$ ^{5b} (dpg = diphenylglyoximate). These two systems have been studied by single crystal X-ray diffraction techniques and the crystal structures are found to consist of stacks of partially oxidized metal-lomacrocycle units and chains of polyiodide molecules extending parallel to the c direction. The crystal structure of $Ni(Pc)I_{L0}$ is illustrated in Figure 3. From the single crystal results, the stacking intervals ($c/2$) are found to be 3.244 (3) Å ($Ni(Pc)I_{L0}$) and 3.271(1) Å ($Ni(dpg)_2I_{L0}$). The stacking intervals in the cofacial polymers can be derived from the indexed powder patterns and are found to be 3.33(2) Å (Si-O-Si), 3.51(2) Å (Ge-O-Ge), and 3.95(2) Å (Sn-O-Sn). The reliability of these parameters and support for the $[M(Pc)O]_n/\{[M(Pc)O]I_x\}_n$ structural proposal is supported by several lines of evidence. First, a model for the cofacial metallomacrocycle chain in $[Si(Pc)O]_n$ and

$\{\text{Si}(\text{Pc})\text{O}\}_{\text{I}_x}_n$ is derived from the $\{\text{Si}(\text{Pc})\text{O}\}$ fragment in the molecule $[(\text{CH}_3)_3\text{SiO}]_2(\text{CH}_3)\text{SiO}\{\text{Si}(\text{Pc})\text{O}\}_3\text{Si}(\text{CH}_3)[\text{OSi}(\text{CH}_3)_3]_2$.¹⁶ Here single crystal X-ray diffraction studies reveal linear $\text{Pc}(\text{Si})-\text{O}-(\text{Si})\text{Pc}$ linkages and an interplanar spacing of $3.324(2)\text{\AA}$. This result is presented in Figure 4. In regard to the structures of the polygermyloxane and polystannyloxane macromolecules, the powder diffraction-derived interplanar spacings are in favorable agreement with those estimated from ionic radii assuming linear $\text{Ge}-\text{O}-\text{Ge}$ and $\text{Sn}-\text{O}-\text{Sn}$ linkages, i. e. $3.58\text{\AA}$ for $[\text{Ge}(\text{Pc})\text{O}]_n$ and $\{\text{Ge}(\text{Pc})\text{O}\}_{\text{I}_x}_n$; $3.90\text{\AA}$ for $[\text{Sn}(\text{Pc})\text{O}]_n$ and $\{\text{Sn}(\text{Pc})\text{O}\}_{\text{I}_x}_n$.¹⁷ There is ample precedent for molecules with linear $\text{Ge}-\text{O}-\text{Ge}$ and $\text{Sn}-\text{O}-\text{Sn}$ linkages.¹⁸

As concerns the charge transport data, it can be seen (Table I) that the general trend in conductivity is $\sigma_{\text{Si}} \gtrsim \sigma_{\text{Ge}} > \sigma_{\text{Sn}}$. Since the transport properties of iodine - oxidized metallophthalocyanines are known to be largely ligand-dominated and insensitive to the identity of the metal,^{6, 19} the M dependence of $\{\text{M}(\text{Pc})\text{O}\}_{\text{I}_x}_n$ conductivity appears largely to reflect differences in interplanar spacing. Variable temperature studies indicate that the conductivity of the polycrystalline $\{\text{M}(\text{Pc})\text{O}\}_{\text{I}_x}_n$ materials is thermally activated (Figure 5) and least-squares fits to equation (1) give the apparent activation parameters compiled in Table I.

$$\sigma = \sigma_0 e^{-\Delta/kT} \quad (1)$$


The general trend is $\Delta_{\text{Si}} \lesssim \Delta_{\text{Ge}} < \Delta_{\text{Sn}}$. The doped face-to-face polymers possess high thermal stability, and samples of the $\{\text{[Si(Pc)O]I}_x\}_n$ materials could be studied to 300° C with only minor degradation in subsequently measured room temperature conductivity. To view the magnitude of the $\{\text{[M(Pc)O]I}_x\}_n$ conductivities in perspective, an informative comparison can be made with data for $\text{Ni(Pc)I}_{1.0}$ pressed polycrystalline pellets and single crystals. The published powder parameters for this "molecular metal", $\sigma(300^\circ \text{ K}) = 0.7$ (ohm cm)^{6b}⁻¹, $\Delta = 0.04$ eV, are comparable to the those of the most conductive phthalocyaninato polysiloxane and polygermyloxane samples. As already noted, conductivities of iodinated metallophthalocyanines are rather insensitive to metal, and the Pc(Ni)-(Ni)Pc distance of 3.244(3) Å is only slightly greater than the Pc(Si)-O-(Si)Pc distance of 3.33(2) Å. Experience indicates that single crystal conductivities of low-dimensional materials are typically 10^2 - 10^3 greater along the molecular stacking axis than as measured for compressed, polycrystalline samples, in which conductivity is averaged over all crystallographic directions and is subject to interparticle contact effects.^{2, 6, 20}

Thus, the fact that c axis single crystal conductivities of $\text{Ni(Pc)I}_{1.0}$ are as high as 600 (ohm cm)⁻¹ and obey a $T^{-1.9}$ temperature dependence down to ca. 60° K,^{6a} strongly suggests that $\{\text{[Si(Pc)O]I}_x\}_n$ and

possibly $\{[\text{Ge}(\text{Pc})\text{O}]\text{I}_{\text{x}}\}_n$ conductivities will be metal-like in the stacking direction.

Further support for a highly delocalized electronic structure in the $\{[\text{M}(\text{Pc})\text{O}]\text{I}_{\text{x}}\}_n$ materials is derived from variable temperature studies of magnetic susceptibility. As is the case for many low-dimensional mixed valence materials,^{2, 6b, 21} we find the susceptibilities of the $\{[\text{Sn}(\text{Pc})\text{O}]\text{I}_{\text{x}}\}_n$, $\{[\text{Ge}(\text{Pc})\text{O}]\text{I}_{\text{x}}\}_n$, and $\{[\text{Sn}(\text{Pc})\text{O}]\text{I}_{\text{x}}\}_n$ macromolecules to be only modestly paramagnetic at room temperature and only weakly dependent on temperature. Representative data are shown in Figure 6. We tentatively attribute increases in susceptibility at low temperature to paramagnetic impurities.

The effect of drastically increasing the interplanar separation has also been investigated. Thus, doping experiments employing the usual iodination procedure were conducted with the silicon phthalocyaninato polymer having bridging p-diphenolate linkages as shown below. The interesting result is that only traces of iodine

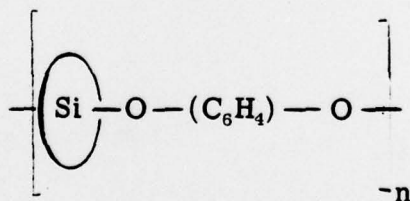

are incorporated, and the resonance Raman spectrum reveals only the presence of I_2 . The electrical conductivity remains insulating. Thus, it appears at this stage that the incomplete charge transfer state cannot be attained without a critical proximity and orientation of the arrayed subunits. Further experiments are in progress to better define these requirements, and to relate them to charge transport.

This work represents an initial attempt to learn how to control molecular stacking in low-dimensional mixed valence materials. The approach to this problem through polymer design offers the possibility of new ways to control and to understand those fundamental factors which govern charge conduction in molecular solids. Furthermore, this strategy offers new ways to tailor materials for optimum performance and processing characteristics.

Acknowledgments

This research was generously supported by the Office of Naval Research and by the NSF-MRL program through the Materials Research Center of Northwestern University (grant DMR76-80847 AOl).

References

1. Camille and Henry Dreyfus Teacher-Scholar.
2. a. Devreese, J. T.; Evrard, V. E.; Van Doren, V. E., Highly Conducting One-Dimensional Solids, Plenum Press, N. Y., 1979.
- b. Torrance, J. B. Accts. Chem. Res., 1979, 12, 79-86.
- c. Miller, J. S.; Epstein, A. J., eds., Synthesis and Properties of Low-Dimensional Materials, Ann. N. Y. Acad. Sci., 1978, 313.
- d. Keller, H. J., ed. Chemistry and Physics of One-Dimensional Metals, Plenum Press, New York, 1977.
- e. Miller, J. S.; Epstein, A. J. Prog. Inorg. Chem., 1976, 20, 1-151.
3. For discussions of the structural chemistry of low-dimensional materials see:
 - a. Kistenmacher, T. J. in reference 2c, p. 333-342.
 - b. Megtert, S.; Pouget, J. P.; Comes, R. in reference 2c, p. 234-243.
 - c. Stucky, G. D.; Schultz, A. M.; Williams, J. M. Ann. Rev. Mater. Sci., 1977, 7, 301-339.
 - d. Besspalov, B. P.; Titov, V. V. Russ. Chem. Rev., 1975, 44, 1091-1108.
 - e. Dahm, D. J.; Horn, P.; Johnson, G. R.; Miles, M. G.; Wilson, J. D. J. Cryst. Mol. Struct., 1975, 5, 27-34.
 - f. Herbstein, F. H. Perspect. Struct. Chem., 1971, IV, 166-395.
4. For discussion of the possible importance of lattice librations and translations in TTF-TCNQ and related materials, see:

- a. Weger, M.; Gutfreund, H. Comments Solid State Phys., 1978, 8, 135-146.
 - b. Gutfreund, H.; Weger, M. Phys. Rev. B, 1977, 16, 1753-1755.
 - c. Weger, M.; Friedel, J. J. Phys. (Paris), 1977, 38, 241-258.
 - d. Morawitz, H. Phys. Rev. Lett., 1975, 34, 1096-1099.
5. a. Marks, T.J. in reference 2c, p. 594-616.
 - b. Cowie, M.A.; Gleizes, A.; Grynkewich, G.W.; Kalina, D.W.; McClure, M.S.; Scaringe, R.P.; Teitelbaum, R.C.; Ruby, S.L.; Ibers, J.A.; Kannewurf, C.R.; Marks, T.J. J. Amer. Chem. Soc., 1979, 101, 2921-2936.
 - c. Brown, L.D.; Kalina, D.W.; McClure, M.S.; Ruby, S.L.; Schultz, S.; Ibers, J.A.; Kannewurf, C.R.; Marks, T.J. J. Amer. Chem. Soc., 1979, 101, 2937-2947.
 - d. Lin, L.-S.; Wang, J.C.; Kannewurf, C.R.; Marks, T.J., submitted for publication.
6. a. Schramm, C.J.; Stojakovic, D.R.; Hoffman, B.M.; Marks, T.J. Science, 1978, 200, 47-48.
 - b. Petersen, J.L.; Schramm, C.J.; Stojakovic, D.R.; Hoffman, B.M.; Marks, T.J. J. Amer. Chem. Soc., 1977, 99, 286-288.
 - c. Schramm, C.J.; Scaringe, R.P.; Stojakovic, D.R.; Hoffman, B.M.; Ibers, J.A.; Marks, T.J., submitted for publication.
 - d. Phillips, T.E.; Hoffman, B.M. J. Amer. Chem. Soc., 1977, 99, 7734-7736.
7. a. Mertes, K.B.; Ferraro, J.R. J. Chem. Phys., 1979, 70, 646-648.
 - b. Brill, J.W.; Mégnamisi-Bélombé, M.; Novotny, M. J. Chem. Phys., 1978, 68, 585-592.

- c. Endres, H.; Keller, H.J.; Lehmann, R.; van de Sand, H.; Vu, D.; Poveda, A. in reference 2c, p. 617-632.
- d. Miller, J.S.; Griffiths, C.H. J. Amer. Chem. Soc., 1977, 99, 749-755.
- e. Underhill, A.E.; Watkins, D.M.; Pething, R. Inorg. Nucl. Chem. Letters, 1973, 9, 1269-1273.
- 8. a. Marks, T.J.; Webster, D.F.; Ruby, S.L.; Schultz, S. J. Chem. Soc. Chem. Comm., 1976, 444-445.
- b. Teitelbaum, R.C.; Ruby, S.L.; Marks, T. J. J. Amer. Chem. Soc. 1978, 100, 3215-3217.
- c. Kalina, D.W.; Stojakovic, D.R.; Teitelbaum, R.C.; Marks, T.J., manuscript in preparation.
- 9. a. Orr, W.A.; Dahlberg, S.C. J. Amer. Chem. Soc., 1979, 101, 2875-2877, and references therein.
- b. Marks, T.J. J. Coatings Technology, 1976, 48, 53-57.
- c. Moser, F.A.; Thomas, A.L. Phthalocyanine Compounds, Reinhold, New York, 1963.
- 10. a. Esposito, J.N.; Sutton, L.E.; Kenney, M.E. Inorg. Chem. 1967, 6, 1116-1120.
- b. Kroenke, W.J.; Kenney, M.E. Inorg. Chem., 1964, 3, 251-254.
- c. Joyner, R.D.; Kenney, M.E. Inorg. Chem., 1962, 1, 717-718.
- d. Joyner, R.D.; Kenney, M.E. Inorg. Chem., 1960, 82, 5790-5796 5796.
- 11. Schoch, K.F., Jr.; Marks, T.J. manuscript in preparation.
- 12. Davison, J.B.; Wynne, K.J. Macromolecules, 1978, 11, 186-191.
- 13. a. Meyer, G.; Hartmann, M.; Wöhrle, D. Makromol. Chem., 1975, 176, 1919-1927.

- b. Meyer, G.; Wohrle, D. Makromol. Chem., 1974, 175, 714-728.
- 14. a. Seeger, K. Semiconductor Physics, Springer-Verlag, N.Y., 1973, p. 483-487.
- b. Teitelbaum, R.C. Ph.D. Thesis, Northwestern University, June 1979.
- c. Cahen, D.; Hahn, J.R.; Anderson, J.R. Rev. Sci. Instrum. 1973, 44, 1567-1568.
- 15. Saunders, K.J. Organic Polymer Chemistry, Chapman and Hall, London, 1973, Chapt. 15.
- 16. Swift, D.R. Ph.D. Thesis, Case Western Reserve University, 1970. We thank Professor Malcolm Kenney for the ORTEP drawing used in Figure 4.
- 17. Shannon, R.D. Acta. Cryst., 1976, A32, 751-767. These calculations were performed by adjusting the tabulated six-coordinate Si(IV) radius (subtracting 0.088 Å) to the unique phthalocyanine coordination environment so as to reproduce known¹⁶ Si(Pc)-O-(Si)Pc distance. The same adjustment was performed on the tabulated Ge(IV) and Sn(IV) radii to estimate the corresponding M(Pc)-O-(M)Pc distances. This is a physically reasonable adjustment since the four- and six-coordinate radii for Si(IV), Ge(IV), and Sn(IV) differ in the case of each element by 0.14 Å.
- 18. Glidewell, C.; Liles, D.C. J. Chem. Soc., Chem. Comm., 1979, 93-94, and references therein.
- 19. a. Stojakovic, D.R. Ph.D. Thesis, Northwestern University, August 1977.
- b. Schramm, C.S. Ph.D. Thesis, Northwestern University, March 1979.
- 20. a. Chiang, C.K.; Druy, M.A.; Gau, S.C.; Heeger, A.J.; Louis, E.J.; MacDiarmid, A.G.; Park, Y.W.; Shirakawa, H. J. Amer. Chem. Soc., 1978, 100, 1013-1015.

- b. Chiang, C.K.; Park, Y.W.; Heeger, A.J.; Shirakawa, H.; Louis, E.J.; MacDiarmid, A.G. J. Chem. Phys., 1978, 69, 5098-5104.
- 21. a. Scott, J.C.; Kulick, J.D.; Street, G.B. Solid State Comm., 1978, 28, 723-727.
- b. Bloch, A.N.; Carruthers, T.F.; Poehler, T.O.; Cowan, D.O. in reference 2c, p. 47-85.
- c. Heeger, A.J. in reference 2d, p. 87-135.
- d. Scott, J.C.; Garito, A.F.; Heeger, A.J. Phys. Rev. B, 1974, 10, 3131-3139.


TABLE I. ELECTRICAL CONDUCTIVITY DATA FOR
POLYCRYSTALLINE SAMPLES OF HALOGEN-DOPED
[M(Pc)O]_n MATERIALS.^a

Compound	$\sigma(\text{ohm cm})^{-1}$ ^b	Activation Energy (eV)	Interplanar Spacing (Å)
[Si(Pc)O] _n	3×10^{-8}		3.33(2)
{[Si(Pc)O]I _{0.50} } _n	2×10^{-2}		
{[Si(Pc)O]I _{1.49} } _n	2×10^{-1}	0.040 ± 0.001	3.33(2)
{[Si(Pc)O]I _{4.60} } _n	1×10^{-2}		
{[Si(Pc)O]Br _{1.00} } _n	6×10^{-2}		
[Ge(Pc)O] _n	$< 10^{-8}$		3.51(2)
{[Ge(Pc)O]I _{1.80} } _n	3×10^{-2}	0.080 ± 0.006	3.51(2)
{[Ge(Pc)O]I _{1.90} } _n	5×10^{-2}	0.060 ± 0.003	
{[Ge(Pc)O]I _{1.94} } _n	6×10^{-2}	0.050 ± 0.007	
{[Ge(Pc)O]I _{2.0} } _n	1×10^{-1}		
[Sn(Pc)O] _n	$< 10^{-8}$		3.95(2)
{[Sn(Pc)O]I _{1.2} } _n	1×10^{-6}		3.95(2)
{[Sn(Pc)O]I _{5.5} } _n	2×10^{-4}	0.68 ± 0.01	

^a Four-probe van der Pauw techniques.

^b At 300 ° K.

Figure 1. Scheme for the assembly and partial oxidation of metallo-macrocylic face-to-face polymers.

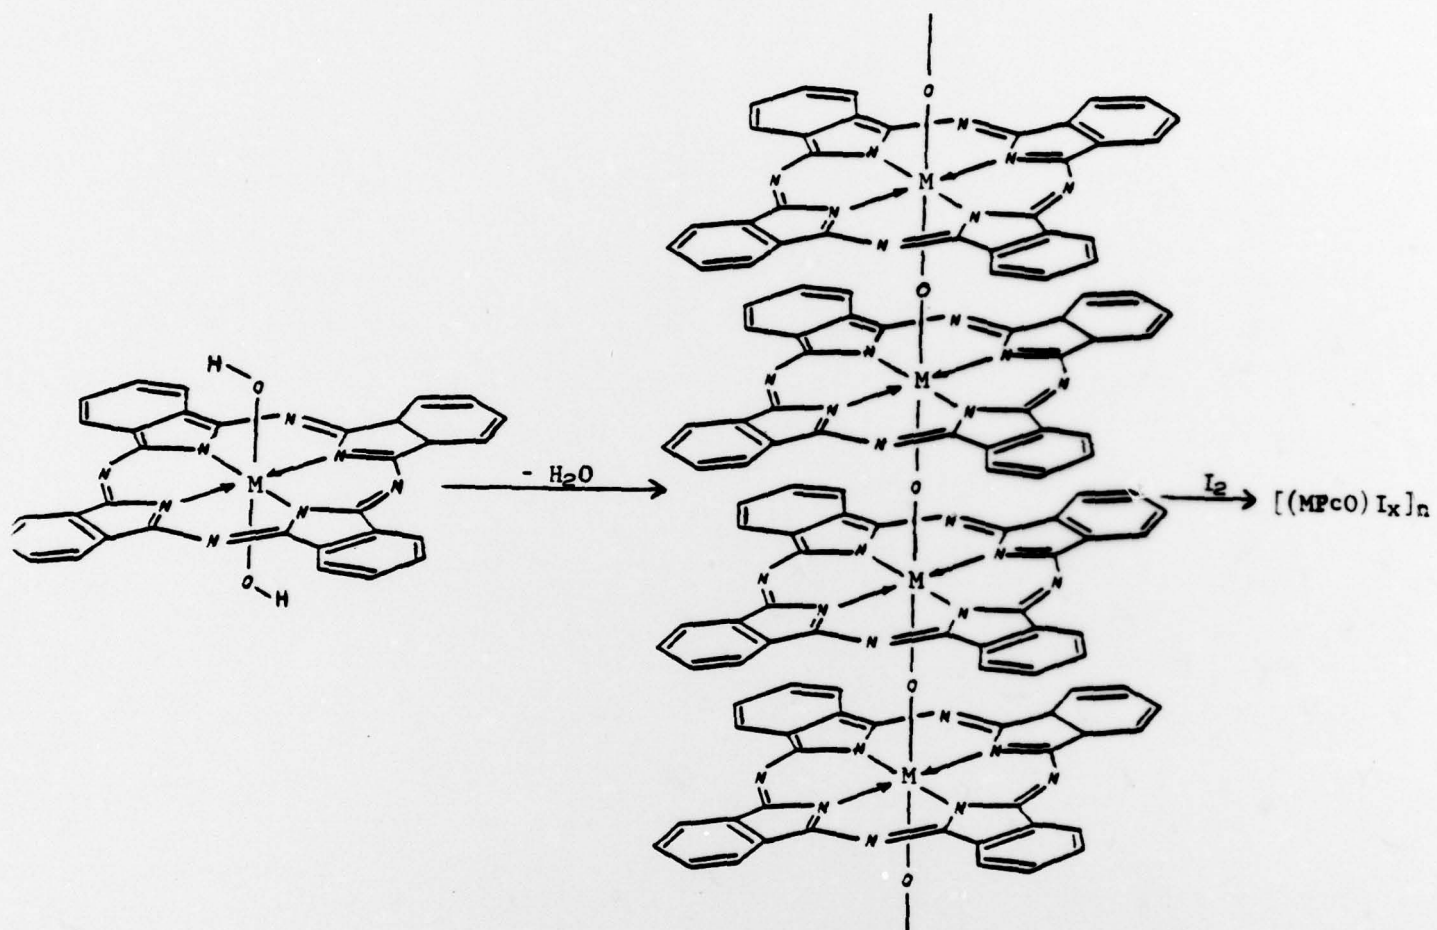

$M = Si, Ge, Sn$

**Figure 2. Resonance Raman spectra of iodinated polymers with
5145 Å (Ar⁺) excitation.**

$\{[\text{Sn}(\text{Pc})\text{O}]\text{I}_{1.20}\}_n$

$\{[\text{Ge}(\text{Pc})\text{O}]\text{I}_{1.80}\}_n$

$\{[\text{Si}(\text{Pc})\text{O}]\text{I}_{1.94}\}_n$

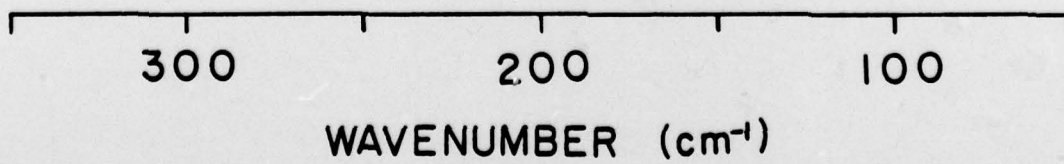


Figure 3. Crystal structural of $\text{Ni}(\text{Pc})\text{I}_{1.0}$ viewed along the stacking direction. From reference 6c.

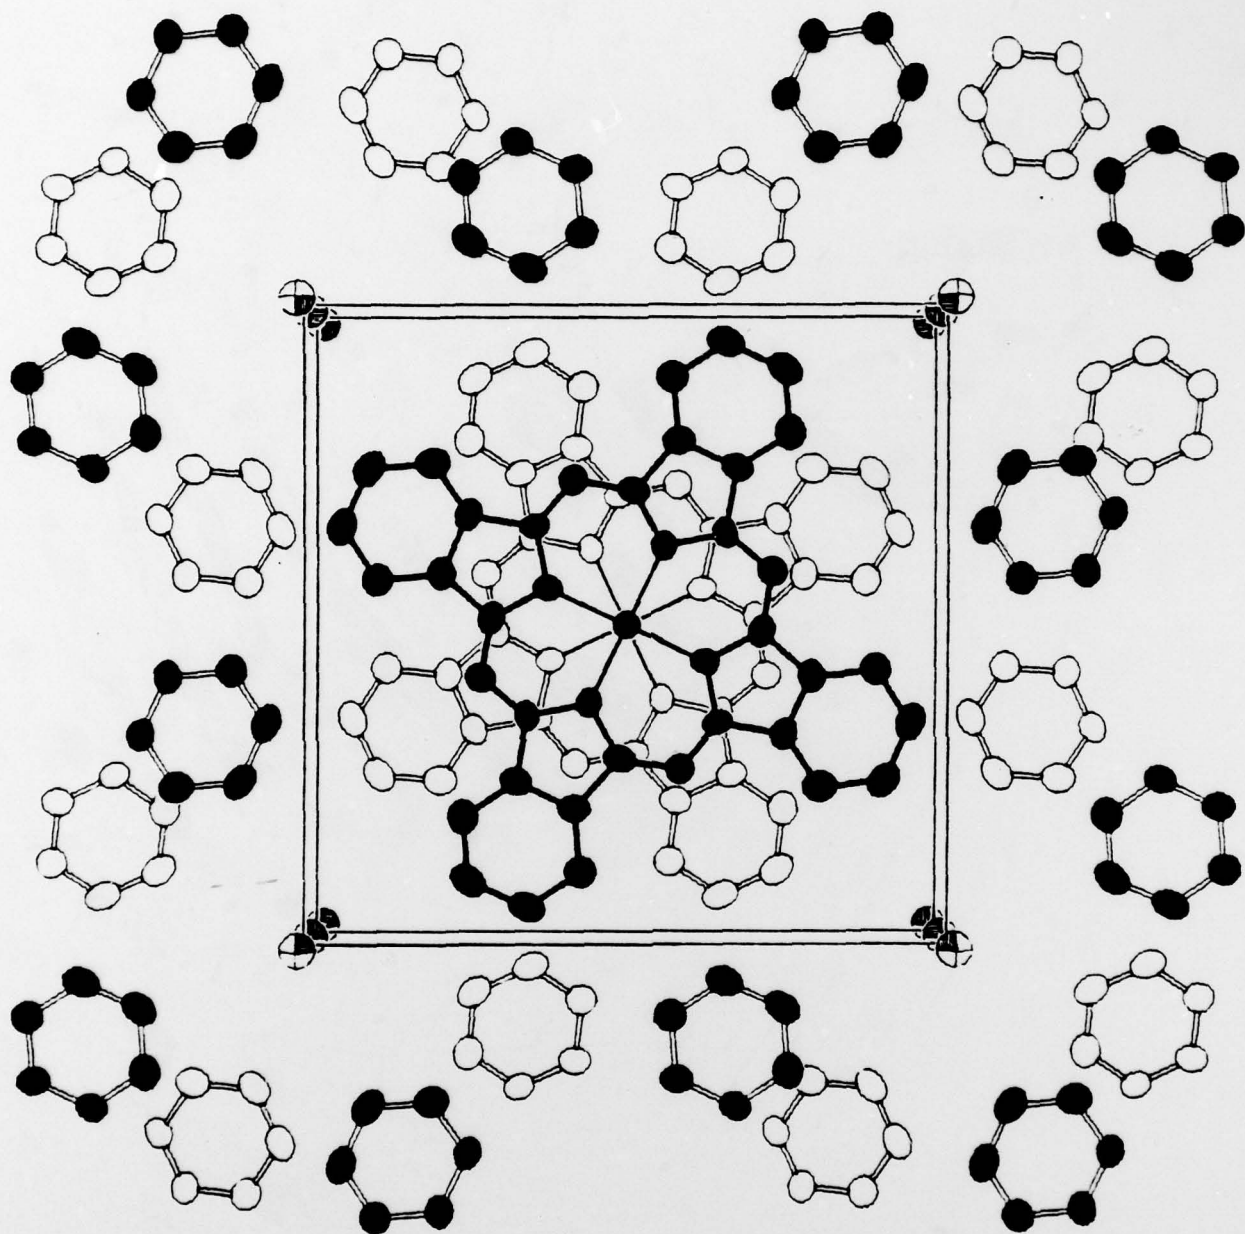


Figure 4. Crystal structure of $[(CH_3)_3SiO]_2(CH_3)SiO[Si(Pc)O]_3Si(CH_3)-[OSi(CH_3)_3]_2$ from reference 16.




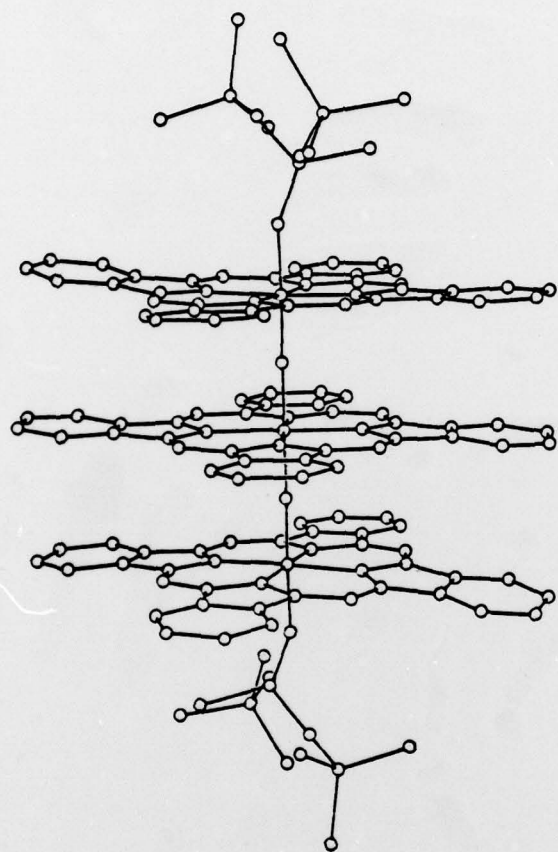


Figure 5. Four-probe electrical conductivity data for samples of iodine-doped cofacial polymers as compressed pellets. Solid lines represent a least-squares fit to equation (1).



**Figure 6. Variable temperature magnetic susceptibility data
for iodine-doped polymers.**

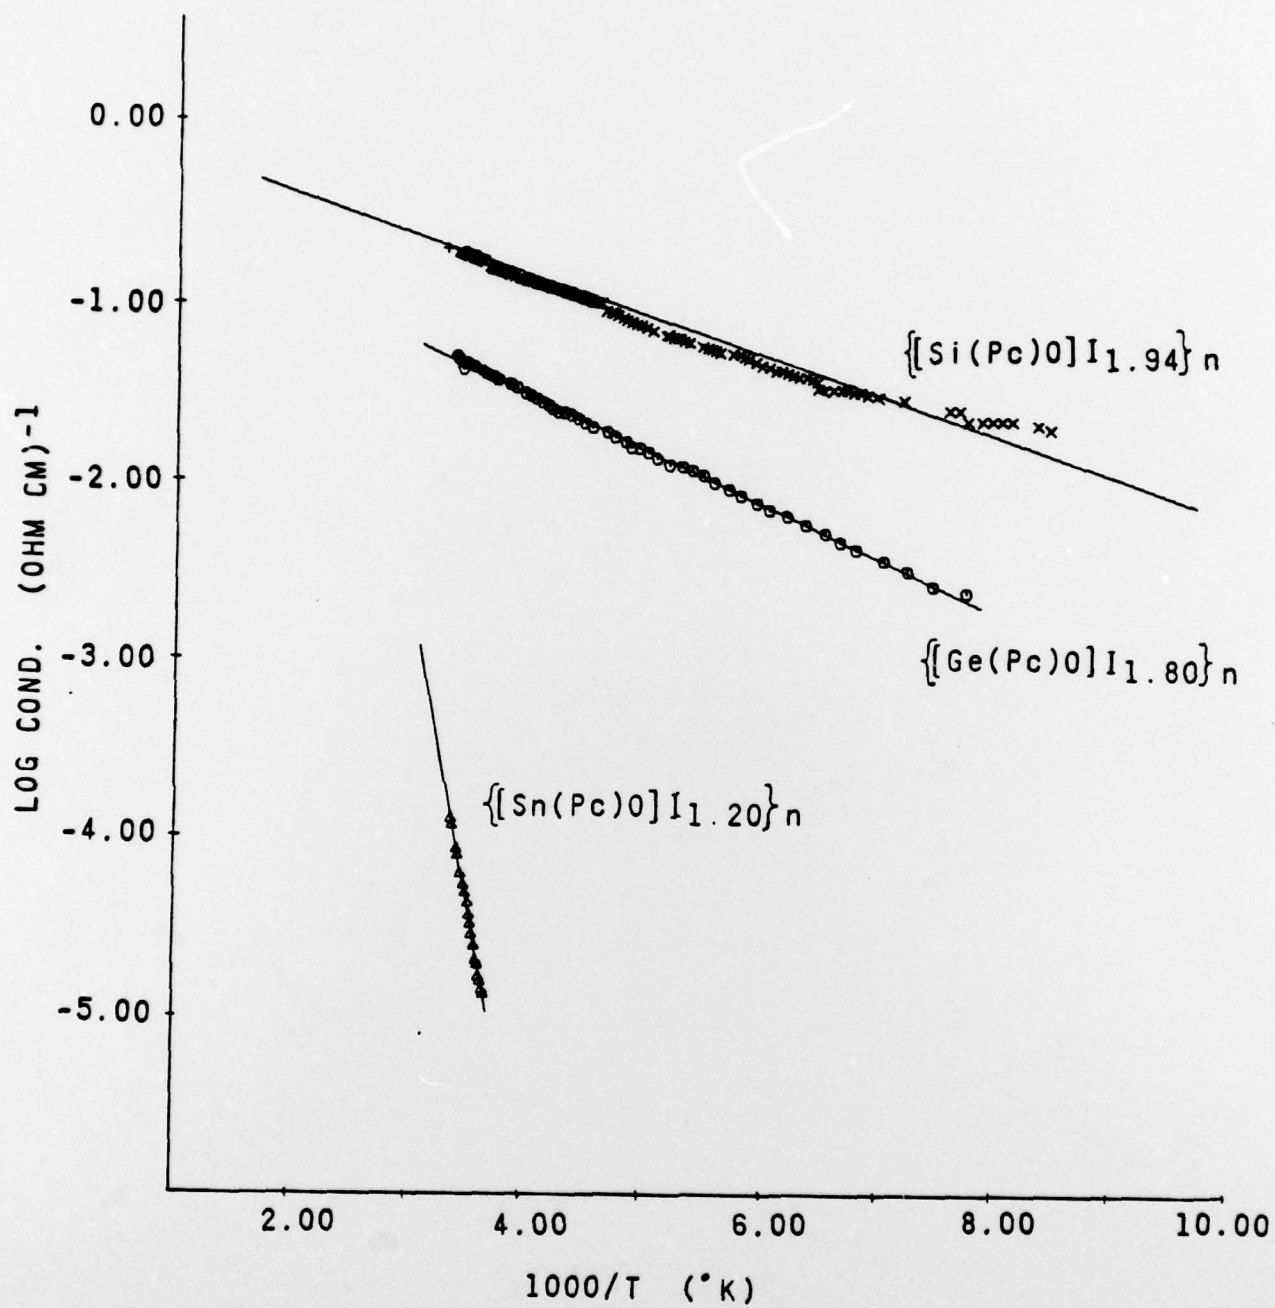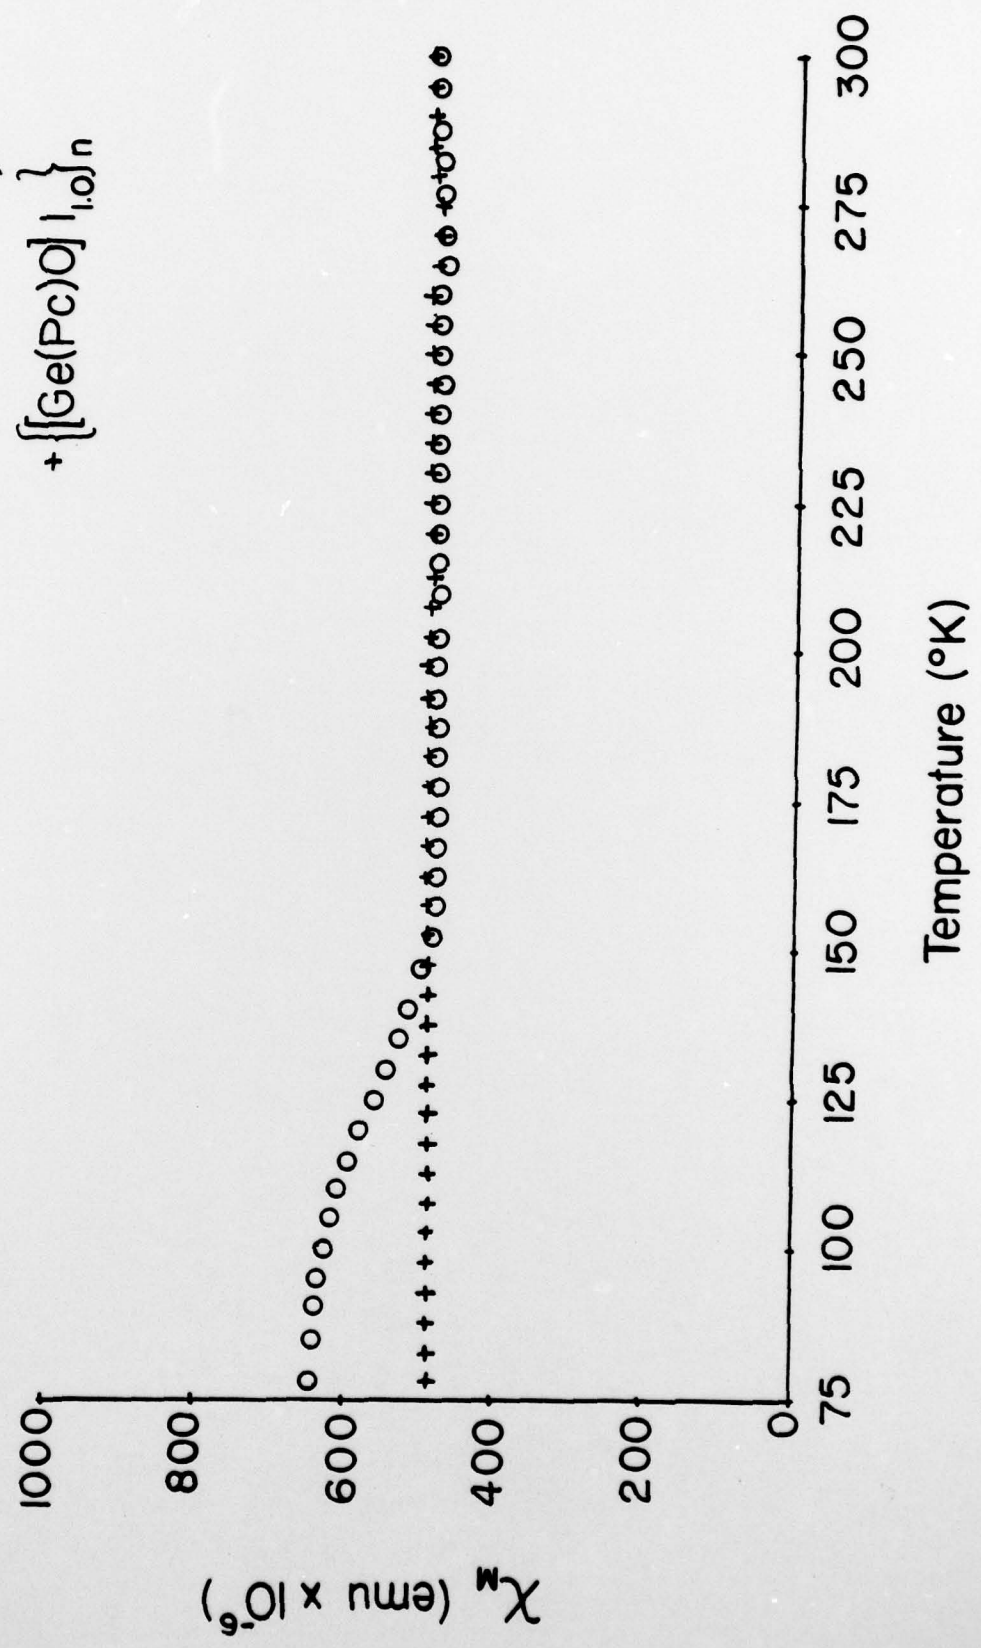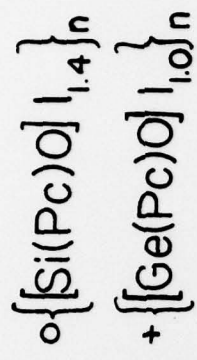

TECHNICAL REPORT DISTRIBUTION LIST, GEN

	<u>No.</u> <u>Copies</u>		<u>No.</u> <u>Copies</u>
Office of Naval Research Attn: Code 472 800 North Quincy Street Arlington, Virginia 22217	2	U.S. Army Research Office Attn: CRD-AA-IP P.O. Box 1211 Research Triangle Park, N.C. 27709	1
ONR Branch Office Attn: Dr. George Sandoz 536 S. Clark Street Chicago, Illinois 60605	1	Naval Ocean Systems Center Attn: Mr. Joe McCartney San Diego, California 92152	1
ONR Branch Office Attn: Scientific Dept. 715 Broadway New York, New York 10003	1	Naval Weapons Center Attn: Dr. A. B. Amster, Chemistry Division China Lake, California 93555	1
ONR Branch Office 1030 East Green Street Pasadena, California 91106	1	Naval Civil Engineering Laboratory Attn: Dr. R. W. Drisko Port Hueneme, California 93401	1
ONR Branch Office Attn: Dr. L. H. Peebles Building 114, Section D 666 Summer Street Boston, Massachusetts 02210	1	Department of Physics & Chemistry Naval Postgraduate School Monterey, California 93940	1
Director, Naval Research Laboratory Attn: Code 6100 Washington, D.C. 20390	1	Dr. A. L. Slafkosky Scientific Advisor Commandant of the Marine Corps (Code RD-1) Washington, D.C. 20380	1
The Assistant Secretary of the Navy (R,E&S) Department of the Navy Room 4E736, Pentagon Washington, D.C. 20350	1	Office of Naval Research Attn: Dr. Richard S. Miller 800 N. Quincy Street Arlington, Virginia 22217	1
Commander, Naval Air Systems Command Attn: Code 310C (H. Rosenwasser) Department of the Navy Washington, D.C. 20360	1	Naval Ship Research and Development Center Attn: Dr. G. Bosmajian, Applied Chemistry Division Annapolis, Maryland 21401	1
Defense Documentation Center Building 5, Cameron Station Alexandria, Virginia 22314	12	Naval Ocean Systems Center Attn: Dr. S. Yamamoto, Marine Sciences Division San Diego, California 91232	1
Dr. Fred Saalfeld Chemistry Division Naval Research Laboratory Washington, D.C. 20375	1	Mr. John Boyle Materials Branch Naval Ship Engineering Center Philadelphia, Pennsylvania 19112	1

TECHNICAL REPORT DISTRIBUTION LIST, GENNo.
Copies

Dr. Rudolph J. Marcus
Office of Naval Research
Scientific Liaison Group
American Embassy
APO San Francisco 96503

1

Mr. James Kelley
DTNSRDC Code 2803
Annapolis, Maryland 21402

1

TECHNICAL REPORT DISTRIBUTION LIST, 053

	<u>No.</u> <u>Copies</u>		<u>No.</u> <u>Copies</u>
Dr. R. N. Grimes University of Virginia Department of Chemistry Charlottesville, Virginia 22901	1	Dr. M. H. Chisholm Department of Chemistry Indiana University Bloomington, Indiana 47401	1
Dr. M. Tsutsui Texas A&M University Department of Chemistry College Station, Texas 77843	1	Dr. B. Foxman Brandeis University Department of Chemistry Waltham, Massachusetts 02154	1
Dr. M. F. Hawthorne University of California Department of Chemistry Los Angeles, California 90024	1	Dr. T. Marks Northwestern University Department of Chemistry Evanston, Illinois 60201	1
Dr. D. B. Brown University of Vermont Department of Chemistry Burlington, Vermont 05401	1	Dr. G. Geoffrey Pennsylvania State University Department of Chemistry University Park, Pennsylvania 16802	1
Dr. W. B. Fox Naval Research Laboratory Chemistry Division Code 6130 Washington, D.C. 20375	1	Dr. J. Zuckerman University of Oklahoma Department of Chemistry Norman, Oklahoma 73019	1
Dr. J. Adcock University of Tennessee Department of Chemistry Knoxville, Tennessee 37916	1	Professor O. T. Beachley Department of Chemistry State University of New York Buffalo, New York 14214	1
Dr. A. Cowley University of Texas Department of Chemistry Austin, Texas 78712	1	Professor P. S. Skell Department of Chemistry The Pennsylvania State University University Park, Pennsylvania 16802	1
Dr. W. Hatfield University of North Carolina Department of Chemistry Chapel Hill, North Carolina 27514	1	Professor K. M. Nicholas Department of Chemistry Boston College Chestnut Hill, Massachusetts 02167	1
Dr. D. Seyferth Massachusetts Institute of Technology Department of Chemistry Cambridge, Massachusetts 02139	1	Professor R. Neilson Department of Chemistry Texas Christian University Fort Worth, Texas 76129	1
Professor H. Abrahamson University of Oklahoma Department of Chemistry Norman, Oklahoma 73019	1	Professor M. Newcomb Texas A&M University Department of Chemistry College Station, Texas 77843	1