

AD-A110 160

HUGHES AIRCRAFT CO TORRANCE CA ELECTRON DYNAMICS DIV
3.2 MILLIMETER WAVE TRANSMITTER TUBE.(U)

F/G 9/1

DEC 81 J A DAVIS

DAAB07-78-C-3015

UNCLASSIFIED

EDD-W-08133


DELET-TR-78-3015-4

NL.

1 of 1
AD
A110 160



END
DATE
FILMED
3 82
DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A



LEVEL II

(12)

Research and Development Technical Report

DELET-TR-78-3015-4

3.2 MILLIMETER WAVE TRANSMITTER TUBE

Jon A. Davis

HUGHES AIRCRAFT COMPANY
Electron Dynamics Division
3100 West Lomita Boulevard
Torrance, California 90509

December 1981

Interim Report for Period 1 June 1981 – 30 September 1981

DISTRIBUTION STATEMENT

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.

Prepared for:

ELECTRONICS TECHNOLOGY & DEVICES LABORATORY

ERADCOM

US ARMY ELECTRONICS RESEARCH AND DEVELOPMENT COMMAND
FORT MONMOUTH, NEW JERSEY 07703

DTIC FILE COPY

AD A110160

NOTICES

Disclaimers

The citation of trade names and names of manufacturers in this report is not to be construed as official Government indorsement or approval of commercial products or services referenced herein.

Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER DELET-TR-78-3015-4	2. GOVT ACCESSION NO. DA of 1930	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) 3.2 Millimeter Wave Transmitter Tube		5. TYPE OF REPORT & PERIOD COVERED Interim Report 1 June 1981 - 30 Sept. 1981
		6. PERFORMING ORG. REPORT NUMBER W-08133
7. AUTHOR(s) Jon A. Davis		8. CONTRACT OR GRANT NUMBER(s) DAAB07-78-C-3015
9. PERFORMING ORGANIZATION NAME AND ADDRESS HUGHES AIRCRAFT COMPANY Electron Dynamics Division 3100 West Lomita Blvd., Torrance, CA 90509		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62705A 1L1 62705 AH 94 01 M21
11. CONTROLLING OFFICE NAME AND ADDRESS ET&D Laboratory (ERADCOM) ATTN: DELET-BM Fort Monmouth, NJ 07703		12. REPORT DATE December 1981
		13. NUMBER OF PAGES 9
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release: Distribution Unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Millimeter Wave Pulse Amplifier Coupled Cavity Traveling Wave Tube		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) During this period the beam tester was successfully re-tested with the original design magnets, which were saturated to 5100 Gauss. Because of the stronger field and, presumably, less radial field on axis because of the more uniform nature of saturated magnets, the beam transmission was dramatically improved from 77% to 96%. The successful operation of the beam tester has demonstrated that the PPM focusing scheme will provide excellent beam focusing of the 982H TWT.		

1.0 INTRODUCTION

The objective of this program is to develop a 100 watt, 50 percent duty, 93.75 GHz (3.2 millimeter) coupled cavity TWT. The TWT will be PPM focused, liquid cooled, and aperture gridded for beam modulation. The program consists of performing the necessary design, building and testing of a beam tester, and building and testing one (1) experimental RF tube. The performance requirements are shown in Table 1-1.

During this period the beam tester was successfully re-tested with the original design magnets, which were saturated to 5100 Gauss. Because of the stronger field and, presumably, less radial field on axis because of the more uniform nature of saturated magnets, the beam transmission was dramatically improved from 77% to 96%. The successful operation of the beam tester has demonstrated that the PPM focusing scheme will provide excellent beam focusing of the 982H TWT.

Accession For	
NTIS GRA&I	X
DTIC TAB	
Unannounced	
Justification	
Ext	
Dist	
Avail	
Dist	
A	

DTIC

COPY
INSPECTED
3

TABLE 1-1
982H OPERATING CHARACTERISTICS

RF Characteristics

Power Output	100 Watts
Center Frequency	93.75 GHz
Instantaneous Bandwidth	2.0 GHz
Gain	50 dB
Pulse Length	25 μ sec (max.)
PRF	20 kHz (max.)
Duty Cycle	50%

Electrical Characteristics

Beam Voltage	-22 kV $\pm$ 2 kV
Beam Current	.0907A (nominal)
Body Voltage	Ground
Body Current	.020A (max.)
Collector Voltage	-12 kV $\pm$ 2 kV
Collector Current	.0907A
Grid Pulse Voltage	+1100 V
Grid Bias Voltage	-350 V
Grid Current	.001 A
Heater Voltage	6.0 V
Heater Current	1.0 A
Vac Ion Pump Voltage	3.0 kV $\pm$.3 kV
Vac Ion Pump Current	<10 μ A

Mechanical Characteristics

Cooling	Liquid
Focusing	PPM
Weight	12-14 lbs
Size	4.0" Dia. X 16" Long

2.0 BEAM TESTER

The beam tester now has 96% beam transmission, up sharply from the 77% previously obtained. This successfully proves that the PPM design is effective. The reduced body current resulted from using the original design magnets, as shown in Figure 1, but with magnets saturated to 5100 G, as opposed to the 4200 G that the SmCo magnets were originally de-Gaussed to. The fields are stronger and more uniform (no radial field on axis) with saturated SmCo.

The magnets at each end are thicker than those elsewhere, in order to compensate for the added fringing fields from the iron pole pieces. Unfortunately, hind sight and closer analysis has shown that increasing the field at the ends exacerbates end effects, in that the fields at the third magnets from the ends are reduced, and those at the second magnets are increased (Figure 2).

The end magnets can be adjusted in order to reduce the external field and the end effects. This adjustment of the end magnets was necessary to achieve the good beam transmission.

The grid characteristic curve of the beam tester is shown in Figure 3. The tube focused best at the design voltage of 22 kV, with a cathode current of 89 mA. The grid drive was 900 V, and at -300 V grid bias voltage the beam was well cut-off.

The cathode activity curve is shown in Figure 4. $E_F = 6.5$ V is the chosen value, where the cathode is space charge limited.

G6621

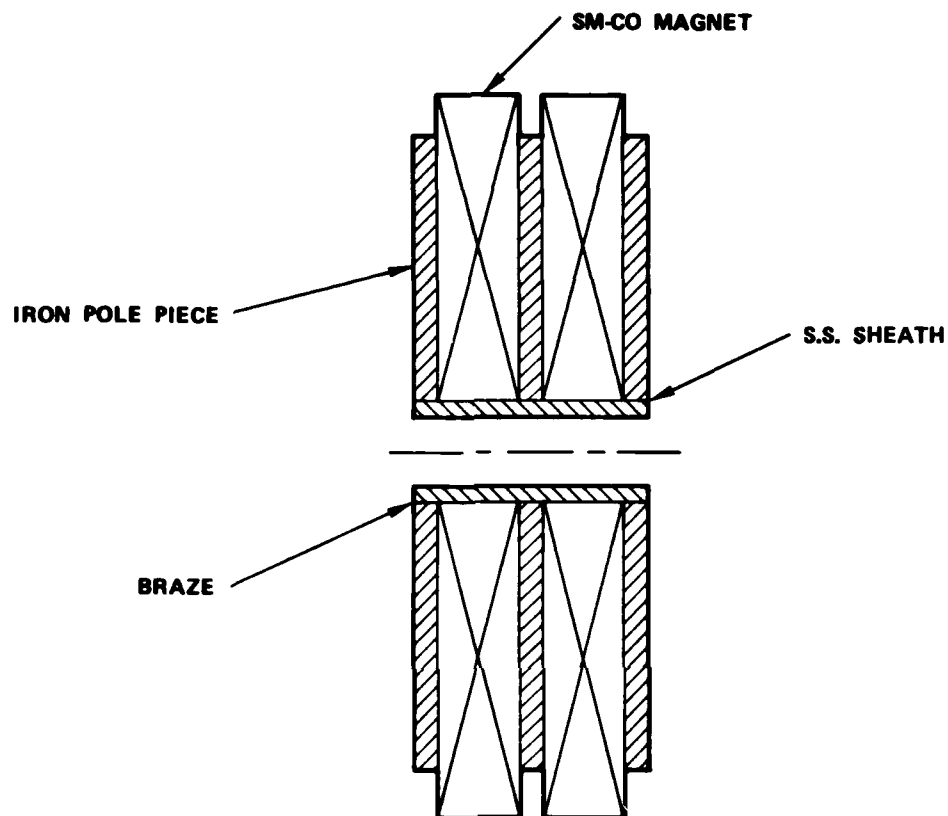


Figure 1 Magnet design.

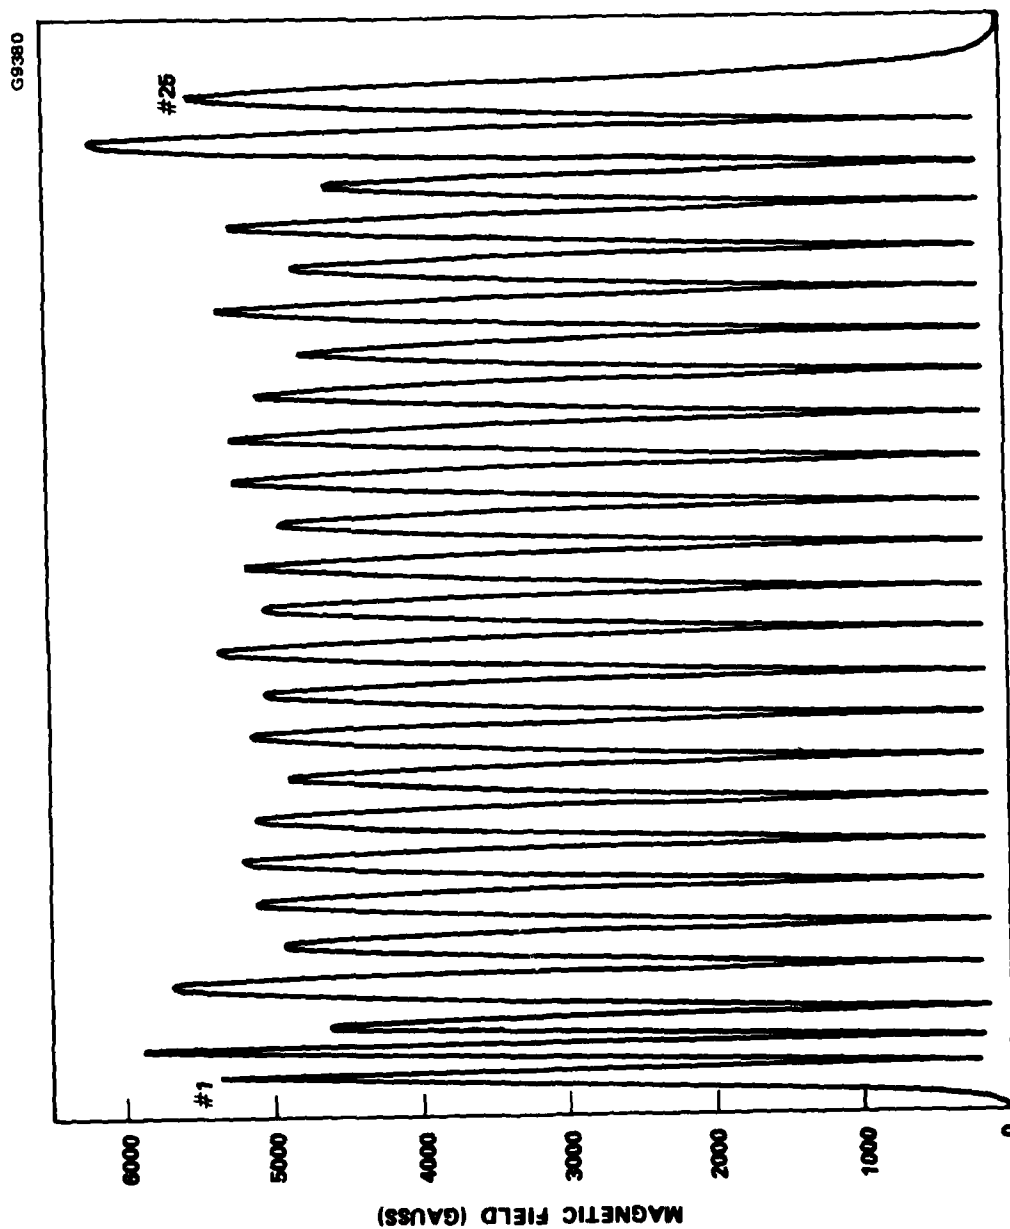


Figure 2 Field plot of saturated magnets.

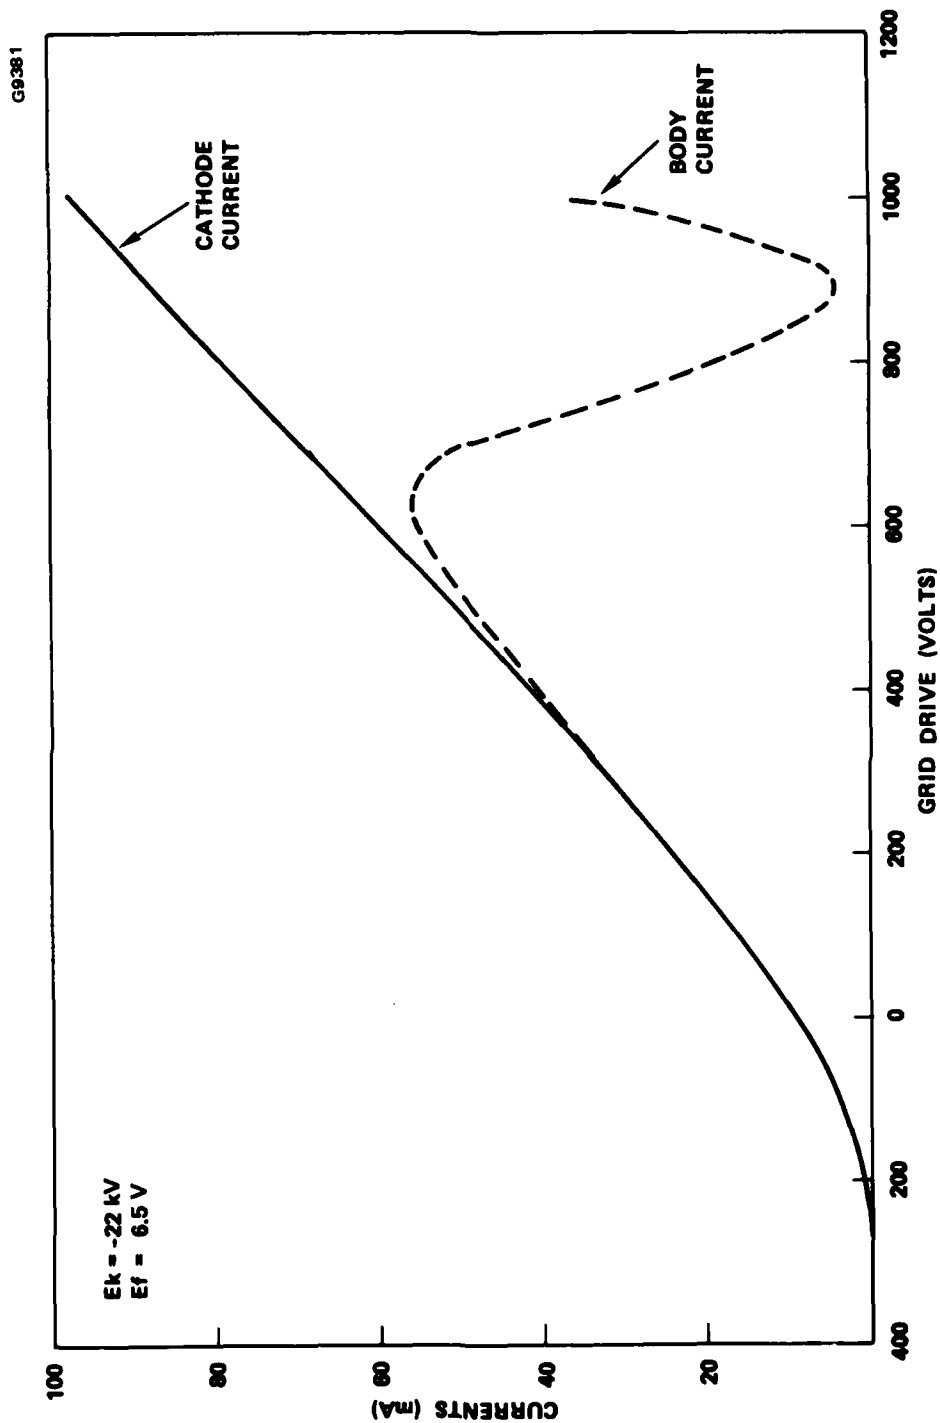


Figure 3 Grid characteristic curve.


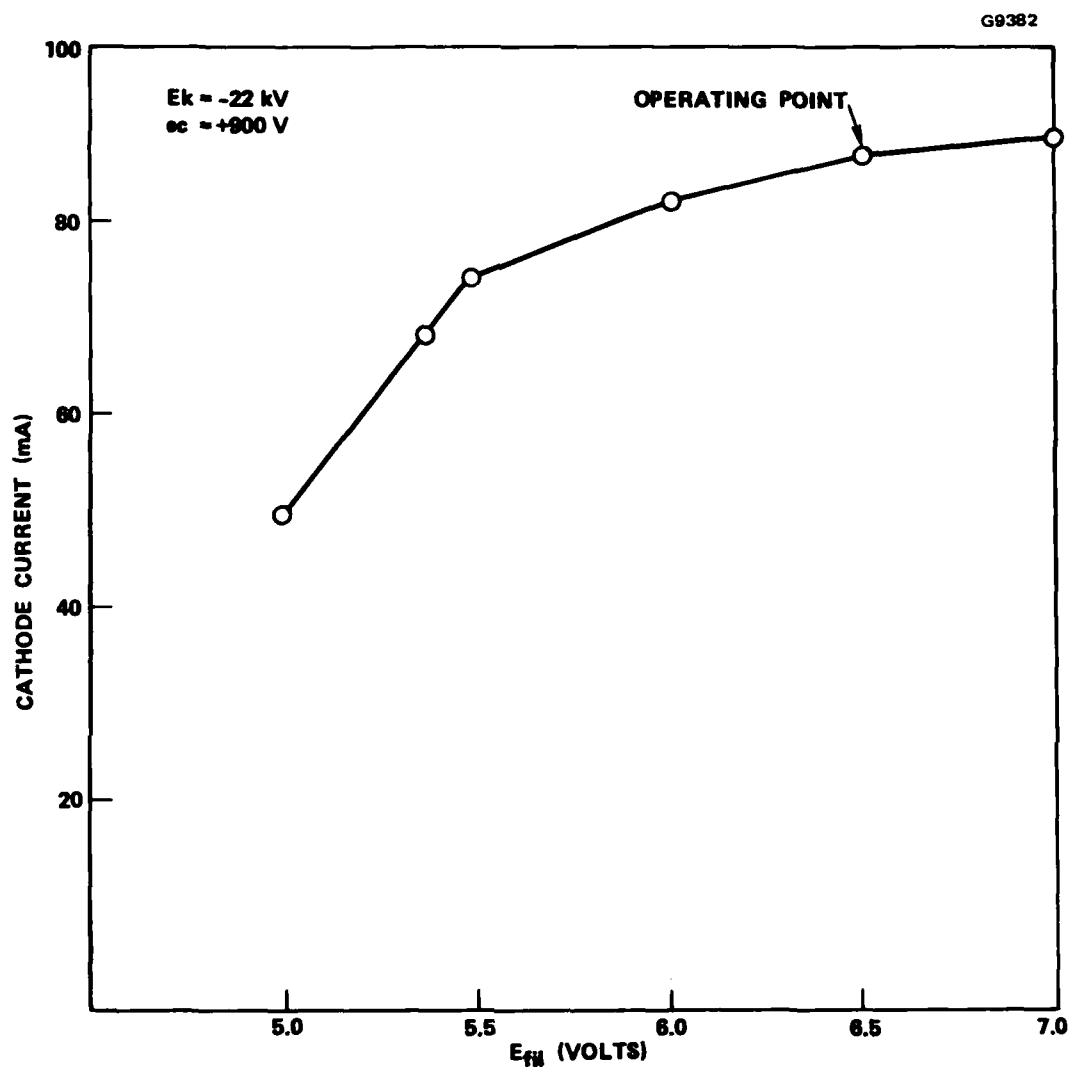


Figure 4 Cathode activity.

3.0 TWT STATUS

There are still a few parts needed to be fabricated for the TWT. These include miscellaneous rf cavity part for matching into the waveguides and severs, and the velocity taper parts. Also, the gun had had some design changes based on experience gained from building the gun for the beam tester, and these new parts are on order. We expect all parts by January, and will begin circuit assembly then. The collector, the gun and collector pole pieces, and vacuum sheath with brazed on pole pieces are all completed.

982H PROGRAM SCHEDULE
REVISED AUGUST 1981

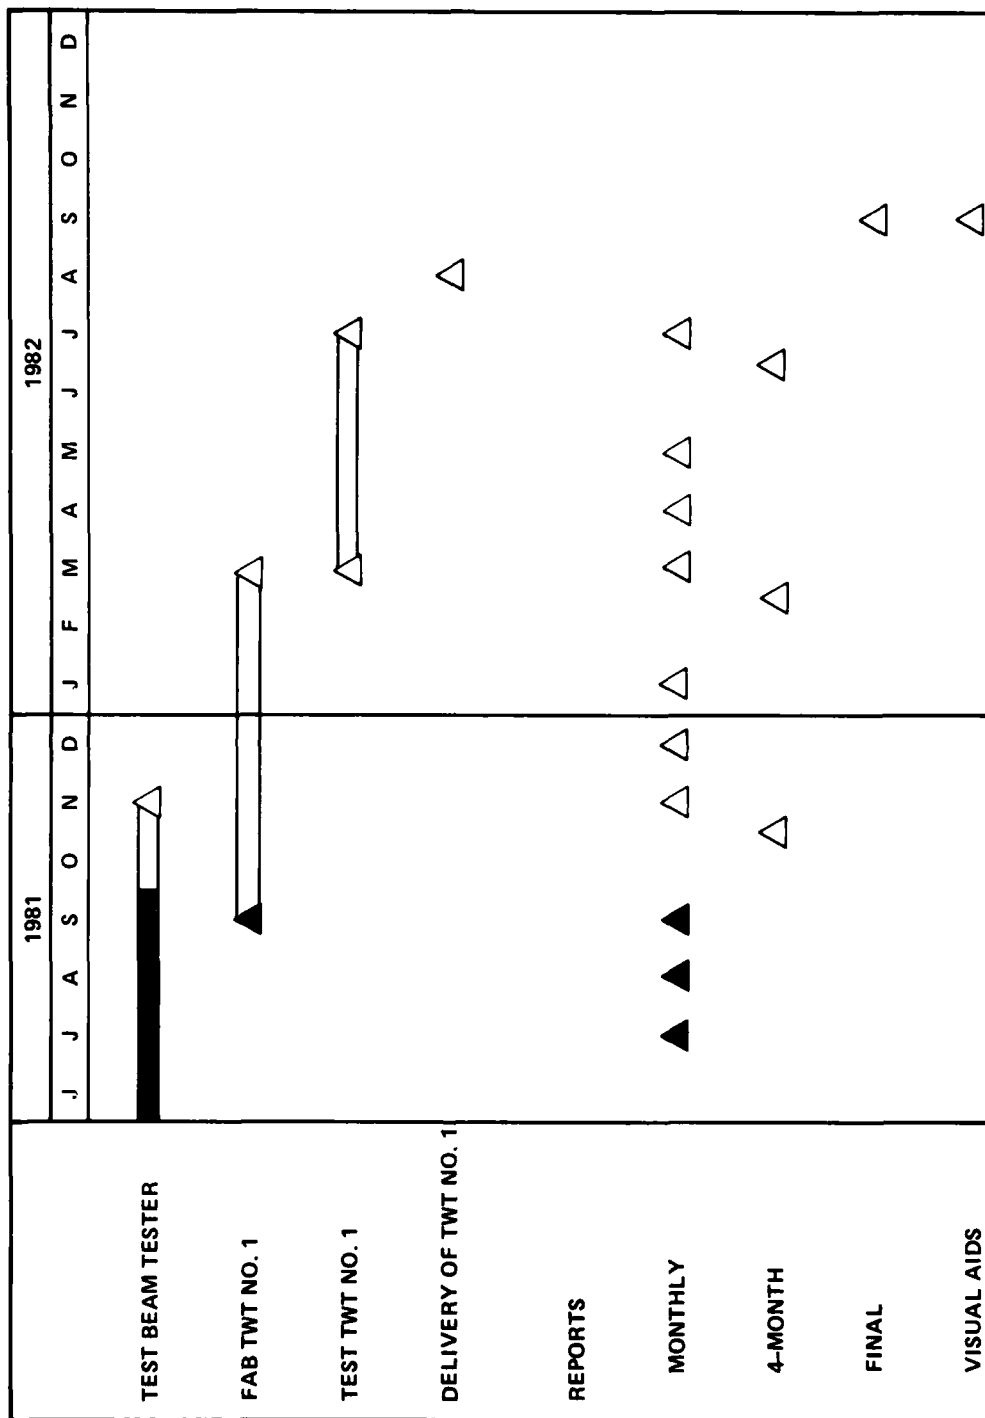

DISTRIBUTION LIST

101	Defense Documentation Center Attn: DDC-TCA Cameron Station (Bldg 5) Alexandria, VA 22314	483	Director US Army Material Systems Analysis ACTV Attn: DRXSY MP
012		001	Aberdeen Proving Ground, MD 21005
104	Defense Communications Agency Technical Library Center Code 205 (P. A. Tolovi) Washington, DC 20305	680	Commander US Army Electronics R&D Command Fort Monmouth, NJ 07703
200	Office of Naval Research Code 427 Arlington, VA 22217	1	DRDEL-SA
001		1	DELEW-D
		3	DELCS-D
205	Director Naval Research Laboratory Attn: Code 2627 Washington, DC 20375	1	DELET-D
001		1	DELET-DD
		2	DELET-DT
		5	DELET-
		1	DELS-D
		1	DELS-D-AS
301	Rome Air Development Center Attn: Documents Library (TILD) Griffiss AFB, NY 13441	1	DELS-D-L (TECH LIB)
001		2	DELS-D-L-S (STINFO)
		25	DELET-TL-B (FISCHER)
407	Director, Ballistic Missile Defense Advanced Technology Center Attn: ATC-R, PO Box 1500 Huntsville, AL 35807	705	Advisory Group on Electron Devices 201 Varick Street, 9th Floor New York, NY 10014
437	Deputy for Science & Technology Office, Assist Sec Army (R&D) Washington, DC 20310	002	
001			Office of Deputy Chief of Staff for Research Development & Acquisition Attn: DAMA-Z-E (Dr. Charles Church)
475	CDR, Harry Diamond Laboratories Attn: Library 2800 Powder Mill Road Adelphi, MD 20783	001	Advanced Concepts Team Washington, DC 20310
001			Director Night Vision & Electro-Optics Laboratory DELNV-LASER Attn: Ward Trussell
477	Director US Army Ballistic Research Labs Attn: DRXBR-LB Aberdeen Proving Ground MD 210005	001	Fort Belvoir, VA 22060
481	Harry Diamond Laboratories, DA Attn: DELHD-RCB (Dr. J. Nemerich) 2800 Powder Mill Road Adelphi, MD 20783		Engineering Experiment Station Georgia Institute of Technology Atlanta, GA 30332 Attn: Robert G. Shackelford

001	Director Ballistic Missile Defense Advanced Technology Center Attn: BMDATC-R (Don Schenk) PO Box 1500 Huntsville, AL 35809	001	Commander ARRADCOM Attn: DRDAR-SCF-I (Joseph Lehman) Dover, NJ 07801
001	C. Kirksey F 46 Naval Surface Weapons Center Silver Springs, MD 20910	001	Edward K. Reedy Georgia Tech/EES 225 North Avenue Atlanta, GA 30332
001	Harold Coward Code F-14 Naval Surface Weapons Center Dahlgren, VA 22448		Commander, AARADCOM Picatinny Arsenal Attn: DRDAR-SCF-IM (Murray Rosenbluth) Dover, NJ 07801
001	David S. Ladd Radar and Instrumentation Laboratory Engineering Experiment Station Georgia Institute of Technology Atlanta, GA 30332	001	Dr. Mac Gregor Shared Applications, Inc. 611 Church Street Ann Arbor, MI
001	John P. Watjen Stanford Research Institute 333 Ravenswood Avenue Menlo Park, CA 94025	001	Commander AARADCOM Picatinny Arsenal Attn: DRDAR-SCF-IM (Mr. O'Brian) Dover, NJ 07801
001	Director NVEO Lab Attn: DELNV-L (Dr. R. Shurtz) Fort Belvoir, VA 22060	001	Commander AARADCOM Picatinny Arsenal Attn: DRDAR-SCF-IM (Mr. Yarosh) Dover, NJ 07801
001	Commander Rome Air Development Center Attn: RADC/OCTP (Mr. Frank Welker) Griffiss Air Force Base, NY 13441	001	Commander AARADCOM Picatinny Arsenal DRDAR-SCF-IM Attn: Mr. Donnelly Dover, NJ 07801
001	Director Naval Research Laboratory Attn: R. Van Wagoner Washington, DC 20375		Mr. Gerry Kooyers Universal Computer Applications 701 Welch Road Palo Alto, CA 94304
001	Commander USA MIRADCOM Attn: DRD-MI-TEG (Dr. George Emmons) Redstone Arsenal, AL 35809		

Commander
Naval Ocean Systems Command
Attn: R. Wills, Code 8212
271 Catalina Blvd.
001 San Diego, CA 92152

Dr. Paul Coleman
University of Illinois
001 Urbana, Illinois

Dr. Richard Grow
University of Utah
Electrical Engineering Dept.
001 Salt Lake City, UT

