

AD A147 423

SNOW CHARACTERIZATION MEASUREMENTS FROM SNOW TWO/SMOKE
WEEK VIII) AIR FORCE GEOPHYSICS LAB HANSCOM AFB MA
B A MAIN ET AL. 26 OCT 84 AFGL-TR-84-0277


1/1

UNCLASSIFIED

F/G 4/2

NI





UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

12

REPORT DOCUMENTATION PAGE

AD-A147 423

2b. DECLASSIFICATION/DOWNGRADING SCHEDULE

4. PERFORMING ORGANIZATION REPORT NUMBER(S)

AFGL-TR-84-0277

6a. NAME OF PERFORMING ORGANIZATION
Air Force Geophysics Laboratory6b. OFFICE SYMBOL
(If applicable)
LYC

1b. RESTRICTIVE MARKINGS

3. DISTRIBUTION/AVAILABILITY OF REPORT

Approved for public release;
Distribution unlimited.

5. MONITORING ORGANIZATION REPORT NUMBER(S)

6a. NAME OF PERFORMING ORGANIZATION

Air Force Geophysics Laboratory

6b. OFFICE SYMBOL
(If applicable)
LYC

7a. NAME OF MONITORING ORGANIZATION

6c. ADDRESS (City, State and ZIP Code)

Hanscom AFB, MA 01731

7b. ADDRESS (City, State and ZIP Code)

8a. NAME OF FUNDING/SPONSORING ORGANIZATION

Air Force Geophysics Laboratory

8b. OFFICE SYMBOL
(If applicable)
LYC

9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER

8c. ADDRESS (City, State and ZIP Code)

Hanscom AFB, MA 01731

10. SOURCE OF FUNDING NOS.

PROGRAM
ELEMENT NO.PROJECT
NO.TASK
NO.WORK UNIT
NO.

62101F

6670

667012

66701206

11. TITLE (Include Security Classification) Snow Characterization Measurements from SNOW-TWO/Smoke Week VI

12. PERSONAL AUTHOR(S)

BARBARA A. MAIN, ROBERT O. BERTHEL

13a. TYPE OF REPORT

REPRINT

13b. TIME COVERED

FROM TO

14. DATE OF REPORT (Yr., Mo., Day)

1984 October 26

15. PAGE COUNT

9

16. SUPPLEMENTARY NOTATION

Presented at SNOW-TWO/Smoke Week VI Symposium 14-16 Aug 1984, CRREL, Hanover, NH.

17. COSATI CODES

FIELD GROUP SUB. GR.

18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)

FALL VELOCITY

SNOW TWO/SMOKE WEEK VI

SNOW RATE

SNOW/ONE/A

CRYSTAL STRUCTURE

SNOW/ONE/B

19. ABSTRACT (Continue on reverse if necessary and identify by block number)

Snow characterization measurements acquired during SNOW-TWO/Smoke Week VI are presented. A summary of data for 8 days in January 1984 is given. These data consist of fall velocity, snow structure, and snowrate as recorded by Laboratory prototype equipment. A new concept of back lighting on the fall velocity indicator is discussed and data examples shown. Snowrate plots, fall velocity and crystal type information are presented for selected periods.

20. DISTRIBUTION/AVAILABILITY OF ABSTRACT

UNCLASSIFIED/UNLIMITED ☒ SAME AS RPT. ☐ DTIC USERS ☐

21. ABSTRACT SECURITY CLASSIFICATION

UNCLASSIFIED

22a. NAME OF RESPONSIBLE INDIVIDUAL

BARBARA A. MAIN

22b. TELEPHONE NUMBER

(Include Area Code)
(617) 861-2947

22c. OFFICE SYMBOL

LYC

DTIC
ELECTED
NOV 13 1984
S E D

DTIC FILE COPY.

AFGL-TR-84-0277

SNOW CHARACTERIZATION MEASUREMENTS FROM SNOW-TWO/SMOKEWEEK VI

Barbara A. Main
Robert O. Berthel

Cloud Physics Branch (LYC)
Atmospheric Sciences Division
Air Force Geophysics Laboratory
Hanscom AFB, MA 01731

ABSTRACT

Snow characterization measurements acquired during SNOW-TWO/Smoke Week VI are presented. A summary of data for eight days in January 1984 is given. These data consist of fall velocity, snow structure, and snow rate as recorded by laboratory prototype equipment. A new concept of back lighting on the fall velocity indicator is discussed and data examples shown. Snow rate plots, fall velocity and crystal type information are presented for selected periods.

1. Introduction

Air Force Geophysics Laboratory (AFGL) measurements recording the characteristics of naturally falling snow were made at Camp Grayling, MI during January 1984, in support of SNOW-TWO/Smoke Week VI. Other related experiments were held previously in the winter 1981-1982 at Camp Ethan Allen, Jericho, VT in support of SNOW-ONE-A, and at Camp Grayling, MI during December 1982, in support of SNOW-ONE-B. The sponsoring organization for these three experiments was the U.S. Army Cold Regions Research and Engineering Laboratory

(FVI) to measure fall velocity, the snow structure recorder (SSR) for crystal identification, and the snow rate meter (SRM) to measure snowfall rate. These instruments are described and operational methods employed are discussed in previous reports, SNOW-ONE-A, Data Report (Berthel, 1982); SNOW-ONE-B, Data Report (Berthel, et.al., 1983); at Snow Symposium II (Berthel, et.al., 1982); SPIE Symposium (Plank, et. al., 1983); in an AFGL Report (Gibbons, et. al., 1983); and at Snow Symposium III (Berthel, et. al., 1983). This paper is concerned primarily with the presentation of data recorded by the three AFGL prototype instruments and analyzed for future comparisons with results of other test participants. Instrument modifications are presented.

2. Instruments

The fall velocity indicator (FVI) and the snow structure recorder (SSR) were modified for use at SNOW-TWO/Smoke Week VI.

One problem with the FVI has persisted since instrument conception, that of weak or faded video images. In the front lighting configuration used for SNOW-ONE-A and SNOW-ONE-B, strobed light was reflected from the particle into the camera. The amount of reflected light varied with crystal size, shape, structure, and spatial configuration. This variation combined with limited video resolution and image magnification made it difficult for the analyst to identify salient features on which to base measurements. This problem was compounded when a particle tumbled or oscillated as it fell, and resulted in a broad scattering of fall velocity determinations.

To enhance particle definition, it was decided to modify the FVI to a back lighting concept. A strobe lamp was mounted at the rear of the sample chamber behind a ground-glass screen such that the diffused light would enter the camera directly. This configuration provides a shadow image of the falling particle with better contrast and definition. Further, this method has permitted

SNOW CHARACTERIZATION MEASUREMENTS FROM SNOW-TWO/SNOKEWEEK VI

**Barbara A. Main
Robert O. Berthel**

**Cloud Physics Branch (LYC)
Atmospheric Sciences Division
Air Force Geophysics Laboratory
Hanscom AFB, MA 01731**

ABSTRACT

Snow characterization measurements acquired during SNOW-TWO/Smoke Week VI are presented. A summary of data for eight days in January 1984 is given. These data consist of fall velocity, snow structure, and snow rate as recorded by laboratory prototype equipment. A new concept of back lighting on the fall velocity indicator is discussed and data examples shown. Snow rate plots, fall velocity and crystal type information are presented for selected periods.

1. Introduction

Air Force Geophysics Laboratory (AFGL) measurements recording the characteristics of naturally falling snow were made at Camp Grayling, MI during January 1984, in support of SNOW-TWO/Smoke Week VI. Other related experiments were held previously in the winter 1981-1982 at Camp Ethan Allen, Jericho, VT in support of SNOW-ONE-A, and at Camp Grayling, MI during December 1982, in support of SNOW-ONE-B. The sponsoring organization for these three experiments was the U.S. Army Cold Regions Research and Engineering Laboratory (CRREL).

AFGL interests lay in three directions: fall velocity measurements, crystal identification, and snow rate measurements. The needed information was gathered by three AFGL prototype instruments: the fall velocity indicator

(SRM) to measure snowfall rate. These instruments are described and operational methods employed are discussed in previous reports, SNOW-ONE-A, Data Report (Berthel, 1982); SNOW-ONE-B, Data Report (Berthel, et.al., 1983); at Snow Symposium II (Berthel, et.al., 1982); SPIE Symposium (Flank, et. al., 1983); in an AFGL Report (Gibbons, et. al., 1983); and at Snow Symposium III (Berthel, et. al., 1983). This paper is concerned primarily with the presentation of data recorded by the three AFGL prototype instruments and analysed for future comparisons with results of other test participants. Instrument modifications are presented.

2. Instruments

The fall velocity indicator (FVI) and the snow structure recorder (SSR) were modified for use at SNOW-TWO/Smoke Week VI.

One problem with the FVI has persisted since instrument conception, that of weak or faded video images. In the front lighting configuration used for SNOW-ONE-A and SNOW-ONE-B, strobed light was reflected from the particle into the camera. The amount of reflected light varied with crystal size, shape, structure, and spatial configuration. This variation combined with limited video resolution and image magnification made it difficult for the analyst to identify salient features on which to base measurements. This problem was compounded when a particle tumbled or oscillated as it fell, and resulted in a broad scattering of fall velocity determinations.

To enhance particle definition, it was decided to modify the FVI to a back lighting concept. A strobe lamp was mounted at the rear of the sample chamber behind a ground-glass screen such that the diffused light would enter the camera directly. This configuration provides a shadow image of the falling particle with better contrast and definition. Further, this method has permitted a large reduction in the instrument's physical size. The only drawback to this method is that a mirror used to determine the third dimension of particles is now useless. As the FVI was not designed with particle identification as a prime function, this limitation is acceptable. Image comparison photos

P-84 11 2 006

Accession For	NTIS	GRA&I	DTIC	TAB	Unannounced	Justification
By	Distribution/					
Availability Codes	Avail and/or Special					
Dist	A-1					



Figure 1. Image comparison showing a reflected image on the left and a shadow image on the right.

from SNOW-ONE-B and SNOW TWO/Smoke Week VI are seen in Figure 1. The sharper image is evident. The FVI has been modified since January 84 to increase the volume of snow entering the instrument and further improvements in both definition and collection capabilities are being planned. Consideration is being given to digitizing the video for future operations.

The snow structure recorder (SSR) had some minor changes made prior to the January tests. To increase the number of particles available for analysis, the 'stop/go' mechanism was stepped down from 1 1/2" to 3/4" to decrease belt movement, thus doubling the amount of time of each sample.

1984	FVI	SSR	SEM	REMARKS
9 Jan (84-01)	1022-1535	NONE	0815-0338(10th)	Occasional very light snow - mostly dendrites
12 Jan (84-03)	0724-0757	NONE	0705-0100(13th)	One period of light snow 1-2 mm stellars, some needles
13 Jan (84-04)	0845-1200	0845-1200	0835-0100(10th)	Sporadic light snow - stellars, aggregates of stellars and dendrites to 3mm.
16 Jan (84-05)	0750-23400	0750-2400	0747-0830(17th)	Periods of light to moderate snow-needles < 1mm, dendrites stellars, and aggregates to 3mm
17 Jan (84-06)	0801-1105	0801-1105	0847-0812(10th)	Two periods of very light snow dendrites < .5mm, aggregates of dendrites < 3mm.
22 Jan (84-11) (84-12)	0850-0520 1529-1730	0800-0500 1500-1730	0850-0500 1501-1731	Periods of light snow and flurries mostly stellars 2-3mm
23 Jan (84-13)	1403-2045	1403-2045	1422-0400(24th)	Periods of light and moderate snow- stellars, dendrites.

Figure 1. Image comparison showing a reflected image on the left and a shadow image on the right.

ified since January 84 to increase the volume of snow entering the instrument and further improvements in both definition and collection capabilities are being planned. Consideration is being given to digitizing the video for future operations.

The snow structure recorder (SSR) had some minor changes made prior to the January tests. To increase the number of particles available for analysis, the 'stop/go' mechanism was stepped down from 1 1/2" to 3/4" to decrease belt movement, thus doubling the amount of time of each sample.

1984	FVI	SSR	SRM	REMARKS
9 Jan (84-01)	1022-1535	NONE	0815-0338(10th)	Occasional very light snow - mostly dendrites
12 Jan (84-03)	0724-0757	NONE	0705-0100(13th)	One period of light snow 1-2 mm stellars, some needles
13 Jan (84-04)	0845-1200	0845-1200	0855-0100(14th)	Spersadic light snow - stellars, aggregates of stellars and dendrites to 3mm.
16 Jan (84-05)	0758-23400	0758-2400	0747-0850(17th)	Periods of light to moderate snow-needles < 1mm, dendrites stellars, and aggregates to 3mm
17 Jan (84-06)	0901-1105	0801-1105	0847-0812(18th)	Two periods of very light snow dendrites <.5mm, aggregates of dendrites < 1mm.
22 Jan (84-11) (84-12)	0058-0528 1529-1730	0058-0528 1529-1730	0053-0530 1551-1751	Periods of light snow and flurries mostly stellars 2-3mm
23 Jan (84-13)	1405-2045	1405-2045	1422-0400(24th)	Periods of light and moderate snow- stellars, dendrites, amorphous, snow pellets 2-3mm
24 Jan (84-14)	1004-1208	1004-1208	0934-2354	Spersadic very light snow - snow pellets < 2mm

TABLE 1: DATA SUMMARY

Prepared by: [Signature] [Date]

Printed by: [Signature] [Date]

Since the sampling area is essentially a slot, collection efficiency is dependent upon instrument position with respect to wind direction. The instrument has been mounted on a manually rotated table that allows it to be faced into the wind. Current plans are to mechanize this table and considerations are being made to similarly configure the FVI. The differences in the numbers of particles seen on the SSR during the recent experiments are significantly greater when compared to the numbers seen of the FVI.

The snow rate meter was essentially the same as that used in SNOW-ONE-B. As no fault with the SRM has been defined at this time, we presume the current readings to be correct. There are still concerns regarding air flow around the instruments, particularly the SRM, and smoke tracking studies are being conducted.

3. SNOW TWO/Smoke Week VI Data

The availability of personnel and budget restrictions prevented our participation in the first half of the SNOW-TWO/Smoke Week IV field exercise. Our Winnebago arrived on site after the Christmas recess and the instruments were in operation from January 8th thru January 24th. Snowfall measurements were made on eight (8) separate days. Table 1 shows these periods of operation and indicates snow intensities and observed crystal types. Of these days only two, 16 and 23 January, had sufficient snow falling into all three instruments to warrant further analyses. For the other six days, very light snowfall was recorded by the SRM with very little data obtained by the FVI and SSR.

The periods of study for the 16th and 23rd were determined by the number of particles seen on the fall velocity indicator (FVI). Because of the time consuming labor involved, the studies were limited to the first fifty free falling particles of each half hour period of comparatively heavy snowfall. In addition, crystal type and fall characteristics were determined with as much accuracy as the limitations of the

snow rate data for these times were obtained.

4. 16 January 1984

On the 16th of January 1984, five study periods were selected: 2000, 2030, 2100, 2200, and 2230. All AFGL instruments were operating during these periods of relatively good snowfall. During these periods the first fifty free falling particles seen on the FVI were measured for largest dimension and for fall velocity. These measurements are shown in Figure 2, fall velocity vs size plots, with 1 the largest physical dimension. The solid lines in the figures are the least square regression lines and the dashed lines show plus or minus one standard deviation. The dots are individual particles. The size range on this day is broad with largest dimensions from .3 mm to 16.6 mm and fall velocities from .3 m sec⁻¹ to .95 m sec⁻¹. Snow types seen on the fall velocity indicator are many: stellars, spatial dendrites, aggregates of dendrites and graupel-like snow in the first and fourth cases; dendrites added in the 2030 sample; rimed dendrites and snow pellets during the 2100 sample; and rimed plates during the 2230 samples. Particles less than .3 mm are not visible on the FVI because of the limited video resolution. There appears to be some relationship between particle size and fall velocity. Similarities do exist between current analyses and those performed on SNOW-ONE-A and SNOW-ONE-B data as reported in SNOW-ONE-A and B Characterization Measurements and Data Analysis (Berthel, et al, 1983). The snow structure recorder (SSR) data was examined for the same five periods and particle types determined. Much the same particle variety observed as the FVI is seen on the SSR. Samples of the study periods are seen in Figure 3. The ability to move the instrument to face into the wind has made a significant change in the amount of data obtained. The instrument configuration continues to give good results. Samples for the five time periods are shown in Figure 4. The snow rate meter (SRM)

rotated table that allows it to be faced into the wind. Current plans are to mechanize this table and considerations are being made to similarly configure the FVI. The differences in the numbers of particles seen on the SSR during the recent experiments are significantly greater when compared to the numbers seen of the FVI.

The snow rate meter was essentially the same as that used in SNOW-ONE-B. As no fault with the SRM has been defined at this time, we presume the current readings to be correct. There are still concerns regarding air flow around the instruments, particularly the SRM, and smoke tracking studies are being conducted.

3. SNOW TWO/Smoke Week VI Data


The availability of personnel and budget restrictions prevented our participation in the first half of the SNOW-TWO/Smoke Week IV field exercise. Our Winnebago arrived on site after the Christmas recess and the instruments were in operation from January 8th thru January 24th. Snowfall measurements were made on eight (8) separate days. Table 1 shows these periods of operation and indicates snow intensities and observed crystal types. Of these days only two, 16 and 23 January, had sufficient snow falling into all three instruments to warrant further analyses. For the other six days, very light snowfall was recorded by the SRM with very little data obtained by the FVI and SSR.

The periods of study for the 16th and 23rd were determined by the number of particles seen on the fall velocity indicator (FVI). Because of the time consuming labor involved, the studies were limited to the first fifty free falling particles of each half hour period of comparatively heavy snowfall. In addition, crystal type and fall characteristics were determined with as much accuracy as the limitations of the video system allows. These measurements may not be fully representative of the natural snowfall distribution because of the small sample volume and analyst subjectivity. The snow structure recorder (SSR) was used to type particles at corresponding times. Detailed

On the 16th of January 1984, five study periods were selected: 2000, 2030, 2100, 2200, and 2230. All APGL instruments were operating during these periods of relatively good snowfall. During these periods the first fifty free falling particles seen on the FVI were measured for largest dimension and for fall velocity. These measurements are shown in Figure 2, fall velocity vs size plots, with the largest physical dimension. The solid lines in the figures are the least square regression lines and the dashed lines show plus or minus one standard deviation. The dots are individual particles. The size range on this day is broad with largest dimensions from .3 mm to 16.6 mm and fall velocities from .3 m sec⁻¹ to .95 m sec⁻¹. Snow types seen on the fall velocity indicator are many: stellars, spatial dendrites, aggregates of dendrites and graupellike snow in the first and fourth cases; dendrites added in the 2030 sample; rimed dendrites and snow pellets during the 2100 sample; and rimed plates during the 2230 samples. Particles less than .3 mm are not visible on the FVI because of the limited video resolution. There appears to be some relationship between particle size and fall velocity. Similarities do exist between current analyses and those performed on SNOW-ONE-A and SNOW-ONE-B data as reported in SNOW-ONE-A and B Characterization Measurements and Data Analysis (Berthel, et al, 1983). The snow structure recorder (SSR) data was examined for the same five periods and particle types determine. Much the same particle variety observed as the FVI is seen on the SSR. Samples of the study periods are seen in Figure 3. The ability to move the instrument to face into the storm has made a significant change in the amount of data recorded. The current configuration continues to give good results. Samples for the five time periods are shown in Figure 4. The snow rate meter (SRM) functioned well on the 16th, much data are available but the snowfall was light. This instrument operated from 0747:30 on the 16th to 0830 on the 17th. During that period only light snow and snow showers occurred. Equivalent snow rates of <.1 mm hr⁻¹ were

2
[REDACTED] [REDACTED] [REDACTED]

Don't let anyone else know
and have no one in the house.

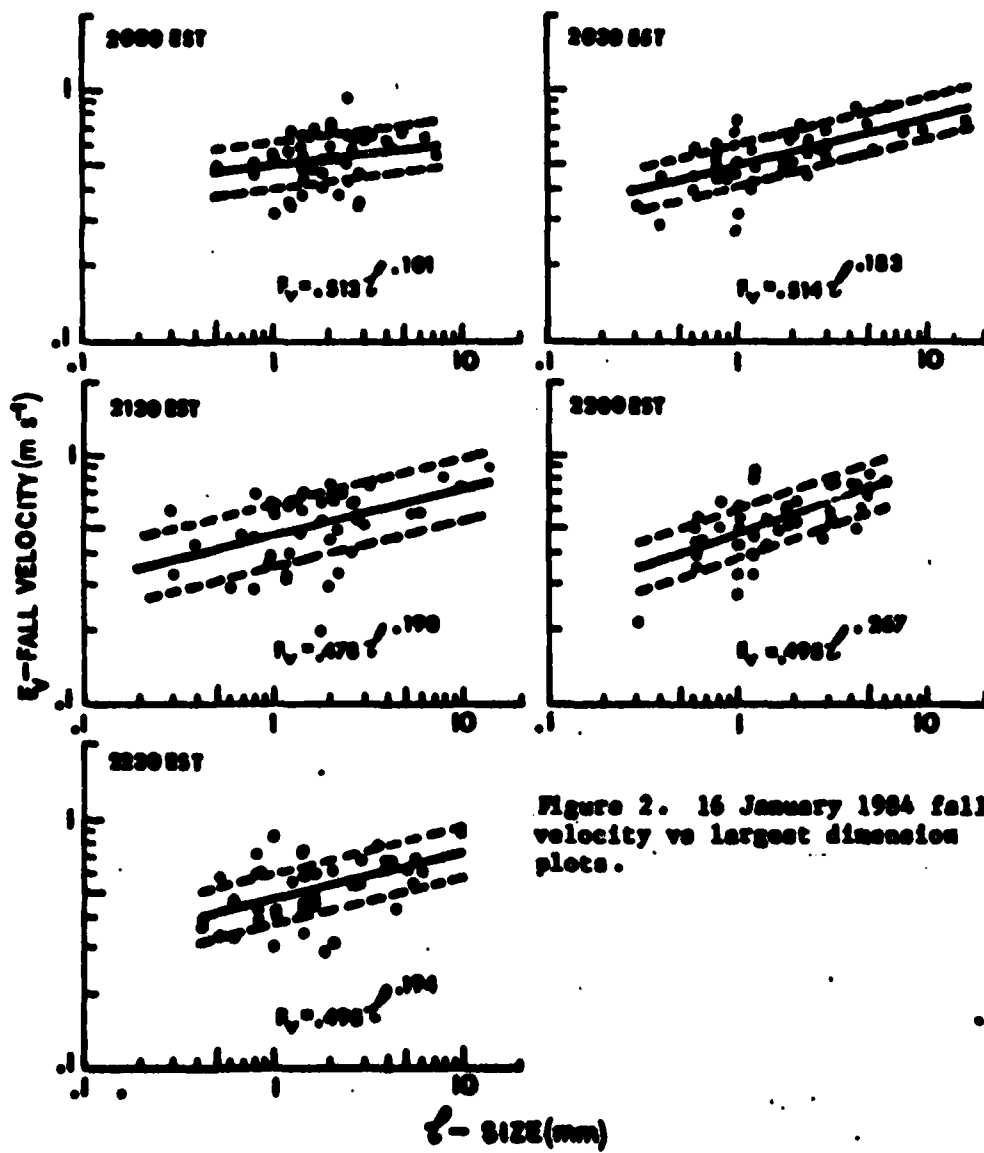

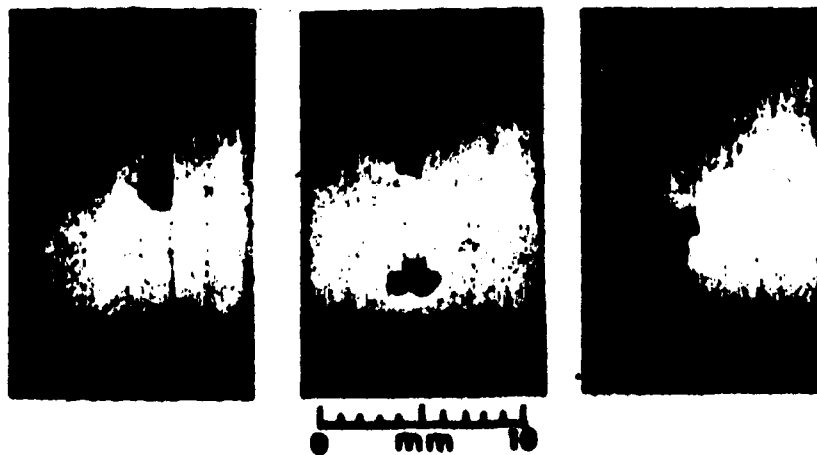
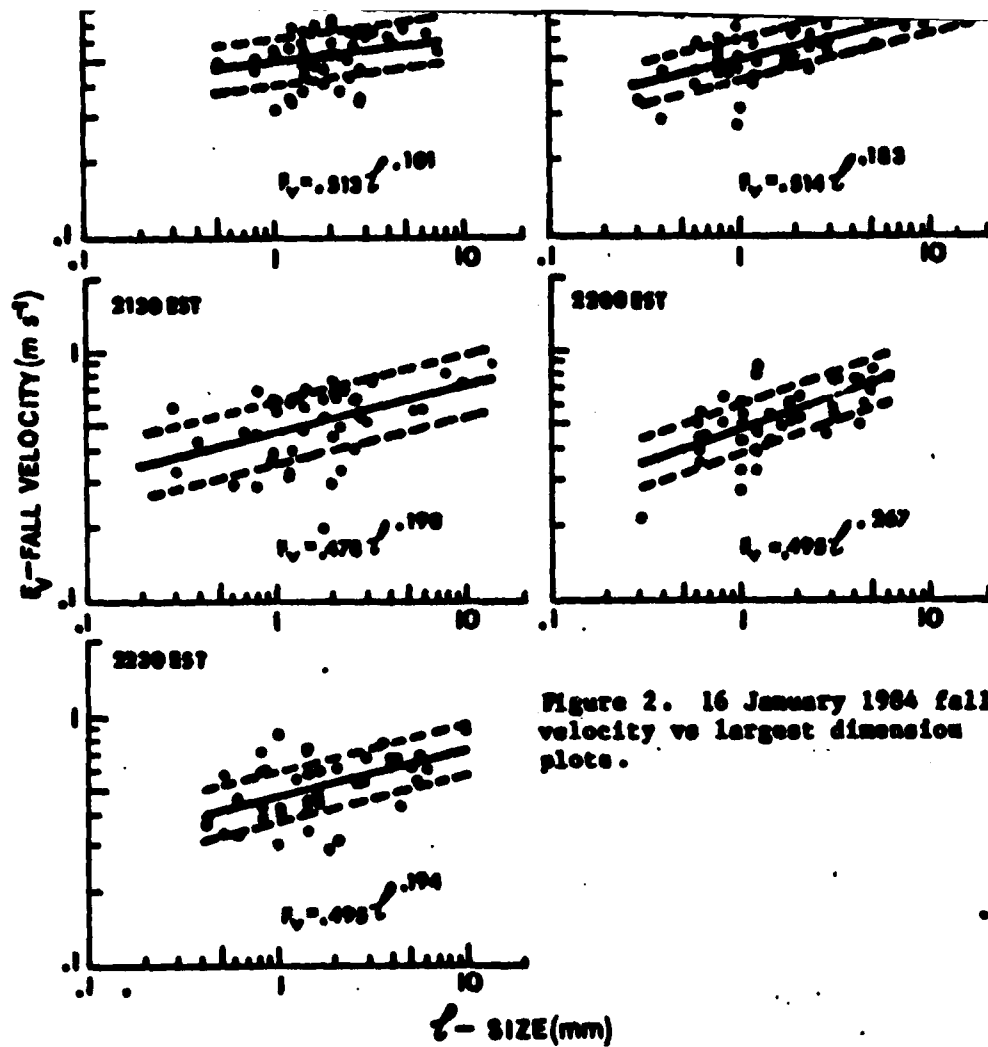


Figure 3. Fall velocity indicator particle images on 16 January 1984.

max. 1. 1000-2000 | F4

Panel 11. In addition to the 1000-2000 and 2000-3000 panels, the 1000-2000 panel is also shown.

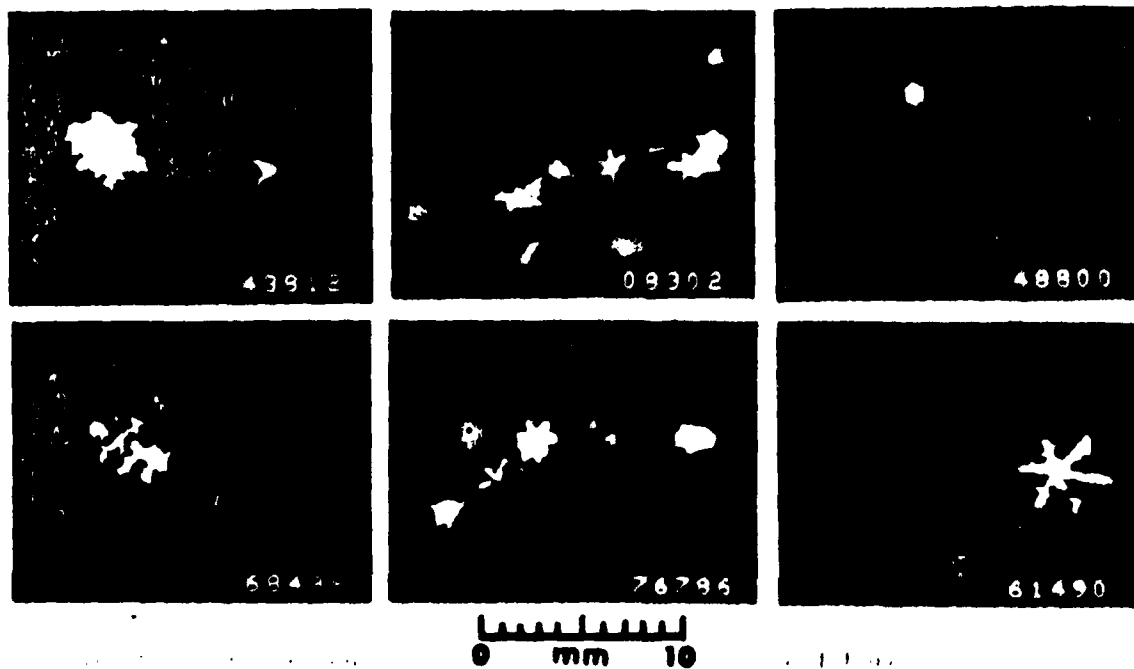
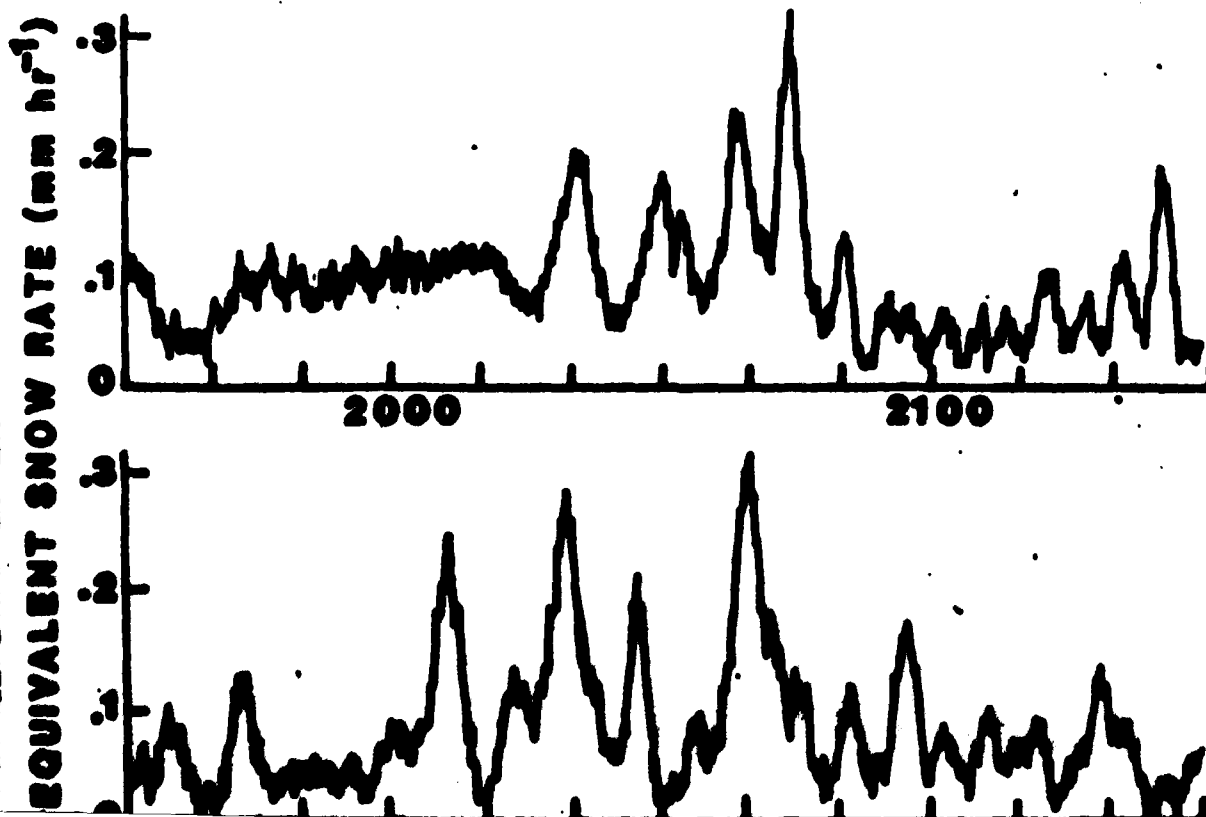


Figure 4. 16 January 1984 snow structure recorder samples.



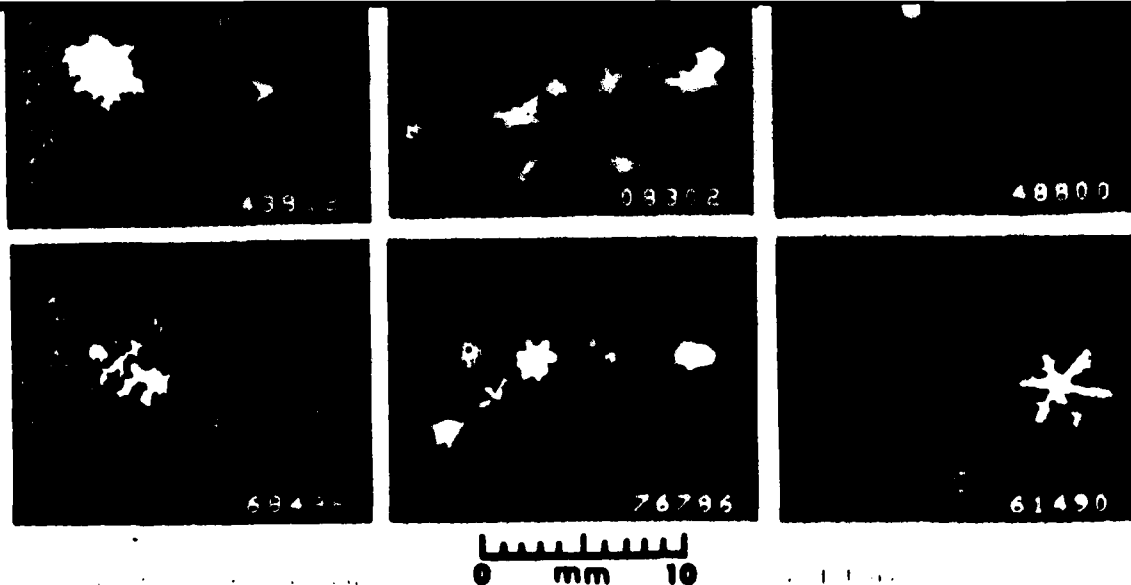


Figure 4. 16 January 1984 snow structure recorder samples.

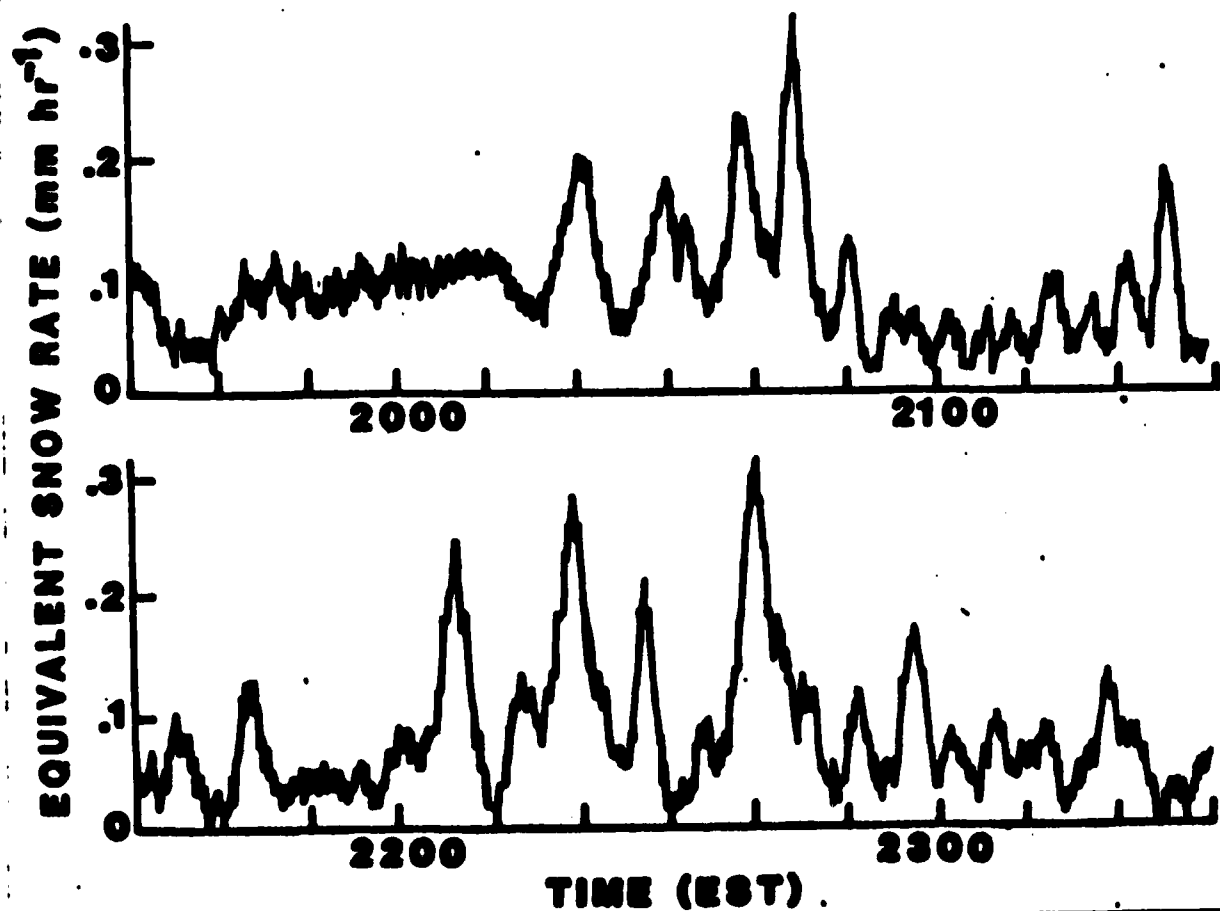


Figure 5. 16 January snow rate plots.

Figure 1. Volume 1 [5]

Figure 1. Volume 1. The figure and page number in light blue.

2

recorded for much of the day with the heaviest period recording $\sim .3 \text{ mm hr}^{-1}$ from 2000 - 2300. Figure 5 shows the snow rate plots.

5. 23 January 1984

The 23rd of January data was analysed in the same fashion as the 16th. While the snow was more intense than on the 16th, it was so only for short periods. Three periods of relatively good snow were selected: 1430, 1500 and 1630. The first fifty free falling particles were measured for fall velocity and maximum dimension. These measurements are shown in Figure 6 fall velocity vs size plots with the largest physical dimension. The solid line is the least squares regression line and the dashed lines show plus or minus one standard deviation. The dots are individual par-

ticles. On this day the largest physical dimensions vary from .3 to 8.6 mm, considerably smaller than the 16.6 mm particles seen in the 16th Jan data. The fall velocities varied from $.27 \text{ m sec}^{-1}$ to 1.16 m sec^{-1} , a broader range than seen on the 16th. Crystal types seen on the FVI were varied. The first study period included aggregates of stellars, capped columns, rimed plates, spatial dendrites, graupellike snow; the second, rimed dendrites, stellars, aggregates of plates, columns, and graupellike snow; the third, aggregates of dendrites, rimed dendrites, graupel-like snow, plates, and columns. Samples from these periods are shown in Figure 7. The snow structure recorder shows a similar variety with bullet rosettes added in the 1430 period, and hexagonal graupel in the third. Samples are shown in Figure 8. The snow rate meter equivalency plots for these and surround-

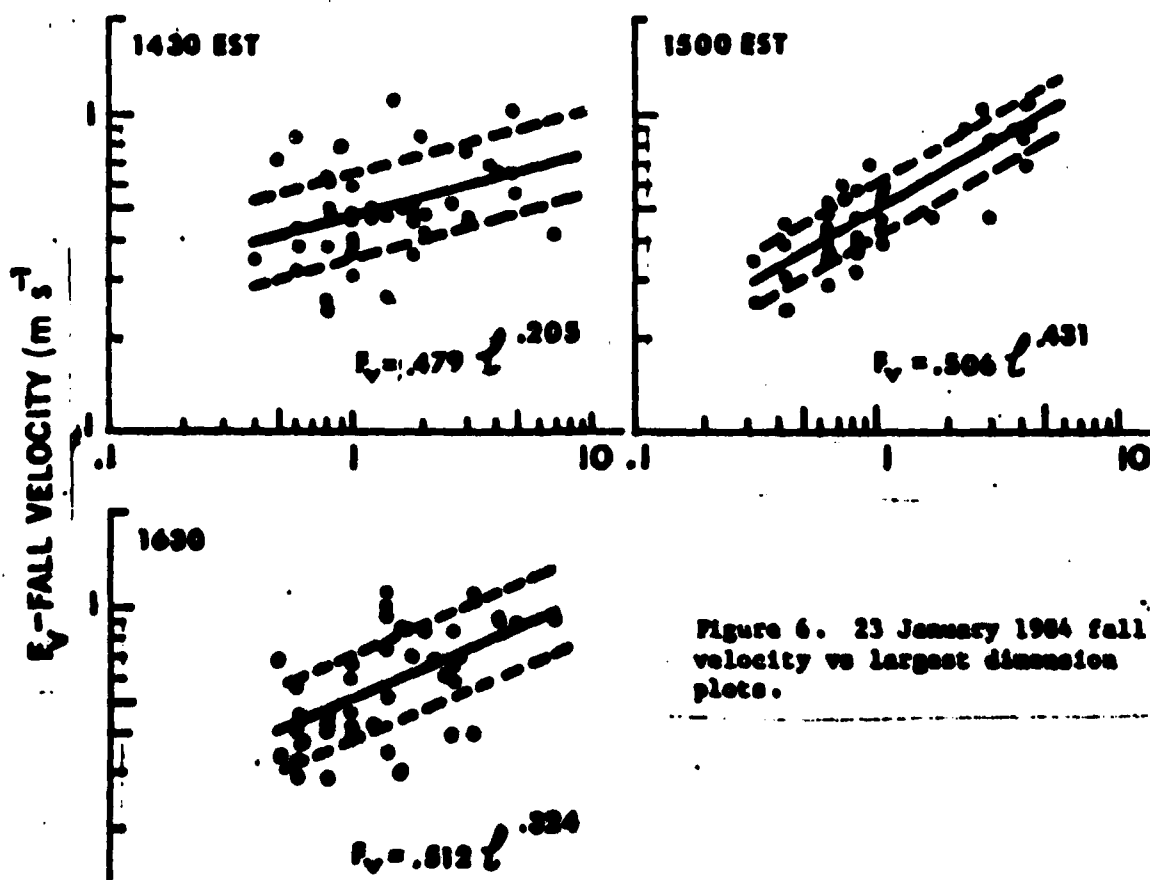


Figure 6. 23 January 1984 fall velocity vs largest dimension plots.

5. 23 January 1984

The 23rd of January data was analysed in the same fashion as the 16th. While the snow was more intense than on the 16th, it was so only for short periods. Three periods of relatively good snow were selected: 1430, 1500 and 1630. The first fifty free falling particles were measured for fall velocity and maximum dimension. These measurements are shown in Figure 6 fall velocity vs size plots with ℓ the largest physical dimension. The solid line is the least squares regression line and the dashed lines show plus or minus one standard deviation. The dots are individual par-

ticles seen in the snow on the ground. The fall velocities varied from .27 m sec⁻¹ to 1.16 m sec⁻¹, a broader range than seen on the 16th. Crystal types seen on the FVI were varied. The first study period included aggregates of stellars, capped columns, rimed plates, spatial dendrites, graupellike snow; the second, rimed dendrites, stellars, aggregates of plates, columns, and graupellike snow; the third, aggregates of dendrites, rimed dendrites, graupellike snow, plates, and columns. Samples from these periods are shown in Figure 7. The snow structure recorder shows a similar variety with bullet rosettes added in the 1430 period, and hexagonal graupel in the third. Samples are shown in Figure 8. The snow rate meter equivalency plots for these and surround-

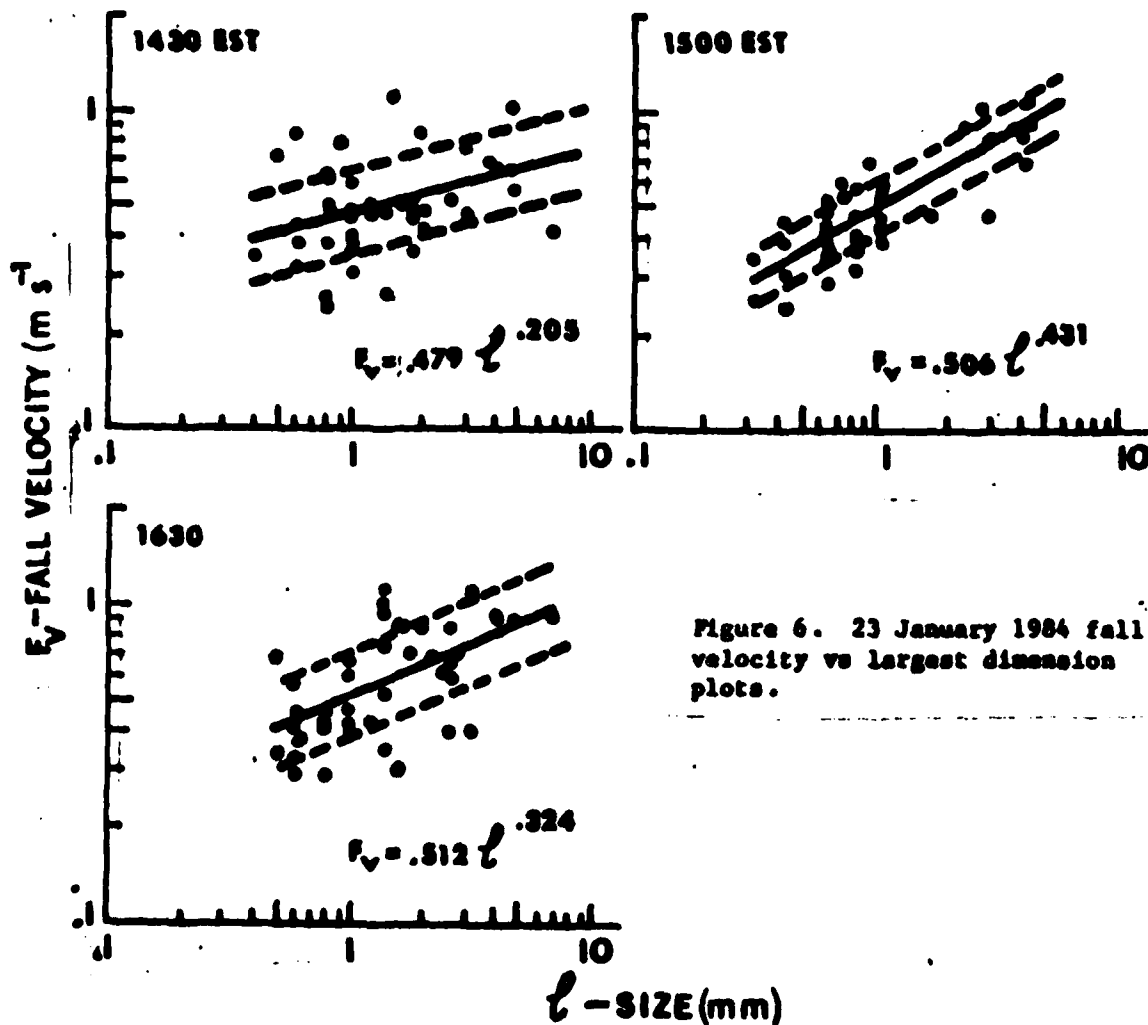


Figure 6. 23 January 1984 fall velocity vs largest dimension plots.

[unclear] [unclear] [unclear] [unclear]

Printed in the U.S.A. by the U.S. Government Printing Office

ing periods are seen in Figure 9. The largest snow rate recorded was 2.2 mm

hr⁻¹, while the three study periods show maximum rates between 1.3 - 1.5 mm hr⁻¹.

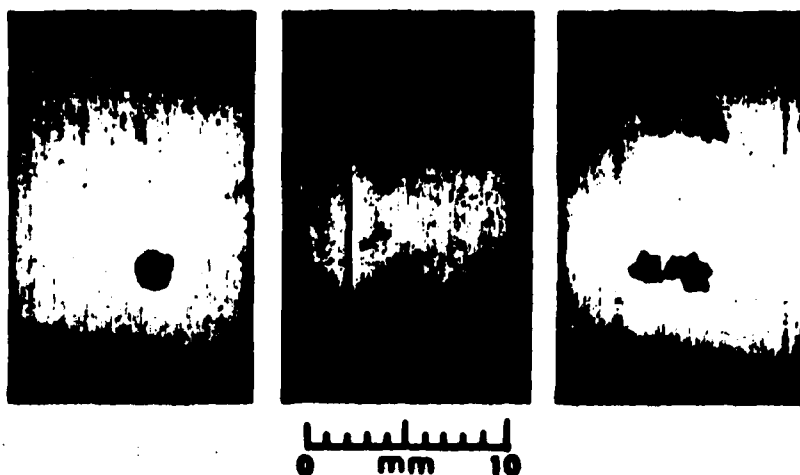


Figure 7. Fall velocity indicator particle images on 23 January 1984.


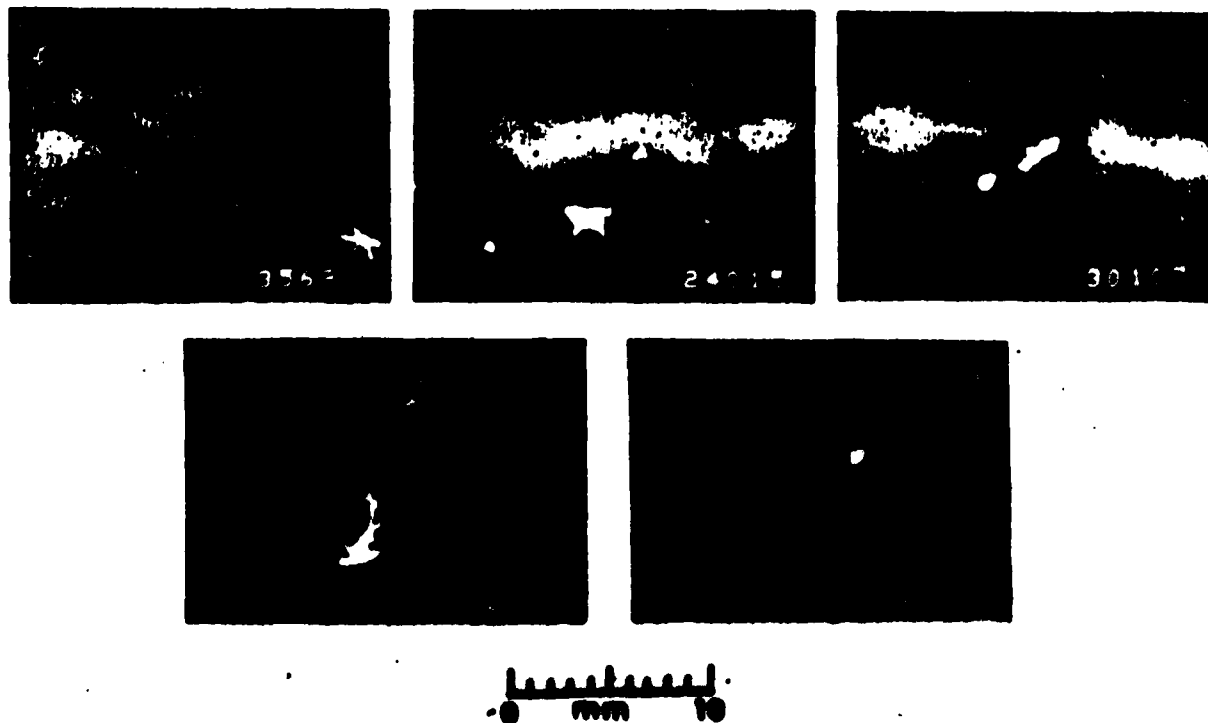


Figure 8. 23 January 1984 snow structure recorder samples.



0 mm 10

Figure 7. Fall velocity indicator particle images on 23 January 1984.

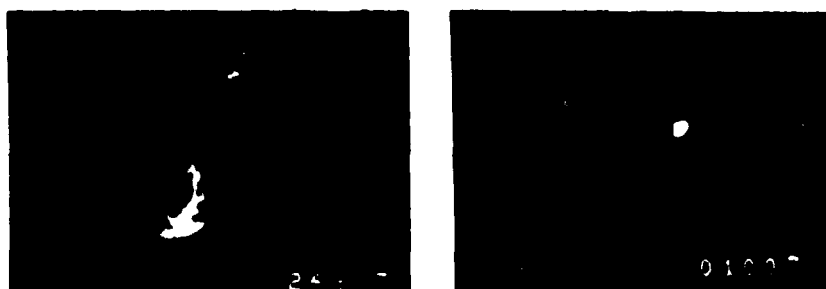

0 mm 10

Figure 8. 23 January 1984 snow structure recorder samples.

INDEX, VOLUME 1 | [7]

Page 11 in author's file name
and page number in light blue.

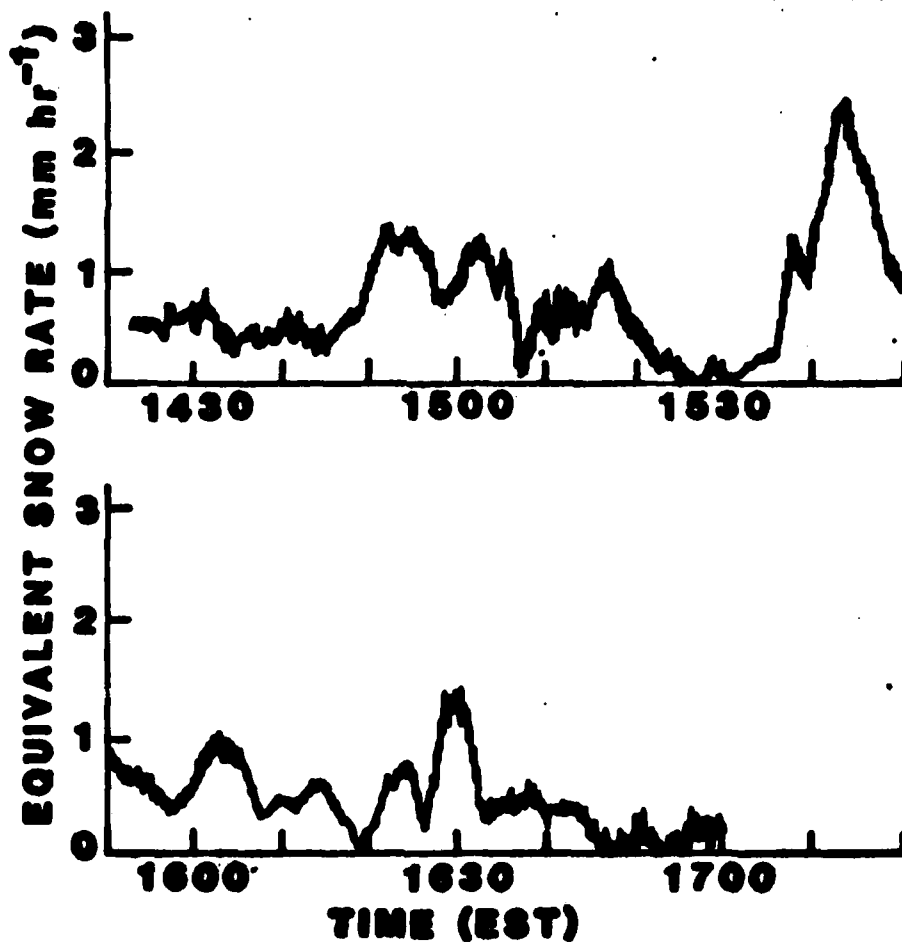


Figure 9. 23 January 1984 snow rate plots.

Conclusions

We have compared the fall velocity relationships from SNOW-TWO/Socks Week IV with those of SNOW-ONE-A and B (Berthel et al, 1983). The equations derived from the 23 January 1984 data generally match those from SNOW-ONE-B. The equation coefficients conform with those obtained on 16 January 1984, although the slopes from the 16th's data are generally smaller. The most obvious difference is seen in the coefficients from SNOW-ONE-A's 31 January 1982 storm. Those coefficients were approximately forty percent higher.

The data gathered thus far in the SNOW projects are the beginning of a data base. We feel that the refinements made in both instrument performance and data reduction techniques will enable us to expand this base greatly. It is hoped that by sampling a wide variety of particle sizes that we will be able to derive equations that will be applicable to broad categories of crystal types.

Recommendations

While the instrument modifications made following SNOW-ONE-B proved suc-

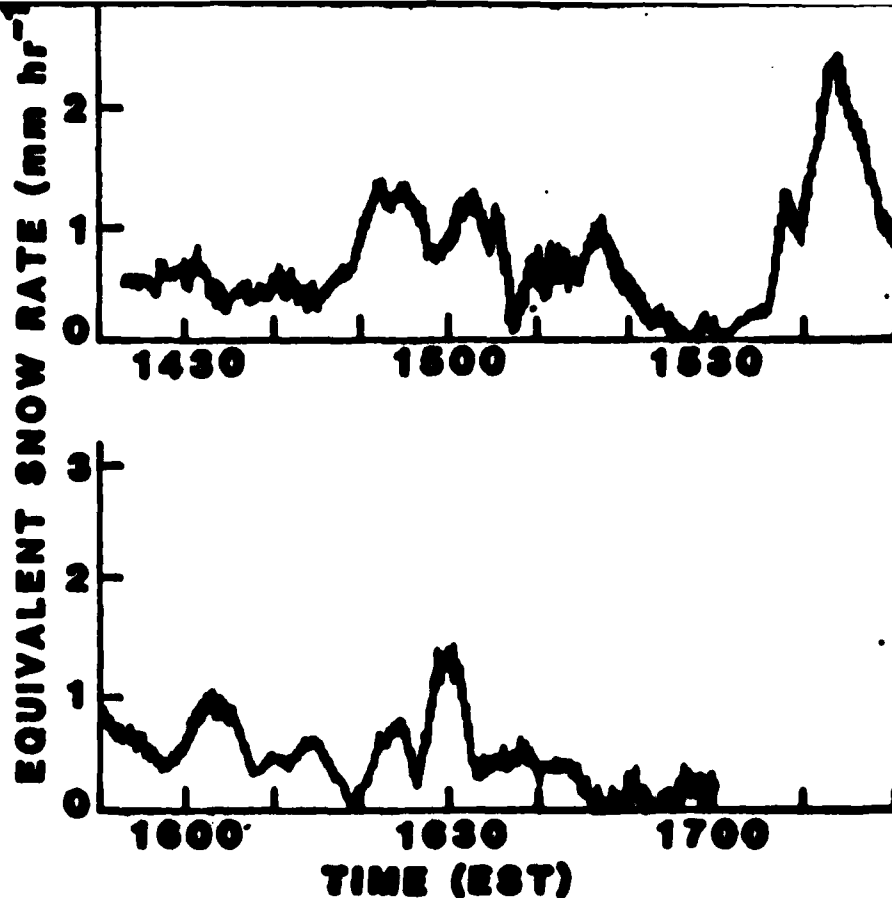


Figure 9. 23 January 1984 snow rate plots.

Conclusions

We have compared the fall velocity relationships from SNOW-TWO/Smoke Week IV with those of SNOW-ONE-A and B (Berthel et al, 1983). The equations derived from the 23 January 1984 data generally match those from SNOW-ONE-B. The equation coefficients conform with those obtained on 16 January 1984, although the slopes from the 16th's data are generally smaller. The most obvious difference is seen in the coefficients from SNOW-ONE-A's 31 January 1982 storm. These coefficients were approximately forty percent higher. These comparisons may indicate that the particle mix on 23 January 1984 and 12 December 1982 were somewhat similar to 16 January 1984, having slow falling flakes in the large size category. The equation from 31 January 1982 could be explained by the presence of particles of higher densities; however, at this point, that is pure speculation.

The data gathered thus far in the SNOW projects are the beginning of a data base. We feel that the refinements made in both instrument performance and data reduction techniques will enable us to expand this base greatly. It is hoped that by sampling a wide variety of particle mixes that we will be able to derive equations that will be applicable to broad categories of crystal types.

Recommendations

While the instrument modifications made following SNOW-ONE-B proved successful, as demonstrated by the better definition in FVI data, we feel that further changes may be indicated. Studies are currently taking place in the laboratory on the feasibility of using polarized light to enhance our ability to see and measure the smaller particles through better definition. The sampling volume of the FVI has been increased and

THOMAS, BERTHEL, C. [8]

1. In author's last names
2. In page number in light blue.

proper focal length adjustments made. This should increase greatly the number of particles available for study. The possibility of digitizing the image is being explored, as well. Although the addition of a rotary table to improve collecting efficiency did not receive an indepth test because of very scant snow fall and horizontal wind problems, it does appear to have had some success and plans are being made to mechanize the table for easier use. A snow volume recorder should be completed by the fall of 1984 and in operation for next winter. Work is being started on the development of an AFGL ASOME along the lines of those being used currently by CRREL. We hope to have this available in the near future. The data gathered in SNOW TWO/Smoke Week VI still leaves unanswered questions regarding wind effects and accuracy of small samples. Preliminary airflow studies have been conducted but further studies are necessary before full assessment can be made. It is expected that these studies will be conducted by fall 84. We have defined no fault in the SRM operating in light snow and assume the recorded data to be correct. Further studies will be performed as comparison data becomes available.

Acknowledgements

A special thanks to Anthony Matthews, Morton Glass, CMSGT Donald MacDonald, SSgt Dennis LaGross, and David Malita (Ophir) for the on site installation and operation of the equipment. The authors wish to thank Susan Sadezsky and Donald McLeod for their assistance in processing the data. Many thanks also to Carolyn Padden for typing this paper.

References

Berthel, R.O. (1982), Snow characterization measurements at SNOW-ONE-A, SNOW-ONE-A DATA REPORT, U.S. Army Corps of Engineers, CRREL Special Report 82-2, 421-437, AFGLTR-83-0003, ADA 118146.

Berthel, R.O., Plank, V.G. and Matthews, A.J. (1982), AFGL snow characterization measurements at SNOW-ONE-A, Reprints of Snow Symposium II, CRREL, Hanover, NH, Aug 10-12, 35-48, AFGL-TR-83-0121, ADA 128606.

Plank, V.G., Berthel, R.O. and Main, B. A., (1983): Snow characterization measurements and R/O correlations obtained during SNOW-ONE-A and SNOW-ONE-B, SPIE Technical Symposium East 83, Session "Optical Engineering for Cold Environments", Sub-session "Electro-Optical/Infrared Systems and Effects", AFGL-TR-83-0214, ADA 132149.

Plank, V.G., Matthews, A.J. and Berthel, R.O., (1983): Instruments used for snow characterization in support of SNOW-ONEA and SNOW-ONE-B, SPIE Technical Symposium East 83 Proceedings, Session "Optical Engineering for Cold Environments", Sub-session "Optical Hardware in the Cold." AFGL-TR-83-0213, ADA 132254.

Gibbons, L.C., Matthews, A.J., Berthel, R.O. and Plank, V.G. (1983), Snow characterization instruments, Instrument Papers No. 316, AFGL-TR-83-0063, ADA 131984.

Berthel, R.O., Plank, V.G., and Main, B.A. (1983), Analysis of Snow Characterization Data acquired at SNOW-ONE-A and B, Reprints of Snow Symposium III, CRREL, Hanover, NH, Aug 9-10, 1983, 43-54, AFGL-TR-83-0222, ADA 132914.

Berthel, R.O., Plank, V.G., and Main, B.A. (1983), SNOW-ONE-A and B characterization measurements and data analysis, AFGL-TR-83-0236, ADA 141245.

REF ID: A68102
 NH AUG 10-12, 33-48, AFGL-TR-83-0121,
 ADA 128606.

Plank, V.G., Berthel, R.O. and Main, B. A., (1983): Snow characterization measurements and E/O correlations obtained during SNOWONE-A and SNOWONE-B, SPIE Technical Symposium East 83, Session "Optical Engineering for Cold Environments", Sub-session "Electro-Optical/Infrared Systems and Effects", AFGL-TR-83-0214, ADA 132149.

Gibbons, L.C., Matthews, A.J., Berthel, R.O. and Plank, V.G. (1983), Snow characterisation instruments, Instrument Papers No. 316, AFCL-TR-83-0063, ADA 131984.

Northel, R.O., Plank, V.G., and Main, B.A.(1983), SNOW-ONE-A and B characterization measurements and data analysis, AFGL-TR-83-0256, ADA 141245.

Berthel, R.O. (1982), Snow characterisation measurements at SNOW-ONE-A, SNOW-ONE- A DATA REPORT, U.S. Army Corps of Engineers, CRREL Special Report 82-2, 421-437, AFGLTR-82-0003, ADA 118140.

Berthel, R.O., Plank, V.G. and Main, B.A.
(1983), AFGL snow characterization
measurements at SNOW-ONE-B; prelimi-
nary report, SNOW-ONE-B DATA REPORT,
U.S. Army Corps of Engineers, CHREL
Special report 83-16, 197-208, AFGL-
TR-83-0174, ADA 130556.

ATE
LMED
-8