

NO-A176 733

TRANSVERSE INSTABILITY OF AN ELECTRON BEAM IN
BEAM-INDUCED ION CHANNEL(U) NAVAL SURFACE WEAPONS
CENTER SILVER SPRING MD K T NGUYEN ET AL. 15 SEP 86
NSMC/NP-86-426 F/G 28/7

1/1

UNCLASSIFIED

NL



1-0

1-1

1-25

1-4

2-8

3-15

3-5

2-0

1-8

2-6

2-2

2-0

1-8

1-6

12

NSWC MP 86-426

AD-A176 733

TRANSVERSE INSTABILITY OF AN ELECTRON BEAM IN BEAM-INDUCED ION CHANNEL

BY K. T. NGUYEN R. F. SCHNEIDER J. R. SMITH H. S. UHM

RESEARCH AND TECHNOLOGY DEPARTMENT

15 SEPTEMBER 1986

Approved for public release; distribution is unlimited.

DTIC
SELECTE
FEB 17 1987
E

DTIC FILE COPY



NAVAL SURFACE WEAPONS CENTER

Dahlgren, Virginia 22448-5000 • Silver Spring, Maryland 20903-5000

87 2 12 002

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE				
1a REPORT SECURITY CLASSIFICATION Unclassified		1b RESTRICTIVE MARKINGS		
2a SECURITY CLASSIFICATION AUTHORITY		3 DISTRIBUTION AVAILABILITY OF REPORT Approved for public release; distribution unlimited.		
2b DECLASSIFICATION/DOWNGRADING SCHEDULE				
4 PERFORMING ORGANIZATION REPORT NUMBER(S) NSWC MP 86-426		5 MONITORING ORGANIZATION REPORT NUMBER(S)		
6a NAME OF PERFORMING ORGANIZATION Naval Surface Weapons Center	6b OFFICE SYMBOL (If applicable) R41	7a NAME OF MONITORING ORGANIZATION		
6c ADDRESS (City, State, and ZIP Code) 10901 New Hampshire Avenue Silver Spring, MD 20903-5000		7b ADDRESS (City, State, and ZIP Code)		
8a NAME OF FUNDING/SPONSORING ORGANIZATION	8b OFFICE SYMBOL (If applicable)	9 PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
8c ADDRESS (City, State, and ZIP Code)		10 SOURCE OF FUNDING NUMBERS		
		PROGRAM ELEMENT NO 61152N	PROJECT NO ZR00001	TASK NO ZR01109
		WORK UNIT ACCESSION NO. R01AA400		
11 TITLE (Include Security Classification) Transverse Instability of an Electron Beam in Beam-Induced Ion Channel				
12 PERSONAL AUTHOR(S) Nguyen, K. T., Schneider, R. F., Smith, J. R., Uhm, H. S.				
13a TYPE OF REPORT Interim	13b TIME COVERED FROM 6/86 TO 9/86	14 DATE OF REPORT (Year, Month, Day) 1986 September 15	15 PAGE COUNT 20	
16 SUPPLEMENTARY NOTATION This work was supported by Independent Research Fund at Naval Surface Weapons Center.				
17 COSATI CODES			18 SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD 20	GROUP 09	SUB-GROUP	Ion Hose Instability; Beam-Induced Ion Channel; Ion Resonance Instability; Transverse Instability.	
19 ABSTRACT (Continue on reverse if necessary and identify by block number) Transverse oscillations of a relativistic electron beam propagating in a beam-induced ion channel has been theoretically investigated and experimentally observed. Good agreement between experimental observations and theoretical calculations strongly suggests that these oscillations may be caused by the ion hose (ion resonance) instability.				
20 DISTRIBUTION/AVAILABILITY OF ABSTRACT ☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT ☐ DTIC USERS			21 ABSTRACT SECURITY CLASSIFICATION Unclassified	
22a NAME OF RESPONSIBLE INDIVIDUAL K. T. Nguyen			22b TELEPHONE (Include Area Code) (202) 394-2278	22c OFFICE SYMBOL NSWC (R41)

DD FORM 1473, 84 MAR

83 APR edition may be used until exhausted
All other editions are obsolete

0102-LF-014-6602


SECURITY CLASSIFICATION OF THIS PAGE

U.S. Government Printing Office: 1985-639-612

UNCLASSIFIED

FOREWORD

Transverse oscillations of a relativistic electron beam propagating in a beam-induced ion channel has been theoretically investigated and experimentally observed. Good agreement between experimental observations and theoretical calculations strongly suggests that these oscillations may be caused by the ion hose (ion resonance) instability.



CARL W. LARSON, Head
Radiation Division

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



We have investigated the transverse oscillations of an electron beam propagating in a beam-induced plasma channel. From the comparison of both theoretical and experimental results, it is strongly suggested that the transverse oscillations are caused by the electrostatic transverse coupling between the electron beam and the ion channel, which is known as the ion hose (ion resonance) instability.^{1,2} However, in previous studies,^{1,2} the usual assumption was that the charge neutralization fraction f (channel ions to beam electrons line density ratio) was a constant from beam head to tail. In this context, it is necessary to develop a new theoretical model, which can describe some important physical phenomena, for the case where f varies from head to tail and the beam is self-pinched without an external magnetic field.

In this report, we consider an intense relativistic electron beam, with Gaussian profile and radius R , propagating through an initially neutral gas. The axial velocity of the beam is $V\hat{e}_z \approx c\hat{e}_z$. The beam space charge is partially neutralized by the ions in the plasma channel generated by the beam itself, with the channel electrons assumed to be instantaneously expelled in the absence of external applied axial magnetic field. Secondary ionization is neglected in the low pressure regime considered here. The neutralization fraction, $f(t)$, as a function of time can be approximately given by

$$f(t) = \frac{N_i(t)}{N_b} = \alpha n_n t = \frac{t}{t_0}, \quad (1)$$

for $f < 1$. Here N_i and N_b are line densities of ions and beam electrons, respectively, σ is the ionization cross section, n_n is the neutral gas density ($\sim$ pressure, P), and $t_0 \equiv (\sigma n_n)^{-1}$. Strictly speaking, Equation (1) is a crude estimation, since in reality, the beam assumes a trumpet profile, i.e., R is a rapidly changing function of time until the equilibrium condition³ $f = 1/\gamma^2 + 2T_\perp/vmc^2$ is achieved. Here, γ is the beam relativistic factor, $T_\perp$ is the beam transverse temperature, and $v = 2.82 \times 10^{-13} N_b(\text{cm}^{-1})$ is the well known Budker's parameter. However, this approximation makes the problem analytically tractable, and is actually quite good within the framework of the "rigid" beam and channel treatment considered here.

In the rigid approximation, the beam and ion channel are treated as rigid but flexible rods. The transverse displacements of the beam and channel centroids, D_b and D_i , can be obtained from

$$\begin{aligned} N_b m_e \frac{d^2 D_b}{dt^2} &= F_{bi} (D_b - D_i), \\ N_b m_i \frac{d}{dt} f \frac{dD_i}{dt} &= F_{ib} (D_i - D_b), \end{aligned} \tag{2}$$

for $f < 1$. Here m_i and m_e are the ion and electron rest masses, and $F_{ij}(x)$ is the electrostatic force exerted on column i by column j , with relative centroid displacement distance x . For two columns with Gaussian profiles and equal radii, we can obtain

$$F_{ij}(x) = \frac{2e_i e_j N_i N_j}{x} (1 - e^{-x^2/2R^2}) \quad (3)$$

$$\approx e_i e_j N_i N_j \frac{x}{R^2}, \quad \text{for } x \ll R.$$

Making use of Equations (1) and (3), Equation (2) can be rewritten as

$$\left(\frac{\partial}{\partial t} + c \frac{\partial}{\partial z}\right)^2 D_b = \alpha \frac{t}{t_0} (D_i - D_b), \quad (4a)$$

and

$$\frac{1}{t} \frac{\partial}{\partial t} t \frac{\partial D_i}{\partial t} = n \alpha (D_b - D_i), \quad (4b)$$

where $\alpha = e^2 N_b / \gamma m_e R^2 \approx c^2 I_b (\text{kA}) / 17 \gamma R^2$, and $n = \gamma m_e / m_i$. Noting that $n \ll 1$, and that z enters Equation (4) only through $\partial/\partial z$, we seek solution to Equation (4) of the form

$$D = \hat{D}(t) e^{-ik_z z}, \quad (5)$$

with $|\partial \hat{D} / \partial t| \ll k_z c$. It is furthermore required that $k_z^2 R^2 \lesssim 1$, which assures the validity of the rigid treatment. Then by substituting Equation (5) into Equation (4a), we obtain

$$[-2ik_z c \frac{\partial}{\partial t} - (k_z^2 c^2 - \alpha \frac{t}{t_0})] \hat{D}_b = \alpha \frac{t}{t_0} \hat{D}_i,$$

which can be integrated to give

$$\hat{D}_b = \hat{D}_i + i \frac{k_z c}{2} e^{-i\delta(t)} \int_{-\infty}^t e^{i\delta(t')} \hat{D}_i(t') dt'. \quad (6)$$

In Equation (6), $\delta(t)$ is determined by $\delta(t) = (\alpha t^2/2t_0 - k_z^2 c^2 t)/2k_z c$.

Substituting $\hat{D}_b$ in Equation (6) into Equation (4b) gives

$$\frac{\partial}{\partial t} (e^{i\delta(t)} \frac{1}{t} \frac{\partial}{\partial t} t \frac{\partial \hat{D}_i}{\partial t}) = i \frac{n\alpha k_z c}{2} e^{i\delta(t)} \hat{D}_i. \quad (7)$$

The full behavior of Equation (7) is complicated and can only be calculated numerically. The detailed results will be presented elsewhere. However, Equation (7) can be approximated to

$$\frac{\partial^3 \hat{D}_i}{\partial t^3} + i\delta' \frac{\partial^2 \hat{D}_i}{\partial t^2} = i \frac{n\alpha k_z c}{2} \hat{D}_i, \quad (8)$$

without loss of important physical contents. Here δ' is defined by $\delta' = (\alpha t/t_0 - k_z^2 c^2)/2k_z c$.

For the region $\delta' \approx 0$, Equation (8) can be solved to give $\hat{D}_i \sim e^{i\omega t}$, where

$$\omega = \frac{1}{2} (1 - i\sqrt{3}) \left(\frac{n\alpha k_z c}{2} \right)^{1/3}. \quad (9)$$

Away from this region, Equation (8) can be approximated by

$$\frac{\partial^2 \hat{D}_i}{\partial t^2} = \frac{n\alpha k_z c}{2} \frac{\hat{D}_i}{\delta'}, \quad (10)$$

which indicates stable oscillations for $\delta' < 0$, and purely growing for $\delta' > 0$.

From this theoretical analysis, we conclude that, for an electron beam propagating through an initially neutral gas, the ion resonance mode for a given axial wavelength k_z becomes unstable at time $t_d = k_z^2 c^2 t_0 / \alpha$, and that growing oscillations given by Equation (9) can be observed only for very low pressure (large t_0) regime. In reality, for $f = t/t_0 \lesssim 1/\gamma^2 + 2T_1/vmc^2$, the beam radius R is large and rapidly changing, and thus long wavelength modes such that $k_z^2 c^2 / \alpha < 1/\gamma^2 + 2T_1/vmc^2$ are stabilized by wall effects and betatron detuning. The unstable mode observed are expected to be the longest axial wavelength that satisfies the condition

$$\frac{k_z^2 c^2}{\alpha} \gtrsim \frac{1}{\gamma^2} + \frac{2T_1}{vmc^2}, \quad (11)$$

and the onset time of this instability is

$$t_d = \frac{k_z^2 c^2 t_0}{\alpha}. \quad (12)$$

The experiment is performed with the Transbeam accelerator, which generates a nominal 700 kV, 100 kA, 100 ns pulse into a matched load. The matched electron beam diode consists of a 7.5 cm diameter planar carbon cathode and 13 micron titanium anode foil with a 15 mm anode-cathode gap. In order to obtain a low current, high quality beam, a graphite beam stop with a 2 cm diameter hole

on axis is placed immediately downstream of the anode foil. This allows approximately 4 kA of the beam to be injected into the gas-filled drift region. Typical diode current and voltage traces for this configuration along with further details of the accelerator design and operation may be found in Reference 4. Also in Reference 4 we have characterized the beam propagation in the ion focused regime (IFR). The radial profile and root-mean-square (rms) emittance of the beam have been measured with a simple emittance meter and a radiachromic film detector. The beam is characterized by a transverse temperature of 35 keV and a rms radius of about 1 cm.

The experimental setup which has been used to observe transverse oscillations⁵ in the ion focusing regime is shown in Figure 1. The drift region is constructed of 15 cm diameter stainless steel tubes with a total length of 1 meter. A passively integrated Rogowski coil is used to measure the net current 30 cm downstream of the diode. A magnetic probe array⁶ is placed adjacent to the Rogowski coil. Together these signals will give information about the current centroid displacement from the axis as a function of time. Further details of the experiment may be found in Reference 5. In order to perform open shutter photography, approximately 60 cm of the drift tube can be replaced by a Pyrex tube with a stainless steel screen insert.

The experiment is performed with 10, 20, 30, 40, 80, or 160 mTorr of Argon or Nitrogen as filling gas. In all cases, transverse displacements are detected from the probe array during the beam pulse. In many instances, the instability

is so violent that the beam current centroid is displaced a large fraction of the wall radius of the drift tube. In several cases, at the lower pressures, it is possible to identify a frequency associated with the oscillation. The signal at higher pressures is often just a centroid displacement to one side. Delay time from the onset of the current pulse at the probe position to the onset of the instability was also observed in all cases. Figure 2 shows traces of the beam current pulse and the centroid displacement waveform for a low and a high pressure discharges.

In order to relate the experimental observations to the theoretical calculations, we note that the axial wavelength, λ_z , of the perturbation is given by

$$k_z = 2\pi/\lambda_z = \pi n/100 \text{ cm}^{-1}, \quad n = 1, 2, 3, \dots \quad (13)$$

since the eigenfunctions must vanish at both conducting endplates of the 1 meter long drift tube. Making use of the relevant experimental parameters ($I_b = 4 \text{ kA}$, $R = 1 \text{ cm}$, $\gamma = 2.4$, $T_1 = 35 \text{ keV}$) and Equation (11), we obtain $k_z \gtrsim 0.254 \text{ cm}^{-1}$, which indicates $\lambda_z \approx 25 \text{ cm}$. This axial wavelength is evidenced in the open shutter photograph shown in Figure 3, taken with the Pyrex tube in place.

The oscillation frequencies for very low pressure cases can now be found, with $\lambda_z = 25 \text{ cm}$, from Equation (9) to be 17.6 MHz for Argon and 25 MHz for

atomic Nitrogen. These values are in good agreement with experimental data at 10 mTorr, which are 17 ± 3 Mhz and 27 ± 1 MHz for Argon and Nitrogen, respectively.⁵

For both Argon and Nitrogen, the characteristic ionization time t_0 is given approximately by $1200/P(\text{mTorr})$ nanoseconds.⁷ Equation (12) can then be used to estimate the delay time for the onset of the instability, which is

$$t_d = \frac{770}{P(\text{mTorr})} \text{ nanoseconds.} \quad (14)$$

As can be seen from Figure 4, Equation (14) well characterizes the behavior of the experimentally determined onset time for Argon (a similar situation occurs for Nitrogen).

In conclusion, ion hose instability of an intense relativistic electron beam propagation in a beam-induced plasma channel has been investigated. Experimental observations agree well with the theoretically calculated values in terms of the axial wavelength, oscillation frequency, and the onset time of the ion hose instability.

This work was supported by the Independent Research Fund at the Naval Surface Weapons Center.



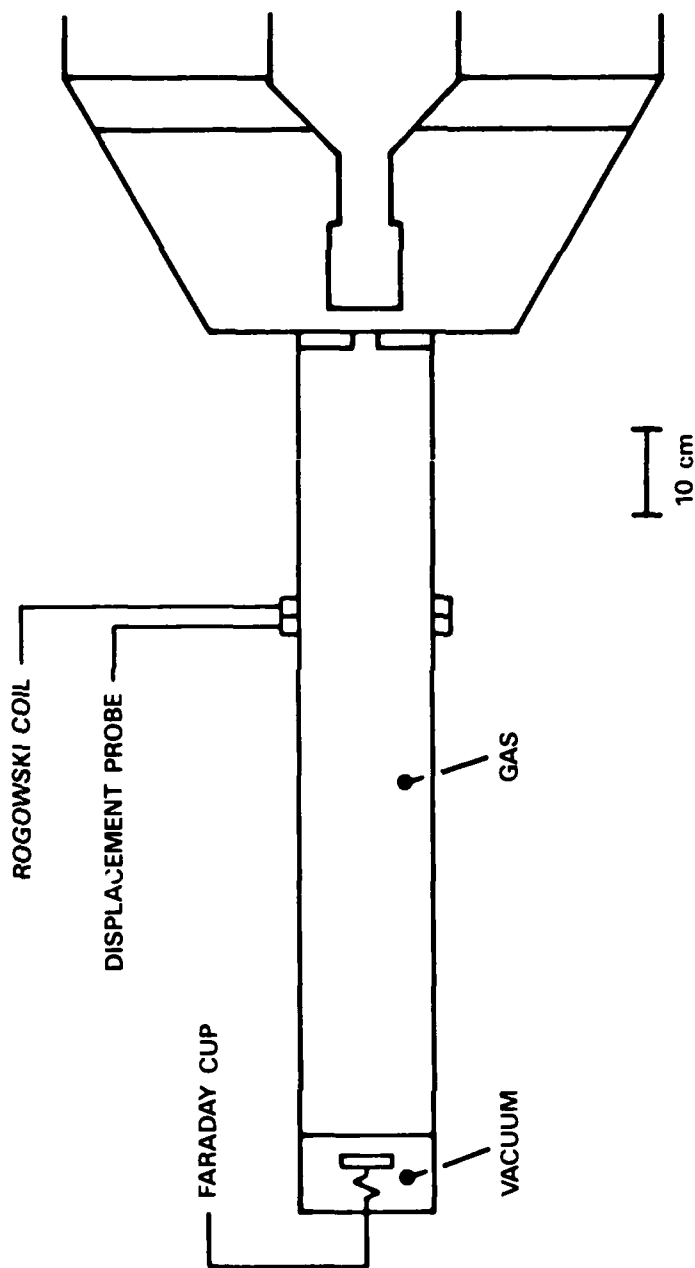


FIGURE 1. EXPERIMENTAL SETUP

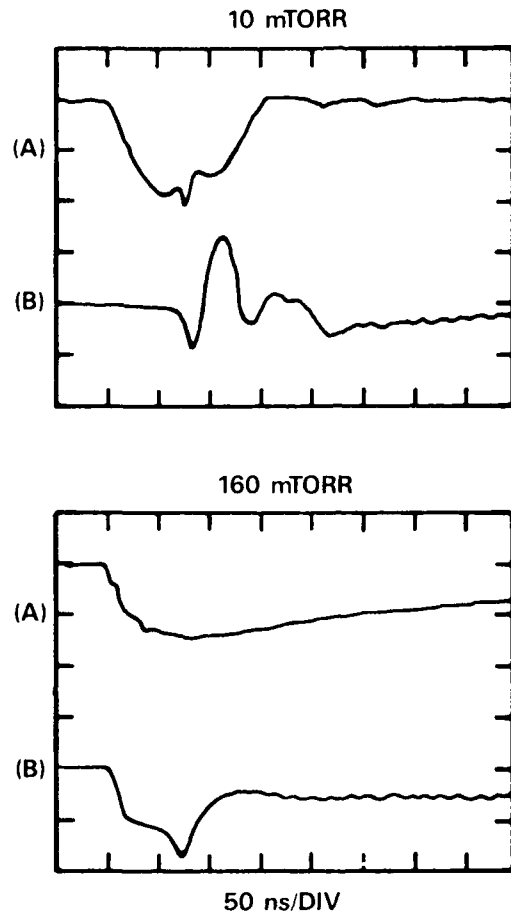


OSCILLOSCOPE TRACES OF THE PASSIVELY INTEGRATED ROGOWSKI COIL AND THE DISPLACEMENT PROBE. THE ROGOWSKI TRACE (A) IS 1.2 kA/DIV. THE DISPLACEMENT PROBE TRACE (B) IS 0.94/(kA) cm/DIV FOR SMALL DISPLACEMENTS MUCH LESS THAN THE DRIFT TUBE RADIUS.

FIGURE 2. CURRENT AND DISPLACEMENT TRACE



OPEN SHUTTER PHOTOGRAPH OF LIGHT EMITTED DURING PASSAGE OF ELECTRON BEAM THROUGH 40 mTORR OF NITROGEN.

FIGURE 3. OPEN SHUTTER PHOTOGRAPH

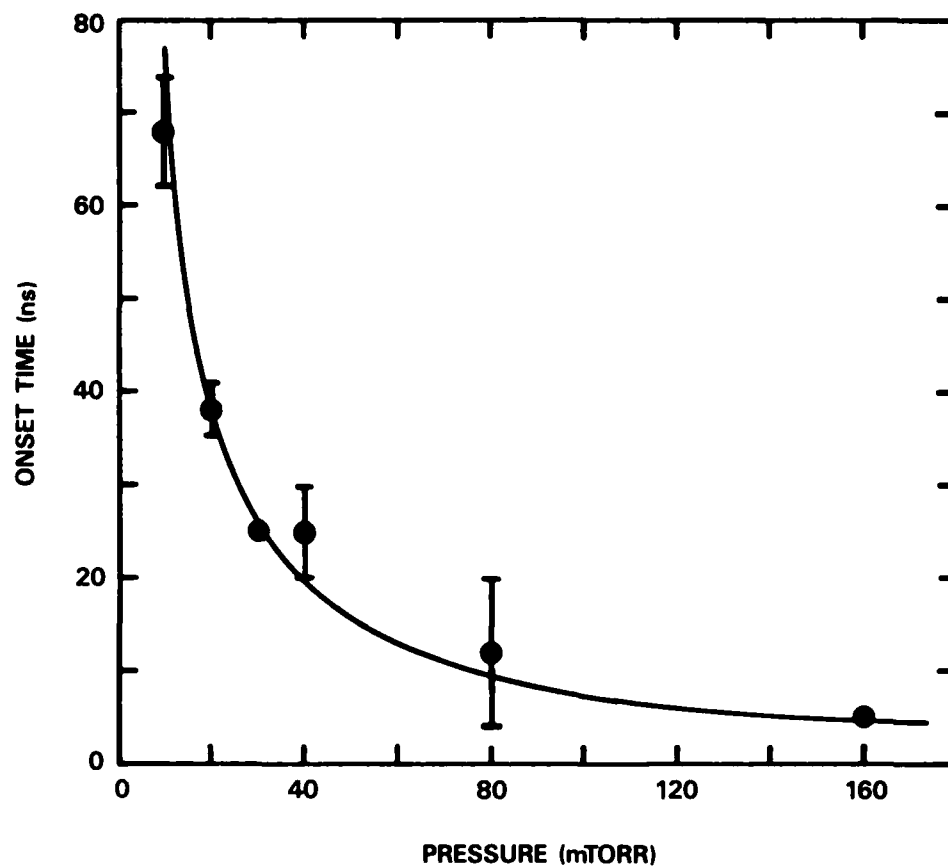

PLOT OF THE INSTABILITY ONSET TIME AS A FUNCTION OF PRESSURE FOR ARGON. THE ERROR BARS ABOUT THE EXPERIMENTAL POINTS ARE SAMPLE STANDARD DEVIATIONS. THE SOLID LINE REPRESENTS THE THEORETICAL PREDICTION DERIVED IN THIS PAPER.

FIGURE 4. INSTABILITY ONSET TIME VS PRESSURE

REFERENCES

1. Davidson, R. C. and Uhm, H. S., "Influence of Finite Ion Larmor Radius Effects on the Ion Resonance Instability in a Nonneutral Plasma Column," Physics of Fluids, Vol. 21, Jan 1978, p. 60.
2. Uhm, H. S. and Davidson, R. C., "Kinetic Description of Coupled Transverse Oscillations in an Intense Relativistic Electron Beam-Plasma System," Physics of Fluids, Vol. 23, Apr 1980, p. 813.
3. Davidson, R. C. and Uhm, H. S., "Thermal Equilibrium Properties of an Intense Relativistic Electron Beam," Physics of Fluids, Vol. 22, Jul 1979, p. 1375.
4. Smith, J. R., Schneider, R. F., Rhee, M. J., Uhm, H. S. and Namkung, W., "Propagation of a Mildly Relativistic Electron Beam at Sub-Torr Pressures," Journal of Applied Physics (in press, 1986).
5. Schneider, R. F. and Smith, J. R., "Transverse Oscillations of an Electron Beam Propagating in the Ion Focus Regime," Physics of Fluids (in press, 1986).
6. Mirnov, S. V., "A Probe Method for Measuring the Displacement of the Current Channel in Cylindrical and Toroidal Discharge Vessels," Plasma Physics, Vol. 7, Mar 1965, p. 325.
7. Rieke, F. F. and Prepejchal, W., "Ionization Cross Sections of Gaseous Atoms and Molecules for High Energy Electrons and Positrons," Physical Review, Vol. A6, Oct 1972, p. 1507.

DISTRIBUTION

	<u>Copies</u>		<u>Copies</u>
Strategic Defense Initiative Organization Attn: LTCOL R. L. Gullickson (DEWO) The Pentagon Washington, DC 20301-7100	1	Lawrence Berkeley Laboratory Attn: Dr. E. P. Lee Bldg. 47, Room 111 1 Cyclotron Road Berkeley, CA 94720	1
Defense Advanced Research Projects Agency Attn: Dr. H. L. Buchanan Directed Energy Office 1400 Wilson Boulevard Arlington, VA 22209-2308	1	Defense Technical Information Center Cameron Station Alexandria, VA 22314	12
Commander Naval Sea Systems Command Attn: CDR W. F. Bassett PMS-405 Washington, DC 20362	1	Lawrence Livermore National Laboratory Attn: Dr. R. J. Briggs Dr. D. S. Prono Dr. F. W. Chambers Dr. W. M. Fawley Dr. G. J. Caporaso Dr. W. M. Sharp P. O. Box 808 Livermore, CA 94550	1 1 1 1 1 1
Commander Naval Research Laboratory Attn: Dr. A. W. Ali (4700.1) Dr. M. Lampe (4709) Dr. G. Joyce (4709) Dr. R. Hubbard (4709) Dr. R. Meager (4763) Dr. M. Raleigh (4763) Dr. S. P. Slinker (4790) Washington, DC 22341	1 1 1 1 1 1 1	Los Alamos National Laboratory Attn: Dr. J. Mack Dr. R. Carlson P. O. Box 1663 Los Alamos, NM 87545	1 1
USA-LABCOM Ballistic Research Laboratory SLCRR-SE-E Attn: Dr. D. Eccleshall Dr. A. Prakash Aberdeen Proving Ground, MD 21005	1 1	Sandia National Laboratory Attn: Dr. R. B. Miller (1270) Dr. R. Lipinski (1271) Dr. D. Hasti (1272) Dr. C. Frost (1272) Dr. J. Freeman (1241) Dr. M. Mazarakis (1272) Dr. T. Lockner (1272) Dr. G. Leifeste (1272) Dr. S. Shope (1272) P. O. Box 5800 Albuquerque, NM 87185	1 1 1 1 1 1 1 1 1
Air Force Weapons Laboratory Attn: LTCOL J. Head Kirtland Air Force Base Albuquerque, NM 87117	1	Mission Research Corporation Attn: Dr. B. Godfrey 1720 Randolph Road, S. E. Albuquerque, NM 87106	1
National Bureau of Standards Attn: Dr. S. Penner Dr. M. Wilson Bldg. 245, B-102 Washington, DC 20234	1 1		

DISTRIBUTION (Cont.)

Copies

Science Applications
International, Inc.
Attn: Dr. R. L. Feinstein 1
5150 El Camino Real, Suite B31
Palo Alto, CA 94022

University of Michigan
Department of Nuclear Engineering
Attn: Prof. T. Kammash 1
Prof. R. M. Gilganbach 1
Ann Arbor, MI 48109

Library of Congress
Attn: Gift and Exchange Division 4
Washington, DC 20540

Internal Distribution:
R40 1
R401 1
R41 1
R41 (H. Uhm) 1
R41 (D. Rule) 1
R41 (R. Fiorito) 1
R41 (J. Smith) 1
R41 (R. Chen) 1
R41 (K. Nguyen) 20
R41 (R. Stark) 1
R41 (R. Schneider) 1
R41 (M. Moffatt) 1
E231 9
E232 3

END

3-87

Dtic