

AD-A190 395 FUNCTIONAL DESCRIPTION FOR THE DEPARTMENT OF THE ARMY MOVEMENTS MANAGEMEN..(U) INTERNATIONAL BUSINESS SERVICES INC PRINCE GEORGE VA DEFENSE S.. W ANCKAITIS

1/10

UNCLASSIFIED 31 DEC 87 DSDPG-375-049-87-3-VOL-3 F/G 12/7 NL

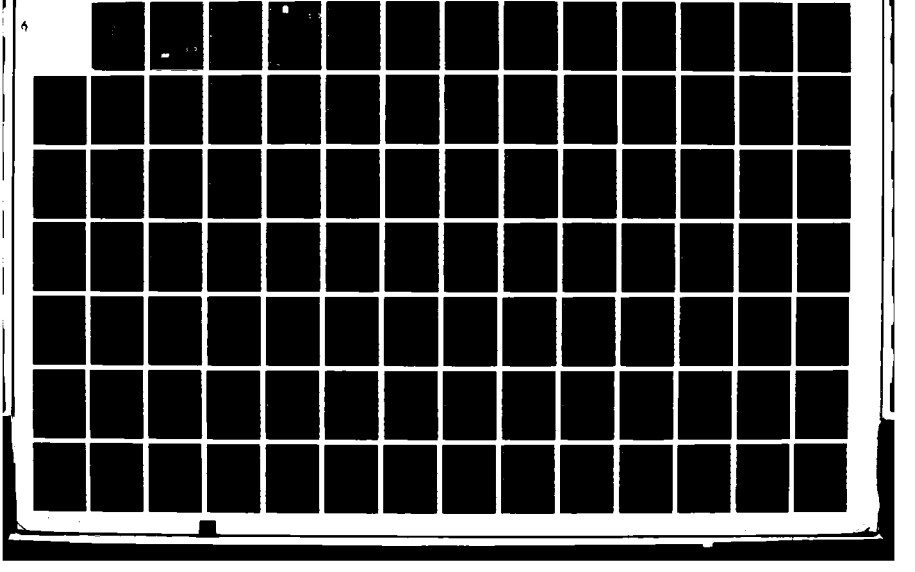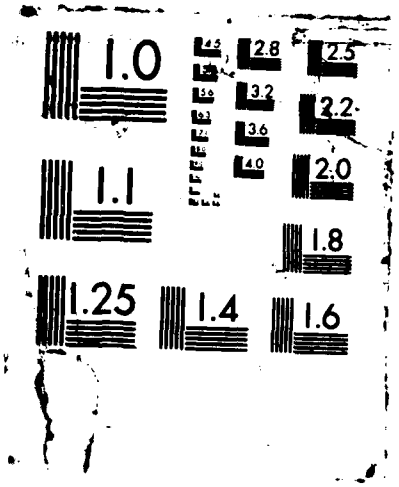


1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0

(1)

DTIC FILE COPY

AD-A190 395

FUNCTIONAL DESCRIPTION FOR THE DEPARTMENT OF THE ARMY MOVEMENTS MANAGEMENT SYSTEM - REDESIGN PHASE ONE (DAMMS-R1)

VOLUME III of III

DTIC
ELECTE
S FEB 09 1988 D
H

IBS International Business Services, Inc.

A COMARCO Company

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE

AD-A190 395

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED	1b. RESTRICTIVE MARKINGS
2a. SECURITY CLASSIFICATION AUTHORITY USALOGC	3. DISTRIBUTION/AVAILABILITY OF REPORT US Army Logistics Center ATTN: ATCL-SDB Fort Lee, Virginia 23801-6000 UNLIMITED
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE	
4. PERFORMING ORGANIZATION REPORT NUMBER(S) DSDPG-375049-87-03	5. MONITORING ORGANIZATION REPORT NUMBER(S)
6a. NAME OF PERFORMING ORGANIZATION International Business Services 6b. OFFICE SYMBOL (If applicable)	7a. NAME OF MONITORING ORGANIZATION USALOGC
6c. ADDRESS (City, State, and ZIP Code) 4300 Crossings Boulevard Prince George, Virginia 23875	7b. ADDRESS (City, State, and ZIP Code) Fort Lee, Virginia 23801-6000
8a. NAME OF FUNDING/SPONSORING ORGANIZATION USALOGC 8b. OFFICE SYMBOL (If applicable) ATCL-SDB	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER DABT60-85-C-0519
8c. ADDRESS (City, State, and ZIP Code) Fort Lee, Virginia 23801-6000	10. SOURCE OF FUNDING NUMBERS PROGRAM ELEMENT NO. / PROJECT NO. / TASK NO. LA07-87 / WORK UNIT ACCESSION NO.

11. TITLE (Include Security Classification) ADSM 18-LZ4-AKM-BUR-FD
Functional Description for the Department of the Army Movements Management System-Redesign
ase One (DAMMS-R1) Volume III of III

12. PERSONAL AUTHOR(S)
Mr. William Anckaitis

13a. TYPE OF REPORT	13b. TIME COVERED	14. DATE OF REPORT (Year, Month, Day)	15. PAGE COUNT
Working Draft	FROM _____ TO _____	31 December 1987	

16. SUPPLEMENTARY NOTATION

17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)
FIELD	GROUP	SUB-GROUP	Automated, Database, Query, Reporting, Transportation, Transportation Management, Database Systems).

19. ABSTRACT (Continue on reverse if necessary and identify by block number)

The Functional Description for the Department of the Army Movements Management Systems - Redesign Phase 1 (DAMMS-R1)contains functional information concerning the design and development of the DAMMS-R1 subsystems; Freight, Container, and Transportation Movements Address Subsystem (TMAS). This document also includes information about the Data Model, files sets, and the Data Element Dictionary. (Keywords: automated; data bases;)


20. DISTRIBUTION/AVAILABILITY OF ABSTRACT	21. ABSTRACT SECURITY CLASSIFICATION
☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT. ☐ DTIC USERS	

22a. NAME OF RESPONSIBLE INDIVIDUAL	22b. TELEPHONE (Include Area Code)	22c. OFFICE SYMBOL
Major Olin Rush	(804) 734-2062	ATCL-SDB

DD Form 1473, JUN 86 Previous editions are obsolete.

SECURITY CLASSIFICATION OF THIS PAGE
UNCLASSIFIED

(1)



ADSM 18-L24-AKM-BUR-FD
DECEMBER 1987

DTIC
ELECTE
FEB 09 1988
S D
H

Automated Data Systems Manual

FUNCTIONAL DESCRIPTION (FD) FOR THE DEPARTMENT OF THE ARMY MOVEMENTS MANAGEMENT SYSTEM - REDESIGN PHASE ONE (DAMMS-R1)

VOLUME 3 OF 3

This publication is not available from the US Army
Adjutant General Publications Center.
Request copies from
Commander, US Army Logistics Center
ATTN: ATCL-SR
Fort Lee, Virginia 23801-6000

or
y Codes
nd/or
al
A-1

HEADQUARTERS, DEPARTMENT OF THE ARMY

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

88 2 2 058

PARAGRAPH		PROCESS OBJECTS	PAGE
1	1	TMAS-Management	III-1608
29	2	Build/Maintain-System-Uniques	III-1692
30	3	Build/Maintain-AddressCat-Tbl ...	III-1694
31	3	Build/Maintain-BBPUnique-Tbl	III-1696
32	3	Build/Maintain-City-Tbl	III-1698
33	3	Build/Maintain-CityGroup-Tbl	III-1700
34	3	Build/Maintain-Country-Tbl	III-1702
35	3	Build/Maintain-[illegible]-Tbl	III-1704
36	3	Build/Maintain-ETAFcstLvl-Tbl ...	III-1706
37	3	Build/Maintain-Holiday-Tbl	III-1708
38	3	Build/Maintain-LMF-Tbl	III-1710
39	3	Build/Maintain-MACOM-Tbl	III-1712
40	3	Build/Maintain-MCFType-Tbl	III-1714
41	3	Build/Maintain-MMCUnique-Tbl	III-1716
42	3	Build/Maintain-MovConElm-Tbl	III-1718
43	3	Build/Maintain-Port-Tbl	III-1721
44	3	Build/Maintain-PortType-Tbl	III-1724
45	3	Build/Maintain-TTPUnique-Tbl	III-1726
46	3	Build/Maintain-Parameter-Tbl	III-1728
2	2	Build/Maintain-TMAF	III-1610
3	3	Build/Maintain-Activity	III-1612
4	3	Build/Maintain-BillingAdrs	III-1624
5	3	Build/Maintain-RemarkLine	III-1626
6	3	Maintain-FreightAdrs	III-1628
7	2	Manage-Ship-to-POC-Info	III-1637
8	3	Display-Ship-to-POC-Info	III-1639
9	3	Update-Ship-to-POC-Info	III-1641
10	2	Prep-Hold-Files-Transmission	III-1644
11	3	Prep-CMM-Out-Changes	III-1646
12	3	Prep-Contact-Out-Changes	III-1649
13	2	Print-Reports	III-1652
14	3	Print-Selected-TMAF-Records	III-1654
15	3	Create-System-Unique-Tbl-Rept ...	III-1656
16	3	Print-BillingAdrs-Report	III-1659
17	3	Error-Reports	III-1661
18	4	Create-Error-Analysis-Report ...	III-1663
19	4	Print-Blank-Frt/Actv-Wksht	III-1665
20	4	Print-Actv-Rec-Wksht	III-1667
21	4	Print-Frt-Rec-Wksht	III-1669
22	2	Create-CMM-Mass-Update-File	III-1671
23	2	Build-Contact-Files	III-1676
24	3	Set-Up-Contact-Files	III-1678
25	3	Create-Contact-Files	III-1681
26	2	Search/Display-Records	III-1686
27	3	Activity-Inquiry	III-1688
28	3	Freight-Inquiry	III-1690

FIGURES

DATA FLOW DIAGRAMS

FIGURE	PROCESS OBJECTS	PAGE
1	Build/Maintain-Activity	III-1611
2	Build/Maintain-BillingAdrs	III-1623
3	Build/Maintain-RemarkLine	III-1625
4	Maintain-FreightAdrs	III-1627
5	Display-Ship-to-POC-Info	III-1638
6	Update-Ship-to-POC-Info	III-1640
7	Print-Selected-TMAF-Records	III-1653
8	Print-Actv-Rec-Wksht	III-1666
9	Print-Frt-Rec-Wksht	III-1668
10	Create-CMM-Mass-Update-File	III-1670
11	Set-Up-Contact-Files	III-1677
12	Create-Contact-Files	III-1680
13	Build/Maintain-AddressCat-Tbl ..	III-1693
14	Build/Maintain-BBPUnique-Tbl ...	III-1695
15	Build/Maintain-City-Tbl	III-1697
16	Build/Maintain-CityGroup-Tbl ...	III-1699
17	Build/Maintain-Country-Tbl	III-1701
18	Build/Maintain-DSSALOC-Tbl	III-1703
19	Build/Maintain-ETAFcstLvl-Tbl ..	III-1705
20	Build/Maintain-Holiday-Tbl	III-1707
21	Build/Maintain-LMF-Tbl	III-1709
22	Build/Maintain-MACOM-Tbl	III-1711
23	Build/Maintain-MCEType-Tbl	III-1713
24	Build/Maintain-MMCUnique-Tbl ...	III-1715
25	Build/Maintain-MovConElm-Tbl ...	III-1717
26	Build/Maintain-Port-Tbl	III-1720
27	Build/Maintain-PortType-Tbl	III-1723
28	Build/Maintain-TTPUnique-Tbl ...	III-1725
29	Build/Maintain-Parameter-Tbl ...	III-1727

This page intentionally left blank.

```
1       DEFINE PROCESS                          TMAS-Management ;
      DESCRIPTION;
   Transportation Movements Address System Management.
    ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ,
                      'TACCS' ;
      SUBPART IS:     Build/Maintain-System-Uniques ,
                      Build/Maintain-TMAF ,
                      Manage-Ship-to-FCC-Info ,
                      Prep-Hold-Files-Transmission ,
                      Print-Reports ,
                      Create-CMM-Mass-Update-File ,
                      Build-Contact-Files ,
                      Search/Display-Records ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TMAS Team' ;
```

This page intentionally left blank.

```
2       DEFINE PROCESS                          Build/Maintain-TMAF ;
     DESCRIPTION;
Build/Maintain Transportation Movements Address File.
In this process, records are added, copied, renamed, modified, or
deleted in the four subsets of the TMAF.

The subsets are:
   Activity-File, FreightAdrs-File, BillingAdrs-File, or
   RemarkLine-File.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    SUBPART IS:     Build/Maintain-Activity ,
                    Build/Maintain-BillingAdrs ,
                    Build/Maintain-RemarkLine ,
                    Maintain-FreightAdrs ;
    PART OF:        TMAS-Management ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

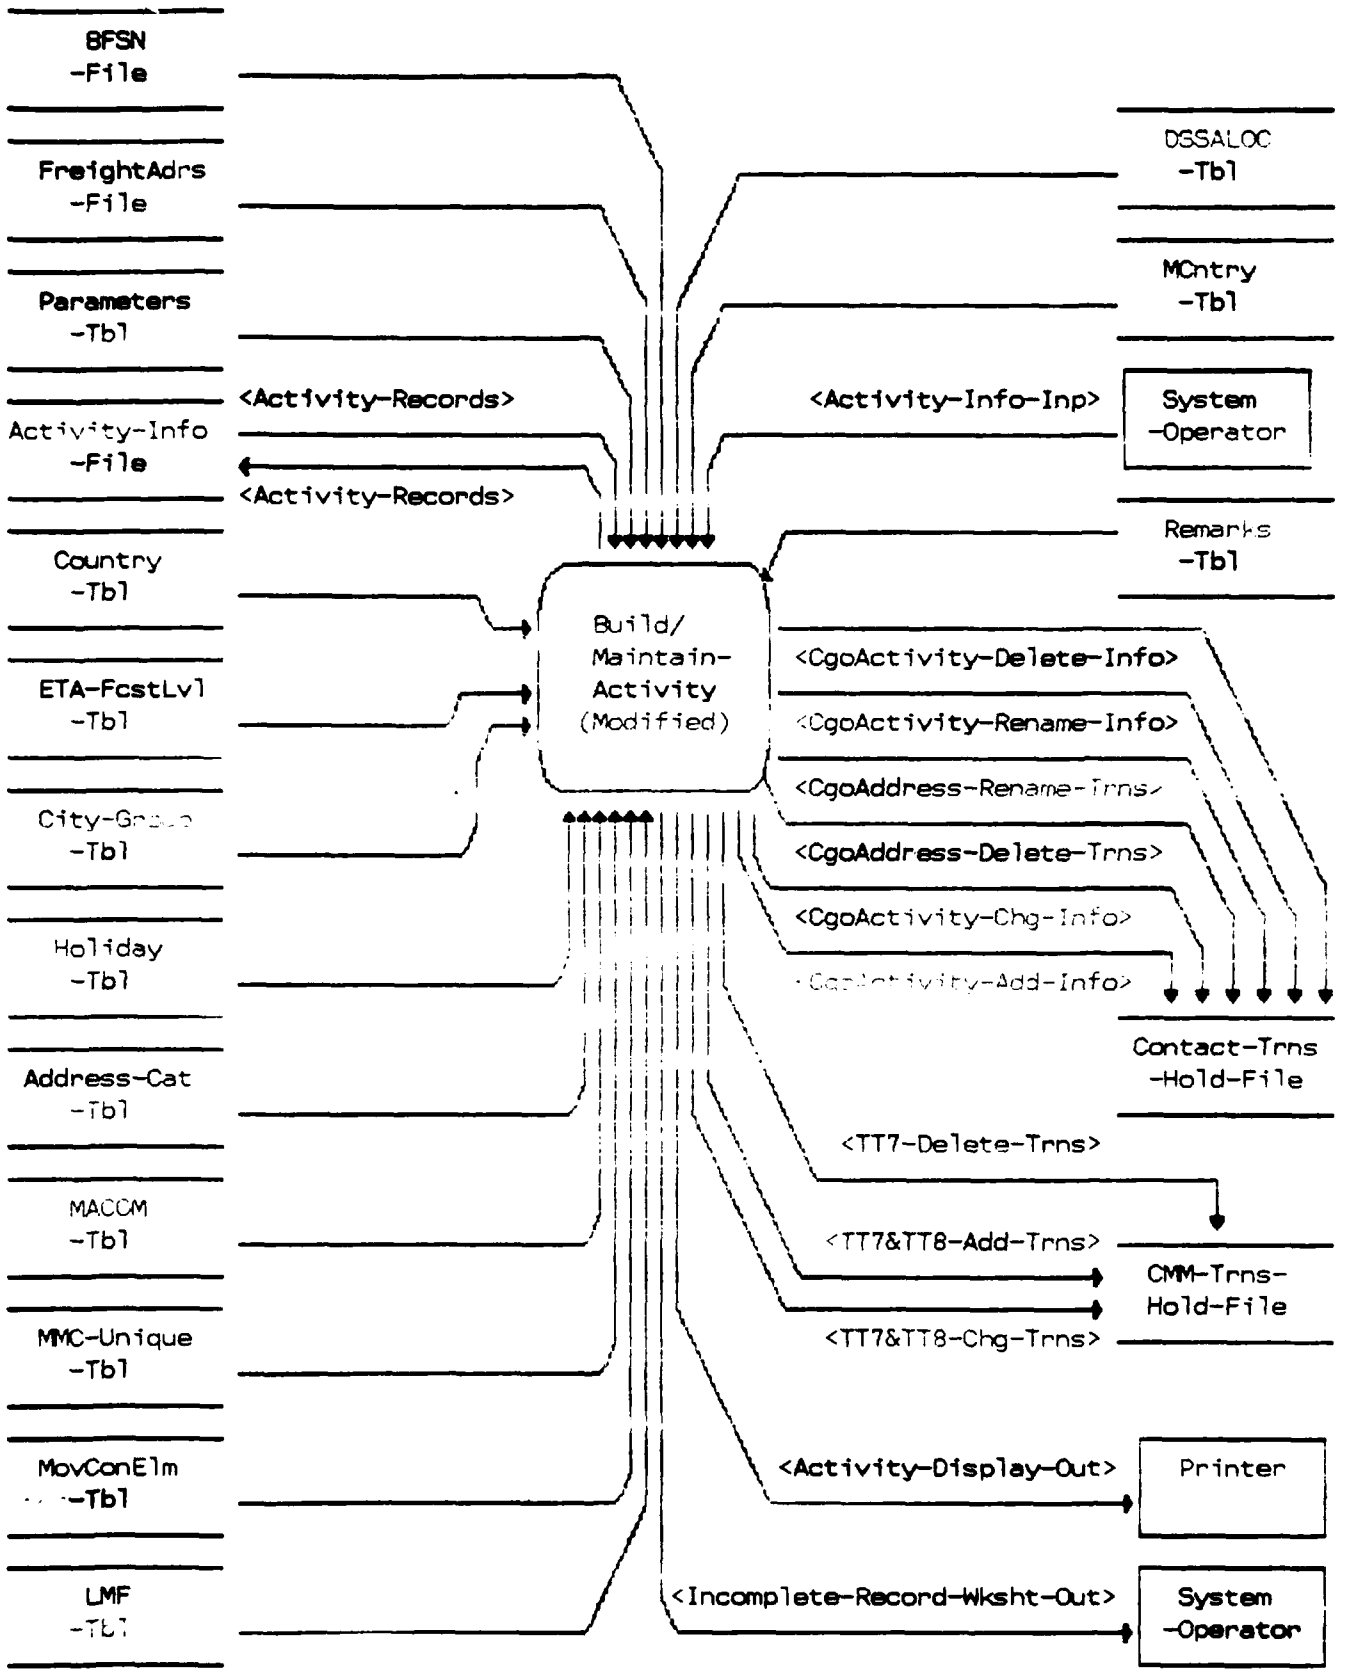


Figure 1. Build/Maintain-Activity

3 DEFINE PROCESS Build/Maintain-Activity ;
DESCRIPTION;
Build/Maintain Activity File.
In this process, records are added, copied, renamed, modified, or deleted in the Activity File. Data elements are edited before being stored in the Activity File. Data elements used in the "copy", "rename", "modify" or "delete" functions that fail the edit are rejected. Data elements used in the "add" function that fail the edit are flagged, stored as an incomplete record and a worksheet can be printed is selected to be researched. The operator has the options of calling up help screens, printing the screens being viewed, or clearing the screens.

If AACCurr and related data elements are required by the CMM Address File, the process will format a TT7/TT8 transaction and send it to the CMM Transactions Hold File. Data elements required for the updating of the Contact database will be selected, formatted and stored in the Contact Transactions Hold File.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
SEE MEMO:
CMM-Transaction-Formats ,
Contact-Transaction-Formats ,
TCR-Build/Maint-Activity ;
Activity-Display-Info-Out ;
RECEIVES:
Activity-Info-Inp ;
PART OF: Build/Maintain-TMAF ;
PROCEDURE;

NOTE: The procedures within this process pertains to complete Activity records that point to a complete Freight record. No action is required for incomplete Activity and/or Freight records. Also, no action is required for Activity record with a CMM Indicator Code "N" in the CMM Address update procedures. For the procedures pertaining to CMM, the AACCurr must point to itself in the Freight Address File.

PROCEDURE NAME: Validate CMM Environment

Location Information: Main Menu, Convergent Solutions Applications Development System Screen.

User selects Build/Maintain TMAF or TMAS Admin

IF:

CMMEnvironmentCd is "N"

THEN:
No action is required.

IF:
CMMEnvironmentCd is "Y"

THEN:
Activate CMM update procedures.

END PROCEDURE.

PROCEDURE NAME: Create CMM Transaction Header Information

This procedure creates OrigCd and ChNo and generates DIC and CH-CD. These data elements will populate the first nine (9) card columns of every CMM transaction created by the Maintain-FreightAdr and Build/Maintain-Activity processes and will be formatted as follows:

DATA ELEMENT	CC
DIC	1-3
OrigCd	4-6
CH-CD	7
ChNo	8-9

NOTE: DIC and CH-CD are derived from the user selected TMAS function i.e. "add", "modify" (change) and "delete". OrigCd and ChNo reside in the Parameter Table.

END PROCEDURE.

PROCEDURE NAME: Create Formatted CMM Address File "Add" Transaction(s)

Location Information: Screen AKM05FD (Activity Information)

User enter Activity data elements and executes the addition of a record to the Activity File

THEN:
Simultaneously with the Activity File update, create a TT7 "add" and TT8 "add" transaction. See CMM Address memo formatting instruction.

IF:
Activity data element, MUDsg, consists of 33 or more characters

THEN:
Truncate MUDsg to 32 characters and enter same in card columns 16 through 47 of the TT8 format.

IF:
Activity data elements, FCityRgn and FCountry, combined consist of 27 or more characters

THEN:
Truncate FCityRgn to the first 24 characters and enter same in card columns 48 through 71. Also, enter FCntry in card columns 73-74 of the TT8 format.

ALSO:
The MCEPrefix and MCESuffix from the MovConElm-Tbl are consumed to generate AACMCT and enter into card columns 33 through 38 and generate AACITO and enter into card columns 39 through 44 of the Address File Change Card TT7. AACMCT and AACITO are derived from the respective AACMCE that resides in the MovConElm-Tbl.

POST:
Formatted transaction to the CMM Address Hold File.

END PROCEDURE.

PROCEDURE NAME: "Copy" Function Selection As It Relates to CMM

User has copied an Activity Address [illegible] utilizing screen AKM05FD and executes the copy of the record in the Activity File. If CMM Indicator of copied record was "Y", this procedure will force the CMM Indicator to "N".

END PROCEDURE.

PROCEDURE NAME: Create Formatted CMM Address File "Modify" Transaction(s)

Location Information: Screen AKM05FD (Activity Information)

User enters/selects to AACCurr and selects function key F-7 (modify). User enters desired modifications (changes) and executes

the modified record(s) to the Activity File.

IF:
The data elements, MUDsg and MAPO1st5, was changed and the CMM Indicator for the record was "Y"

THEN:
Simultaneously with the Activity File update, create a TT7 "change" and TT8 "change" transaction. See CMM Address memo formatting instruction.

IF:
The CMM Indicator was changed from "N" to "Y" and the AACCurr points to itself in the Freight Address File and the Freight Address record is a complete record

THEN:
Simultaneously with the Activity File update, create a TT7 "add" and TT8 "add" transaction. See CMM Address memo formatting instruction.

IF:
The CMM Indicator was changed from "Y" to "N"

THEN:
Simultaneously with the Activity File update, create a TT7 "delete" transaction (see PROCEDURE NAME: Create formatted CMM Address File "delete" transaction).

IF:
The Activity record was completed during this process and it points to itself in the Freight Address File and the Freight Address File record is a complete record

THEN:
Simultaneously with the Activity File update, create a TT7 "add" and TT8 "add" transaction. See CMM Address memo formatting instruction.

IF:
The Activity record was completed during this process and it points to itself in the Freight Address File and the Freight Address record is incomplete

THEN:
No action is required.

IF:
The AACCurr points to a complete Freight Address record, but

not to itself and is modified to point to itself

THEN:
Simultaneously with the Activity File update, create a TT7 **"add" and TT8 "add" transactions. See CMM Address memo** formatting instructions.

IF:
The AACCurr points to itself as a complete Freight Address record and is modified to point to a complete Freight record other than itself

THEN:
Simultaneously with the Activity File update, create a TT7 **"delete" transaction.**

POST:
Formatted transaction(s) to the CMM Address Hold File.

END PROCEDURE.

PROCEDURE NAME: Create Formatted CMM Address File "Delete" Transactions

Location Inform[illegible]5FD (Activity Information)

User enters AACCurr and selects function key F-10 (delete). Deletion is executed in the Activity File.

Simultaneously with the Activity File update, create a TT7 "delete" transaction.

"TT7 Delete" format is as follows:

DATA ELEMENT	CC	ENTER
DIC	1-3	TT7
Origin Code	4-6	**TBD**
Change Code	7	D
Change Number	8-9	TBD
AACCurr	10-15	**AACCurr to be deleted**
Blank	16-80	Filler

POST: TT7 formatted transaction to the CMM Transactions Hold File.

END PROCEDURE.

PROCEDURE NAME: Create Formatted CMM Address File "Reassign" (Change) Transaction

Location Information: Screen AKM05FD (Activity Information)

User enters AACCurr and selects function key F-5 (reassign). New AACCurr is entered and the reassignment is executed in Activity File.

IF:
User attempts to "reassign" an incomplete record

THEN:
Reassignment will be denied and system will prompt user with screen message: "Reassignment Denied - Record is incomplete and can not be reassigned".

IF:
User attempts to "reassign" an AACCurr that already resides in the Activity or Freight Address File

THEN:
Reassignment will be denied and the system will prompt the user with a screen message: "Requested Reassignment is Denied. AACCurr entered already resides in the Freight Address File or Activity File".

ELSE:
Simultaneously with the Activity File update, create a TT7 "change" and TT8 "change" transaction. See CMM Address memo formatting instruction.

"TT7 change" format as follows:

DATA ELEMENT	CC	ENTER
DIC	1-3	TT7
Origin Code	4-6	TBD
Change Code	7	C
Change Number	8-9	TBD
AACCurr (old)	10-15	AACCurr to be changed
AACCurr (new	16-21	New AACCurr

POST: TT7 formatted transaction to the CMM Transactions Hold File.

END PROCEDURE.

PROCEDURE NAME: Create Formatted Contact File "Add" Transaction

Location Information: Screen AKM08FD (Activity Information)

User has created an Activity Record utilizing screens AKM05FD, AKM06FD, AKM08FD and executes the filing of the record in the Activity File.

Simultaneously with the Activity File update, create a Cargo Activity "add" transaction.

POST:
Formatted Transaction to the Contact-Transactions-Hold-File.

END PROCEDURE.

PROCEDURE NAME: Create Formatted Contact File "Add" Transaction for Copy Function Selection

User has copied an Activity [illegible] utilizing screen AKM05FD and executes the copy of the record in the Activity File.

THEN:
Simultaneously with the Activity File update, create a Cargo Activity "add" transaction. The format for this transaction is provided in enclosed memo.

POST:
Formatted transaction to the Contact-Transactions-Hold-File.

END PROCEDURE.

PROCEDURE NAME: Create Formatted Contact File "Delete" Transaction

Location Information: Screen AKM05FD (Activity Information)

User has deleted an Activity Record from screen AKM05FD and executes the deletion of the record from the Activity File.

IF:

The AACCurr points to itself in the Freight Address File and no other Activity record points to that Ship To AAC

THEN:
Create a Cargo Activity and a Cargo Address "delete" transaction.

IF:
The AACCurr points to itself in the Freight Address File and other Activities also point to the same Ship To AAC

THEN:
No action is required.

POST:
Formatted Transaction to the Contact-Transactions-Hold-File.

END PROCEDURE.

PROCEDURE NAME: Create Formatted Contact File "Change" Transaction

Location Information: Screen AKM08FD (Activity Information)

Simultaneous Activity File update, create a Cargo Activity "change" transaction. Format for this transaction is provided in enclosed memo

NOTE: This transaction should be completed if one or more of the following data elements were changed:

AACCurr
UDsg
UDsgCont
CntryCd
St
BldgNo
PostCd
APO1st5
APOLst4
CityRgn
Attn
TELEX
DDNHostCd
DDNHostCd
DSSALOCCd
ShipToAAC

IF:
The AACCurr points to a complete Freight Address record, but not to itself and is modified to point to itself

THEN:
Simultaneously with the Activity File update, create a Cargo Activity "change" transaction format for this transaction is provided in enclosed memo.

IF:
The AACCurr points to itself as a complete Freight Address record and is modified to point to a complete Freight Address record other than itself

THEN:
Simultaneously with the Activity File update, create a Cargo Activity "change" transaction.

THEN:
Formatted Transaction to Contact-Transactions-Hold-File.

END PROCEDURE

PROCEDURE NAME: Create Formatted Contact File "Rename" Transaction

Location Information: Screen AKM05FD (Activity Information)

User has selected an Activity record, by AACCurr, utilizing screen AKM05FD, and executes the "rename" procedure in the Activity File.

IF:
User attempts to "rename" an incomplete Activity record

THEN:
Rename request will be denied and system will prompt user with screen message: "Rename Denied. Selected record is incomplete in Activity File.

IF:
User attempts to "rename" a record with an AACCurr that already resides in the Activity or Freight Address Files

THEN:
Rename request will be denied and system will prompt user with screen message: "Rename Denied. Record exist in Freight Address or Activity File.

IF:
Activity record points to itself in the Freight Address File and other Activity records also pointed to the old Ship To AAC

THEN:
Simultaneously with the Activity File update, create a Cargo Activity "rename" transaction and Cargo Address "rename" transaction for that record and Cargo Activity "change" transaction(s) for all other Activities that pointed to the old Ship To AAC.

POST:
Formatted transaction to Contact-Transactions-Hold-File.

END PROCEDURE.

;

MAINTAINS:
Activity-File ;
MAINTAINS:
FreightAdrs-File ;
UPDATES:
CMM-Transactions-Hold-File ;
UPDATES:
[illegible]tions-Hold-File ;
EMPLOYS:
[illegible]ile ,
Country-Tbl ,
DSSALOC-Tbl ,
MACOM-Tbl ,
RemarkLine-File ,
TMAS-System-Parameter-Tbl ;
ADDS: CgoActivity-Contact-Trns-Info TO Contact-Transactions-Hold-File ;
ADDS: CgoAddress-Contact-Trns-Info TO Contact-Transactions-Hold-File ;
ADDS: TT7/TT8-CMM-Trns-Info TO CMM-Transactions-Hold-File ;
ADDS: Activity TO Activity-File ;
ADDS: FreightAdrs TO FreightAdrs-File ;
MODIFIES: Activity IN Activity-File ;
MODIFIES: FreightAdrs IN FreightAdrs-File ;
REFERENCES: Activity IN Activity-File ;
REFERENCES: BillingAdrs IN BillingAdrs-File ;
REFERENCES: Country IN Country-Tbl ;
REFERENCES: DSSALOC IN DSSALOC-Tbl ;
REFERENCES: FreightAdrs IN FreightAdrs-File ;
REFERENCES: MACOM IN MACOM-Tbl ,
REFERENCES: RemarkLine IN RemarkLine-File ;
REFERENCES: Parameter IN TMAS-System-Parameter-Tbl ;

```
REMOVES:        Activity FROM Activity-File ;
REMOVES:        FreightAdrs FROM FreightAdrs-File ;
DESTROYS:
     Activity ,
     FreightAdrs ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TMAS Team' ;
```

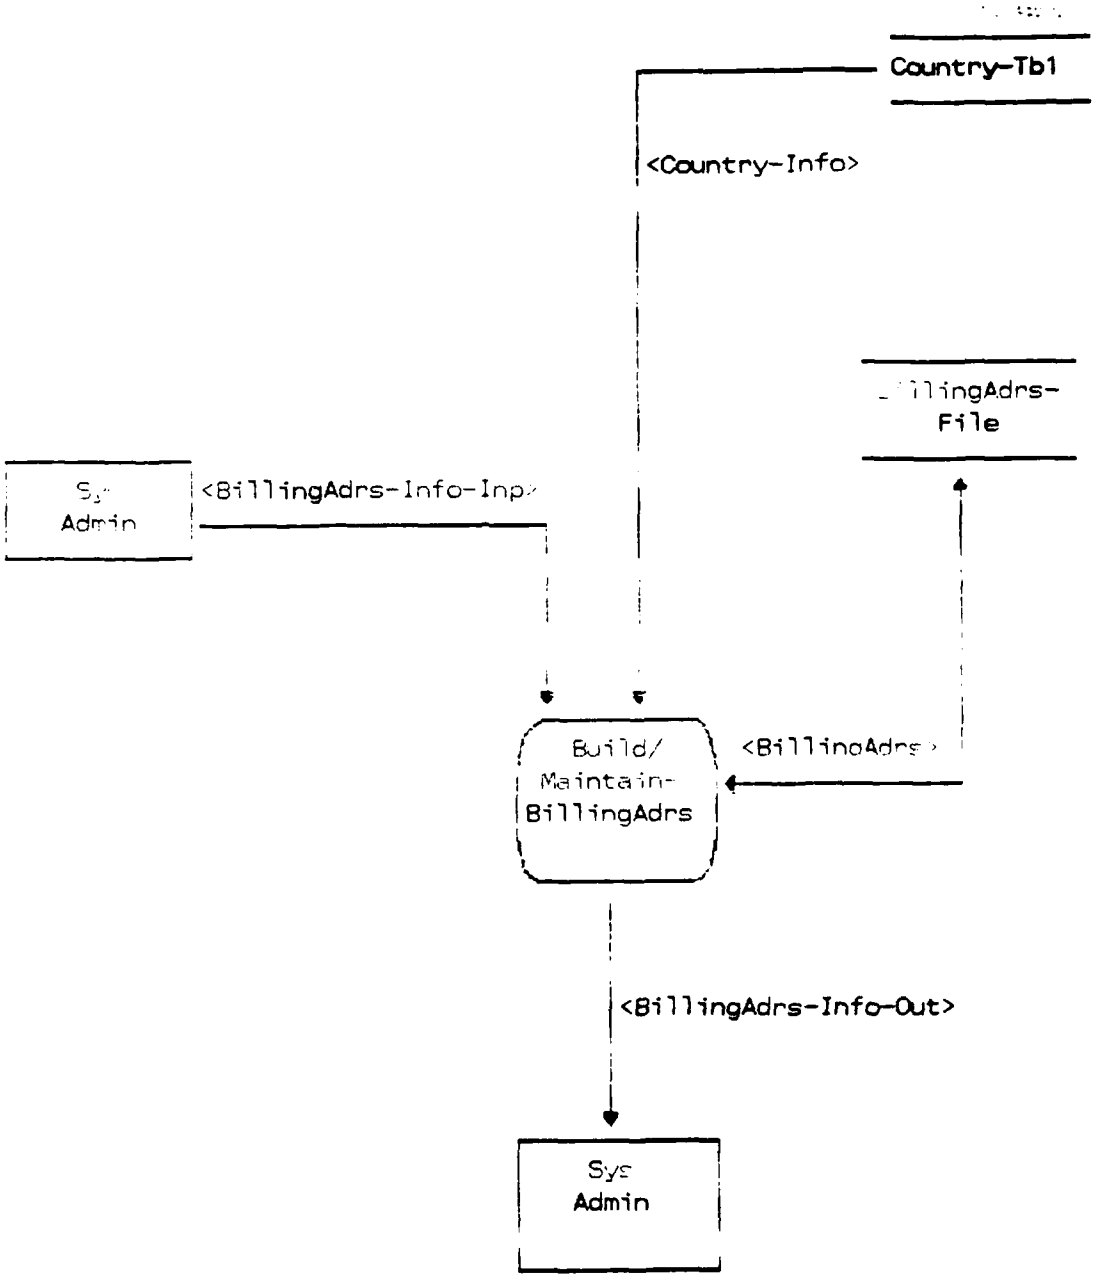


Figure 2. Build/Maintain-BillingAdrs

```
4       DEFINE PROCESS                    Build/Maintain-BillingAdrs ;
    DESCRIPTION;
Build/Maintain Billing Address File.
In this process, records are added, renamed, modified, deleted, viewed,
or printed.  The BillingAdrs record will be taken from the BillingAdrs-
File, if a record exists, to be renamed, modified, deleted, viewed,
or printed.  If there is no BillingAdrs for the input BFSN, a screen
will be displayed for the input of BillingAdrs data element values.
If the data element BFSN value is changed, it will be globally
changed in all applicable records in the Activity-File.  Deletes will
not be permitted if the BFSN to be deleted is contained in any
Activity record.
    ,
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    SEE MEMO:
         TCR-Build/Maint-BillingAdrs ;
    GENERATES:
         BillingAdrs-Record-Out ;
    RECEIVES:
         BillingAdrs-Info-Inp ;
    PART OF:        Build/Maintain-TMAS ,
    MAINTAINS:
         BillingAdrs-File ,
    MAINTAINS:
         Activity-File ;
    EMPLOYS:
         Country-Tbl ;
    ADDS:           BillingAdrs TO BillingAdrs-File ;
    MODIFIES:       BillingAdrs IN BillingAdrs-File ;
    MODIFIES:       Activity IN Activity-File ;
    MODIFIES:       BFSN-Info IN Activity-File ;
    REFERENCES:     Country IN Country-Tbl ;
    REFERENCES:     BillingAdrs IN BillingAdrs-File ;
    REFERENCES:     BFSN-Info IN Activity-File ;
    REMOVES:        BillingAdrs FROM BillingAdrs-File ;
    DESTROYS:
         BillingAdrs ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

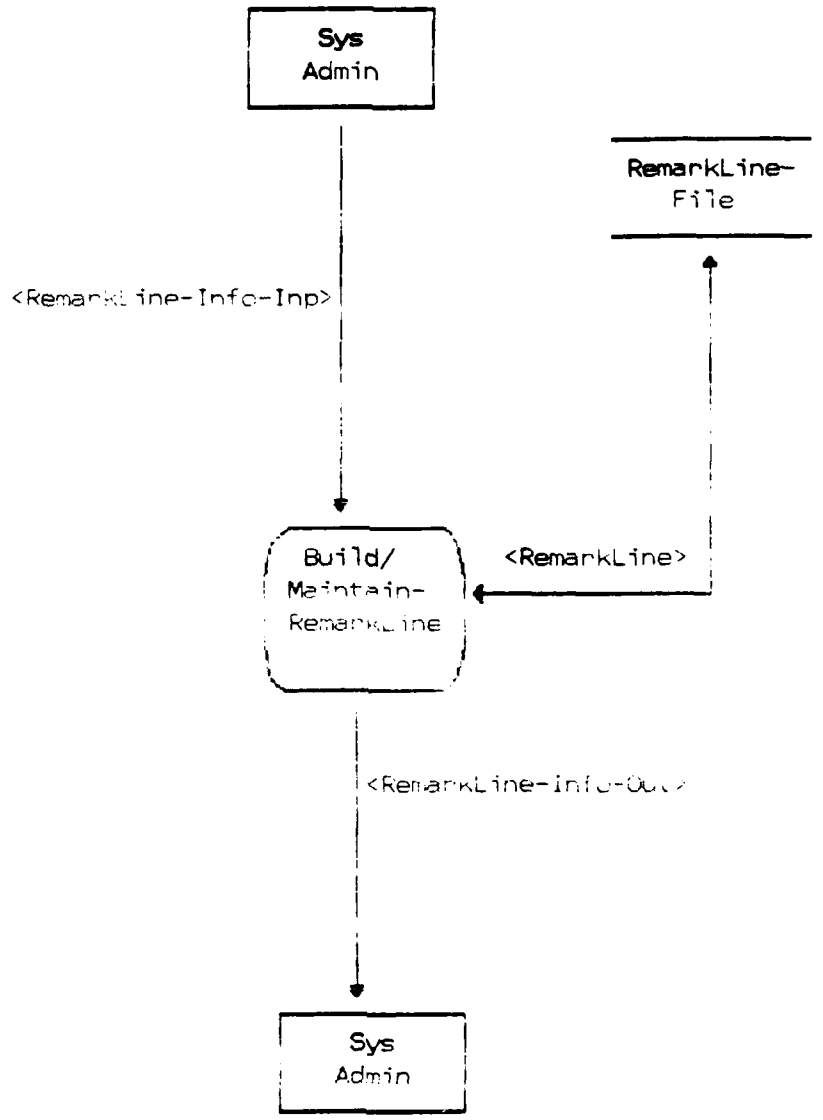


Figure 3. Build/Maintain-Remark[illegible]

```
5       DEFINE PROCESS                    Build/Maintain-RemarkLine ;
     DESCRIPTION;
Build/Maintain RemarkLine File.
In this process, RemarkLine records are added, changed, deleted, viewed
or printed. The RemarkLine record will be taken from the RemarkLine-File,
if a record exists in Activity-File, to be modified, deleted, viewed
or printed.  If there is no RemarkLine for the input DODAAC, a screen
will be displayed for the input of remarks.
;
     KEYWORD IS:       'TMAS'
                       'LOB' ,
                       'TACCS' ;
     SEE MEMO:
          TCR-Build/Maint-RemarkLine ;
     GENERATES:
          RemarkLine-Info-Out ;
     RECEIVES:
          RemarkLine-Info-Inp ;
     PART OF:          Build/Maintain-TMAF ;
     MAINTAINS:
          RemarkLine-File ;
     ADDS:             RemarkLine TO RemarkLine-File ;
     MODIFIES:         RemarkLine IN RemarkLine-File ;
     REFERENCES:       RemarkLine IN RemarkLine-File ;
     REFERENCES:       Activity IN Activity-File ;
     REMOVES:          RemarkLine FROM RemarkLine-File ;
     DESTROYS:
          RemarkLine ;
     RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

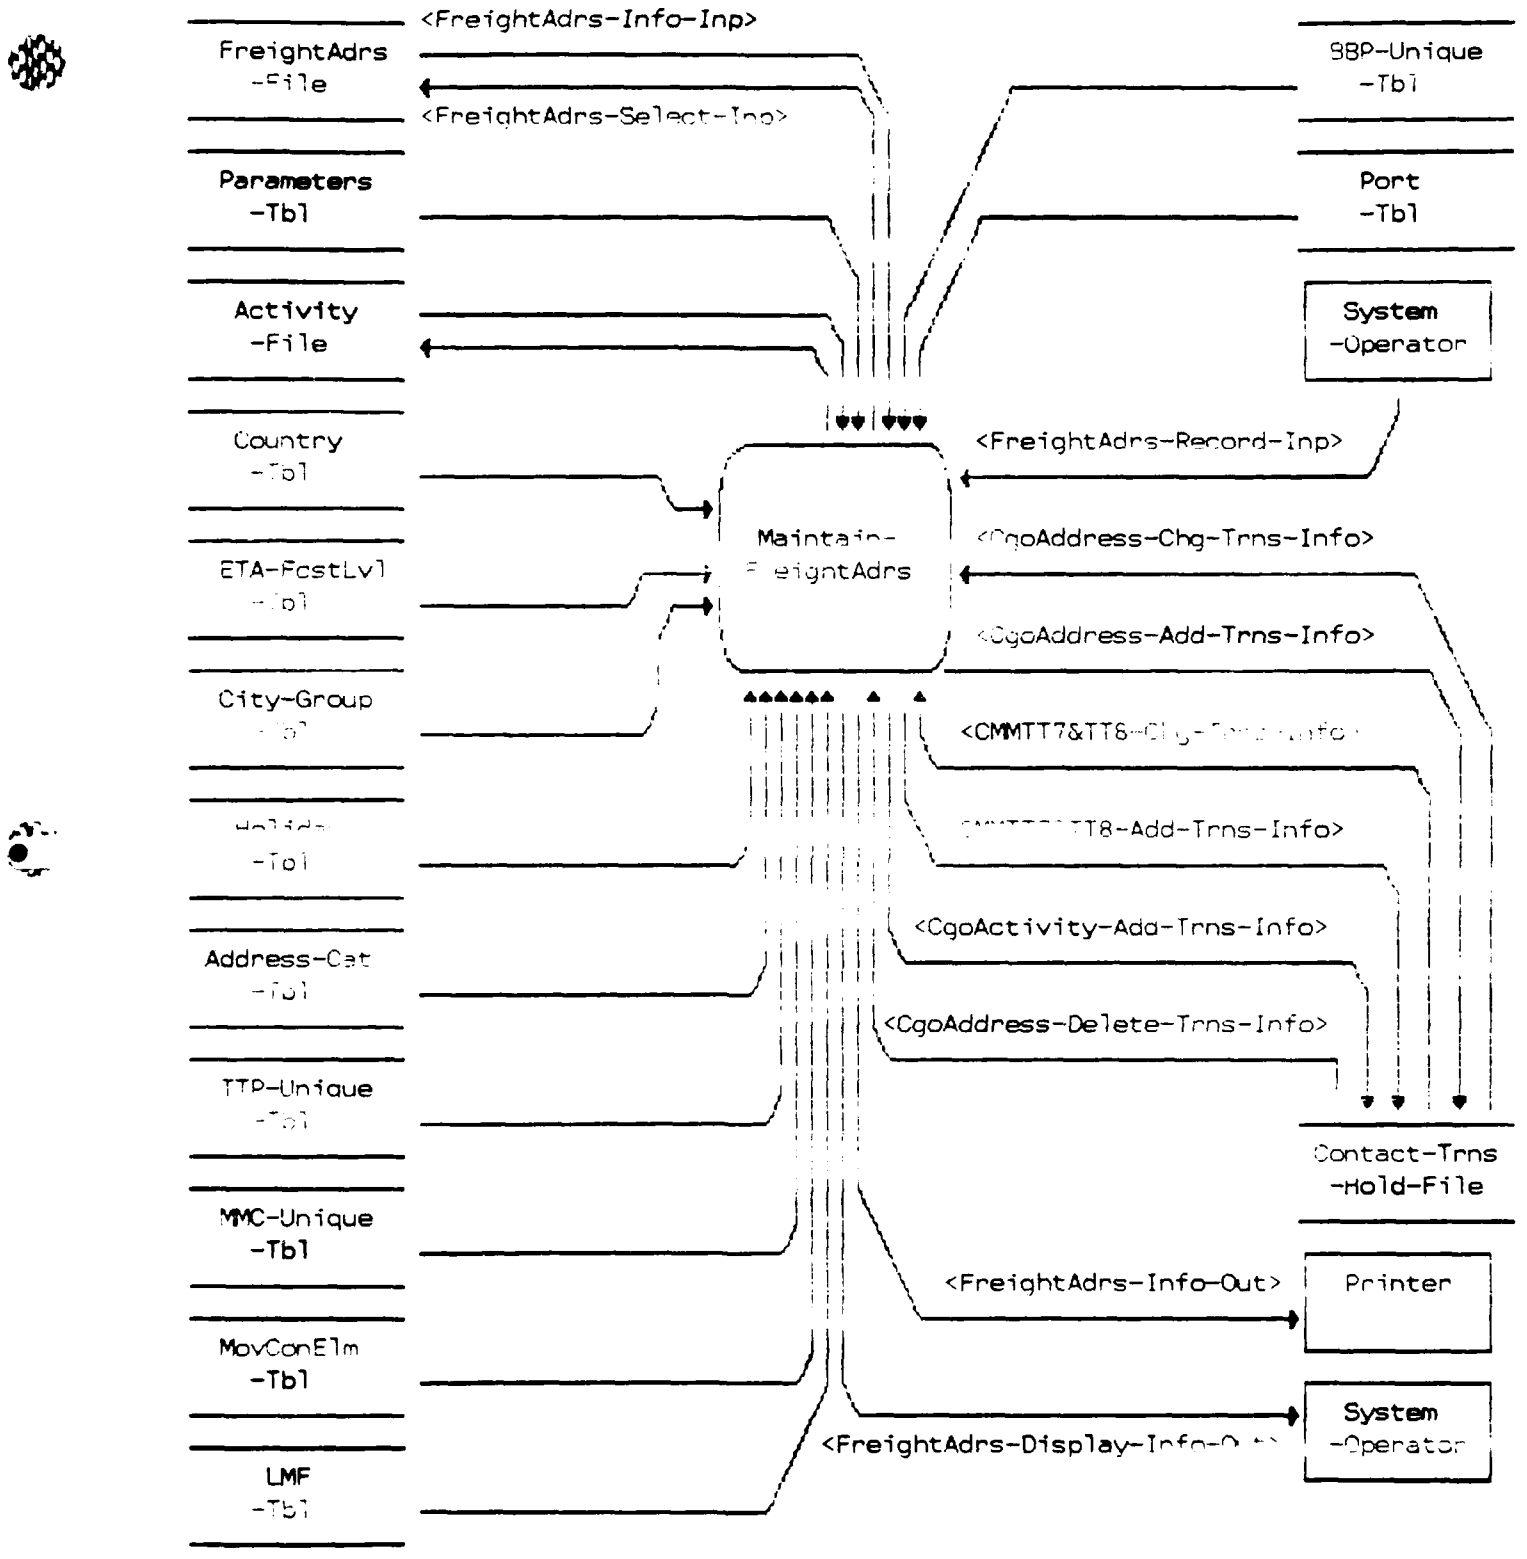


Figure 4. Maintain-FreightAdrs

6 DEFINE PROCESS Maintain-FreightAdrs ;
DESCRIPTION;
Maintain Freight Address File.
In this process, records are added, copied, modified or deleted in the TMAF. The value of the data element ShipToACC is renamed from the Build/Maintain-Activity process. Data elements are edited before being stored in the TMAF. Data elements that fail edit checks are rejected. The operator has the options of calling up HELP screens, printing the screens being viewed or clearing the screens. Additionally, CANCEL and/or FINISH may be selected during any add, copy, modification or deletion of a record.
If ShipToACC and related data elements are required by the CMM Address File, the record will be formatted to TT7/TT8 transaction and stored in the CMM Transactions Hold File. Data elements required for the updating of the Contact Database will be selected, formatted and stored in the Contact Transactions Hold File.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
SEE MEMO:
CMM-Transaction-Formats ,
Contact-Transaction-Formats ,
TCR-Maintain-FreightAdrs ;
GENERATES:
FreightAdrs-Display-Info-Out ;
RECEIVES:
FreightAdrs-Info-Inp ;
PART OF: Build/Maintain-TMAF ;
PROCEDURE;

NOTE: The procedures within this process pertain to complete Freight records only. No action is required for incomplete Freight records. Also, for the CMM Address File Update procedures, no action is required for Freight records that point to incomplete Activity records or complete Activity records that have a CMM Indicator Code of "N".

PROCEDURE NAME: Validate CMM Environment

Location Information: Main Menu, Convergent Solutions Applications Development System Screen.

User selected Build/Maintain TMAF or TMAS Admin

IF:
CMMEnvironmentCd is "N"

THEN:

No action required

IF:
CMMEnvironmentCd is "Y"

THEN:
Activate CMM Update Procedures

END PROCEDURE.

PROCEDURE NAME: Create CMM Transaction Header Information

This procedure creates OrigCd and ChNo and generates DIC and CH-CD. These data elements will populate the first nine (9) card columns of every CMM transaction created by the Maintain-FreightAdrs (modified) and Build/Maintain-Activity (modified) processes and will be formatted as follows:

DATA ELEMENT	CC
DIC	1-3
OrigCd	4-6
CH-CD	7
ChNo	8-9

NOTE: DIC and CH-CD are derived from the user selected TMAS function i.e. add, modify, and delete. OrigCd and ChNo reside in the Parameter Table

END PROCEDURE.

NOTE: The Add, (except for incomplete records completed during modification procedure) Copy, and Delete transactions (functions) to CMM Address Transactions Hold File are executed from the Build/Maintain Activity process. See Build/Maintain Activity for detailed explanation.

PROCEDURE NAME: Create Formatted CMM Transactions Hold File "Change" Transaction.

Location Information: Screen AKM07FD (Freight Information).

User enters/selects a Ship-To-DODAAC and selects function key F-7 (modify). User enters desired modifications (changes) and executes the modified record(s) to the Freight Address file.

IF:
User selected incomplete Freight Address record and completes the record

THEN:
Check if the record exist in the Activity File

IF:
The record exist in the Activity File and is complete and the CMM Indicator Code is "Y"

THEN:
Create a TT7 "add" and TT8 "add" transaction for those data elements that reside in the CMM Address File.
See CMM Address memo formatting instruction.

IF:
Activity data element MUDsg consist of 33 or more characters

THEN:
Truncate MUDsg to 32 characters and enter card column 16 through 47 of Address File Change Card TT8 for the CMM Address File data element Unit Designator entry

IF:
Freight Address data elements FCityRgn and FCntry combined consist of 27 or more characters

THEN:
Truncate FCityRgn to the first 24 characters and enter into card columns 48 through 71 and then enter FCntry as the last 2 characters in card columns 73-74 of the Address File Change card TT8 for the CMM Address File Unit Address data element

IF:
The record is a complete Freight Address record

THEN:
The MCEPrefix and MCESuffix from the MovConElm-Tbl are consumed to generate AACMCT and enter into card columns 33 through 38 and generate AACITO and enter into card columns 39 through 44 of the Address File Change Card TT7. AACMCT and AACITO are derived from the respective AACMCE that reside in the MovConElm-Tbl.

POST:
Formatted "add" transaction to the CMM Transactions Hold File

THEN:

Repeat procedure for all modified (changed) Freight Address incomplete records that are completed during this procedure.

IF:
User selected a complete Freight Address record

THEN:
Check if the record exist in the Activity File

IF:
The record exist in the Activity File and is complete and the CMM Indicator Code is "Y"

THEN:
Create a TT7 "change" and TT8 "change" transaction for those data elements that reside in the CMM Address File.
See CMM Address memo formatting instruction

IF:
Freight Address data element FUDsg consist of 33 or more characters

THEN:
Truncate FUDsg to 32 characters and enter card column 16 through 47 of Address File Change Card TT8 for the CMM Address File data element Unit Designator entry

IF:
Freight Address data elements FCityRgn and FCntry combined consist of 27 or more characters

THEN:
Truncate FCityRgn to the first 24 characters and enter into card columns 48 through 71 and then enter FCntry as the last 2 characters in card columns 73-74 of the Address File Change card TT8 for the CMM Address File Unit Address data element

IF:
The record is a complete Freight Address record

THEN:
The MCEPrefix and MCESuffix from the MovConElm-Tbl are consumed to generate AACMCT and enter into card columns 33 through 38 and generate AACITO and enter into card columns 39 through 44 of the Address File Change Card TT7. AACMCT and AACITO are derived from the respective AACMCE that reside in the MovConElm-Tbl.

POST:

Formatted "change" transaction to the CMM Transactions Hold File

THEN:
Repeat procedure for all "modified (changed)" Freight Address records.

END PROCEDURE.

PROCEDURE NAME: Create Formatted Contact Transactions Hold File Add Transaction(s).

Location Information: Screen AKM07FD (Freight Information)

User has created a Freight Address record utilizing screens AKM13FD and AKM07FD, and executes the filing of the record in the Freight Address File.

Simultaneously with the Freight Address update, check

IF:
The Freight Address record is a complete record

THEN:
Create a Cargo Address "Add" transaction for those data elements that reside in the Cargo Address File. The format for this transaction is provided in attached memo.

THEN:
Truncate data element FCityRgn to 1st 5 to equal FCityCd

POST:
Formatted "add" transaction to the Contact Transactions Hold File

THEN:
Repeat procedure for all added Freight Address records.

END PROCEDURE.

PROCEDURE NAME: Create Formatted Contact Transactions Hold File "Modified" Transaction(s).

Location Information: Screen AKM07FD (Freight Information)

User has modified a Freight Address record utilizing screens AKM13FD and/or AKM07FD, and executes the modification to the Freight Address File.

Simultaneously with the Freight Address File update, check

IF:
The modified record is not a complete Freight Address record but is completed during this procedure

THEN:
Create a Cargo Address "Add" transaction for those data elements that reside in the Cargo Address File and

THEN:
Simultaneously create Cargo Activity "Add" transactions for each complete Activity record that points to the Freight record (Ship To AAC)

IF:
The modified record is a complete Freight Address record and the modified data element(s) was or included data element FCityRgn

THEN:
Truncate data element FCityRgn to 1st 5 which equals FCityCd

THEN:
Create a Contact File "Modified" Transaction. The format for this transaction is provided in attached MEMO.

POST:
Formatted "modified" transaction(s) to the Contact Transactions Hold File

THEN:
Repeat procedure for all modified Freight Address records

END PROCEDURE.

PROCEDURE NAME: Create Formatted Contact Transactions Hold File "Add" Transaction for Copy Function Selection

User has copied a complete Freight Address record utilizing screen AKM13FD and executes the copy of the record in the Freight Address File

POST:
Formatted "add" transaction to the Contact Transactions Hold File

THEN:
Repeat procedure for all copied complete Freight Address records

END PROCEDURE.

PROCEDURE NAME: Create Formatted Contact Transactions File "Delete" Transaction

Location Information: Screen AKM13FD (Freight Information)

User has deleted a Freight Address record from screen AKM13FD, and executes the deletion of the record from the Freight Address File.

Simultanuously with the Freight Address update, check

IF:
The deleted record is a complete Freight Address record and does not exist (point to itself) in the Activity File

THEN:
Create a Contact File "Delete" transaction. The format for this transaction is provided in attached MEMO.

POST:
Formatted "delete" transaction to the Contact Transactions Hold File

THEN:
Repeat procedure for all deleted Freight Address records that do not exist in the Activity File.

END PROCEDURE.
;

MAINTAINS:
FreightAdrs-File ;
UPDATES:
Contact-Transactions-Hold-File ;
UPDATES:
CMM-Transactions-Hold-File ;
EMPLOYS:
Country-Tbl ,
[illegible] Tbl ,

```
        CityGroup-Tbl ,
        Holiday-Tbl ,
        AddressCat-Tbl ,
        TTPUnique-Tbl ,
        MovConElm-Tbl ,
        LMF-Tbl ,
        Port-Tbl ,
        TMAS-System-Parameter-Tbl ,
        Activity-File ,
        MMCUnique-Tbl ,
        BBPUnique-Tbl ;
ADDS:           CgoActivity-Contact-Trns-Info TO
                Contact-Transactions-Hold-File ;
ADDS:           CgoAddress-Contact-Trns-Info TO
                Contact-Transactions-Hold-File ;
ADDS:           TT7/TT8-CMM-Trns-Info TO CMM-Transactions-Hold-File ;
ADDS:           FreightAdrs TO FreightAdrs-File ;
MODIFIES:       FreightAdrs IN FreightAdrs-File ;
REFERENCES:     Activity IN Activity-File ;
REFERENCES:     Parameter IN TMAS-System-Parameter-Tbl ;
REFERENCES:     FreightAdrs IN FreightAdrs-File ;
REFERENCES:     Country IN Country-Tbl ;
REFERENCES:     ETAFcstLvl IN ETAFcstLvl-Tbl ;
REFERENCES:     CityGroup IN CityGroup-Tbl ;
REFERENCES:     Holiday IN Holiday-Tbl ;
REFERENCES:     AddressCat IN AddressCat-Tbl ;
REFERENCES:     TTPUnique IN TTPUnique-Tbl ;
REFERENCES:     MovConElm IN MovConElm-Tbl ;
REFERENCES:     LMF IN LMF-Tbl ;
REFERENCES:     Port IN Port-Tbl ;
REFERENCES:     BBPUnique IN BBPUnique-Tbl ;
REFERENCES:     MMCUnique IN MMCUnique-Tbl ;
REMOVES:        FreightAdrs FROM FreightAdrs-File ;
DESTROYS:
    FreightAdrs ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TMAS Team' ;
```

7 DEFINE PROCESS Manage-Ship-to-POC-Info ;
DESCRIPTION;
Manage Ship to Point of Contact Information
In this process, the freight information (FMCTCivTel, FMCTMilTel, FMCTPOC and BASATel) update data received from the MCT updates the Freight Address File and the Contact-Transactions-Hold File. This process also displays Ship-to-POC-Info for System Manager.
;
KEYWORD IS: 'TMAS' ,
'LOB' ;
SUBPART IS: Display-Ship-to-POC-Info ,
Update-Ship-to-POC-Info ;
PART OF: TMAS-Management ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

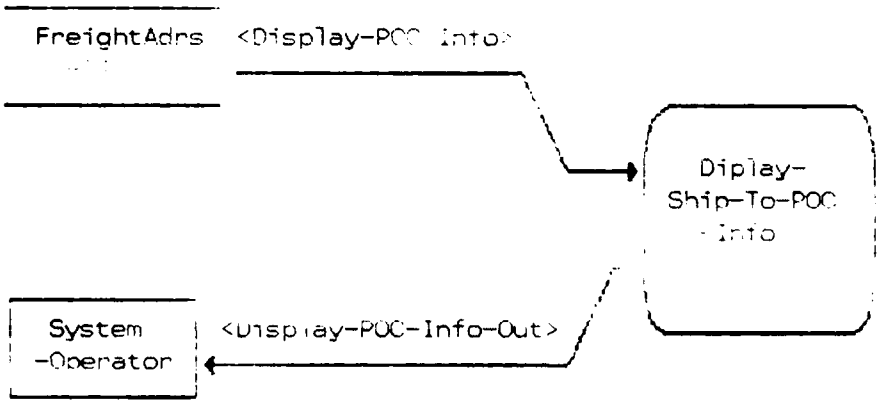


Figure 5. Display-Ship-To-POC-Info

8 DEFINE PROCESS Display-Ship-to-POC-Info ;
DESCRIPTION;
Display Ship to Point of Contact Information
In this process, the Ship to POC information is displayed for the system manager. The Ship to AAC is entered through the keyboard and POC information for the Ship to AAC is displayed. Scrollable HELP screens will provide easy access to the entire Freight Address File.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
GENERATES:
Display-POC-Info-Out ;
PART OF: Manage-Ship-to-POC-Info ;
PROCEDURE;

ACCEPT:
Keyboard input: ShipToAAC.

ACCESS:
Freight Address File using ShipToAAC.

READ:
ShipToAAC
FMCTPOC
FMCTCivTel
FMCTMilTel
[illegible]
FUDsg

DISPLAY:
POC data in upper left hand corner of the screen
(SEE: Display-POC-Info-C[illegible] for the HELP Screen functions.

REPEAT:
Process for each Ship to AAC contained in the Freight Address File and display in lower right hand portion of screen. This display will be scrollable for viewing/selecting any POC information contained in the Freight Address File.
;
EMPLOYS:
FreightAdrs-File ;
REFERENCES: Ship-to-POC-Info IN FreightAdrs-File ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

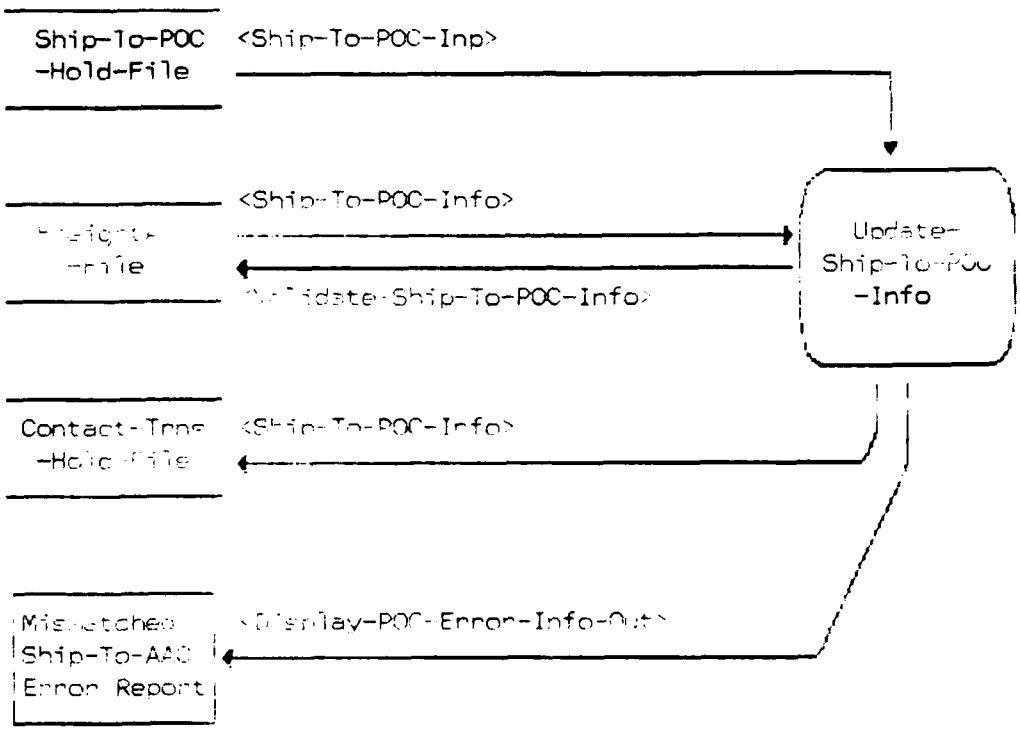


Figure 6. Update-Ship-T... Info

9 DEFINE PROCESS Update-Ship-to-POC-Info ;
DESCRIPTION;
Update Ship to Point of Contact Information
In this process, the data elements FMCTCivTel, FMCTMilTel, FMCIPOC, and BASATel are posted to the Freight Address File and the Contact-Transactions-Hold-File.

This POC information is received from the MCT/PMCT.
;
KEYWORD IS: 'TMAS' ,
'LOB' ;
GENERATES:
POC-Error-Info-Out ;
PART OF: Manage-Ship-to-POC-Info ;
PROCEDURE;

System Manager executes this process from the TMAS Main Menu. The posting of the POC information is automatic without interactivity with the System Manager.

SELECT:
Manage Ship to POC Data from Menu.

ACCEPT:
Ship to POC Input.

ACCESS:
Freight Address File using ShipToAAC and Contact Transactions Hold File using ShipToAAC.

MATCH:
Ship to AAC received from Ship to POC Hold File with Ship to AAC in Freight Address File

IF MATCH:
Post Ship to POC Info to the Freight Address File. Change DIC to MCT and place the transaction in the Contact Transactions Hold File

IF UNMATCH:
Place on Error Report

IF:
DIC is not equal to POC, place on Error Report

REPEAT:
Process for each Ship to AAC in POC Hold File

THEN:

```
        Print Error Report

    END PROCEDURE.
;
     UPDATES:
          FreightAdrs-File ;
     UPDATES:
          Contact-Transactions-Hold-File ;
     EMPLOYS:
          Ship-to-POC-Hold-File ;
     MODIFIES:       Ship-to-POC-Info IN FreightAdrs-File ;
     REFERENCES:     Ship-to-POC-Info IN FreightAdrs-File ;
     REFERENCES:     Ship-to-POC-Info IN Ship-to-POC-Hold-File ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS Team' ;
```

This page intentionally left blank.

```
10      DEFINE PROCESS                    Prep-Hold-Files-Transmission ;
     DESCRIPTION;
  Prepare Hold Files Transmission.
  This is a batch process that reads each record stored in the CMM and
  Contact Transaction Hold Files and writes each record out to a sequential
  file.  The hold file records will then be deleted.
   ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ,
                     'TACCS' ;
     SUBPART IS:     Prep-CMM-Out-Changes ,
                     Prep-Contact-Out-Changes ;
     PART OF:        TMAS-Management ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS Team' ;
```

This page intentionally left blank.

11 DEFINE PROCESS Prep-CMM-Out-Changes ;
DESCRIPTION;
Prepare Cargo Movement Module Output Changes
This is a batch process that reads each record in the CMM-Transactions-Hold-File (ISAM file format) and writes each output to a sequential file, "CMMTxnSeq". Each record in the CMM-Transactions-Hold-File will then be deleted.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
SEE MEMO:
TCR-Prep-CMM-Out-Changes ;
GENERATES:
TT7/TT8-Transactions-Info-Out ;
PART OF: Prep-Hold-Files-Transmission ;
PROCEDURE;

NOTE: This is a batch process. It reads each record in the CMM-Transactions-Hold-File (ISAM File Format) and then writes each record output to a sequential file (CMMTxnSeq). All records in the CMM-Transactions-Hold-File will then be deleted.

Procedure Name: Convert CMM Transactions

Logic Information: From the TMAS Main Menu, select TMAS Admin, next command Prepare Files, then CMM Transactions.

User selects "GO"

IF:
CMM Transactions Hold File is void of records, the system will prompt user that there are no records in the hold file to be prepared.

IF:
CMM Transactions Hold File contains records.

THEN:
Read each ISAM record/transaction resident in the hold file and post each record/transaction to a sequential file.

THEN:
Remove/delete all ISAM records from the CMM Transactions Hold File.

THEN:
Establish an empty ISAM formatted CMM Transactions Hold File.

```
END PROCEDURE.
;
     UPDATES:
          CMM-Transactions-Seq-File ;
     EMPLOYS:
          CMM-Transactions-Hold-File ;
     REFERENCES:     CMM-Hold-File-Info IN CMM-Transactions-Hold-File ;
     REMOVES:        CMM-Hold-File-Info FROM CMM-Transactions-Hold-File ;
     DESTROYS:
          CMM-Hold-File-Info ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS Team/W.Anderson' ;
```

12 DEFINE PROCESS Prep-Contact-Out-Changes ;
DESCRIPTION;
Prepare Contact Changes
This is a batch process that reads each record in the Contact-Transactions-Hold-File (ISAM file format) and writes each out to a sequential file, "ContactTxnSeq". Each record in the Contact-Transactions-Seq-File will then be deleted.
;
KEYWORD IS: 'TMAS' ,
'LOB' ;
SEE MEMO:
TCR-Prep-Contact-Out-Changes ;
GENERATES:
Contact-Seq-Trns-Out ;
PART OF: Prep-Hold-Files-Transmission ;
PROCEDURE;

NOTE: This is a batch process. It reads each record in the Contact-record output to a sequential file (ContactTxnSeq). All records in the Contact-Transactions-Hold-File will then be deleted.

Procedure Name: Convert Contact Transactions.

Location Information: From the TMAS Main Menu, select TMAS Admin, next command Prepare Files, then Contact Transactions.

User sel

IF:
Contact Transactions Hold File is void of records, the system will prompt user that there are no records in the hold file to be prepared.

IF:
Contact Transaction Hold File contains records.

THEN:
Read each ISAM Record/transaction resident in the hold file and post each record/transaction to a sequential file.

THEN:
Remove/delete all ISAM records from the Contact Transactions Hold File.

THEN:
Establish an empty ISAM formatted Contact Transactions Hold File.

```
END PROCEDURE
;
    UPDATES:
        Contact-Transactions-Seq-File ;
    EMPLOYS:
        Contact-Transactions-Hold-File ;
    REMOVES:        Cgo-Port-Trns FROM Contact-Transactions-Hold-File ;
    REMOVES:        Cgo-MCE-Trns FROM Contact-Transactions-Hold-File ;
    REMOVES:        CgoAddress-Contact-Trns-Info FROM
                    Contact-Transactions-Hold-File ;
    REMOVES:        CgoActivity-Contact-Trns-Info FROM
                    Contact-Transactions-Hold-File ;
    DESTROYS:
        Cgo-Port-Trns ,
        Cgo-MCE-Trns ,
        CgoAddress-Contact-Trns-Info ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team/W.Anderson' ;
```

```
13      DEFINE PROCESS                          Print-Reports ;
      DESCRIPTION;
   Print Reports.
   In this process, various reports and listings are printed.
    ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ,
                      'TACCS' ;
      SUBPART IS:     Print-Selected-TMAF-Records ,
                      Create-System-Unique-Tbl-Rept ,
                      Print-BillingAdrs-Report ,
                      Error-Reports ;
      PART OF:        TMAS-Management ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TMAS Team' ;
```

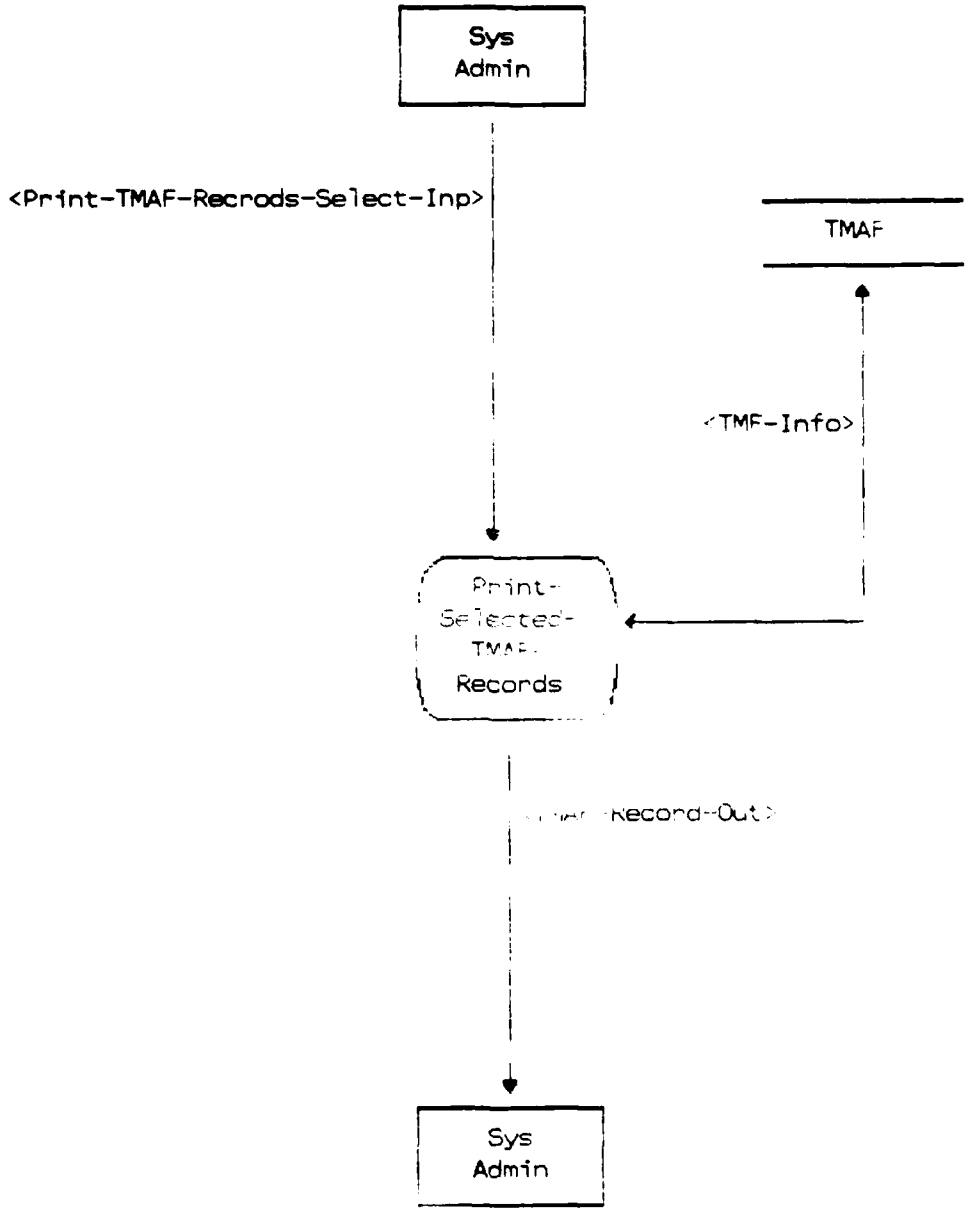


Figure 7 Print-Selected-TMAF-Records

```
14      DEFINE PROCESS                    Print-Selected-TMAF-Records ;
     DESCRIPTION;
Print Selected Transportation Movements Address File Records.
In this process, TMAF record(s) are printed.  At the "Enter Key" screen
prompt, the DODAAC of the desired record(s) to be printed is entered.
The process will find the records, extract the data elements for the
report, format the report, and print the report.  The screen will
display a scrollable listing of record(s) to be printed, records not
found, and the command options to cause the report to be printed
or aborted.
;
     KEYWORD IS:       'TMAS' ,
                       'LOG' ,
                       'TACCS' ;
     SEE MEMO:
          TCR-Print-Selected-TMAF-Record ;
     GENERATES:
          TMAF-Record-Out ;
     RECEIVES:
          Print-TMAF-Record-Select-Inp ;
     PART OF:          Print-Reports ;
     EMPLOYS:
          Activity-File ,
          FreightAdrs-File ;
     REFERENCES:       Activity IN Activity-File ;
     REFERENCES:       FreightAdrs IN FreightAdrs-File ;
     RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

```
15      DEFINE PROCESS                    Create-System-Unique-Tbl-Rept ;
     DESCRIPTION;
  Create System Unique Table Report.
  In this process, the values residing in each System Unique Table are
  collected and stored on the hard disk.
   ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ,
                     'TACCS' ;
     SEE MEMO:
          TCR-Create-Sys-Unique-Tbl-Rept ;
     GENERATES:
          System-Unique-Table-Rept-Out ;
     PART OF:        Print-Reports ;
     EMPLOYS:
          AddressCat-Tbl ,
          BBPUnique-Tbl ,
          City-Tbl ,
          CityGroup-Tbl ,
          Country-Tbl ,
          DSSALOC-Tbl ,
          ETAFcstLvl-Tbl ,
          Holiday-Tbl ,
          LMF-Tbl ,
          MACOM-Tbl ,
          MCEType-Tbl ,
          MMCUnique-Tbl ,
          MovConElm-Tbl ,
          TMAS-System-Parameter-Tbl ,
          Port-Tbl ,
          PortType-Tbl ,
          TTPUnique-Tbl ;
     REFERENCES:     AddressCat IN AddressCat-Tbl ;
     REFERENCES:     BBPUnique IN BBPUnique-Tbl ;
     REFERENCES:     City IN City-Tbl ;
     REFERENCES:     CityGroup IN CityGroup-Tbl ;
     REFERENCES:     Country IN Country-Tbl ;
     REFERENCES:     DSSALOC IN DSSALOC-Tbl ;
     REFERENCES:     ETAFcstLvl IN ETAFcstLvl-Tbl ;
     REFERENCES:     Holiday IN Holiday-Tbl ;
     REFERENCES:     LMF IN LMF-Tbl ;
     REFERENCES:     MACOM IN MACOM-Tbl ;
     REFERENCES:     MCEType IN MCEType-Tbl ;
     REFERENCES:     MMCUnique IN MMCUnique-Tbl ;
     REFERENCES:     MovConElm IN MovConElm-Tbl ;
     REFERENCES:     Parameter IN TMAS-System-Parameter-Tbl ;
     REFERENCES:     Port IN Port-Tbl ;
     REFERENCES:     PortType IN PortType-Tbl ;
     REFERENCES:     TTPUnique IN TTPUnique-Tbl ;
```

RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;



```
16      DEFINE PROCESS                    Print-BillingAdrs-Report ;
     DESCRIPTION;
  Print Billing Address Report.
  In this process, a report of all billing addresses is printed.
   ;
     KEYWORD IS:      'TMAS' ,
                      'LOB' ,
                      'TACCS' ;
     SEE MEMO:
          TCR-Print-BillingAdrs-Report ;
     GENERATES:
          BillingAdrs-Record-Out ;
     RECEIVES:
          BillingAdrs-Info-Inp ;
     PART OF:         Print-Reports ;
     EMPLOYS:
          BillingAdrs-File ;
     REFERENCES:      BillingAdrs IN BillingAdrs-File ;
     RESPONSIBLE PROBLEM DEFINER IS:
                      'TMAS Team' ;
```





17 DEFINE PROCESS Error-Reports ;
DESCRIPTION;
Error Reports.
In this process, the Error Analysis Report is created and the Blank Incomplete Activity Worksheets, Blank Incomplete Freight Worksheets, Activity Worksheets and Freight Worksheets are printed.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
SUBPART IS: Create-Error-Analysis-Report ,
Print-Blank-Frt/Actv-Wksht ,
Print-Actv-Rec-Wksht ,
Print-Frt-Rec-Wksht ;
PART OF: Print-Reports ;
RESPONSIBLE PROBLEM DEFINER IS:
'TM/S Team' ;

```
18      DEFINE PROCESS                    Create-Error-Analysis-Report ;
    DESCRIPTION;
Create Error Analysis Report.
In this process, the TMAS files are searched for errors and a
collection of error data is stored on the hard disk.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    SEE MEMO:
         TCR-Create-Error-Analysis-Rept ;
    GENERATES:
         Error-Analysis-Report-Out ;
    PART OF:        Error-Reports ;
    EMPLOYS:
         [illegible] File ,
         Activity-File ;
    REFERENCES:     FreightAdrs IN FreightAdrs-File ;
    REFERENCES:     Activity IN Activity-File ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

```
19      DEFINE PROCESS                          Print-Blank-Frt/Actv-Wksht ;
    DESCRIPTION;
Print Blank Freight/Activity Worksheet.
In this process, a worksheet with the 'in-the-clear' data elements
of the Freight and/or Activity records is/are printed.
'
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    SEE ALSO:
         TCR-Print-Blank-Frt/Actv-Wksht ;
    GENERATES:
         Blank-Activity-Wksht-Out ,
         Blank-Freight-Wksht-Out ;
    PART OF:        Error-Reports ;
    EMPLOYS:
         Blank-Frt/Actv-Wksht-Hold-File ;
    REFERENCES:     Blank-Frt/Actv-Wksht-Info IN
                    Blank-Frt/Actv-Wksht-Hold-File ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

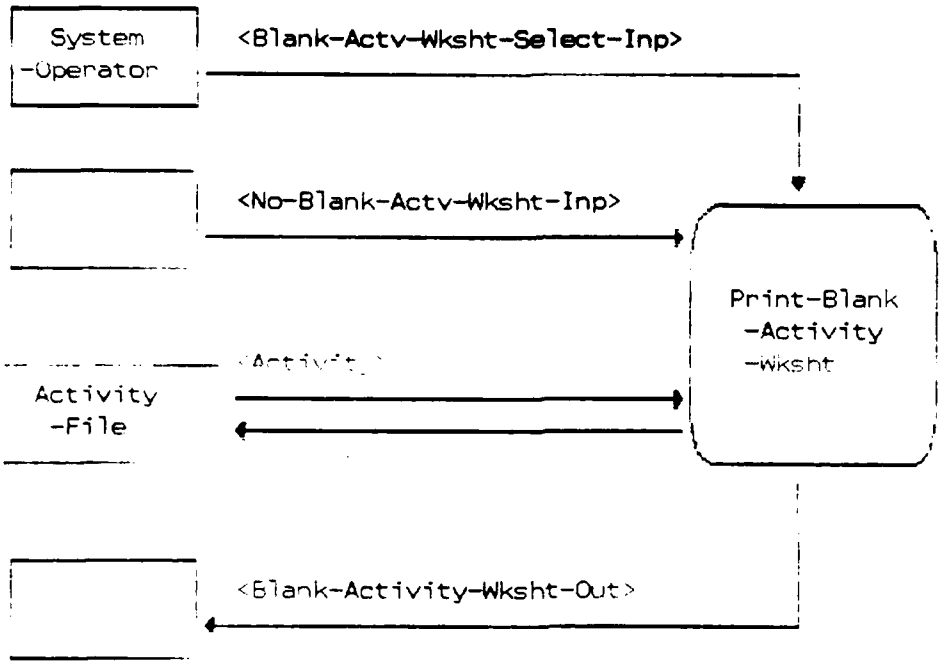


Figure 8. Print-Blank-Activity-Wksht

20 DEFINE PROCESS Print-Actv-Rec-Wksht ;
DESCRIPTION;
Print Activity Record Worksheet
In this process, the system operator/manager receives a worksheet of the Activity record. This is accomplished by keying the value of the data element, AACCurr.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TAC...' ;
SEE MEMO:
TCR-Print-Activity-Rec-Wksht ;
GENERATES:
Activity-Record-Wksht-Out ;
RECEIVES:
Print-Actv-Wksht-Select-Inp ;
PART OF: Error-Reports ;
EMPLOYS:
Activity-File ;
REFERENCES: Activity H... ...y-File ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

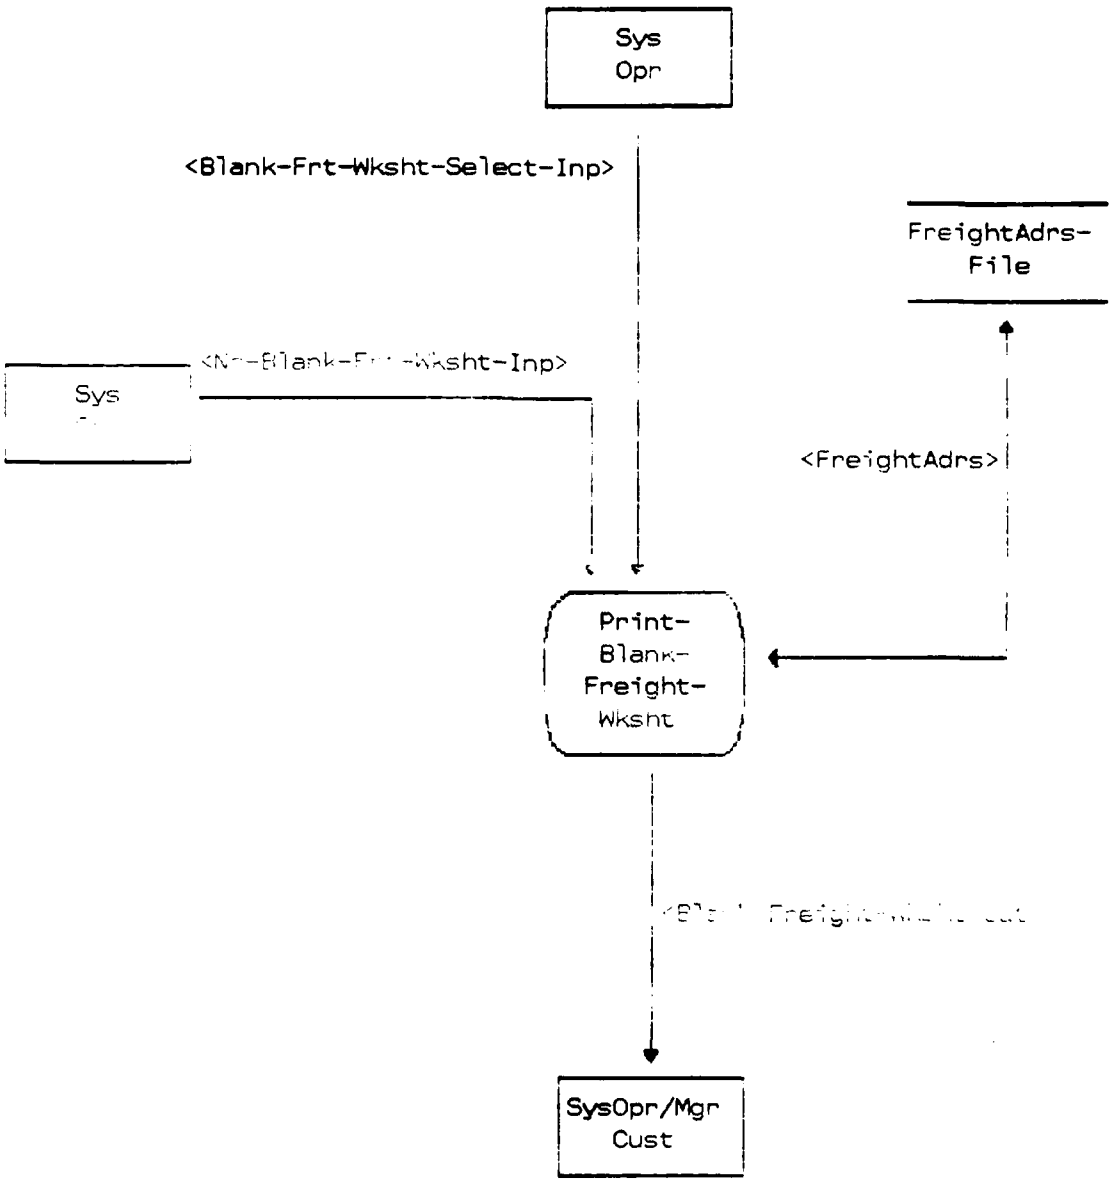


Figure 9. Print-Blank-Freight-Wksnt

```
21      DEFINE PROCESS                          Print-Frt-Rec-Wksht ;
     DESCRIPTION;
  Print Freight Record Worksheet.
  In this process, the system operator/manager receives a worksheet of
  the FreightAdrs record.  This is accomplished by keying the value(s)
  of the data element ShipToAAC.
   ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ,
                     'TACCS' ;
     SEE MEMO:
          TCR-Print-Frt-Rec-Wksht ;
     GENERATES:
          Freight-Record-Wksht-Out ;
     RECEIVES:
          Print-Frt-Wksht-Select-Inp ;
     PART OF:        Error-Reports ;
     EMPLOYS:
          FreightAdrs-File ;
     REFERENCES:     FreightAdrs IN FreightAdrs-File ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS Team' ;
```

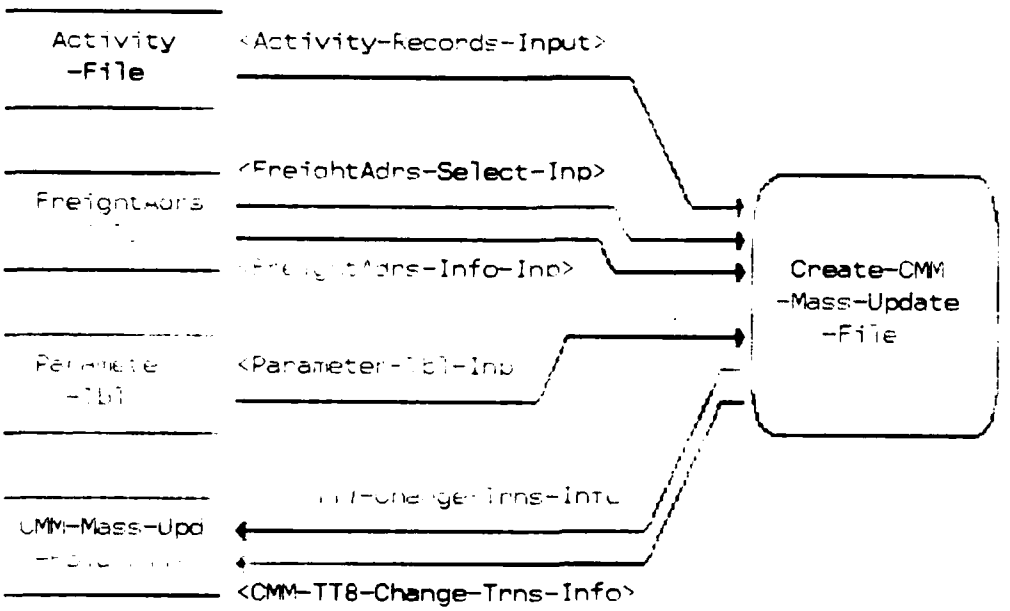


Figure 10. Create-CMM-Mass-Update-File

22 DEFINE PROCESS Create-CMM-Mass-Update-File ;
DESCRIPTION;
Create CMM Mass Update File
This process creates a mass update of the CMM Address File from all complete records in the Freight Address File. The mass update of records will be output from the system using the modem specified by the user.
;
KEYWORD IS: 'TMAS' ,
'LOE' ,
'TACCS' ;
SEE MEMO:
CMM-Transaction-Formats ,
TCR-CMM-Mass-Update ;
GENERATES:
TT//TT8-Change-Trns-Info-Out ;
RECEIVES:
Create-CMM-Mass-Upd-Select-Inp ;
PART OF: TMAS-Management ;
PROCEDURE;

PROCEDURE NAME: Validate CMM Environment

Location Information: Main Menu, Convergent Solutions Applications Development System Screen.

User selects TMAS Admin then selects Create-CMM-Mass-Update

IF:
CMMEnvironmentCd is "N"

THEN:
No action required.

IF:
CMMEnvironmentCd is "Y"

THEN:
Activate CMM update procedures.

END PROCEDURE.

PROCEDURE NAME: Create CMM Transaction Header Information

This procedure creates OrigCd and ChNo and generates DIC and CH-CD. These data elements will populate the first nine (9) card columns of every CMM transaction created by the Maintain-FreightAdrs

process and will be formatted as follows:

DATA ELEMENT	CC
DIC	1-3
OrigCd	4-6
CH-CD	7
ChNo	8-9

NOTE: DIC and CH-CD are derived from the user selected modify function. OrigCd and ChNo reside in the Parameter Table.

END PROCEDURE.

PROCEDURE NAME: Create Formatted CMM Address Mass Update Hold File "Change" Transaction.

NOTE: This is a batch process that reads each record in the Freight Address File. Also, an asterisk in the first position of the CMM transaction field indicates the field will be blank in CMM.

IF:
The record entered is not a complete Freight Address record

THEN:
No action is required.

IF:
The record entered is a complete record

THEN:
Check if the record exist in the Activity File.

IF:
The record does not exist in the Activity File

THEN:
No further action is required.

IF:
The record exist in the Activity File, but is incomplete

THEN:
No action is required.

IF:
The record exist in the Activity File and is complete, but

the CMM Indicator Code is "N"

THEN:
No action is required.

IF:
The record exist in the Activity File and is complete and the CMM Indicator Code is "Y"

THEN:
Create a TT7 "change" and TT8 "change" transaction for those data elements that reside in the CMM Address File. See CMM Address memo formatting instruction.

IF:
Freight [illegible] MUDsg consists of 33 or more characters

THEN:
Truncate MUDsg to 32 characters and enter card columns 16 through 47 of Address File change card TT8 for the CMM Address File data element, Unit Designator, entry.

IF:
Freight Address data elements, FCityRg and FCountry, combined consist of 27 or more characters.

THEN:
Truncate FCityRgn to the first 24 characters and enter into card columns 48 through 71 and then enter FCntry as the last 2 characters in card columns 73-74 of the Address File change card TT8 for the CMM Address File Unit Address data element.

IF:
The record is a complete Freight Address record

THEN:
The MCEPrefix and the MCESuffix from the MovConFile Table consumed to generate AACMCT and enter into card columns 33 through 38 and generate AACITO and enter into card columns 39 through 44 of the Address File change card TT7. AACMCT and AACITO are derived from the respective AACMCE that reside in the MovConElm-Tbl.

POST:
Formatted transaction to the CMM Address Mass Update Hold File

THEN:
Repeat procedure for all Freight Address records.

```
    END PROCEDURE.
;
    UPDATES:
         CMM-Adrs-Mass-Update-Hold-File ;
    EMPLOYS:
         FreightAdrs-File ,
         Activity-File ,
         TMAS-System-Parameter-Tbl ;
    ADDS:          Activity-CMM-Info TO CMM-Adrs-Mass-Update-Hold-File ;
    ADDS:          FreightAdrs-CMM-Info TO
                   CMM-Adrs-Mass-Update-Hold-File ;
    REFERENCES:    Parameter IN TMAS-System-Parameter-Tbl ;
    REFERENCES:    Activity IN Activity-File ;
    REFERENCES:    FreightAdrs IN FreightAdrs-File ;
    RESPONSIBLE PROBLEM DEFINER IS:
                   'TMAS Team' ;
```

```
23      DEFINE PROCESS                    Build-Contact-Files ;
    DESCRIPTION;
Build/Maintain Contact Files
The process provides a means, whereby, contact data is created to
establish a Contact Database.  This process has two sub-level processes,
Set-Up-Contact-Files and Create-Contact-Files.  The process Set-Up-
Contact-Files checks the files to see if there is any data contained in
the files.  If the files are not clear of all previous data, the process
Set-Up-Contact-Files will delete the data and set up new formats for the
creation of new files.  The process Create-Contact-Files uses selected
data elements from the Freight Address File, Activity File, Port Table,
and the MovConElm table to produce formatted output files.
;
    KEYWORD IS:     'TMAS' ,
                    'IOC' ,
                    'TACCS' ;
    SUBPART IS:     Set-Up-Contact-Files ,
                    Create-Contact-Files ;
    PART OF:        TMAS-Management ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

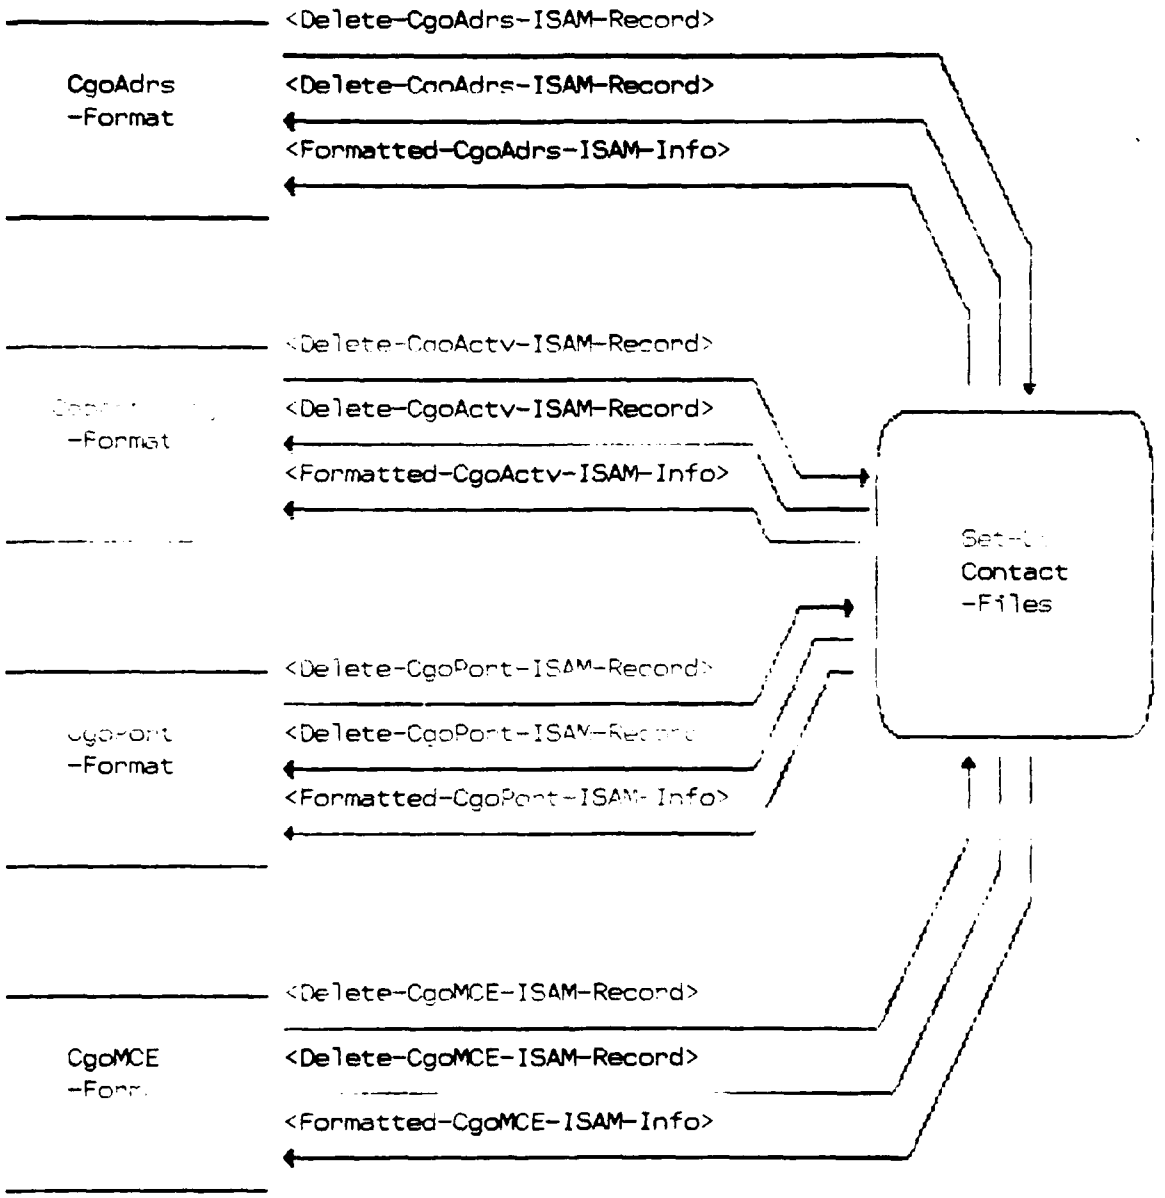


Figure 11. Set-Up-Contact-Files

24 DEFINE PROCESS Set-Up-Contact-Files ;
DESCRIPTION;
Set-Up Contact Files
This process employs the set, Create Contact Transactions Hold File to remove and destroy transactions created by the Create Contact Files process. [illegible] run prior to Create Contact Files to remove and destroy records that have been retained in the file since the last execution of the Create Contact Files process.
;
KEYWORD IS: 'TMAS' ,
'LCS' ,
'TACCS' ;
SEE MEMO:
TCR-Set-Up-Contact-Files ;
PART OF: Build-Contact-Files ;
PROCEDURE;

SET-UP CONTACT FILES

Location of Information: Main Menu Convergent Solutions Application Development Screen.

This process will delete records from files and reformat empty files automatically after the selection has been made from the Main Menu.

SELECT: Set-Up Contact Files from Main Menu

WHEN: ISAM files have been deleted from the Create-Contact-Trns-Hold File.

THEN: Simultaneously, reformat the new empty files for transaction created by the execution of the Create-Contact-Files process.

NOTE: The creation of the reformatted files will be re-created to receive the same [illegible] files/records that were deleted.
;
EMPLOYS:
Create-Contact-Trns-Hold-File ;
REMOVES: Activity-Record-Info FROM
Create-Contact-Trns-Hold-File ;
REMOVES: FreightAdrs-Record-Info FROM
Create-Contact-Trns-Hold-File ;
REMOVES: Port-Record-Info FROM Create-Contact-Trns-Hold-File ;
REMOVES: MovConElm-Record-Info FROM
Create-Contact-Trns-Hold-File ;
DESTROYS:
Activity-Record-Info ,
FreightAdrs-Record-Info ,

Port-Record-Info ,
MovConElm-Record-Info ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

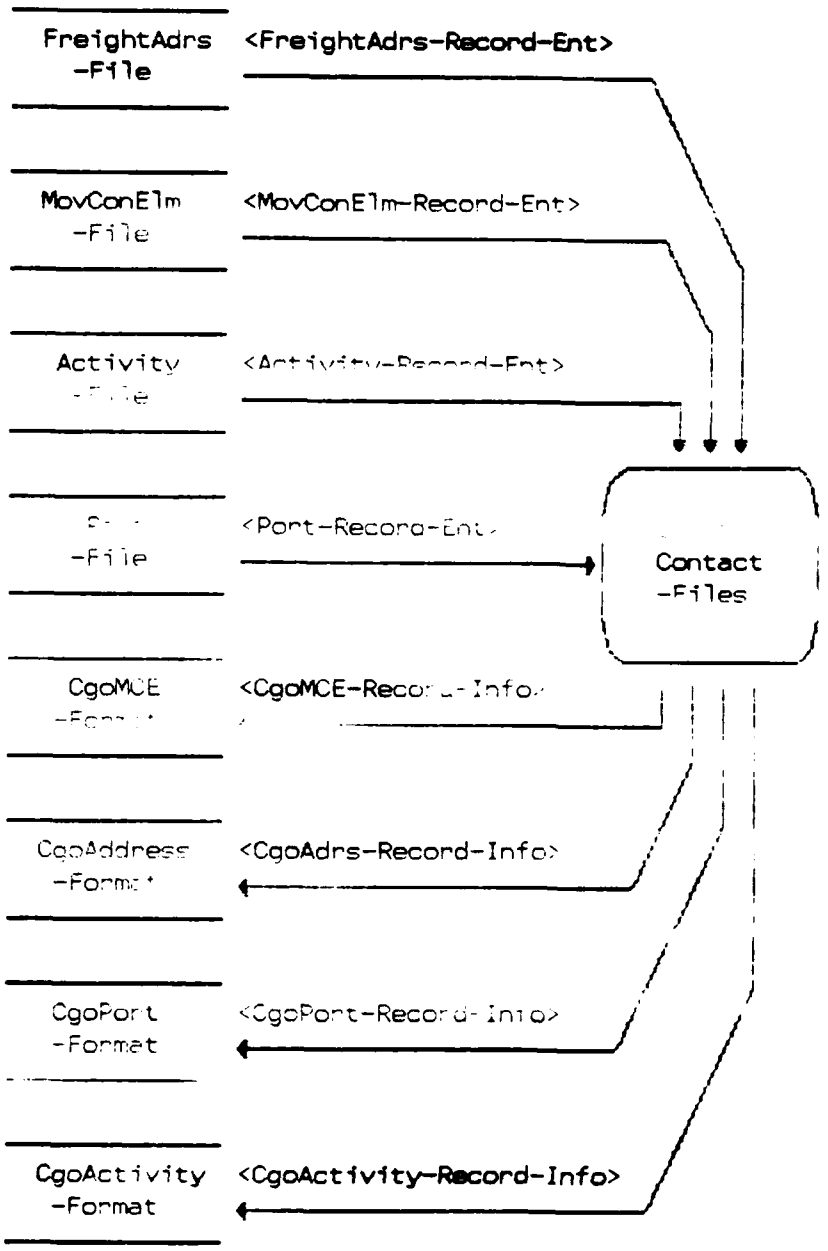


Figure 12. Create-Contact-Files

25 DEFINE PROCESS Create-Contact-Files ;
DESCRIPTION;
Create Contact Files
This process reads selected data from Freight Address File, Activity File, Port Table and MovConElm Table. The data is formatted and stored in the Create Contact Transactions Hold File and sent to media **selected by the system operator (e.g., tape/floppy/communication** interface).
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
SEE MEMO:
Create-Contact-Files-Format ,
TCR-Create-Contact-Files ;
PART OF: Build-Contact-Files ;
PROCEDURE;

Create Contact Files

Location Information: Main Menu, Convergent Solutions Application Development System Screen.

User selects TMAS Main Menu, then selects Create Contact Files. This process receives [illegible] files automatically **after the selection has been made from the main menu**

SELECT:
Create Contact Files from TMAS Main Menu

ACCESS:
Freight Address File [illegible]

IF:
Freight Address records are complete in the file (do not check Activity File)

THEN:
Format the Cargo Address File with selected data elements found in the Freight Address File.

DATA ELEMENTS:

BASATel
CityGpCd
FAttn
FAPO1st5
FAPOLst4
FBldgNo

FBrksKsrn
FCityCd
FCityRgn
FCntry
FMCTCivTel
FMCTMilTel
FMCTPOC
FPostCd
FSt
FUDsg
FUDsgCont
MCECd
MCEPrefix
MCESuffix
ShipToAAC
TcrTml
TTPCd

ACCESS:

Activity File using AACCurr.

IF:

Activity File records are complete in the file and Freight record pointed to by that Activity. record is complete

THEN:

Format the Cargo Activity File with selected data elements **found in the Activity File.**

DATA ELEMENTS:

AACCurr
DDNHostCd
DDNUserId
DSSALOCCd
MAttn
MAPO1st5
MAPO1st4
MBldgNo
MCityRgn
MCntry
MPostCd
MStPOBox
MUDsg
MUDsgCont
ShipToAAC
TELEX

ACCESS:

Port Table using PortCode and Port Type Code.

NOTE: Format the Cargo Port File with selected data elements found in the Port Table.

DATA ELEMENTS:

PrtTyCd
PrtCd
PrtNme

NOTE: PrtCd = current value of PrtCd
PrtTyCd = current value of PrtTyCd
PrtNme = current value of PrtNme

ACCESS:

Movement Control Element Table using MCECd.

NOTE: Format the Movement Control Element File with selected data elements found in the Movement Control Element File.

DATA ELEMENTS:

AACBnMCCMCC
MCECd
MCEPrefix
MCESuffix
MCETyCd
MCENme

NOTE: MCECd = current value of MCECd
MCEPrefix = current value of MCEPrefix
MCESuffix = current value of MCESuffix
AACMCE = current value of AACMCE (AACCurr)
BnAAC = current value of AACBnMCCMCC (AACCurr)
MCENme = current value of the Description
MCETyCd = current value of MCETyCd

SELECT: Tape Backup.

The procedure of selecting Tape Backup is internal to the process Create Contact Files.

THEN: Press [GO] to execute the Contact Files to be backed up on a tape cartridge.

SELECT: Floppy Backup.

The procedure of selecting Floppy Backup is internal to the process Create Contact Files.

THEN: Press [GO] to execute the Contact Files to be backed up on

floppy diskettes.

SELECT: Print Backup Log.

The procedure of selecting Print Backup Log is internal to the Process Create Contact Files.

THEN: Press [GO] to execute the printing of the log pertaining to **the last Contact Files backup.**

END PROCEDURE
;

```
    UPDATES:
        Create-Contact-Trns-Hold-File ;
    EMPLOYS:
        FreightAdrs-File ,
        Activity-File ,
        Port-Tbl ,
        MovConElm-Tbl ;
    ADDS:           Activity-Record-Info TO
                    Create-Contact-Trns-Hold-File ;
    ADDS:           Port-Record-Info TO Create-Contact-Trns-Hold-File ;
    ADDS:           MovConElm-Record-Info TO
                    Create-Contact-Trns-Hold-File ;
    ADDS:           FreightAdrs-Record-Info TO
                    Create-Contact-Trns-Hold-File ;
    REFERENCES:     FreightAdrs IN FreightAdrs-File ;
    REFERENCES:     Activity IN Activity-File ;
    REFERENCES:     Port IN Port-Tbl ;
    REFERENCES:     MovConElm IN MovConElm-Tbl ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

```
26      DEFINE PROCESS                          Search/Display-Records ;
    DESCRIPTION;
Search/Display Records
This process provides the ability to search the TMAF by field(s)
and display the selected record(s).
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TAACS' ;
    SUBPART IS:     Activity-Inquiry ,
                    Freight-Inquiry ;
    PART OF:        TMAS-Management ;
    RESPONSIBLE PERSON DEFINER IS:
                    'TMAS Team' ;
```

This page intentionally left blank.

27 DEFINE PROCESS Activity-Inquiry ;
DESCRIPTION;
Activity Inquiry
In this process, through a series of screens, Activity records are retrieved by Country, DODAAC, DSSALOC, UIC, Unit Designation, MACOM, FSN and Ship-to-DODAAC. By selecting the "Activity Inquiry" command, the process will display a scrollable listing of all Activity records on file with an array of search and display function keys. Any screen displayed may be printed.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
SEE MEMO:
TCR-Activity-Inquiry ;
GENERATES:
Activity-Rpt, Info-Out ;
PART OF: Search/Display-Records ;
EMPLOYS:
Activity-File ,
FreightAdrs-File ,
BillingAdrs-File ,
Country-Tbl ,
DSSALOC-Tbl ,
MACOM-Tbl ;
REFERENCES: Activity IN Activity-File ;
REFERENCES: FreightAdrs IN FreightAdrs-File ;
REFERENCES: BillingAdrs IN BillingAdrs-File ;
REFERENCES: Country IN Country-Tbl ;
REFERENCES: DSSALOC IN DSSALOC-Tbl ;
REFERENCES: MACOM IN MACOM-Tbl ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;


This page intentionally left blank.

```
28      DEFINE PROCESS                          Freight-Inquiry ;
    DESCRIPTION;
Freight Inquiry
In this process, through a series of screens Freight Address records are
retrieved by Unit Designation, DODAAC, DODAAC BBP, MCE Code, Country,
DODAAC MMC, ADCAT Code, City Group Code, Holiday Code, LMF Code, Port
Code (air and water), TTP Code, Data Last Update and BMCT Code.  By
selecting the "Freight Inquiry" command, the process will display a
scrollable listing of all Freight Address records on file with an array
of search and display function keys.  Any screen displayed may be
printed.
;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    SEE MEMO:
         TCR-Freight-Inquiry ;
    GENERATES:
         FreightAdrs-Display-Info-Out ;
    PART OF:        Search/Display-Records ;
    EMP
         FreightAdrs-File ,
         BBPUnique-Tbl ,
         Activity-File ,
         AddressCat-Tbl ,
         BillingAdrs-File ,
         Country-Tbl ,
         CityGroup-Tbl ,
         Holiday-Tbl ,
         MMCUnique-Tbl ,
         MovConElm-Tbl ,
         LMF-Tbl ,
         Port-Tbl ,
         TTPUnique-Tbl ;
    REFERENCES:     Activity IN Activity-File ;
    REFERENCES:     AddressCat IN AddressCat-Tbl ;
    REFERENCES:     BBPUnique IN BBPUnique-Tbl ;
    REFERENCES:     BillingAdrs IN BillingAdrs-File ;
    REFERENCES:     Country IN Country-Tbl ;
    REFERENCES:     CityGroup IN CityGroup-Tbl ;
    REFERENCES:     FreightAdrs IN FreightAdrs-File ;
    REFERENCES:     Holiday IN Holiday-Tbl ;
    REFERENCES:     LMF IN LMF-Tbl ;
    REFERENCES:     MMCUnique IN MMCUnique-Tbl ;
    REFERENCES:     MovConElm IN MovConElm-Tbl ;
    REFERENCES:     Port IN Port-Tbl ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

This page intentionally left blank.


29 DEFINE PROCESS Build/Maintain-System-Uniques ;
DESCRIPTION;
Build/Maintain System Unique Tables.
This process maintains the tables required to manage the TMAF and other tables common to several DODAACs. These tables contain local system unique types of data and edit criteria information that is maintained by the user.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ,
SUBPART IS: Build/Maintain-AddressCat-Tbl ,
Build/Maintain-BBPUnique-Tbl ,
Build/Maintain-City-Tbl ,
Build/Maintain-CityGroup-Tbl ,
Build/Maintain-Country-Tbl ,
Build/Maintain-DSSALOC-Tbl ,
Build/Maintain-ETAFcstLvl-Tbl ,
Build/Maintain-Holiday-Tbl ,
Build/Maintain-LMF-Tbl ,
Build/Maintain-MACOM-Tbl ,
Build/Maintain-MCEType-Tbl ,
Build/Maintain-MMCUnique-Tbl ,
Build/Maintain-MovConElm-Tbl ,
Build/Maintain-Port-Tbl ,
Build/Maintain-PortType-Tbl ,
Build/Maintain-TTPUnique-Tbl ,
Build/Maintain-Parameter-Tbl ;
PART OF: TMAS-Management ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

This page intentionally left blank.

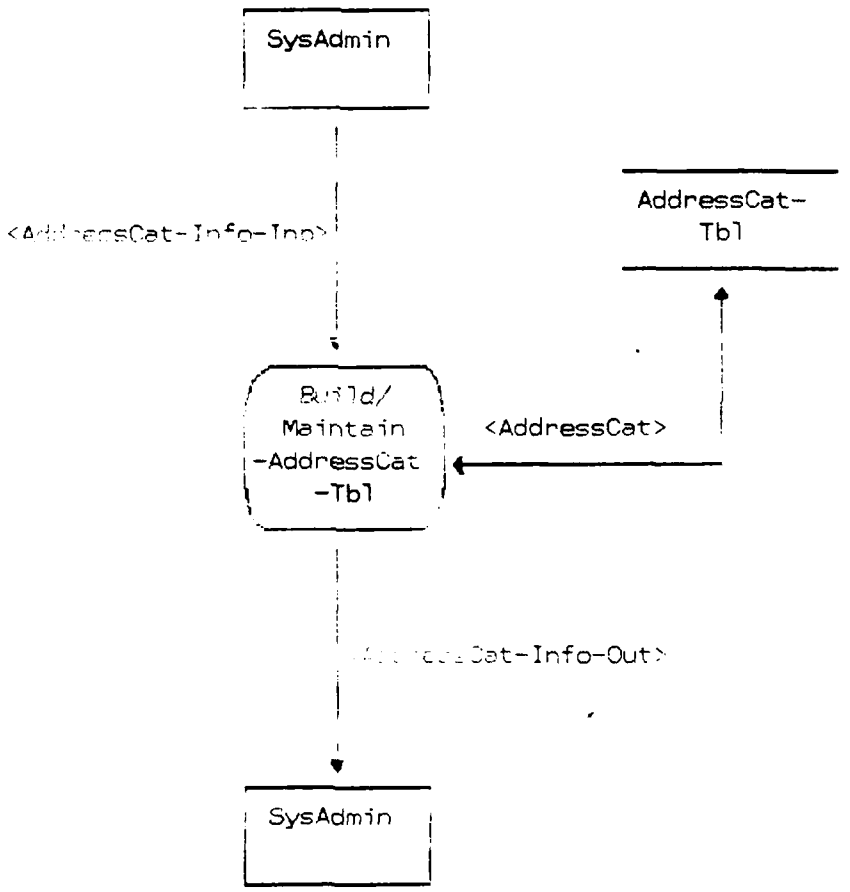

Page 13 Build/Maintain-AddressCat-Tbl

```
30      DEFINE PROCESS                          Build/Maintain-AddressCat-Tbl ;
     DESCRIPTION;
  Build/Maintain Address Category Table.
  In this process, AddressCat records are added, modified, deleted, viewed,
  and/or printed.
  ;
     KEYWORD IS:      'TMAS' ,
                      'LOD' ,
                      'TACCS' ;
     SEE MEMO:
          TCR-Build/Maint-Addresscat ... ;
     GENERATES:
          AddressCat-Info-Out ;
     RECEIVES:
          AddressCat-Info-Inp ;
     PART OF:         Build/Maintain-System-Uniques ;
     MAINTAINS:
          AddressCat-Tbl ;
     ADDS:            AddressCat IO AddressCat-Tbl ;
     MODIFIES:        AddressCat IN AddressCat-Tbl ;
     REFERENCES:      AddressCat IN AddressCat-Tbl ;
     REMOVES:         AddressCat FROM AddressCat-Tbl ;
     DESTROYS:
          AddressCat ;
     RESPONSIBLE PROBLEM DEFINER IS:
                      'TMAS Team' ;
```

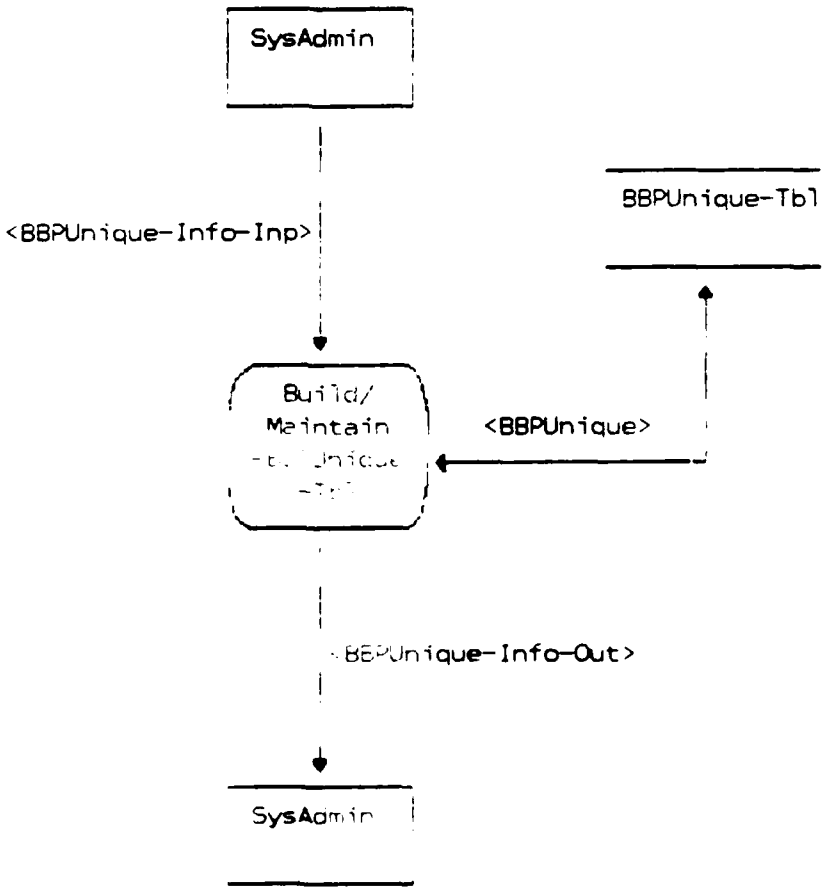
SysAdmin
<BBPUnique-Info-Inp>
BBPUnique-Tbl
Build/
Maintain
<BBPUnique>
<BBPUnique-Info-Out>
SysAdmin

```
31      DEFINE PROCESS                    Build/Maintain-BBPUnique-Tbl ;
     DESCRIPTION;
Build/Maintain Breakbulk Point Unique Table.
In this process, BBPUnique records are added, modified, deleted, viewed,
and/or printed.
;
     KEYWORD IS:      'TMAS' ,
                      'LOB' ,
                      'TACCS' ;
     SEE MEMO:
          TCR-Build/Maint-BBPUnique ... ;
     GENERATES:
          BBPUnique-Info-Out ;
     RECEIVES:
          BBPUnique-Info-Inp ;
     PART OF:         Build/Maintain-System-Uniques ;
     MAINTAINS:
          BBPUnique-Tbl ;
     ADDS:            BBPUnique TO BBPUnique-Tbl ;
     MODIFIES:        BBPUnique IN BBPUnique-Tbl ;
     REFERENCES:      BBPUnique IN BBPUnique-Tbl ;
     REMOVES:         BBPUnique FROM BBPUnique-Tbl ;
     DESTROYS:
          BBPUnique ;
     RESPONSIBLE PROBLEM DEFINER IS:
                      'TMAS Team' ;
```

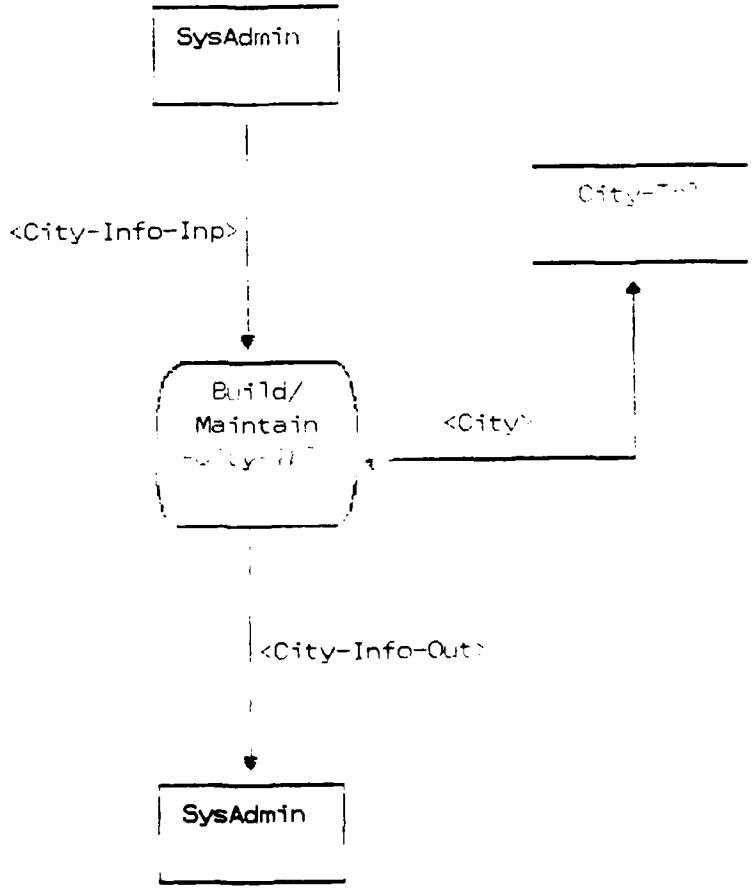
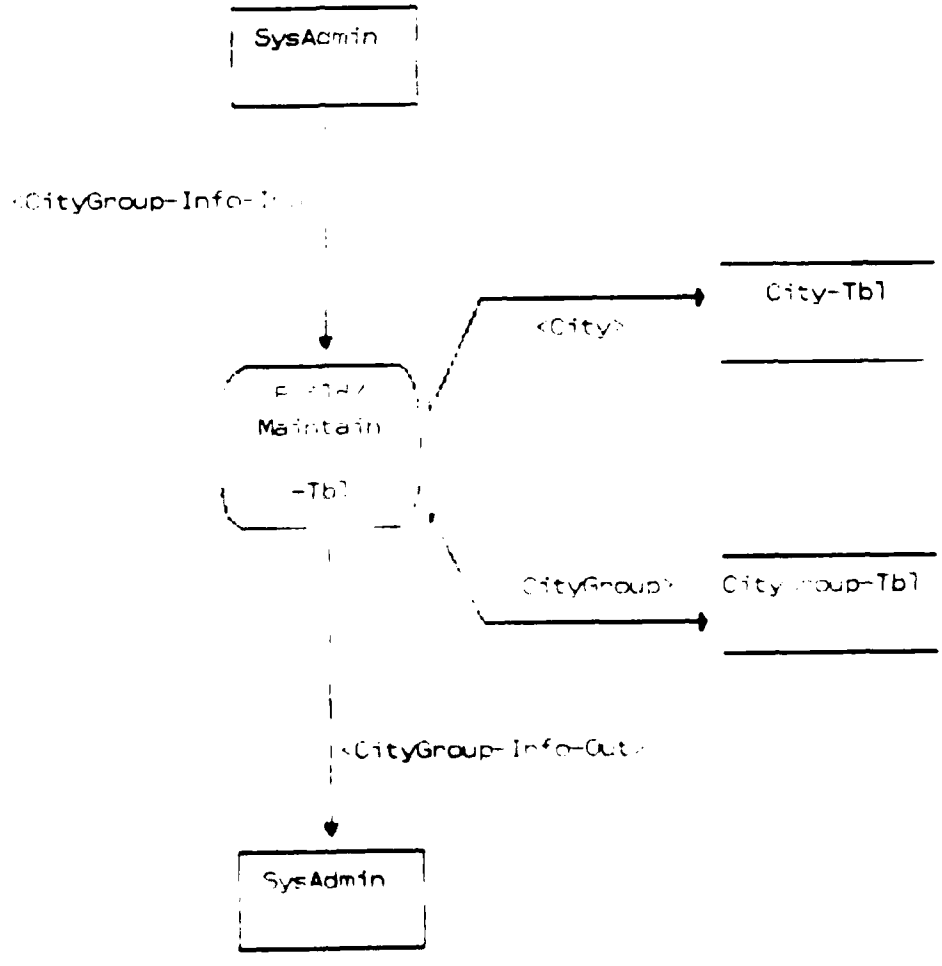
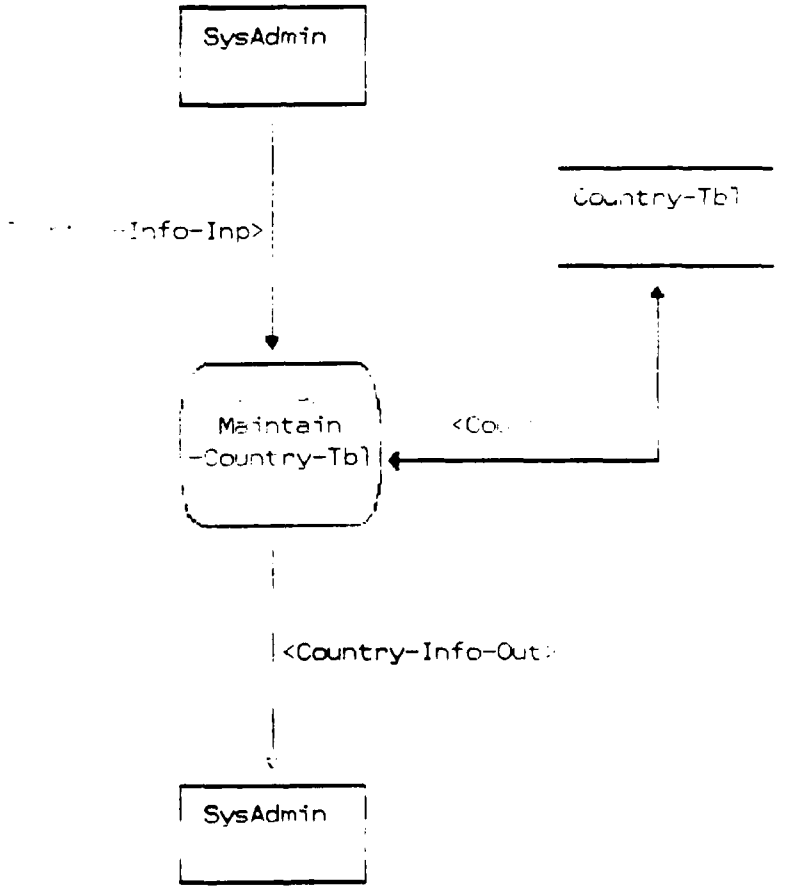


Figure 15. Build/Maintain-City-Tb

```
32      DEFINE PROCESS                    Build/Maintain-City-Tbl ;
     DESCRIPTION;
  Build/Maintain City Table.
  In this process, city records are added, modified, deleted, viewed, and/
  or printed.
  ;
     KEYWORD IS      'TMAS' ,
                     'LOB' ,
                     'TACCS' ;
     SEE MEMO:
          TCR-Build/Maint-City-Tbl ;
     GENERATES:
          City-Info-Out ;
     RECEIVES:
          City-Info-Inp ;
     PART OF:        Build/Maintain-System-U
     MAINTAINS:
          City-Tbl ;
     ADDS:           City TO City-Tbl ;
     MODIFIES:       City IN City-Tbl ;
     REFERENCES:     City IN City-Tbl ;
     REMOVES:        City FROM City-Tbl ;
     DESTROYS:
          City ;
     PROBLEM DEFINER IS:
                     'TMAS Team' ;
```


SysAdmin
<CityGroup-Info-In>
<City>
City-Tbl
Maintain
-Tbl
CityGroup>
City Group-Tbl
<CityGroup-Info-Out>
SysAdmin

```
33      DEFINE PROCESS                    Build/Maintain-CityGroup-Tbl ;
    DESCRIPTION;
Build/Maintain City Group Table.
In this process, CityGroup records are added, modified, deleted, viewed,
and/or printed.
;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    SEE MEMO:
         ICR-build/Maint-CityGroup-Tbl ;
    GENERATES:
         CityGroup-Info-Out ;
    RECEIVES:
         CityGroup-Info-Inp ;
                    Build/Maintain-System-Uniques ;
    MAINTAINS:
         City-Tbl ;
    MAINTAINS:
         CityGroup-Tbl ;
    ADDS:           CityGroup TO CityGroup-Tbl ;
    MODIFIES:       ... IN City-Tbl ;
    MODIFIES:       CityGroup IN CityGroup-Tbl ;
    REFERENCES:     City IN City-Tbl ;
    REFERENCES:     CityGroup IN CityGroup-Tbl ;
    REMOVES:        CityGroup FROM CityGroup-Tbl ;
    DESTROYS:
         CityGroup ,
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```


SysAdmin
Country-Tbl
Info-Inp>
Maintain
-Country-Tbl
<Country-Info-Out
SysAdmin

```
34      DEFINE PROCESS                    Build/Maintain-Country-Tbl ;
      DESCRIPTION;
   Build/Maintain Country Table.
   In this process, Country records are added, modified, deleted, viewed,
   and/or printed.
   ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
       SEE MEMO:
            TCR-Build/Maint-Country-Tbl ;
       GENERATES:
            Country-Info-Out ;
       RECEIVES:
            Country-Info-In ;
       PART OF:        Build/Maintain-System-Uniques ;
       MAINTAINS:
            Country-Tbl ;
       ADDS:           Country TO Country-Tbl ;
       MODIFIES:            ... IN Country-Tbl ;
       REFERENCES:     Country IN Country-Tbl ;
       REMOVES:        Country FROM Country-Tbl ;
       DESTROYS:
            Country ;
       RESPONSIBLE PERSON DEFINER IS:
                       'TMAS Team' ;
```

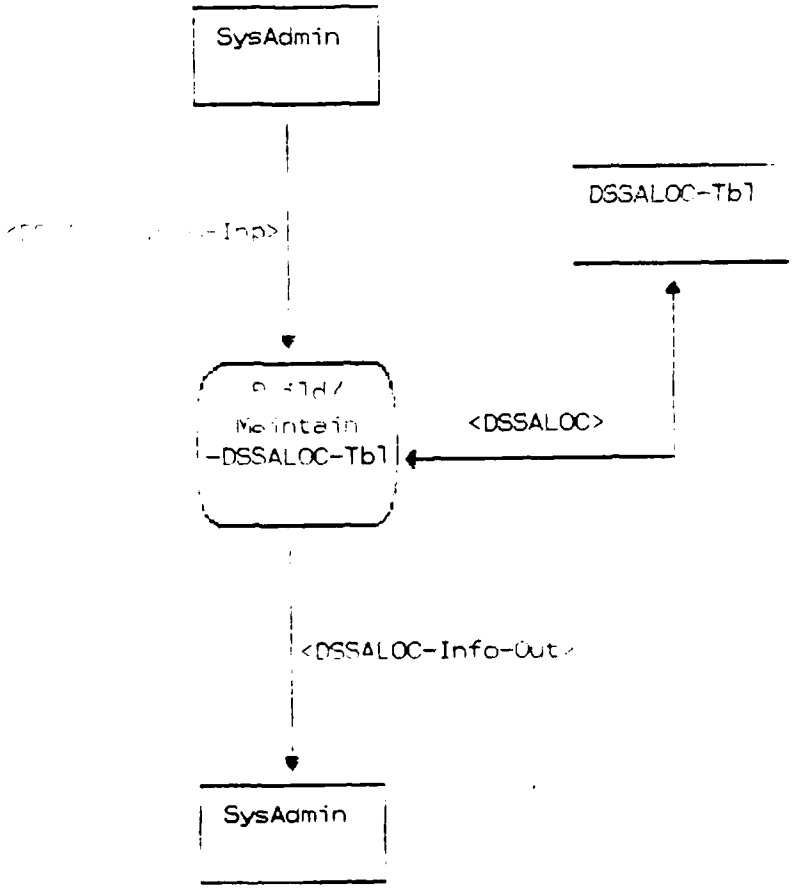


Figure 18. B[illegible]ntain-DSSALOC-Tbl

```
35      DEFINE PROCESS                          Build/Maintain-DSSALOC-Tbl ;
    DESCRIPTION;
  Build/Maintain Direct Supply Support/Air Line of Communication Table.
  In this process, DSSALOC records are added, modified, deleted, viewed,
  and/or printed.
  ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ,
                      'TACCS' ;
      SEE MEMO:
           TCR-Build/Maint-DSSALOC-Tbl ;
      GENERATES:
           DSSALOC-Info-Out ;
      RECEIVES:
           DSSALOC-Info-Inp ;
      PART OF:        Build/Maintain-System-Uniques ;
      MAINTAINS:
           DSSALOC-Tbl ;
      ADDS:           DSSALOC TO DSSALOC-Tbl ;
      MODIFIES:       DSSALOC IN DSSALOC-Tbl ;
      REFERENCES:     DSSALOC IN DSSALOC-Tbl ;
      REMOVES:        DSSALOC FROM DSSALOC-Tbl ;
      DESTROYS:
           DSSALOC ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TMAS Team' ;
```


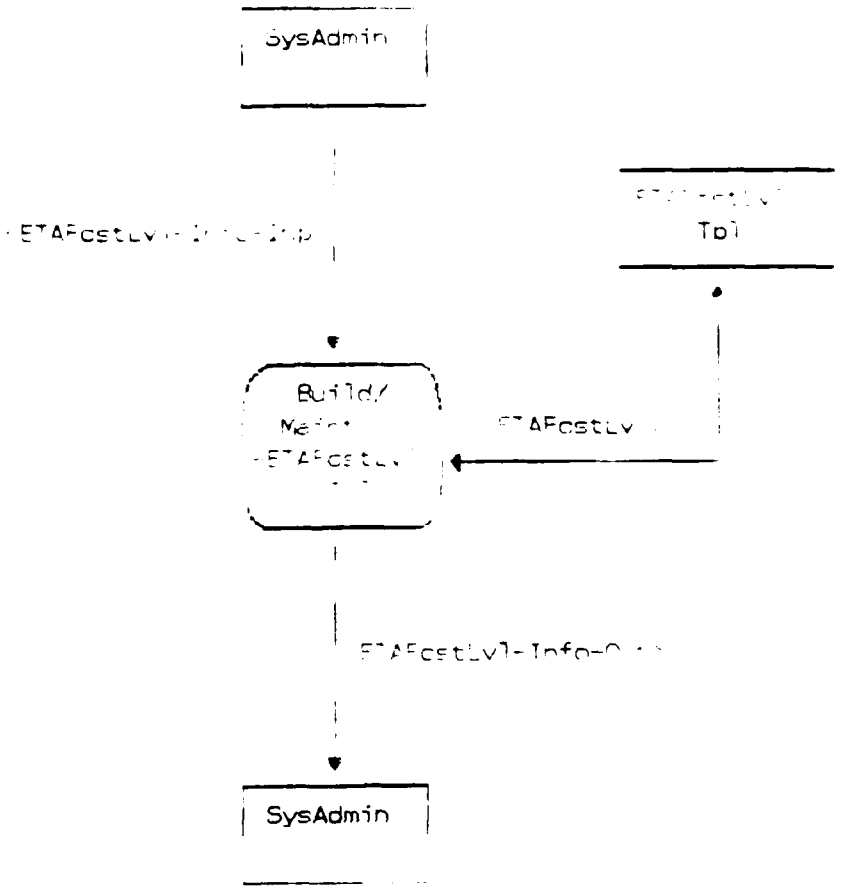



Figure 19. Build/Maintain ETAFcstLvl-Tbl

```
36      DEFINE PROCESS                    Build/Maintain-ETAFcstLvl-Tbl ;
     DESCRIPTION;
Build/Maintain Estimated Time of Arrival Forecast Level Table.
In this process, ETAFcstLvl records are added, modified, deleted, viewed,
and/or printed.
;
     KEYWORD IS:      'TMAS' ,
                      'LOB' ,
                      'TACCS' ;
     SEE MEMO:
          TCR-Build/Maint-ETAFcstLvl-Tbl ;
     GENERATES:
          ETAFcstLvl-Info-Out ;
     RECEIVES:
          ETAFcstLvl-Info-Inp ;
     PART OF:         Build/Maintain-System-Uniques ;
     MAINTAINS:
          ETAFcstLvl-Tbl ;
     ADDS:            ETAFcstLvl TO ETAFcstLvl-Tbl ;
     MODIFIES:        ETAFcstLvl IN ETAFcstLvl-Tbl ;
     REFERENCES:      ETAFcstLvl IN ETAFcstLvl-Tbl ;
     REMOVES:         ETAFcstLvl FROM ETAFcstLvl-Tbl ;
     DESTROYS:
          ETAFcstLvl ;
     RESPONSIBLE PROBLEM DEFINER IS:
                      'TMAS Team' :
```

AD-A190 395 FUNCTIONAL DESCRIPTION FOR THE DEPARTMENT OF THE ARMY MOVEMENTS MANAGEMEN..(U) INTERNATIONAL BUSINESS SERVICES INC PRINCE GEORGE VA DEFENSE S.. W ANCKAITIS

UNCLASSIFIED 31 DEC 87 DSDPG-375-049-87-3-VOL-3 F/G 12/7 NL

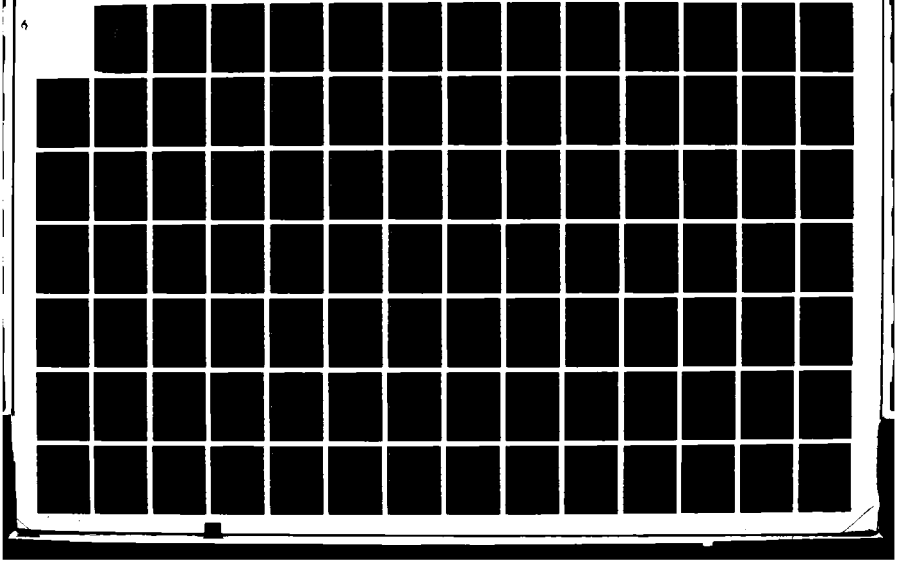

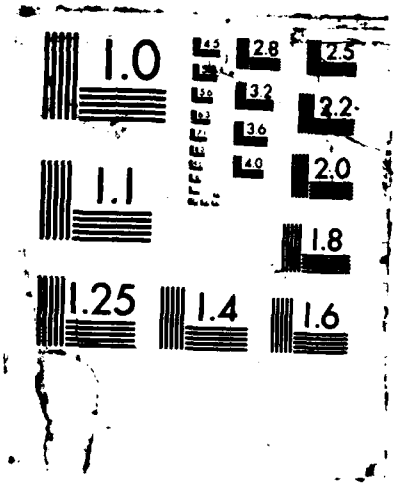
1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0

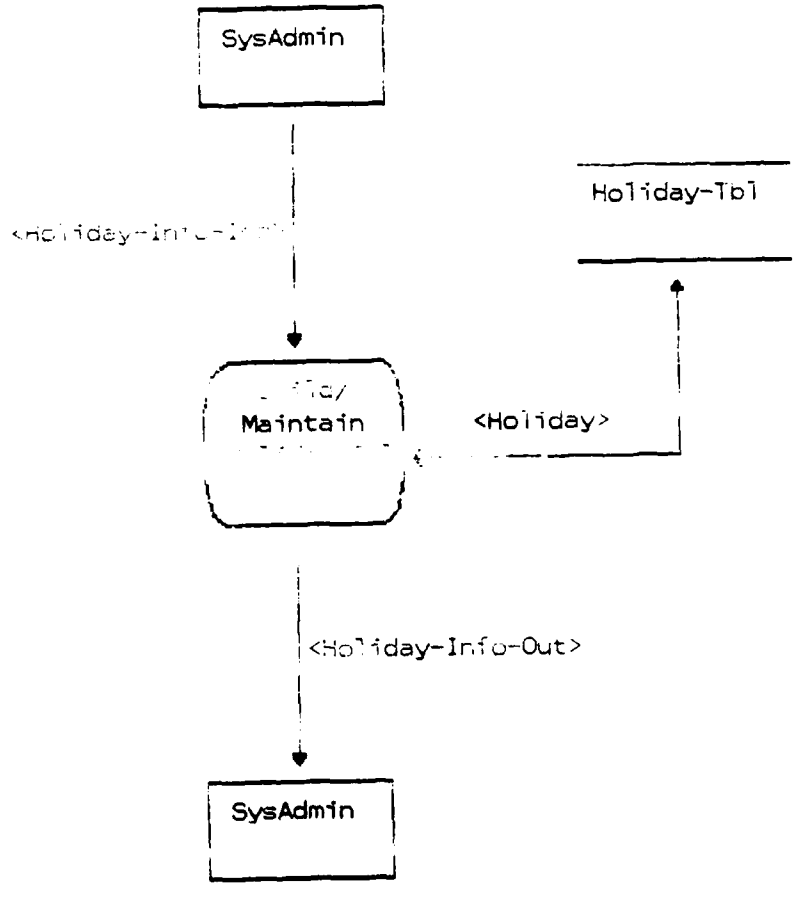


Figure 20. Build/Maintain-Holiday-Tbl

```
37      DEFINE PROCESS                    Build/Maintain-Holiday-Tbl ;
      DESCRIPTION;
   Build/Maintain Holiday Table.
   In this process, Holiday records are added, modified, deleted, viewed,
   and/or printed.
   ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ,
                      'TACCS' ;
      SEE MEMO:
           TCR-Build/Maint-Holiday-Tbl ;
      GENERATES:
           Holiday-Info-Out ;
      RECEIVES:
           Holiday-Info-Inp ;
      PART OF:        Build/Maintain-System-Uniques ;
      MAINTAINS:
           Holiday-Tbl ;
      ADDS:           Holiday TO Holiday-Tbl ;
      MODIFIES:       Holiday IN Holiday-Tbl ;
      REFERENCES:     Holiday IN Holiday-Tbl ;
      REMOVES:        Holiday FROM Holiday-Tbl ;
      DESTROYS:
           Holiday ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TMAS Team' ;
```

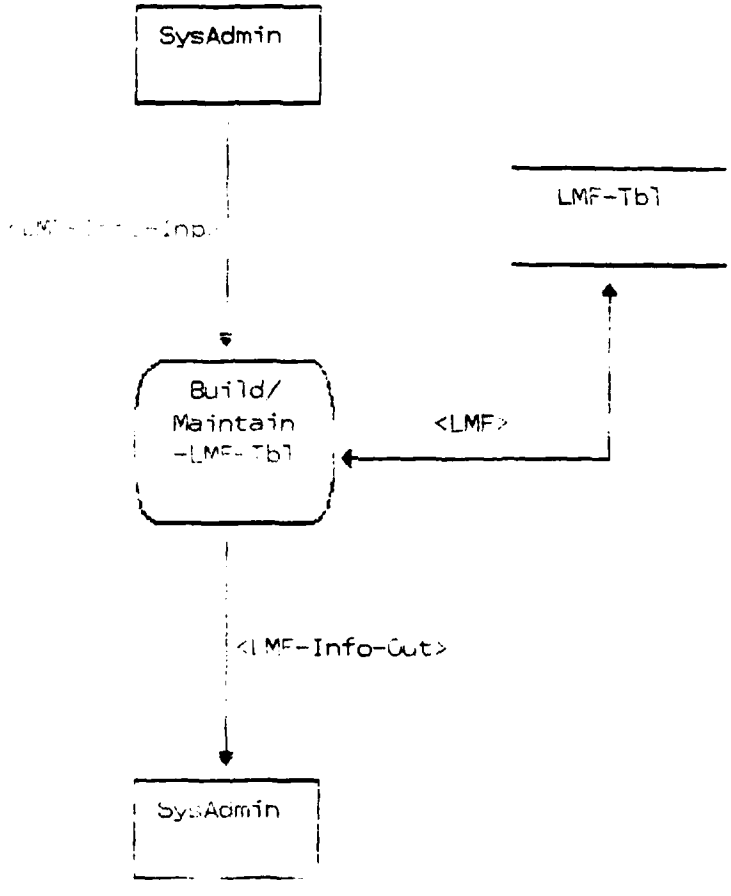


Figure 21. Build/Maintain-LMF-Tbl

```
38      DEFINE PROCESS                          Build/Maintain-LMF-Tbl ;
    DESCRIPTION;
Build/Maintain Language Media Format Table.
In this process, LMF records are added, modified, deleted, viewed,
and/or printed.
;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    SEE MEMO:
         TCR-Build/Maint-LMF-Tbl ;
    GENERATES:
         LMF-Info-Out ;
    RECEIVES:
         LMF-Info-Inp ;
    PART OF:        Build/Maintain-System-Uniques ;
    MAINTAINS:
         LMF-Tbl ;
    ADDS:           LMF TO LMF-Tbl ;
    MODIFIES:       [illegible] ;
    REFERENCES:     LMF IN LMF-Tbl ;
    REMOVES:        LMF FROM LMF-Tbl ;
    DESTROYS:
         LMF ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    [illegible] ;
```

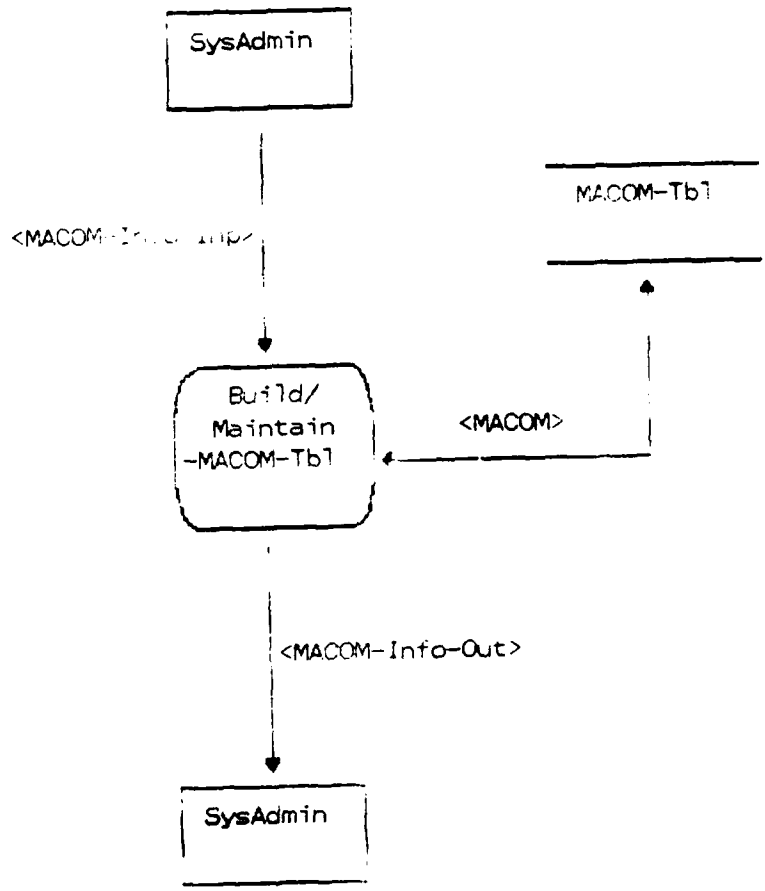


Figure 22. Build/Maintain-MACOM-Tbl

```
39        DEFINE PROCESS                    Build/Maintain-MACOM-Tbl ;
      DESCRIPTION;
   Build/Maintain Major Command Table.
   In this process, MACOM records are added, modified, deleted, viewed,
   and/or printed.
   ;
       KEYWORD IS:       'TMAS' ,
                         'LOB' ,
                         'TACCS' ;
       SEE MEMO:
            TCR-Build/Maint-MACOM Tbl ;
       GENERATES:
            MACOM-Info-Out ;
       RECEIVES:
            MACOM-Info-Inp ;
       PART OF:          Build/Maintain-System-Uniques ;
       MAINTAINS:
            MACOM-Tbl ;
       ADDS:             MACOM TO MACOM-Tbl ;
       MODIFIES:         MACOM IN MACOM-Tbl ;
       REFERENCES:       MACOM IN MACOM-Tbl ;
       REMOVES:          MACOM FROM MACOM-Tbl ;
       DESTROYS:
            MACOM ;
       RESPONSIBLE PROBLEM DEFINER IS:
                         'TMAS Team' ;
```

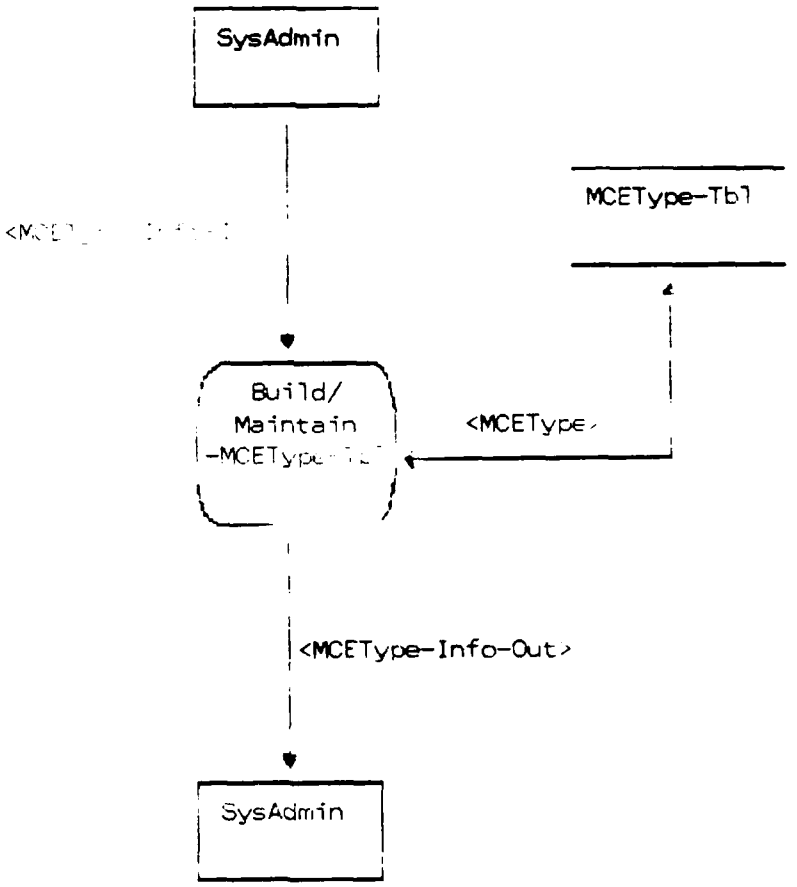


Figure [illegible] Build/Maintain-MCEType-Tbl

```
40      DEFINE PROCESS                    Build/Maintain-MCEType-Tbl ;
    DESCRIPTION;
Build/Maintain Movement Control Element Type Table.
In this process, MCEType records are added, modified, viewed, and/or
printed.
;
    KEYWORD IS:     'TMAS' ,
                    'LOR' ,
                    'TACCS' ;
    SEE MEMO:
         TOR-Build/Maint-MCEType-Tbl ;
    GENERATES:
         MCEType-Info-Out ;
    RECEIVES:
         MCEType-Info-Inp ;
    PART OF:        Build/Maintain-System-Uniques ;
    MAINTAINS:
         MCEType-Tbl :
    ADDS:           MCEType TO MCEType-Tbl ;
    MODIFIES:       MCEType IN MCEType-Tbl ;
    REFERENCES:     MCEType IN MCEType-Tbl ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

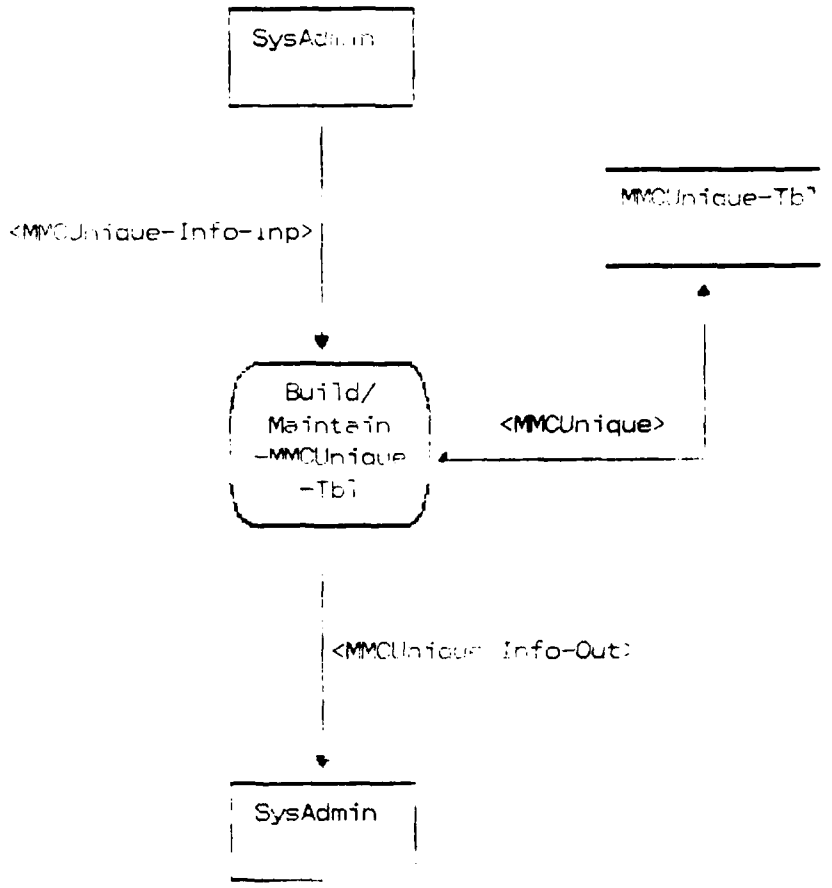


Figure 24. Build/Maintain-MMCUnique-Tbl

```
41      DEFINE PROCESS                          Build/Maintain-MMCUnique-Tbl ;
    DESCRIPTION;
Build/Maintain Materiel Management Center Unique Table.
In the process, MMCUnique records are added, modified, deleted, viewed,
and/or printed.
;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    SEE MEMO:
         TCR-Build/Maint-MMCUnique-Tbl ;
    GENERATES:
         MMCUnique-Info-Out ;
    RECEIVES:
         MMCUnique-Info-Inp ;
    PART OF:        Build/Maintain-System-Uniques ;
    MAINTAINS:
         MMCUnique-Tbl ;
    ADDS:           MMCUnique TO MMCUnique-Tbl ;
    MODIFIES:       MMCUnique IN MMCUnique-Tbl ;
    REFERENCES:     MMCUnique [illegible] Tbl ;
    REMOVES:        MMCUnique FROM MMCUnique-Tbl ;
    DESTROYS:
         MMCUnique ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

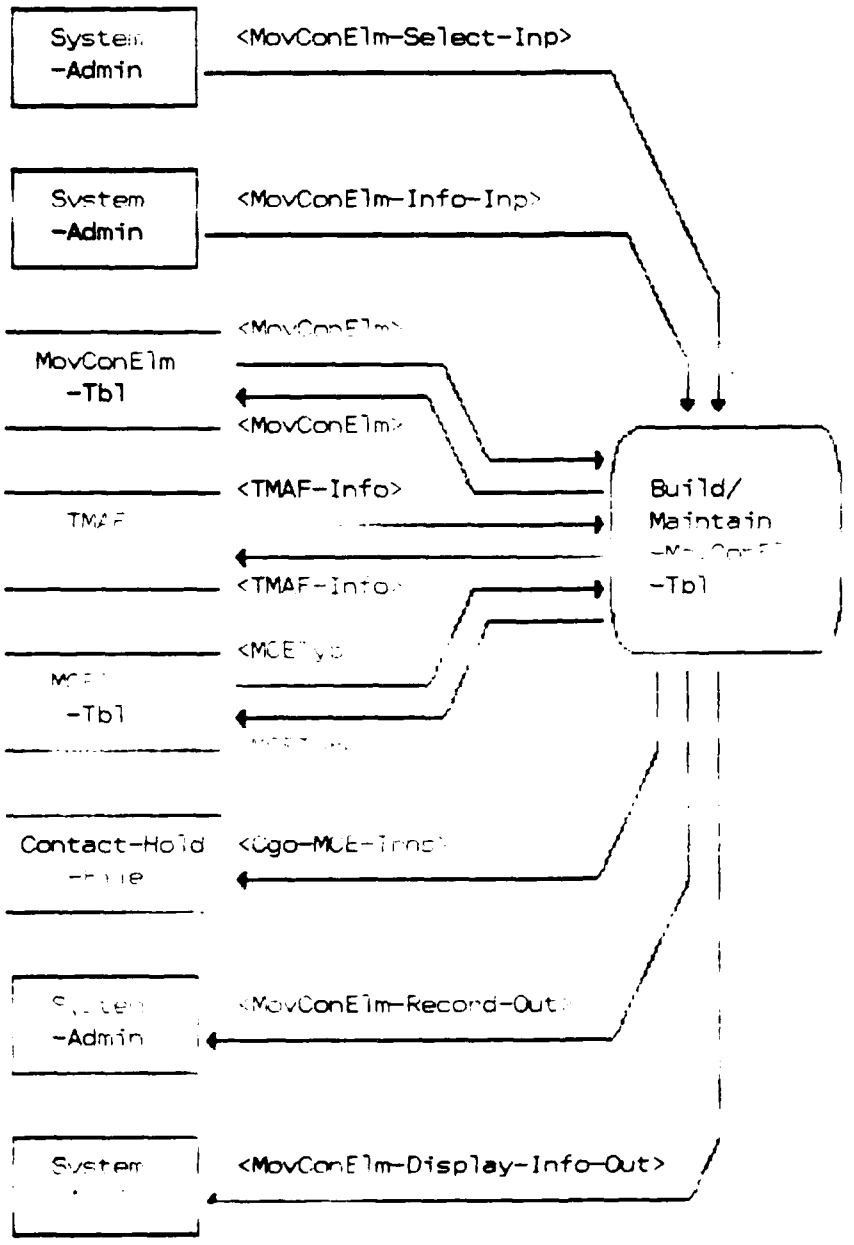


Figure 25. Build/Maintain-MovConElm-Tbl

42 DEFINE PROCESS Build/Maintain-MovConElm-Tbl ;
DESCRIPTION;
Build/Maintain Movement Control Element Table.
In this process, MovConElm records are added, modified, deleted, viewed, and/or printed. Additionally, the process creates and stores in a hold file appropriate add, modify, and delete transactions.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
SEE MEMO:
TCR-Build/Maint-MovConElm-Tbl ;
GENERATES:
MovConElm-Info-Out ;
RECEIVES:
MovConElm-Info-Inp ;
PART OF: Build/Maintain-System-Uniques ;
PROCEDURE;

IF:
Elements MCETyCd, MCEPrefix, MCESuffix, MCENme, and AACBnMCCMCC (AACCurr) are added

THEN:
Format the entity, Cgo-MCE-Trns, with the values:

DIC = CTC
TblNme = MovConElm
MCEType = current value of MCETyCd
MCEPrefix = current value of MCEPrefix
MCESuffix = current value of MCESuffix
BnAAC = current value of AACBnMCCMCC(AACCurr)
Description = current value of MCENme
SEND TO = Contact-Transactions-Hold-File

IF:

Elements MCENme and/or AACBnMCCMCC (AACCurr) are modified

THEN:
Format the entity, Cgo-MCE-Trns, with the values:

DIC = CTC
TblNme = MovConElm
MCEType = current value of MCETyCd
MCEPrefix = current value of MCEPrefix
MCESuffix = current value of MCESuffix
BnAAC = current value of AACBnMCCMCC(AACCurr)

```
        Description = current value of MCENme
        SEND TO = Contact-Transactions-Hold-File

    IF:
       Elements, MCEPrefix and MCESuffix, are deleted

    THEN:
         Format the entity, Cgo-MCE-Trns, with:

           DIC = CTD
           TblNme = MovConElm
           MCEPrefix = current value to be deleted
           MCESuffix = current value to be deleted
           BnAAC = current value of AACBnMCCMCC(AACCurr)
           Description = current value of MCENme
           SEND TO:  Contact-Transactions-Hold-File

    END PROCEDURE.
;
    MAINTAINS:
         MCEType-Tbl ;
    MAINTAINS:
         MovConElm-Tbl ;
    UPDATES:
         Contact-Transactions-Hold-File ;
    EMPLOYS:
         MCEType-Tbl ;
    ADDS:          Cgo-MCE-Trns TO Contact-Transactions-Hold-File ;
    ADDS:          MovConElm TO MovConElm-Tbl ;
    MODIFIES:      MCEType IN MCEType-Tbl ;
    MODIFIES:      MovConElm IN MovConElm-Tbl ;
    REFERENCES:    MovConElm IN MovConElm-Tbl ;
    REFERENCES:    MCEType IN MCEType-Tbl ;
    REMOVES:       MovConElm FROM MovConElm-Tbl ;
    DESTROYS:
         Cgo-MCE-Trns ,
         MovConElm ;
    RESPONSIBLE PROBLEM DEFINER IS:
                   'TMAS Team  ;
```

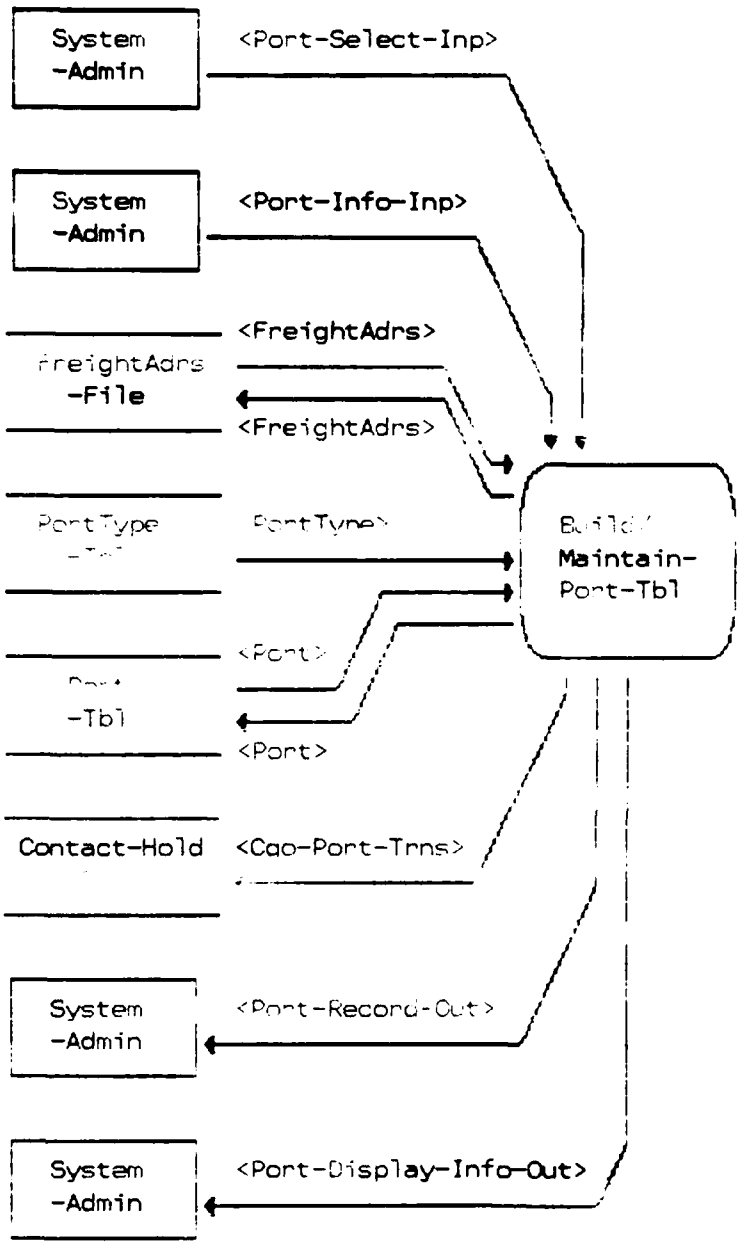


Figure 26. Build/Maintain-Port-Tbl

43 DEFINE PROCESS Build/Maintain-Port-Tbl ;
DESCRIPTION;
Build/Maintain Port Table
In this process, Port records are added, modified, deleted, viewed, and/or printed. Additionally, the process creates and stores in a hold file appropriate add [illegible] contact transactions.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
SEE MEMO:
TCR-Build/Maint-Port-Tbl ;
GENERATES:
Port-Record-Out ,
Port-Display-Info-Out ;
RECEIVES:
Port-Info-In ,
Port-Select-Inp ;
PART OF: Build/Maintain-System-Uniques ;
PROCEDURE;

IF:
Elements PrtCd, PrtTyCd or PrtNme are added

THEN:
Format the entity Cgo-Port-Trns with the values:

DIC = CIA
TblNme = PORT
PrtCd = current value of PrtCd
PrtTyCd = current value of PrtTyCd
Description = current value of PrtNme
SEND TO: Contact-Transactions-Hold-File

IF:
Element PrtNme is changed

THEN:
Format the entity Cgo-Port-Trns with the values:

DIC = CIC
TblNme = PORT
PrtCd = current value of PrtCd
PrtTyCd = current value of PrtTyCd
Description = current value of PrtNme
SEND TO: Contact-Transactions-Hold-File

IF:
Element PrtCd is deleted

```
THEN:
     Format the entity Cgo-Port-Trns with the values:

       DIC = CTD
       TblNme = Port
       PrtCd = value to be deleted
       PrtTyCd = current value of PrtTyCd
       Description = current value of PrtNme
       SEND TO:  Contact-Transactions-Hold-File
END PROCEDURE.
;
MAINTAINS:
     Port-Tbl ;
UPDATES:
     Contact-Transactions-Hold-File ;
EMPLOYS:
     PortType-Tbl ;
ADDS:          Cgo-Port-Trns TO Contact-Transactions-Hold-File ;
ADDS:          Port TO Port-Tbl ;
MODIFIES:      Port IN Port-Tbl ;
REFERENCES:    PortType IN PortType-Tbl ,
REFERENCES:    Port IN Port-Tbl ;
REMOVES:       Port FROM Port-Tbl ;
DESTROYS:
     Port ;
RESPONSIBLE PROGRAMMER DEFINED TO:
               'TMAS Team' ;
```


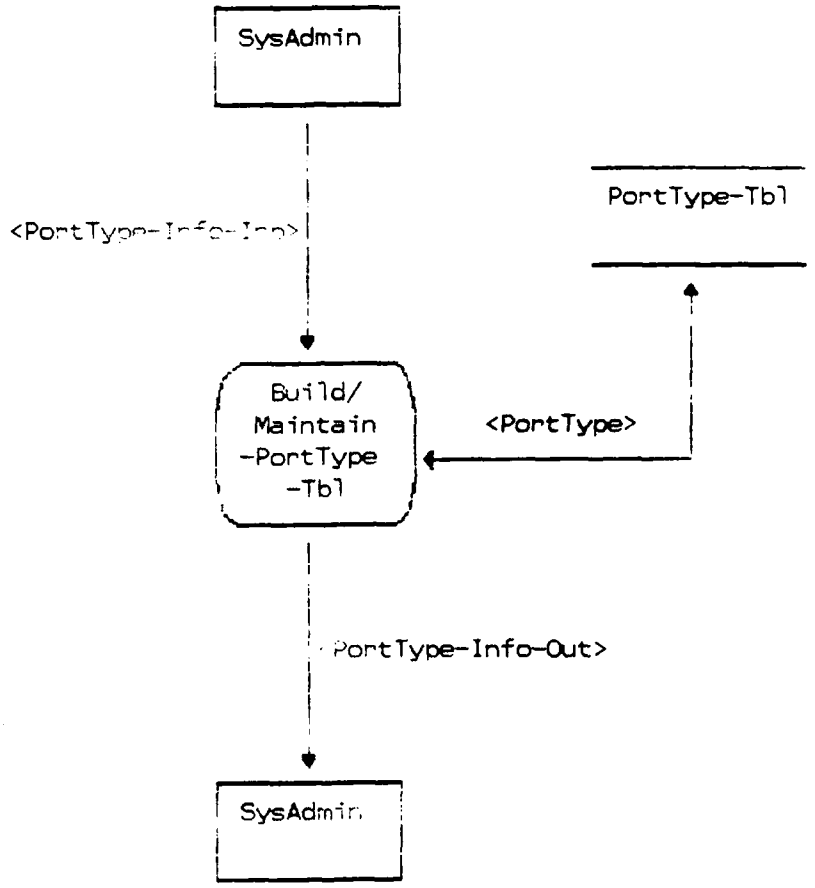


Figure 27. Build/Maintain-PortType-Tbl

```
44      DEFINE PROCESS                    Build/Maintain-PortType-Tbl ;
    DESCRIPTION;
Build/Maintain Port Type Table.
In this process, PortType records are added, modified, viewed, and/or
printed.
;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    SEE MEMO:
         TCR-Build/Maint-PortType-Tbl ;
    GENERATES:
         PortType-Info-Out ,
         PortType-Display-Info Out ,
         PortType-Record-Out ;
    RECEIVES:
         PortType-Info-Inp ,
         PortType-Select-Inp ;
    PART OF:        Build/Maintain-System-Uniques ;
    MAINTAINS:
         PortType-Tbl ;
    EMPLOYS:
         Port-Tbl ,
         PortType-Tbl ;
    ADDS:           PortType TO PortType-Tbl ;
    MODIFIES:       PortType IN PortType-Tbl ;
    DELETES:        PortType FROM PortType-Tbl ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

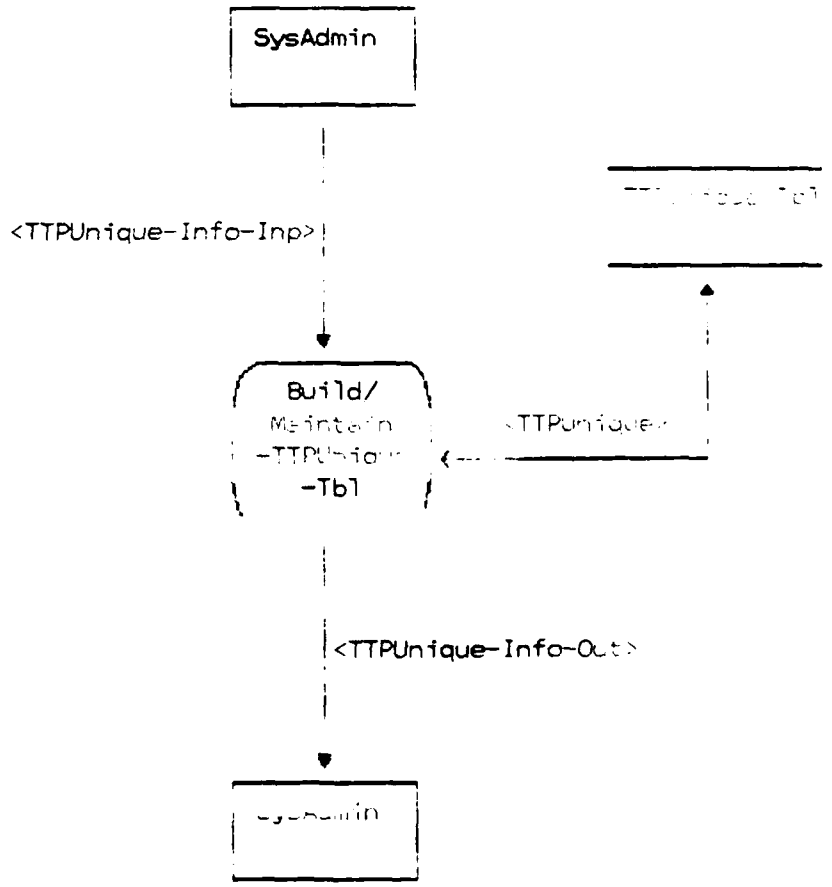

Build/Maintain-TTPUnique-Tbl

```
45      DEFINE PROCESS                    Build/Maintain-TTPUnique-Tbl ;
    DESCRIPTION;
Build/Maintain Trailer Transfer Point Unique Table.
In this process, TTPUnique records are added, modified, deleted, viewed,
and/or printed.
;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    SEE MEMO:
        TCR-Build/Maint-TTPUnique-Tbl ;
    GENERATES:
        TTPUnique-Info-Out ;
    RECEIVES:
        TTPUnique-Info-Inp ;
    PART OF:        Build/Maintain-System-Uniques ;
    MAINTAINS:
        TTPUnique-Tbl ;
    EMPLOYS:
        TTPUnique-Tbl ;
    ADDS:           TTPUnique TO TTPUnique-Tbl ;
    MODIFIES:       TTPUnique IN TTPUnique-Tbl ;
    REFERENCES:     TTPUnique IN TTPUnique-Tbl ;
    REMOVES:        TTPUnique FROM TTPUnique-Tbl ;
    DESTROYS:
        TTPUnique ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

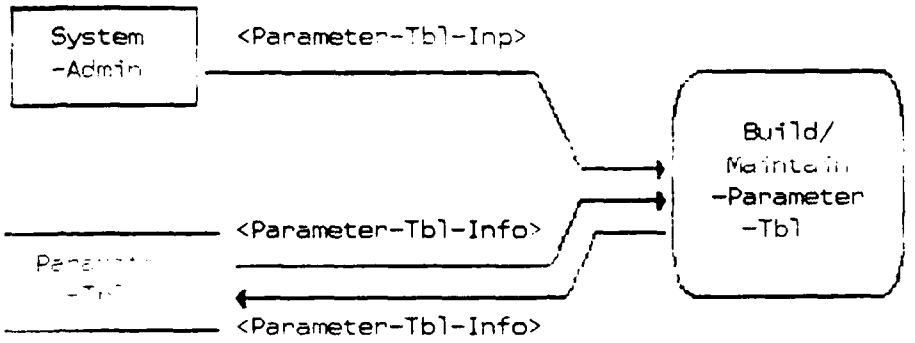


Figure 29. Build/Maintain-Parameter-Tbl

```
46      DEFINE PROCESS                    Build/Maintain-Parameter-Tbl ;
    DESCRIPTION;
Build/Maintain Parameter Table
This process is used to provide the "boiler plate" information to format
CMM transactions.  If the system is operating in an environment
that requires update of CMM, the elements are used to assign the origin
code of the originator (1st TMCA), a change number, etc.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    SEE MEMO:
         CMM-Transaction-Formats ,
         TCR-Build/Maint-Parameter-Tbl ;
    RECEIVES:
         Parameter-Tbl-Inp ;
    PART OF:        Build/Maintain-System-Uniques ;
    PROCEDURE;

1.  The operator enters the TMAS Master Menu through the path:
    TMAS Admin--->TMAS System Uniques--->Parameters--->.

2.  The operator is presented a screen and may change a parameter(s)
    value.
 ;
    MAINTAINS:
         TMAS-System-Parameter-Tbl ;
    ADDS:           Parameter TO Parameter-Tbl ;
    MODIFIES:       Parameter IN TMAS-System-Parameter-Tbl ;
    REFERENCES:     Parameter IN TMAS-System-Parameter-Tbl ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;

EOF EOF EOF EOF EOF
```

PARAGRAPH	INPUT OBJECTS	PAGE
1	Activity-Info-Inp	III-1731
2	AddressCat-Info-Inp	III-1732
3	BBPUnique-Info-Inp	III-1732
4	BillingAdrs-Info-Inp	III-1733
5	City-Info-Inp	III-1733
6	CityGroup-Info-Inp	III-1734
7	Country-Info-Inp	III-1734
8	Create-CMM-Mass-Upd-Select-Inp	III-1735
9	DODAAC-Info-Inp	III-1735
10	DODAAC-Search-Select-Inp	III-1735
11	DSSALOC-Info-Inp	III-1736
12	ETAFcstLvl-Info-Inp	III-1736
13	FSN-Info-Inp	III-1737
14	FSN-Search-Select-Inp	III-1737
15	FreightAdrs-Info-Inp	III-1738
16	Holiday-Info-Inp	III-1739
17	LMF-Info-Inp	III-1740
18	MACOM-Info-Inp	III-1740
19	MCEType-Info-Inp	III-1741
20	MMCUnique-Info-Inp	III-1741
21	MovConElm-Info-Inp	III-1742
22	Parameter-Tbl-Inp	III-1743
23	Port-Info-Inp	III-1743
24	Port-Select-Inp	III-1744
25	PortType-Info-Inp	III-1744
26	PortType-Select-Inp	III-1744
27	Print-Actv-Wksht-Select-Inp	III-1745
28	Print-Frt-Wksht-Select-Inp	III-1745
29	Print-TMAF-Record-Select-Inp	III-1746
30	RemarkLine-Info-Inp	III-1746
31	Ship-to-DODAAC-Info-Inp	III-1747
32	Ship-to-DODAAC-Select-Inp	III-1747
33	Ship-to-POC-Inp	III-1747
34	TTPUnique-Info-Inp	III-1748
35	UIC-Info-Inp	III-1748
36	UIC-Search-Select-Inp	III-1748
37	Unit-Dsg-Info-Inp	III-1748
38	Unit-Dsg-Search-Select-Inp	III-1749

```
1    DEFINE INPUT                              Activity-Info-Inp ;
       DESCRIPTION;
     Activity information Input.
     The operator entered input consisting of the data elements required
     to add, modify, rename or delete records to the Activity File.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal' ;
        GENERATED:      BY System-Operator ;
        RECEIVED:       BY Build/Maintain-Activity ;
        CONSISTS OF:
             AACCurr ,
             AACXbar ,
             UICCurr ,
             MUDsg ,
             UICOld ,
             TMAFDteLstUpd ,
             MUDsgCont ,
             MStPOBox ,
             MAttn ,
             MPostCd ,
             MCityRgn ,
             MAPOlst5 ,
             MAPOLst4 ,
             MDteLstUpd ,
             EffDte ,
             ContrNo ,
             ContrStart ,
             ContrEnd ,
             PSPPOC ,
             PSPMilTel ,
             PSPCivTel ,
             CMMIndicrCd ,
             TELEX ,
             DDNUserId ,
             DDNHostCd ,
             MACOMCd ,
             ShipToAAC ,
             BFSN ,
             DSSALOCCd ,
             MCntry ,
             MBldgNo ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

```
2    DEFINE INPUT                              AddressCat-Info-Inp ;
       DESCRIPTION;
Address Category Information Input.
This input consists of the data elements (ADCATCd and ADCATCdDescr)
which are used to build (add) an AddressCat record and/or the commands
'Clear Screen', 'Print Screen', 'Modify', or 'Delete', and the data
required for those processes.


This input consists of the 'Build/Maintain Sys Uniques' and
'Maintain Address Categories' commands from the Master Menu and
System Unique Menu.
 ;
     KEYWORD IS:     'TMAS' ,
                     'LOP' ;
     ATTRIBUTE IS:
          MEDIA           'Terminal' ;
     GENERATED:      BY System-Administrator ;
     RECEIVED:       BY Build/Maintain-AddressCat-Tbl ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS Team' ;

3    DEFINE INPUT                              BBPUnique-Info-Inp ;
       DESCRIPTION;
Breakbulk Point Unique Information Input.
This input consists of the data elements (AACBBP and AACBBPDescr) which
are used to build (add) a BBPUnique record and/or the commands 'Clear
Screen', 'Print Screen', 'Modify', or 'Delete', and the data entries
required for those processes.


This input consists of the selection Build/Maintain Sys Uniques and
Maintain BBPs from the Master Menu and System Unique Menu.
 ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ;
     ATTRIBUTE IS:
          MEDIA           'Terminal' ;
     GENERATED:      BY System-Administrator ;
     RECEIVED:       BY Build/Maintain-BBPUnique-Tbl ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS Team' ;
```

4 DEFINE INPUT BillingAdrs-Info-Inp ;
DESCRIPTION;
Billing Address Information Input.
This input consists of the data element BFSN plus the data elements contained in the entity BillingAdrs and/or the commands 'Clear Screen', 'Print Screen', 'Rename', 'Modify', or 'Delete', 'Finish', or 'Help'.

This input consists of the 'Build/Maintain TMAF' and 'Maintain Billing' commands from the Master Menu.
;
KEYWORD IS: 'TMAS' ,
'LOB' ;
ATTRIBUTE IS:
MEDIA 'Terminal' ;
GENERATED: BY System-Administrator ;
RECEIVED: BY Build/Maintain-BillingAdrs ;
RECEIVED: BY Print-BillingAdrs-Report ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

DEFINE INPUT City-Info-Inp ;
DESCRIPTION;
City Information Input.
This input consists of the data elements (CityNme and CityGpCd) which are used to build (add) a City record and/or the commands 'Clear Screen', 'Print Screen', 'Modify', or 'Delete', and the data entries required for those processes.

This input consists of the 'Build/Maintain Sys Uniques' and 'Maintain Cities' commands from the Master Menu and System Unique Menu.
;
KEYWORD IS: 'TMAS' ,
'LOB' ;
ATTRIBUTE IS:
MEDIA 'Terminal' ;
GENERATED: BY System-Administrator ;
RECEIVED: BY Build/Maintain-City-Tbl ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

```
6    DEFINE INPUT                              CityGroup-Info-Inp ;
       DESCRIPTION;
City Group Information Input.
This input consists of the data elements (CityGpCd and CityGpNme)
which are used to build (add) a CityGroup record and/or the commands
'Clear Screen', 'Print Screen', 'Modify', or 'Delete', and
the data entries required for those processes.


This input consists of the 'Build/Maintain Sys Uniques' and
'Maintain City Groups' commands from the Master Menu and
System Unique Menu.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ;
    ATTRIBUTE IS:
         MEDIA           'Terminal' ;
    GENERATED:      BY System-Administrator ;
    RECEIVED:       BY Build/Maintain-CityGroup-Tbl ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;

7    DEFINE INPUT                              Country-Info-Inp ;
       DESCRIPTION;
Country Information Input.
This input consists of the data elements (CntryCd and CntryCdDescr)
which are used to build (add) a Country record and/or the commands
'Clear Screen', 'Print Screen', 'Modify', or 'Delete', and
the data entries required for those processes.


This input consists of the 'Build/Maintain Sys Uniques' and
'Maintain Countries' commands from the Master Menu and System
Unique Menu.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ;
    ATTRIBUTE IS:
         MEDIA           'Terminal' ;
    GENERATED:      BY System-Administrator ;
    RECEIVED:       BY Build/Maintain-Country-Tbl ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

```
8    DEFINE INPUT                                  Create-CMM-Mass-Upd-Select-Inp ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
       GENERATED:      BY System-Operator ;
       RECEIVED:       BY Create-CMM-Mass-Update-File ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

9    DEFINE INPUT                                  DODAAC-Info-Inp ;
       DESCRIPTION;
Department of Defense Activity Address Code Information Input.
This input consists of the value for the desired DODAAC (data element
AACCurr) and the commands 'Display Billing Address', 'Display Freight
Address', 'Clear Screen', and 'Print Screen'.
 ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal' ;
       GENERATED:      BY System-Operator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

10   DEFINE INPUT                                  DODAAC-Search-Select-Inp ;
       DESCRIPTION;
Department of Defense Activity Address Code Search Selection Input.
This input consists of the "Queries/Search" and "DODAAC" commands
from the Master Menu.
 ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal' ;
       GENERATED:      BY System-Operator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

```
11   DEFINE INPUT                              DSSALOC-Info-Inp ;
       DESCRIPTION;
```

Direct Supply Support/Air Line of Communication Information Input. This input consists of the data elements (DSSALOCCd and DSSALOCCdDescr) which are used to build (add) a DSSALOC record and/or the commands 'Clear Screen', 'Print Screen', 'Modify', or 'Delete', and the data entries required for those processes.

This input consists of the 'Build/Maintain Sys Uniques' and 'Maintain DSS/ALOC Codes' commands from the Master Menu and System Unique Menu.

```
  ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ;
     ATTRIBUTE IS:
          MEDIA           'Terminal' ;
     GENERATED:      BY System-Administrator ;
     RECEIVED:       BY Build/Maintain-DSSALOC-Tbl ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS Team' ;

12   DEFINE INPUT                              ETAFcstLvl-Info-Inp ;
       DESCRIPTION;
```

Estimated Time of Arrival Forecast Level Information Input. This input consists of the data elements (ETAFcstLvlCd and ETAFcstLvlCdDescr) which are used to build (add) a ETAFcstLvl record and/or the commands 'Clear Screen', 'Print Screen', 'Modify', or 'Delete' and the data entries required for those processes.

This input consists of the 'Build/Maintain Sys Uniques' and 'Maintain ETA Forecast Levels' commands from the Master Menu and System Unique Menu.

```
  ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ;
     ATTRIBUTE IS:
          MEDIA           'Terminal' ;
     GENERATED:      BY System-Administrator ;
     RECEIVED:       BY Build/Maintain-ETAFcstLvl-Tbl ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS Team' ;
```

```
13   DEFINE INPUT                                  FSN-Info-Inp ;
       DESCRIPTION;
     Fiscal Station Number Information Input.
     This input consists of the value for the FSN (data element BFSN) and
     the command 'Clear Screen' and 'Print Screen', etc.
      ;
        KEYWORD IS:      'TMAS' ,
                         'LOB' ;
        ATTRIBUTE IS:
             MEDIA            'Terminal' ;
        GENERATED:       BY System-Operator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                         'TMAS Team' ;

14   DEFINE INPUT                                  FSN-Search-Select-Inp ;
       DESCRIPTION;
     Fiscal Station Number Search Selection Input.
     This input consists of the 'Queries/Search' and 'FSN' commands from
     the Master Menu.
      ;
        KEYWORD IS:      'TMAS' ,
                         'LOB' ;
        ATTRIBUTE IS:
             MEDIA            'Terminal' ;
        GENERATED:       BY System-Operator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                         'TMAS Team' ;
```

```
15   DEFINE INPUT                              FreightAdrs-Info-Inp ;
       DESCRIPTION;
     Freight Address Information Input.
     This input consists of the value assigned to the data element plus
     the data elements and values contained in the entity FreightAdrs
     and/or the commands 'Clear Screen', 'Print Screen', 'Modify', 'Finish',
     or 'Help'.

     This input consists of the 'Build/Maintain TMAF' and 'Maintain Freight'
     commands from the Master Menu.
      ;
         KEYWORD IS:     'TMAS' ,
                         'LOB' ,
                         'TACCS' ;
         ATTRIBUTE IS:
              MEDIA           'Terminal' ;
         GENERATED:      BY System-Operator ;
         RECEIVED:       BY Maintain-FreightAdrs ;
         COLLECTED:      IN FreightAdrs-File ;
         CONSISTS OF:
              ShipToAAC ,
              AACBBP ,
              FCntry ,
              WPOD ,
              APOD ,
              CityGpCd ,
              HolAreaCd ,
              TTPCd ,
              ADCATCd ,
              MCESuffix ,
              MCEPrefix ,
              LMF2 ,
              LMF1 ,
              AACMMC2 ,
              AACMMC1 ,
              ETACMMC2 ,
              ETABMMC2 ,
              ETACMMC1 ,
              ETABMMC1 ,
              ETACMCT ,
              ETABMCT ,
              ETACCnsgn ,
              ETABCnsgn ,
              TcrTml ,
              TrnsSeqNo ,
              MINIndic ,
              ClusterCd ,
              RtSeqNo ,
              RtCd ,
```

```
            FDteLstUpd ,
            FAPOLst4 ,
            FAPO1st5 ,
            FBrksKsrn ,
            FCityRgn ,
            FPostCd ,
            FAttn ,
            FBldgNo ,
            FSt ,
            FUDsgCont ,
            TMCA-Origin-Code ,
            FUDsg ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

16    DEFINE INPUT                              Holiday-Info-Inp ;
        DESCRIPTION;
    Holiday Information Input.
    This input consists of the data elements (HolAreaCd and HolAreaCdDescr)
    which are used to build (add) a Holiday Record and/or the commands
    Clear Screen, Print Screen, Modify or Delete and the data entries
    required for those processes.

    This input consists of the 'Build/Maintain Sys Uniques' and
    'Maintain Holiday Areas' commands from the Master Menu and System
    Unique Menu.
     ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal' ;
        GENERATED:      BY System-Administrator ;
        RECEIVED:       BY Build/Maintain-Holiday-Tbl ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

```
17   DEFINE INPUT                                LMF-Info-Inp ;
       DESCRIPTION;
     Language Media Format Information Input.
     This input consists of the data elements (LMFCd and LMFCdDescr)
     which are used to build (add) a LMF record and/or the commands 'Clear
     Screen', 'Print Screen', 'Modify', or 'Delete', and the data entries
     required for those processes.


     This input consists of the 'Build/Maintain Sys Uniques' and
     'Maintain LMF' commands from the Master Menu and System Unique Menu.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal' ;
        GENERATED:      BY System-Administrator ;
        RECEIVED:       BY Build/Maintain-LMF-Tbl ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

18   DEFINE INPUT                                MACOM-Info-Inp ;
       DESCRIPTION;
     Major Command Information Input.
     This input consists of the data element (MACOMCd and MACOMCdDescr)
     which are used to build (add) a MACOM record and/or the commands
     'Clear Screen', 'Print Screen', 'Modify', or 'Delete', and the
     data entries required for those processes.


     This input consists of the 'Build/Maintain Sys Uniques' and
     'Maintain MACOM' commands from the Master Menu and System Unique Menu.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal' ;
        GENERATED:      BY System-Administrator ;
        RECEIVED:       BY Build/Maintain-MACOM-Tbl ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

19 DEFINE INPUT MCEType-Info-Inp ;
DESCRIPTION;
Movement Control Element Type Information Input.
This input consists of the data elements (MCETyCd and MCETyCdDescr) which are used to build (add) a MCEType record and/or the commands 'Clear Screen', 'Print Screen', 'Modify', or 'Delete', and the data entries required for those processes.

This input consists of the 'Build/Maintain Sys Uniques' and 'Maintain MCE Types' commands from the Master Menu and System Unique Menu.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
ATTRIBUTE IS:
MEDIA 'Terminal' ;
GENERATED: BY System-Administrator ;
RECEIVED: BY Build/Maintain-MCEType-Tbl ;
CONSISTS OF:
MCETyCd ,
MCETyCdDescr ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

20 DEFINE INPUT MMCUnique-Info-Inp ;
DESCRIPTION;
Materiel Management Center Unique Information Input.
This input consists of the data elements (AACMMC and AACMMCDescr) which are used to build (add) a MMCUnique record and/or the commands 'Clear Screen', 'Print Screen', 'Modify', or 'Delete', and the data elements required for those processes.

This input consists of the 'Build/Maintain Sys Unique' and 'Maintain MMCs' commands from the Master Menu and System Unique Menu.
;
KEYWORD IS: 'TMAS' ,
'LOB' ;
ATTRIBUTE IS:
MEDIA 'Terminal' ;
GENERATED: BY System-Administrator ;
RECEIVED: BY Build/Maintain-MMCUnique-Tbl ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

```
21   DEFINE INPUT                              MovConElm-Info-Inp ;
       DESCRIPTION;
     Movement Control Element Information Input.
     This input consists of the data elements (MCETyCd, MCECd, MCEPrefix,
     MCESuffix, MCENme, and AACBnMC/CMCC) which are used to build (add)
     a MovConElm record and/or the commands 'Clear Screen', 'Print Screen',
     'Modify', or 'Delete', and the data entries required for those
     processes.  In addition, this process will format a transaction called
     Cgo-MCE-Trns in the format shown at MEMO:  Cargo-MCE-Transaction.
     This will be sent to the SET:  Contact-Transactions-Hold-File

     This input consists of the 'Build/Maintain Sys Uniques' and
     'Maintain MCEs' commands from the Master Menu and System Unique Menu.
      ;
         KEYWORD IS:      'TMAS' ,
                          'LOB' ;
         ATTRIBUTE IS:
              MEDIA            'Terminal' ;
         GENERATED:       BY System-Administrator ;
         RECEIVED:        BY Build/Maintain-MovConElm-Tbl ;
         CONSISTS OF:
              MCETyCd ,
              MCECd ,
              MCEPrefix ,
              MCESuffix ,
              MCENme ,
              AACBnMC/CMCC ,
         RESPONSIBLE PROBLEM DEFINER IS:
                          'TMAS Team' ;
```

22 DEFINE INPUT Parameter-Tbl-Inp ;
DESCRIPTION;
Parameter Table Input
This input is received from the system admimistrator. It is used in the Parameter Table to provide "boiler plate" information for TT7 and TT8 transactions to CMM if operating is in a CMM environment or to turn off CMM transactions.
;
KEYWORD IS: 'TMAS' ,
'TACCS' ;
SEE MEMO:
CMM-Transaction-Formats ;
GENERATED: BY System-Administrator ;
RECEIVED: BY Build/Maintain-Parameter-Tbl ;
COLLECTED: IN TMAS-System-Parameter-Tbl ;
CONSISTS OF:
TMCA-Origin-Code ,
CMM-Environment-Code ,
CMM-Change-Number ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

23 DEFINE INPUT Port-Info-Inp ;
DESCRIPTION;
Port Information Input.
This input consists of the data elements (PrtTyCd, PrtCd, and PrtNme) which are used to build (add) a Port record and/or the commands 'Clear Screen', 'Print Screen', 'Modify', or 'Delete', and the data entries required for those processes.
;
KEYWORD IS: 'TMAS' ,
'LOB' ;
ATTRIBUTE IS:
MEDIA 'Terminal' ;
GENERATED: BY System-Administrator ;
GENERATED: BY System-Operator ;
RECEIVED: BY Build/Maintain-Port-Tbl ;
CONSISTS OF:
PrtTyCd ,
PrtCd ,
PrtNme ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

```
24   DEFINE INPUT                                  Port-Select-Inp ;
       GENERATED:      BY System-Administrator ;
       RECEIVED:       BY Build/Maintain-Port-Tbl ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

25   DEFINE INPUT                                  PortType-Info-Inp ;
       DESCRIPTION;
   Port Type Information Input.
   This input consists of the data elements (PrtTyCd and PrtTyDescr)
   which are used to build (add) and PortType record and/or the
   commands 'Clear Screen', 'Print Screen', 'Modify', or Delete,
   and the data entries required for those processes.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal' ;
       GENERATED:      BY System-Administrator ;
       GENERATED:      BY System-Operator ;
       RECEIVED:       BY Build/Maintain-PortType-Tbl ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

26   DEFINE INPUT                                  PortType-Select-Inp ;
       DESCRIPTION;
   Port Type Selection Input.
   This input consists of the 'Build/Maintain Sys Uniques' and
   'Maintain Port Types' commands from the Master Menu and System
   Unique Menu.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal' ;
       GENERATED:      BY System-Operator ;
       RECEIVED:       BY Build/Maintain-PortType-Tbl ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

27 DEFINE INPUT Print-Actv-Wksht-Select-Inp ;
DESCRIPTION;
Print Activity Worksheet Selection Input.
This input consists of the 'Print Reports', 'Error Records', 'Activity Addr Wksht' commands from the Master Menu.

This input consists of the Activity DODAAC value (data element AACCurr) of the desired activity.
;
KEYWORD IS: 'TMAS' ,
'LOB' ;
ATTRIBUTE IS:
MEDIA 'Terminal' ;
GENERATED: BY System-Operator ;
RECEIVED: BY Print-Actv-Rec-Wksht ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

28 DEFINE INPUT Print-Frt-Wksht-Select-Inp ;
DESCRIPTION;
Print Freight Worksheet Selection Input.
This input consists of the 'Print Reports', 'Error Records', and 'Freight Addr Wksht' commands from the Master Menu.

This input consists of the freight address DODAAC value (data element ShipToAAC) of the desired FreightAdrs.
;
KEYWORD IS: 'TMAS' ,
'LOB' ;
ATTRIBUTE IS:
MEDIA 'Terminal' ;
GENERATED: BY System-Operator ;
RECEIVED: BY Print-Frt-Rec-Wksht ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

```
29   DEFINE INPUT                              Print-TMAF-Record-Select-Inp ;
       DESCRIPTION;
     Print Transportation Movements Address File Record Selection Input.
     This input consists of the 'Print Reports' and 'TMAF Record(s)'
     commands from the Master Menu.

     This input consists of the value(s) of the data element(s) AACCurr
     of the record(s) to be printed.
      ;
        KEYWORD IS:      'TMAS' ,
                         'LOB' ;
        ATTRIBUTE IS:
             MEDIA            'Terminal' ,
        GENERATED:       BY System-Administrator ;
        GENERATED:       BY System-Operator ;
        RECEIVED:        BY Print-Selected-TMAF-Records ;
        RESPONSIBLE PROBLEM DEFINER IS:
                         'TMAS Team' ;

30   DEFINE INPUT                              RemarkLine-Info-Inp :
       DESCRIPTION;
     Remark Line Information Input
     This input consists of the data elements AACCurr, RmrkLineNo, and
     Rmrk(s) (up to 50 characters of free text per remark line).  It also
     consists of the commands 'Clear Screen', 'Print Screen', 'Copy',
     'Modify', or 'Delete'.

     This input consists of the 'Build/Maintain TMAF' and 'Maintain Remarks'
     commands from the Master Menu.
      ;
        KEYWORD IS:      'TMAS' ,
                         'LOB' ;
        ATTRIBUTE IS:
             MEDIA            'Terminal' ;
        GENERATED:       BY System-Administrator ;
        RECEIVED:        BY Build/Maintain-RemarkLine ;
        RESPONSIBLE PROBLEM DEFINER IS:
                         'TMAS Team' ;
```

```
31   DEFINE INPUT                                  Ship-to-DODAAC-Info-Inp ;
       DESCRIPTION;
Ship to Department of Defense Activity Address Code Information Input.
This input consists of the value of the Ship to DODAAC and activity
DODAAC and the function commands.
 ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ;
     ATTRIBUTE IS:
          MEDIA           'Terminal' ;
     GENERATED:      BY System-Operator ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS Team' ;

32   DEFINE INPUT                                  Ship-to-DODAAC-Select-Inp ;
       DESCRIPTION;
Ship to Department of Defense Activity Address Code Selection Input.
This input consists of the 'Queries/Search' and 'Ship to DODAAC'
commands from the Master Menu.
 ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ;
     ATTRIBUTE IS:
          MEDIA           'Terminal' ;
     GENERATED:      BY System-Operator ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS Team' ;

33   DEFINE INPUT                                  Ship-to-POC-Inp ;
       DESCRIPTION;
Ship to Point of Contact Input
This is data received from the MCT/BMCT to maintain current POC data in
Freight Address File.
 ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ,
                     'TACCS' ;
     CONSISTS OF:
          ShipToAAC ,
          FMCTPOC ,
          FMCTMilTel ,
          FMCTCivTel ,
          BASATel ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS Team' ;
```

```
34   DEFINE INPUT                              TTPUnique-Info-Inp ;
       GENERATED:      BY System-Administrator ;
       RECEIVED:       BY Build/Maintain-TTPUnique-Tbl ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

35   DEFINE INPUT                              UIC-Info-Inp ;
       DESCRIPTION;
   Unit Identification Code Information Input.
   This input consists of the UIC-Current, 'Display Billing Address',
   and 'Display Freight Address' commands.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal' ;
       GENERATED:      BY System-Operator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

36   DEFINE INPUT                              UIC-Search-Select-Inp ;
       DESCRIPTION;
   Unit Identification Code Search Select Input.
   This input consists of the 'Queries/Search' and 'UIC' commands from
   the Master Menu.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal' ;
       GENERATED:      BY System-Operator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

37   DEFINE INPUT                              Unit-Dsg-Info-Inp ;
       DESCRIPTION;
   Unit Designation Information Input.
   This input consists of the value of the desired unit designation
   (data element MUDsg) and the commands 'Clear Screen' and 'Print Screen'.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal' ;
       GENERATED:      BY System-Operator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

```
38   DEFINE INPUT                              Unit-Dsg-Search-Select-Inp ;
       DESCRIPTION;
    Unit Designation Search Selection Input.
    This input consists of the 'Queries/Search' and 'Unit Designation'
    commands from the Master Menu.
     ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal' ;
        GENERATED:      BY System-Operator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

    EOF EOF EOF EOF EOF
```

PARAGRAPH	OUTPUT OBJECTS	PAGE
1	Activity-Display-Info-Out	III-1753
2	Activity-Record-Wksht-Out	III-1754
3	AddressCat-Info-Out	III-1754
4	BBPUnique-Info-Out	III-1754
5	BillingAdrs-Display-Out	III-1755
6	BillingAdrs-Info-Out	III-1755
7	BillingAdrs-Record-Out	III-1755
8	Blank-Activity-Wksht-Out	III-1756
9	Blank-Freight-Wksht-Out	III-1756
10	CMM-Address-File-Update-Out	III-1756
11	City-Info-Out	III-1757
12	CityGroup-Info-Out	III-1757
13	Contact-Seq-Trns-Out	III-1757
14	Country-Info-Out	III-1758
15	DODAAC-Display-Info-Out	III-1758
16	DODAAC-Info-Out	III-1758
17	DSSALOC-Info-Out	III-1759
18	Display-POC-Info-Out	III-1760
19	ETAFcstLvl-Info-Out	III-1761
20	Error-Analysis-Report-Out	III-1761
21	Freight-Record-Wksht-Out	III-1761
22	FreightAdrs-Display-Info-Out ...	III-1762
23	FreightAdrs-Info-Out	III-1762
24	Holiday-Info-Out	III-1762
25	Incomplete-Record-Wksht-Out	III-1762
26	LMF-Info-Out	III-1763
27	MACOM-Info-Out	III-1763
28	MCEType-Info-Out	III-1763
29	MMCUnique-Info-Out	III-1764
30	MovConElm-Info-Out	III-1764
31	POC-Error-Info-Out	III-1765
32	Port-Display-Info-Out	III-1765
33	Port-Record-Out	III-1765
34	PortType-Display-Info-Out	III-1766
35	PortType-Info-Out	III-1766
36	PortType-Record-Out	III-1766
37	Print-Error-Analysis-Rept-Out ..	III-1766
38	Print-Ship-to-POC-Error-Rept ...	III-1767
39	Print-Sys-Unique-Tbl-Rept-Out ..	III-1767
40	RemarkLine-Info-Out	III-1767
41	Ship-to-DODAAC-Dsply-Info-Out ..	III-1767
42	Ship-to-DODAAC-Info-Out	III-1768
43	System-Unique-Table-Rept-Out ...	III-1768
44	TMAF-Record-Out	III-1769
45	TT7/TT8-Change-Trns-Info-Out ...	III-1769
46	TT7/TT8-Transactions-Info-Out ..	III-1769
47	TTPUnique-Info-Out	III-1770

PARAGRAPH	OUTPUT OBJECTS	PAGE
48	UIC-Display-Info-Out	III-1770
49	UIC-Info-Out	III-1770
50	Unit-Dsg-Display-Info-Out	III-1771
51	Unit-Dsg-Info-Out	III-1771

```
1    DEFINE OUTPUT                          Activity-Display-Info-Out ;
       DESCRIPTION;
     Activity Information Output
     This output is a three screen display of an Activity record.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        GENERATED:      BY Build/Maintain-Activity ;
        GENERATED:      BY Activity-Inquiry ;
        RECEIVED:       BY System-Operator ;
        CONSISTS OF:
             AACCurr ,
             AACXRef ,
             UICCurr ,
             MUDsg ,
             UICOld ,
             TMAFDteLstUpd ,
             MUDsgCont ,
             MStPOBox ,
             MAttn ,
             MPostCd ,
             MCityRgn ,
             MAPO1st5 ,
             MAPOLst4 ,
             MDteLstUpd ,
             EffDte ,
             ContrNo ,
             ContrStart ,
             ContrEnd ,
             PSPPOC ,
             PSPMilTel ,
             PSPCivTel ,
             CMMIndicrCd ,
             TELEX ,
             DDNUserId ,
             DDNHostCd ,
             MACOMCd ,
             ShipToAAC ,
             BFSN ,
             DSSALOCCd ,
             MCntry ,
             MBldgNo ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

```
2    DEFINE OUTPUT                              Activity-Record-Wksht-Out ;
       DESCRIPTION;
Activity Record Worksheet Output.
This output consists of a hardcopy worksheet of the incomplete Activity
record.  Worksheets will mirror the Build/Maintain screens.
 ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Hardcopy' ;
       GENERATED:      BY Print-Actv-Rec-Wksht ;
       RECEIVED:       BY System-Manager ;
       RECEIVED:       BY System-Operator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

3    DEFINE OUTPUT                              AddressCat-Info-Out ;
       DESCRIPTION;
Address Category Information Output.
This output consists of the screen(s) display and/or a hard copy
printout of the AddressCat record(s).
 ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal/Hardcopy' ;
       GENERATED:      BY Build/Maintain-AddressCat-Tbl ;
       RECEIVED:       BY System-Administrator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

4    DEFINE OUTPUT                              BBPUnique-Info-Out ;
       DESCRIPTION;
Breakbulk Point Unique Information Output.
This output consists of the screen(s) display and/or a hard copy
printout of the BBPUnique record(s).
 ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal/Hardcopy' ;
       GENERATED:      BY Build/Maintain-BBPUnique-Tbl ;
       RECEIVED:       BY System-Administrator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

```
5    DEFINE OUTPUT                          BillingAdrs-Display-Out ;
       DESCRIPTION;
     Billing Address Display Output.
     This output consists of a screen(s) displaying the activities,
     error messages, or help information of the referenced FSN.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

6    DEFINE OUTPUT                          BillingAdrs-Info-Out ;
       DESCRIPTION;
     Billing Address Information Output.
     This output consists of a hard copy printout of the referenced
     activities by DODAAC.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA          'Hardcopy' ;
        RECEIVED:       BY System-Operator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

7    DEFINE OUTPUT                          BillingAdrs-Record-Out ;
       DESCRIPTION;
     Billing Address Record Output.
     This output consists of a hard copy printout of the referenced
     BillingAdrs record.

     This output consists of a screen(s) displaying the activities, error
     messages, or help information of the referenced FSN.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA          'Terminal' ;
        GENERATED:      BY Build/Maintain-BillingAdrs ;
        GENERATED:      BY Print-BillingAdrs-Report ;
        RECEIVED:       BY System-Administrator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

```
8    DEFINE OUTPUT                                  Blank-Activity-Wksht-Out ;
       DESCRIPTION;
     Blank Activity Worksheet Output.
     This output consists of hard copy worksheet printout with the in-the-clear
     elements listed.
      ;
         KEYWORD IS:     'TMAS' ,
                         'LOB' ,
                         'TACCS' ;
         SEE MEMO:
              TCR-Print-Blank-Frt/Actv-Wksht ;
         GENERATED:      BY Print-Blank-Frt/Actv-Wksht ;
         RECEIVED:       BY System-Operator ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TMAS Team' ;

9    DEFINE OUTPUT                                  Blank-Freight-Wksht-Out ;
       DESCRIPTION;
     Blank Freight Worksheet Output.
     This output consists of a hard copy worksheet printout with the
     in-the-clear data elements listed.
     ;
         KEYWORD IS:     'TMAS' ,
                         'LOB' ,
                         'TACCS' ;
         SEE MEMO:
              TCR-Print-Blank-Frt/Actv-Wksht ;
         ATTRIBUTE IS:
              MEDIA           'Hardcopy' ;
         GENERATED:      BY Print-Blank-Frt/Actv-Wksht ;
         RECEIVED:       BY System-Manager ;
         RECEIVED:       BY System-Operator ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TMAS Team' ;

10   DEFINE OUTPUT                                  CMM-Address-File-Update-Out ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
       RECEIVED:       BY CMM ;
       COLLECTED:      IN CMM-Transactions-Seq-File ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

```
11   DEFINE OUTPUT                              City-Info-Out ;
       DESCRIPTION;
     City Information Output.
     This output consists of the screen(s) display and a hard copy
     printout of the City record(s).
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal/Hardcopy' ;
        GENERATED:      BY Build/Maintain-City-Tbl ;
        RECEIVED:       BY System-Administrator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

12   DEFINE OUTPUT                              CityGroup-Info-Out ;
       DESCRIPTION;
     City Group Information Output.
     This output consists of the screen(s) display and/or a hard copy
     printout of the CityGroup record(s).
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal/Hardcopy'
        GENERATED:      BY Build/Maintain-CityGroup-Tbl ;
        RECEIVED:       BY System-Administrator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

13   DEFINE OUTPUT                              Contact-Seq-Trns-Out ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ,
                        'TACCS' ;
        GENERATED:      BY Prep-Contact-Out-Changes ;
        RECEIVED:       BY System-Operator ;
        COLLECTED:      IN Contact-Transactions-Seq-File ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```


```
14   DEFINE OUTPUT                              Country-Info-Out ;
       DESCRIPTION;
   Country Information Output.
   This output consists of the screen(s) display and/or a hard copy
   printout of the Country record(s).
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal/Hardcopy' ;
       GENERATED:      BY Build/Maintain-Country-Tbl ;
       RECEIVED:       BY System-Administrator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

15   DEFINE OUTPUT                              DODAAC-Display-Info-Out ;
       DESCRIPTION;
   Department of Defense Activity Address Code Display Information Output.
   This output consists of a series of screens for viewing a TMAF
   record, error messages or help information of the keyed DODAAC.  Each
   screen display will show the value of the data element AACCurr.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal' ;
       RECEIVED:       BY System-Operator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

16   DEFINE OUTPUT                              DODAAC-Info-Out ;
       DESCRIPTION;
   Department of Defense Activity Address Code Information Output.
   This output consists of a hard copy printout of any of the screens.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Hardcopy' ;
       RECEIVED:       BY System-Operator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

```
17   DEFINE OUTPUT                                DSSALOC-Info-Out ;
       DESCRIPTION;
Direct Supply Support/Air Line of Communication Table Output.
This output consists of the screen(s) display and/or a hard copy
printout of the DSSALOC record(s).
 ;
       ATTRIBUTE IS:
            MEDIA            'Terminal/Hardcopy' ;
       GENERATED:       BY Build/Maintain-DSSALOC-Tbl ;
       RECEIVED:        BY System-Administrator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

18 DEFINE OUTPUT Display-POC-Info-Out ;
DESCRIPTION;
Display Point of Contact Information
This output is a screen display of POC data by Ship to AAC or Unit Designation. The display will provide HELP screens that are scrollable. As a Ship to AAC is highlighted the POC information for that Ship to AAC will be displayed in an inter-box in the upper lefthand corner of the screen display.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
GENERATED: BY Display-Ship-to-POC-Info ;
RECEIVED: BY System-Operator ;
LAYOUT;
SHIP TO AAC POINT OF CONTACT INFORMATION

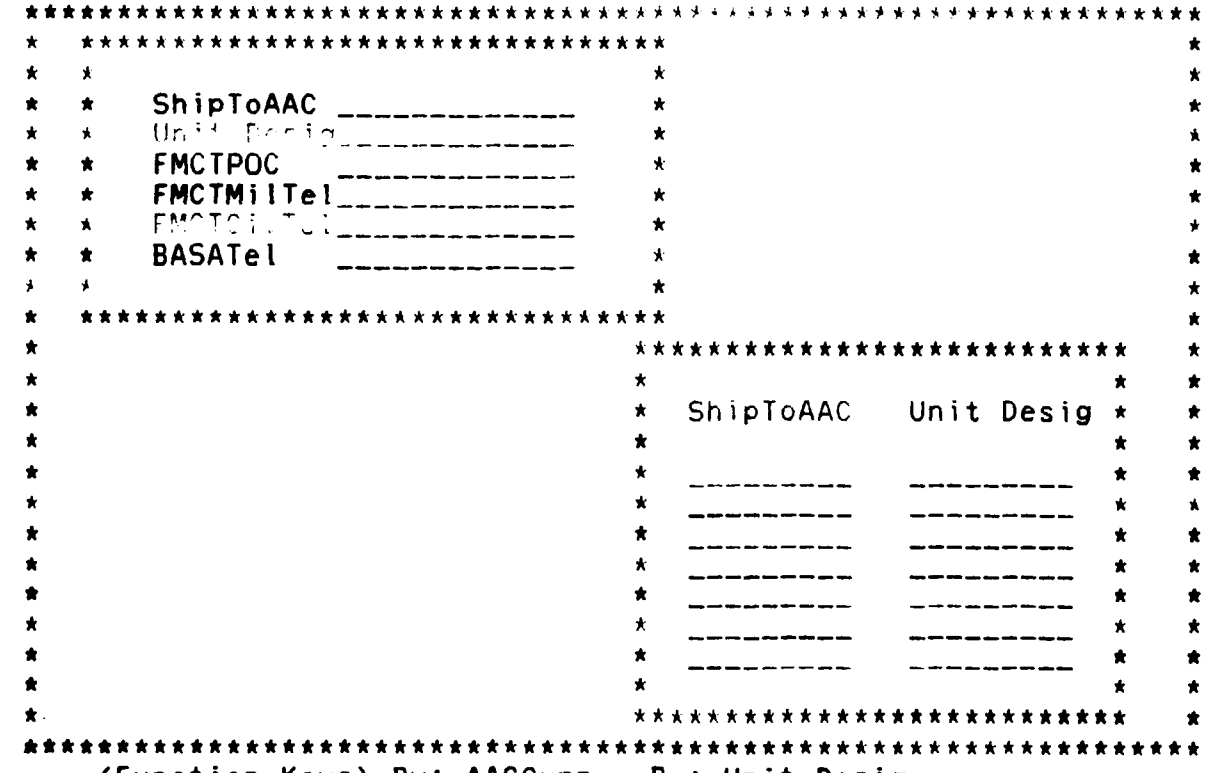

(Function Keys) By: AACCurr By: Unit Desig
;
CONSISTS OF:
ShipToAAC ,
FMCTPOC ,
FMCTMilTel ,
FMCTCivTel ,

```
          BASATel ,
          FUDsg ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

19    DEFINE OUTPUT                                ETAFcstLvl-Info-Out ;
        DESCRIPTION;
      Estimated Time of Arrival Forecast Level Information Output.
      This output consists of the screen(s) display and/or a hard copy
      printout of the ETAFcstLvl record(s).
       ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal/Hardcopy' ;
        GENERATED:      BY Build/Maintain-ETAFcstLvl-Tbl ;
        RECEIVED:       BY System-Administrator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

20    DEFINE OUTPUT                                Error-Analysis-Report-Out ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ,
                        'TACCS' ;
        GENERATED:      BY Create-Error-Analysis-Report ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

21    DEFINE OUTPUT                                Freight-Record-Wksht-Out ;
        DESCRIPTION;
      Freight Record Worksheet Output.
      This output consists of a hard copy worksheet of the incomplete
      FreightAdrs record.  Worksheets will mirror the Build/Maintain screens.
       ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Hardcopy' ;
        GENERATED:      BY Print-Frt-Rec-Wksht ;
        RECEIVED:       BY System-Manager ;
        RECEIVED:       BY System-Operator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

```
22   DEFINE OUTPUT                              FreightAdrs-Display-Info-Out ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
       GENERATED:      BY Maintain-FreightAdrs ;
       GENERATED:      BY Freight-Inquiry ;
       RECEIVED:       BY System-Operator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

23   DEFINE OUTPUT                              FreightAdrs-Info-Out ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
       RECEIVED:       BY Printer ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

24   DEFINE OUTPUT                              Holiday-Info-Out ;
       DESCRIPTION;
   Holiday Information Output.
   This output consists of the screen(s) display and/or a hard copy
   printout of the Holiday record(s).
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal/Hardcopy' ;
       GENERATED:      BY Build/Maintain-Holiday-Tbl ;
       RECEIVED:       BY System-Administrator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

25   DEFINE OUTPUT                              Incomplete-Record-wksht-Out ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
       RECEIVED:       BY System-Operator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

```
26   DEFINE OUTPUT                              LMF-Info-Out ;
       DESCRIPTION;
     Language Media Format Information Output.
     This output consists of the screen(s) display and/or a hard copy
     printout of the LMF record(s).
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal/Hardcopy' ;
        GENERATED:      BY Build/Maintain-LMF-Tbl ;
        RECEIVED:       BY System-Administrator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

27   DEFINE OUTPUT                              MACOM-Info-Out ;
       DESCRIPTION;
     Major Command Information Output.
     This output consists of the screen(s) display and/or a hard copy
     printout of the MACOM record(s).
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal/Hardcopy' ;
        GENERATED:      BY Build/Maintain-MACOM-Tbl ;
        RECEIVED:       BY System-Administrator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

28   DEFINE OUTPUT                              MCEType-Info-Out ;
       DESCRIPTION;
     Movement Control Element Type Information Output.
     This output consists of the screen(s) display and/or a hard copy
     printout of the MCEType record(s).
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal/Hardcopy' ;
        GENERATED:      BY Build/Maintain-MCEType-Tbl ;
        RECEIVED:       BY System-Administrator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

```
29   DEFINE OUTPUT                              MMCUnique-Info-Out ;
       DESCRIPTION;
     Materiel Management Center Unique Information Output.
     This output consists of the screen(s) display and/or a hard copy
     printout of the MMCUnique record(s).
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal/Hardcopy' ;
        GENERATED:      BY Build/Maintain-MMCUnique-Tbl ;
        RECEIVED:       BY System-Administrator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

30   DEFINE OUTPUT                              MovConElm-Info-Out ;
       DESCRIPTION;
     Movement Control Element Record Output.
     This output consists of the screen(s) display and/or a hard copy
     printout of the MovConElm record(s).
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal/Hardcopy' ;
        GENERATED:      BY Build/Maintain-MovConElm-Tbl ;
        RECEIVED:       BY System-Administrator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

31 DEFINE OUTPUT POC-Error-Info-Out ;
DESCRIPTION;
Display Point of Contact Error Information
This output is a screen display of the ShipToAAC which were not found in the Freight Address File when the Ship-to-POC-Inp was processed.
;
KEYWORD IS: 'TMAS' ,
'LOB' ;
GENERATED: BY Update-Ship-to-POC-Info ;
LAYOUT;

SHIP TO AAC ERROR INFORMATION

The following Ship to AAC could not be processed and the associated information could not be posted:

Error Msg DIC ShipToAAC POC MilTelNo CivTelNo BASATel
;
CONSISTS OF:
ShipToAAC ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

32 DEFINE OUTPUT Port-Display-Info-Out ;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
GENERATED: BY Build/Maintain-Port-Tbl ;
RECEIVED: BY System-Administrator ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

33 DEFINE OUTPUT Port-Record-Out ;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
GENERATED: BY Build/Maintain-Port-Tbl ;
RECEIVED: BY System-Administrator ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

```
34   DEFINE OUTPUT                              PortType-Display-Info-Out ;
       DESCRIPTION;
     Port Type Display Information Output.
     This output consists of the screen(s) displaying the PortType
     record(s).
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal' ;
        GENERATED:      BY Build/Maintain-PortType-Tbl ;
        RECEIVED:       BY System-Operator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

35   DEFINE OUTPUT                              PortType-Info-Out ;
       KEYWORD IS:      'TMAS' ,
                        'LOB' ,
                        'TACCS' ;
       GENERATED:       BY Build/Maintain-PortType-Tbl ;
       RECEIVED:        BY System-Administrator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

36   DEFINE OUTPUT                              PortType-Record-Out ;
       DESCRIPTION;
     Port Type Record Output.
     This output consists of a hard copy printout of the PortType record(s).
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Hardcopy' ;
        GENERATED:      BY Build/Maintain-PortType-Tbl ;
        RECEIVED:       BY System-Operator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

37   DEFINE OUTPUT                              Print-Error-Analysis-Rept-Out ;
       KEYWORD IS:      'TMAS' ,
                        'LOB' ,
                        'TACCS' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

```
38   DEFINE OUTPUT                                  Print-Ship-to-POC-Error-Rept ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

39   DEFINE OUTPUT                                  Print-Sys-Unique-Tbl-Rept-Out ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

40   DEFINE OUTPUT                                  RemarkLine-Info-Out ;
       DESCRIPTION;
   Remark Line Information Output
   This output consists of screens displaying the RemarkLine record,
   error messages, or help information and/or a hard copy printout of
   screen viewed.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal/Hardcopy' ;
       GENERATED:      BY Build/Maintain-RemarkLine ;
       RECEIVED:       by System Administrator ,
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

41   DEFINE OUTPUT                                  Ship-to-DODAAC-Dsply-Info-Out ;
       DESCRIPTION;
   Ship to Department of Defense Activity Address Code Display Information
   Output.
   This output consists of a screen(s) displaying a listing of activities,
   by DODAAC, that have the same Ship-to-DODAAC.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal' ;
       RECEIVED:       BY System-Operator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

```
42   DEFINE OUTPUT                              Ship-to-DODAAC-Info-Out ;
       DESCRIPTION;
     Ship to Department of Defense Activity Address Code Information Output.
     This output consists of a hard copy printout of the referenced
     activities by the DODAAC.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Hardcopy' ;
        RECEIVED:       BY System-Operator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

43   DEFINE OUTPUT                              System-Unique-Table-Rept-Out ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ,
                        'TACCS' ;
        GENERATED:      BY Create-System-Unique-Tbl-Rept ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

44 DEFINE OUTPUT TMAF-Record-Out ;
.DESCRIPTION;
Transportation Movements Address File Record Output.
This output consists of a display listing of the TMAF records to be printed, a listing of the TMAF records not found and the command options necessary to print the report or abort the print.

This output consists of a hard copy printout of selected TMAF records in the following format:

DODAAC:
Unit Designation:

;

KEYWORD IS: 'TMAS' ,
'LOB' ;
ATTRIBUTE IS:
MEDIA 'Terminal' ;
GENERATED: BY Print-Selected-TMAF-Records ;
RECEIVED: BY Customer ;
RECEIVED: BY System-Administrator ;
RECEIVED: BY System-Manager ;
RECEIVED: BY System-Operator ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

45 DEFINE OUTPUT TT7/TT8-Change-Trns-Info-Out ;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
GENERATED: BY Create-CMM-Mass-Update-File ;
RECEIVED: BY System-Operator ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

46 DEFINE OUTPUT TT7/TT8-Transactions-Info-Out ;
KEYWORD IS: 'TMAS' ,
'LOB' ;
GENERATED: BY Prep-CMM-Out-Changes ;
RECEIVED: BY CMM ;
COLLECTED: IN CMM-Transactions-Seq-File ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

```
47   DEFINE OUTPUT                                  TTPUnique-Info-Out ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
       GENERATED:      BY Build/Maintain-TTPUnique-Tbl ;
       RECEIVED:       BY System-Administrator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

48   DEFINE OUTPUT                                  UIC-Display-Info-Out ;
       DESCRIPTION;
     Unit Identification Code Display Information Output.
     This output consists of a screen displaying the DODAACs with the
     value of the input UIC.
      ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Terminal' ;
       RECEIVED:       BY System-Operator ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

49   DEFINE OUTPUT                                  UIC-Info-Out ;
       DESCRIPTION;
     Unit Identification Code Information Output.
     This output consists of a hard copy printout of the screens.
      ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ;
       ATTRIBUTE IS:
            MEDIA           'Hardcopy' ;
       RECEIVED:       BY Customer ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

```
50   DEFINE OUTPUT                              Unit-Dsg-Display-Info-Out ;
       DESCRIPTION;
     Unit Designation Display Information Output.
     This output consists of a screen listing all of the DODAACs with
     the same unit designation.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Terminal' ;
        RECEIVED:       BY System-Operator ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

51   DEFINE OUTPUT                              Unit-Dsg-Info-Out ;
       DESCRIPTION;
     Unit Designation Information Output.
     This output consists of a hard copy printout of any of the screens.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ;
        ATTRIBUTE IS:
             MEDIA           'Hardcopy' ;
        RECEIVED:       BY Customer ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;

     EOF EOF EOF EOF EOF
```

PARAGRAPH	ENTITY OBJECTS	PAGE
1	Activity	III-1775
2	Activity-CMM-Info	III-1778
3	Activity-Record-Info	III-1779
4	AddressCat	III-1780
5	BBPUnique	III-1782
6	BFSN-Info	III-1783
7	BillingAdrs	III-1784
8	Blank-Frt/Actv-Wksht-Info	III-1786
9	CMM-Hold-File-Info	III-1786
10	Cgo-MCE-Trns	III-1787
11	Cgo-Port-Trns	III-1789
12	CgoActivity-Contact-Trns-Info	III-1790
13	CgoAddress-Contact-Trns-Info	III-1791
14	City	III-1793
15	CityGroup	III-1795
16	Country	III-1797
17	DSSALOC	III-1799
18	ETAFcstLvl	III-1801
19	FreightAdrs	III-1803
20	FreightAdrs-CMM-Info	III-1807
21	FreightAdrs-Record-Info	III-1808
22	Holiday	III-1809
23	LMF	III-1811
24	MACOM	III-1813
25	MCEType	III-1815
26	MMCUnique	III-1817
27	MovConElm	III-1819
28	MovConElm-Record-Info	III-1821
29	Parameter	III-1822
30	Port	III-1824
31	Port-Record-Info	III-1826
32	PortType	III-1827
33	RemarkLine	III-1829
34	Ship-to-POC-Info	III-1830
35	TMAF-Edit-Criteria	III-1831
36	TMAF-Info	III-1831
37	TMAS-System-Parameter-Record	III-1832
38	TT7/TT8-CMM-Trns-Info	III-1833
39	TTPUnique	III-1835



```
1    DEFINE ENTITY                                  Activity ;
       DESCRIPTION;
Activity.
This entity consists of mailing address information, PSP
Point-of-Contact information, and other related data for
every Activity Address Code in the system.
 ;
    KEYWORD IS:      'TMAS' ,
                     'LOB' ,
                     'Data Model' ;
    SEE MEMO:
         FCityCd-Memo ;
    SOURCE IS:       'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         volatility       'DYNAMIC' ,
         RETENTION        'PERMANENT' ,
         PICTURE          'X(371)' ,
         FIELD-LENGTH      '371' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         TYPE             'AN' ;
    LAYOUT;
```



DATA MODEL:

Activity:BillingAdrs, Opt Many:Mand1
Activity:Country, Opt Many:Opt1
Activity:FreightAdrs, Opt Many:Mand1 (Optional if ShipToAAC equals AACCurr, on screen)
Activity:BBPUnique, Mand1:Opt Many
Activity:MovConElm, Mand1:Opt Many (AACMCE)
Activity:MovConElm, Mand1:Opt Many (AACBnMC/CMCC)
Activity:MMCUnique, Mand1:Opt Many
Activity:MACOM, Opt Many:Mand1
Activity:RemarkLine, Mand1:Opt Many
Activity:DSSALOC, Opt Many:Opt1

LOGICAL DATABASE DESIGN:

AACCurr	6	P
AACXRef	6	S
UICCurr	6	S
MUDsg	35	S
DteRecFrLSSA	5	S
DteToLSSA	5	S
UICCurr	6	
TMAFDteLstUpd	5	
MUDsgCont	35	
MStPOBox	25	



MBldgNo	10	
MAttn	20	
MPostCd	6	
MCityRgn	25	
MAPO1st5	5	
MAPOLst4	4	
MDteLstUpd	5	
EffDte	5	
ContrNo	20	
ContrStart	5	
ContrEnd	5	
PSPPOC	25	
PSPMilTel	15	
PSPCivTel	25	
CMMIndicrCd	1	
TELEX	20	
DDNUserID	12	
DDNHostCd	12	
MACOMCd	3	F
ShipToAAC	6	F
BFSN	5	F
DSSALOCCd	1	F
MCntry	2	F

PARTITION:

Activity	CRUD
BillingAdrs	R
MACOM	R
Country	R
DSSALOC	R
RemarkLine	CRUD
BBPUnique	R
MMCUnique	R
MovConElm	R
FreightAdrs	CRD
ETAFcstLvl	R
Country	R
Port	R
TTPUnique	R
AddressCat	R
Holiday	R
LMF	R
CityGroup	R
City	R;

COLLECTED: IN Activity-File ;
CONSISTS OF:
AACCurr ,

```
        AACXRef ,
        UICCurr ,
        MUDsg ,
        UICOld ,
        TMAFDteLstUpd ,
        MUDsgCont ,
        MStPOBox ,
        MBldgNo ,
        MAttn ,
        MPostCd ,
        MCityRgn ,
        MAPO1st5 ,
        MAPOLst4 ,
        MDteLstUpd ,
        EffDte ,
        ContrNo ,
        ContrStat ,
        ContrEnd ,
        PSPPOC ,
        PSPPhoneNo ,
        PSPCivTel ,
        CMMIndicrCd ,
        TELEX ,
        DDNUserId ,
        DDNHostCd ,
        MACOMCd ,
        ShipToAAC ,
        BFSN ,
        DSSALOCCd ,
        MCntry ;
IDENTIFIED BY:
        AACCurr ;
ADDED:
        TO              Activity-File
        BY              Build/Maintain-Activity ;
MODIFIED:
        IN              Activity-File
        BY              Build/Maintain-Activity ;
MODIFIED:
        IN              Activity-File
        BY              Build/Maintain-BillingAdrs ;
REFERENCED:
        IN              Activity-File
        BY              Activity-Inquiry ;
REFERENCED:
        IN              Activity-File
        BY              Build/Maintain-Activity ;
REFERENCED:
        IN              Activity-File
```

```
        BY              Build/Maintain-RemarkLine ;
    REFERENCED:
        IN              Activity-File
        BY              Create-Error-Analysis-Report ;
    REFERENCED:
        IN              Activity-File
        BY              Maintain-FreightAdrs ;
    REFERENCED:
        IN              Activity-File
        BY              Print-Actv-Rec-Wksht ;
    REFERENCED:
        IN              Activity-File
        BY              Freight-Inquiry ;
    REFERENCED:
        IN              Activity-File
        BY              Create-Contact-Files ;
    REFERENCED:
        IN              Activity-File
        BY              Create-CMM-Mass-Update-File ;
    REFERENCED:
        IN              Activity-File
        BY              Print-Selected-TMAF-Records ;
    REMOVED:
        FROM            Activity-File
        BY              Build/Maintain-Activity ;
    DESTROYED:      BY Build/Maintain-Activity ;
    CARDINALITY IS:
                    10000 ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;

2   DEFINE ENTITY                           Activity-CMM-Info ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    COLLECTED:      IN Activity-File ;
    ADDED:
        TO              CMM-Adrs-Mass-Update-Hold-File
        BY              Create-CMM-Mass-Update-File ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

```
3    DEFINE ENTITY                          Activity-Record-Info ;
       DESCRIPTION;
    Activity Records Information
    This entity is a flow of selected data elements from the Activity
    File to the Create Contact Files process and from the process to
    the Create Contact Transactions Hold File.
     ;
       KEYWORD IS:      'TMAS' ,
                        'LOB' ,
                        'TACCS' ;
       COLLECTED:       IN Activity-File ;
       COLLECTED:       IN Create-Contact-Trns-Hold-File ;
       CONSISTS OF:
            AACCurr ,
            DDNHostCd ,
            DDNUserId ,
            DSSALOCCd ,
            MAttn ,
            MAPO1st5 ,
            MAPOLst4 ,
            MBldgNo ,
            MCityRgn ,
            MCntry ,
            MPostCd ,
            MStPOBox ,
            MUDsg ,
            MUDsgCont ,
            ShipToAAC ,
            TELEX ;
       ADDED:
             TO              Create-Contact-Trns-Hold-File
             BY              Create-Contact-Files ;
       REMOVED:
             FROM            Create-Contact-Trns-Hold-File
             BY              Set-Up-Contact-Files ;
       DESTROYED:       BY Set-Up-Contact-Files ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

```
4    DEFINE ENTITY                              AddressCat ;
       DESCRIPTION;
   Address Category.
   This entity consists of ADCAT codes and their descriptions.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'Data Model' ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            volatility      'STATIC' ,
            SEC-CLASS       'UNCLASSIFIED' .
            TYPE            'AN' ,
            PICTURE         'X(62)' ,
            FIELD-LENGTH     '62' ;
       LAYOUT;

   DATA MODEL:

        AddressCat:FreightAdrs, Mand1:Opt M...

   LOGICAL DATABASE DESIGN:

        ADCATCd                              2    P
        ADCATCdDescr                        60

   PARTITION:

        AddressCat                           CRUD
        FreightAdrs                          RU;
       COLLECTED:      IN AddressCat-Tbl :
       CONSISTS OF:
            ADCATCd ,
            ADCATCdDescr ;
       IDENTIFIED BY:
            ADCATCd ;
       ADDED:
             TO              AddressCat-Tbl
             BY              Build/Maintain-AddressCat-Tbl ;
       MODIFIED:
             IN              AddressCat-Tbl
             BY              Build/Maintain-AddressCat-Tbl ;
       REFERENCED:
             IN              AddressCat-Tbl
             BY              P...-AddressCat-Tbl ;
       REFERENCED:
             IN              AddressCat-Tbl
```

```
      BY              Create-System-Unique-Tbl-Rept ;
REFERENCED:
      IN              AddressCat-Tbl
      BY              Maintain-FreightAdrs ;
REFERENCED:
      IN              AddressCat-Tbl
      BY              Freight-Inquiry ;
REMOVED:
      FROM            AddressCat-Tbl
      BY              Build/Maintain-AddressCat-Tbl ;
DESTROYED:      BY Build/Maintain-AddressCat-Tbl ;
CARDINALITY IS:
                30 ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB TMAS GROUP' ;
```

```
5    DEFINE ENTITY                              BBPUnique ;
       DESCRIPTION;
   Breakbulk Point Unique.
   This entity consists of Breakbulk Point DODAAC and their unit
   designation.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'Data Model' ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            volatility      'STATIC' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            PICTURE         'X(41)' ,
            FIELD-LENGTH     '41' ,
            TYPE            'AN' ;
       LAYOUT;

   DATA MODEL:

        BBPUnique:FreightAdrs, Opt1:Opt Many
        BBPUnique:Activity, Opt Many:Mand1


   LOGICAL DATABASE DESIGN:
        AACBBP                                  6     P/F
        AACBBPDescr                            35


   PARTITION:

        BBPUnique                               CRUD
        FreightAdrs                             RU
        Activity                                R;
       COLLECTED:      IN BBPUnique-Tbl ;
       CONSISTS OF:
            AACBBP ,
            AACBBPDescr ;
       IDENTIFIED BY:
            AACBBP ;
       ADDED:
             TO              BBPUnique-Tbl
             BY              Build/Maintain-BBPUnique-Tbl ;
       MODIFIED:
             IN              BBPUnique-Tbl
             BY              Build/Maintain-BBPUnique-Tbl ;
       REFERENCED:
             IN              BBPUnique-Tbl
             BY              Build/Maintain-BBPUnique-Tbl ;
```

REFERENCED:
IN BBPUnique-Tbl
BY Create-System-Unique-Tbl-Rept ;
REFERENCED:
IN BBPUnique-Tbl
BY Maintain-FreightAdrs ;
REFERENCED:
IN BBPUnique-Tbl
BY Freight-Inquiry ;
REMOVED:
FROM BBPUnique-Tbl
BY Build/Maintain-BBPUnique-Tbl ;
DESTROYED: BY Build/Maintain-BBPUnique-Tbl ;
RESPONSIBLE PROBLEM DEFINER IS:
'TACCS-LOB TMAS GROUP' ;

6 DEFINE ENTITY BFSN-Info ;
DESCRIPTION;
Billing Fiscal Station Number Information.
This entity consists of Fiscal Station Number information and AACCurr used for renaming BFSN values in the Activity-File.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
COLLECTED: IN Activity-File ;
MODIFIED:
IN Activity-File
BY Build/Maintain-BillingAdrs ;
REFERENCED:
IN Activity-File
BY Build/Maintain-BillingAdrs ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

```
7    DEFINE ENTITY                              BillingAdrs ;
       DESCRIPTION;
     Billing Address
     This entity consists of the fiscal station number, unit designation, and
     address information of organizations responsible for administering the
     billing function.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ,
                        'Data Model' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             volatility      'DYNAMIC' ,
             TYPE            'AN' ,
             PICTURE         'X(142)' ,
             FIELD-LENGTH     '142' ,
             SEC-CLASS       'UNCLASSIFIED' ;
        LAYOUT;

     DATA MODEL:

          BillingAdrs:Country, Opt Many:Opt1
          BillingAdrs:Activity, Mand1:Opt Many


     LOGICAL DATABASE DESIGN:

          BFSN                                  5     P
          BUDsg                                35     S
          BStPOBox                             25
          BBldgNo                              10
          BAttn                                20
          BPostCd                               6
          BCityRgn                             25
          BAPO1st5                              5
          BAPOLst4                              4
          BDteLstUpd                            5
          BCntry                                2     F


     PARTITION:
          BillingAdrs                          CRUD
          Activity                             RU
          Country                              R;
        COLLECTED:      IN BillingAdrs-File ;
        CONSISTS OF:
             BFSN ,
             BUDsg ,
             BStPOBox ,
```

```
      BBldgNo ,
      BAttn ,
      BPostCd ,
      BCityRgn ,
      BAPO1st5 ,
      BAPOLst4 ,
      BDteLstUpd ,
      BCntry ;
IDENTIFIED BY:
      BFSN ;
ADDED:
      TO              BillingAdrs-File
      BY              Build/Maintain-BillingAdrs ;
MODIFIED:
      IN              BillingAdrs-File
      BY              Build/Maintain-BillingAdrs ;
REFERENCED:
      IN              BillingAdrs-File
      BY              Build/Maintain-Activity ;
REFERENCED:
      IN              BillingAdrs-File
      BY              Build/Maintain-BillingAdrs ;
REFERENCED:
      IN              BillingAdrs-File
      BY              Print-BillingAdrs-Report ;
REFERENCED:
      IN              BillingAdrs-File
      BY              Freight-Inquiry ;
REFERENCED:
      IN              BillingAdrs-File
      BY              Activity-Inquiry ;
REMOVED:
      FROM            BillingAdrs-File
      BY              Build/Maintain-BillingAdrs ;
DESTROYED:     BY Build/Maintain-BillingAdrs ;
CARDINALITY IS:
               31 ;
RESPONSIBLE PROBLEM DEFINER IS:
               'TACCS-LOB TMAS GROUP' ;
```

```
8    DEFINE ENTITY                                  Blank-Frt/Actv-Wksht-Info ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
       COLLECTED:      IN Blank-Frt/Actv-Wksht-Hold-File ;
       REFERENCED:
             IN              Blank-Frt/Actv-Wksht-Hold-File
             BY              Print-Blank-Frt/Actv-Wksht ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;

9    DEFINE ENTITY                                  CMM-Hold-File-Info ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
       COLLECTED:      IN CMM-Transactions-Hold-File ;
       REFERENCED:
             IN              CMM-Transactions-Hold-File
             BY              Prep-CMM-Out-Changes ;
       REMOVED:
             FROM            CMM-Transactions-Hold-File
             BY              Prep-CMM-Out-Changes ;
       DESTROYED:      BY Prep-CMM-Out-Changes ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

10 DEFINE ENTITY Cgo-MCE-Trns ;
DESCRIPTION;
Cargo MCE Transaction
This entity is a formatted transaction that is used to provide the data to add, change or delete information contained in the MCT's Contact File, i.e. CgoMCE. It remains on file until transmitted.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
SOURCE IS: 'TMAS DATA MODEL' ;
ATTRIBUTE IS:
volatility 'DYNAMIC' ,
TYPE 'AN' ,
PICTURE 'X(50)' ,
FIELD-LENGTH '50' ,
SEC-CLASS 'UNCLASSIFIED' ;
LAYOUT;

CARGO MCE TRANSACTION

DATA ELEMENT	CC	NOTE
DIC	1-3	CTA = Add CTC = Cng CTD = Del
Tbl Name	4-14	
MCEType	15	
MCEPrefix	16	
MCESuffix	17	
Filler	18-23	
BnAAC	24-29	
Description	30-89	

;
COLLECTED: IN Contact-Transactions-Hold-File ;
CONSISTS OF:
MCETyCd ,
MCEPrefix ,
MCESuffix ,
MCENme ,
AACBnMCCMCC ,
AACMCE ;
ADDED:
TO Contact-Transactions-Hold-File
BY Build-Maintain-MovConElm-Tbl ;
REMOVED:
FROM Contact-Transactions-Hold-File

```
       BY              Prep-Contact-Out-Changes ;
DESTROYED:      BY Build/Maintain-MovConElm-Tbl ;
DESTROYED:      BY Prep-Contact-Out-Changes ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TMAS Team' ;
```

11 DEFINE ENTITY Cgo-Port-Trns ;
DESCRIPTION;
Cargo Port Transaction
This entity is a formatted transaction that is used to provide the **data to add, change or delete information contained in the MCT's** Cargo Port Table (CgoPort). It remains on file until transmitted.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
SOURCE IS: 'TMAS DATA MODEL' ;
ATTRIBUTE IS:
volatility 'DYNAMIC' ,
TYPE 'AN' ,
SEC-CLASS 'UNCLASSIFIED' ,
PICTURE 'X(29)' ,
FIELD-LENGTH '29' ;
LAYOUT;

CARGO PORT TRANSACTION

DATA ELEMENT	CC	NOTE
DIC	1-3	CTA = Add CTC = Chg CTD = Del
Tbl Name	4-14	
PrtCd	15-17	
PrtTyCd	18	
Filler	19-29	
Description	30-89	

;
COLLECTED: IN Contact-Transactions-Hold-File ;
CONSISTS OF:
PrtTyCd ,
PrtCd ,
PrtNme ;
ADDED:
TO Contact-Transactions-Hold-File
BY Build/Maintain-Port-Tbl ;
REMOVED:
FROM Contact-Transactions-Hold-File
BY Prep-Contact-Out-Changes ;
DESTROYED: BY Prep-Contact-Out-Changes ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS T[illegible]' ;

```
12   DEFINE ENTITY                          CgoActivity-Contact-Trns-Info ;
       DESCRIPTION;
   Cargo Activity Contact Transactions Information
   This entity will be created for each occurrence of an Activity File or
   Freight Address File add, modify, delete or rename (Activity File only)
   transaction that justifies a Contact Transactions Hold File update.
   This formatted data is stored in the Contact Transactions Hold File by
   either Build/Maintain Activity or the Maintain Freight Address process.
   On command, the Prep-Contact-Out-Changes process retrieves and converts
   the transactions stored in the Contact Transactions Hold File from ISAM
   to sequential configuration.  The sequential transactions are stored
   in the Contact Transactions Sequential Hold File.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
       COLLECTED:      IN Contact-Transactions-Hold-File ;
       CONSISTS OF:
            DIC ,
            AACXRef ,
            ShipToAAC ,
            DSSALOCCd ,
            TELEX ,
            DDNUserId ,
            DDNHostCd ,
            MAPOLst4 ,
            MAPO1st5 ,
            MUDsgCont ,
            MAttn ,
            MCityRgn ,
            MPostCd ,
            MStPOBox ,
            MUDsg ,
            MCntry ,
            MBldgNo ,
            AACCurr ,
            CH-CD ;
       ADDED:
             TO              Contact-Transactions-Hold-File
             BY              Build/Maintain-Activity ;
       ADDED:
             TO              Contact-Transactions-Hold-File
             BY              Maintain-FreightAdrs ;
       REMOVED:
             FROM            Contact-Transactions-Hold-File
             BY              Prep-Contact-Out-Changes ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

13 DEFINE ENTITY CgoAddress-Contact-Trns-Info ;
DESCRIPTION;
Cargo Address Contact Transactions Information
This entity will be created for each occurrence of an Activity File or Freight Address File add, modify, delete or rename (Activity File only) transaction that justifies a Contact Transactions Hold File update. This formatted data is stored in the Contact Transactions Hold File by either Build/Maintain Activity or the Maintain Freight Address process. On command, the Prep-Contact-Out-Changes process retrieves and converts the transactions stored in the Contact Transactions Hold File from ISAM to sequential configuration. The sequential transactions are stored in the Contact Transactions Sequential Hold File.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
COLLECTED: IN Contact-Transactions-Hold-File ;
CONSISTS OF:
DIC ,
ShipToAAC ,
FSt ,
FBldgNo ,
FBrnchSrn ,
FCityCd ,
FCityRgnLst20 ,
FCntry ,
FPostCd ,
FAttn ,
FAPO1st5 ,
FAPOLst4 ,
FUDsgCont ,
FUDsg ,
CityGpCd ,
TTPCd ,
TcrTml ,
MCEPrefix ,
MCESuffix ,
AACXRef ,
CH-CD ;
ADDED:
TO Contact-Transactions-Hold-File
BY Build/Maintain-Activity ;
ADDED:
TO Contact-Transactions-Hold-File
BY Maintain-FreightAdrs ;
REMOVED:
FROM Contact-Transactions-Hold-File
BY Prep-Contact-Out-Changes ;
DESTROYED: BY Prep-Contact-Out-Changes ;

RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

14 DEFINE ENTITY City ;
DESCRIPTION;
City.
This entity consists of city names and their associated city group codes.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'Data Model' ;
SOURCE IS: 'TMAS DATA MODEL' ;
ATTRIBUTE IS:
volatility 'STATIC' ,
TYPE 'AN' ,
PICTURE 'X(27)' ,
FIELD-LENGTH '27' ,
SEC-CLASS 'UNCLASSIFIED' ;
LAYOUT;

DATA MODEL:

City:CityGroup, Mand Many:Mand1 (Help function only)

LOGICAL DATABASE DESIGN:

CityNme	25	P/S
CityGpCd	2	P/F

PARTITION:

City	CRUD
CityGroup	R;

COLLECTED: IN City-Tbl ;
CONSISTS OF:
CityNme ,
CityGpCd ;
IDENTIFIED BY:
CityNme ,
CityGpCd ;
ADDED:
TO City-Tbl
BY Build/Maintain-City-Tbl ;
MODIFIED:
IN City-Tbl
BY Build/Maintain-City-Tbl ;
DELETED:
IN City-Tbl
BY Build/Maintain-CityGroup-Tbl ;

REFERENCED:
IN City-Tbl
BY Build/Maintain City-Tbl ;
REFERENCED:
IN City-Tbl
BY Build/Maintain [illegible]GroupTbl ;
REFERENCED:
IN [illegible]y-Tbl
BY Create-System-Unique-[illegible] ;
REMOVED:
FROM City-Tbl
BY [illegible] ;
DESTROYED: BY Build/Maintain-City-Tbl ;
RESPONSIBLE PROBLEM DEFINER IS:
'TACCS-LOB-[illegible]

15 DEFINE ENTITY [illegible] ;
DESCRIPTION;
CityGroup.
This entity consists of City Group Codes and their associated City Group Names.
;
KEYWORD IS 'TMAS' ,
'Data Model' ,
SOURCE [illegible] 'TMAS DATA MODEL' ,
ATTRIBUTE IS
[illegible] 'STAT' ,
TYPE 'AN' ,
PICTURE 'X(2)' ,
[illegible] 'CT' ,
[illegible] CLASS 'UNCLASSIFIED'
LAST ;

DATA MODEL

[illegible] Mand1:Mand Mar, (Help function only)
CityGroup-FreightAdrs, Mand1:Opt Mar.

LOGICAL DATABASE DESIGN:

CityGpCd	2	F
CityGpNme	25	S

PARTITION:

CityGroup	CRUD
FreightAdrs	RU
City	CRD;

COLLECTED: IN CityGroup-Tbl ;
CONSISTS OF:
CityGpCd ,
CityGpNme ;
IDENTIFIED BY:
CityGpCd ;
ADDED:
TO CityGroup-Tbl
BY Build/Maintain-CityGroup-Tbl ;
MODIFIED:
IN CityGroup-Tbl
BY Build/Maintain-CityGroup-Tbl ;
REFERENCED:
IN CityGroup-Tbl

```
      BY              Build/Maintain-CityGroup-Tbl ;
REFERENCED:
      IN              CityGroup-Tbl
      BY              Create-System-Unique-Tbl-Rept ;
REFERENCED:
      IN              CityGroup-Tbl
      BY              Maintain-FreightAdrs ;
REFERENCED:
      IN              CityGroup-Tbl
      BY              Freight-Inquiry ;
REMOVED:
      FROM            CityGroup-Tbl
      BY              Build/Maintain-CityGroup-Tbl ;
DESTROYED:      BY Build/Maintain-CityGroup-Tbl ;
CARDINALITY IS:
                42 ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TAC[illegible]-LOB TMAS GROUP' ;
```

16 DEFINE ENTITY Country ;
DESCRIPTION;
Country.
Identifies the country where the freight, billing, and/or mailing address of an activity is located.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'Data Model' ;
SOURCE IS: 'TMAS DATA MODEL' ;
ATTRIBUTE IS:
volatility 'STATIC' ,
RETENTION 'PERMANENT' ,
TYPE 'A' ,
PICTURE 'A(27)' ,
FIELD-LENGTH '27' ,
SEC-CLASS 'UNCLASSIFIED' ;
LAYOUT;

DATA MODEL:

Country:FreightAdrs, Mnd1:Opt Many
Country:Activity, Opt1:Opt Many
Country:BillingAdrs, Opt1:Opt Many

LOGICAL DATABASE DESIGN:

CntryCd	2	P
CntryCdDescr	25	S

PARTITION:

Country	CRUD
Activity	RU
FreightAdrs	RU
BillingAdrs	RU;

COLLECTED: IN Country-Tbl ;
CONSISTS OF:
CntryCd ,
CntryCdDescr ;
IDENTIFIED BY:
CntryCd ;
ADDED:
TO Country-Tbl
BY Build/Maintain-Country-Tbl ;
MODIFIED:
IN Country-Tbl

```
      BY              Build/Maintain-Country-Tbl ;
REFERENCED:
      IN              Country-Tbl
      BY              Build/Maintain-Activity ;
REFERENCED:
      IN              Country-Tbl
      BY              Build/Maintain-BillingAdrs ;
REFERENCED:
      IN              Country-Tbl
      BY              Build/Maintain-Country-Tbl ;
REFERENCED:
      IN              Country-Tbl
      BY              Create-System-Unique-Tbl-Rept ;
REFERENCED:
      IN              Country-Tbl
      BY              Maintain-FreightAdrs ;
REFERENCED:
      IN              Country-Tbl
      BY              Freight-Inquiry ;
REFERENCED:
      IN              Country-Tbl
      BY              Activity-Inquiry ;
REMOVED:
      FROM            Country-Tbl
      BY              Build/Maintain-Country-Tbl ;
DESTROYED:      BY Build/Maintain-Country-Tbl ;
CARDINALITY IS:
                134 ;
RESPONSIBLE [illegible] DEFINER IS:
                'TACCS-LOB TMAS GROUP' ;
```

17 DEFINE ENTITY DSSAL .
DESCRIPTION;
Direct Supply Support/Air Line of Communication.
Identifies whether an activity is or is not an authorized DSS or ACOC customer.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'Data Model' ;
SOURCE IS: 'TMAS DATA MODEL' ,
ATTRIBUTE IS:
volatility 'STATI' ,
TYPE 'AN' ,
FIELD-LENGTH '61' ,
PICTURE 'X(61)' ,
SEC CLA 'UNCLASSIFIED' ;
LAYOUT;

DATA MODEL:

DSSAL , Activity, DSS Asset Many

LOGICAL DESIGN:

DSSALOCCd
DSSALOCDescr 60

PARTITION:

DSSALOC CRUD
Activity RU;
COLLECTED: IN DSSALOC-Tbl
CONSISTS OF:
DSSALOCCd ,
DSSALOCCdDescr ;
IDENTIFIED BY:
DSSALOCCd ;
ADDED:
TO DSSALOC-Tbl
BY Build/Maintain-DSSALOC-Tbl ;
MODIFIED:
IN DSSALOC-Tbl
BY Build/Maintain-DSSALOC-Tbl ;
REFERENCED:
IN DSSALOC-Tbl
BY Build/Maintain-Activity ;
REFERENCED:

```
        IN              DSSALOC Tbl
        BY              Build/Maintain-DSSALOC-Tbl ;
REFERENCED:
        IN              DSSALOC-Tbl
        BY              Create-System-Unique-Tbl-Rept ;
REFERENCED:
        IN              DSSALOC-Tbl
        BY              Activity-Inquiry ;
REMOVED:
                        DSSALOC Tbl
        BY              Build/Maintain-DSSALOC-Tbl ;
IMPROVED:       BY      Build/Maintain DSSALOC-Tbl ;
CARDINALITY IS:
                3 ;
RESPONSIBLE PROBLEM DOMAIN IS:
                'TACCS-LOB TMAS GROUP' ;
```



```
18   DEFINE ENTITY                                    ETAFcstLvl ;
       DESCRIPTION;
     Estimated Time of Arrival Forecast Level.
     Identifies the format of the ETA forecast requested.
      ;
        KEYWORD IS:      'TMAS' ,
                         'LOB' ,
                         'Data Model' ;
        SOURCE IS:       'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             volatility       'STATIC' ,
             TYPE             'AN' ,
             FIELD LENGTH      '61' ,
             PICTURE          'X(61)' ,
             SEC-CLASS        'UNCLASSIFIED' ;
        LAYOUT;

     DATA MODEL:

          ETAFcstLvl:[illegible]  1:Opt Many (Consgn)
          ETAFcstLvl:FreightAdrs Opt 1:Opt Many (BConsgn)
          ETAFcstLvl:[illegible]  1:Opt Many (CMCT)
          ETAFcstLvl:FreightAdrs Opt 1:Opt Many (BMCT)
          ETAFcstLvl:FreightAdrs Opt 1:Opt Many (CMMC1)
          ETAFcstLvl:[illegible]  1:Opt Many (BMMC1)
          ETAFcstLvl:FreightAdrs Opt 1:Opt Many (CMMC2)
          ETAFcstLvl:[illegible]  1:Opt Many (BMMC2)


     LOGICAL DATABASE DESIGN:

          ETAFcstLvlCd                          1     P
          ETAFcstLvlCdDescr                    60


     PARTITION:

          ETAFcstLvl                            CRUD
          FreightAdrs                           RU;
        COLLECTED:      IN ETAFcstLvl-Tbl ;
        CONSISTS OF:
             ETAFcstLvlCd ,
             ETAFcstLvlCdDescr ;
        IDENTIFIED BY:
             ETAFcstLvlCd ;
        ADDED:
              TO              ETAFcstLvl-Tbl
              BY              Build/Maintain-ETAFcstLvl-Tbl ;
        MODIFIED:
```



```
      IN              ETAFcstLvl-Tbl
      BY              Build/Maintain-ETAFcstLvl-Tbl ;
REFERENCED:
      IN              ETAFcstLvl-Tbl
      BY              Build/Maintain-ETAFcstLvl-Tbl ;
REFERENCED:
      IN              ETAFcstLvl-Tbl
      BY              Create-System-Unique-Tbl-Rept ;
REFERENCED:
      IN              ETAFcstLvl-Tbl
      BY              Maintain-FreightAdrs ;
REMOVED:
      FROM            ETAFcstLvl-Tbl
      BY              Build/Maintain-ETAFcstLvl-Tbl ;
DESTROYED:     BY Build/Maintain-ETAFcstLvl-Tbl ;
CARDINALITY IS:
               4 ;
RESPONSIBLE PROBLEM DEFINER IS:
               'TACCS-LOB TMAS GROUP' ;
```

19 DEFINE ENTITY FreightAdrs ;
DESCRIPTION;
Freight Address
This entity consists of location and address information, and transportation management information, relating to organizations that can receive and/or ship cargo.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'Data Model' ;
SOURCE IS: 'TMAS DATA MODEL' ;
ATTRIBUTE IS:
volatility 'DYNAMIC' ,
TYPE 'AN' ,
FIELD-LENGTH '355' ,
PICTURE 'X(355)' ,
SEC-CLASS 'UNCLASSIFIED' ;
LAYOUT;

DATA MODEL:

FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (CCnsgn)
FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (BCnsgn)
FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (CMCT)
FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (BMCT)
FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (CMMC1)
FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (BMMC1)
FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (CMMC2)
FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (BMMC2)
FreightAdrs:CityGroup, Opt Many:Mand1
FreightAdrs:Holiday, Opt Many:Mand1
FreightAdrs:AddressCat, Opt Many:Mand1
FreightAdrs:TTPUnique, Opt Many:Mand1
FreightAdrs:MMCUnique, Opt Many:Opt1 (MMC1)
FreightAdrs:MMCUnique, Opt Many:Opt1 (MMC2)
FreightAdrs:MovConElm, Opt Many:Mand1
FreightAdrs:LMF, Opt Many:Mand1 (LMF1)
FreightAdrs:LMF, Opt Many:Mand1 (LMF2)
FreightAdrs:BBPUnique, Opt Many:Opt1
FreightAdrs:Port, Opt Many:Mand1 (Water)
FreightAdrs:Port, Opt Many:Mand1 (Air)
FreightAdrs:Activity, Mand1:Opt Many (Optional if ShipToAAC equals AACCurr, on screen)
FreightAdrs:Country, Opt Many: Mand1

LOGICAL DATABASE DESIGN:

ShipToAAC 6 P

FUDsg	35	S
FUDsgCont	35	
FSt	25	
FBldgNo	10	
FAttn	20	
FPostCd	6	
FCityRgn	25	
FCityCd	5	
FCityRgnLst20	20	
FBrksKsrn	25	
FAPO1st5	5	
FAPOLst4	4	
FDteLstUpd	5	
RtCd	3	
RtSeqNo	4	
ClusterCd	4	
MINIndic	1	
TrnsSeqNo	2	
TcrTml	7	
ETABCnsgn	1	F
ETACCnsgn	1	F
ETABMCT	1	F
ETACMCT	1	F
ETABMMC1	1	F
ETACMMC1	1	F
ETABMMC2	1	F
ETACMMC2	1	F
AACMMC1	6	F
AACMMC2	6	F
LMF1	2	F
LMF2	2	F
MCECd	2	
MCEPrefix	1	F
MCESuffix	1	F
AACMCE	6	
AACBnMCCMCC	6	
ADCATCd	2	F
TTPCd	1	F
HolAreaCd	1	F
CityGpCd	2	F
APOD	4	F
WPOD	4	F
FCntry	2	F
AACBBP	6	F

PARTITION:

FreightAdrs	RU



```
      ETAPostLvl                                  R
      Country                                     R
      Port                                        R
      IIPUnique                                   R
      BBPUnique                                   R
      LMF                                         R
      AddressCat                                  R
      MMCUnique                                   R
      MovConElm                                   R
      Holiday                                     R
      CityGroup                                   R
          City                                    R;
   COLLECTED:       IN FreightAdrs-File ;
   CONSISTS OF:
          ShipToAAC ,
          FUDsg ,
          FUEmpCont ,
          FSt ,
          FBldgNo ,
          FUnit ,
          FPostCd ,
          FCityCd ,
          FCityRmlst20 ,
          FBrksKsrn ,
          FAPO1st5 ,
          FAPOLst4 ,
          FDteLstUpd ,
          RtCd ,
          RtSeqNo ,
          ClusterCd ,
          MINIndic ,
          TrnsSeqNo ,
          TcrTml ,
          ETABCnsgn ,
          ETACCnsgn ,
          ETABMCT ,
          ETACMCT ,
          ETABMMC1 ,
          ETACMMC1 ,
          ETABMMC2 ,
          ETACMMC2 ,
          AACMMC1 ,
          AACMMC2 ,
          LMF1 ,
          LMF2 ,
          MCEPrefix ,
          MCESuffix ,
          AACMCE ,
          AACBnMCCMCC ,
```







```
      ADCATCd ,
      TTPCd ,
      HolAreaCd ,
      CityGpCd ,
      APOD ,
      WPOD ,
      FCntry ,
      AACBBF ;
IDENTIFIED BY:
      ShipToAAC ;
ADDED:
      TO              FreightAdrs-File
      BY              Maintain-FreightAdrs ;
ADDED:
      TO              FreightAdrs-File
      BY              Build/Maintain-Activity ;
MODIFIED:
      IN              FreightAdrs-File
      BY              Build/Maintain-Activity ;
MODIFIED:
      IN              FreightAdrs-File
      BY              Maintain-FreightAdrs ;
REFERENCED:
      IN              FreightAdrs-File
      BY              Build/Maintain-Activity ;
REFERENCED:
      IN              FreightAdrs-File
      BY              Create-Contact-Files ;
REFERENCED:
      IN              FreightAdrs-File
      BY              Create-Error-Analysis-Report ;
REFERENCED:
      IN              FreightAdrs-File
      BY              Maintain-FreightAdrs ;
REFERENCED:
      IN              FreightAdrs-File
      BY              Print-Frt-Rec-Wksht ;
REFERENCED:
      IN              FreightAdrs-File
      BY              Freight-Inquiry ;
REFERENCED:
      IN              FreightAdrs-File
      BY              Activity-Inquiry ;
REFERENCED:
      IN              FreightAdrs-File
      BY              Create-CMM-Mass-Update-File
REFERENCED:
      IN              FreightAdrs-File
      BY              Print-Selected-TMAF-Rec
```

AD-A190 395 FUNCTIONAL DESCRIPTION FOR THE DEPARTMENT OF THE ARMY MOVEMENTS MANAGEMEN..(U) INTERNATIONAL BUSINESS SERVICES INC PRINCE GEORGE VA DEFENSE S.. W ANCKAITIS

3/10

UNCLASSIFIED 31 DEC 87 DSDPG-375-049-87-3-VOL-3 F/G 12/7 NL

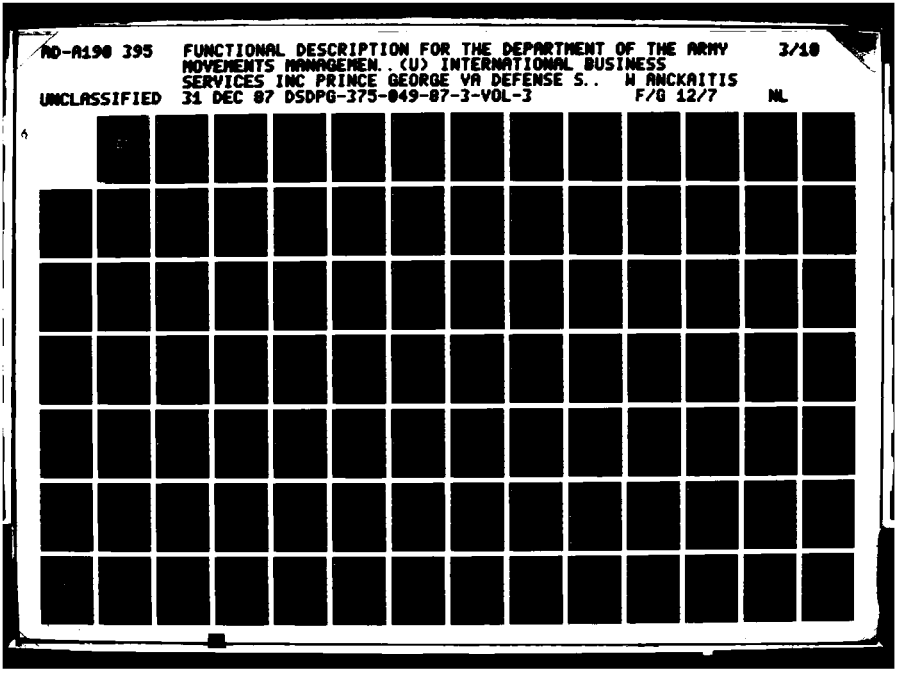

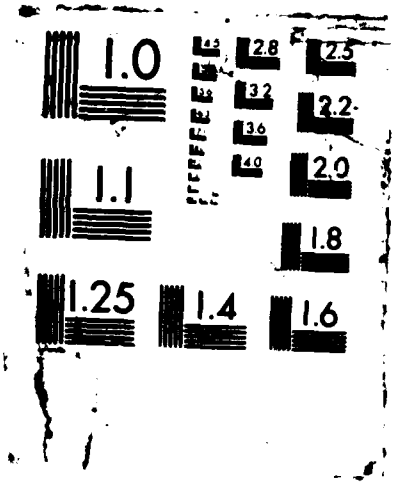
1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0

```
        REMOVED:
              FROM          FreightAdrs-File
              BY            Build/Maintain-Activity ;
        REMOVED:
              FROM          FreightAdrs-File
              BY            Maintain-FreightAdrs ;
        DESTROYED:     BY Build/Maintain-Activity ;
        DESTROYED:     BY Maintain-FreightAdrs ;
        CARDINALITY IS:
                       8000 ;
        RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

20    DEFINE ENTITY                              FreightAdrs-CMM-Info ;
        KEYWORD IS:    'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
        ADDED:
              TO            CMM-Adrs-Mass-Update-Hold-File
              BY            Create-CMM-Mass-Update-File ;
        RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

```
21   DEFINE ENTITY                          FreightAdrs-Record-Info ;
       DESCRIPTION;
   Freight Address Records Information
   This entity is a flow of selected data elements from the
   FreightAdrs File to the Create Contact Files process.
    ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ,
                      'TACCS' ;
      CONSISTS OF:
           BASATel ,
           CityGpCd ,
           FAttn ,
           FAPO1st5 ,
           FAPOLst4 ,
           FBldgNo ,
           FBrksKsrn ,
           FCityCd ,
           FCityRgn ,
           FCntry ,
           FMCTCivTel ,
           FMCTMilTel ,
           FMCTPOC ,
           FPostCd ,
           FSt ,
           FUDsg ,
           FUDsgCont ,
           MCECd ,
           MCEPrefix ,
           MCESuffix ,
           ShipToAAC ,
           TcrTml ,
           TTPCd ;
      ADDED:
            TO              Create-Contact-Trns-Hold-File
            BY              Create-Contact-Files ;
      REMOVED:
            FROM            Create-Contact-Trns-Hold-File
            BY              Set-Up-Contact-Files ;
      DESTROYED:      BY Set-Up-Contact-Files ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TMAS Team' ;
```

```
22   DEFINE ENTITY                              Holiday ;
       DESCRIPTION;
     Holiday.
     Identifies a categorization of holidays by area which may affect
     delivery operations.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ,
                        'Data Model' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             volatility      'STATIC' ,
             RETENTION       'PERMANENT' ,
             TYPE            'AN' ,
             FIELD-LENGTH     '26' ,
             PICTURE         'X(26)' ,
             SEC-CLASS       'UNCLASSIFIED' ;
        LAYOUT;

     DATA MODEL:

          Holiday:FreightAdrs, Mand1:Opt Many


     LOGICAL DATABASE DESIGN:

          HolAreaCd                          1    P
          HolAreaCdDescr                    25


     PARTITION:

          Holiday                            CRUD
          FreightAdrs                        RU;
        COLLECTED:      IN Holiday-Tbl ;
        CONSISTS OF:
             HolAreaCd ,
             HolAreaCdDescr ;
        IDENTIFIED BY:
             HolAreaCd ;
        ADDED:
              TO              Holiday-Tbl
              BY              Build/Maintain-Holiday-Tbl ;
        MODIFIED:
              IN              Holiday-Tbl
              BY              Build/Maintain-Holiday-Tbl ;
        REFERENCED:
              IN              Holiday-Tbl
              BY              Build/Maintain-Holiday-Tbl ;
```

```
REFERENCED:
      IN              Holiday-Tbl
      BY              Create-System-Unique-Tbl-Rept ;
REFERENCED:
      IN              Holiday-Tbl
      BY              Maintain-FreightAdrs ;
REFERENCED:
      IN              Holiday-Tbl
      BY              Freight-Inquiry ;
REMOVED:
      FROM            Holiday-Tbl
      BY              Build/Maintain-Holiday-Tbl ;
DESTROYED:      BY Build/Maintain-Holiday-Tbl ;
CARDINALITY IS:
              14 ;
RESPONSIBLE PROBLEM DEFINER IS:
              'TACCS-LOB TMAS GROUP' ;
```

```
23   DEFINE ENTITY                              LMF ;
       DESCRIPTION;
Language Media Format.
Identifies the type of communication format that a transceiver terminal
has for sending and receiving communication traffic.
 ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ,
                     'Data Model' ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          volatility      'STATIC' ,
          TYPE            'AN' ,
          FIELD-LENGTH     '22' ,
          PICTURE         'X(22)' ,
          SEC-CLASS       'UNCLASSIFIED' ;
     LAYOUT;

DATA MODEL:

     LMF:FreightAdrs, Mand1:Opt Many (LMF1)
     LMF:FreightAdrs, Mand1:Opt Many (LMF2)


LOGICAL DATABASE DESIGN:

     LMFCd                                 2    P
     LMF Descr                            20


PARTITION:

     LMF                                   CRUD
     FreightAdrs                           RU;
     COLLECTED:      IN LMF-Tbl ;
     CONSISTS OF:
          LMFCd ,
          LMFCdDescr ;
     IDENTIFIED BY:
          LMFCd ;
     ADDED:
           TO              LMF-Tbl
           BY              Build/Maintain-LMF-Tbl ;
     MODIFIED:
           IN              LMF-Tbl
           BY              Build/Maintain-LMF-Tbl ;
     REFERENCED:
           IN              LMF-Tbl
           BY              Build/Maintain-LMF-Tbl ;
```

```
REFERENCED:
      IN              LMF-Tbl
      BY              Create-System-Unique-Tbl-Rept ;
REFERENCED:
      IN              LMF-Tbl
      BY              Maintain-FreightAdrs ;
REFERENCED:
      IN              LMF-Tbl
      BY              Freight-Inquiry ;
REMOVED:
      FROM            LMF-Tbl
      BY              Build/Maintain-LMF-Tbl ;
DESTROYED:     BY Build/Maintain-LMF-Tbl ;
CARDINALITY IS:
               4 ;
RESPONSIBLE PROBLEM DEFINER IS:
               'TACCS-LOB TMAS GROUP' ;
```

```
24   DEFINE ENTITY                                    MACOM ;
     DESCRIPTION;
Major Command.
Identifies those organizations viewed to be major command elements
within a theater as determined by the Movement Control Agency (MCA).
 ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ,
                     'Data Model' ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          volatility      'STATIC' ,
          TYPE            'AN' ,
          FIELD-LENGTH     '38' ,
          PICTURE         'X(38)' ,
          SEC-CLASS       'UNCLASSIFIED' ;
     LAYOUT;

DATA MODEL:

      MACOM:Activity, Mand1:Opt Many


LOGICAL DATABASE DESIGN:

     MACOMCd                                    3   P
     MACOMCdDescr                              35   S


PARTITION:

      MACOM                                    CRUD
      Activity                                 RU;
     COLLECTED:      IN MACOM-Tbl ;
     CONSISTS OF:
          MACOMCd ,
          MACOMCdDescr ;
     IDENTIFIED BY:
          MACOMCd ;
     ADDED:
            TO              MACOM-Tbl
            BY              Build/Maintain-MACOM-Tbl ;
     MODIFIED:
            IN              MACOM-Tbl
            BY              Build/Maintain-MACOM-Tbl ;
     REFERENCED:
            IN              MACOM-Tbl
            BY              Build/Maintain-Activity ;
     REFERENCED:
```

```
      IN              MACOM-Tbl
      BY              Build/Maintain-MACOM-Tbl ;
REFERENCED:
      IN              MACOM-Tbl
      BY              Create-System-Unique-Tbl-Rept ;
REFERENCED:
      IN              MACOM-Tbl
      BY              Activity-Inquiry ;
REMOVED:
      FROM            MACOM-Tbl
      BY              Build/Maintain-MACOM-Tbl ;
DESTROYED:      BY Build/Maintain-MACOM-Tbl ;
CARDINALITY IS:
                86 ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB TMAS GROUP' ;
```

25 DEFINE ENTITY MCEType ;
DESCRIPTION;
Movement Control Element Type.
Identifies the type of MCE, i.e. MCT or BMCT, which services the ShipToAAC.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'Data Model' ;
SOURCE IS: 'TMAS DATA MODEL' ;
ATTRIBUTE IS:
volatility 'STATIC' ,
TYPE 'AN' ,
FIELD-LENGTH '31' ,
PICTURE 'X(31)' ,
SEC-CLASS 'UNCLASSIFIED' ;
LAYOUT;

LOGICAL DATABASE DESIGN:

MCETyCd	1	P
MCETyCdDescr	30	

DATA MODEL:

MCEType:MovConElm, Mand1:Opt Many

PARTITION:

MCEType	CRUD
MovConElm	RU

COMMENT: Update MCETyCd in the MovConElm Table if it changes.
;
COLLECTED: IN MCEType-Tbl ;
CONSISTS OF:
MCETyCd ,
MCETyCdDescr ;
IDENTIFIED BY:
MCETyCd ;
ADDED:
TO MCEType-Tbl
BY Build/Maintain-MCEType-Tbl ;
MODIFIED:
IN MCEType-Tbl
BY Build/Maintain-MCEType-Tbl ;
MODIFIED:

```
      IN              MCEType-Tbl
      BY              Build/Maintain-MovConElm-Tbl ;
REFERENCED:
      IN              MCEType-Tbl
      BY              Build/Maintain-MCEType-Tbl ;
REFERENCED:
      IN              MCEType-Tbl
      BY              Build/Maintain-MovConElm-Tbl ;
REFERENCED:
      IN              MCEType-Tbl
      BY              Create-System-Unique-Tbl-Rept ;
CARDINALITY IS:
            2 ;
RESPONSIBLE PROBLEM DEFINER IS:
            'TACCS-LOB TMAS GROUP' ;
```



```
26   DEFINE ENTITY                                MMCUnique ;
       DESCRIPTION;
    Materiel Management Center Unique.
    Identifies the MMC which services the ShipToAAC.
     ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ,
                        'Data Model' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             volatility      'STATIC' ,
             TYPE            'AN' ,
             FIELD-LENGTH     '41' ,
             PICTURE         'X(41)' ,
             SEC-CLASS       'UNCLASSIFIED' ;
        LAYOUT;

    DATA MODEL:

         MMCUnique:Activity, Opt Many: Mand1
         MMCUnique:FreightAdrs, Opt1:Opt Many (MMC1)
         MMCUnique:FreightAdrs, Opt1:Opt Many (MMC2)
```



```
    LOGICAL DATABASE DESIGN:

         AACMMC                              6    P/F
         AACMMCDescr                        35


    PARTITION:

         MMCUnique                                CRUD
         FreightAdrs                              RU
         Activity                                 R;
        COLLECTED:      IN MMCUnique-Tbl ;
        CONSISTS OF:
             AACMMC ,
             AACMMCDescr ;
        IDENTIFIED BY:
             AACMMC ;
        ADDED:
              TO              MMCUnique-Tbl
              BY              Build/Maintain-MMCUnique-Tbl ;
        MODIFIED:
              IN              MMCUnique-Tbl
              BY              Build/Maintain-MMCUnique-Tbl ;
        REFERENCED:
              IN              MMCUnique-Tbl
```



```
      BY              Build/Maintain-MMCUnique-Tbl ;
REFERENCED:
      IN              MMCUnique-Tbl
      BY              Create-System-Unique-Tbl-Rept ;
REFERENCED:
      IN              MMCUnique-Tbl
      BY              Maintain-FreightAdrs ;
REFERENCED:
      IN              MMCUnique-Tbl
      BY              Freight-Inquiry ;
REMOVED:
      FROM            MMCUnique-Tbl
      BY              Build/Maintain-MMCUnique-Tbl ;
DESTROYED:     BY Build/Maintain-MMCUnique-Tbl ;
RESPONSIBLE PROBLEM DEFINER IS:
               'TACCS-LOB TMAS GROUP' ;
```

27 DEFINE ENTITY MovConElm ;
DESCRIPTION;
Movement Control Element.
Identifies the MCE which services the ShipToAAC, its type, its AAC, and the related AACBnMCCMCC.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ,
'Data Model' ;
SOURCE IS: 'TMAS DATA MODEL' ;
ATTRIBUTE IS:
volatility 'STATIC' ,
TYPE 'AN' ,
FIELD-LENGTH '52' ,
PICTURE 'X(52)' ,
SEC-CLASS 'UNCLASSIFIED' ;
LAYOUT;

DATA MODEL:

MovConElm:Activity, Opt Many:Mand1 (AACMCE)
MovConElm:Activity, Opt Many:Mand1 (AACBnMCCMCC)
MovConElm:MCEType, Opt Many:Mand1
MovConElm:FreightAdrs, Mand1:Opt Many

LOGICAL DATABASE DESIGN:

MCETyCd	1	F__	
MCECd	2	P	I S
MCEPrefix	1		__I
MCESuffix	1		
MCENme	35	S	
AACBnMCCMCC (AACCurr)	6	F	
AACMCE (AACCurr)	6	F	

PARTITION:

MovConElm	CRUD
FreightAdrs	RU
Activity	R
MCEType	R

COLLECTED: IN MovConElm-Tbl ;
CONSISTS OF:

```
      MCETyCd ,
      MCECd ,
      MCEPrefix ,
      MCESuffix ,
      MCENme ,
      AACBnMCCMCC ,
      AACMCE ;
IDENTIFIED BY:
      MCECd ;
ADDED:
      TO              MovConElm-Tbl
      BY              Build/Maintain-MovConElm-Tbl ;
MODIFIED:
      IN              MovConElm-Tbl
      BY              Build/Maintain-MovConElm-Tbl ;
REFERENCED:
      IN              MovConElm-Tbl
      BY              Build/Maintain-MovConElm-Tbl ;
REFERENCED:
      IN              MovConElm-Tbl
      BY              Create-System-Unique-Tbl-Rept ;
REFERENCED:
      IN              MovConElm-Tbl
      BY              Maintain-FreightAdrs ;
REFERENCED:
      IN              MovConElm-Tbl
      BY              Freight-Inquiry ;
REFERENCED:
      IN              MovConElm-Tbl
      BY              Create-Contact-Files ;
REMOVED:
      FROM            MovConElm-Tbl
      BY              Build/Maintain-MovConElm-Tbl ;
DESTROYED:     BY Build/Maintain-MovConElm-Tbl ;
RESPONSIBLE PROBLEM DEFINER IS:
               'TACCS-LOB TMAS GROUP' ;
```

```
28   DEFINE ENTITY                          MovConElm-Record-Info ;
       DESCRIPTION;
     Movement Control Element Records Information
     This entity is a flow of selected data elements from the
     MovConElm Table to the Create Contact Files process and from
     the process to the Create Contact Transactions Hold File.
      ;
         KEYWORD IS:     'TMAS' ,
                         'LOB' ,
                         'TACCS' ;
         COLLECTED:      IN Create-Contact-Trns-Hold-File ;
         COLLECTED:      IN MovConElm-Tbl ;
         CONSISTS OF:
              AACBnMCCMCC ,
              MCECd ,
              MCEPrefix ,
              MCESuffix ,
              MCETyCd ,
              MCENme ;
         ADDED:
               TO              Create-Contact-Trns-Hold-File
               BY              Create-Contact-Files ;
         REMOVED:
               FROM            Create-Contact-Trns-Hold-File
               BY              Set-Up-Contact-Files ;
         DESTROYED:      BY Set-Up-Contact-Files ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TMAS Team' ;
```

```
29   DEFINE ENTITY                              Parameter ;
       DESCRIPTION;
     Parameter Table Information
     This entity consists of the information required to determine if a CMM
     transaction is required.  If the system is operating in conjunction with
     CMM, this entity contains the "boiler plate information" required to
     format a CMM transaction.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ,
                        'TACCS' ,
                        'NOT IN DATA MODEL' ;
        SOURCE IS:      '4Jun Mtg, per Instr/L.Ward' ,
                        'NO DATA MODEL' ;
        ATTRIBUTE IS:
             volatility      'STATIC' ,
             RETENTION       'PERMANENT' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             TYPE            'AN' ,
             PICTURE         'X(06)' ,
             FIELD-LENGTH     '6' ;
        COLLECTED:      IN TMAS-System-Parameter-Tbl ;
        CONSISTS OF:
             CMM-Environment-Code ,
             CMM-Change-Number ,
             TMCA-Origin-Code ;
        ADDED:
              TO              Parameter-Tbl
              BY              Build/Maintain-Parameter-Tbl ;
        MODIFIED:
              IN              TMAS-System-Parameter-Tbl
              BY              Build/Maintain-Parameter-Tbl ;
        REFERENCED:
              IN              TMAS-System-Parameter-Tbl
              BY              Build/Maintain-Activity ;
        REFERENCED:
              IN              TMAS-System-Parameter-Tbl
              BY              Build/Maintain-Parameter-Tbl ;
        REFERENCED:
              IN              TMAS-System-Parameter-Tbl
              BY              Create-CMM-Mass-Update-File ;
        REFERENCED:
              IN              TMAS-System-Parameter-Tbl
              BY              Create-System-Unique-Tbl-Rept ;
        REFERENCED:
              IN              TMAS-System-Parameter-Tbl
              BY              Maintain-FreightAdrs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TMAS Team' ;
```

```
30   DEFINE ENTITY                                  Port ;
       DESCRIPTION;
   Port.
   This entity is an occurrence of a specific MILSTAMP Port Code,
   Port Type and Port Name.  This is the master record for the Port
   Table.
    ;
       KEYWORD IS:      'TMAS' ,
                        'LOB' ,
                        'TACCS' ,
                        'Data Model' ;
       SEE MEMO:
            Port-Memo ;
       SOURCE IS:       'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            SEC-CLASS        'UNCLASSIFIED' ,
            TYPE             'AN' ,
            PICTURE          'X(29)' ,
            FIELD-LENGTH      '29' ,
            RETENTION        'PERMANENT' ,
            volatility       'STATIC' ;
       LAYOUT;

   DATA MODEL:

        Port:FreightAdrs, Mand1:Opt Many (Water)
        Port:FreightAdrs, Mand1:Opt Many (Air)
        Port:PortType, Opt Many:Mand1


   LOGICAL DATABASE DESIGN:

        PrtTyCd                              1    P/F
        PrtCd                                3    P
        PrtNme                              25    S


   PARTITION:

        Port                                 CRUD
           FreightAdrs                       RU
           PortType                          R
    ;
       COLLECTED:       IN Port-Tbl ;
       CONSISTS OF:
            PrtTyCd ,
            PrtCd ,
            PrtNme ;
       IDENTIFIED BY:
```

```
      PrtTyCd ,
      PrtCd ;
ADDED:
      TO              Port-Tbl
      BY              Build/Maintain-Port-Tbl ;
MODIFIED:
      IN              Port-Tbl
      BY              Build/Maintain-Port-Tbl ;
REFERENCED:
      IN              Port-Tbl
      BY              Build/Maintain-Port-Tbl ;
REFERENCED:
      IN              Port-Tbl
      BY              Create-System-Unique-Tbl-Rept ;
REFERENCED:
      IN              Port-Tbl
      BY              Maintain-FreightAdrs ;
REFERENCED:
      IN              Port-Tbl
      BY              Freight-Inquiry ;
REFERENCED:
      IN              Port-Tbl
      BY              Create-Contact-Files ;
REMOVED:
      FROM            Port-Tbl
      BY              Build/Maintain-Port-Tbl ;
DESTROYED:     BY Build/Maintain-Port-Tbl ;
CARDINALITY IS:
               332 ;
RESPONSIBLE PROBLEM DEFINER IS:
               'TACCS-LOB TMAS GROUP' ;
```

```
31   DEFINE ENTITY                          Port-Record-Info ;
     ;DESCRIPTION;
     Port Records Information
     This entity is a flow of selected data elements from the Port Table
     to the Create Contact Files process and from the process to the
     Create Contact Transactions Hold File.
      ;
        KEYWORD IS:      'TMAS' ,
                         'LOB' ,
                         'TACCS' ;
        COLLECTED:       IN Create-Contact-Trns-Hold-File ;
        COLLECTED:       IN Port-Tbl ;
        CONSISTS OF:
             PrtTyCd ,
             PrtCd ,
             PrtNme ;
        ADDED:
              TO              Create-Contact-Trns-Hold-File
              BY              Create-Contact-Files ;
        REMOVED:
              FROM            Create-Contact-Trns-Hold-File
              BY              Set-Up-Contact-Files ;
        DESTROYED:       BY Set-Up-Contact-Files ;
        RESPONSIBLE PROBLEM DEFINER IS:
                         'TMAS Team' ;
```



```
32   DEFINE ENTITY                                PortType ;
       DESCRIPTION;
     PortType.
     Identifies the classification of port, i.e. aerial or water.
      ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ,
                        'TACCS' ,
                        'Data Model' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             volatility      'STATIC' ,
             RETENTION       'PERMANENT' ,
             TYPE            'AN' ,
             FIELD-LENGTH     '6' ,
             PICTURE         'X(06)' ,
             SEC-CLASS       'UNCLASSIFIED' :
        LAYOUT;

     DATA MODEL:

          PortType:Port, Mand 1:Opt Many
```



```
     LOGICAL DATABASE DESIGN:

          PrtTyCd                              1    P
          PrtTyDescr                           5


     PARTITION:

          PortType                             CRU
          Port                                 RU;
        COLLECTED:      IN PortType-Tbl ;
        CONSISTS OF:
             PrtTyCd ,
             PrtTyDescr ;
        IDENTIFIED BY:
             PrtTyCd ;
        ADDED:
              TO            PortType-Tbl
              BY            Build/Maintain-PortType-Tbl ;
        MODIFIED:
              IN            PortType-Tbl
              BY            Build/Maintain-PortType-Tbl ;
        REFERENCED:
              IN            PortType-Tbl
              BY            Build/Maintain-Port-Tbl ;
```



```
REFERENCED:
      IN              PortType-Tbl
      BY              Build/Maintain-PortType-Tbl ;
REFERENCED:
      IN              PortType-Tbl
      BY              Create-System-Unique-Tbl-Rept ;
CARDINALITY IS:
                3 ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB TMAS GROUP' ;
```

33 DEFINE ENTITY RemarkLine ;
DESCRIPTION;
Remark Line
This entity contains free text data that provides unique information that pertains to a specific AACCurr.
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'Data Model' ;
SOURCE IS: 'TMAS DATA MODEL' ;
ATTRIBUTE IS:
volatility 'DYNAMIC' ,
TYPE 'AN' ,
FIELD-LENGTH '52' ,
PICTURE 'X(52)' ,
SEC-CLASS 'UNCLASSIFIED' ;
LAYOUT:

DATA MODEL:

RemarkLine:Activity, Opt Many:Mand1

LOGICAL DATABASE DESIGN:

AACCurr	6	P/F
RmrkLineNo	2	P
Rmrk	50	

PARTITION:

RemarkLine	CRUD
Activity	R;

COLLECTED: IN RemarkLine-File ;
CONSISTS OF:
AACCurr ,
RmrkLineNo ,
Rmrk ;
IDENTIFIED BY:
AACCurr ,
RmrkLineNo ;
ADDED:
TO RemarkLine-File
BY Build/Maintain-RemarkLine ;
MODIFIED:
IN RemarkLine-File
BY Build/Maintain-RemarkLine ;
REFERENCED:

```
        IN              RemarkLine-File
        BY              Build/Maintain-Activity ;
    REFERENCED:
        IN              RemarkLine-File
        BY              Build/Maintain-RemarkLine ;
    REMOVED:
        FROM            RemarkLine-File
        BY              Build/Maintain-RemarkLine ;
    DESTROYED:      BY Build/Maintain-RemarkLine ;
    CARDINALITY IS:
                    10000 ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;

34  DEFINE ENTITY                           Ship-to-POC-Info ;
    DESCRIPTION;
Ship to Point of Contact Information
This entity is created by Update Ship to POC Info to update the Freight
Address File and Contact Transactions Hold File with current POC data.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    COLLECTED:      IN FreightAdrs-File ;
    COLLECTED:      IN Ship-to-POC-Hold-File ;
    CONSISTS OF:
         ShipToAAC ,
         FMCTPOC ,
         FMCTMilTel ,
         FMCTCivTel ,
         BASATel ;
    MODIFIED:
        IN              FreightAdrs-File
        BY              Update-Ship-to-POC-Info ;
    REFERENCED:
        IN              FreightAdrs-File
        BY              Display-Ship-to-POC-Info ;
    REFERENCED:
        IN              FreightAdrs-File
        BY              Update-Ship-to-POC-Info ;
    REFERENCED:
        IN              Ship-to-POC-Hold-File
        BY              Update-Ship-to-POC-Info ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;
```

35 DEFINE ENTITY TMAF-Edit-Criteria ;
DESCRIPTION;
Transportation Movements Address File Edit Criteria.
This entity consists of the edit criteria and system unique values which are compared to process inputs for validity and/or accuracy. It is a collection of data contained in the entities City, CityGroup, TTPUnique, MACOM, PortType, Port, DSSALOC, ETAFcstLvl, AddressCat, Holiday, MCEType, MovConElm, BBPUnique, MMCUnique, Country, and LMF. When used to perform specific edit functions, one or more of these entities flows INTO a process (one at a time) from the System-Unique-Tables. When an entity flows OUT OF a process into the System-Unique-Tables, it is either a new record to be added to the set, a changed or renamed record to replace an existing record in the set, or a message to delete an existing record in the set.
;
KEYWORD IS: 'TMAS' ,
'LOB' ;
COLLECTED: IN TMAS-System-Unique-Tables ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

36 DEFINE ENTITY TMAF-Info ;
DESCRIPTION;
Transportation Movements Address File Information.
This entity, Transportation Movements Address File Information, is a collection of the data contained in the entities Activity, FreightAdrs, BillingAdrs and RemarkLine. When used to perform specific edit functions, one or more of these entities flows INTO a process (one at a time) from the TMAF. When an entity flows OUT OF a process into the TMAF, it is either a new record to be added to the set, a changed or renamed record to replace an existing record in the set, or a message to delete an existing record in the set.
;
KEYWORD IS: 'TMAS' ,
'LOB' ;
COLLECTED: IN Trans-Movements-Address-File ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

```
37   DEFINE ENTITY                          TMAS-System-Parameter-Record ;
       DESCRIPTION;
Transportation Movements Address System System Parameter Record.
This entity represents the master record of system parameters collected
in the TMAS System Parameter Table at the Transportation Movement
Control Agency (TMCA) level.
 ;
     KEYWORD IS:      'TMAS' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
     SOURCE IS:       'TACCS-LOB TMAS DFD' ;
     ATTRIBUTE IS:
          SEC-CLASS        'UNCLASSIFIED' ,
          TYPE             'AN' ,
          volatility       'DYNAMIC' ;
     COLLECTED:       IN TMAS-System-Parameter-Tbl ;
     CONSISTS OF:
          CMM-Change-Number ,
          CMM-Environment-Code ,
          TMCA-Origin-Code ;
     RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB DATA ADMIN' ;
```

38 DEFINE ENTITY TT7/TT8-CMM-Trns-Info ;
DESCRIPTION;
TT7/TT8 CMM Transactions Information
This entity will be created for each occurence of a complete record Activity File or Freight Address File add, modify, delete or rename transaction that justifies a TT7/TT8-CMM-Transactions-Hold-File update. The rename transaction can be accomplished only through the Build/Maintain-Activity process. This formatted data is stored in the CMM-Transactions-Hold-File by Build/Maintain-Activity or the Maintain-FreightAdrs process. On command, the Prep-CMM-Changes process retrieves and converts the transactions stored in the CMM-Transactions-Hold-File from ISAM to sequential configuration. The sequential transactions are stored in the CMM-Transactions-Seq-Hold-File.
:
KEYWORD IS: 'TMAF' ,
'LOB' ,
'TACCS' ,
'TMAS' ;
SEE MEMO:
CMM-Transaction-Formats ;
COLLECTED: IN CMM-Transactions-Hold-File ;
CONSISTS OF:
DIC ,
TMCA-Origin-Code ,
TrnsSeqNo ,
AACCurr ,
AACXRef ,
TcrTml ,
CityGpCd ,
HolAreaCd ,
FAPO1st5 ,
FCityRgn ,
FCntry ,
MINIndic ,
MCEPrefix ,
MCESuffix ,
MUDsg ,
AACMMC1 ,
AACMMC2 ,
ADCATCd ,
LMF1 ,
LMF2 ,
ETABMCT ,
ETACMCT ,
ETABCnsgn ,
ETACCnsgn ,
ETABMMC1 ,
ETACMMC1 ,

```
      ETABMMC2 ,
      ETACMMC2 ,
      CH-CD ;
ADDED:
       TO              CMM-Transactions-Hold-File
       BY              Build/Maintain-Activity ;
ADDED:
       TO              CMM-Transactions-Hold-File
       BY              Maintain-FreightAdrs ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TMAS Team' ;
```

```
39   DEFINE ENTITY                                TTPUnique ;
       DESCRIPTION;
    Trailer Transfer Point Unique.
    Identifies the TTP which services the ShipToAAC.
     ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ,
                        'Data Model' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             volatility      'STATIC' ,
             TYPE            'AN' ,
             FIELD-LENGTH     '36' ,
             PICTURE         'X(36)' ,
             SEC-CLASS       'UNCLASSIFIED' ;
        LAYOUT;

    DATA MODEL:

         TTPUnique:FreightAdrs, Mand1:Opt Many


    LOGICAL DATABASE DESIGN:

         TTPCd                                 1    P
         TTPDescr                             35


    PARTITION:

         TTPUnique                             CRUD
         FreightAdrs                           RU;
        COLLECTED:      IN TTPUnique-Tbl ;
        CONSISTS OF:
             TTPCd ,
             TTPDescr ;
        IDENTIFIED BY:
             TTPCd ;
        ADDED:
              TO            TTPUnique-Tbl
              BY            Build/Maintain-TTPUnique-Tbl ;
        MODIFIED:
              IN            TTPUnique-Tbl
              BY            Build/Maintain-TTPUnique-Tbl ;
        REFERENCED:
              IN            TTPUnique-Tbl
              BY            Build/Maintain-TTPUnique-Tbl ;
        REFERENCED:
              IN            TTPUnique-Tbl
```

```
        BY              Maintain-FreightAdrs ;
    REFERENCED:
        IN              TTPUnique-Tbl
        BY              Create-System-Unique-Tbl-Rept ;
    REMOVED:
        FROM            TTPUnique-Tbl
        BY              Build/Maintain-TTPUnique-Tbl ;
    DESTROYED:      BY Build/Maintain-TTPUnique-Tbl ;
    CARDINALITY IS:
                    10 ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;

EOF EOF EOF EOF EOF
```

PARAGRAPH	SET OBJECTS	PAGE
1	Activity-File	III-1839
2	AddressCat-Tbl	III-1841
3	BBPUnique-Tbl	III-1842
4	BillingAdrs-File	III-1843
5	Blank-Frt/Actv-Wksht-Hold-File	III-1844
6	CMM-Adrs-Mass-Update-Hold-File	III-1844
7	CMM-Transactions-Hold-File	III-1845
8	CMM-Transactions-Seq-File	III-1845
9	City-Tbl	III-1846
10	CityGroup-Tbl	III-1847
11	Contact-Transactions-Hold-File	III-1848
12	Contact-Transactions-Seq-File	III-1848
13	Container-Database	III-1849
14	Country-Tbl	III-1850
15	Create-Contact-Trns-Hold-File	III-1851
16	DAMMS-R-1-Database	III-1852
17	DSSALOC-Tbl	III-1853
18	ETAFcstLvl-Tbl	III-1854
19	Freight-Database	III-1854
20	FreightAdrs-File	III-1855
21	Holiday-Tbl	III-1857
22	LMF-Tbl	III-1858
23	MACOM-Tbl	III-1859
24	MCEType-Tbl	III-1860
25	MMCUnique-Tbl	III-1861
26	MovConElm-Tbl	III-1862
27	Port-Tbl	III-1864
28	PortType-Tbl	III-1865
29	RemarkLine-File	III-1866
30	Ship-to-POC-Error-Hold-File	III-1866
31	Ship-to-POC-Hold-File	III-1867
32	TMAS-Database	III-1867
33	TMAS-System-Parameter-Tbl	III-1868
34	TMAS-System-Unique-Tables	III-1869
35	TTPUnique-Tbl	III-1870
36	Trans-Movements-Address-File	III-1871

This page intentionally left blank.

```
1       DEFINE SET                              Activity-File ;
      DESCRIPTION;
Activity File.
This file is a collection of activity records and contains addressing
information for all DODAAC and pseudo-DODAAC in the theater.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    SEE MEMO:
         FCityCd-Memo ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'DYNAMIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         EST-VOLUME         '10,000 RECORDS' ,
         TABLE-FORM         'COMMAND' ,
         EST-SIZE           '371 CHAR RECORDS' ;
    SUBSET OF:      Trans-Movements-Address-File ;
    COLLECTION OF:
         Activity ,
         Activity-Record-Info ,
         Activity-CMM-Info ,
         BFSN-Info ;
    MAINTAINED:      BY  Build/Maintain-Activity ;
    MAINTAINED:      BY  Build/Maintain-BillingAdrs ;
    EMPLOYED:       BY Create-CMM-Mass-Update-File ;
    EMPLOYED:       BY Create-Contact-Files ;
    EMPLOYED:       BY Create-Error-Analysis-Report ;
    EMPLOYED:       BY Maintain-FreightAdrs ;
    EMPLOYED:       BY Print-Actv-Rec-Wksht ;
    EMPLOYED:       BY Freight-Inquiry ;
    EMPLOYED:       BY Activity-Inquiry ;
    EMPLOYED:       BY Print-Selected-TMAF-Records ;
    HAS: Activity
          ADDED BY      Build/Maintain-Activity ;
    HAS: Activity
          MODIFIED BY   Build/Maintain-Activity ;
    HAS: Activity ,
         BFSN-Info
          MODIFIED BY   Build/Maintain-BillingAdrs ;
    HAS: Activity
          REFERENCED BY Activity-Inquiry ;
    HAS: Activity
```

REFERENCED BY Build/Maintain-Activity ;
HAS: Activity
REFERENCED BY Build/Maintain-RemarkLine ;
HAS: Activity
REFERENCED BY Create-Error-Analysis-Report ;
HAS: Activity
REFERENCED BY Maintain-FreightAdrs ;
HAS: Activity
REFERENCED BY Print-Actv-Rec-Wksht ;
HAS: Activity
REFERENCED BY Freight-Inquiry ;
HAS: BFSN-Info
REFERENCED BY Build/Maintain-BillingAdrs ;
HAS: Activity
REFERENCED BY Create-Contact-Files ;
HAS: Activity
REFERENCED BY Create-CMM-Mass-Update-File ;
HAS: Activity
REFERENCED BY Print-Selected-TMAF-Records ;
HAS: Activity
REMOVED BY Build/Maintain-Activity ;

```
2       DEFINE SET                              AddressCat-Tbl ;
    DESCRIPTION;
Address Category Table.
This table is a collection of ADCAT code values and their descriptions.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    SEE MEMO:
         Code-Tbl-Validation-Memo ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'STATIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         TABLE-FORM         'COMMAND' ,
         EST-SIZE           '62 CHAR RECORDS' ,
         EST-VOLUME         '30 RECORDS' ;
    SUBSET OF:      TMAS-System-Unique-Tables ;
    COLLECTION OF:
         AddressCat ;
    MAINTAINED:      BY  Build/Maintain-AddressCat-Tbl ;
    EMPLOYED:       BY Create-System-Unique-Tbl-Rept ;
    EMPLOYED:       BY Maintain-FreightAdrs ;
    EMPLOYED:       BY Freight-Inquiry ;
    HAS: AddressCat
          ADDED BY      Build/Maintain-AddressCat-Tbl ;
    HAS: AddressCat
          MODIFIED BY   Build/Maintain-AddressCat-Tbl ;
    HAS: AddressCat
          REFERENCED BY Build/Maintain-AddressCat-Tbl ;
    HAS: AddressCat
          REFERENCED BY Create-System-Unique-Tbl-Rept ;
    HAS: AddressCat
          REFERENCED BY Maintain-FreightAdrs ;
    HAS: AddressCat
          REFERENCED BY Freight-Inquiry ;
    HAS: AddressCat
          REMOVED BY    Build/Maintain-AddressCat-Tbl ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;
```

```
3       DEFINE SET                              BBPUnique-Tbl ;
    DESCRIPTION;
Breakbulk Point Unique Table.
Thjs table is a collection of Breakbulk Point DODAAC and their unit
descriptions.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    SEE MEMO:
         Code-Tbl-Validation-Memo ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'STATIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         EST-SIZE           '41 CHAR RECORDS' ,
         TABLE-FORM         'COMMAND' ;
    SUBSET OF:      TMAS-System-Unique-Tables ;
    COLLECTION OF:
         BBPUnique ;
    MAINTAINED:      BY  Build/Maintain-BBPUnique-Tbl ;
    EMPLOYED:       BY Create-System-Unique-Tbl-Rept ;
    EMPLOYED:       BY Maintain-FreightAdrs ;
    EMPLOYED:       BY Freight-Inquiry ;
    HAS: BBPUnique
          ADDED BY          Build/Maintain-BBPUnique-Tbl ;
    HAS: BBPUnique
          MODIFIED BY       Build/Maintain-BBPUnique-Tbl ;
    HAS: BBPUnique
          REFERENCED BY Build/Maintain-BBPUnique-Tbl ;
    HAS: BBPUnique
          REFERENCED BY Create-System-Unique-Tbl-Rept ;
    HAS: BBPUnique
          REFERENCED BY Maintain-FreightAdrs ;
    HAS: BBPUnique
          REFERENCED BY Freight-Inquiry ;
    HAS: BBPUnique
          REMOVED BY        Build/Maintain-BBPUnique-Tbl ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;
```

```
4       DEFINE SET                              BillingAdrs-File ;
    DESCRIPTION;
Billing Address File.
This file contains location information about the fiscal station number
responsible for administering the billing function.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'DYNAMIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         EST-SIZE           '142 CHAR RECORDS' ,
         EST-VOLUME         '31 RECORDS' ,
         TABLE-FORM         'COMMAND' ;
    SUBSET OF:      Trans-Movements-Address-File ;
    COLLECTION OF:
         BillingAdrs ;
    MAINTAINED:      BY  Build/Maintain-BillingAdrs ;
    EMPLOYED:       BY Build/Maintain-Activity ;
    EMPLOYED:       BY Print-BillingAdrs-Report ;
    EMPLOYED:       BY Freight-Inquiry ;
    EMPLOYED:       BY Activity-Inquiry ;
    HAS: BillingAdrs
          ADDED BY      Build/Maintain-BillingAdrs ;
    HAS: BillingAdrs
          MODIFIED BY   Build/Maintain-BillingAdrs ;
    HAS: BillingAdrs
          REFERENCED BY Build/Maintain-Activity ;
    HAS: BillingAdrs
          REFERENCED BY Build/Maintain-BillingAdrs ;
    HAS: BillingAdrs
          REFERENCED BY Print-BillingAdrs-Report ;
    HAS: BillingAdrs
          REFERENCED BY Freight-Inquiry ;
    HAS: BillingAdrs
          REFERENCED BY Activity-Inquiry ;
    HAS: BillingAdrs
          REMOVED BY    Build/Maintain-BillingAdrs ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;
```

```
5       DEFINE SET                              Blank-Frt/Actv-Wksht-Hold-File ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ;
      COLLECTION OF:
           Blank-Frt/Actv-Wksht-Info ;
      EMPLOYED:       BY Print-Blank-Frt/Actv-Wksht ;
      HAS: Blank-Frt/Actv-Wksht-Info
            REFERENCED BY Print-Blank-Frt/Actv-Wksht ;

6       DEFINE SET                              CMM-Adrs-Mass-Update-Hold-File ;
      DESCRIPTION;
   Cargo Movements Module Mass Address Update Hold File
   This file is a collection of CMM Address records created from
   TMAF Freight Address and Activity data.  It contains addressing
   and other location type information.
    ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ;
      COLLECTION OF:
           TT7-Change-Trns-Info ,
           TT8-Change-Trns-Info ;
      UPDATED:          BY  Create-CMM-Mass-Update-File ;
      HAS: Activity-CMM-Info ,
           FreightAdrs-CMM-Info
            ADDED BY       Create-CMM-Mass-Update-File ;
```

```
7       DEFINE SET                              CMM-Transactions-Hold-File ;
    DESCRIPTION;
Cargo Movements Module Address Hold File
This file is a collection of CMM Address File records.  It contains
addressing and other location type data.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    COLLECTION OF:
         TT7/TT8-CMM-Trns-Info ,
         TT8-Add-Trns-Info ,
         TT7-Delete-Trns-Info ,
         TT7-Change-Trns-Info ,
         TT8-Change-Trns-Info ,
         CMM-Hold-File-Info ;
    UPDATED:          BY  Build/Maintain-Activity ;
    UPDATED:          BY  Maintain-FreightAdrs ;
    EMPLOYED:        BY Prep-CMM-Out-Changes ;
    HAS: TT7/TT8-CMM-Trns-Info
          ADDED BY       Build/Maintain-Activity ;
    HAS: TT7/TT8-CMM-Trns-Info
          ADDED BY       Maintain-FreightAdrs ;
    HAS: CMM-Hold-File-Info
          REFERENCED BY Prep-CMM-Out-Changes ;
    HAS: CMM-Hold-File-Info
          REMOVED BY     Prep-CMM-Out-Changes ;

8       DEFINE SET                              CMM-Transactions-Seq-File ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ;
    COLLECTION OF:
         CMM-Address-File-Update-Out ,
         TT7/TT8-Transactions-Info-Out ;
    UPDATED:          BY  Prep-CMM-Out-Changes ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS PHASE II Team/W.Anderson' ;
```

```
9       DEFINE SET                              City-Tbl ;
      DESCRIPTION;
   City Table.
   This table contains city names and their associated City Group Code.
    ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ,
                      'Data Model' ,
                      'TACCS' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'STATIC' ,
           UPDATE-METHOD       'INTERACTIVE' ,
           UPDATE-FREQUENCY
                              'AS PER CHANGE' ,
           TABLE-FORM         'COMMAND' ,
           EST-SIZE           '27 CHAR RECORDS' ;
      SUBSET OF:         TMAS-System-Unique-Tables ;
      COLLECTION OF:
           City ;
      MAINTAINED:         BY  Build/Maintain-City-Tbl ;
      MAINTAINED:         BY  Build/Maintain-CityGroup-Tbl ;
      EMPLOYED:          BY Create-System-Unique-Tbl-Rept ;
      HAS: City  ADDED BY Build/Maintain-City-Tbl ;
      HAS: City
            MODIFIED BY   Build/Maintain-City-Tbl ;
      HAS: City
            MODIFIED BY   Build/Maintain-CityGroup-Tbl ;
      HAS: City
            REFERENCED BY Build/Maintain-City-Tbl ;
      HAS: City
            REFERENCED BY Build/Maintain-CityGroup-Tbl ;
      HAS: City
            REFERENCED BY Create-System-Unique-Tbl-Rept ;
      HAS: City  REMOVED BY Build/Maintain-City-Tbl ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
10      DEFINE SET                              CityGroup-Tbl ;
     DESCRIPTION;
City Group Table.
This table contains City Group Codes and their associated City Group
Names.
 ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ,
                     'Data Model' ,
                     'TACCS' ;
     SEE MEMO:
          Code-Tbl-Validation-Memo ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          MEDIA           'DISK' ,
          SEC-CLASS       'UNCLASSIFIED' ,
          volatility      'STATIC' ,
          UPDATE-METHOD     'INTERACTIVE' ,
          UPDATE-FREQUENCY
                          'AS PER CHANGE' ,
          TABLE-FORM      'COMMAND' ,
          EST-SIZE        '27 CHAR RECORDS' ,
          EST-VOLUME      '42 RECORDS' ;
     SUBSET OF:      TMAS-System-Unique-Tables ;
     COLLECTION OF:
          CityGroup ;
     MAINTAINED:       BY  Build/Maintain-CityGroup-Tbl ;
     EMPLOYED:       BY Create-System-Unique-Tbl-Rept ;
     EMPLOYED:       BY Maintain-FreightAdrs ;
     EMPLOYED:       BY Freight-Inquiry ;
     HAS: CityGroup
           ADDED BY       Build/Maintain-CityGroup-Tbl ;
     HAS: CityGroup
           MODIFIED BY    Build/Maintain-CityGroup-Tbl ;
     HAS: CityGroup
           REFERENCED BY Build/Maintain-CityGroup-Tbl ;
     HAS: CityGroup
           REFERENCED BY Create-System-Unique-Tbl-Rept ;
     HAS: CityGroup
           REFERENCED BY Maintain-FreightAdrs ;
     HAS: CityGroup
           REFERENCED BY Freight-Inquiry ;
     HAS: CityGroup
           REMOVED BY     Build/Maintain-CityGroup-Tbl ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;
```

```
11      DEFINE SET                          Contact-Transactions-Hold-File ;
     DESCRIPTION;
  Contact Hold File
  This file is a collection of contact records.  It contains addressing
  and other location type data.
   ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ,
                     'TACCS' ;
     SUBSET OF:      FreightAdrs-File ;
     COLLECTION OF:
          Cgo-Port-Trns ,
          Cgo-MCE-Trns ,
          CgoActivity-Contact-Trns-Info ,
          POC-Trns-Info ,
          CgoAddress-Contact-Trns-Info ;
     UPDATED:         BY  Build/Maintain-Activity ;
     UPDATED:         BY  Build/Maintain-Port-Tbl ;
     UPDATED:         BY  Build/Maintain-MovConElm-Tbl ;
     UPDATED:         BY  Maintain-FreightAdrs ;
     UPDATED:         BY  Update-Ship-to-POC-Info ;
     EMPLOYED:       BY Prep-Contact-Out-Changes ;
     HAS: CgoActivity-Contact-Trns-Info ,
          CgoAddress-Contact-Trns-Info
           ADDED BY       Build/Maintain-Activity ;
     HAS: Cgo-MCE-Trns
           ADDED BY       Build/Maintain-MovConElm-Tbl ;
     HAS: Cgo-Port-Trns
           ADDED BY       Build/Maintain-Port-Tbl ;
     HAS: CgoActivity-Contact-Trns-Info ,
          CgoAddress-Contact-Trns-Info
           ADDED BY       Maintain-FreightAdrs ;
     HAS: Cgo-Port-Trns ,
          Cgo-MCE-Trns ,
          CgoAddress-Contact-Trns-Info ,
          CgoActivity-Contact-Trns-Info
           REMOVED BY     Prep-Contact-Out-Changes ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS Team' ;

12      DEFINE SET                          Contact-Transactions-Seq-File ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ;
     COLLECTION OF:
          Contact-Seq-Trns-Out ;
     UPDATED:         BY  Prep-Contact-Out-Changes ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TMAS PHASE II Team/W.Anderson' ;
```

```
13      DEFINE SET                          Container-Database ;
        SUBSET OF:      DAMMS-R-1-Database ;
```

```
14        DEFINE SET                                Country-Tbl ;
      DESCRIPTION;
   Country Table.
   This table contains Country Codes and their descriptions.
    ;
      KEYWORD IS:      'TMAS' ,
                       'LOB' ,
                       'Data Model' ,
                       'TACCS' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:       'TMAS DATA MODEL' :
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'STATIC' ,
           UPDATE-METHOD       'INTERACTIVE' ,
           UPDATE-FREQUENCY
                              'AS PER CHANGE' ,
           TABLE-FORM         'COMMAND' ,
           EST-SIZE           '27 CHAR RECORDS' ,
           EST-VOLUME         '134 RECORDS' ;
      SUBSET OF:       TMAS-System-Unique-Tables ;
      COLLECTION OF:
           Country ;
      MAINTAINED:       BY  Build/Maintain-Country-Tbl ;
      EMPLOYED:         BY Build/Maintain-Activity ;
      EMPLOYED:         BY Build/Maintain-BillingAdrs ;
      EMPLOYED:         BY Create-System-Unique-Tbl-Rept ;
      EMPLOYED:         BY Maintain-FreightAdrs ;
      EMPLOYED:         BY Freight-Inquiry ;
      EMPLOYED:         BY Activity-Inquiry ;
      HAS: Country
            ADDED BY          Build/Maintain-Country-Tbl ;
      HAS: Country
            MODIFIED BY       Build/Maintain-Country-Tbl ;
      HAS: Country
            REFERENCED BY Build/Maintain-Activity ;
      HAS: Country
            REFERENCED BY Build/Maintain-BillingAdrs ;
      HAS: Country
            REFERENCED BY Build/Maintain-Country-Tbl ;
      HAS: Country
            REFERENCED BY Create-System-Unique-Tbl-Rept ;
      HAS: Country
            REFERENCED BY Maintain-FreightAdrs ;
      HAS: Country
            REFERENCED BY Freight-Inquiry ;
      HAS: Country
```

```
          REFERENCED BY Activity-Inquiry ;
      HAS: Country
          REMOVED BY    Build/Maintain-Country-Tbl ;
      RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;

15      DEFINE SET                          Create-Contact-Trns-Hold-File ;
      DESCRIPTION;
   Create Contact Transactions Hold File
   This file is a collection of records consisting of Cargo Address,
   Cargo Activity, Cargo Port and Cargo MCE transactions.  It contains
   addressing and other location information.
    ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ,
                      'TACCS' ;
      COLLECTION OF:
           Activity-Record-Info ,
           Port-Record-Info ,
           MovConElm-Record-Info ;
      UPDATED:          BY  Create-Contact-Files ;
      EMPLOYED:         BY Set-Up-Contact-Files ;
      HAS: Activity-Record-Info ,
           Port-Record-Info ,
           MovConElm-Record-Info ,
           FreightAdrs-Record-Info
            ADDED BY      Create-Contact-Files ;
      HAS: Activity-Record-Info ,
           FreightAdrs-Record-Info ,
           Port-Record-Info ,
           MovConElm-Record-Info
            REMOVED BY    Set-Up-Contact-Files ;
```

```
16      DEFINE SET                          DAMMS-R-1-Database ;
    DESCRIPTION;
Department of Army Movements Management System - Redesign, Fielding
Segment 1 Database.
This represents the logical collection of tables and files contained in
DAMMS-R Fielding Segment 1.  The subsets, Freight-Database, Container-
Database, and TMAS-Database, are not necessarily colocated on the same
hardware nor at the same organizational echelon.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    SOURCE IS:      'TMAS, FRT, CNTNR DATA MODELS' ;
    ATTRIBUTE IS:
         MEDIA           'DISK' ,
         SEC-CLASS       'UNCLASSIFIED' ;
    SUBSETS IS:     Container-Database ,
                    TMAS-Database ,
                    Freight-Database ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB' ;
```

```
17      DEFINE SET                                  DSSALOC-Tbl ;
      DESCRIPTION;
Direct Supply Support/Air Line of Communication Table.
This table contains DSSALOC Codes and their descriptions.
 ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ,
                      'Data Model' ,
                      'TACCS' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'STATIC' ,
           UPDATE-METHOD       'INTERACTIVE' ,
           UPDATE-FREQUENCY
                              'AS PER CHANGE' ,
           EST-SIZE           '61 CHAR RECORDS' ,
           EST-VOLUME         '3 RECORDS' ,
           TABLE-FORM         'COMMAND' ;
      SUBSET OF:      TMAS-System-Unique-Tables ;
      COLLECTION OF:
           DSSALOC ;
      MAINTAINED:      BY  Build/Maintain-DSSALOC-Tbl ;
      EMPLOYED:       BY Build/Maintain-Activity ;
      EMPLOYED:       BY Create-System-Unique-Tbl-Rept ;
      EMPLOYED:       BY Activity-Inquiry ;
      HAS: DSSALOC
            ADDED BY        Build/Maintain-DSSALOC-Tbl ;
      HAS: DSSALOC
            MODIFIED BY     Build/Maintain-DSSALOC-Tbl ;
      HAS: DSSALOC
            REFERENCED BY Build/Maintain-Activity ;
      HAS: DSSALOC
            REFERENCED BY Build/Maintain-DSSALOC-Tbl ;
      HAS: DSSALOC
            REFERENCED BY Create-System-Unique-Tbl-Rept ;
      HAS: DSSALOC
            REFERENCED BY Activity-Inquiry ;
      HAS: DSSALOC
            REMOVED BY      Build/Maintain-DSSALOC-Tbl ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
18       DEFINE SET                              ETAFcstLvl-Tbl ;
      DESCRIPTION;
   Estimated Time of Arrival Forecast Level Table.
   This table contains DAMMS-CMM ETA Forecast Level Codes and their
   descriptions.
    ;
      KEYWORD IS:      'TMAS' ,
                       'LOB' ,
                       'Data Model' ,
                       'TACCS' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:       'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           MEDIA             'DISK' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           volatility        'STATIC' ,
           UPDATE-METHOD      'INTERACTIVE' ,
           UPDATE-FREQUENCY
                             'AS PER CHANGE' ,
           EST-SIZE          '61 CHAR RECORDS' ,
           EST-VOLUME        '4 RECORDS' ,
           TABLE-FORM        'COMMAND' ;
      SUBSET OF:       TMAS-System-Unique-Tables ;
      COLLECTION OF:
           ETAFcstLvl ;
      MAINTAINED:       BY Build/Maintain-ETAFcstLvl-Tbl ;
      EMPLOYED:         BY Create-System-Unique-Tbl-Rept ;
      EMPLOYED:         BY Maintain-FreightAdrs ;
      HAS: ETAFcstLvl
            ADDED BY         Build/Maintain-ETAFcstLvl-Tbl ;
      HAS: ETAFcstLvl
            MODIFIED BY      Build/Maintain-ETAFcstLvl-Tbl ;
      HAS: ETAFcstLvl
            REFERENCED BY Build/Maintain-ETAFcstLvl-Tbl ;
      HAS: ETAFcstLvl
            REFERENCED BY Create-System-Unique-Tbl-Rept ;
      HAS: ETAFcstLvl
            REFERENCED BY Maintain-FreightAdrs ;
      HAS: ETAFcstLvl
            REMOVED BY       Build/Maintain-ETAFcstLvl-Tbl ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

19       DEFINE SET                              Freight-Database ;
      SUBSET OF:       DAMMS-R-1-Database ;
```

```
20      DEFINE SET                              FreightAdrs-File ;
    DESCRIPTION;
Freight Address File.
This file is a collection of shipping or ship-to activity records.  It
contains addressing and other location-type data.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ,
                    'Data Model' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'DYNAMIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         TABLE-FORM         'COMMAND' ,
         EST-SIZE           '355 CHAR RECORDS' ,
         EST-VOLUME         '6,000-8,000 RECORDS' ;
    SUBSETS IS:     Contact-Transactions-Hold-File ;
    SUBSET OF:      Trans-Movements-Address-File ;
    COLLECTION OF:
         FreightAdrs ,
         FreightAdrs-Info-Inp ,
         Ship-to-POC-Info ;
    MAINTAINED:      BY  Maintain-FreightAdrs ;
    MAINTAINED:      BY  Build/Maintain-Activity ;
    UPDATED:         BY  Update-Ship-to-POC-Info ;
    EMPLOYED:       BY Create-CMM-Mass-Update-File ;
    EMPLOYED:       BY Create-Contact-Files ;
    EMPLOYED:       BY Create-Error-Analysis-Report ;
    EMPLOYED:       BY Display-Ship-to-POC-Info ;
    EMPLOYED:       BY Print-Frt-Rec-Wksht ;
    EMPLOYED:       BY Freight-Inquiry ;
    EMPLOYED:       BY Activity-Inquiry ;
    EMPLOYED:       BY Print-Selected-TMAF-Records ;
    HAS: FreightAdrs
          ADDED BY      Maintain-FreightAdrs ;
    HAS: FreightAdrs
          ADDED BY      Build/Maintain-Activity ;
    HAS: FreightAdrs
          MODIFIED BY   Build/Maintain-Activity ;
    HAS: FreightAdrs
          MODIFIED BY   Maintain-FreightAdrs ;
    HAS: Ship-to-POC-Info
          MODIFIED BY   Update-Ship-to-POC-Info ;
    HAS: FreightAdrs
```

```
        REFERENCED BY Build/Maintain-Activity ;
HAS: FreightAdrs
        REFERENCED BY Create-Contact-Files ;
HAS: FreightAdrs
        REFERENCED BY Create-Error-Analysis-Report ;
HAS: Ship-to-POC-Info
        REFERENCED BY Display-Ship-to-POC-Info ;
HAS: FreightAdrs
        REFERENCED BY Maintain-FreightAdrs ;
HAS: FreightAdrs
        REFERENCED BY Print-Frt-Rec-Wksht ;
HAS: Ship-to-POC-Info
        REFERENCED BY Update-Ship-to-POC-Info ;
HAS: FreightAdrs
        REFERENCED BY Freight-Inquiry ;
HAS: FreightAdrs
        REFERENCED BY Activity-Inquiry ;
HAS: FreightAdrs
        REFERENCED BY Create-CMM-Mass-Update-File ;
HAS: FreightAdrs
        REFERENCED BY Print-Selected-TMAF-Records ;
HAS: FreightAdrs
        REMOVED BY    Build/Maintain-Activity ;
HAS: FreightAdrs
        REMOVED BY    Maintain-FreightAdrs ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB TMAS GROUP' ;
```



```
21      DEFINE SET                              Holiday-Tbl ;
     DESCRIPTION;
  Holiday Table.
  This table contains Holiday Area Codes and their descriptions.
   ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ,
                     'Data Model' ,
                     'TACCS' ;
     SEE MEMO:
          Code-Tbl-Validation-Memo ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          volatility         'STATIC' ,
          UPDATE-METHOD       'INTERACTIVE' ,
          UPDATE-FREQUENCY
                             'AS PER CHANGE' ,
          EST-SIZE           '26 CHAR RECORDS' ,
          EST-VOLUME         '14 RECORDS' ,
          TABLE-FORM         'COMMAND' ;
     SUBSET OF:      TMAS-System-Unique-Tables ;
     COLLECTION OF:
          Holiday ;
     MAINTAINED:      BY  Build/Maintain-Holiday-Tbl ;
     EMPLOYED:       BY Create-System-Unique-Tbl-Rept ;
     EMPLOYED:       BY Maintain-FreightAdrs ;
     EMPLOYED:       BY Freight-Inquiry ;
     HAS: Holiday
           ADDED BY       Build/Maintain-Holiday-Tbl ;
     HAS: Holiday
           MODIFIED BY    Build/Maintain-Holiday-Tbl ;
     HAS: Holiday
           REFERENCED BY Build/Maintain-Holiday-Tbl ;
     HAS: Holiday
           REFERENCED BY Create-System-Unique-Tbl-Rept ;
     HAS: Holiday
           REFERENCED BY Maintain-FreightAdrs ;
     HAS: Holiday
           REFERENCED BY Freight-Inquiry ;
     HAS: Holiday
           REMOVED BY     Build/Maintain-Holiday-Tbl ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;
```



```
22      DEFINE SET                              LMF-Tbl ;
      DESCRIPTION;
   Language Media Format Table.
   This table is a collection of LMF code values and descriptions.
    ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ,
                      'TACCS' ,
                      'Data Model' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'STATIC' ,
           UPDATE-METHOD       'INTERACTIVE' ,
           UPDATE-FREQUENCY
                              'AS PER CHANGE' ,
           EST-SIZE           '22 CHAR RECORDS' ,
           EST-VOLUME         '4 RECORDS' ,
           TABLE-FORM         'COMMAND' ;
      SUBSET OF:      TMAS-System-Unique-Tables ;
      COLLECTION OF:
           LMF ;
      MAINTAINED:      BY  Build/Maintain-LMF-Tbl ;
      EMPLOYED:       BY Create-System-Unique-Tbl-Rept ;
      EMPLOYED:       BY Maintain-FreightAdrs ;
      EMPLOYED:       BY Freight-Inquiry ;
      HAS: LMF  ADDED BY  Build/Maintain-LMF-Tbl ;
      HAS: LMF  MODIFIED BY Build/Maintain-LMF-Tbl ;
      HAS: LMF
            REFERENCED BY Build/Maintain-LMF-Tbl ;
      HAS: LMF
            REFERENCED BY Create-System-Unique-Tbl-Rept ;
      HAS: LMF
            REFERENCED BY Maintain-FreightAdrs ;
      HAS: LMF
            REFERENCED BY Freight-Inquiry ;
      HAS: LMF  REMOVED BY Build/Maintain-LMF-Tbl ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
23      DEFINE SET                              MACOM-Tbl ;
      DESCRIPTION;
   Major Command Table.
   This table contains theater MACOM codes and their descriptions.
    ;
      KEYWORD IS:      'TMAS' ,
                       'LOB' ,
                       'Data Model' ,
                       'TACCS' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:       'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'STATIC' ,
           UPDATE-METHOD       'INTERACTIVE' ,
           UPDATE-FREQUENCY
                              'AS PER CHANGE' ,
           EST-SIZE           '38 CHAR RECORDS' ,
           TABLE-FORM         'COMMAND' ,
           EST-VOLUME         '86 RECORDS' ;
      SUBSET OF:       TMAS-System-Unique-Tables ;
      COLLECTION OF:
           MACOM ;
      MAINTAINED:       BY  Build/Maintain-MACOM-Tbl ;
      EMPLOYED:         BY Build/Maintain-Activity ;
      EMPLOYED:         BY Create-System-Unique-Tbl-Rept ;
      EMPLOYED:         BY Activity-Inquiry ;
      HAS: MACOM  ADDED BY Build/Maintain-MACOM-Tbl ;
      HAS: MACOM
            MODIFIED BY   Build/Maintain-MACOM-Tbl ;
      HAS: MACOM
            REFERENCED BY Build/Maintain-Activity ;
      HAS: MACOM
            REFERENCED BY Build/Maintain-MACOM-Tbl ;
      HAS: MACOM
            REFERENCED BY Create-System-Unique-Tbl-Rept ;
      HAS: MACOM
            REFERENCED BY Activity-Inquiry ;
      HAS: MACOM
            REMOVED BY    Build/Maintain-MACOM-Tbl ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
24      DEFINE SET                              MCEType-Tbl ;
     DESCRIPTION;
   Movement Control Element Type Table.
   This table contains MCE Type Codes and their descriptions.
    ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ,
                      'TACCS' ,
                      'Data Model' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'STATIC' ,
           UPDATE-METHOD       'INTERACTIVE' ,
           UPDATE-FREQUENCY
                              'AS PER CHANGE' ,
           TABLE-FORM         'COMMAND' ,
           RETENTION          'PERMANENT' ,
           EST-SIZE           '31 CHAR RECORDS' ,
           EST-VOLUME         '2 RECORDS' ;
      SUBSET OF:      TMAS-System-Unique-Tables ;
      COLLECTION OF:
           MCEType ;
      MAINTAINED:      BY  Build/Maintain-MovConElm-Tbl ;
      MAINTAINED:      BY  Build/Maintain-MCEType-Tbl ;
      EMPLOYED:       BY Build/Maintain-MovConElm-Tbl ;
      EMPLOYED:       BY Create-System-Unique-Tbl-Rept ;
      HAS: MCEType
            ADDED BY       Build/Maintain-MCEType-Tbl ;
      HAS: MCEType
            MODIFIED BY    Build/Maintain-MCEType-Tbl ;
      HAS: MCEType
            MODIFIED BY    Build/Maintain-MovConElm-Tbl ;
      HAS: MCEType
            REFERENCED BY Build/Maintain-MCEType-Tbl ;
      HAS: MCEType
            REFERENCED BY Build/Maintain-MovConElm-Tbl ;
      HAS: MCEType
            REFERENCED BY Create-System-Unique-Tbl-Rept ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
25      DEFINE SET                                  MMCUnique-Tbl ;
    DESCRIPTION;
Materiel Management Center Unique Table.
This table is a collection of MMC DODAAC andd their unit descriptions.
    ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ,
                    'Data Model' ;
    SEE MEMO:
         Code-Tbl-Validation-Memo ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'STATIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         EST-SIZE           '41 CHAR RECORDS' ,
         TABLE-FORM         'COMMAND' ;
    SUBSET OF:      TMAS-System-Unique-Tables ;
    COLLECTION OF:
         MMCUnique ;
    MAINTAINED:      BY  Build/Maintain-MMCUnique-Tbl ;
    EMPLOYED:       BY Create-System-Unique-Tbl-Rept ;
    EMPLOYED:       BY Maintain-FreightAdrs ;
    EMPLOYED:       BY Freight-Inquiry ;
    HAS: MMCUnique
          ADDED BY      Build/Maintain-MMCUnique-Tbl ;
    HAS: MMCUnique
          MODIFIED BY   Build/Maintain-MMCUnique-Tbl ;
    HAS: MMCUnique
          REFERENCED BY Build/Maintain-MMCUnique-Tbl ;
    HAS: MMCUnique
          REFERENCED BY Create-System-Unique-Tbl-Rept ;
    HAS: MMCUnique
          REFERENCED BY Maintain-FreightAdrs ;
    HAS: MMCUnique
          REFERENCED BY Freight-Inquiry ;
    HAS: MMCUnique
          REMOVED BY    Build/Maintain-MMCUnique-Tbl ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB-TMAS GROUP' ;
```

```
26       DEFINE SET                              MovConElm-Tbl ;
      DESCRIPTION;
   Movement Control Element File Table
   The Movement Control Element File Table consists of the data
   (MCETyCd, MCECd, MCEPrefix, MCESuffix, MCENme, AACMCE, and
   AACBnMCCMCC) which are used to build a MovConElm record.  The
   format of this transaction is shown in the memo.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'TACCS' ,
                       'Data Model' ;
       SEE MEMO:
            Code-Tbl-Validation-Memo ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            MEDIA              'DISK' ,
            SEC-CLASS          'UNCLASSIFIED' ,
            volatility         'STATIC' ,
            UPDATE-METHOD       'INTERACTIVE' ,
            UPDATE-FREQUENCY
                               'AS PER CHANGE' ,
            EST-SIZE           '52 CHAR RECORDS' ,
            TABLE-FORM         'COMMAND' ;
       SUBSET OF:      TMAS-System-Unique-Tables ;
       COLLECTION OF:
            MovConElm ,
            MovConElm-Record-Info ;
       MAINTAINED:      BY  Build/Maintain-MovConElm-Tbl ;
       EMPLOYED:       BY Create-Contact-Files ;
       EMPLOYED:       BY Create-System-Unique-Tbl-Rept ;
       EMPLOYED:       BY Maintain-FreightAdrs ;
       EMPLOYED:       BY Freight-Inquiry ;
       HAS: MovConElm
             ADDED BY       Build/Maintain-MovConElm-Tbl ;
       HAS: MovConElm
             MODIFIED BY    Build/Maintain-MovConElm-Tbl ;
       HAS: MovConElm
             REFERENCED BY Build/Maintain-MovConElm-Tbl ;
       HAS: MovConElm
             REFERENCED BY Create-System-Unique-Tbl-Rept ;
       HAS: MovConElm
             REFERENCED BY Maintain-FreightAdrs ;
       HAS: MovConElm
             REFERENCED BY Freight-Inquiry ;
       HAS: MovConElm
             REFERENCED BY Create-Contact-Files ;
       HAS: MovConElm
             REMOVED BY     Build/Maintain-MovConElm-Tbl ;
```

RESPONSIBLE PROBLEM DEFINER IS:
'TACCS-LOB TMAS GROUP' ;

```
27       DEFINE SET                              Port-Tbl ;
     DESCRIPTION;
   Port File Table
   The Port File Table consists of data elements (PrtTyCd, PrtCd,
   and PrtNme) which are used to build a port record.  The format
   of this transaction is shown in the memo.

   This table contains MILSTAMP Port Codes and their descriptions.
    ;
      KEYWORD IS:      'TMAS' ,
                       'LOB' ,
                       'TACCS'
                       'Data Model' ;
      SEE MEMO:
           Port-Memo ,
           Code-Tbl-Validation-Memo ;
      SOURCE IS:       'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'STATIC' ,
           UPDATE-METHOD       'INTERACTIVE' ,
           UPDATE-FREQUENCY
                              'PER CODE CHANGE' ,
           RETENTION          'PERMANENT' ,
           TABLE-FORM         'COMMAND' ,
           EST-SIZE           '29 CHAR RECORDS' ,
           EST-VOLUME         '332 RECORDS' ;
      SUBSET OF:       TMAS-System-Unique-Tables ;
      COLLECTION OF:
           Port ,
           Port-Record-Info ;
      MAINTAINED:       BY  Build/Maintain-Port-Tbl ;
      EMPLOYED:         BY Build/Maintain-PortType-Tbl ;
      EMPLOYED:         BY Create-Contact-Files ;
      EMPLOYED:         BY Create-System-Unique-Tbl-Rept ;
      EMPLOYED:         BY Maintain-FreightAdrs ;
      EMPLOYED:         BY Freight-Inquiry ;
      HAS: Port  ADDED BY Build/Maintain-Port-Tbl ;
      HAS: Port
            MODIFIED BY   Build/Maintain-Port-Tbl ;
      HAS: Port
            REFERENCED BY Build/Maintain-Port-Tbl ;
      HAS: Port
            REFERENCED BY Create-System-Unique-Tbl-Rept ;
      HAS: Port
            REFERENCED BY Maintain-FreightAdrs ;
      HAS: Port
            REFERENCED BY Freight-Inquiry ;
```

```
      HAS: Port
            REFERENCED BY Create-Contact-Files ;
      HAS: Port  REMOVED BY Build/Maintain-Port-Tbl ;
      RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;

28      DEFINE SET                              PortType-Tbl ;
      DESCRIPTION;
   Port Type Table.
   This table contains Port Type Codes and their descriptions.
    ;
      KEYWORD IS:       'TMAS' ,
                        'LOB' ,
                        'Data Model' ,
                        'TACCS' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:        'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'STATIC' ,
           UPDATE-METHOD       'INTERACTIVE' ,
           UPDATE-FREQUENCY
                              'AS PER CHANGE' ,
           EST-SIZE           '6 CHAR RECORDS' ,
           EST-VOLUME         '3 RECORDS' ,
           TABLE-FORM         'COMMAND' ;
      SUBSET OF:        TMAS-System-Unique-Tables ;
      COLLECTION OF:
           PortType ;
      MAINTAINED:        BY  Build/Maintain-PortType-Tbl ;
      EMPLOYED:         BY Build/Maintain-Port-Tbl ;
      EMPLOYED:         BY Build/Maintain-PortType-Tbl ;
      EMPLOYED:         BY Create-System-Unique-Tbl-Rept ;
      HAS: PortType
            ADDED BY       Build/Maintain-PortType-Tbl ;
      HAS: PortType
            MODIFIED BY    Build/Maintain-PortType-Tbl ;
      HAS: PortType
            REFERENCED BY Build/Maintain-Port-Tbl ;
      HAS: PortType
            REFERENCED BY Build/Maintain-PortType-Tbl ;
      HAS: PortType
            REFERENCED BY Create-System-Unique-Tbl-Rept ;
      RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
29      DEFINE SET                                  RemarkLine-File ;
      DESCRIPTION;
   Remark Line File
   This file contains TMAS remarks pertaining to a particular activity.
    ;
      KEYWORD IS:      'TMAS' ,
                       'LOB' ,
                       'Data Model' ,
                       'TACCS' ;
      SOURCE IS:       'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'DYNAMIC' ,
           UPDATE-METHOD       'INTERACTIVE' ,
           UPDATE-FREQUENCY
                              'AS PER CHANGE' ,
           EST-SIZE           '56 CHAR RECORDS' ,
           EST-VOLUME         '10,000 RECORDS' ,
           TABLE-FORM         'LOCAL' ;
      SUBSET OF:       Trans-Movements-Address-File ;
      COLLECTION OF:
           RemarkLine ;
      MAINTAINED:       BY  Build/Maintain-RemarkLine ;
      EMPLOYED:        BY Build/Maintain-Activity ;
      HAS: RemarkLine
            ADDED BY         Build/Maintain-RemarkLine ;
      HAS: RemarkLine
            MODIFIED BY      Build/Maintain-RemarkLine ;
      HAS: RemarkLine
            REFERENCED BY Build/Maintain-Activity ;
      HAS: RemarkLine
            REFERENCED BY Build/Maintain-RemarkLine ;
      HAS: RemarkLine
            REMOVED BY       Build/Maintain-RemarkLine ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

30      DEFINE SET                                  Ship-to-POC-Error-Hold-File ;
      KEYWORD IS:      'TMAS' ,
                       'LOB' ,
                       'TACCS' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TMAS Team' ;
```

```
31      DEFINE SET                              Ship-to-POC-Hold-File ;
    DESCRIPTION;
Ship to Point of Contact Hold File
This file contains the Ship to POC update information received from the
MCT/BMCT.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TAACS' ;
    COLLECTION OF:
         Ship-to-POC-Info ;
    EMPLOYED:       BY Update-Ship-to-POC-Info ;
    HAS: Ship-to-POC-Info
          REFERENCED BY Update-Ship-to-POC-Info ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TMAS Team' ;

32      DEFINE SET                              TMAS-Database ;
    DESCRIPTION;
Transportation Movements Address System (TMAS) Database.
This set of files and tables contains addressing information maintained
at the Theater Movements Control Agency (TMCA) level.  It contains data
in common with the theater master address file, the European Activity
Address File, (EURAFF), and the DAMMS-R Cargo Movements Module (CMM).
It is the basis for the contact files and selected system unique files
maintained at lower organizational echelons.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         MEDIA          'DISK' ,
         SEC-CLASS      'UNCLASSIFIED' ;
    SUBSETS IS:     TMAS-System-Unique-Tables ,
                    Trans-Movements-Address-File ,
                    TMAS-System-Parameter-Tbl ;
    SUBSET OF:      DAMMS-R-1-Database ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;
```

```
33      DEFINE SET                              TMAS-System-Parameter-Tbl ;
    DESCRIPTION;
Transportation Movements Address System System Parameter Table.
This table represents the collection of the various system parameters
used on the TACCS machine at the Transportation Movement Control Agency
(TMCA) level.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'TACCS' ,
                    'NOT IN DATA MODEL' ;
    SEE MEMO:
         CMM-Transaction-Formats ;
    SOURCE IS:      'TACCS-LOB TMAS DFD' ,
                    '4June Mtg. per Instr/L.Ward' ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'DYNAMIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         TABLE-FORM         'COMMAND' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ;
    SUBSET OF:      TMAS-Database ;
    COLLECTION OF:
         TMAS-System-Parameter-Record ,
         Parameter ,
         Parameter-Tbl-Inp ;
    MAINTAINED:      BY  Build/Maintain-Parameter-Tbl ;
    EMPLOYED:       BY Build/Maintain-Activity ;
    EMPLOYED:       BY Create-CMM-Mass-Update-File ;
    EMPLOYED:       BY Create-System-Unique-Tbl-Rept ;
    EMPLOYED:       BY Maintain-FreightAdrs ;
    HAS: Parameter
          MODIFIED BY   Build/Maintain-Parameter-Tbl ;
    HAS: Parameter
          REFERENCED BY Build/Maintain-Activity ;
    HAS: Parameter
          REFERENCED BY Build/Maintain-Parameter-Tbl ;
    HAS: Parameter
          REFERENCED BY Create-CMM-Mass-Update-File ;
    HAS: Parameter
          REFERENCED BY Create-System-Unique-Tbl-Rept ;
    HAS: Parameter
          REFERENCED BY Maintain-FreightAdrs ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB DATA ADMIN' ;
```

```
34      DEFINE SET                              TMAS-System-Unique-Tables ;
    DESCRIPTION;
Transportation Movements Address System (TMAS) System Unique Tables.
This set of tables represents the more static entities in the TMAS
Database - that is, those tables subject to relatively infrequent
change.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         volatility      'STATIC' ,
         MEDIA           'DISK' ,
         SEC-CLASS       'UNCLASSIFIED' ,
         TABLE-FORM      'COMMAND' ;
    SUBSETS IS:     AddressCat-Tbl ,
                    BBPUnique-Tbl ,
                    City-Tbl ,
                    CityGroup-Tbl ,
                    Country-Tbl ,
                    DSSALOC-Tbl ,
                    ETAFcstLvl-Tbl ,
                    Holiday-Tbl ,
                    LMF-Tbl ,
                    MACOM-Tbl ,
                    MCEType-Tbl ,
                    MovConElm-Tbl ,
                    Port-Tbl ,
                    PortType-Tbl ,
                    TTPUnique-Tbl ,
                    MMCUnique-Tbl ;
    SUBSET OF:      TMAS-Database ;
    COLLECTION OF:
         TMAF-Edit-Criteria ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;
```

```
35      DEFINE SET                              TTPUnique-Tbl ;
      DESCRIPTION;
   Trailer Transfer Point Unique Table.
   This table is a Trailer Transfer Point Codes and their descriptions.
    ;
      KEYWORD IS:      'TMAS' ,
                       'LOB' ,
                       'TACCS' ,
                       'Data Model' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:       'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           MEDIA             'DISK' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           volatility        'STATIC' ,
           UPDATE-METHOD      'INTERACTIVE' ,
           UPDATE-FREQUENCY
                             'AS PER CHANGE' ,
           TABLE-FORM        'COMMAND' ,
           EST-SIZE          '36 CHAR RECORDS' ,
           EST-VOLUME        '10 RECORDS' ;
      SUBSET OF:       TMAS-System-Unique-Tables ;
      COLLECTION OF:
           TTPUnique ;
      MAINTAINED:       BY  Build/Maintain-TTPUnique-Tbl ;
      EMPLOYED:         BY Build/Maintain-TTPUnique-Tbl ;
      EMPLOYED:         BY Maintain-FreightAdrs ;
      EMPLOYED:         BY Create-System-Unique-Tbl-Rept ;
      EMPLOYED:         BY Freight-Inquiry ;
      HAS: TTPUnique
            ADDED BY         Build/Maintain-TTPUnique-Tbl ;
      HAS: TTPUnique
            MODIFIED BY      Build/Maintain-TTPUnique-Tbl ;
      HAS: TTPUnique
            REFERENCED BY Build/Maintain-TTPUnique-Tbl ;
      HAS: TTPUnique
            REFERENCED BY Maintain-FreightAdrs ;
      HAS: TTPUnique
            REFERENCED BY Create-System-Unique-Tbl-Rept ;
      HAS: TTPUnique
            REMOVED BY       Build/Maintain-TTPUnique-Tbl ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
36      DEFINE SET                              Trans-Movements-Address-File ;
      SYNONYM IS:     TMAF ;
      DESCRIPTION;
Transportation Movements Address File.
This set of files represents the more volatile entities in the
Transportation Movements Address System Database - that is, those files
subject to relatively frequent change.
 ;
    KEYWORD IS:     'Data Model' ,
                    'TMAS' ,
                    'LOB' ,
                    'TACCS' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         volatility      'DYNAMIC' ,
         MEDIA           'DISK' ,
         SEC-CLASS       'UNCLASSIFIED' ;
    SUBSETS IS:     Activity-File ,
                    FreightAdrs-File ,
                    BillingAdrs-File ,
                    RemarkLine-File ;
    SUBSET OF:      TMAS-Database ;
    COLLECTION OF:
         TMAF-Info ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;

EOF EOF EOF EOF EOF
```

PARAGRAPH	MEMO OBJECTS	PAGE
1	CMM-Transaction-Formats	III-1875
2	Code-Tbl-Validation-Memo	III-1879
3	Contact-Transaction-Formats	III-1881
4	Create-Contact-Files-Format	III-1883
5	FCityCd-Memo	III-1884

1 DEFINE MEMO CMM-Transaction-Formats ;
DESCRIPTION;
CMM Formatted Transactions
This memo is provided as a supplement to the minispecs for Build/Maintain-Activity and Maintain-FreightAdrs within Build/Maintain-TMAF.

The format for CMM TT7 and TT8 transactions are contained herein.

Field, card columns and description of the CMM data elements are defined. All fields in the CMM transactions are alphanumeric.

TT7 FORMAT

FIELD	[illegible]	DESCRIPTION
1	1-3	DIC
2	4-6	ORIGIN CODE
3	7	CHANGE CODE
4	8-9	CHANGE NUMBER
5	[illegible]	AAC CURRENT
6	16-21	AAC XREF
7	22-28	XCVR TERM
8	29-30	CITY CODE
9	31	HOLIDAY CODE
10	32	MINIMIZE
11	33-38	AAC TMO
12	39-44	AAC ITO
13	45-50	AAC MMC1
14	51-56	AAC MMC2
15	57-58	ADCAT
16	59-60	LMF
17	61-62	LMF2
18	63	ETA-C-TMO
19	64	ETA-B-TMO
20	[illegible]	ETA-C-CONSIGNEE
21	66	ETA-B-CONSIGNEE
22	67	ETA-C-MMC1
23	68	ETA-B-MMC1
24	69	ETA-B-MMC2
25	70	ETA-C-MMC2
26	71-80	FILLER

TT8 FORMAT

FIELD	CC	DESCRIPTION
1	1-3	DIC
2	4-6	ORIGIN CODE
3	7	CHANGE CODE
4	8-9	CHANGE NUMBER
5	10-15	AAC CURRENT
6	16-47	UNIT DESIGNATOR
7	48-74	UNIT ADDRESS
8	75-79	APO/ZIP CODE
9	80	FILLER

TT7 "ADD" FORMAT

FIELD	CC	DESCRIPTION
1	1-3	DIC = TT7
2	4-6	Origin Code = TBD
3	7	Change Code = A
4	8-9	Change Number = TBD
5	10-15	AAC Current
6	16-21	Blank
7	22-28	Transceiver Terminal
8	29-30	City Code
9	31	Holiday Code
10	32	MINIMIZE Indicr
11	33-38	AACMCE
12	39-44	AACITO
13	45-50	AACMMC1
14	51-56	AACMMC2
15	57-58	Address Category
16	59-60	LMF
17	61-62	LMF2

18	63	ETACMCE
19	64	ETABMCE
20	65	ETACConsignee
21	66	ETACConsignee
22	67	ETACMMC1
23	68	ETABMMC1
24	69	ETACMMC2
25	70	ETABMMC2
26	71-80	Filler

Also, create a TT8 "add" formatted transaction, which is a continuation of the TT7 "add" record. The format for a TT8 "add" is as follows:

TT8 "ADD" FORMAT

FIELD	CC	DESCRIPTION
1	1-3	DIC = TT8
2	4-6	Origin Code = TBD
3	7	Change Code = A
4	8-9	Change Number = TBD
5	10-15	AAC Current
6	16-47	Unit Name
7	48-74	Unit Address
8	75-77	APO
9	80	Blank

The TT7 and TT8 "add" transactions combined will constitute one complete CMM Hold File Record.

TT7 "CHANGE" FORMAT

FIELD	CC	DESCRIPTION
1	1-3	DIC = TT7
2	4-6	Origin Code = TBD
3	7	Change Code = C
4	8-9	Change Number = TBD
5	10-15	AAC
6	16-21	NewAAC

Fields 7-25 (CC 22-70) will be filled with the new data or left blank.

TT8 "CHANGE" FORMAT

FIELD	CC	DESCRIPTION
1	1-3	DIC = TT8
2	4-6	Origin Code = TBD
3	7	Change Code =C
4	8-9	Change Number = TBD
5	10-15	AAC

Fields 6-8 (CC 16-79) will be filled with the new data or left blank.

TT7 "DELETE" FORMAT

FIELD	CC	DESCRIPTION
1	1-3	DIC = TT7
2	4-6	Origin Code = TBD
3	7	Change Code = D
4	8-9	Change Number = TBD
5	10-15	AAC

Fields 6-25 (CC 16-70) will be left blank.

There is no TT8 "delete" transaction. The TT7 "delete" transaction deletes the complete (TT7 and TT8) record.

;

KEYWORD IS: 'TMAS' ,
'LOB' ,
'TACCS' ;
APPLIES TO: Build/Maintain-Activity ;
APPLIES TO: Build/Maintain-Parameter-Tbl ;
APPLIES TO: Create-CMM-Mass-Update-File ;
APPLIES TO: Maintain-FreightAdrs ;
APPLIES TO: Parameter-Tbl-Inp ;
APPLIES TO: TMAS-System-Parameter-Tbl ;
APPLIES TO: TT7-Change-Trns-Info ;
APPLIES TO: TT7-Delete-Trns-Info ;
APPLIES TO: TT7/TT8-CMM-Trns-Info ;
APPLIES TO: TT8-Add-Trns-Info ;
APPLIES TO: TT8-Change-Trns-Info ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

2 DEFINE MEMO Code-Tbl-Validation-Memo ;
DESCRIPTION;
Code Table Validation Memo.

This procedure is used to validate codes against the values contained in their code tables. It should be used in conjunction with the Data Accountability Worksheet to determine which data elements are validated against which tables.

User may enter the data element from the keyboard, or by pressing 'HELP', display a scrollable list of valid codes.

If HELP screen is used, user may select from the screen by highlighting the desired code and pressing 'GO'. This will transfer the selected value from the 'HELP' screen to the data entry screen.

If data element is entered from the keyboard, it will be validated against its code table to see if a code exists for the value entered by the user.

If it does not pass the table edit:

DISPLAY: "Invalid (Name) Code, please re-enter', press 'HELP', or cancel this transaction.

IF: 'HELP' is chosen, the scrollable screen will be proveded as above.

ELSE: System will allow user to re-enter the code or cancel the transaction.

;

KEYWORD IS: 'Freight' ,
'Container' ,
'TMAS' ,
'LOB' ;
APPLIES TO: AACBBP ;
APPLIES TO: AACMMC ;
APPLIES TO: AACATCd ;
APPLIES TO: AddressCat-Tbl ;
APPLIES TO: BRPUnique-Tbl ;
APPLIES TO: City-Tbl ;
APPLIES TO: CityGpCd ;
APPLIES TO: CityGroup-Tbl ;
APPLIES TO: CityNme ;
APPLIES TO: CntryCd ;
APPLIES TO: Country-Tbl ;
APPLIES TO: DSSALOC-Tbl ;
APPLIES TO: DsSALOCCd ;
APPLIES TO: ETAFcstLvl-Tbl ;

```
APPLIES TO:     ETAFcstLvlCd ;
APPLIES TO:     HolAreaCd ;
APPLIES TO:     Holiday-Tbl ;
APPLIES TO:     LMF-Tbl ;
APPLIES TO:     LMFCd ;
APPLIES TO:     MACOM-Tbl ;
APPLIES TO:     MACOMCd ;
APPLIES TO:     MCECd ;
APPLIES TO:     MCETyCd ;
APPLIES TO:     MCEType-Tbl ;
APPLIES TO:     MMCUnique-Tbl ;
APPLIES TO:     MovConElm-Tbl ;
APPLIES TO:     Port-Tbl ;
APPLIES TO:     PortType-Tbl ;
APPLIES TO:     PrtCd ;
APPLIES TO:     TTPUnique-Tbl ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB' ;
```

3 DEFINE MEMO Contact-Transaction-Formats ;
DESCRIPTION;

CONTACT TRANSACTION FORMAT

CARGO ACTIVITY

DIC for CARGO ACTIVITY

Add = CFA
Change = CFC
Delete = CFD
Rename = CFR

DATA ELEMENT	CC
DIC	1-3
ChCd	4
AACCurr	5-10
UDsg	11-45
UDsgCont	46-80
CntryCd	81-82
St	83-107
BldgNo	108-117
PostCd	118-123
APO1st5	124-128
APOLst4	129-132
CityRgn	133-157
Attn	158-177
Misc/Blank	178-197
TELEX	198-217
DDNHostCd	218-229
DDNUserCd	230-241
DSSALOCCd	242
ShipToAAC	243-248
Filler/Blank	249-254
Old AACCurr	255-260

CARGO ADDRESS

DIC for CARGO ADDRESS:

Add = CFA

Change = CFC
Delete = CFD

DATA ELEMENT	CC
DIC	1-3
ChCd	4
AACCurr	5-10
UDsg	11-45
UDsgCont	46-80
CntryCd	81-82
St	83-107
BldgNo	108-117
PostCd	118-123
APO1st5	124-128
APOLst4	129-132
CityRgn	133-157
Attn	158-177
Misc/Blank/Filler	178-197
Filler	198-217
BrksKsrn	218-242
CityGpCd	243-244
TcrTml	245-251
TTPCd	252
MCEPrefix	253
MCESuffix	257
Old AACCurr	255-260

;

KEYWORD IS: 'TMAS' ,
'LOR' ,
'TACCS' ;
APPLIES TO: Build/Maintain-Activity ;
APPLIES TO: Maintain-FreightAdrs ;
RESPONSIBLE PROBLEM DEFINER IS:
'TMAS Team' ;

4 DEFINE MEMO Create-Contact-Files-Format ;
DESCRIPTION;
Create Contact Files Format
This memo is provided to show all data elements that is referenced in the minispecs for the process Create Contact Files Format.

The format for Cargo Address, Cargo Activity, Cargo Port, and Cargo Movement Control Element are contained herein.

Description of the Create Contact Files data elements are defined. Data fields are alpha/numeric.

CARGO ADDRESS FORMAT

DESCRIPTION:

BASATel
CityGpCd
FAttn
FAPO1st5
FAPOLst4
FBldgNo
FBrksKsrn
FCityCd
FCityRgn
FCntry
FMCTCivTel
FMCTMilTel
FMCTPOC
FPostCd
FSt
FUDsg
FUDsgCont
MCECd
MCEPrefix
MCESuffix
ShipToAAC
TcrTml
TTPCd

CARGO ACTIVITY FORMAT

DESCRIPTION:

AACCurr
DDNHostCd
DDNUserId
DSSALOCCd
MAttn
MAPO1st5
MAPOLst4

MBldgNo
MCityRgn
MCntry
MPostCd
MStPOBox
MUDsg
MUDsgCont
ShipToAAC
TELEX

CARGO PORT FORMAT

DESCRIPTION:
PrtTyCd
PrtCd
PrtNme

CARGO MOVEMENT CONTROL ELEMENT FORMAT

DESCRIPTION:
AACBnMCCMCC
MCECd
MCEPrefix
MCESuffix
MCETyCd
MCENme
;
KEYWORD IS: 'TMAS' ,
'LOB' ,
'PHASEII' ,
'TACCS' ;
APPLIES TO: Create-Contact-Files ;

5 DEFINE MEMO FCityCd-Memo ;
DESCRIPTION;
Freight City Code Memo.
The data element FCityCd is not in the TMAS Phase I Activity Entity. It must be provided in TMAS Phase II - i.e., DAMMS-R-1.;
KEYWORD IS: 'Freight' ,
'Container' ,
'TMAS' ,
'LOB' ,
'Data Model' ;
APPLIES TO: Activity ;
APPLIES TO: Activity-File ;
APPLIES TO: FCityCd ;
RESPONSIBLE PROBLEM DEFINER IS:
'TACCS-LOB FREIGHT GROUP' ;

APPENDIX IV. DAMMS-R Phase 1 Data Model

INDEX

PARAGRAPH	DATA MODEL SETS and ENTITIES	PAGE
1	Activity-File	IV-15
2	AddressCat-Tbl	IV-18
3	AirIdentNo-File	IV-20
4	AssetRqmt-File	IV-22
5	AssetStatus-Tbl	IV-24
6	BBPUnique-Tbl	IV-26
7	BillingAdrs-File	IV-28
8	Carrier-Tbl	IV-30
9	CgoActivity-File	IV-32
10	CgoAddress-File	IV-34
11	CgoMCE-Tbl	IV-37
12	CgoPort-Tbl	IV-39
13	ChangeType-Tbl	IV-41
14	City-Tbl	IV-43
15	CityGroup-Tbl	IV-45
16	Cntnr-System-Unique-Tables	IV-46
17	CntnrDiscrp-File	IV-47
18	CntnrMov-File	IV-49
19	CntnrMovStp-File	IV-52
20	CntnrOwnTy-Tbl	IV-54
21	Cntnr Owner-Tbl	IV-56
22	CntnrRmrkLn-File	IV-58
23	CntnrSize-Tbl	IV-60
24	Commodity-Tbl	IV-62
25	Container-Contact-Files	IV-63
26	Container-Database	IV-64
27	Container-Movements-Files	IV-64
28	CostFavor-Tbl	IV-65
29	Country-Tbl	IV-67
30	DAMMS-R-1-Database	IV-68
31	DSSALOC-Tbl	IV-69
32	Deadline-Tbl	IV-71
33	DiscrpType-Tbl	IV-73
34	ETAFcstLvl-Tbl	IV-75
35	Export-Cargo-Files	IV-76
36	ExportAir-File	IV-77
37	ExportWater-File	IV-79
38	Freight-Contact-Files	IV-81
39	Freight-Database	IV-82
40	Freight-Movements-Files	IV-82
41	Freight-System-Unique-Tables	IV-83
42	FreightAdrs-File	IV-84
43	FreightMov-File	IV-87
44	FrtDiscrp-File	IV-91
45	FrtMEvent-File	IV-93
46	FrtMovAsset-File	IV-95
47	FrtRemarkLn-File	IV-97

INDEX (continued)

PARAGRAPH	DATA MODEL SETS and ENTITIES	PAGE
48	Holiday-Tbl	IV-99
49	HwyClncCd-Tbl	IV-101
50	LMF-Tbl	IV-103
51	MACOM-Tbl	IV-105
52	MCEType-Tbl	IV-107
53	MEvent-File	IV-109
54	MEventType-Tbl	IV-112
55	MMCUnique-Tbl	IV-114
56	Month-Tbl	IV-116
57	MovConElm-Tbl	IV-118
58	MovModeCode-Tbl	IV-120
59	MsgCd-Tbl	IV-122
60	ORICO-Tbl	IV-124
61	ORICOTy-Tbl	IV-126
62	OceanCarr-Tbl	IV-128
63	OrdinalCd-Tbl	IV-130
64	Pallet463L-File	IV-132
65	Port-Tbl	IV-134
66	PortType-Tbl	IV-136
67	RailMov-File	IV-138
68	ReasonDeny-Tbl	IV-140
69	RemarkLine-File	IV-142
70	RespMediaCd-Tbl	IV-144
71	STMR-File	IV-146
72	STMR-Files	IV-147
73	STMRAdrs-File	IV-148
74	STMRStop-File	IV-150
75	ShpmtMethod-Tbl	IV-152
76	SpecialHdl-Tbl	IV-154
77	SpecialInt-Tbl	IV-156
78	SpotCd-Tbl	IV-158
79	SpotFactor-Tbl	IV-160
80	SpotLimit-File	IV-162
81	System-Parameter-Tbl	IV-164
82	TMAS-Database	IV-165
83	TMAS-System-Parameter-Tbl	IV-166
84	TMAS-System-Unique-Tables	IV-167
85	TTPUnique-Tbl	IV-168
86	Trans-Movements-Address-File	IV-169
87	TransPri-Tbl	IV-170
88	TypeAssetCd-Tbl	IV-172
89	TypeCarrier-Tbl	IV-174
90	TypeMovNo-Tbl	IV-176
91	TypeMove-Tbl	IV-178
92	VehStopPt-File	IV-180
93	VehStopPtAs-File	IV-182
94	Voyage-File	IV-184

INDEX (continued)

PARAGRAPH	DATA MODEL SETS and ENTITIES	PAGE
95	VoyageStop-File	IV-186

FIGURES

FIGURE	DATA MODEL DATA FLOW	PAGE
1	Container Data Model	IV-6
2	Freight Data Model	IV-7
3	TMAS Data Model	IV-8

STRUCTURE LIST

DATA SET Structure IV-9

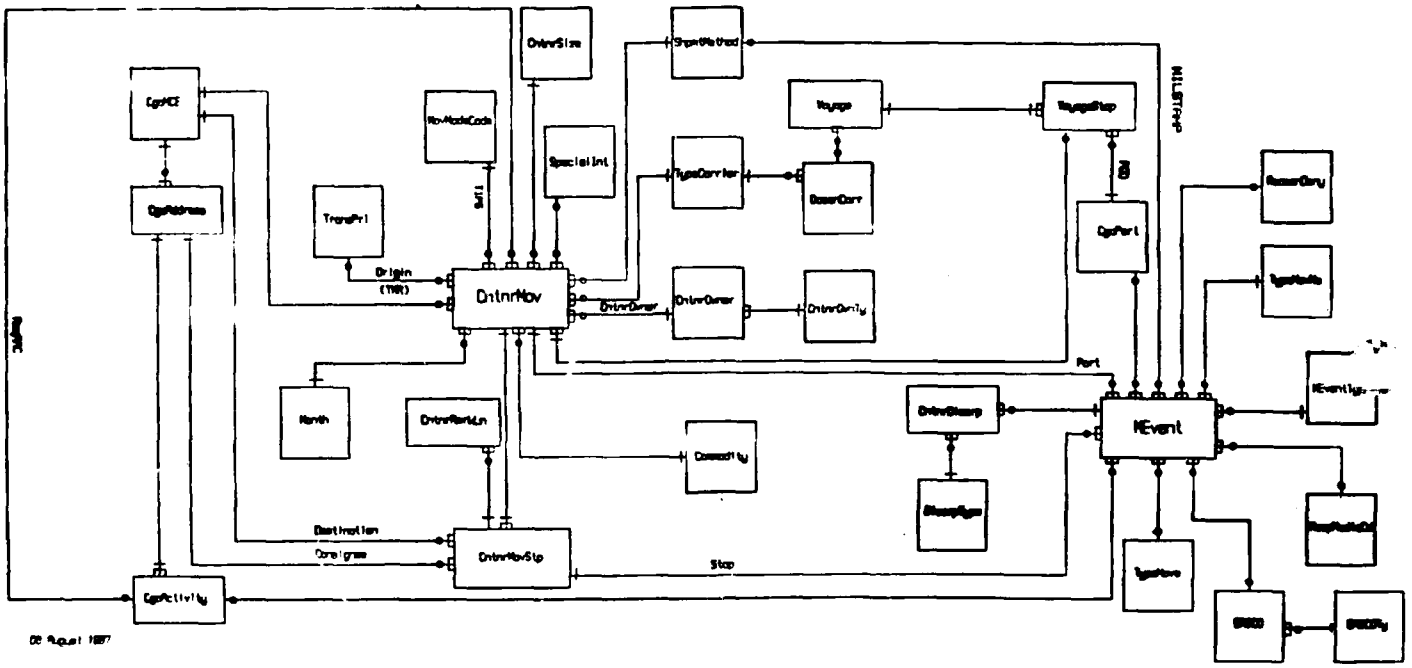


Figure 1. Container Data Model

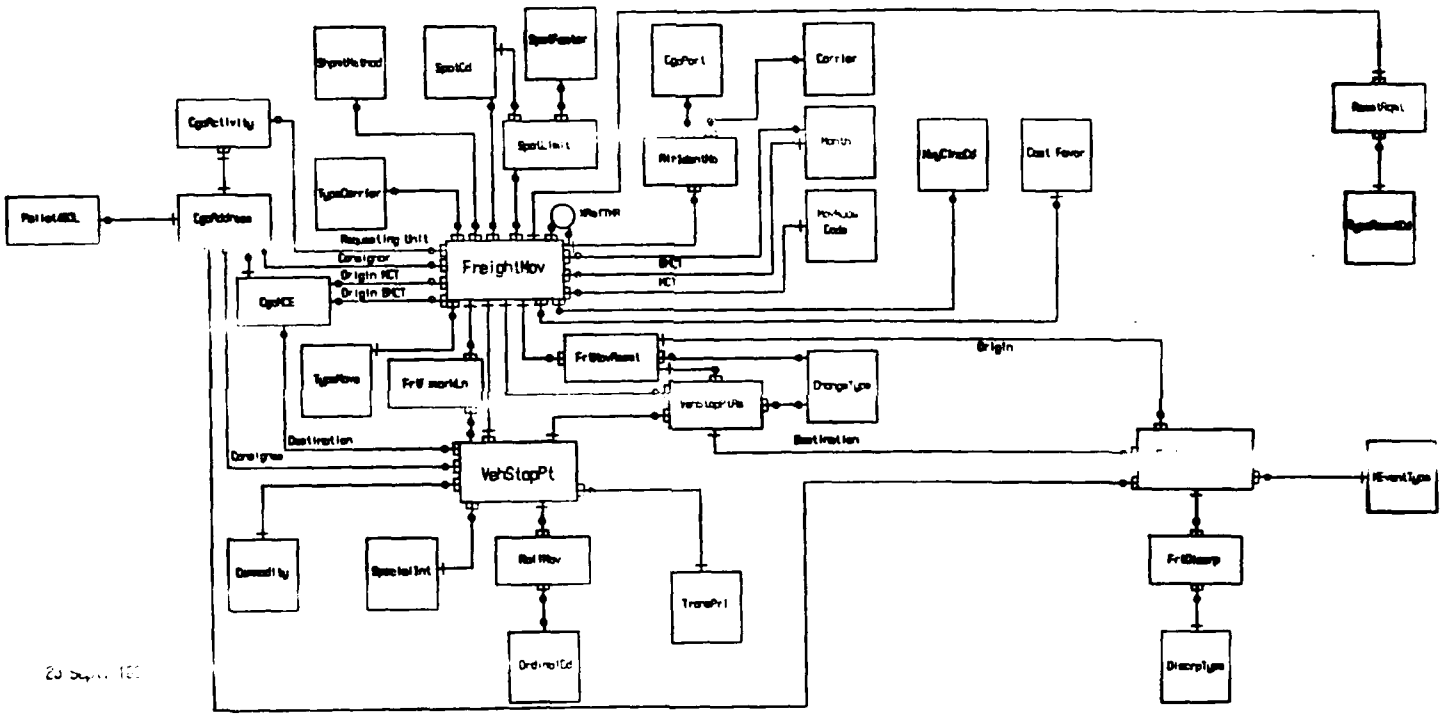


Figure 2. Freight Data Model

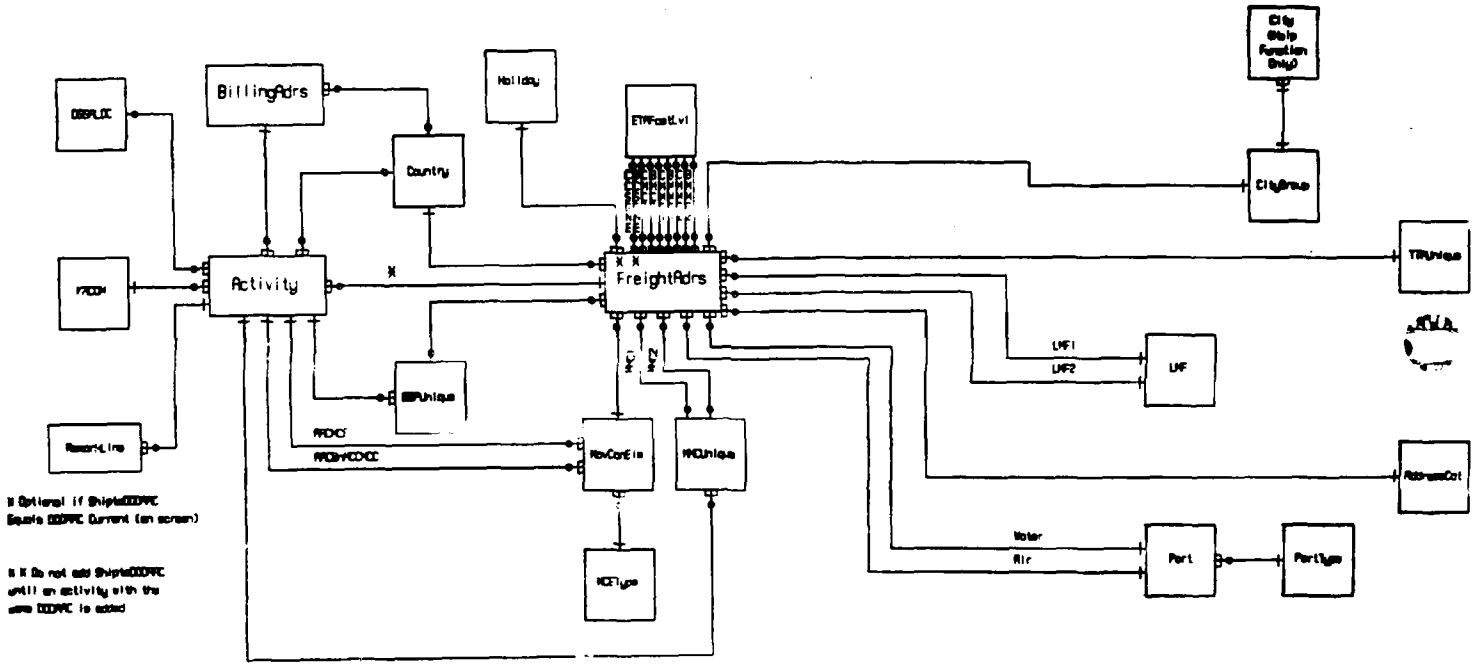


Figure 3. TMAS Data Model

DATA SET STRUCTURE

```
1 DAMMS-R-1-Database
 2   Container-Database
  3     Cntnr-System-Unique-Tables
   4        CntnrOwnTy-Tbl
    5           CntnrOwnTy
   4        CntnrOwner-Tbl
    5           CntnrOwner
   4        CntnrSize-Tbl
    5           CntnrSize
   4        Commodity-Tbl
    5           Commodity
   4        DiscrpType-Tbl
    5           DiscrpType
   4        MEventType-Tbl
    5           MEventType
   4        Month-Tbl
    5           Month
   4        MovModeCode-Tbl
    5           MovModeCode
   4        ReasonDeny-Tbl
    5           ReasonDeny
   4        RespMediaCd-Tbl
    5           RespMediaCd
   4        SpecialInt-Tbl
    5           SpecialInt
   4        TransPri-Tbl
    5           TransPri
   4        TypeCarrier-Tbl
    5           TypeCarrier
   4        TypeMovNo-Tbl
    5           TypeMovNo
   4        TypeMove-Tbl
    5           TypeMove
   4        ORICOTy-Tbl
    5           ORICOTy
   4        ORICO-Tbl
    5           ORICO
   4        CgoPort-Tbl
    5           CgoPort
   4        ShpmtMethod-Tbl
    5           ShpmtMethod
   4        CgoMCE-Tbl
    5           CgoMCE
   4        OceanCarr-Tbl
    5           OceanCarr
```

DATA SET STRUCTURE (continued)

```
3     Container-Contact-Files
 4       CgoActivity-File
  5        CgoActivity
 4       CgoAddress-File
  5        CgoAddress
3     Container-Movements-Files
 4       CntnrRmrkLn-File
  5        CntnrRmrkLn
 4       MEvent-File
  5        MEvent
 4       VoyageStop-File
  5        VoyageStop
 4       CntnrDiscrp-File
  5        CntnrDiscrp
 4       Voyage-File
  5        Voyage
 4       CntnrMov-File
  5        CntnrMov
 4       CntnrMovStp-File
  5        CntnrMovStp
3     System-Parameter-Tbl
 4       System-Parameter-Record

2   TMAS-Database
3     TMAS-System-Unique-Tables
 4       AddressCat-Tbl
  5        AddressCat
 4       BBPUnique-Tbl
  5        BBPUnique
 4       CityGroup-Tbl
  5        CityGroup
 4       Country-Tbl
  5        Country
 4       DSSALOC-Tbl
  5        DSSALOC
 4       ETAFcstLvl-Tbl
  5        ETAFcstLvl
 4       Holiday-Tbl
  5        Holiday
 4       LMF-Tbl
  5        LMF
 4       MACOM-Tbl
  5        MACOM
 4       MCEType-Tbl
  5        MCEType
```

DATA SET STRUCTURE (continued)

```
4       MMCUnique-Tbl
 5         MMCUnique
4       MovConElm-Tbl
 5         MovConElm
4       PortType-Tbl
 5         PortType
4       TTPUnique-Tbl
 5         TTPUnique
4       Port-Tbl
 5         Port
4       City-Tbl
 5         City
3     Trans-Movements-Address-File
4       Activity-File
 5         Activity
4       BillingAdrs-File
 5         BillingAdrs
4       RemarkLine-File
 5         RemarkLine
4       FreightAdrs-File
 5         FreightAdrs
3     TMAS-System-Parameter-Tbl
4       TMAS-System-Parameter-Record

2   Freight-Database
3     System-Parameter-Tbl
4       System-Parameter-Record
3     Export-Cargo-Files
4       ExportWater-File
 5         ExportWater
4       ExportAir-File
 5         ExportAir
3     Freight-Contact-Files
4       CgoActivity-File
 5         CgoActivity
4       CgoAddress-File
 5         CgoAddress
4       STMRAdrs-File
 5         STMRAdrs
3     Freight-Movements-Files
4       AirIdentNo-File
 5         AirIdentNo
4       AssetRqmt-File
 5         AssetRqmt
```

DATA SET STRUCTURE (continued)

```
4       FrtRemarkLn-File
 5         FrtRemarkLn
4       SpotLimit-File
 5         SpotLimit
4       Pallet463L-File
 5         Pallet463L
4       FreightMov-File
 5         FreightMov
4       FrtDiscrp-File
 5         FrtDiscrp
4       FrtMEvent-File
 5         FrtMEvent
4       VehStopPtAs-File
 5         VehStopPtAs
4       VehStopPt-File
 5         VehStopPt
4       FrtMovAsset-File
           FrtMovAsset
4       RailMov-File
 5         RailMov
3     STMR-Files
4       STMR-File
           STMR
4       STMRStop-File
           STMRStop
3     Freight-System-Unique-Tables
4       Commodity-Tbl
 5         Commodity
4       DiscrpType-Tbl
 5         DiscrpType
4       MEventType-Tbl
 5         MEventType
4       Month-Tbl
 5         Month
4       MovModeCode-Tbl
 5         MovModeCode
4       RespMediaCd-Tbl
 5         RespMediaCd
4       SpecialInt-Tbl
 5         SpecialInt
4       TransPri-Tbl
 5         TransPri
4       TypeCarrier-Tbl
 5         TypeCarrier
4       TypeMove-Tbl
```

DATA SET STRUCTURE (continued)

```
 5        TypeMove
 4      CgoPort-Tbl
 5        CgoPort
 4      ShpmtMethod-Tbl
 5        ShpmtMethod
 4      CgoMCE-Tbl
 5        CgoMCE
 4      AssetStatus-Tbl
 5        AssetStatus
 4      Carrier-Tbl
 5        Carrier
 4      ChangeType-Tbl
 5        ChangeType
 4      CostFavor-Tbl
 5        CostFavor
 4      Deadline-Tbl
 5        Deadline
 4      SpotCd-Tbl
 5        SpotCd
 4      TypeAssetCd-Tbl
 5        TypeAssetCd
 4      OrdinalCd-Tbl
 5        OrdinalCd
 4      SpecialHdl-Tbl
 5        SpecialHdl
 4      HwyClncCd-Tbl
 5        HwyClncCd
 4      MsgCd-Tbl
 5        MsgCd
 4      SpotFactor-Tbl
 5        SpotFactor
```

```
1       DEFINE SET                              Activity-File ;
      DESCRIPTION;
Activity File.
This file is a collection of activity records and contains addressing
information for all DODAAC and pseudo-DODAAC in the theater.
 ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          volatility         'DYNAMIC' ,
          UPDATE-METHOD       'INTERACTIVE' ,
          UPDATE-FREQUENCY
                             'AS PER CHANGE' ,
          EST-VOLUME         '10,000 RECORDS' ,
          TABLE-FORM         'COMMAND' ,
          EST-SIZE           '371 CHAR RECORDS' ;
     SOURCE IS:         'TMAS DATA MODEL' ;
     KEYWORD IS:        'TMAS' ,
                        'LOG' ,
                        'Data Model' ,
                        'TACCS' ;
     COLLECTION OF:
          Activity ;


     Define Entity                          Activity ;
     DESCRIPTION;
Activity.
This entity consists of mailing address information, point-of-contact
information, and other related data for every Activity Address Code in
the system.
 ;
     LAYOUT;

DATA MODEL:

      Activity:BillingAdrs, Opt Many:Mand1
      Activity:Country, Opt Many:Opt1
      Activity:FreightAdrs, Opt Many:Mand1 (Optional if ShipToAAC
          equals AACCurr, on screen)
      Activity:PBPUnique, Mand1:Opt Many
      Activity:MovConElm, Mand1:Opt Many (AACMCE)
      Activity:MovConElm, Mand1:Opt Many (AACBnMC/CMCC)
      Activity:MMCUnique, Mand1:Opt Many
      Activity:MACOM, Opt Many:Mand1
      Activity:RemarkLine, Mand1:Opt Many
      Activity:DSSALOC, Opt Many:Opt1
```

LOGICAL DATABASE DESIGN:

AACCurr	6	P
AACXRef	6	S
UICCurr	6	S
MUDsg	35	S
DteRecFrLSSA	5	S
DteToLSSA	5	S
UICOld	6	
TMA[illegible]LstUpd	5	
MUDsgCont	35	
MS+POBox	25	
MBldgNo	10	
MAttn	20	
MPostCd	6	
MCityRgn	25	
MAPO1st5	5	
MAPOLst4	4	
MDteLstUpd	5	
EffDte	5	
ContrNo	20	
ContrStart	5	
ContrEnd	5	
PSPPOC	25	
PSPMilTel	15	
PSPCivTel	25	
CMMIndicrCd	1	
TELEX	20	
DDNUserID	12	
DDNHostCd	12	
MACOMCd	3	F
ShipToAAC	6	F
BFSN	5	F
DSSALOCCd	1	F
MCntry	2	F

PARTITION:

Activity	**CRUD**
BillingAdrs	R
MACOM	R
Country	R
DSSALOC	R
RemarkLine	CRUD
BBPUnique	R
MMCUnique	R
MovConLim	R
FreightAdrs	CRD

```
        ETAFcstLvl                          R
        Country                             R
        Port                                R
        TTPUnique                           R
        AddressCat                          R
        Holiday                             R
        LMF                                 R
        CityGroup                           R
             City                           R;
ATTRIBUTE IS:
        volatility      'DYNAMIC' ,
        RETENTION       'PERMANENT' ,
        PICTURE         'X(371)' ,
        FIELD-LENGTH     '371' ,
        SEC-CLASS       'UNCLASSIFIED' ,
        TYPE            'AN' ;
SOURCE IS:      'TMAS DATA MODEL' ;
KEYWORD IS:     'TMAS' ,
                'LOB' ,
                'Data Model' ;
CARDINALITY IS:
                10000 ;
COLLECTION:     IN Activity-File ;
```

```
2       DEFINE SET                              AddressCat-Tbl ;
    DESCRIPTION;
Address Category Table.
This table is a collection of ADCAT code values and their descriptions.
 ;
    ATTRIBUTE IS:
        MEDIA           'DISK' ,
        SEC-CLASS       'UNCLASSIFIED' ,
        volatility      'STATIC' ,
        UPDATE-METHOD     'INTERACTIVE' ,
        UPDATE-FREQUENCY
                        'AS PER CHANGE' ,
        TABLE-FORM      'COMMAND' ,
        EST-SIZE        '62 CHAR RECORDS' ,
        EST-VOLUME      '30 RECORDS' ;
    SOURCE IS:          'TMAS DATA MODEL' ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    COLLECTION OF:
        AddressCat ;

    Define Entity                           AddressCat ;
    DESCRIPTION;
Address Category.
This entity consists of ADCAT codes and their descriptions.
 ;
    LAYOUT;

DATA MODEL:

     AddressCat:FreightAdrs, Mand1:Opt Many


LOGICAL DATABASE DESIGN:

     ADCATCd                                 2    P
     ADCATCdDescr                           60


PARTITION:

     AddressCat                             CRUD
     FreightAdrs                            RU;
    ATTRIBUTE IS:
        volatility      'STATIC' ,
        SEC-CLASS       'UNCLASSIFIED' ,
        TYPE            'AN' ,
```

```
     PICTURE          'X(62)' ,
     FIELD-LENGTH      '62' ;
SOURCE IS:       'TMAS DATA MODEL' ;
KEYWORD IS:      'TMAS' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 30 ;
COLLECTED:       IN AddressCat-Tbl ;
```

3 DEFINE SET AirIdentNo-File ;
DESCRIPTION;
Air Identification Number File.
This file is a collection of Air Identification Number records.
;
ATTRIBUTE IS:
MEDIA 'DISK' ,
SEC-CLASS 'UNCLASSIFIED' ,
UPDATE-FREQUENCY
'DAILY' ,
UPDATE-METHOD 'INTERACTIVE-BATCH' ,
TABLE-FORM 'LOCAL' ,
volatility 'DYNAMIC' ,
EST-SIZE '27 CHAR RECORDS' ;
SOURCE IS: 'FREIGHT DATA MODEL' ;
KEYWORD IS: 'Freight' ,
'Data Model' ,
'LOB' ,
'TACCS' ;
COLLECTION OF:
AirIdentNo ;

Define Entity AirIdentNo ;
DESCRIPTION;
Air Identification Number.
This entity is the occurrence of the specific military aircraft from which cargo was off loaded. This record is the master file record for the Air Identification File.
;
LAYOUT;

DATA MODEL:

AirIdentNo:FreightMov, Opt Many:Mand 1
AirIdentNo:Carrier, Opt Many:Opt 1
AirIdentNo:CgoPort, Opt Many:Mand 1

LOGICAL DATABASE DESIGN:

TMRPrefix	6	P/F
StpSeqNo	1	P/F
USAFSerNo	5	P
TrkManRefCd	2	S
DteCgoTrf	5	
ManStaCd (PrtCd)	3	F
CarrNme	5	F

```
PARTITION

    AirIdentNo                                  RU
        FreightMov                              RU
        CgoPort                                 R
        Carrier                                 R;
    ATTRIBUTE IS:
         SEC-CLASS        'UNCLASSIFIED' ,
         TYPE             'AN' ,
         volatility       'DYNAMIC' ,
         FIELD-LENGTH      '27' ,
         PICTURE          'X(27)' ;
    SOURCE IS:       'FREIGHT DATA MODEL' ;
    KEYWORD IS:      'Freight' ,
                     'LCD' ,
                     'Data Model' ;
    COLLECTED:       IN AirIdentNo-File ;
```

```
4       DEFINE SET                              AssetRqmt-File ;
    DESCRIPTION;
Asset Requirement File.
This file is a collection of Asset Requirement records.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         UPDATE-FREQUENCY
                            'DAILY' ,
         UPDATE-METHOD       'INTERACTIVE-BATCH' ,
         TABLE-FORM         'LOCAL' ,
         EST-SIZE           '10 CHAR RECORD' ,
         volatility         'DYNAMIC' ;
    SOURCE IS:          'FREIGHT DATA MODEL' ;
    KEYWORD IS:         'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
    COLLECTION OF:
         AssetRqmt ;

    Define Entity                           AssetRqmt ;
    DESCRIPTION;
Asset Requirement.
This entity is an occurrence of the requested number and type of
conveyance for a freight movement. This record is the master file record
for the Asset Requirement File.
 ;
    LAYOUT;

DATA MODEL:

     AssetRqmt:TypeAssetCd, Opt Many:Mand 1
     AssetRqmt:FreightMov, Mand Many:Mand 1



LOGICAL DATABASE DESIGN:


     TMRPrefix                              6       P/F
     TyAsCd                                 2       P/F
     AsQty                                  2


PARTITION

     None;
     ATTRIBUTE IS:
          SEC-CLASS         'UNCLASSIFIED' ,
```

AD-A190 395 FUNCTIONAL DESCRIPTION FOR THE DEPARTMENT OF THE ARMY 4/10
MOVEMENTS MANAGEMEN..(U) INTERNATIONAL BUSINESS
SERVICES INC PRINCE GEORGE VA DEFENSE S.. W ANCKAITIS
UNCLASSIFIED 31 DEC 87 DSDPG-375-049-87-3-VOL-3 F/G 12/7 NL

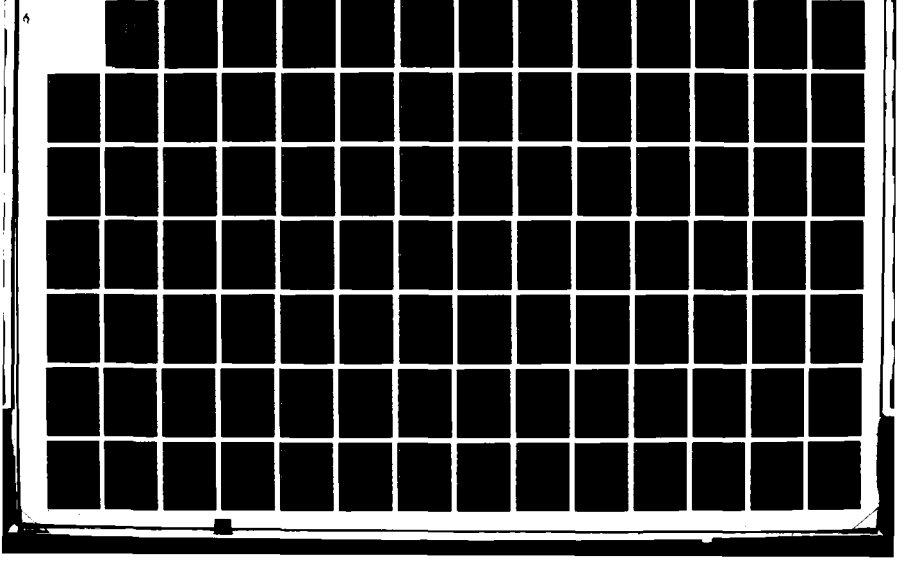

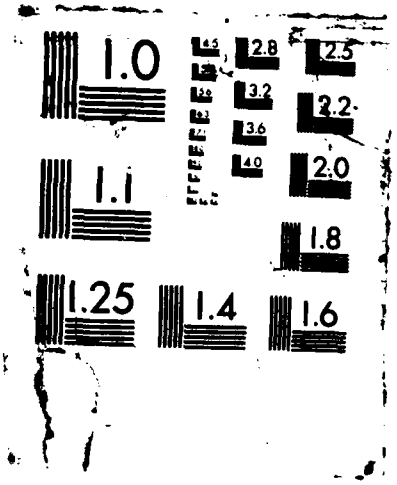
1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0

```
      TYPE              'AN' ,
      PICTURE           'X(10)' ,
      FIELD-LENGTH      '10' ,
      volatility        'DYNAMIC' ;
SOURCE IS:        'FREIGHT DATA MODEL' ;
KEYWORD IS:       'Freight' ,
                  'LOB' ,
                  'Data Model' ;
COLLECTED:        IN AssetRqmt-File ;
```

```
5       DEFINE SET                          AssetStatus-Tbl ;
    DESCRIPTION;
Asset Status Table.
This table is a collection of Status Code values and descriptions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         RETENTION          'PERMANENT' ,
         UPDATE-FREQUENCY
                            'PER CODE CHANGE' ,
         UPDATE-METHOD        'BATCH' ,
         TABLE-FORM         'COMMAND' ,
         EST-VOLUME         '50 RECORDS' ,
         ESTDA-SIZE           '52 CHAR RECORDS' ,
         volatility         'STATIC' ;
    SOURCE IS:      'FREIGHT DATA MODEL' ;
    KEAEYWORD IS:     'Freight' ,
                    'Data Model' ,
                    'LOB' ,
                    'TACCS' ;
    COLLECTION OF:
         AssetStatus ;

    Define Entity                       AssetStatus ;
    ADESCRIPTION;
Asset Status.
This entity is the occurrence of a specific Status Code and Status Code
description. This is the master record for the Asset Status Table.
 ;
    LAYOUT;

DATA MODEL:

     Not connected.


LOGICAL DATABASE DESIGN:

     StaCd                              2     P
     StaCdDescr                         50


PARTITION

     AssetStatus                        CRD;
    ATTRIBUTE IS:
         SEC-CLASS          'UNCLASSIFIED' ,
         TYPE               'AN' ,
```

```
     PICTURE          'X(52)' ,
     FIELD-LENGTH      '52' ,
     RETENTION        'PERMANENT' .
     volatility       'STATIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'Freight' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 50 ;
COLLECTED:       IN AssetStatus-Tbl ;
```

```
6       DEFINE SET                              BBPUnique-Tbl ;
    DESCRIPTION;
Breakbulk Point Unique Table.
This table is a collection of Breakbulk Point DODAAC and their unit
descriptions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'STATIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         EST-SIZE           '41 CHAR RECORDS' ,
         TABLE-FORM         'COMMAND' ;
    SOURCE IS:        'TMAS DATA MODEL' ;
    KEYWORD IS:       'TMAS' ,
                      'LOB' ,
                      'Data Model' ,
                      'TACCS' ;
    COLLECTION OF:
         BBPUnique ;

    Define Entity                           BBPUnique ;
    DESCRIPTION;
Breakbulk Point Unique.
This entity consists of Breakbulk Point DODAAC and their unit
designation.
 ;
    LAYOUT;

DATA MODEL:

     BBPUnique:FreightAdrs, Opt1:Opt Many
     BBPUnique:Activity, Opt Many:Mand1


LOGICAL DATABASE DESIGN:
     AACBBP                                  6    P/F
     AACBBPDescr                            35


PARTITION:

     BBPUnique                              CRUD
     FreightAdrs                            RU
     Activity                               R;
    ATTRIBUTE IS:
         volatility         'STATIC' ,
```

```
        SEC-CLASS       'UNCLASSIFIED' ,
        PICTURE         'X(41)' ,
        FIELD-LENGTH     '41' ,
        TYPE            'AN' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ;
    COLLECTED:      IN BBPUnique-Tbl ;
```

```
7       DEFINE SET                          BillingAdrs-File ;
    DESCRIPTION;
Billing Address File.
This file contains location information about the fiscal station number
responsible for administering the billing function.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'DYNAMIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         EST-SIZE           '142 CHAR RECORDS' ,
         EST-VOLUME         '31 RECORDS' ;
         TABLE-FORM         'COMMAND' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    COLLECTION OF:
         BillingAdrs ;

    Define Entity                       BillingAdrs ;
    DESCRIPTION;
Billing Address
This entity consists of the fiscal station number, unit designation, and
address information of organizations responsible for administering the
billing function.
 ;
    LAYOUT;

DATA MODEL:

     BillingAdrs:Country, Opt Many:Opt1
     BillingAdrs:Activity, Mand1:Opt Many


LOGICAL DATABASE DESIGN:

     BFSN                          5     P
     BUDsg                        35     S
     BStPOBox                     25
     BBldgNo                      10
     BAttn                        20
     BPostCd                       6
     BCityAgn                     25
     BAPO1st5                      5
```

```
     BAPOLst4                              4
     BDteLstUpd                            5
     BCntry                                2     F


PARTITION:
     BillingAdrs                           CRUD
     Activity                              RU
     Country                               R;
     ATTRIBUTE IS:
          volatility      'DYNAMIC' ,
          TYPE            'AN' ,
          PICTURE         'X(142)' ,
          FIELD-LENGTH     '142' ,
          SEC-CLASS       'UNCLASSIFIED' ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     KEYWORD IS:     'IMAS' ,
                     'LOB' ,
                     'Data Model' ;
     CARDINALITY IS:
                     31 ;
     COLLECTED:      IN BillingAdrs-File ;
```

```
8       DEFINE SET                              Carrier-Tbl ;
    DESCRIPTION;
Carrier Table.
This table contains Carrier Category Code (carrier name) values and
their descriptions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         RETENTION          'PERMANENT' ,
         UPDATE-FREQUENCY
                            'PER CODE CHANGE' ,
         UPDATE-METHOD        'BATCH' ,
         TABLE-FORM         'COMMAND' ,
         EST-VOLUME         '5 RECORDS' ,
         EST-SIZE           '30 CHAR RECORDS' ,
         volatility         'STATIC' ;
    SOURCE IS:          'FREIGHT DATA MODEL' ;
    KEYWORD IS:         'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
    COLLECTION OF:
         Carrier ;

    Define Entity                               Carrier ;

Carrier.
This entity is an occurrence of a specific Carrier Name Code and Carrier
description. This is the master record for the Carrier Table.
 ;
    LAYOUT;

DATA MODEL:

     Carrier:AirIdentNo, Opt 1:Opt Many


LOGICAL DATABASE DESIGN:

     CarrNme                                    5       P
     CarrDescr                                  25


PARTITION:

     Carrier                                    CRD;
    ATTRIBUTE IS:
         SEC-CLASS          'UNCLASSIFIED' ,
```

```
     TYPE              'AN' ,
     PICTURE           'X(30)' ,
     FIELD-LENGTH       '30' ,
     volatility        'STATIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'Freight' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 5 ;
COLLECTED:       IN Carrier-Tbl ;
```

```
9       DEFINE SET                          CgoActivity-File ;
    DESCRIPTION;
Cargo Activity File.
This file is a collection of mailing address and related information for
all DODAAC and pseudo-DODAAC in the theater. It is a subset of the
information for ' ' in the Activity File in the Transportation Movements
Address System (TMAS).
 ;
    ATTRIBUTE IS:
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'DYNAMIC' ,
         EST-SIZE           '229 CHAR RECORDS' ,
         EST-VOLUME         '10,000 RECORDS' ,
         TABLE-FORM         'COMMAND' ,
         MEDIA              'DISK' ,
         REGULATION         'USAREUR REG 55-5' ,
         RETENTION          'PERMANENT' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         UPDATE-METHOD      'INTERACTIVE-BATCH' ,
    SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
    KEYWORD IS:     'Freight' ,
                    'Container' ,
                    'Data Model' ,
                    'LOB' ,
                    'TACCS' ;
    COLLECTION OF:
         CgoActivity ;

    Define Entity                           CgoActivity ;
    DESCRIPTION;
Cargo Activity.
This entity is an occurrence of information about a consignor or con-
signee for cargo or containers, including the military address, DDN
information, etc.  This is the master file record for the CgoActiv-
ity-File.
 ;
    LAYOUT;

LOGICAL DATABASE DESIGN:

     AACCurr                            6      P
     MBldgNo                            10
     MCntry                             2
     MUDsg                              35     S
     MStPOBox                           25
     MPostCd                            6
     MCity_Desc                         25
     MAttn                              20
```

MUDsgCont	35	
MAPO1st5	5	
MAPOLst4	4	
DteLstUpdCgoActv	5	
DDNHostCd	12	
DDNUserId	12	
TELEX	20	
DSSALOCCd	1	S
ShipToAAC	6	F

FREIGHT DATA MODEL:

CgoActivity:CgoAddress, Mand Many:Mand 1
CgoActivity:FreightMov, Opt 1:Opt Many (Requesting Unit)

FREIGHT PARTITION:

CgoActivity	CRD	
CgoAddress	R	

CONTAINER DATA MODEL:

CgoActivity:CgoAddress, Mand Many:Mand 1
CgoActivity:MEvent, Opt 1:Opt Many

CONTAINER PARTITION:

CgoActivity	CRD	
CgoAddress	R	

ATTRIBUTE IS:

volatility	'DYNAMIC' ,
TYPE	'AN' ,
PICTURE	'X(229)' ,
FIELD-LENGTH	'229' ,
RETENTION	'PERMANENT' ,
SEC-CLASS	'UNCLASSIFIED' ;

SOURCE IS: 'CNTNR/FRT DATA MODEL' ;
KEYWORD IS: 'LOB' ,
'Data Model' ,
'Container' ,
'Freight' ;
CARDINALITY IS:
10000 :
COLLECTED: IN CgoActivity-File ;

10 DEFINE SET CgoAddress-File ;
DESCRIPTION;
Cargo Address.
This file is a collection of cargo address information for shipping and receiving activities. It is a subset of the information found in the Freight Address File in the Transportation Movements Address System (TMAS).
;
ATTRIBUTE IS:
MEDIA 'DISK' ,
SEC-CLASS 'UNCLASSIFIED' ,
RETENTION 'PERMANENT' ,
UPDATE-FREQUENCY
'DAILY' ,
UPDATE-METHOD 'INTERACTIVE-BATCH' ,
TABLE-FORM 'COMMAND' ,
EST-SIZE '300 CHAR RECORDS' ,
volatility 'DYNAMIC' ;
SOURCE IS: 'CONTAINER DATA MODEL' ,
'FREIGHT DATA MODEL' ;
KEYWORD IS: 'Freight' ,
'Container' ,
'LOB' ,
'TACCS' ,
[illegible] ;
COLLECTION OF:
CgoAddress ;

Define Entity CgoAddress ;
DESCRIPTION;
Freight Address.
This entity is the occurrence of information relating to organizations that can receive cargo shipments. This record is the master file record of the Cargo Address File.
;
LAYOUT;

LOGICAL DATABASE DESIGN:

ShipToAAC	6	P
DteLstUpdCgoAdrs	5	S
FSt	25	
FBldgNo	10	
FBrksKsrn	25	
FCityRgn	25	
FCityCd	5	S
FCityRgnLst20	20	
Fentry	2	
FPostCd	6	

FAttn	20	
FMCTCivTel	**25**	
FMCTMilTel	15	
FMCTPOC	25	
FAPO1st5	**5**	
FAPOLst4	4	
FUDsgCont	**35**	
FUDsg	35	S
CityGpCd	2	S
TTPCd	1	S
TcrTml	7	
BASATel	20	
MCECd	2	F
MCEPrefix	1	F
MCESuffix	1	F

FREIGHT DATA MODEL:

CgoAddress:FreightMov, Opt 1:Opt Many (Consignor)
CgoAddress:Pallet463L, Mand 1:Opt 1
CgoAddress:VehStopPt, Opt 1:Opt Many (Consignee)
CgoAddress:CgoActivity, Mand 1:Mand Many
CgoAddress:CgoMCE, Opt Many:Mand 1
CgoAddress:FrtMEvent, Mand 1:Opt Many

NOTE: **Relationship to FreightMov and VehStopPt are optional on side of CgoAddress for the time being. Consignor and Consignee are mandatory fields, but if DODAAC is not in CgoAddress, operator must be able to override and continue to process a movement.**

FREIGHT PARTITION:

CgoAddress	CRUD
CgoActivity	R
CgoMCE	R

CONTAINER DATA MODEL:

CgoAddress:CgoMCE, Opt Many:Mand 1
CgoAddress:CntnrMovStp, Mand 1:Opt Many (Consignee)
CgoAddress:CgoActivity, Mand 1:Mand Many

CONTAINER PARTITION:

```
 CgoAddress                              CRUD
    CgoMCE                               R
    CgoActivity                          R;
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     volatility      'DYNAMIC' ,
     PICTURE         'X(300)' ,
     FIELD-LENGTH     '300' ,
     EST-VOLUME      '6,000-8,000 RECORDS' ;
SOURCE IS:      'CONTAINER DATA MODEL' ,
                'FREIGHT DATA MODEL' ;
KEYWORD IS:     'Freight' ,
                'Container' ,
                'LOB' ,
                'Data Model' ;
CARDINALITY IS:
                8000 ;
COLLECTED:      IN CgoAddress-File ;
```

```
11      DEFINE SET                              CgoMCE-Tbl ;
    DESCRIPTION;
Cargo Movement Control Element Table.
This table is a collection of Movement Control Element Code records.
It is a subset of the Movement Control Element Table in the
Transportation Movements Address System (TMAS).
 ;
    ATTRIBUTE IS:
        MEDIA           'DISK' ,
        SEC-CLASS       'UNCLASSIFIED' ,
        RETENTION       'PERMANENT' ,
        UPDATE-FREQUENCY
                        'PER CODE CHANGE' ,
        UPDATE-METHOD     'BATCH' ,
        TABLE-FORM      'COMMAND' ,
        EST-VOLUME      '70 RECORDS' ,
        EST-SIZE        '44 CHAR RECORDS' ,
        volatility      'STATIC' ;
    SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
    KEYWORD IS:     'Freight' ,
                    'Container' ,
                    'LOB' ,
                    'TACCS' ,
                    'Data Model' ;
    COLLECTION OF:
        CgoMCE ;

    Define Entity                           CgoMCE ;
    DESCRIPTION;
Cargo Movement Control Element
This entity is an occurrence of a specific Movement Control Element
Code, MCE Type Code, and MCE name.  This is the master record for the
cargo Movement Control Element Table.
 ;
    LAYOUT;

LOGICAL DATABASE DESIGN:

     MCECd                                  2    P
         MCEPrefix                          1    S
         MCESuffix                          1
     MCETyCd                                1    S
     MCENme                                 35   S
     AACBnMCCMCC                            6    S

FREIGHT DATA MODEL:

    CgoMCE:FreightMov, Mand 1:Opt Many (Origin MCT)
    CgoMCE:FreightMov, Opt 1:Opt Many (Origin BMCT)
```

CgoMCE:VehStopPt, Opt 1:Opt Many (Destination)
CgoMCE:CgoAddress, Mand 1:Opt Many

NOTE: Relationships to FreightMov and VehStopPt are optional on side of CgoMCE because MCECd is normally obtained through CgoAddress.

FREIGHT PARTITION:

CgoMCE	CRD
CgoAddress	R

CONTAINER DATA MODEL:

CgoMCE:CntnrMov, Mand 1:Opt Many (Origin, TMR)
CgoMCE:CntnrMovStp, Mand 1:Opt Many (Destination)
CgoMCE:CgoAddress, Mand 1:Opt Many

CONTAINER PARTITION:

```
CgoMCE                                  CRD,
ATTRIBUTE IS:
     SEC-CLASS          'UNCLASSIFIED' ,
     TYPE               'AN' ,
     PICTURE            'X(44)' ,
     FIELD-LENGTH        '44' ,
     RETENTION          'PERMANENT' ,
     volatility         'STATIC' ;
SOURCE IS:         'CONTAINER DATA MODEL' ,
                   'FREIGHT DATA MODEL' ;
KEYWORD IS:        'LOB' ,
                   'Freight' ,
                   'Container' ,
                   'Data Model' ;
CARDINALITY IS:
                   70 ;
COLLECTED:         IN CgoMCE-Tbl ;
```

```
12        DEFINE SET                              CgoPort-Tbl ;
      DESCRIPTION;
   Cargo Port Table.
   This table contains MILSTAMP Port Codes and their descriptions.
    ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'STATIC' ,
           UPDATE-METHOD       'INTERACTIVE' ,
           UPDATE-FREQUENCY
                              'PER CODE CHANGE' ,
           RETENTION          'PERMANENT' ,
           TABLE-FORM         'COMMAND' ,
           EST-SIZE           '29 CHAR RECORDS' ,
           EST-VOLUME         '332 RECORDS' ;
      SOURCE IS:         'CONTAINER DATA MODEL' ,
                         'FREIGHT DATA MODEL' ;
      KEYWORD IS:        'Container' ,
                         'Freight' ,
                         'Data Model' ,
                         'TACCS' ;
      COLLECTION OF:
           CgoPort ;

      Define Entity                          CgoPort ;
      DESCRIPTION,
   Cargo Port.
   This entity is an occurrence of a specific MILSTAMP Port Code, Port Type
   and Port Name. This is the master record for the Cargo Port Table.
    ;
      LAYOUT;

   FREIGHT DATA MODEL:

        CgoPort:AirIdentNo, Opt 1:Opt Many

   FREIGHT LOGICAL DATABASE DESIGN:

        PrtCd                                  3     P
        PrtTyCd                                1
        PrtNme                                25

   FREIGHT PARTITION:

        CgoPort                                CRD

   CONTAINER DATA MODEL:
```

CgoPort:MEvent, Opt 1:Opt Many
CgpPort:VoyageStop, Mand 1:Opt Many (POD)

CONTAINER LOGICAL DATABASE DESIGN:

PrtCd	3	P
PrtTyCd	1	
PrtNme	25	

CONTAINER PARTITION:

CgoPort CRD

;

ATTRIBUTE IS:
FIELD-LENGTH '29' ,
TYPE 'AN' ,
PICTURE 'X(29)' ,
SEC-CLASS 'UNCLASSIFIED' ,
RETENTION 'PERMANENT' ,
Volatility 'STATIC' ;
SOURCE IS: 'CONTAINER DATA MODEL' ,
'FREIGHT DATA MODEL' ;
KEYWORD IS: 'Freight' ,
'Container' ,
'Data Model' ,
'LOB' ;
CARDINALITY IS:
332 ;
COLLECTED: IN CgoPort-Tbl ;

```
13        DEFINE SET                              ChangeType-Tbl ;
     DESCRIPTION;
Change Type Table.
This table contains Change Codes and their descriptions.
 ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          RETENTION          'PERMANENT' ,
          UPDATE-FREQUENCY
                             'PER CODE CHANGE' ,
          UPDATE-METHOD        'BATCH' ,
          TABLE-FORM         'COMMAND' ,
          EST-SIZE           '51 CHAR RECORDS' ,
          volatility         'STATIC' ,
          EST-VOLUME         '2 RECORDS' ;
     SOURCE IS:         'FREIGHT DATA MODEL' ;
     KEYWORD IS:        'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
     COLLECTION OF:
          ChangeType ;

     Define Entity                              ChangeType ;
     DESCRIPTION;
Change Type.
This entity is the occurrence of a specific Change Code and Change Code
description. This is the master record for the Change Type Table.
 ;
     LAYOUT;

DATA MODEL:

      ChangeType:VehStopPtAs, Opt 1:Opt Many
      ChangeType:FrtMovAsset, Opt 1:Opt Many

LOGICAL DATABASE DESIGN:
      ChCd                                      1      P
      ChCdDescr                                 50


PARTITION:

      ChangeType                                CRD;
     ATTRIBUTE IS:
          SEC-CLASS          'UNCLASSIFIED' ,
          TYPE               'AN' ,
          PICTURE            'X(51)' ,
```

```
     FIELD-LENGTH     '51' ,
     RETENTION        'PERMANENT' ,
     volatility       'STATIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'Freight' ,
                 'LOD' ,
                 'Data Model' ;
CARDINALITY IS:
                 2 ;
COLLECTED:       IN ChangeType-Tbl ;
```

```
14      DEFINE SET                              City-Tbl ;
    DESCRIPTION;
City Table.
This table contains city names and their associated City Group Code.
 ;
    ATTRIBUTE IS:
        MEDIA           'DISK' ,
        SEC-CLASS       'UNCLASSIFIED' ,
        volatility      'STATIC' ,
        UPDATE-METHOD     'INTERACTIVE' ,
        UPDATE-FREQUENCY
                        'AS PER CHANGE' ,
        EST-SIZE        '27 CHAR RECORDS' ,
        TABLE-FORM      'COMMAND' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    COLLECTION OF:
        City ;

    Define Entity                           City ;
    DESCRIPTION;
City.
This entity consists of city names and their associated city group codes
 ;
    LAYOUT;

DATA MODEL:

     City:CityGroup, Mand Many:Mand1 (Help function only)


LOGICAL DATABASE DESIGN:

     CityNme                                25   P/S
     CityGpCd                                2   F/r


PARTITION:

     City                                    CRUD
     CityGroup                               R;
    ATTRIBUTE IS:
        volatility      'STATIC' ,
        TYPE            'AN' ,
        PICTURE         'X(27)' ,
        FIELD-LENGTH     '27' ,
```

```
     SEC-CLASS       'UNCLASSIFIED' ;
SOURCE IS:       'TMAS DATA MODEL' ;
KEYWORD IS:      'TMAS' ,
                 'LOB' ,
                 'Data Model' ;
COLLECTED:       IN City-Tbl ;
```

```
15       DEFINE SET                          CityGroup-Tbl ;
     DESCRIPTION;
City Group Table.
This table contains City Group Codes and their associated City Group
Names.
 ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          volatility         'STATIC' ,
          UPDATE-METHOD       'INTERACTIVE' ,
          UPDATE-FREQUENCY
                             'AS PER CHANGE' ,
          TABLE-FORM         'COMMAND' ,
          EST-SIZE           '27 CHAR RECORDS' ,
          EST-VOLUME         '42 RECORDS' ;
     SOURCE IS:         'TMAS DATA MODEL' ;
     KEYWORD IS:        'TMAS' ,
                        'LOB' ,
                        'Data Model' ,
                        'TACCS' ;
     COLLECTION OF:
          CityGroup ;

     Define Entity                          CityGroup ;
     DESCRIPTION;
CityGroup.
This entity consists of City Group Codes and their associated City Group
Names.
 ;
     LAYOUT;

DATA MODEL:

          CityGroup:City, Mand1:Mand Many (Help function only)
          CityGroup:FreightAdrs, Mand1:Opt Many


LOGICAL DATABASE DESIGN:

          CityGpCd                          2    P
          CityGpNme                        25    S


PARTITION:

          CityGroup                         CRUD
          FreightAdrs                       RU
          City                              CRD;
```

```
      ATTRIBUTE IS:
           volatility        'STATIC' ,
           TYPE              'AN' ,
           PICTURE           'X(27)' ,
           FIELD-LENGTH       '27' ,
           SEC-CLASS         'UNCLASSIFIED' ;
      SOURCE IS:        'TMAS DATA MODEL' ;
      KEYWORD IS:       'TMAS' ,
                        'LOB' ,
                        'Data Model' ;
      CARDINALITY IS:
                        42 ;
      COLLECTED:        IN CityGroup-Tbl ;

16      DEFINE SET                              Cntnr-System-Unique-Tables ;
      DESCRIPTION;
   Container System Unique Tables.
   This is a classification of tables in the Container Database which
   contains code values and their meanings.  They are used primarily in the
   edit and verfication procedures or help-screen functions of a process.
   Some of these tables are also found in the TMAS and/or Freight
   Databases.
    ;
      ATTRIBUTE IS:
           MEDIA             'DISK' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           VOLATILITY        'STATIC' ;
      SOURCE IS:        'CONTAINER DATA MODEL' ;
      KEYWORD IS:       'Container' ,
                        'LOB' ,
                        'Data Model' ,
                        'TACCS' ;
```

17 DEFINE SET CntnrDiscrp-File ;
DESCRIPTION;
Container Discrepancy File.
This file contains data on discrepancies pertaining to a Shipment Unit TCN.
;
ATTRIBUTE IS:
MEDIA 'DISK' ,
SEC-CLASS 'UNCLASSIFIED' ,
UPDATE-FREQUENCY
'DAILY' ,
UPDATE-METHOD 'INTERACTIVE/BATCH' ,
TABLE-FORM 'LOCAL' ,
volatility 'DYNAMIC' ,
EST-SIZE '49 CHAR RECORDS' ;
SOURCE IS: 'CONTAINER DATA MODEL' ;
KEYWORD IS: 'Freight' ,
'Data Model' ,
'LOB' ,
'TACCS' ,
'Container' ;
COLLECTION OF:
CntnrDiscrp ;

Define Entity
DESCRIPTION;
An incident of
It is considered to be associated with a movement event.
;
LAYOUT;
DATA MODEL:

CntnrDiscrp:MT ent, Opt Many:Mand 1
CntnrDiscrp:DiscrpType, Opt Many:Mand 1

LOGICAL DATABASE DESIGN:

CntnrOwnAbbr	4	P/F
CntnrNo	5	P/F
Consignee	6	P/F
DupeStpIndex	1	P/F
MovEvntCd	3	P/F
EvntTy	1	P/F
TyPwrCd	1	P/F
DiscrpTCN	17	P
DiscrpPc	4	
DiscrpDte	5	
DiscrpCd	2	F

PARTITION:

None.;
ATTRIBUTE IS:
volatility 'DYNAMIC' ,
TYPE 'AN' ,
SEC-CLASS 'UNCLASSIFIED' ,
PICTURE 'X(49)' ,
FIELD-LENGTH '49' ;
SOURCE IS: 'CONTAINER DATA MODEL' ;
KEYWORD IS: 'LOB' ,
'Data Model' ,
'Container' ;
COLLECTED: IN CntnrDiscrp-File ;

18 DEFINE SET CntnrMov-File ;
DESCRIPTION;
Container Movement File.
This file is a collection of basic movement information for given containers currently moving from origin to destination.
;
ATTRIBUTE IS:
volatility 'DYNAMIC' ,
EST-VOLUME '5,000 RECORDS' ,
MEDIA 'DISK' ,
REGULATION 'DAMMS-R O & O PLAN' ,
RETENTION '60 DAYS' ,
SEC-CLASS 'UNCLASSIFIED' ,
UPDATE-FREQUENCY
'DAILY' ,
UPDATE-METHOD 'INTERACTIVE/BATCH' ,
TABLE-FORM 'LOCAL' ,
EST-SIZE '133 CHAR RECORDS' ;
SOURCE IS: 'CONTAINER DATA MODEL' ;
KEYWORD IS: 'Data Model' ,
'LOB' ,
'TACCS' ,
'Container' ;
COLLECTION OF:
CntnrMov ;

Define Entity CntnrMov ;
DESCRIPTION;
Container Movement
This entity is an occurrence of the basic container movement information for a given container currently moving from origin to destination. This record is the master file record for the CntnrMov-File.
;
LAYOUT;

DATA MODEL:

CntnrMov:ShpmtMethod, Opt Many:Mand 1
CntnrMov:MovModeCode, Opt Many:Mand 1 (TIPS)
CntnrMov:VoyageStop, Mand Many:Opt 1
CntnrMov:MEvent, Mand 1:Opt Many (Port)
CntnrMov:Commodity, Opt Many:Mand 1
CntnrMov:CntnrMovStp, Mand 1:Mand Many
CntnrMov:Month, Opt Many:Mand 1
CntnrMov:CgoMCE, Opt Many:Mand 1 (Origin,Dest)
CntnrMov:TransPri, Opt Many:Opt 1
CntnrMov:CntnrOwner, Opt Many:Mand 1 (Cntnr Owner)
CntnrMov:CntnrSize, Opt Many:Mand 1
CntnrMov:SpecialInt, Opt Many:Opt 1

CntnrMov:TypeCarrier, Opt Many:Mand 1
CntnrMov:CgoActivity, Opt Many:Opt 1

LOGICAL DATABASE DESIGN:

CntnrOwnAbbr	4	P/F
CntnrNo	5	P/F
CntnrTCN	17	S
DteLstUpdCntnr	5	S
DteRecCreat	5	S
FWTNo	11	S
TMRPrefix	6	S
OriginMCEPrefix	1	F
MthCd	1	F
SerNo	4	
CnsgnrAAC	6	
DteDprtCnsgnr	5	
UltmCnsgn	6	
StgIndic	1	S
DteStageStart	5	
DteStageStop	5	
TotStp	2	
CntnrDam	1	S
CntnrNoPrefix	3	
TAC	4	
DelFlag	1	S
MovCompFlag	1	S
TIN	8	S
TyCarrCd	1	F
ModeMethShpmtCd	1	F
POD	5	F
CntnrTyCd	1	F
CntnrSz	2	F
CmdtyCd	3	F
SpIntCo	2	F
ModeCd	1	F
TransPriCd	1	F
VoyDocuNoFltNo	5	F
ReqAAC	6	F

PARTITION:

CntnrMov	CRUD
CntnrSize	R
Month	R
Comm[illegible]	R
SpecialInt	R
TypeCarr	R

```
    TransPri                          R
    MovModeCode                       R
    CntnrMovStp                       CRUD
       CgoAddress                     R
       CntnrRmrkLn                    CRUD
    CgoMCE                            R
    CgoActivity                       R
    MEvent                            RD
       CntnrDiscrp                    RD
    VoyageStop                        CRD
       CgoPort                        R
       Voyage                         CRD
          OceanCarr                   R
    CntnrOwner                        R
    ShpmtMethod                       R;
ATTRIBUTE IS:
     volatility      'DYNAMIC' ,
     RETENTION       '60 DAYS' ,
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(133)' ,
     FIELD-LENGTH     '133' ;
SOURCE IS:       'CONTAINER DATA MODEL' ;
KEYWORD IS:      'LOB' ,
                 'Data Model' ,
                 'Container' ;
CARDINALITY IS:
                 5000 ;
COLLECTED:       IN CntnrMov-File ;
```

```
19      DEFINE SET                              CntnrMovStp-File ;
    DESCRIPTION;
Container Movement Stop File.
This file is a collection of information about given container
movements for multi-stop transactions.
 ;
    ATTRIBUTE IS:
         volatility      'DYNAMIC' ,
         EST-VOLUME      '5,000 RECORDS' ,
         MEDIA           'DISK' ,
         REGULATION      'DAMMS-R O & O PLAN' ,
         RETENTION       '60 DAYS' ,
         SEC-CLASS       'UNCLASSIFIED' ,
         UPDATE-FREQUENCY
                         'DAILY' ,
         TABLE-FORM      'LOCAL' ,
         UPDATE-METHOD     'INTERACTIVE/BATCH' ,
         EST-SIZE        '215 CHAR RECORDS' ;
    SOURCE IS:      'CONTAINER DATA MODEL' ;
    KEYWORD IS:     'Data Model' ,
                    'LOB' ,
                    'TACCS' ,
                    'Container' ;
    COLLECTION OF:
         CntnrMovStp ;

    Define Entity                           CntnrMovStp ;
    DESCRIPTION;
Container Movement Stop
This entity is an occurrence of the information about a multi stop
action for a given container movement.  This is the master file record
for the CntnrMovStp-File.
 ;
    LAYOUT;

DATA MODEL:

     CntnrMovStp:CntnrMov, Mand Many:Mand 1
     CntnrMovStp:CntnrRmrkLn, Mand 1:Opt Many
     CntnrMovStp:MEvent, Mand 1:Opt Many (Stop)
     CntnrMovStp:CgoAddress, Opt Many:Mand 1 (Consignee)
     CntnrMovStp:CgoMCE, Opt Many:Mand 1 (Destination)


LOGICAL DATABASE DESIGN:

     CntnrOwnALL                          4    P/F
     CntnrNo                              5    P/F
     Consignee                            6    P/F
```

DupeStpIndex	1	P
MultiStpNo	1	S
DteRecngnReq	5	S
DDDteCarrNotif	5	S
DDActlSptDte	5	
DivrsnIndic	1	
DteCnsgnNotif	5	
RecngnCfmNoncfm	1	
DteRecngnCfmNoncfm	5	
DDDteRel	5	
DDCarrPOCNotif	25	
DDDteCnsgnNotif	5	
DDCnsgnPOCNotif	25	
DDDteCnsgnReqRelDte	5	
DDCarrPOCNotifRel	25	
DDLoc	25	
StpSeqNo	1	S
StpCompFlag	1	S
DivrsnDte	5	
DteHoldStart	5	
DteHoldStop	5	
HoldLoc	25	
DivrsnRecngnCnsgn	6	
StpNonFcst	1	S
DDPostDte	5	S
DestMCEPrefix	1	F
DestMCESuffix	1	S

PARTITION:

None.

;

```
ATTRIBUTE IS:
     volatility      'DYNAMIC' ,
     RETENTION       '60 DAYS' ,
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(215)' ,
     FIELD-LENGTH    '215' ;
SOURCE IS:      'CONTAINER DATA MODEL' ;
KEYWORD IS:     'LOB' ,
                'Data Model' ,
                'Container' ;
CARDINALITY IS:
                5000 ;
COLLECTED:      IN CntnrMovStp-File ;
```

```
20       DEFINE SET                              CntnrOwnTy-Tbl ;
       DESCRIPTION;
   Container Owner Type Table.
   This table contains Container Owner Type Codes and their descriptions.
    ;
       ATTRIBUTE IS:
            SEC-CLASS        'UNCLASSIFIED' ,
            TABLE-FORM       'COMMAND' ,
            volatility       'STATIC' ,
            MEDIA            'DISK' ,
            UPDATE-METHOD     'BATCH' ,
            UPDATE-FREQUENCY
                             'PER CODE CHANGE' ,
            RETENTION        'PERMANENT' ,
            EST-SIZE         '26 CHAR RECORDS' ,
            EST-VOLUME       '2 RECORDS' :
       SOURCE IS:       'CONTAINER DATA MODEL' ;
       KEYWORD IS:      'Data Model' ,
                        'LOB' ,
                        'TACCS' ,
                        'Container' ;
       COLLECTION OF:
            CntnrOwnTy ;

       Define Entity                          CntnrOwnTy ;
       DESCRIPTION;
   Container Owner Type
   A code which identifies either a commercial-owned or government-owned
   container, i.e., C-commercial  M-military.
    ;
       LAYOUT;

   DATA MODEL:

        CntnrOwnTy:CntnrOwner, Mand 1:Opt Many


   LOGICAL DATABASE DESIGN:

        CntnrOwnTyCd                          1   P
        CntnrOwnTyDescr                      25


   PARTITION:

        CntnrOwnTy                                  CPE,
       ATTRIBUTE IS:
            volatility       'STATIC' ,
            TYPE             'AN' ,
```

```
        FIELD-LENGTH      '26' ,
        PICTURE           'X(26)' ,
        SEC-CLASS         'UNCLASSIFIED' ;
SOURCE IS:        'CONTAINER DATA MODEL' ;
KEYWORD IS:       'LOB' ,
                  'Data Model' ,
                  'Container' ;
CARDINALITY IS:
                  2 ;
COLLECTED:        IN CntnrOwnTy-Tbl ;
```

```
21      DEFINE SET                          CntnrOwner-Tbl ;
    DESCRIPTION;
Container Owner Table.
This table contains Container Owner Abbreviations and their meanings.
 ;
    ATTRIBUTE IS:
         SEC-CLASS       'UNCLASSIFIED' ,
         TABLE-FORM      'COMMAND' ,
         volatility      'STATIC' ,
         MEDIA           'DISK' ,
         UPDATE-METHOD     'BATCH' ,
         UPDATE-FREQUENCY
                         'PER CODE CHANGE' ,
         RETENTION       'PERMANENT' ,
         EST-SIZE        '29 CHAR RECORDS' ,
         EST-VOLUME      '83 RECORDS' ;
    SOURCE IS:      'CONTAINER DATA MODEL' ;
    KEYWORD IS:     'Data Model' ,
                    'LOB' ,
                    'TACCS' ,
                    'Container' ;
    COLLECTION OF:
         CntnrOwner ;

    Define Entity                       CntnrOwner ;
    DESCRIPTION;
Container Owner
The organization that physically owns the container in a given move,
regardless of ocean, highway, or rail carrier, i.e  Sealand Van Lines.
 ;
    LAYOUT:

DATA MODEL:

     CntnrOwner:CntnrMov, Mand 1:Opt Many (Cntnr Owner)
     CntnrOwner:CntnrOwnly, Opt Many:Mand 1


LOGICAL DATABASE DESIGN:

     CntnrOwnAbbr                        4   P
     CntnrOwnNme                        25
     CntnrOwnTyCd                        1   F


PARTITION:

     CntnrOwner                         CRD;
    ATTRIBUTE IS:
```

```
        volatility      'STATIC' ,
        TYPE            'AN' ,
        FIELD-LENGTH    '30' ,
        PICTURE         'X(30)' ,
        SEC-CLASS       'UNCLASSIFIED' ;
    SOURCE IS:      'CONTAINER DATA MODEL' ;
    KEYWORD IS:     'LOB' ,
                    'Data Model' ,
                    'Container' ;
    CARDINALITY IS:
                    83 ;
    COLLECTED:      IN CntnrOwner-Tbl ;
```

```
22      DEFINE SET                              CntnrRmrkLn-File ;
    DESCRIPTION;
Container Remark Line File.
This file contains remarks pertaining to a particular container movement
and stop.
 ;
    ATTRIBUTE IS:
        MEDIA           'DISK' ,
        SEC-CLASS       'UNCLASSIFIED' ,
        UPDATE-FREQUENCY
                        'DAILY' ,
        UPDATE-METHOD     'INTERACTIVE/BATCH' ,
        TABLE-FORM      'LOCAL' ,
        volatility      'DYNAMIC' ,
        EST-SIZE        '68 CHAR RECORDS' ;
    SOURCE IS:      'CONTAINER DATA MODEL' ;
    KEYWORD IS:     'Data Model' ,
                    'LOB' ,
                    'TACCS' ,
                    'Container' ;
    COLLECTION OF:
        CntnrRmrkLn ;

    Define Entity                           CntnrRmrkLn ;
    DESCRIPTION;
Container Remark Line
A unique [illegible]formation not provided for in the other container
subsystem attributes that is deemed essential for clarification.
There may be any number of container remark lines for a given container
move or stop.
 ;
    LAYOUT;

DATA MODEL:

     CntnrRmrkLn:CntnrMovStp, Opt Many:Mand 1


LOGICAL DATABASE DESIGN:

     CntnrOwnAbbr                        4   P/F
     CntnrNo                             5   P/F
     Consignee                           6   P/F
     DupeStpIndex                        1   P/F
     CntnrRmrkLnNo                       2   P
     CntnrRmrk                          50


PARTITION:
```

```
CntnrRmrkLn                                    CRUD
  CntnrMovStp                                  R;
ATTRIBUTE IS:
      volatility        'DYNAMIC' ,
      TYPE              'AN' ,
      SEC-CLASS         'UNCLASSIFIED' ,
      FIELD-LENGTH       '68' ,
      PICTURE           'X(68)' ;
SOURCE IS:        'CONTAINER DATA MODEL' ;
KEYWORD IS:       'Data Model' ,
                  'Container' ,
                  'LOB' ;
COLLECTED:        IN CntnrRmrkLn-File ;
```

```
23       DEFINE SET                          CntnrSize-Tbl ;
     DESCRIPTION;
Container Size Table.
This table contains standard container sizes and pertinent descriptive
materiel.
 ;
     ATTRIBUTE IS:
          SEC-CLASS        'UNCLASSIFIED' ,
          TABLE-FORM       'COMMAND' ,
          volatility       'STATIC' ,
          MEDIA            'DISK' ,
          UPDATE-METHOD     'BATCH' ,
          UPDATE-FREQUENCY
                           'PER CODE CHANGE' ,
          RETENTION        'PERMANENT' ,
          EST-SIZE         '27 CHAR RECORDS' ;
     SOURCE IS:       'CONTAINER DATA MODEL' ;
     KEYWORD IS:      'Data Model' ,
                      'LOB' ,
                      'TACCS' ,
                      'Container' ;
     COLLECTION OF:
          CntnrSize ;

     Define Entity                       CntnrSize ;
     DESCRIPTION;
Container Size
The physical size of container associated with a given Van TCMD, e.g.,
flat bed, refrigerated, dry cargo.
 ;
     LAYOUT;

DATA MODEL:

     CntnrSize:CntnrMov, Mand 1:Opt Many


LOGICAL DATABASE DESIGN:

     CntnrSz                              2   P
     CntnrSzDescr                        25


PARTITION:

     CntnrSize                           CRD;
     ATTRIBUTE IS:
          volatility       'STATIC' ,
          TYPE             'AN' ,
```

```
     FIELD-LENGTH     '27' ,
     PICTURE         'X(27)' ,
     SEC-CLASS       'UNCLASSIFIED' ;
SOURCE IS:      'CONTAINER DATA MODEL' ,
                'CMM DFSR, P. C-487' ;
KEYWORD IS:     'LOB' ,
                'Data Model' ,
                'Container' ;
COLLECTED:      IN CntnrSize-Tbl ;
```

```
24        DEFINE SET                              Commodity-Tbl ;
     DESCRIPTION;
Commodity Table.
This table contains MILSTAMP Commodity Codes and their meanings.
 ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          RETENTION          'PERMANENT' ,
          UPDATE-FREQUENCY
                             'PER CODE CHANGE' ,
          UPDATE-METHOD       'BATCH' ,
          TABLE-FORM         'COMMAND' ,
          EST-SIZE           '23 CHAR RECORDS' ,
          REGULATION         'MILSTAMP' ,
          volatility         'STATIC' ,
          EST-VOLUME         '410 RECORDS' ;
     SOURCE IS:         'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
     KEYWORD IS:        'Freight' ,
                        'Container' ,
                        'LOB' ,
                        'TACCS' ,
                        'Data Model' ;
     COLLECTION OF:
          Commodity ;

     Define Entity                          Commodity ;
     DESCRIPTION;
Commodity.
This entity is an occurrence of a specific MILSTAMP Commodity Code and
its description.  This is the master record for the Commodity Table.
 ;
     LAYOUT;

LOGICAL DATABASE DESIGN:

      CmdtyCd                               3      P
      CmdtyCdDescr                          20


FREIGHT DATA MODEL:

     Commodity:VehStopPt, Mand 1:Opt Many


FREIGHT [illegible]

      Commodity                             CRD
```

CONTAINER DATA MODEL:

Commodity:CntnrMov, Mand 1:Opt Many

CONTAINER PARTITION:

```
 Commodity                                  CRD;
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(23)' ,
     FIELD-LENGTH     '23' ,
     RETENTION       'PERMANENT' ,
     volatility      'STATIC' ;
SOURCE IS:      'CNTNR/FRT DATA MODEL' ,
                'MILSTAMP APP F, P. B-8' ;
KEYWORD IS:     'LOB' ,
                'Freight' ,
                'Container' ,
                'Data Model' ;
CARDINALITY IS:
                410 ;
COLLECTED:      IN Commodity-Tbl ;

25     DEFINE SET                          Container-Contact-Files ;
DESCRIPTION;
Container Contact Files.
This set of files contains customer contact and addressing information
maintained at the Movement Control Team (MCT) level.  Its basis is the
Transportation Movements Address File (TMAF) maintained by the Theater
Movements Control Agency, as well as customer data obtained from
activities in any particular MCT's area of responsibility.
 ;
ATTRIBUTE IS:
     MEDIA           'DISK' ,
     SEC-CLASS       'UNCLASSIFIED' ,
     volatility      'DYNAMIC' ,
     TABLE-FORM      'COMMAND' ;
SOURCE IS:      'CONTAINER DATA MODEL' ;
KEYWORD IS:     'Container' ,
                'LOB' ,
                'Data Model' ,
                'TACCS' ;
```

```
26      DEFINE SET                              Container-Database ;
    DESCRIPTION;
Container Database.
This set of files and tables contains import, customer contact, and
system unique data used in container operations at the Movement Control
Team level.
 ;
    ATTRIBUTE IS:
         MEDIA          'DISK' ,
         SEC-CLASS      'UNCLASSIFIED' ;
    SOURCE IS:      'CONTAINER DATA MODEL' ;
    KEYWORD IS:     'Container' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;

27      DEFINE SET                              Container-Movements-Files ;
    DESCRIPTION;
Container Movements Files.
This set of files contains data pertaining to containerized import ship-
ments.
 ;
    ATTRIBUTE IS:
         MEDIA          'DISK' ,
         SEC-CLASS      'UNCLASSIFIED' ,
         volatility     'DYNAMIC' ,
         TABLE-FORM     'LOCAL' ;
    SOURCE IS:      'CONTAINER DATA MODEL' ;
    KEYWORD IS:     'Container' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
```

```
28        DEFINE SET                              CostFavor-Tbl ;
      DESCRIPTION;
Cost Favorable Table.
This table contains Cost Favorable Codes and their descriptions.
 ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           RETENTION          'PERMANENT' ,
           UPDATE-FREQUENCY
                              'PER CODE CHANGE' ,
           UPDATE-METHOD        'BATCH' ,
           TABLE-FORM         'COMMAND' ,
           EST-VOLUME         '3 RECORDS' ,
           EST-SIZE           '31 CHAR RECORDS' ,
           volatility         'STATIC' ;
      SOURCE IS:         'FREIGHT DATA MODEL' ;
      KEYWORD IS:        'Freight' ,
                         'Data Model' ,
                         'LOB' ,
                         'TACCS' ;
      COLLECTION OF:
           CostFavor ;

      Define Entity                            CostFavor ;
      DESCRIPTION;
Cost Favorable.
This entity is an occurrence of a specific Cost Favorable Code and Cost
Favorable code description. This is the master record for the Cost Favor
Table.
 ;
      LAYOUT;

DATA MODEL:

      CostFavor:FreightMov, Opt 1:Opt Many


LOGICAL DATABASE DESIGN:

      CstFvrblCd                               1     P
      CstFvrblCdDescr                          30


PARTITION:

      CostFavor                                CRD;
      ATTRIBUTE IS:
           SEC-CLASS          'UNCLASSIFIED' ,
```

```
     TYPE              'AN' ,
     PICTURE           'X(31)' ,
     FIELD-LENGTH       '31' ,
     RETENTION         'PERMANENT' ,
     volatility        'STATIC' ;
SOURCE IS:        'FREIGHT DATA MODEL' ;
KEYWORD IS:       'Freight' ,
                  'LOB' ,
                  'Data Model' ;
CARDINALITY IS:
                  3 ;
COLLECTED:        IN CostFavor-Tbl ;
```

```
29      DEFINE SET                              Country-Tbl ;
    DESCRIPTION;
Country Table.
This table contains Country Codes and their descriptions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'STATIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         TABLE-FORM         'COMMAND' ,
         EST-SIZE           '27 CHAR RECORDS' ,
         EST-VOLUME         '134 RECORDS' ;
    SOURCE IS:        'TMAS DATA MODEL' ;
    KEYWORD IS:       'TMAS' ,
                      'LOB' ,
                      'Data Model' ,
                      'TACCS' ;
    COLLECTION OF:
         Country ;

    Define Entity                           Country ;
    DESCRIPTION;
Country.
Identifies the country where the freight, billing, or mailing
address of an activity is located.
 ;
    LAYOUT;

DATA MODEL:

     Country:FreightAdrs, Mand1:Opt Many
     Country:Activity, Opt1:Opt Many
     Country:BillingAdrs, Opt1:Opt Many


LOGICAL DATABASE DESIGN:

     CntryCd                              2    P
     CntryCdDescr                        25    S


PARTITION:

     Country                              CRUD
     Activity                             RU
     FreightAdrs                          RU
```

```
 BillingAdrs                              RU;
ATTRIBUTE IS:
     volatility      'STATIC' ,
     RETENTION       'PERMANENT' ,
     TYPE            'A' ,
     PICTURE         'A(27)' ,
     FIELD-LENGTH     '27' ,
     SEC-CLASS       'UNCLASSIFIED' ;
SOURCE IS:      'TMAS DATA MODEL' ;
KEYWORD IS:     'TMAS' ,
                'LOB' ,
                'Data Model' ;
CARDINALITY IS:
                134 ;
COLLECTED:      IN Country-Tbl ;

30    DEFINE SET                          DAMMS-R-1-Database ;
DESCRIPTION;
Department of Army Movements Management System - Redesign, Fielding
Segment 1 Database.
This represents the logical collection of tables and files contained in
DAMMS-R Fielding Segment 1.  The subsets, Freight-Database, Container-
Database, and TMAS-Database, are not necessarily collocated on the same
hardware nor at the same organizational echelon.
 ;
ATTRIBUTE IS:
     MEDIA           'DISK' ,
     SEC-CLASS       'UNCLASSIFIED' ;
SOURCE IS:      'TMAS/CNTNR/FRT DATA MODEL' ;
KEYWORD IS:     'TMAS' ,
                'LOB' ,
                'Data Model' ,
                'TACCS' ;
```

```
31      DEFINE SET                              DSSALOC-Tbl ;
    DESCRIPTION;
Direct Supply Support/Air Line of Communication Table.
This table contains DSSALOC Codes and their descriptions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'STATIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         EST-SIZE           '61 CHAR RECORDS' ,
         EST-VOLUME         '3 RECORDS' ,
         TABLE-FORM         'COMMAND' ;
    SOURCE IS:        'TMAS DATA MODEL' ;
    KEYWORD IS:       'TMAS' ,
                      'LOB' ,
                      'Data Model' ,
                      'TACCS' ;
    COLLECTION OF:
         DSSALOC ;

    Define Entity                           DSSALOC :
    DESCRIPTION
Direct Supply Support/Air Line of Communication.
Identifies whether an activity is or is not an authorized DSS or ALOC
customer.
 ;
    LAYOUT;

DATA MODEL:

     DSSALOC:Activity, Opt 1:Opt Many


LOGICAL DATABASE DESIGN:

     DSSALOCCd                              1    P
     DSSALOCDescr                          60


PARTITION:

     DSSALOC                                CRUD
     Activity                               RU;
    ATTRIBUTE IS:
         volatility         'STATIC' ,
         TYPE               'AN' ,
```

```
     FIELD-LENGTH     '61' ,
     PICTURE          'X(61)' ,
     SEC-CLASS        'UNCLASSIFIED' ;
SOURCE IS:       'TMAS DATA MODEL' ;
KEYWORD IS:      'TMAS' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 3 ;
COLLECTED:       IN DSSALOC-Tbl ;
```

```
32      DEFINE SET                              Deadline-Tbl ;
    DESCRIPTION;
Deadline Table.
This table contains Deadline Codes and their descriptions.
 ;
    ATTRIBUTE IS:
        MEDIA           'DISK' ,
        SEC-CLASS       'UNCLASSIFIED' ,
        RETENTION       'PERMANENT' ,
        UPDATE-FREQUENCY
                        'PER CODE CHANGE' ,
        UPDATE-METHOD     'BATCH' ,
        TABLE-FORM      'COMMAND' ,
        EST-SIZE        '23 CHAR RECORDS' ,
        volatility      'STATIC'
        EST-VOLUME      '12 RECORDS' ;
    SOURCE IS:      'FREIGHT DATA MODEL' ;
    KEYWORD IS:     'Freight' ,
                    'Data Model' ,
                    'LOB' ,
                    'TACCS' ;
    COLLECTION OF:
        Deadline ;

    Define Entity                           Deadline ;
    DESCRIPTION;
Deadline.
This entity is the occurrence of a specific Deadline Code and Deadline
Code description. This is the master record for the Deadline Table.
 ;
    LAYOUT;

DATA MODEL:

     Not connected.


LOGICAL DATABASE DESIGN:

     DLCd                                   3     P
     DLCdDescr                              20


PARTITION:

     Deadline                               CRD;
    ATTRIBUTE IS:
        SEC-CLASS       'UNCLASSIFIED' ,
        TYPE            'AN' ,
```

```
    PICTURE          'X(23)' ,
    FIELD-LENGTH      '23' ,
    RETENTION        'PERMANENT' ,
    volatility       'DYNAMIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'Freight' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 12 ;
COLLECTED:       IN Deadline-Tbl ;
```



```
33      DEFINE SET                              DiscrpType-Tbl ;
    DESCRIPTION;
Discrepancy Type Table.
This table contains AR 55-38 Discrepancy Codes and their descriptions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         RETENTION          'PERMANENT' ,
         UPDATE-FREQUENCY
                            'PER CODE CHANGE' ,
         UPDATE-METHOD        'BATCH' ,
         TABLE-FORM         'COMMAND' ,
         EST-SIZE           '42 CHAR RECORDS' ,
         volatility         'STATIC' ,
         EST-VOLUME         '33 RECORDS' ;
    SOURCE IS:          'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ,
                        'AR 55-38' ;
    KEYWORD IS:         'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ,
                        'Container' ;
    COLLECTION OF:
         DiscrpType ;

    Define Entity                           DiscrpType ;
    DESCRIPTION;
Discrepancy Type.
This entity is the occurrence of a specific Discrepancy Code and
Discrepancy Code description. This is the master record for the
Discrepancy Type Table.
 ;
    LAYOUT;

LOGICAL DATABASE DESIGN:

     DiscrpCd                           2     P
     DiscrpCdDescr                      40


FREIGHT DATA MODEL:

    DiscrpType:FrtDiscrp, Mand 1:Opt Many


FREIGHT PARTITION:
```



DiscrpType CRD

CONTAINER DATA MODEL:

DiscrpType:CntnrDiscrp, Mand 1:Opt Many

CONTAINER PARTITION:

```
 DiscrpType                              CRD;
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(42)' ,
     FIELD-LENGTH     '42' ,
     RETENTION       'PERMANENT' ,
     volatility      'STATIC' ;
SOURCE IS:           'CNTNR/FRT DATA MODEL' ,
                     'AR 55-30' ,
KEYWORD IS:          'LOB' ,
                     'Freight' ,
                     'Container' ,
                     'Data Model' ;
CARDINALITY IS:
                    33 ;
COLLECTED:           IN DiscrpType-Tbl ;
```

```
34      DEFINE SET                              ETAFcstLvl-Tbl ;
    DESCRIPTION;
Estimated Time of Arrival Forecast Level Table.
This table contains DAMMS-CMM ETA Forecast Level Codes and their
descriptions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'STATIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         EST-SIZE           '61 CHAR RECORDS' ,
         EST-VOLUME         '4 RECORDS' ,
         TABLE-FORM         'COMMAND' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    COLLECTION OF:
         ETAFcstLvl ;

    Define Entity                           ETAFcstLvl ;
    DESCRIPTION;
Estimated Time of Arrival Forecast Level.
Identifies the format of the ETA forecast requested.
 ;
    LAYOUT;

DATA MODEL:

     ETAFcstLvl:FreightAdrs Opt 1:Opt Many (Cnsgn)
     ETAFcstLvl:FreightAdrs Opt 1:Opt Many (BCnsgn)
     ETAFcstLvl:FreightAdrs Opt 1:Opt Many (CMCT)
     ETAFcstLvl:FreightAdrs Opt 1:Opt Many (BMCT)
     ETAFcstLvl:FreightAdrs Opt 1:Opt Many (CMMC1)
     ETAFcstLvl:FreightAdrs Opt 1:Opt Many (BMMC1)
     ETAFcstLvl:FreightAdrs Opt 1:Opt Many (CMMC2)
     ETAFcstLvl:FreightAdrs Opt 1:Opt Many (BMMC2)


LOGICAL DATABASE DESIGN:

     ETAFcstLvlCd                        1    P
     ETAFcstLvlCdDescr                  60
```

```
PARTITION:

     ETAFcstLvl                              CRUD
     FreightAdrs                             RU;
    ATTRIBUTE IS:
         volatility      'STATIC' ,
         TYPE            'AN' ,
         FIELD-LENGTH     '61' ,
         PICTURE         'X(61)' ,
         SEC-CLASS       'UNCLASSIFIED' ;
    SOURCE IS:       'TMAS DATA MODEL' ;
    KEYWORD IS:      'TMAS' ,
                     'LOB' ,
                     'Data Model' ;
    CARDINALITY IS:
                     4 ;
    COLLECTED:       IN ETAFcstLvl-Tbl ;

35    DEFINE SET                                Export-Cargo-Files ;
    DESCRIPTION;
Export Cargo Files.
This set of files contains data for export freight shipments.
 ;
    ATTRIBUTE IS:
         MEDIA           'DISK' ,
         SEC-CLASS       'UNCLASSIFIED' ,
         volatility      'DYNAMIC' ,
         TABLE-FORM      'LOCAL' ;
    SOURCE IS:       'FREIGHT DATA MODEL' ;
    KEYWORD IS:      'Freight' ,
                     'LOB' ,
                     'Data Model' ,
                     'TACCS' ;
```

36 DEFINE SET ExportAir-File ;
DESCRIPTION;
Export Air File.
This file contains a collection of Export Air records.
;
ATTRIBUTE IS:
MEDIA 'DISK' ,
SEC-CLASS 'UNCLASSIFIED' ,
UPDATE-METHOD 'INTERACTIVE' ,
TABLE-FORM 'LOCAL' ,
EST-SIZE '270 CHAR RECORDS' ,
volatility 'DYNAMIC' ;
SOURCE IS: 'FREIGHT DATA MODEL' ;
KEYWORD IS: 'Freight' ,
'Data Model' ,
'LOB' ,
'TACCS' ;
COLLECTION OF:
ExportAir ;

Define Entity ExportAir ;
DESCRIPTION;
Export Air.
This entity is the occurrence of Export Air Clearance for records for air cargo departing the theater. This is the master record for Export Air Files.
;
LAYOUT;

DATA MODEL:

Not connected.

LOGICAL DATABASE DESIGN:

TCN	17	P
ACARefNo	6	S
ACANo	12	S
AirDim	1	
TypePack	2	
Pc	4	
Wt	6	
Cu	4	
Lgth	5	
Wdth	3	
Ht	3	
RDD	5	
Consignee	6	

Consignee	6	
CgoDescr	50	
ProjCd	3	
TAC	4	
NetExploWt(NEW)	6	
ACARmrks	50	
ATMCTAct	1	
ExprtClncReqCd	1	
DTGMCTFwdExprtClnc	9	
DTGExprtClncReqFwd	9	
DTGExprtClncReqRec	9	
DTGATMCTRecExprtClnc	9	
DTGExprtClncReqFwdATA	9	
DTGATMCTRecExprtReqClnc	9	
DTGATMCTFwdExprtClnc	9	
POE	3	F
POD	3	F
SpHdlCd	2	F
CmdtyCd	3	F
TransPriCd	1	F

PROPOSED PARTITION:

```
     ExportAir                          CRUD
     FreightMov                         R
     CgoPart                            R;
   ATTRIBUTE IS:
        SEC-CLASS       'UNCLASSIFIED' ,
        TYPE            'AN' ,
        PICTURE         'X(270)' ,
        FIELD-LENGTH     '270' ,
        volatility      'DYNAMIC' ;
   SOURCE IS:      'FREIGHT DATA MODEL' ;
   KEYWORD IS:     'Freight' ,
                   'LOB' ,
                   'Data Model' ;
   COLLECTED:      IN ExportAir-File ;
```

37 DEFINE SET ExportWater-File ;
DESCRIPTION;
Export Water File.
This file contains Export Water records.
;
ATTRIBUTE IS:
MEDIA 'DISK' ,
SEC-CLASS 'UNCLASSIFIED' ,
UPDATE-METHOD 'INTERACTIVE' ,
TABLE-FORM 'LOCAL' ,
volatility 'DYNAMIC' ,
EST-SIZE '409 CHAR RECORDS' ;
SOURCE IS: 'FREIGHT DATA MODEL' ;
KEYWORD IS: 'Data Model' ,
'LOP' ,
'TACCS' ,
'Freight' ;
COLLECTION OF:
ExportWater ;

Define Entity ExportWater ;
DESCRIPTION;
Export Water.
This entity is the occurrence of Export Water Clearance records for ocean cargo departing the theater. This is the master record for Export Water Files.
;
LAYOUT;

DATA MODEL:

Not connected.

LOGICAL DATABASE DESIGN:

TCN	17	P
MSCCCO	8	S
ExprtTfcRelNo	13	S
CmdtyCd	3	
ContNo/TrlNo	5	
TransPriCd	1	
ModeCd	1	
Pc	4	
Wt	6	
Cu	4	
Lgth	5	

Wdth	3
Ht	3
RDD	5
Consignor	6
Consignee	6
Rmrks/CgoDescr	26
NMSN	13
UN/NA(As Approp)	2
UNClass	2
CompGp	1
ProjCd	3
TAC	4
DODIC	4
NEW	6
LotNo	14
PcThisLotNo	4
WtThisLotNo	5
CuThisLotNo	4
UN/NANo	4
RdCtTot	6
VesNme	17
VoyDocuNoFltNo	5
ETRRmrks	50
ExprtClncReqCd	1
DTGExprtClncReqRec	9
DTGMCTFwdExprtClnc	9
DTGExprtClncRec[illegible]	9
POE	3
POD	3
DteAvalShpmt	3
ETA	1
Model	6
BIIPcs	5
IdNo	13
T9SeqNo	1
InsdCuCap	2
TyPackCd	2
PcThisDim	7
WtOnePc	5
CuOnePc	4
TyCgoCd	1
CntnrOwnAbbr	4
CntnrSz	2
SecConsolNo	5
CntnDistrCd	1
ShpmtU	2
ShpmtUTCN	17
StpOffIndicr	1
ZipCd	6

VanNo	8	
SealNo	8	
OceanCarrAbbr	4	
BeamAssy	2	
TMRPrefix	6	F
SpHdlCd	1	F

PARTITION:

Not applicable.;
ATTRIBUTE IS:
volatility 'DYNAMIC' ,
TYPE 'AN' ,
SEC-CLASS 'UNCLASSIFIED' ,
PICTURE 'X(409)' ,
FIELD-LENGTH '409' ;
SOURCE IS: 'FREIGHT DATA MODEL' ;
KEYWORD IS: 'Freight' ,
'Data Model' ,
'LOP' ;
COLLECTED: IN ExportWater-File ;

38 DEFINE SET Freight-Contact-Files ;
DESCRIPTION;
Freight Contact Files.
This set of files contains customer contact and addressing information maintained at the Movement Control Team (MCT) level. Its basis is the Transportation Movements Address File (TMAF) maintained by the Theater Movements Control Agency, as well as customer data obtained from activities in any particular MCT's area of responsibility.
;
ATTRIBUTE IS:
MEDIA 'DISK' ,
SEC-CLASS 'UNCLASSIFIED' ,
volatility 'DYNAMIC' ;
SOURCE IS: 'FREIGHT DATA MODEL' ;
KEYWORD IS: 'Freight' ,
'LOB' ,
'Data Model' ,
'TACCS' ;

```
39      DEFINE SET                              Freight-Database ;
     DESCRIPTION;
Freight Database.
This set of files and tables contains intra-theater movement, import,
export, customer contact, and system unique data used in freight
operations at the Movement Control Team level.
 ;
     ATTRIBUTE IS:
          MEDIA          'DISK' ,
          SEC-CLASS      'UNCLASSIFIED' ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     KEYWORD IS:     'Freight' ,
                     'LOB' ,
                     'Data Model' ,
                     'TACCS' ;

40      DEFINE SET                              Freight-Movements-Files ;
     DESCRIPTION;
Freight Movements Files.
This set of files contains freight movements data pertaining to
intra-theater shipments.
 ;
     ATTRIBUTE IS:
          MEDIA          'DISK' ,
          SEC-CLASS      'UNCLASSIFIED' ,
          volatility     'DYNAMIC' ,
          TABLE-FORM     'LOCAL' ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     KEYWORD IS:     'Freight' ,
                     'LOB' ,
                     'Data Model' ,
                     'TACCS' ;
```

```
41      DEFINE SET                          Freight-System-Unique-Tables ;
    DESCRIPTION;
Freight System Unique Tables.
This is a classification of tables in the Freight Database which
contains code values and their meanings.  They are used primarily in the
edit and verification procedures or help-screen functions of a process.
Some of these tables are also found in the TMAS and/or Container
Databases.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'STATIC' ;
    SOURCE IS:         'FREIGHT DATA MODEL' ;
    KEYWORD IS:        'Freight' ,
                       'LOB' ,
                       'Data Model' ,
                       'TACCS' ;
```

```
42      DEFINE SET                          FreightAdrs-File ;
    DESCRIPTION;
Freight Address File.
This file is a collection of shipping or ship-to activity records.  It
contains addressing and other location-type data.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'DYNAMIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
         TABLE-FORM         'COMMAND' ,
         EST-SIZE           '355 CHAR RECORDS' ,
         EST-VOLUME         '6,000-8,000 RECORDS' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    COLLECTION OF:
         FreightAdrs ;

    Define Entity                       FreightAdrs ;
    DESCRIPTION;
Freight Address
This entity consists of location and address information, and
transportation management information, relating to organizations that
can receive and/or ship cargo.
 ;
    LAYOUT;

DATA MODEL:

     FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (CCnsgn)
     FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (BCnsgn)
     FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (CMCT)
     FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (BMCT)
     FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (CMMC1)
     FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (BMMC1)
     FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (CMMC2)
     FreightAdrs:ETAFcstLvl, Opt Many:Opt 1 (BMMC2)
     FreightAdrs:CityGroup, Opt Many:Mand1
     FreightAdrs:Holiday, Opt Many:Mand1
     FreightAdrs:AddressCat, Opt Many:Mand1
     FreightAdrs:TTPUnique, Opt Many:Mand1
     FreightAdrs:MMCUnique, Opt Many:Opt1 (MMC1)
     FreightAdrs:MMCUnique, Opt Many:Opt1 (MMC2)
```

FreightAdrs:MovConElm, Opt Many:Mand1
FreightAdrs:LMF, Opt Many:Mand1 (LMF1)
FreightAdrs:LMF, Opt Many:Mand1 (LMF2)
FreightAdrs:BBPUnique, Opt Many:Opt1
FreightAdrs:Port, Opt Many:Mand1 (Water)
FreightAdrs:Port, Opt Many:Mand1 (Air)
FreightAdrs:Activity, Mand1:Opt Many (Optional if ShipToAAC equals AACCurr, on screen)
FreightAdrs:Country, Opt Many: Mand1

LOGICAL DATABASE DESIGN:

ShipToAAC	6	P
FUDsg	35	S
FUDsgCont	35	
FSt	25	
FBldgNo	10	
FAttn	20	
[illegible]	6	
FCityRgn	25	
FBrksKsrn	25	
FAPO1st5	5	
FAPOLst4	4	
FDteLstUpd	5	
FMCTPOC	25	
FMCTMilTel	15	
FMCTCivTel	25	
BASATel	20	
RtCd	3	
RtSeqNo	4	
ClusterCd	4	
MINIndic	1	
TrnsSeqNo	2	
TcrTml	7	
[illegible]	1	F
ETACCnsgn	1	F
ETABMCT	1	F
ETACMCT	1	F
ETABMMC1	1	F
ETACMMC1	1	F
ETABMMC2	1	F
ETACMMC2	1	F
AACMMC1	6	F
AACMMC2	6	F
LMF1	2	F
LMF2	2	F
MCEPrefix	1	F
MCESuffix	1	F

ADCATCd	2	F
TTPCd	1	F
HolAreaCd	1	F
CityGpCd	2	F
APOD	4	F
WPOD	4	F
FCntry	2	F
AACBBP	6	F

PARTITION:

FreightAdrs	RU
ETAFcstLvl	R
Country	R
Port	R
TTPUnique	R
BBPUnique	R
LMF	R
AddressCat	R
MMCUnique	R
MovConElm	R
Holiday	R
CityGroup	R
City	R;

ATTRIBUTE IS:

volatility	'DYNAMIC' ,
TYPE	'AN' ,
FIELD-LENGTH	'355' ,
PICTURE	'X(355)' ,
SEC-CLASS	'UNCLASSIFIED' ;

SOURCE IS: 'TMAS DATA MODEL' ;

KEYWORD IS: 'TMAS' ,
'LOB' ,
'Data Model' ;

CARDINALITY IS:
8000 ;

COLLECTED: IN FreightAdrs-File ;



43 DEFINE SET FreightMov-File ;
DESCRIPTION;
Freight Movement File.
This file is a collection of basic movement information for given freight shipments currently moving from origin to destination.
;
ATTRIBUTE IS:
MEDIA 'DISK' ,
SEC-CLASS 'UNCLASSIFIED' ,
UPDATE-FREQUENCY
'DAILY' ,
UPDATE-METHOD 'INTERACTIVE-BATCH' ,
TABLE-FORM 'LOCAL' ,
volatility 'DYNAMIC' ,
EST-SIZE '196 CHAR RECORDS' ;
SOURCE IS: 'FREIGHT DATA MODEL' ;
KEYWORD IS: 'Freight' ,
'Data Model' ,
'LOB' ,
'TACCS' ;
COLLECTION OF:
FreightMov ;



Define Entity FreightMov ;
DESCRIPTION;
Freight Movement.
This entity is an occurrence of the basic freight movement information for a given freight movement. This record is the master file record for the Freight Movement File.
;
LAYOUT;

DATA MODEL:

FreightMov:FrtMovAsset, Mand 1:Opt 1
FreightMov:AssetRqmt, Mand 1:Mand Many
FreightMov:CostFavor, Opt Many:Opt 1
FreightMov:HwyClncCd, Opt Many:Opt 1
FreightMov:SpotCd, Opt Many:Opt 1
FreightMov:MovModeCode, Opt Many:Mand 1
FreightMov:FrtRemarkLn, Mand 1:Opt Many
FreightMov:VehStopPt, Mand 1:Mand Many
FreightMov:Month, Opt Many:Mand 1 (MCT)
FreightMov:Month, Opt Many:Opt 1 (BMCT)
FreightMov:CgoAddress, Opt Many:Opt 1 (Consignor)
FreightMov:AirIdentNo, Mand 1:Opt Many
FreightMov:CgoActivity, Opt Many:Opt 1 (Requesting Unit)
FreightMov:CgoMCE, Opt Many:Mand 1 (Origin MCT)



FreightMov:CgoMCE, Opt Many:Opt 1 (Origin BMCT)
FreightMov:SpotLimit, Opt Many:Opt 1
FreightMov:VehStopPtAs, Mand 1:Opt Many
FreightMov:FreightMov, Opt 1:Opt Many (XrefTMR)
FreightMov:TypeCarrier, Opt Many:Opt 1
FreightMov:TypeMove, Opt Many:Mand 1
FreightMov:ShpmtMethod, Opt Many:Opt 1

NOTE 1: Relationship to CgoAddress is optional on side of CgoAddress for the time being. Consignor is mandatory field, but if DODAAC is not in CgoAddress, operator must be able to override and continue to process the movement.

NOTE 2: Relationship to CgoMCE is optional on side of CgoMCE because MCECd is normally obtained through CgoAddress.

LOGICAL DATABASE DESIGN:

TMRPrefix	6	P
OriginMCEPrefix	1	F
MthCd	1	F
SerNo	4	
BMCTRefNo	7	P
OriginBMCECd	2	
OriginBMCEPrefix	1	S
OriginBMCESuffix	1	S
BMCTMthCd	1	F
BMCTSerNo	4	
FWTNo	11	S
GBLNo	8	S
ComlConNo	6	S
ComlCarrNme	25	
DteRecCreat	5	S
VoyDocuNoFltNo	5	S
DteLstUpdFrt	5	S
ReqDTG	9	
ReqNme	15	
ReqUnit	20	
DTGComtFwd	9	
CanREFAMNoncfm (C, R, or N)	1	S
ComlCst	5	
MilCst	5	
ManStaCd	3	
Bckld (Y or Blank)	1	
ActlCst (Manual Input)	8	
ReqLoadDte	5	
ReqPullDte	5	

ExprtClncReqCd	1	S
MovCompFlag	1	S
MovCompDte	5	
TyCarrCd	1	F
ModeCd	1	F
XRefTMRPrefix	6	F
Consignor	6	F
SpotLimitCd	2	F
HwyClncRqmtCd	1	F
CstFvrblCd	1	F
ReqSpotDte	5	F
TyMovCd	1	F
ModeMethShpmtCd	1	F

PARTITION:

FreightMov	CRUD	
CgoAddress (Consignor)	R	
CgoMCE	R	
Pallet463L	CRU	
CgoMCE (Origin)	R	
AirIdentNo	CRUD	
AssetRqmt	CRUD	
TypeAssetCd	R	
CostFavor	R	
HwyClncCd	R	
MovModeCode	R	
FrtRemarkLn	CRUD	
VehStopPt	CRUD	
VehStopPtAs	CRUD	*
FrtMEvent	RD	
FrtDiscrp	RD	
ChangeType	R	
TransPri	R	
Commodity	R	
SpecialInt	R	
RailMov	CRUD	
OrdinalCd	R	
FrtMovAsset	CRUD	
VehStopPtAs	CRUD	
ChangeType	R	
FrtMEvent	RD	
FrtDiscrp	RD	
SpotLimit	RU	
SpotCd	R	
SpotFactor	R	
TypeCarrier	R	
TypeMove	R	

```
    ShpmtMethod                          R
    Month                                R

  * At origin MOT, VehStopPtAs is RUD.
;
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     volatility      'DYNAMIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'LOB' ,
                 'Freight' ,
                 'Data Model' ;
COLLECTED:       IN FreightMov-File ;
```

44 DEFINE SET FrtDiscrp-File ;
DESCRIPTION;
Freight Discrepancy File.
This file contains data on discrepancies pertaining to a particular TCN and event location.
;
ATTRIBUTE IS:
MEDIA 'DISK' ,
SEC-CLASS 'UNCLASSIFIED' ,
UPDATE-FREQUENCY
'DAILY' ,
UPDATE-METHOD 'INTERACTIVE-BATCH' ,
TABLE-FORM 'LOCAL' ,
EST-SIZE '42 CHAR RECORDS' ,
volatility 'DYNAMIC' ,
EST-VOLUME '35 RECORDS' ;
SOURCE IS: 'FREIGHT DATA MODEL' ;
KEYWORD IS: 'Freight' ,
'Data Model' ,
'LOB' ,
'TACCS' ;
COLLECTION OF:
FrtDiscrp ,

Define Entity FrtDiscrp ;
DESCRIPTION;
Freight Discrepancy.
This entity is an occurrence of freight discrepancies for a freight movement. this record is the master file record for the Freight Discrepancy File.
;
LAYOUT;

DATA MODEL:

FrtDiscrp:FrtMEvent, Opt Many:Mand 1
FrtDiscrp:DiscrpType, Opt Many:Mand 1

LOGICAL DATABASE DESIGN:

TMRPrefix	6	P/F
StpSeqNo	1	P/F
TIN	8	P/F
MovEvntCd	3	P/F
EvntTy	1	P/F
DiscrpTCN	17	P
DiscrpCd	2	P

```
    DiscrpPc                                4

PARTITION:

     FrtDiscrp                              RU
        DiscrpType                          R
        FrtMEvent                           R;
    ATTRIBUTE IS:
         SEC-CLASS        'UNCLASSIFIED' ,
         TYPE             'AN' ,
         PICTURE          'X(42)' ,
         FIELD-LENGTH      '42' ,
         volatility       'DYNAMIC' ;
    SOURCE IS:       'FREIGHT DATA MODEL' ;
    KEYWORD IS:      'LOB' ,
                     'Freight' ,
                     'Data Model' ;
    CARDINALITY IS:
                     ;
    COLLECTED:       IN FrtDiscrp-File ;
```

45 DEFINE SET FrtMEvent-File ;
DESCRIPTION;
Freight Movement Event File.
This file is a collection of information that results from significant movement events occuring during the shipment of freight from origin to destination.
;
ATTRIBUTE IS:
MEDIA 'DISK' ,
SEC-CLASS 'UNCLASSIFIED' ,
UPDATE-FREQUENCY
'DAILY' ,
UPDATE-METHOD 'INTERACTIVE-BATCH' ,
TABLE-FORM 'LOCAL' ,
volatility 'DYNAMIC' ,
EST-SIZE '89 CHAR RECORDS' ;
SOURCE IS: 'FREIGHT DATA MODEL' ;
KEYWORD IS: 'Freight' ,
'Data Model' ,
'LOE' ,
'TACCS' ;
COLLECTION OF:
FrtMEvent ;

Define Entity FrtMEvent ;
DESCRIPTION;
Freight Movement Event.
This entity is an occurrence of the information for freight movement events for each freight movement. This is the master file record for the FrtMEvent File.
;
LAYOUT;

DATA MODEL:

FrtMEvent:MEventType, Opt Many:Mand 1
FrtMEvent:FrtDiscrp, Mand 1:Opt Many
FrtMEvent:FrtMovAsset, Opt Many:Mand 1 (Origin)
FrtMEvent:VehStopPtAs, Opt Many:Mand 1 (Destination)
FrtMEvent:CgoAddress, Opt Many:Mand 1

LOGICAL DATABASE DESIGN:

TMRPrefix	6	P/F
StpSeqNo	1	P/F
TIN	8	P/F
MovEvntCd	3	P/F
EvntTy	1	P/F

```
      EvntDte                          5
      NewTyCarrCd                      1
      NewModeMethShpmtCd               1
      NewTyMovNoCd                     1
      NewTMR                           12
      NewTIN                           8
      NewEvntLoc                       6
      NewFWTNo                         12
      PstDte                           5
      TCN                              17
      TCNPc                            4
      EvntLoc                          6       F

PARTITION:

      FrtMEvent                          CRU
         MEventType                       R
         FrtDiscrp                        CRUD
            DiscrpType                    R
         VehStopPtAs                      RU
            ChangeType                    R
            VehStopPt                     R
         FrtMovAsset                      RU
            ChangeType                    R
            FreightMov                    RU
         CgoAddress                       R
            CgoActivity                   R
;
   ATTRIBUTE IS:
        SEC-CLASS       'UNCLASSIFIED' ,
        TYPE            'AN' ,
        volatility      'DYNAMIC' ,
        PICTURE         'X(89)' ,
        FIELD-LENGTH     '89' ;
   SOURCE IS:       'FREIGHT DATA MODEL' ;
   KEYWORD IS:      'LOB' ,
                    'Freight' ,
                    'Data Model' ;
   COLLECTED:       IN FrtMEvent-File ;
```

46 DEFINE SET FrtMovAsset-File ;
DESCRIPTION;
Freight Movement Asset File.
This file contains data relating a TMR and asset to its spot/load/pull date and time at the origin.
;
ATTRIBUTE IS:
volatility 'DYNAMIC' ,
EST-SIZE '47 CHAR RECORDS' ,
MEDIA 'DISK' ,
SEC-CLASS 'UNCLASSIFIED' ,
UPDATE-METHOD 'INTERACTIVE' ,
UPDATE-FREQUENCY
'AS PER CHANGE' ,
TABLE-FORM 'LOCAL' ,
RETENTION 'TEMPORARY' ;
KEYWORD IS: 'Freight' ,
'LOB' ,
'Data Model' ,
'TACCS' ;
COLLECTION OF:
FrtMovAsset ;

Define Entity FrtMovAsset ;
DESCRIPTION:
Freight Movement Asset.
This entity is an occurrence of actual spot/load/pull date and time data relating to assets at the origin for each TMR.
;
LAYOUT;

DATA MODEL:

FrtMovAsset:FreightMov, Opt Many:Mand 1
FrtMovAsset:FrtMEvent, Mand 1:Opt Many (Origin)
FrtMovAsset:ChangeType, Opt Many:Opt 1
FrtMovAsset:VehStopPtAs, Mand 1:Opt Many

LOGICAL DATABASE DESIGN:

TMRPrefix	6	P/F
TIN	8	P
ActlSpotDte	5	
ActlLoadDte	5	
ActlPullDte	5	
ActlSpotTime	4	
ActlLoadTime	4	
ActlPullTime	4	
OrigCdDte	5	

```
    OrigChCd                                1      F

PARTITION:

    FrtMovAsset                             CRU
        FreightMov                          RU
        ChangeType                          R
;
    ATTRIBUTE IS:
         SEC-CLASS          'UNCLASSIFIED' ,
         TYPE               'AN' ,
         PICTURE            'X(47)' ,
         FIELD-LENGTH        '47' ,
         volatility         'DYNAMIC' ,
         RETENTION          'TEMPORARY' ;
    SOURCE IS:       'FREIGHT DATA MODEL' ;
    KEYWORD IS:      'Freight' ,
                     'LOB' ,
                     'Data Model' ;
    COLLECTED:       IN FrtMovAsset-File ;
```



```
47      DEFINE SET                              FrtRemarkLn-File ;
    DESCRIPTION;
Freight Remark Line File.
This file contains remarks pertaining to a particular movement and stop.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         UPDATE-FREQUENCY
                            'DAILY' ,
         UPDATE-METHOD       'INTERACTIVE-BATCH' ,
         TABLE-FORM         'LOCAL' ,
         EST-SIZE           '259 CHAR RECORDS' ,
         volatility         'DYNAMIC' ;
    SOURCE IS:          'FREIGHT DATA MODEL' ;
    KEYWORD IS:         'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
    COLLECTION OF:
         FrtRemarkLn ;

    Define Entity                           FrtRemarkLn ;
    DESCRIPTION;
Freight Remark Line.
This entity is the occurrence of information associated with a freight
move or freight move stop not provided for in the other freight
entities.  This record is the master file record for Freight Remark
Line File.
 ;
    LAYOUT;


DATA MODEL:

     FrtRemarkLn:FreightMov, Opt Many:Mand 1
     FrtRemarkLn:VehStopPt, Opt Many:Opt 1


LOGICAL DATABASE DESIGN:

     TMRPrefix                              6       P/F
     StpSeqNo                               1       P/F
     RmrkLineNo                             2       P
     FrtRmrk                                250


PARTITION:
```



```
 FrtRemarkLn                                CRUD
    FreightMov                              R
    VehStopPt                               R;
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(259)' ,
     FIELD-LENGTH     '259' ,
     volatility      'DYNAMIC' ;
SOURCE IS:      'FREIGHT DATA MODEL' ;
KEYWORD IS:     'Freight' ,
                'LOB' ,
                'Data Model' ;
COLLECTED:      IN FrtRemarkLn-File ;
```



```
48      DEFINE SET                              Holiday-Tbl ;
    DESCRIPTION;
Holiday Table.
This table contains Holiday Area Codes and their descriptions.
 ;
    ATTRIBUTE IS:
        MEDIA               'DISK' ,
        SEC-CLASS           'UNCLASSIFIED' ,
        volatility          'STATIC' ,
        UPDATE-METHOD        'INTERACTIVE' ,
        UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
        EST-SIZE            '26 CHAR RECORDS' ,
        EST-VOLUME          '14 RECORDS' ,
        TABLE-FORM          'COMMAND' ;
    SOURCE IS:          'TMAS DATA MODEL' ;
    KEYWORD IS:         'TMAS' ,
                        'LOB' ,
                        'Data Model' ,
                        'TACCS' ;
    COLLECTION OF:
        Holiday ;

    Define Entity                               Holiday ;
    DESCRIPTION;
Holiday.
Identifies a categorization of holidays by area which [illegible]
delivery operations.
 ;
    LAYOUT;

DATA MODEL:

     Holiday:FreightAdrs, Mand1:Opt Many


LOGICAL DATABASE DESIGN:

     HolAreaCd                              1     P
     HolAreaCdDescr                        25


PARTITION:

     Holiday                                CRUD
     FreightAdrs                            RU;
    ATTRIBUTE IS:
        volatility          'STATIC' ,
        RETENTION           'PERMANENT' ,
```



```
     TYPE              'AN' ,
     FIELD-LENGTH       '26' ,
     PICTURE           'X(26)' ,
     SEC-CLASS         'UNCLASSIFIED' ;
SOURCE IS:       'TMAS DATA MODEL' ;
KEYWORD IS:      'TMAS' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 14 ;
COLLECTED:       IN Holiday-Tbl ;
```

```
49      DEFINE SET                              HwyClncCd-Tbl ;
    DESCRIPTION;
Highway Clearance Code Table.
This table contains Highway Clearance Requirements Codes and their
descriptions.
 ;
    ATTRIBUTE IS:
        MEDIA           'DISK' ,
        SEC-CLASS       'UNCLASSIFIED' ,
        RETENTION       'PERMANENT' ,
        UPDATE-FREQUENCY
                        'PER CODE CHANGE' ,
        UPDATE-METHOD     'BATCH' ,
        TABLE-FORM      'COMMAND' ,
        EST-VOLUME      '4 RECORDS' ,
        EST-SIZE        '21 CHAR RECORDS' ,
        volatility      'STATIC' ;
    SOURCE IS:      'FREIGHT DATA MODEL' ;
    KEYWORD IS:     'Freight' ,
                    'Data Model' ,
                    'LOB' ,
                    'TACCS' ;
    COLLECTION OF:
        HwyClncCd ;

    Define Entity                           HwyClncCd ;
    DESCRIPTION;
Highway Clearance Code
This entity is the occurrence of a specific Highway Clearance
Requirement Code and Highway Clearance Requirement Code description.
This is the master record for the Highway Clearance Code Table.
 ;
    LAYOUT;


DATA MODEL:

     HwyClncCd:FreightMov, Opt 1:Opt Many


LOGICAL DATABASE DESIGN:

     HwyClncRqmtCd                      1       P
     HwyClncRqmtCdDescr                 20


PARTITION:

     HwyClncCd                          CRD;
```

```
ATTRIBUTE IS:
     SEC-CLASS        'UNCLASSIFIED' ,
     TYPE             'AN' ,
     PICTURE          'X(21)' ,
     FIELD-LENGTH      '21' ,
     RETENTION        'PERMANENT' ,
     volatility       'STATIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'Freight' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 4 ;
COLLECTED:       IN HwyClncCd-Tbl ;
```

```
50      DEFINE SET                              LMF-Tbl ;
        DESCRIPTION;
    Language Media Format Table.
    This table is a collection of LMF code values and descriptions.
     ;
        ATTRIBUTE IS:
            MEDIA           'DISK' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            volatility      'STATIC' ,
            UPDATE-METHOD     'INTERACTIVE' ,
            UPDATE-FREQUENCY
                            'AS PER CHANGE' ,
            EST-SIZE        '22 CHAR RECORDS' ,
            EST-VOLUME      '4 RECORDS' ,
            TABLE-FORM      'COMMAND' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ,
                        'Data Model' ,
                        'TACCS' ;
        COLLECTION OF:
            LMF ;

        Define Entity                           LMF ;
        DESCRIPTION;
    Language Media Format.
    Identifies the type of communication format that a transceiver terminal
    has for sending and receiving communication traffic.
     ;
        LAYOUT;

    DATA MODEL:

         LMF:FreightAdrs, Mand1:Opt Many (LMF1)
         LMF:FreightAdrs, Mand1:Opt Many (LMF2)


    LOGICAL DATABASE DESIGN:

         LMFCd                                   2    P
         LMF Descr                              20


    PARTITION:

         LMF                                    CRUD
         FreightAdrs                            RU;
        ATTRIBUTE IS:
            volatility      'STATIC' ,
```

```
     TYPE              'AN' ,
     FIELD-LENGTH       '22' ,
     PICTURE           'X(22)' .
     SEC-CLASS         'UNCLASSIFIED' ;
SOURCE IS:       'TMAS DATA MODEL' ;
KEYWORD IS:      'TMAS' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 4 ;
COLLECTED:       IN LMF-Tbl ;
```



```
51       DEFINE SET                              MACOM-Tbl ;
     DESCRIPTION;
Major Command Table.
This table contains theater MACOM codes and their descriptions.
 ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          volatility         'STATIC' ,
          UPDATE-METHOD       'INTERACTIVE' ,
          UPDATE-FREQUENCY
                             'AS PER CHANGE' ,
          EST-SIZE           '38 CHAR RECORDS' ,
          TABLE-FORM         'COMMAND' ,
          EST-VOLUME         '86 RECORDS' ;
     SOURCE IS:         'TMAS DATA MODEL' ;
     KEYWORD IS:        'TMAS' ,
                        'LOB' ,
                        'Data Model' ,
                        'TACCS' ;
     COLLECTION OF:
          MACOM ;
```



```
     Define Entity                           MACOM ;
     DESCRIPTION;
Major Command.
Identifies those organizations viewed to be major command elements
within a theater as determined by the Movement Control Agency (MCA).
 ;
     LAYOUT;

DATA MODEL:

      MACOM:Activity, Mand1:Opt Many


LOGICAL DATABASE DESIGN:

     MACOMCd                                  3   P
     MACOMCdDescr                            35   S


PARTITION:

      MACOM                                  CRUD
      Activity                               RU;
     ATTRIBUTE IS:
          volatility         'STATIC' ,
          TYPE               'AN' ,
```



```
     FIELD-LENGTH     '38' ,
     PICTURE          'X(38)' ,
     SEC-CLASS        'UNCLASSIFIED' ;
SOURCE IS:       'TMAS DATA MODEL' ;
KEYWORD IS:      'TMAS' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 86 ;
COLLECTED:       IN MACOM-Tbl ;
```

```
52      DEFINE SET                              MCEType-Tbl ;
    DESCRIPTION;
Movement Control Element Type Table.
This table contains MCE Type Codes and their descriptions.
 ;
    ATTRIBUTE IS:
        MEDIA           'DISK' ,
        SEC-CLASS       'UNCLASSIFIED' ,
        volatility      'STATIC' ,
        UPDATE-METHOD     'INTERACTIVE' ,
        UPDATE-FREQUENCY
                        'AS PER CHANGE' ,
        TABLE-FORM      'COMMAND' ,
        RETENTION       'PERMANENT' ,
        EST-SIZE        '31 CHAR RECORDS' ,
        EST-VOLUME      '2 RECORDS' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    COLLECTION OF:
        MCEType ;

    Define Entity                           MCEType ;
    DESCRIPTION;
Movement Control Element Type.
Identifies the type of MCE, i.e. MCT or BMCT, which services the
ShipToAAC.
 ;
    LAYOUT;

LOGICAL DATABASE DESIGN:

     MCETyCd                                 1      P
     MCETyCdDescr                           30


DATA MODEL:

     MCEType:MovConElm, Mand1:Opt Many


PARTITION:

     MCEType                                CRUD
     MovConElm                              RU

     COMMENT:  Update MCETyCd in the MovConElm Table if it changes.
```

```
;
   ATTRIBUTE IS:
        volatility      'STATIC' ,
        TYPE            'AN' ,
        FIELD-LENGTH     '31' ,
        PICTURE         'X(31)' ,
        SEC-CLASS       'UNCLASSIFIED' ;
   SOURCE IS:      'TMAS DATA MODEL' ;
   KEYWORD IS:     'TMAS' ,
                   'LOB' ,
                   'Data Model' ;
   CARDINALITY IS:
                   2 ;
   COLLECTED:      IN MCEType-Tbl ;
```

53 DEFINE SET MEvent-File ;
DESCRIPTION;
Movement Event File.
This file is a collection of information that results from significant movement events occuring in a shipment of a container from origin to destination.
;
ATTRIBUTE IS:
volatility 'DYNAMIC' ,
EST-VOLUME '60,000 RECORDS' ,
MEDIA 'DISK' ,
REGULATION 'DAMMS-R O & O PLAN' ,
RETENTION '60 DAYS' ,
SEC-CLASS 'UNCLASSIFIED' ,
UPDATE-METHOD 'INTERACTIVE' ,
TABLE-FORM 'LOCAL' ,
EST-SIZE '112 CHAR RECORDS' ;
SOURCE IS: 'CONTAINER DATA MODEL' ;
KEYWORD IS: 'Data Model' ,
'LOB' ,
'TACCS' ,
'Container' ;
COLLECTION OF:
MEvent ;

Define Entity MEvent ;
DESCRIPTION;
Movement Event.
This entity is an occurrence of a movement event for a given container move that changes the status of that move. Movement events are associated with and reported at movement stops. However, some events occur and are reported at other event locations (current DODAAC).
This is the master file record for the MEvent-File.
;
LAYOUT;

DATA MODEL:

MEvent:ShpmtMethod, Opt Many:Opt 1 (MILSTAMP)
MEvent:ReasonDeny, Opt Many:Opt 1
MEvent:MEventType, Opt Many:Mand 1
MEvent:CgoActivity, Opt Many:Opt 1
MEvent:CntnrDiscrp, Mand 1:Opt Many
MEvent:CntnrMovStp, Opt Many:Mand 1 (Stop)
MEvent:CntnrMov, Opt Many:Mand 1 (Port)
MEvent:CgoPort, Opt Many:Opt 1
MEvent:TypeMovNo, Opt Many:Mand 1
MEvent:DespMediaCd, Opt Many:Opt 1
MEvent:TypeMove, Opt Many:Opt 1

MEvent:ORICO, Opt Many:Opt 1

LOGICAL DATABASE DESIGN:

CntnrOwnAbbr	4	P/F
CntnrNo	5	P/F
Consignee	6	P/F
DupeStpIndex	1	P/F
MovEvntCd	3	P/F
EvntTy	1	P/F
TyPwrCd	1	P/F
PstDte (Request)	5	S
EvntDte (Start)	5	S
SeqNo	1	
NewTyCarrCd	1	
NewEvntLoc	6	
NewTyMovNoCd	1	
NewMovNo	20	
ActlPcCnt	4	
DspoActv	6	
NewTAC	4	
MgrCd	2	
ShpmtUTCN	17	F
TyMovCd	1	F
NewModeMethShpmtCd	1	F
TyMovNoCd (C,M,F,V,D)	1	F
PrtCd	3	F
AACCurr (Req)	6	F
RespCd	1	F
RsnDenyCd	2	F
OrigCdTy	1	F
OrigCd	3	F

PARTITION:

MEvent	**CRUD**
CgoPort	R
VoyageStop	R
Voyage	R
ReasonDeny	R
TyMovNo	R
RespMediaCd	R
ORICO	R
TypeMove	R
CgoActivity	R
CntnrDiscrp	CRUD
DiscrpType	R
CntnrMov	RU

```
        CntnrMovStp                          RU
          CntnrRmrkLn                        CRU
        CgoMCE                               R
        ShpmtMethod                          R
;
   ATTRIBUTE IS:
        volatility      'DYNAMIC' ,
        RETENTION       '60 DAYS' ,
        SEC-CLASS       'UNCLASSIFIED' ,
        TYPE            'AN' ,
        PICTURE         'X(112)' ,
        FIELD-LENGTH     '112' ;
   SOURCE IS:      'CONTAINER DATA MODEL' ;
   KEYWORD IS:     'LOB' ,
                   'Data Model' ,
                   'Container' ;
   CARDINALITY IS:
                   60000 ;
   COLLECTED:      IN MEvent-File ;
```

```
54      DEFINE SET                              MEventType-Tbl ;
    DESCRIPTION;
Movement Event Type Table.
This table is a collection of movement event codes and descriptions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         RETENTION          'PERMANENT' ,
         UPDATE-FREQUENCY
                            'PER CODE CHANGES' ,
         UPDATE-METHOD       'INTERACTIVE-BATCH' ,
         TABLE-FORM         'COMMAND' ,
         EST-SIZE           '19 CHAR RECORDS' ,
         volatility         'STATIC' ,
         EST-VOLUME         '10 RECORDS' ;
    SOURCE IS:          'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
    KEYWORD IS:         'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ,
                        'Container' ;
    COLLECTION OF:
         MEventType ;

    Define Entity                           MEventType ;
    DESCRIPTION;
Movement Event Type.
This entity is the occurrence of information related to type movement
events. This record is the master record of the MEventType Table.
 ;
    LAYOUT;

LOGICAL DATABASE DESIGN:

     MovEvntCd                              3      P
     EvntTy                                 1      P
     MovEvntDescr                           15


FREIGHT DATA MODEL:

    MEventType:FrtMEvent, Mand 1:Opt Many


FREIGHT PARTITION:

     MEventType                             CRD
```

CONTAINER DATA MODEL:

MEventType:MEvent, Mand 1:Opt Many

CONTAINER PARTITION:

```
 MEventType                              CRD;
ATTRIBUTE IS:
     SEC-CLASS        'UNCLASSIFIED' ,
     TYPE             'AN' ,
     PICTURE          'X(19)' ,
     FIELD-LENGTH      '19' ,
     volatility       'STATIC' ;
SOURCE IS:       'CONTAINER DATA MODEL' ,
                 'FREIGHT DATA MODEL' ;
KEYWORD IS:      'LOB' ,
                 'Freight' ,
                 'Data Model' ,
                 'Container' ;
CARDINALITY IS:
                 10 ;
COLLECTED:       IN MEventType-Tbl ;
```

```
55      DEFINE SET                              MMCUnique-Tbl ;
    DESCRIPTION;
Materiel Management Center Unique Table.
This table is a collection of MMC DODAAC and their unit descriptions.
 ;
    ATTRIBUTE IS:
        MEDIA           'DISK' ,
        SEC-CLASS       'UNCLASSIFIED' ,
        volatility      'STATIC' ,
        UPDATE-METHOD     'INTERACTIVE' ,
        UPDATE-FREQUENCY
                        'AS PER CHANGE' ,
        EST-SIZE        '41 CHAR RECORDS' ,
        TABLE-FORM      'COMMAND' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'Data Model' ,
                    'TACCS' ;
    COLLECTION OF:
        MMCUnique ;

    Define Entity                           MMCUnique ;
    DESCRIPTION;
Materiel Management Center Unique.
Identifies the MMC which services the ShipToAAC.
 ;
    LAYOUT;

DATA MODEL:

     MMCUnique:Activity, Opt Many: Mand1
     MMCUnique:FreightAdrs, Opt1:Opt Many (MMC1)
     MMCUnique:FreightAdrs, Opt1:Opt Many (MMC2)


LOGICAL DATABASE DESIGN:

     AACMMC                                 C    P/F
     AACMMCDescr                          35


PARTITION:

     MMCUnique                              CRUD
     FreightAdrs                            RU
     Activity                               R;
    ATTRIBUTE IS:
        volatility      'STATIC' ,
```

```
      TYPE              'AN' ,
      FIELD-LENGTH       '41' ,
      PICTURE           'X(41)' ,
      SEC-CLASS         'UNCLASSIFIED' ;
SOURCE IS:        'TMAS DATA MODEL' ;
KEYWORD IS:       'TMAS' ,
                  'LOB' ,
                  'Data Model' ;
COLLECTED:        IN MMCUnique-Tbl ;
```

```
56      DEFINE SET                              Month-Tbl ;
    DESCRIPTION;
Month Table.
This table contains Month Codes and their descriptions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         RETENTION          'PERMANENT' ,
         UPDATE-FREQUENCY
                            'PER CODE CHANGE' ,
         UPDATE-METHOD       'BATCH' ,
         TABLE-FORM         'COMMAND' ,
         EST-VOLUME         '12 RECORDS' ,
         EST-SIZE           '4 CHAR RECORDS' ,
         volatility         'STATIC' ;
    SOURCE IS:      'FREIGHT DATA MODEL' ,
                    'CONTAINER DATA MODEL' ;
    KEYWORD IS:     'Freight' ,
                    'Data Model' ,
                    'LOB' ,
                    'TACCS' ,
                    'Container' ;
    COLLECTION OF:
         Month ;

    Define Entity                           Month ;
    DESCRIPTION;
Month.
This entity is an occurrence of a specific Month Code and Month Code
description. This is the master record for the Month Table.
 ;
    LAYOUT;

LOGICAL DATABASE DESIGN:

     MthCd                                  1     P
     MthCdDescr                             3


FREIGHT DATA MODEL:

    Month:FreightMov, Opt 1:Opt Many (BMCT)
    Month:FreightMov, Mand 1:Opt Many (MCT)


FREIGHT PARTITION:

     Month                                  CRD
```

CONTAINER DATA MODEL:

Month:CntnrMov, Mand 1:Opt Many

CONTAINER PARTITION:

```
Month                                          CRD;
ATTRIBUTE IS:
     SEC-CLASS        'UNCLASSIFIED' ,
     TYPE             'AN' ,
     PICTURE          'X(04)' ,
     FIELD-LENGTH      '04' ,
     RETENTION        'PERMANENT' ,
     volatility       'STATIC' ;
SOURCE IS:       'CONTAINER DATA MODEL' ,
                 'FREIGHT DATA MODEL' ;
KEYWORD IS:      'LOB' ,
                 'Freight' ,
                 'Data Model' ,
                 'Container' ;
CARDINALITY IS:
                 12 ;
COLLECTED:       IN Month-Tbl ;
```

```
57      DEFINE SET                              MovConElm-Tbl ;
     DESCRIPTION;
  Movement Control Element Table.
  This table provides MCE Codes, their MCE names, and other
  associated data.
   ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          volatility         'STATIC' ,
          UPDATE-METHOD       'INTERACTIVE' ,
          UPDATE-FREQUENCY
                             'AS PER CHANGE' ,
          EST-SIZE           '52 CHAR RECORDS' ,
          TABLE-FORM         'COMMAND' ;
     SOURCE IS:         'TMAS DATA MODEL' ;
     KEYWORD IS:        'TMAS' ,
                        'LOB' ,
                        'Data Model' ,
                        'TACCS' ;
     COLLECTION OF:
          MovConElm ;

     Define Entity                          MovConElm ;
     DESCRIPTION;
  Movement Control Element.
  Identifies the MCE which services the ShipToAAC, its type, its AAC,
  and the related AACBnMc/CMCC.
   ;
     LAYOUT;


  DATA MODEL:


       MovConElm:Activity, Opt Many:Mand1 (AACMCE)
       MovConElm:Activity, Opt Many:Mand1 (AACBnMCCMCC)
       MovConElm:MCEType, Opt Many:Mand1
       MovConElm:FreightAdrs, Mand1:Opt Many


  LOGICAL DATABASE DESIGN:

       MCETyCd                          1     F__
       MCECd                            2     P  | S
         MCEPrefix                      1       __|
         MCESuffix                      1
       MCENme                          35     S
       AACBnMCCMCC (AACCurr)            6     F
       AACMCE (AACCurr)                 6     F
```

AD-A190 395 FUNCTIONAL DESCRIPTION FOR THE DEPARTMENT OF THE ARMY 5/10
MOVEMENTS MANAGEMEN..(U) INTERNATIONAL BUSINESS
SERVICES INC PRINCE GEORGE VA DEFENSE S.. W ANCKAITIS
UNCLASSIFIED 31 DEC 87 DSDPG-375-049-87-3-VOL-3 F/G 12/7 NL

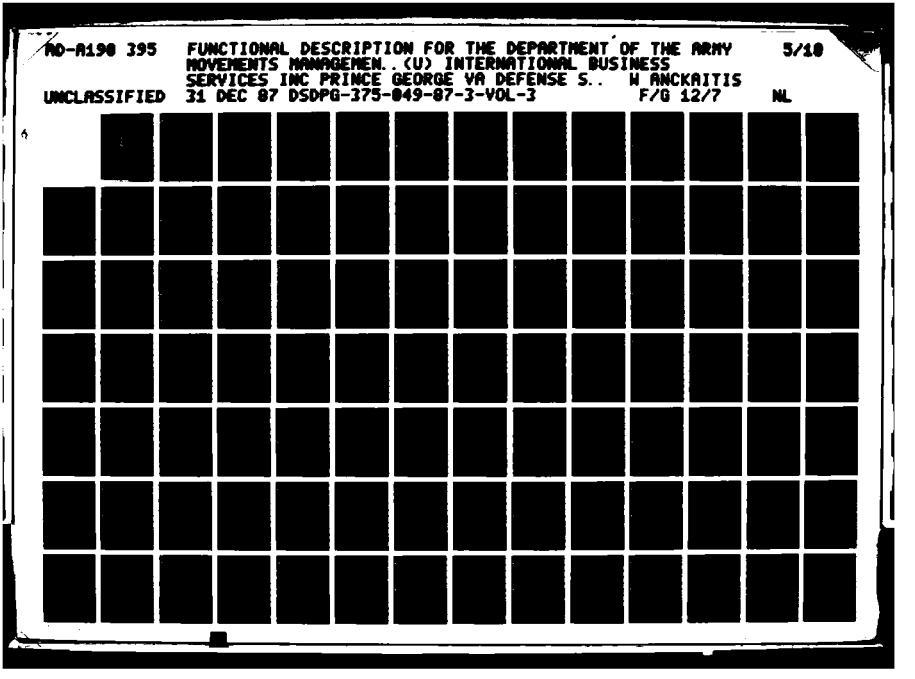

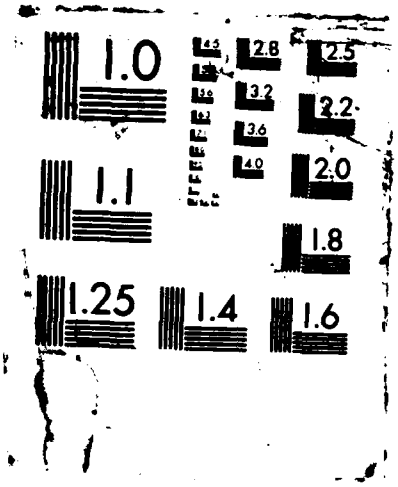
1.0
2.8
2.5
3.2
2.2
3.6
4.0
2.0
1.1
1.8
1.25
1.4
1.6

PARTITION:

```
 MovConElm                                  CRUD
 FreightAdrs                                RU
 Activity                                   R
 MCEType                                    R;
ATTRIBUTE IS:
     volatility      'STATIC' ,
     TYPE            'AN' ,
     FIELD-LENGTH     '52' ,
     PICTURE         'X(52)' ,
     SEC-CLASS       'UNCLASSIFIED' ;
SOURCE IS:      'TMAS DATA MODEL' ;
KEYWORD IS:     'TMAS' ,
                'LOB' ,
                'Data Model' ;
COLLECTED:      IN MovConElm-Tbl ;
```

```
58        DEFINE SET                              MovModeCode-Tbl ;
      DESCRIPTION;
   Movement Mode Code Table.
   This table contains Mode Codes, Type Carrier Codes, and Mode Code
   Descriptions.
    ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           RETENTION          'PERMANENT' ,
           UPDATE-FREQUENCY
                              'PER CODE CHANGE' ,
           UPDATE-METHOD       'INTERACTIVE-BATCH' ,
           TABLE-FORM         'COMMAND' ,
           volatility         'STATIC' ,
           EST-VOLUME         '9 RECORDS' ,
           EST-SIZE           '26 CHAR RECORDS' ;
      SOURCE IS:         'FREIGHT DATA MODEL' ,
                         'CONTAINER DATA MODEL' ;
      KEYWORD IS:        'Freight' ,
                         'Data Model' ,
                         'LOB' ,
                         'TACCS' ,
                         'Container' ;
      COLLECTION OF:
           MovModeCode ;

      Define Entity                              MovModeCode ;
      DESCRIPTION;
   Movement Mode Code.
   This entity is an occurrence of a specific Mode Code, Mode Code
   description and Type Carrier Code. This is the master record for the Mov
   Mode Code Table.
    ;
      LAYOUT;


   LOGICAL DATABASE DESIGN:

        ModeCd                                   1     P
        ModeCdDescr                              25

   FREIGHT DATA MODEL:

      MovModeCode:FreightMov, Mand 1:Opt Many


   FREIGHT PARTITION:
```

MovModeCode CRD

CONTAINER DATA MODEL:

MovModeCode:CntnrMov, Mand 1:Opt Man, (TIPS)

CONTAINER PARTITION:

```
MovModeCode                              CRD;
ATTRIBUTE IS:
     SEC-CLASS        'UNCLASSIFIED' ,
     TYPE             'AN' ,
     RETENTION        'PERMANENT' ,
     volatility       'STATIC' ,
     PICTURE          'X(26)' ,
     FIELD-LENGTH      '26' ;
SOURCE IS:       'CONTAINER DATA MODEL' ,
                 'FREIGHT DATA MODEL' ;
KEYWORD IS:      'LOB' ,
                 'Freight' ,
                 'Container' ,
                 'Data Model' ;
CARDINALITY IS:
                 9 ;
COLLECTED:       IN MovModeCode-Tbl ;
```

```
59        DEFINE SET                              MsgCd-Tbl ;
     DESCRIPTION;
Message Code Table.
This table contains Message Code Identifiers and their descriptions.
 ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          RETENTION          'PERMANENT' ,
          UPDATE-FREQUENCY
                             'PER CODE CHANGE' ,
          UPDATE-METHOD        'BATCH' ,
          TABLE-FORM         'COMMAND' ,
          EST-SIZE           '38 CHAR RECORDS' ,
          volatility         'STATIC' ,
          EST-VOLUME         '22 RECORDS' ;
     SOURCE IS:         'FREIGHT DATA MODEL' ;
     KEYWORD IS:        'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
     COLLECTION OF:
          MsgCd ;

     Define Entity                              MsgCd ;
     DESCRIPTION;
Message Code.
This entity is the occurrence of a specific Message Code and code
description. This is the master record for the Message Code Table.
 ;
     LAYOUT;


DATA MODEL:

     Not connected.


LOGICAL DATABASE DESIGN:

     MsgCdId                                 3    P
     MsgCdIdDescr                           35


PARTITION:

     MsgCd                                  CRD
 ;
     ATTRIBUTE IS:
```

```
      SEC-CLASS        'UNCLASSIFIED' ,
      TYPE             'AN' ,
      PICTURE          'X(38)' ,
      FIELD-LENGTH      '38' ,
      RETENTION        'PERMANENT' ,
      volatility       'STATIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'Freight' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 22 ;
COLLECTED:       IN MsgCd-Tbl ;
```

```
60      DEFINE SET                              ORICO-Tbl ;
    DESCRIPTION;
Origin Code Table.
This table contains origin code values, their type (container or
freight), and their descriptions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         RETENTION          'PERMANENT' ,
         UPDATE-FREQUENCY
                            'PER CODE CHANGE' ,
         UPDATE-METHOD        'BATCH' ,
         TABLE-FORM         'COMMAND' ,
         EST-VOLUME         '294 RECORDS' ,
         EST-SIZE           '29 CHAR RECORDS' ,
         volatility         'STATIC' ;
    SOURCE IS:        'CONTAINER DATA MODEL' ;
    KEYWORD IS:       'Container' ,
                      'Data Model' ,
                      'LOB' ,
                      'TACCS' ;
    COLLECTION OF:
         ORICO ;

    Define Entity                           ORICO ;
    DESCRIPTION;
Origin Code.
This entitity is an occurrence of a specific Origin Code, Origin Code
Type, and Origin Code Description.  This is the master record for the
ORICO Table.
 ;
    LAYOUT;

DATA MODEL:

     ORICO:MEvent, Opt1:Opt Many
     ORICO:ORICOTy, Opt Many:Mand 1

LOGICAL DATABASE DESIGN:

     OrigCdTy                            1     P/F
     OrigCd                              3     P
     OrigCdDescr                        25

PARTITION:

     ORICO                              CRUD
        ORICOTy                         R;
```

```
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(29)' ,
     FIELD-LENGTH     '29' ,
     RETENTION       'PERMANENT' ,
     volatility      'STATIC' ;
SOURCE IS:      'CONTAINER DATA MODEL' ;
KEYWORD IS:     'Container' ,
                'Data Model' ,
                'LOB' ;
CARDINALITY IS:
                294 ;
COLLECTED:      IN ORICO-Tbl ;
```

```
61       DEFINE SET                              ORICOTy-Tbl ;
     DESCRIPTION;
   Origin Code Type Table.
   This table contains origin code types and their descriptions.
    ;
       ATTRIBUTE IS:
            MEDIA            'DISK' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            RETENTION        'PERMANENT' ,
            volatility       'STATIC' ,
            UPDATE-FREQUENCY
                             'PER CODE CHANGE' ,
            UPDATE-METHOD      'BATCH/INTERACTIVE' ,
            TABLE-FORM       'COMMAND' ,
            EST-VOLUME       '2 RECORDS' ,
            EST-SIZE         '26 CHAR RECORDS' ;
       SOURCE IS:       'CONTAINER DATA MODEL' ;
       KEYWORD IS:      'Container' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
       COLLECTION OF:
            ORICOTy ;

       Define Entity                          ORICOTy ;
       DESCRIPTION;
   Origin Code Type
   Identifies the classification of origin code, i.e. container or freight
   (breakbulk).
    ;
       LAYOUT;

   DATA MODEL:

        ORICOTy:ORICO, Mand1:Opt Many

   LOGICAL DATABASE DESIGN:

        OrigCdTy                                 1    P
        OrigCdTyDescr                           25

   PARTITION:

        ORICOTy                                 CRU;
       ATTRIBUTE IS:
            FIELD-LENGTH     '26' ,
            TYPE             'AN' ,
            PICTURE          'X(26)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
```

```
     volatility      'STATIC' ,
     RETENTION       'PERMANENT' ;
SOURCE IS:      'CONTAINER DATA MODEL' ;
KEYWORD IS:     'Container' ,
                'LOB' ,
                'Data Model' ;
CARDINALITY IS:
                2 ;
COLLECTED:      IN ORICOTy-Tbl ;
```

```
62        DEFINE SET                              OceanCarr-Tbl ;
      DESCRIPTION;
   Ocean Carrier Table.
   This table contains ocean carrier type code, ocean carrier
   abbreviations, and their full names.
    ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           RETENTION          'PERMANENT' ,
           UPDATE-FREQUENCY
                              'PER CODE CHANGE' ,
           TABLE-FORM         'COMMAND' ,
           EST-VOLUME         '40 RECORDS' ,
           EST-SIZE           '30 CHAR RECORDS' ,
           volatility         'STATIC' ;
      SOURCE IS:         'CONTAINER DATA MODEL' ,
                         'MILSTAMP PARA B-47' ;
      KEYWORD IS:        'Container' ,
                         'Data Model' ,
                         'LOB' ,
                         'TACCS' ;
      COLLECTION OF:
           OceanCarr ;

      Define Entity                              OceanCarr ;
      DESCRIPTION;
   Ocean Carrier.
   This entity is the occurence of a specific ocean carrier abbreviation
   and in-the-clear name.  This is the master record for the OceanCarr
   Table.
    ;
      LAYOUT;

   DATA MODEL:

      OceanCarr:Voyage, Opt 1:Opt Many
      OceanCarr:TypeCarrier, Opt Many:Mand 1

   LOGICAL DATABASE DESIGN:

      TyCarrCd                                   1  F
      OceanCarrAbbr                              4  P
      OceanCarrNme                               25

   PARTITION:

      OceanCarr                                  CRD
```

NOTE: Relationship to Voyage is optional on OceanCarr side since ocean carrier information may not be available.

;

```
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(30)' ,
     FIELD-LENGTH     '30' ,
     volatility      'STATIC' ;
SOURCE IS:      'CONTAINER DATA MODEL' ,
                'MILSTAMP PARA B-47' ;
KEYWORD IS:     'Container' ,
                'Data Model' ,
                'LOB' ;
CARDINALITY IS:
                40 ;
COLLECTED:      IN OceanCarr-Tbl ;
```

```
63        DEFINE SET                              OrdinalCd-Tbl ;
      DESCRIPTION;
   Ordinal Code Table.
   This table contains Deutsche Bundesbahn Ordinal, Ordinal Numbers and
   their descriptions.
    ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           RETENTION          'PERMANENT' ,
           UPDATE-FREQUENCY
                              'PER CODE CHANGE' ,
           UPDATE-METHOD        'BATCH' ,
           TABLE-FORM         'COMMAND' ,
           EST-VOLUME         '85 RECORDS' ,
           EST-SIZE           '57 CHAR RECORDS' ,
           volatility         'STATIC' ;
      SOURCE IS:         'FREIGHT DATA MODEL' ;
      KEYWORD IS:        'Freight' ,
                         'Data Model' ,
                         'LOB' ,
                         'TACCS' ;
      COLLECTION OF:
           OrdinalCd ;

      Define Entity                          OrdinalCd ;
      DESCRIPTION;
   Ordinal Code.
   This entity is an occurrence of a specific Ordinal Code and Ordinal Code
   Description. This is the master record for the Ordinal Code Table.
    ;
      LAYOUT;

   DATA MODEL:

        OrdinalCd:RailMov, Mand 1:Opt Many


   LOGICAL DATABASE DESIGN:

        OrdnNo                                 7      P
        OrdnDescr                              50


   PARTITION:

        OrdinalCd                              CRD;
      ATTRIBUTE IS:
           SEC-CLASS          'UNCLASSIFIED' ,
```

```
     TYPE              'AN' ,
     PICTURE           'X(57)' ,
     FIELD-LENGTH       '57' ,
     RETENTION         'PERMANENT' ,
     volatility        'STATIC' ;
SOURCE IS:        'FREIGHT DATA MODEL' ;
KEYWORD IS:       'Freight' ,
                  'LOB' ,
                  'Data Model' ;
CARDINALITY IS:
                  85 ;
COLLECTED:        IN OrdinalCd-Tbl ;
```

```
64      DEFINE SET                          Pallet463L-File ;
    DESCRIPTION;
Pallet 463L File.
This file contains quantitative data on the number of USAF 463L pallets
and associated tie-down equipment on hand at a consignee.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         UPDATE-FREQUENCY
                            'DAILY' ,
         UPDATE-METHOD       'INTERACTIVE-BATCH' ,
         TABLE-FORM         'LOCAL' ,
         EST-SIZE           '33 CHAR RECORDS' ,
         volatility         'DYNAMIC' ;
    SOURCE IS:          'FREIGHT DATA MODEL' ;
    KEYWORD IS:         'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
    COLLECTION OF:
         Pallet463L ,

    Define Entity                       Pallet463L ;
    DESCRIPTION;
Pallet 463L.
This entity is the occurrence of 463L Pallet information at consignee
locations. This record is the master file record for the Pallet463L file
.
 ;
    LAYOUT;

DATA MODEL:

     Pallet463L:CgoAddress, Opt 1:Mand 1


LOGICAL DATABASE DESIGN:

     Consignee                          6      P/F
     Pallets                            3
     TopNets                            4
     SideNets                           4
     Chains                             4
     Straps                             4
     Devices                            4
     Dunnage                            4

PARTITION:
```

```
 Pallet463L                                CRUD
    CgoAddress                             R;
ATTRIBUTE IS:
     SEC-CLASS        'UNCLASSIFIED' ,
     TYPE             'AN' ,
     PICTURE          'X(33)' ,
     FIELD-LENGTH      '33' ,
     volatility       'DYNAMIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'Freight' ,
                 'LOB' ,
                 'Data Model' ;
COLLECTED:       IN Pallet463L-File ;
```

```
65      DEFINE SET                              Port-Tbl ;
    DESCRIPTION;
Port Table.
This table contains MILSTAMP Port Codes and their descriptions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'STATIC' ,
         UPDATE-METHOD       'INTERACTIVE' ,
         UPDATE-FREQUENCY
                            'PER CODE CHANGE' ,
         RETENTION          'PERMANENT' ,
         TABLE-FORM         'COMMAND' ,
         EST-SIZE           '29 CHAR RECORDS' ,
         EST-VOLUME         '332 RECORDS' ;
    SOURCE IS:        'TMAS DATA MODEL' ;
    KEYWORD IS:       'TMAS' ,
                      'LOB' ,
                      'Data Model' ,
                      'TACCS' ;
    COLLECTION OF:
         Port ;

    Define Entity                           Port ;
    DESCRIPTION;
Port.
This entity is an occurrence of a specific MILSTAMP Port Code,
Port Type and Port Name.  This is the master record for the Port
Table.
 ;
    LAYOUT;

DATA MODEL:

     Port:FreightAdrs, Mand1:Opt Many (Water)
     Port:FreightAdrs, Mand1:Opt Many (Air)
     Port:PortType, Opt Many:Mand1


LOGICAL DATABASE DESIGN:

     PrtTyCd                              1    P/F
     PrtCd                                3    P
     PrtNme                              25    S


PARTITION:
```

```
 Port                                    CRUD
    FreightAdrs                          RU
    PortType                             R
;
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(29)' ,
     FIELD-LENGTH     '29' ,
     RETENTION       'PERMANENT' ,
     volatility      'STATIC' ;
SOURCE IS:      'TMAS DATA MODEL' ;
KEYWORD IS:     'TMAS' ,
                'LOB' ,
                'Data Model' ;
CARDINALITY IS:
                332 ;
COLLECTED:      IN Port-Tbl ;
```

```
66       DEFINE SET                          PortType-Tbl ;
      DESCRIPTION;
   Port Type Table.
   This table contains Port Type Codes and their descriptions.
    ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'STATIC' ,
           UPDATE-METHOD       'INTERACTIVE' ,
           UPDATE-FREQUENCY
                              'AS PER CHANGE' ,
           EST-SIZE           '6 CHAR RECORDS' ,
           EST-VOLUME         '3 RECORDS' ,
           TABLE-FORM         'COMMAND' ;
      SOURCE IS:         'TMAS DATA MODEL' ;
      KEYWORD IS:        'TMAS' ,
                         'LOB' ,
                         'Data Model' ,
                         'TACCS' ;
      COLLECTION OF:
           PortType ;

      Define Entity                       PortType ;
      DESCRIPTION;
   Port Type.
   Identifies the classification of port, i.e. aerial or water.
    ;
      LAYOUT;

   DATA MODEL:

        PortType:Port, Mand 1:Opt Many


   LOGICAL DATABASE DESIGN:

        PrtTyCd                           1    P
        PrtTyDescr                        5


   PARTITION:

        PortType                          CRU
        Port                              RU;
      ATTRIBUTE IS:
           volatility         'STATIC' ,
           RETENTION          'PERMANENT' ,
           TYPE               'AN' ,
```

```
      FIELD-LENGTH      '6' ,
      PICTURE           'X(06)' ,
      SEC-CLASS         'UNCLASSIFIED' ;
SOURCE IS:          'TMAS DATA MODEL' ;
KEYWORD IS:         'TMAS' ,
                    'LOB' ,
                    'Data Model' ;
CARDINALITY IS:
                    3 ;
COLLECTED:          IN PortType-Tbl ;
```

```
67      DEFINE SET                              RailMov-File ;
    DESCRIPTION;
Rail Movements File.
This file is a collection of rail movement records.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         UPDATE-FREQUENCY
                            'DAILY' ,
         TABLE-FORM         'LOCAL' ,
         UPDATE-METHOD        'INTERACTIVE-BATCH' ,
         EST-SIZE           '14 CHAR RECORDS' ,
         volatility         'DYNAMIC' ;
    SOURCE IS:          'FREIGHT DATA MODEL' ;
    KEYWORD IS:         'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
    COLLECTION OF:
         RailMov ;

    Define Entity                           RailMov ;
    DESCRIPTION;
Rail Movement.
This entity is the occurrence of ordinal numbers assigned to oversized
vehicles moving by rail. This record is the master file record for the
RailMov File.
 ;
    LAYOUT;

DATA MODEL:

     RailMov:VehStopPt, Opt Many:Mand 1
     RailMov:OrdinalCd, Opt Many:Mand 1


LOGICAL DATABASE DESIGN:

     TMRPrefix                                  6      P/F
     StpSeqNo                                   1      P/F
     OrdnNo                                     7      P/F


PARTITION:

     None
 ;
    ATTRIBUTE IS:
```

```
     SEC-CLASS        'UNCLASSIFIED' ,
     TYPE             'AN' ,
     PICTURE          'X(14)' ,
     FIELD-LENGTH      '14' ,
     volatility       'DYNAMIC' ,
     EST-VOLUME       '400' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'Freight' ,
                 'LOB' ,
                 'Rail Model' ;
COLLECTED:       IN RailMov-File ;
```

```
68       DEFINE SET                              ReasonDeny-Tbl ;
     DESCRIPTION;
Reason Denied Table.
This table contains Reason Denied Codes for container hold or diversion
requests, and their meanings.
 ;
     ATTRIBUTE IS:
          SEC-CLASS        'UNCLASSIFIED' ,
          TABLE-FORM       'COMMAND' ,
          volatility       'STATIC' ,
          MEDIA            'DISK' ,
          UPDATE-METHOD     'BATCH' ,
          UPDATE-FREQUENCY
                           'PER CODE CHANGE' ,
          RETENTION        'PERMANENT' ,
          EST-SIZE         '27 CHAR RECORDS' ,
          EST-VOLUME       '10 RECORDS' ;
     SOURCE IS:       'CONTAINER DATA MODEL' ;
     KEYWORD IS:      'Container' ,
                      'LOB' ,
                      'TACCS' ,
                      'Data Model' ;
     COLLECTION OF:
          ReasonDeny ;

     Define Entity                          ReasonDeny ;
     DESCRIPTION;
This entity is the occurrence of a specific Reason Denied Code and code
description.  This is the master record for the Reason Denied Table.
 ;
     LAYOUT;

DATA MODEL:

     ReasonDeny:MEvent, Opt 1:Opt Many


LOGICAL DATABASE DESIGN:

     RsnDenyCd                           2    P
     RsnDenyCdDescr                     25


PARTITION:

     ReasonDeny                          CRD
 ;
     ATTRIBUTE IS:
          volatility       'STATIC' ,
```

```
     TYPE              'AN' ,
     FIELD-LENGTH       '27' ,
     PICTURE           'X(27)' ,
     SEC-CLASS         'UNCLASSIFIED' ;
SOURCE IS:       'CONTAINER DATA MODEL' ;
KEYWORD IS:      'Data Model' ,
                 'LOB' ,
                 'Container' ;
CARDINALITY IS:
                 10 ;
COLLECTED:       IN ReasonDeny-Tbl ;
```

```
69       DEFINE SET                              RemarkLine-File ;
     DESCRIPTION;
Remark Line File
This file contains TMAS remarks pertaining to a particular activity.
 ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          volatility         'DYNAMIC' ,
          UPDATE-METHOD       'INTERACTIVE' ,
          UPDATE-FREQUENCY
                             'AS PER CHANGE' ,
          EST-SIZE           '56 CHAR RECORDS' ,
          EST-VOLUME         '10,000 RECORDS' ,
          TABLE-FORM         'LOCAL' ;
     SOURCE IS:         'TMAS DATA MODEL' ;
     KEYWORD IS:        'TMAS' ,
                        'LOB' ,
                        'Data Model' ,
                        'TACCS' ;
     COLLECTION OF:
          RemarkLine ;

     Define Entity                          RemarkLine ;
     DESCRIPTION;
Information not provided for in the other TMAF data element that is
deemed essential for clarification.
 ;
     LAYOUT;

DATA MODEL:

     RemarkLine:Activity, Opt Many:Mand1


LOGICAL DATABASE DESIGN:

     AACCurr                                 6    P/F
     RmrkLineNo                              2    P
     Rmrk                                   50


PARTITION:

     RemarkLine                             CRUD
     Activity                               R;
     ATTRIBUTE IS:
          volatility         'DYNAMIC' ,
          TYPE               'AN' ,
```

```
      FIELD-LENGTH      '52' ,
      PICTURE           'X(52)' ,
      SEC-CLASS         'UNCLASSIFIED' ;
SOURCE IS:        'TMAS DATA MODEL' ;
KEYWORD IS:       'TMAS' ,
                  'LOB' ,
                  'Data Model' ;
CARDINALITY IS:
                  10000 ;
COLLECTED:        At RemarkLine-File ;
```

```
70      DEFINE SET                              RespMediaCd-Tbl ;
    DESCRIPTION;
Response Media Code Table.
A table of codes and their descriptions that identify the type of
media to be used in responding to a movement transaction.
 ;
    ATTRIBUTE IS:
         volatility      'PERPETUAL' ,
         EST-SIZE        '11 CHAR RECORDS' ,
         EST-VOLUME      '5 RECORDS' ,
         MEDIA           'DISK' ,
         REGULATION      'DAMMS-CMM DFSR TM 38-2Z1-2-1-C' ,
         RETENTION       'PERMANENT' ,
         TABLE-FORM      'COMMAND' ,
         SEC-CLASS       'UNCLASSIFIED' ,
         UPDATE-FREQUENCY
                         'AS PER RESP MEDIA CODE CHANGE' ,
         UPDATE-METHOD    'INTERACTIVE' ;
    SOURCE IS:      'FREIGHT DATA MODEL' ,
                    'CONTAINER DATA MODEL' ;
    KEYWORD IS:     'Freight' ,
                    'Data Model' ,
                    'LOR' ,
                    'TACCS' ,
                    'Container' ;
    COLLECTION OF:
         RespMediaCd ;

    Define Entity                           RespMediaCd ;
    DESCRIPTION;
Response Media Code
This entity is an occurrence of a specific Response Code and Response
Code description. This is the master record for the Response Media Code
Table.
 ;
    LAYOUT;

LOGICAL DATABASE DESIGN:

     RespCd                                 1     P
     RespCdDesc                             10


FREIGHT DATA MODEL:

     TBD.

FREIGHT PARTITION:
```

None.

CONTAINER DATA MODEL:

RespMediaCd:MEvent, Opt 1:Opt Many

CONTAINER PARTITION:

RespMediaCd CRD;
ATTRIBUTE IS:
volatility 'STATIC' ,
RETENTION 'PERMANENT' ,
TYPE 'AN' ,
PICTURE 'X(11)' ,
FIELD-LENGTH '11' ,
SEC-CLASS 'UNCLASSIFIED' ;
SOURCE IS: 'CONTAINER DATA MODEL' ,
'FREIGHT DATA MODEL' ;
KEYWORD IS: 'Freight' ,
'LOB' ,
'Data Model' ,
'Container' ;
CARDINALITY IS:
5 ;
COLLECTED: IN RespMediaCd-Tbl ;

```
71      DEFINE SET                              STMR-File ;
    DESCRIPTION;
Standing Transportation Movement Release File.
This file contains cargo data for an STMR number.
 ;
    ATTRIBUTE IS:
         MEDIA           'DISK' ,
         SEC-CLASS       'UNCLASSIFIED' ,
         UPDATE-METHOD     'INTERACTIVE-BATCH' ,
         TABLE-FORM      'LOCAL' ,
         EST-VOLUME      '100 RECORDS' ,
         EST-SIZE        '32 CHAR RECORDS' ,
         volatility      'DYNAMIC' ;
    SOURCE IS:      'FREIGHT DATA MODEL' ;
    KEYWORD IS:     'Data Model' ,
                    'LOB' ,
                    'TACCS' ,
                    'Freight' ;
    COLLECTION OF:
         STMR ;

    Define Entity                           STMR ;
    DESCRIPTION;
Standing Transportation Movement Release.
This entity is the occurrence of the information pertaining to a
specific recurring freight movement record. This is the master record
for STMR file.
 ;
    LAYOUT;

DATA MODEL:

     Not connected.


LOGICAL DATABASE DESIGN:

     STMRNo                                  4      P
     STMRAsQty                               2
     WtSTDay                                 5
     TotCu                                   4
     STMRCgoDescr                            10
     SpIntCd                                 2      F
     STMRAsTy                                2      F
     CmdtyCd                                 3      F


PARITION:
```

None.

;

```
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(32)' ,
     FIELD-LENGTH     '32' ,
     volatility      'DYNAMIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'Freight' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 100 ;
COLLECTED:       IN STMR-File ;
```

72 DEFINE SET STMR-Files ;

```
DESCRIPTION;
```

Standing Transportation Movement Release (STMR) Files.
This set of files contains STMR data for recurring intra-theater freight shipments.

;

```
ATTRIBUTE IS:
     MEDIA           'DISK' ,
     SEC-CLASS       'UNCLASSIFIED' ,
     volatility      'DYNAMIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'Freight' ,
                 'LOB' ,
                 'Data Model' ,
                 'TACCS' ;
```

```
73      DEFINE SET                              STMRAdrs-File ;
    DESCRIPTION;
Standing Transportation Movement Release Address File.
This file contains address and POC data for STMR consignors or
consignees.
 ;
    ATTRIBUTE IS:
         MEDIA           'DISK' ,
         SEC-CLASS       'UNCLASSIFIED' ,
         UPDATE-METHOD     'INTERACTIVE-BATCH' ,
         TABLE-FORM      'LOCAL' ,
         EST-SIZE        '126 CHAR RECORDS' ,
         volatility      'DYNAMIC' ,
         EST-VOLUME      '100 RECORDS' ;
    SOURCE IS:      'FREIGHT DATA MODEL' ;
    KEYWORD IS:     'Freight' ,
                    'Data Model' ,
                    'LOB' ,
                    'TACCS' ;
    COLLECTION OF:
         STMRAdrs ;

    Define Entity                           STMRAdrs ;
    DESCRIPTION;
Standing Transportation Movement Release Address.
This entity is the occurrence of information pertaining to STMR
consignor and consignee DODAAC. This is the master [illegible] STMR
Address File.
 ;
    LAYOUT;

DATA MODEL:

     Not connected.

LOGICAL DATABASE DESIGN:

     STMRConsignee                        6     P
     STMRFUDsg                           35
     STMRFBldgNo                         10
     STMRFBrksKsrn                       25
     STMRFMCTPOC                         25
     STMRFMCTTel                         25


PARTITION:

     None.
 ;
```

```
ATTRIBUTE IS:
     SEC-CLASS        'UNCLASSIFIED' ,
     TYPE             'AN' ,
     PICTURE          'X(126)' ,
     FIELD-LENGTH      '126' ,
     volatility       'DYNAMIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'Freight' ,
                 'Data Model' ,
                 'LOB' ;
CARDINALITY IS:
                 100 ;
COLLECTED:       IN STMRAdrs-File ;
```

```
74      DEFINE SET                              STMRStop-File ;
     DESCRIPTION;
Standard Transportation Movement Release Stop File.
This file is a collection of information about given STMR movements for
multi-stop transactions.
 ;
     ATTRIBUTE IS:
          MEDIA           'DISK' ,
          SEC-CLASS       'UNCLASSIFIED' ,
          UPDATE-METHOD     'INTERACTIVE-BATCH' ,
          TABLE-FORM      'LOCAL' ,
          EST-VOLUME      '1100 RECORDS' ,
          EST-SIZE        '100 CHAR RECORDS' ,
          volatility      'DYNAMIC' ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ,
                     'TACCS' ;
     COLLECTION OF:
          STMRStop ;

     Define Entity                          STMRStop ;
     DESCRIPTION;
Standing Transportation Movement Release Stop.
This entity is the occurrence of information pertaining to movement
events of a specific recurring freight movement record. This is the
master record for STMR Stop File.
 ;
     LAYOUT;
```

DATA MODEL:

Not connected.

LOGICAL DATABASE DESIGN:

STMRNo	4	P
TMRRefNo	6	P
MCEPrefix	1	
MthCd	1	
STMRJulDte	4	
StpSeqNo	1	P
StpOffCd	1	P
DestMCEPrefix	1	
STMRConsignor	6	
SpotTime	4	
PullTime	4	

ArrTime	4	
Freq	7	
STMRRmrk	50	
STMRConsignee	6	F

PARTITION:

None.

;

```
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(100)' ,
     FIELD-LENGTH     '100' ,
     volatility      'DYNAMIC' ;
SOURCE IS:      'FREIGHT DATA MODEL' :
KEYWORD IS:     'Freight' ,
                'Data Model' ,
                'LOB' ;
CARDINALITY IS:
                1100 ;
COLLECTED:      IN STMRStop-File ;
```

```
75       DEFINE SET                              ShpmtMethod-Tbl ;
     DESCRIPTION;
Shipment Method Table.
This table contains Mode/Method of Shipment Codes and their
descriptions.
 ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          RETENTION          'PERMANENT' ,
          UPDATE-FREQUENCY
                             'PER CODE CHANGE' ,
          UPDATE-METHOD        'BATCH' ,
          TABLE-FORM         'COMMAND' ,
          EST-SIZE           '26 CHAR RECORDS' ,
          volatility         'STATIC' ,
          EST-VOLUME         '34 RECORDS' ;
     SOURCE IS:         'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
     KEYWORD IS:        'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ,
                        'Container' ;
     COLLECTION OF:
          ShpmtMethod ;

     Define Entity                          ShpmtMethod ;
     DESCRIPTION;
Shipment Method.
This entity is the occurrence of the mode of shipment associated with a
given move. This is the master record for the Shipment Method Table.
 ;
     LAYOUT;

LOGICAL DATABASE DESIGN:

     ModeMethShpmtCd                        1    P
     ModeMethShpmtCdDescr                   25


FREIGHT DATA MODEL:

     ShpmtMethod:FreightMov, Opt 1:Opt Many


FREIGHT PARTITION:

     ShpmtMethod                            CRD
```

CONTAINER DATA MODEL:

ShpmtMethod:MEvent, Opt 1:Opt Many (MILSTAMP)
ShpmtMethod:CntnrMov, Mand 1:Opt Many

CONTAINER PARTITION:

```
 ShpmtMethod                          CRD;
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(26)' ,
     FIELD-LENGTH     '26' ,
     RETENTION       'PERMANENT' ,
     volatility      'DYNAMIC' ;
SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
KEYWORD IS:     'Freight' ,
                'Container' ,
                'LOB' ,
                'Data Model' ;
CARDINALITY IS:
                34 ;
COLLECTED:      IN ShpmtMethod-Tbl ;
```

```
76        DEFINE SET                              SpecialHdl-Tbl ;
      DESCRIPTION;
   Special Handling Table.
   This table contains Special Handling Codes and their descriptions.
    ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           RETENTION          'PERMANENT' ,
           UPDATE-FREQUENCY
                              'PER CODE CHANGE' ,
           UPDATE-METHOD        'BATCH' ,
           TABLE-FORM         'COMMAND' ,
           EST-VOLUME         '50 RECORDS' ,
           EST-SIZE           '27 CHAR RECORDS' ,
           REGULATION         'DOD 4500.32R' ,
           volatility         'STATIC' ;
      SOURCE IS:         'FREIGHT DATA MODEL' ;
      KEYWORD IS:        'Freight' ,
                         'Data Model' ,
                         'LOB' ,
                         'TACCS' ;
      COLLECTION OF:
           SpecialHdl ;

      Define Entity                             SpecialHdl ;
      DESCRIPTION;
   Special Handling.
   This entity is an occurrence of a specific Special Handling Code and
   Special Handling Code description. This is the master record for the
   Special Handling Table.
    ;
      LAYOUT;


        DATA MODEL:

             Not connected.  Proposed Data Model.

             SpecialHdl:ExportAir, Mand 1:Opt Many
             SpecialHdl:ExportWater, Mand 1:Opt Many

        LOGICAL DATABASE DESIGN:

             SpHdlCd                              2     P
             SpHdlCdDescr                        25

        PARTITION:
```

SpecialHdl CRD

```
;
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(27)' ,
     FIELD-LENGTH     '27' ,
     RETENTION       'PERMANENT' ,
     volatility      'STATIC' ;
SOURCE IS:      'FREIGHT DATA MODEL' ;
KEYWORD IS:     'Freight' ,
                'LOB' ,
                'Data Model' ;
CARDINALITY IS:
                50 ;
COLLECTED:      IN SpecialHdl-tbl ;
```

```
77        DEFINE SET                              SpecialInt-Tbl ;
      DESCRIPTION;
   Special Interest Table.
   This table contains Special Interest Codes and their descriptions.
    ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           RETENTION          'PERMANENT' ,
           UPDATE-FREQUENCY
                              'PER CODE CHANGE' ,
           UPDATE-METHOD        'BATCH' ,
           TABLE-FORM         'COMMAND' ,
           EST-VOLUME         '60 RECORDS' ,
           EST-SIZE           '27 CHAR RECORDS' ,
           volatility         'STATIC' ;
      SOURCE IS:         'FREIGHT DATA MODEL' ,
                         'CONTAINER DATA MODEL' ;
      KEYWORD IS:        'Freight' ,
                         'Data Model' ,
                         'LOB' ,
                         'TACCS' ;
      COLLECTION OF:
           SpecialInt ;

      Define Entity                              SpecialInt ;
      DESCRIPTION;
   Special Interest.
   This entity is an occurrence of a specific Special Interest Code and
   Special Interest Code description. This is the master record for the
   Special Interest Table.
    ;
      LAYOUT;

   LOGICAL DATABASE DESIGN:

        SpIntCd                              2     P
        SpIntCdDescr                         25


   FREIGHT DATA MODEL:

      SpecialInt:VehStopPt, Mand 1:Opt Many


   FREIGHT PARTITION:

        SpecialInt                           CRD
```

CONTAINER DATA MODEL:

SpecialInt:CntnrMov, Opt 1:Opt Many

CONTAINER PARTITION:

```
 SpecialInt                              CRD;
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'A' ,
     PICTURE         'A(27)' ,
     FIELD-LENGTH     '27' ,
     RETENTION       'PERMANENT' ,
     volatility      'STATIC' ;
SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
KEYWORD IS:     'LOB' ,
                'Freight' ,
                'Data Model' ,
                'Container' ;
CARDINALITY IS:
                60 ;
COLLECTED:      IN SpecialInt-Thl ;
```

```
78        DEFINE SET                              SpotCd-Tbl ;
      DESCRIPTION;
   Spot Code Table.
   This table contains Spot Limit Codes and their descriptions for
   identifying the forecasted use of specific authorized spots from the
   Military Highway Asset Forecast.
    ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           RETENTION          'PERMANENT' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           UPDATE-FREQUENCY
                              'AS REQUIRED' ,
           UPDATE-METHOD       'BATCH/INTERACTIVE' ,
           TABLE-FORM         'COMMAND' ,
           EST-VOLUME         '66 RECORDS' ,
           EST-SIZE           '27 CHAR RECORDS' ;
      SOURCE IS:       'FREIGHT DATA MODEL' ;
      KEYWORD IS:      'Freight' ,
                       'Data Model' ,
                       'LOB' ,
                       'TACCS' ;
      COLLECTION OF:
           SpotCd ;

      Define Entity                            SpotCd ;
      DESCRIPTION,
   Spot Code.
   This entity is an occurrence of a specific Spot Limit Code and its Spot
   Limit Code Description. This is the master record for the
   Spot Code Table.
    ;
      LAYOUT;

   DATA MODEL:


        SpotCd:SpotLimit, Mand 1:Opt Many
        SpotCd:FreightMov. Opt 1:Opt Many


   LOGICAL DATABASE DESIGN:


        SpotLimitCd                            2     P
        SpotLimitCdDescr                       25


   PARTITION:
```

```
 SpotCd                                    CRD;
ATTRIBUTE IS:
     SEC-CLASS        'UNCLASSIFIED' ,
     TYPE             'AN' ,
     PICTURE          'X(27)' ,
     FIELD-LENGTH      '27' ,
     RETENTION        'PERMANENT' ,
     volatility       'STATIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ;
KEYWORD IS:      'Freight' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 66 ;
COLLECTED:       IN SpotCd-Tbl ;
```

```
79       DEFINE SET                          SpotFactor-Tbl ;
       DESCRIPTION;
   Spot Factor Table.
   This table contians Spot Factor Codes and their descriptions.
    ;
       ATTRIBUTE IS:
            MEDIA            'DISK' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            volatility       'STATIC' ,
            UPDATE-METHOD      'BATCH' ,
            TABLE-FORM       'COMMAND' ,
            EST-SIZE         '61 CHAR RECORDS' ,
            UPDATE-FREQUENCY
                             'PER CODE CHANGE' ,
            EST-VOLUME       '26 RECORDS' ;
       SOURCE IS:       'FREIGHT DATA MODEL' ,
                        '37th Trans Gp Msg 160016Sep86' ;
       KEYWORD IS:      'Freight' ,
                        'LOB' ,
                        'Data Model' ,
                        'TACCS' ;
       COLLECTION OF:
            SpotFactor ;

       Define Entity                       SpotFactor ;
       DESCRIPTION;
   Spot Factor.
   This entity is the occurrence of a specific Spot Factor Code and its
   description.  This is the master record for the Spot Factor Table.
    ;
       LAYOUT;

   DATA MODEL:

        SpotFactor:SpotLimit, Opt 1:Opt Many


   LOGICAL DATABASE DESIGN:

        SpotFactorCd                    1    P
        SpotFactorCdDescr              60


   PARTITION:

        SpotFactor                          CRD;
       ATTRIBUTE IS:
            SEC-CLASS        'UNCLASSIFIED' ,
            TYPE             'AN' ,
```

```
      PICTURE          'X(61)' ,
      FIELD-LENGTH      '61' ,
      RETENTION        'PERMANENT' ,
      volatility       'STATIC' ;
SOURCE IS:       'FREIGHT DATA MODEL' ,
                 '37th TRANS GP MSG 160016Sep86' ;
KEYWORD IS:      'Freight' ,
                 'LOB' ,
                 'Data Model' ;
CARDINALITY IS:
                 26 ;
COLLECTED:       IN SpotFactor-Tbl ;
```

```
80        DEFINE SET                              SpotLimit-File ;
      DESCRIPTION;
   Spot Limit File.
   This file contains Spot Limit Calendar records which reflect how and
   what date the authorized spots may be used, the quantity of authorized
   spots and the number of spots which have been requested against each
   authorized spot quantity.
    ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           RETENTION          'WEEKLY' ,
           UPDATE-FREQUENCY
                              'DAILY' ,
           UPDATE-METHOD        'BATCH/INTERACTIVE' ,
           TABLE-FORM         'LOCAL' ,
           EST-VOLUME         '180 RECORDS' ,
           EST-SIZE           '14 CHAR RECORDS' ;
      SOURCE IS:        'FREIGHT DATA MODEL' ;
      KEYWORD IS:       'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
      COLLECTION OF:
           SpotLimit ;

      Define Entity                          SpotLimit ;
      DESCRIPTION;
   Spot Limit.
   An assigned number of conveyance available by day.
    ;
      LAYOUT;

   DATA MODEL:

      SpotLimit:FreightMov, Opt 1:Opt Many
      SpotLimit:SpotCd, Opt Many:Mand 1
      SpotLimit:SpotFactor, Opt Many:Opt 1


   LOGICAL DATABASE DESIGN:


        ReqSpotDte                          5     P
        SpotLimitCd                         2     P/F
        AuthzdSpots                         3
        ReqSpotQty                          3
        SpotFactorCd                        1     F
```

PARTITION:

SpotLimit CRUD

;

ATTRIBUTE IS:
FIELD-LENGTH '14' ,
TYPE 'AN' ,
PICTURE 'X(14)' ,
RETENTION 'WEEKLY' ,
SEC-CLASS 'UNCLASSIFIED' ,
volatility 'DYNAMIC' ;
SOURCE IS: 'FREIGHT DATA MODEL' ;
KEYWORD IS: 'LOB' ,
'Freight' ,
'Data Model' ;
CARDINALITY IS:
180 ;
COLLECTED: IN SpotLimit-File ;

```
81        DEFINE SET                              System-Parameter-Tbl ;
      DESCRIPTION;
   System Parameter Table.
   This table represents the collection of various system parameters used
   on the TACCS machines at the Movement Control Team (MCT) level.
    ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'DYNAMIC' ,
           UPDATE-METHOD        'INTERACTIVE' ,
           TABLE-FORM         'COMMAND' ;
      KEYWORD IS:        'Freight' ,
                         'Container' ,
                         'LOB' ,
                         'TACCS' ,
                         'NOT IN DATA MODEL' ;
      COLLECTION OF:
           System-Parameter-Record ;

      Define Entity                              System-Parameter-Record ;
      DESCRIPTION;
   System Parameter Record.
   This entity represents the master record of system parameters collected
   in the System Parameter Table at the Movement Control Team (MCT) level.
    ;
      ATTRIBUTE IS:
           SEC-CLASS          'UNCLASSIFIED' ,
           TYPE               'AN' ,
           volatility         'DYNAMIC' ;
      SOURCE IS:         'TACCS-LOB CNTNR/FRT DFD' ;
      KEYWORD IS:        'Freight' ,
                         'Container' ,
                         'LOB' ,
                         'NOT IN DATA MODEL' ;
      COLLECTED:         IN System-Parameter-Tbl ;
```

```
82        DEFINE SET                              TMAS-Database ;
      DESCRIPTION;
Transportation Movements Address System (TMAS) Database.
This set of files and tables contains addressing information maintained
at the Theater Movements Control Agency (TMCA) level.  It contains data
in common with the theater master address file, the European Activity
Address File, (EURAFF), and the DAMMS-R Cargo Movements Module (CMM).
It is the basis for the contact files and selected system unique files
maintained at lower organizational echelons.
 ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ;
     SOURCE IS:         'TMAS DATA MODEL' ;
     KEYWORD IS:        'TMAS' ,
                        'LOB' ,
                        'Data Model' ,
                        'TACCS' ;
```

```
83      DEFINE SET                              TMAS-System-Parameter-Tbl ;
    DESCRIPTION;
Transportation Movements Address System System Parameter Table.
This table represents the collection of the various system parameters
used on the TACCS machine at the Transportation Movement Control Agency
(TMCA) level.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         volatility         'DYNAMIC' ,
         UPDATE-METHOD        'INTERACTIVE' ,
         TABLE-FORM         'COMMAND' ,
         UPDATE-FREQUENCY
                            'AS PER CHANGE' ;
    SOURCE IS:          'TACCS-LOB TMAS DFD' ;
    KEYWORD IS:         'TMAS' ,
                        'LOB' ,
                        'TACCS' ,
                        'NOT IN DATA MODEL' ;
    COLLECTION OF:
         TMAS-System-Parameter-Record ;

    Define Entity                           TMAS-System-Parameter-Record ;
    DESCRIPTION;
Transportation Movements Address System System Parameter Record.
This entity represents the master record of system parameters collected
in the TMAS System Parameter Table at the Transportation Movement
Control Agency (TMCA) level.
 ;
    ATTRIBUTE IS:
         SEC-CLASS          'UNCLASSIFIED' ,
         TYPE               'AN' ,
         volatility         'DYNAMIC' ;
    SOURCE IS:          'TACCS-LOB TMAS DFD' ;
    KEYWORD IS:         'TMAS' ,
                        'LOB' ,
                        'NOT IN DATA MODEL' ;
    COLLECTED:          IN TMAS-System-Parameter-Tbl ;
```

```
84        DEFINE SET                          TMAS-System-Unique-Tables ;
      DESCRIPTION;
Transportation Movements Address System (TMAS) System Unique Tables.
This set of tables represents the more static entities in the TMAS
Database - that is, those tables subject to relatively infrequent
change.
 ;
      ATTRIBUTE IS:
           volatility      'STATIC' ,
           MEDIA           'DISK' ,
           SEC-CLASS       'UNCLASSIFIED' ,
           TABLE-FORM      'COMMAND' ;
      SOURCE IS:       'TMAS DATA MODEL' ;
      KEYWORD IS:      'TMAS' ,
                       'LOB' ,
                       'Data Model' ,
                       'TACCS' ;
```

```
85        DEFINE SET                              TTPUnique-Tbl ;
      DESCRIPTION;
   Trailer Transfer Point Unique Table.
   This table is a Trailer Transfer Point Codes and their descriptions.
    ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           volatility         'STATIC' ,
           UPDATE-METHOD       'INTERACTIVE' ,
           UPDATE-FREQUENCY
                              'AS PER CHANGE' ,
           TABLE-FORM         'COMMAND' ,
           EST-SIZE           '36 CHAR RECORDS' ,
           EST-VOLUME         '10 RECORDS' ;
      SOURCE IS:        'TMAS DATA MODEL' ;
      KEYWORD IS:       'TMAS' ,
                        'LOB' ,
                        'Data Model' ,
                        'TACCS' ;
      COLLECTION OF:
           TTPUnique ;

      Define Entity                             TTPUnique ;
      DESCRIPTION;
   Trailer Transfer Point Unique.
   Identifies the TTP which services the ShipToAAC.
    ;
      LAYOUT;

   DATA MODEL:

        TTPUnique:FreightAdrs, Mand1:Opt Many


   LOGICAL DATABASE DESIGN:

        TTPCd                                    1    P
        TTPDescr                                35


   PARTITION:

        TTPUnique                                CRUD
        FreightAdrs                              RU;
      ATTRIBUTE IS:
           volatility         'STATIC' ,
           TYPE               'AN' ,
           FIELD-LENGTH        '36' ,
```

```
          PICTURE          'X(36)' ,
          SEC-CLASS        'UNCLASSIFIED' ;
     SOURCE IS:       'TMAS DATA MODEL' ;
     KEYWORD IS:      'TMAS' ,
                      'LOB' ,
                      'Data Model' ;
     CARDINALITY IS:
                      10 ;
     COLLECTED:       IN TTPUnique-Tbl ;

86     DEFINE SET                              Trans-Movements-Address-File ;
     DESCRIPTION;
Transportation Movements Address File.
This set of files represents the more volatile entities in the
Transportation Movements Address System Database - that is, those files
subject to relatively frequent change.
 ;
     ATTRIBUTE IS:
          volatility       'DYNAMIC' ,
          MEDIA            'DISK' ,
          SEC-CLASS        'UNCLASSIFIED' ;
     SOURCE IS:       'TMAS DATA MODEL' ;
     KEYWORD IS:      'Data Model' ,
                      'TMAS' ,
                      'LOB' ,
                      'TACCS' ;
```

```
87      DEFINE SET                              TransPri-Tbl ;
    DESCRIPTION;
Transportation Priority Table.
This table contains Transportation Priority Codes and their
descriptions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         RETENTION          'PERMANENT' ,
         UPDATE-FREQUENCY
                            'PER CODE CHANGE' ,
         UPDATE-METHOD        'BATCH' ,
         TABLE-FORM         'COMMAND' ,
         EST-VOLUME         '5 RECORDS' ,
         EST-SIZE           '36 CHAR RECORDS' ,
         volatility         'STATIC' ;
    SOURCE IS:      'FREIGHT DATA MODEL' ,
                    'CONTAINER DATA MODEL' ;
    KEYWORD IS:     'Freight' ,
                    'Data Model' ,
                    'LOB' ,
                    'TACCS' ;
    COLLECTION OF:
         TransPri ;

    Define Entity                           TransPri ;
    DESCRIPTION;
Transportation Priority.
A code and description which identifies the length of time in days in
which a movement must be completed.
 ;
    LAYOUT;

LOGICAL DATABASE DESIGN:

     TransPriCd                             1     P
     TransPriDescr                          35


FREIGHT DATA MODEL:

    TransPri:VehStopPt, Mand 1:Opt Many


FREIGHT PARTITION:

     TransPri                               CRD
```

CONTAINER DATA MODEL:

TransPri:CntnrMov, Opt 1:Opt Many

CONTAINER PARTITION:

```
TransPri                                CRD;
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(36)' ,
     FIELD-LENGTH     '36' ,
     RETENTION       'PERMANENT' ,
     volatility      'STATIC' ;
SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
KEYWORD IS:     'LOB' ,
                'Freight' ,
                'Data Model' ,
                'Container' ;
CARDINALITY IS:
                5 ;
COLLECTED:      IN TransPri-Tbl ;
```

```
88       DEFINE SET                              TypeAssetCd-Tbl ;
     DESCRIPTION;
Type Asset Code Table.
This table contains Type Asset Codes and their descriptions.
 ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          RETENTION          'PERMANENT' ,
          UPDATE-FREQUENCY
                             'PER CODE CHANGE' ,
          UPDATE-METHOD        'BATCH' ,
          TABLE-FORM         'COMMAND' ,
          EST-VOLUME         '50 RECORDS' ,
          EST-SIZE           '27 CHAR RECORDS' ,
          volatility         'STATIC' ;
     SOURCE IS:         'FREIGHT DATA MODEL' ;
     KEYWORD IS:        'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
     COLLECTION OF:
          TypeAssetCd ;

     Define Entity                          TypeAssetCd ;
     DESCRIPTION;
Type Asset Code.
This entity is an occurrence of a specific Type Asset Code and Type
Asset Code description. This is the master record for the Type Asset
Code Table.
 ;
     LAYOUT;

DATA MODEL:

      TypeAssetCd:AssetRqmt, Mand 1:Opt Many


LOGICAL DATABASE DESIGN:

      TyAsCd                                 2      P
      TyAsCdDescr                            25


PARTITION:

      TypeAssetCd                            CRD;
     ATTRIBUTE IS:
          SEC-CLASS          'UNCLASSIFIED' ,
```

```
      TYPE              'AN' ,
      PICTURE           'X(27)' ,
      FIELD-LENGTH       '27' ,
      RETENTION         'PERMANENT' ,
      volatility        'STATIC' ;
SOURCE IS:        'FREIGHT DATA MODEL' ;
KEYWORD IS:       'Freight' ,
                  'LOB' ,
                  'Data Model' ;
CARDINALITY IS:
                  50 ;
COLLECTED:        IN TypeAssetCd-Tbl ;
```

```
89      DEFINE SET                              TypeCarrier-Tbl ;
    DESCRIPTION;
Type Carrier Table.
This table contains Type Carrier Codes and their descriptions.
 ;
    ATTRIBUTE IS:
         SEC-CLASS        'UNCLASSIFIED' ,
         TABLE-FORM       'COMMAND' ,
         volatility       'STATIC' ,
         MEDIA            'DISK' ,
         UPDATE-METHOD     'BATCH' ,
         UPDATE-FREQUENCY
                          'PER CODE CHANGE' ,
         RETENTION        'PERMANENT' ,
         EST-SIZE         '26 CHAR RECORDS' ,
         EST-VOLUME       '4 RECORDS' ;
    SOURCE IS:       'CONTAINER DATA MODEL' ,
                     'FREIGHT DATA MODEL' ;
    KEYWORD IS:      'Container' ,
                     'LOB' ,
                     'TACCS' ,
                     'Data Model' ,
                     'Freight' ;
    COLLECTION OF:
         TypeCarrier ;

    Define Entity                          TypeCarrier ;
    DESCRIPTION;
Type Carrier
A code and a description of the code that identifies the type carrier or
organization responsible for accomplishing the transport of cargo to
its destination.
 ;
    LAYOUT;

LOGICAL DATABASE DESIGN:

     TyCarrCd                                  1   P
     TyCarrCdDescr                            25


PARTITION:

     TypeCarrier                               CRD

FREIGHT DATA MODEL:

     TypeCarrier:FreightMov, Opt 1:Opt Mem,
```

```
CONTAINER DATA MODEL:

    TypeCarrier:CntnrMov, Mand 1:Opt Many
    TypeCarrier:OceanCarr, Mand 1:Opt Many;
  ATTRIBUTE IS:
        volatility      'STATIC' ,
        TYPE            'AN' ,
        FIELD-LENGTH     '26' ,
        PICTURE         'X(26)' ,
        SEC-CLASS       'UNCLASSIFIED' ;
    SOURCE IS:      'CONTAINER DATA MODEL' ,
                    'FREIGHT DATA MODEL' ;
    KEYWORD IS:     'Container' ,
                    'LOB' ,
                    'Data Model' ,
                    'Freight' ;
    CARDINALITY IS:
                    4 ;
    COLLECTED:      IN TypeCarrier-Tbl ;
```

```
90        DEFINE SET                              TypeMovNo-Tbl ;
      DESCRIPTION;
Type Movement Number Table.
A table which contains the codes and descriptions that identify
the type movement number being used to track a container to its
destination.
 ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          REGULATION         'TM 38-LZ1-2-1-C' ,
          EST-VOLUME         '5 RECORDS' ,
          EST-SIZE           '26 CHAR RECORDS' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          TABLE-FORM         'COMMAND' ,
          volatility         'STATIC' ,
          UPDATE-METHOD       'BATCH' ,
          UPDATE-FREQUENCY
                             'PER CODE CHANGE' ,
          RETENTION          'PERMANENT' ;
     SOURCE IS:         'CONTAINER DATA MODEL' ;
     KEYWORD IS:        'Container' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
     COLLECTION OF:
          TypeMovNo ;

     Define Entity                              TypeMovNo ;
     DESCRIPTION;
Type Movement Number.
This entity is an occurrence of a type movement number code and
description.  This is the master file record for the Type Movement
Number Table.
 ;
     LAYOUT;

DATA MODEL:

      TyMovNo:MEvent, Mand 1:Opt Many


LOGICAL DATABASE DESIGN:

      TyMovNoCd                                  1   P
      TyMovNoCdDescr                            25


PARTITION:
```

```
 TyMovNo                                    CRD;
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     PICTURE         'X(26)' ,
     FIELD-LENGTH     '26' ,
     volatility      'STATIC' ;
SOURCE IS:      'CONTAINER DATA MODEL' ;
KEYWORD IS:     'LOB' ,
                'Data Model' ,
                'Container' ;
CARDINALITY IS:
                5 ;
COLLECTED:      IN TypeMovNo-Tbl ;
```

```
91        DEFINE SET                              TypeMove-Tbl ;
      DESCRIPTION;
Type Movement Table.
This table contains Type Movement Codes and their descriptions.
 ;
      ATTRIBUTE IS:
           SEC-CLASS        'UNCLASSIFIED' ,
           TABLE-FORM       'COMMAND' ,
           volatility       'STATIC' ,
           MEDIA            'DISK' ,
           UPDATE-METHOD     'BATCH' ,
           UPDATE-FREQUENCY
                            'PER CODE CHANGE' ,
           RETENTION        'PERMANENT' ,
           EST-SIZE         '26 CHAR RECORDS' ,
           EST-VOLUME       '3 RECORDS' ;
      SOURCE IS:       'CONTAINER DATA MODEL' ,
                       'FREIGHT DATA MODEL' ;
      KEYWORD IS:      'Container' ,
                       'LOB' ,
                       'TACCS' ,
                       'Data Model' ,
                       'Freight' ;
      COLLECTION OF:
           TypeMove ;

      Define Entity                              TypeMove ;
      DESCRIPTION;
Type Movement.
is the master record for the Type Movement Table.
 ;
      LAYOUT;

LOGICAL DATABASE DESIGN:

      TyMovCd                                  1    P
      TyMovCdDescr                            25


PARTITION:

      TypeMove                                 CRD


CONTAINER DATA MODEL:

      TypeMove:MEvent, Opt 1:Opt Many
```

FREIGHT DATA MODEL:

```
     TypeMove:FreightMov, Mand 1:Opt Many
 ;
    ATTRIBUTE IS:
         volatility      'STATIC' ,
         TYPE            'AN' ,
         FIELD-LENGTH     '26' ,
         PICTURE          'X(26)' ,
         SEC-CLASS        'UNCLASSIFIED' ;
    SOURCE IS:       'CONTAINER DATA MODEL' ,
                     'FREIGHT DATA MODEL' ;
    KEYWORD IS:      'Container' ,
                     'Data Model' ,
                     'LOB' ,
                     'Freight' ;
    CARDINALITY IS:
                     3 ;
    COLLECTED:       IN TypeMove-Tbl ;
```

```
92      DEFINE SET                              VehStopPt-File ;
    DESCRIPTION;
Vehicle Stop Point File.
This file is a collection of information about given freight movements
for multi stop transactions.
 ;
    ATTRIBUTE IS:
         MEDIA              'DISK' ,
         SEC-CLASS          'UNCLASSIFIED' ,
         UPDATE-FREQUENCY
                            'DAILY' ,
         UPDATE-METHOD        'INTERACTIVE-BATCH' ,
         TABLE-FORM         'LOCAL' ,
         volatility         'DYNAMIC' ,
         EST-SIZE           '143 CHAR RECORDS' ;
    SOURCE IS:          'FREIGHT DATA MODEL' ;
    KEYWORD IS:         'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
    COLLECTION OF:
         VehStopPt ;

    Define Entity                           VehStopPt ;
    DESCRIPTION;
Vehicle Stop Point.
This entity is the occurrence of the information about cargo for a
single or multistop freight movement. This is the master file record for
the Vehicle Stop Point File.
 ;
    LAYOUT;

DATA MODEL:

     VehStopPt:FreightMov, Mand Many:Mand 1
     VehStopPt:FrtRemarkLn, Opt 1:Opt Many
     VehStopPt:VehStopPtAs, Mand 1:Opt Many
     VehStopPt:Commodity, Opt Many:Mand 1
     VehStopPt:RailMov, Mand 1:Opt Many
     VehStopPt:TransPri, Opt Many:Mand 1
     VehStopPt:CgoAddress, Opt Many:Opt 1 (Consignee)
     VehStopPt:CgoMCE, Opt Many:Opt 1 (Destination)
     VehStopPt:SpecialInt, Opt Many:Mand 1


NOTE:  Relationship to CgoMCE is optional on side of CgoMCE because
       MCECd is normally obtained through CgoAddress.
```

LOGICAL DATABASE DESIGN:

TMRPrefix	6	P/F
StpSeqNo	1	P
RDD	5	S
Wt	6	
Pc	4	
Cu	4	
Lgth	5	
Wdth	3	
Ht	3	
PalletQty	2	
TopNetQty	3	
SideNetQty	3	
ChainQty	3	
StrapQty	3	
DeviceQty	3	
DunnageQty	3	
StpCompFlag	1	S
StpCompDtl	5	
PrimeTCN	17	S
CgoDescr	50	
DestMCEPrefix	1	F
TransPriCd	1	F
CmdtyCd	3	F
SpIntCd	2	F
Consignee	6	F

PARTITION:

None.

ASSUMPTION: One and only one VehStopPt for multi-asset commitments.
;

```
ATTRIBUTE IS:
     SEC-CLASS       'UNCLASSIFIED' ,
     TYPE            'AN' ,
     volatility      'DYNAMIC' ,
     PICTURE         'X(143)' ,
     FIELD-LENGTH     '143' ;
SOURCE IS:      'FREIGHT DATA MODEL' ;
KEYWORD IS:     'LOB' ,
                'Freight' ,
                'Data Model' ;
COLLECTED:      IN VehStopPt-File ;
```

```
93       DEFINE SET                          VehStopPtAs-File ;
     DESCRIPTION;
Vehicle Stop Point Asset File.
This file is a collection of arrival, release, and departure date/time
data for a particular asset at a stop point.
 ;
     ATTRIBUTE IS:
          MEDIA              'DISK' ,
          SEC-CLASS          'UNCLASSIFIED' ,
          UPDATE-FREQUENCY
                             'DAILY' ,
          UPDATE-METHOD       'INTERACTIVE-BATCH' ,
          TABLE-FORM         'LOCAL' ,
          EST-SIZE           '48 CHAR RECORDS' ,
          volatility         'DYNAMIC' ;
     SOURCE IS:         'FREIGHT DATA MODEL' ;
     KEYWORD IS:        'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'TACCS' ;
     COLLECTION OF:
          VehStopPtAs ;

     Define Entity                       VehStopPtAs ;
     DESCRIPTION;
Vehicle Stop Point Asset.
This entity is an occurrence of vehicle stop point asset information
relating to assets and stops for each TMR. This record is the master
file record for the Vehicle Stop Point Asset File.
 ;
     LAYOUT;

DATA MODEL:

     VehStopPtAs:ChangeType, Opt Many:Opt 1
     VehStopPtAs:VehStopPt, Opt Many:Mand 1
     VehStopPtAs:FreightMov, Opt Many:Mand 1
     VehStopPtAs:FrtMEvent, Mand 1:Opt Many (Destination)
     VehStopPtAs:FrtMovAsset, Opt Many:Mand 1


LOGICAL DATABASE DESIGN:

     TMRPrefix                           6      P/F
     StpSeqNo                            1      P/F
     TIN                                 8      P/F
     ArrDte                              5
     RelDte                              5
```

```
      DprtDte                          5
      ArrTime                          4
      RelTime                          4
      Dprtlime                         4
      ChDte                            5
      ChCd                             1      F

PARTITION:

      VehStopPtAs                      CRU
         FrtMEvent                     CR
         FrtMovAsset                   R
            FreightMov                 RU
         VehStopPt                     RU
            FreightMov                 RU
         ChangeType                    R
;
      ATTRIBUTE IS:
           SEC-CLASS       'UNCLASSIFIED' ,
           TYPE            'A[illegible]' ,
           PICTURE         'X(48)' ,
           FIELD-LENGTH     '48' ,
           volatility      'DYNAMIC' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      COLLECTED:      IN VehStopPtAs-File ;
```

```
94        DEFINE SET                              Voyage-File ;
      DESCRIPTION;
   Voyage File.
   This file contains data relating a Voyage Number to its date sailed, its
   vessel, and its Port of Embarkation (POE).
    ;
      ATTRIBUTE IS:
           volatility       'PERPETUAL' ,
           EST-SIZE         '17 CHAR RECORDS' ,
           EST-VOLUME       '20 RECORDS' ,
           MEDIA            'DISK' ,
           RETENTION        '60 DAYS' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           UPDATE-FREQUENCY
                            'AS PER VOYAGE' ,
           UPDATE-METHOD     'INTERACTIVE/BATCH' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      KEYWORD IS:     'Data Model' ,
                      'LOB' ,
                      'TACCS' ,
                      'Container' ;
      COLLECTION OF:
           Voyage ;

      Define Entity                          Voyage ;
      DESCRIPTION;
   Voyage.
   This entity is an occurrence of the information for a given voyage,
   whether sea or air, from POE to POD.  This is the master record
   format for the Voyage-File.
    :
      LAYOUT;

   DATA MODEL:

        Voyage:VoyageStop, Mand 1:Mand Many
        Voyage:OceanCarr, Opt Many:Opt 1

   LOGICAL DATABASE DESIGN:

        VoyDocuNoFltNo                    5   F
        DteSailWPOE                       5
        POE                               3
        OceanCarrAbbr                     4   F

   PARTITION:

        None.;
      ATTRIBUTE IS:
```

```
      volatility        'DYNAMIC' ,
      RETENTION         '60 DAYS' ,
      SEC-CLASS         'UNCLASSIFIED' ,
      TYPE              'AN' ,
      PICTURE           'X(17)' ,
      FIELD-LENGTH      '17' ;
SOURCE IS:        'CONTAINER DATA MODEL' ;
KEYWORD IS:       'LOB' ,
                  'Data Model' ,
                  'Container' ;
CARDINALITY IS:
                  20 ;
COLLECTED:        IN Voyage-File ;
```

```
95        DEFINE SET                              VoyageStop-File ;
      DESCRIPTION;
   Voyage Stop File.
   This file contains data relating a Voyage Number to a Port of
   Debarkation (POD).
    ;
      ATTRIBUTE IS:
           MEDIA              'DISK' ,
           SEC-CLASS          'UNCLASSIFIED' ,
           EST-SIZE           '8 CHAR RECORDS' ,
           TABLE-FORM         'LOCAL' ,
           UPDATE-METHOD       'INTERACTIVE/BATCH' ,
           volatility         'DYNAMIC' ,
           UPDATE-FREQUENCY
                              'DAILY' ,
           EST-VOLUME         '15 RECORDS' ;
      SOURCE IS:        'CONTAINER DATA MODEL' ;
      KEYWORD IS:       'Data Model' ,
                        'LOB' ,
                        'TACCS' ,
                        'Container' ;
      COLLECTION OF:
           VoyageStop ;

      Define Entity                             VoyageStop ;
      DESCRIPTION;
   Voyage Stop.
   Information that uniquely identifies a particular stop of a given
   voyage.
    ;
      LAYOUT;

   DATA MODEL:

        VoyageStop:Voyage, Mand Many:Mand 1
        VoyageStop:CgoPort, Opt Many:Mand 1 (POD)
        VoyageStop:CntnrMov, Opt 1:Mand Many


   LOGICAL DATABASE DESIGN:

        VoyDocuNoFltNo                          5     P/F
        POD (Port Code)                         3     P/F


   PARTITION:

        None.;
      ATTRIBUTE IS:
```

```
        volatility      'DYNAMIC' ,
        TYPE            'AN' ,
        FIELD-LENGTH     '8' ,
        PICTURE         'X(08)' ,
        SEC-CLASS       'UNCLASSIFIED' ;
    SOURCE IS:      'CONTAINER DATA MODEL' ;
    KEYWORD IS:     'LOB' ,
                    'Data Model' ,
                    'Container' ;
    CARDINALITY IS:
                    15 ;
    COLLECTED:      IN VoyageStop-File ;

EOF EOF EOF EOF EOF
```

APPENDIX V. DAMMS-R Phase 1 Data Element Dictionary (DED)

PARAGRAPH	DICTIONARY OBJECTS	PAGE
1	AAC	V-15
2	AACBBP	V-16
3	AACBBPDescr	V-16
4	AACBnMCCMCC	V-17
5	AACCurr	V-18
6	AACMCE	V-19
7	AACMMC	V-21
8	AACMMC1	V-23
9	AACMMC2	V-24
10	AACMMCDescr	V-24
11	AACXRef	V-25
12	ACANo	V-25
13	ACARefNo	V-26
14	ACARmrks	V-26
15	ADCATCd	V-27
16	ADCATCdDescr	V-29
17	APO1st5	V-30
18	APOB	V-30
19	APOLst4	V-31
20	ATMCTAct	V-31
21	Action	V-32
22	ActlCst	V-32
23	ActlLoadDte	V-33
24	ActlPcCnt	V-33
25	ActlPullDte	V-34
26	ActlPullTime	V-35
27	ActlRelTime	V-35
28	ActlSpotDte	V-36
29	ActlSpotTime	V-36
30	AirDim	V-37
31	ArrDte	V-37
32	ArrTime	V-38
33	As-Sta-Dte	V-38
34	AsQty	V-39
35	Assistance-Required-Other	V-39
36	Assistance-Rqr-Carr-Maint-Team	V-40
37	Asst-Rqr-Carr-Claims-Invest	V-41
38	Attn	V-41
39	AuthzdSpots	V-42
40	BAPO1st5	V-42
41	BAPOLst4	V-43
42	BASATel	V-43
43	BAttn	V-44
44	BBldgNo	V-44
45	BCityEff	V-45
46	BCntry	V-45
47	BDteLstUpd	V-46

PARAGRAPH	DICTIONARY OBJECTS	PAGE
48	BFSN	V-46
49	BIIPcs	V-47
50	BMCTMthCd	V-48
51	BMCTRefNo	V-49
52	BMCTSerNo	V-50
53	BPostCd	V-50
54	BStPOBox	V-51
55	BUDsg	V-51
56	Bckld	V-52
57	BeamAssy	V-52
58	Bldg	V-53
59	CH-CD	V-54
60	CMM-Change-Number	V-55
61	CMM-Environment-Code	V-56
62	CMMEvntDte	V-57
63	CMMIndicrCd	V-57
64	CanREFAMNoncfm	V-58
65	CarrDescr	V-58
66	CarrNme	V-59
67	CgoDescr	V-60
68	ChCd	V-61
69	ChCdDescr	V-62
70	ChDte	V-62
71	Chain-Tot	V-63
72	ChainQty	V-63
73	Chains	V-64
74	CityGpCd	V-65
75	CityGpNme	V-68
76	CityNme	V-69
77	CityRgn	V-69
78	ClusterCd	V-70
79	CmdtyCd	V-71
80	CmdtyCdDescr	V-72
81	CnsgnrAAC	V-72
82	CntrDistrCd	V-73
83	Cntnr-Deletion-Criteria	V-73
84	Cntnr-Deletion-Notification	V-74
85	Cntnr-History-Sel-Criteria	V-74
86	Cntnr-On-Hand-Over-X-Criteria	V-75
87	Cntnr-Origin-Code	V-75
88	CntnrDam	V-76
89	CntnrNo	V-77
90	CntnrNoPrefix	V-78
91	CntnrNoTlrNo	V-78
92	CntnrOwnAbbr	V-79
93	CntnrOwnNme	V-85
94	CntnrOwnTyCd	V-86

PARAGRAPH	DICTIONARY OBJECTS	PAGE
95	CntnrOwnTyDescr	V-87
96	CntnrRmrk	V-87
97	CntnrRmrkLnNo	V-88
98	CntnrSz	V-88
99	CntnrSzDescr	V-89
100	CntnrTCN	V-89
101	CntnrTyCd	V-90
102	CntryCd	V-92
103	CntryCdDescr	V-101
104	ComlCarrNme	V-101
105	ComlConNo	V-102
106	ComlCst	V-102
107	Commitment-Print-Flag	V-103
108	CompGp	V-104
109	Consignee	V-105
110	Consignor	V-106
111	ContrEnd	V-106
112	ContrNo	V-107
113	ContrStart	V-107
114	CstFvrblCd	V-108
115	CstFvrblCdDescr	V-109
116	Cu	V-109
[illegible]	CuOnePc	V-110
118	CuThisLotNo	V-110
119	Current-Container-Location	V-111
120	DB-Name	V-111
121	DDActlSptDte	V-112
122	DDCarrPOCNotif	V-112
123	DDCarrPOCNotifRel	V-113
124	DDCnsgnPOCNotif	V-113
125	DDDteCarrNotif	V-114
126	DDDteCnsgnNotif	V-114
127	DDDteCnsgnReqRelDte	V-115
128	DDDteRel	V-115
129	DDLoc	V-116
130	DDNHostCd	V-117
131	DDNUserId	V-118
132	DDPostDte	V-118
133	DIC	V-119
134	DLCd	V-120
135	DLCdDescr	V-121
136	DODIC	V-121
137	DSSALOCCd	V-122
138	DSSALOCCdDescr	V-123
139	DTG	V-123
140	DTG-Damage/Deadline-Occurred	V-124
141	DTGATMCTFwdExprtCtrc	V-124

PARAGRAPH	DICTIONARY OBJECTS	PAGE
142	DTGATMCTRecExprtClnc	V-125
143	DTGATMCTRecExprtReqClnc	V-125
144	DTGComtFwd	V-126
145	DTGExprtClncRecFrPrt	V-126
146	DTGExprtClncReqFwd	V-127
147	DTGExprtClncReqFwdACA	V-127
148	DTGExprtClncReqRec	V-128
149	DTGMCTFwdExprtClnc	V-129
150	DTGMarCredFwd	V-129
151	DTGMovBidFwd	V-130
152	DTGMovBidRec	V-130
153	Damaged/Deadlined-Remarks	V-131
154	Day-of-Yr	V-131
155	DelFlag	V-132
156	Description-of-Damage	V-132
157	DestMCEPrefix	V-133
158	DestMCESuffix	V-133
159	DestRhd	V-134
160	Device-Tot	V-134
161	DeviceQty	V-135
162	Devices	V-135
163	DiscrpCd	V-136
164	DiscrpCdDescr	V-139
165	DiscrpDte	V-139
166	DiscrpPc	V-140
167	DiscrpTCN	V-140
168	DivrsnDte	V-141
169	DivrsnIndic	V-142
170	DivrsnRecngnCnsgn	V-143
171	DprtDte	V-143
172	DprtTime	V-144
173	Driver-Name	V-144
174	Driver-Rank	V-145
175	Driver-Unit	V-145
176	Driver-Unit-Phone	V-146
177	DspoActv	V-146
178	DteAvailSupmt	V-147
179	DteCgoTrf	V-147
180	DteCnsgnNotif	V-148
181	DteCurr	V-149
182	DteDprtCnsgnr	V-150
183	DteDprtWhCE	V-151
184	DteHoldStart	V-151
185	DteHoldStop	V-152
186	DteLstUpdCgoActv	V-152
187	DteLstUpdCgoAdrs	V-153
188	DteLstUpdCntnr	V-154

PARAGRAPH	DICTIONARY OBJECTS	PAGE
189	DteLstUpdFrt	V-154
190	DteRecCreat	V-155
191	DteRecFrLSSA	V-156
192	DteRecngnCfmNoncfm	V-157
193	DteRecngnReq	V-157
194	DteSailWPOE	V-158
195	DteStageStart	V-158
196	DteStageStop	V-159
197	DteToLSSA	V-159
198	Dunnage	V-160
199	Dunnage-Tot	V-160
200	DunnageQty	V-161
201	DupeStpIndex	V-162
202	ETA	V-163
203	ETA-Err-Cd	V-164
204	ETABCnsgn	V-166
205	ETABMCT	V-167
206	ETABMMC1	V-168
207	ETABMMC2	V-169
208	ETACCnsgn	V-170
209	ETACMCT	V-171
210	ETACMMC1	V-172
211	ETACMMC2	V-173
212	ETAFcstLvlCd	V-174
213	ETAFcstLvlCdDescr	V-174
214	ETARmrks	V-175
215	EffDte	V-175
216	Err-Diag	V-176
217	Err-Msg	V-176
218	Error-Cd	V-177
219	EvntDte	V-178
220	EvntLoc	V-179
221	EvntTy	V-180
222	ExprtClncNo	V-183
223	ExprtClncReqCd	V-183
224	ExprtIfcRelNo	V-184
225	Extent-of-Damage-Cargo	V-184
226	Extent-of-Damage-Chassis	V-185
227	Extent-of-Damage-Container	V-185
228	Extent-of-Damage-Tractor	V-186
229	FAPO1st5	V-187
230	FAPOLst4	V-188
231	FAttn	V-189
232	FBldgNo	V-190
233	FBrksKsrn	V-191
234	FCityCd	V-192
235	FCityRgn	V-207

PARAGRAPH	DICTIONARY OBJECTS	PAGE
236	FCityRgnLst20	V-208
237	FCntry	V-209
238	FDteLstUpd	V-210
239	FMCTCivTel	V-210
240	FMCTMilTel	V-211
241	FMCTPOC	V-211
242	FPostCd	V-212
243	FS4	V-213
244	FUDsg	V-214
245	FUDsgCont	V-215
246	FWTNo	V-216
247	File-Name	V-217
248	File-No	V-217
249	Freight-History-Sel-Criteria	V-218
250	Freight-Origin-Code	V-218
251	Freq	V-219
252	FrtRmrk	V-220
253	GBLNo	V-220
254	HolAreaCd	V-221
255	HolAreaCdDescr	V-222
256	HoldLoc	V-223
257	Hrs-24-Min	V-224
258	Ht	V-225
259	HwyClncRqmtCd	V-226
260	HwyClncRqmtCdDescr	V-227
261	IdNo	V-227
262	InsdCuCap	V-228
263	JulianDte	V-228
264	LHC	V-229
265	LMF1	V-230
266	LMF2	V-231
267	LMFCd	V-232
268	LMFCdDescr	V-233
269	Label-Print-Flag	V-233
270	Lgth	V-234
271	Loc-Damaged/Deadlined-Occurred	V-234
272	LotNo	V-235
273	LsOdrIdNo	V-235
274	Lst-Two-Digit-CY	V-236
275	LvlCd	V-237
276	MACOMCd	V-238
277	MACOMCdDescr	V-244
278	MAPO1st5	V-244
279	MAPOLst4	V-245
280	MAttn	V-246
281	MBldgNo	V-247
282	MCECd	V-248

PARAGRAPH	DICTIONARY OBJECTS	PAGE
283	MCENme	V-249
284	MCEPrefix	V-250
285	MCESuffix	V-252
286	MCETyCd	V-253
287	MCETyCdDescr	V-254
288	MCityRgn	V-254
289	MCntry	V-255
290	MDteLstUpd	V-256
291	MINIndic	V-257
292	MPostCd	V-258
293	MSCCCO	V-258
294	MStPOBox	V-259
295	MTSR-Rmrk	V-259
296	MUDsg	V-260
297	MUDsgCont	V-261
298	ManStaCd	V-261
299	MarCredNo	V-262
300	MgrCd	V-262
301	MilCst	V-263
302	ModeCd	V-264
303	ModeCdDescr	V-266
304	ModeMethShpmtCd	V-267
305	ModeMethShpmtCdDescr	V-270
306	Model	V-270
307	MovCompDte	V-271
308	MovCompFlag	V-271
309	MovEvntCd	V-272
310	MovEvntDescr	V-273
311	MovEvntTyCd	V-274
312	Movement-Number	V-275
313	MsgCdId	V-276
314	MsgCdIdDescr	V-277
315	MthCd	V-278
316	MthCdDescr	V-279
317	MultiStpNo	V-280
318	NEW	V-281
319	NNSN	V-281
320	NetExploWt	V-282
321	New-ModeCd	V-282
322	New-SerNo	V-283
323	NewEvntLoc	V-283
324	NewFWTNo	V-284
325	NewModeMethShpmtCd	V-285
326	NewMovNo	V-286
327	NewTAC	V-287
328	NewTIN	V-288
329	NewTMR	V-289

PARAGRAPH	DICTIONARY OBJECTS	PAGE
330	NewTyCarrCd	V-290
331	NewTyMovNoCd	V-291
332	No-Hist-Disks-per-Month	V-292
333	No-Records-on-Month-Disks	V-292
334	Number-463L-Pallet-Criteria	V-293
335	OceanCarrAbbr	V-294
336	OceanCarrNme	V-297
337	OrdnDescr	V-297
338	OrdnNo	V-298
339	OrigCd	V-299
340	OrigCdDescr	V-300
341	OrigCdTy	V-301
342	OrigCdTyDescr	V-302
343	OrigChCd	V-303
344	OrigChDte	V-304
345	OrigRhd	V-304
346	Origin-DODAAC	V-305
347	Origin-MCE-Prefix	V-306
348	OriginBMCECd	V-307
349	OriginBMCEPrefix	V-308
350	OriginBMCESuffix	V-308
351	OriginMCEPrefix	V-309
352	POD	V-311
353	POE	V-312
354	PSPCivTel	V-313
355	PSPMilTel	V-313
356	PSPPOC	V-314
357	Pallet-Tot	V-314
358	PalletQty	V-315
359	Pallets	V-315
360	Pc	V-316
361	PcThisDim	V-316
362	PcThisLotNo	V-317
363	PostCd	V-317
364	Prefix-Code	V-318
365	PrimeTCN	V-319
366	ProjCd	V-319
367	PrtCd	V-320
368	PrtNme	V-341
369	PrtTyCd	V-342
370	PrtTyDescr	V-343
371	PstDte	V-344
372	PullDte	V-345
373	PullTime	V-345
374	RDD	V-346
375	RdCtTot	V-346
376	RecngnCfmNoncfm	V-347

PARAGRAPH	DICTIONARY OBJECTS	PAGE
377	Record-Month-of-Hist-Disk	V-347
378	Record-Year-of-Hist-Disk	V-348
379	RelDte	V-348
380	RelTime	V-349
381	Report-Submitted-by-Name	V-349
382	Report-Submitted-by-Rank	V-350
383	Report-Submitted-by-Unit	V-350
384	Report-Submitted-by-Unit-Phone .	V-351
385	ReqAAC	V-351
386	ReqDTG	V-352
387	ReqLoadDte	V-352
388	ReqNme	V-353
389	ReqNo	V-353
390	ReqPullDte	V-354
391	ReqSpotDte	V-354
392	ReqSpotQty	V-355
393	ReqUnit	V-355
394	RespCd	V-356
395	RespCdDescr	V-357
396	RmnSpots	V-357
397	Rmrk	V-358
398	RmrkLineNo	V-358
399	RmrksCgoDescr	V-359
400	Rsn-Cd	V-360
401	RsnDenyCd	V-361
402	RsnDenyCdDescr	V-362
403	RtCd	V-362
404	RtSeqNo	V-363
405	STMRAsQty	V-363
406	STMRAsTy	V-364
407	STMRCgoDescr	V-364
408	STMRConsignee	V-365
409	STMRConsignor	V-365
410	STMRFBldgNo	V-366
411	STMRFBrkdnRsn	V-366
412	STMRFMCTPOC	V-367
413	STMRFMCTTel	V-367
414	STMRFUDsg	V-368
415	STMRJulDte	V-368
416	STMRNo	V-369
417	STMRRmrk	V-369
418	SealNo	V-370
419	SecConsolNo	V-370
420	Seq-No	V-371
421	SeqNo	V-371
422	Sequence-No	V-372
423	SerNo	V-372

PARAGRAPH	DICTIONARY OBJECTS	PAGE
424	ShipToAAC	V-373
425	ShpmtU	V-374
426	ShpmtUTCN	V-374
427	SideNet-Tot	V-375
428	SideNetQty	V-375
429	SideNets	V-376
430	SpHdlCd	V-376
431	SpHdlCdDescr	V-377
432	SpIntCd	V-378
433	SpIntCdDescr	V-382
434	Spot-Exceeded	V-382
435	SpotFactorCd	V-383
436	SpotFactorCdDescr	V-383
437	SpotLimitCd	V-384
438	SpotLimitCdDescr	V-386
439	SpotTime	V-387
440	StAdrs	V-387
441	StaCd	V-388
442	StaCdDescr	V-389
443	StgIndic	V-390
444	StpCompDte	V-391
445	StpCompFlag	V-391
446	StpNonFcst	V-392
447	StpOffCd	V-393
448	StpOffIndicr	V-393
449	StpSeqNo	V-394
450	Strap-Tot	V-395
451	StrapQty	V-395
452	Straps	V-396
453	T9SeqNo	V-396
454	TAC	V-397
455	TAT-Cu	V-398
456	TAT-Pc	V-398
457	TAT-Wt	V-399
458	TCMD-IDENT-CON-NO	V-399
459	TCN	V-400
460	TCN-of-Request	V-401
461	TCNPc	V-401
462	TCNSuffix	V-402
463	TELEX	V-402
464	TIN	V-403
465	TMAFDteLstUpd	V-404
466	TMCA-Origin-Code	V-404
467	TMR	V-405
468	TMRPrefix	V-406
469	TMRRefNo	V-407
470	TTPCd	V-408

PARAGRAPH	DICTIONARY OBJECTS	PAGE
471	TTPDescr	V-409
472	Tbl-Cd	V-409
473	Tbl-Cd-Descr	V-410
474	Tbl-Nme	V-411
475	TcrTml	V-412
476	TopNet-Tot	V-413
477	TopNetQty	V-413
478	TopNets	V-414
479	TotCu	V-414
480	TotDaysHeld	V-415
481	TotStp	V-416
482	TransPriCd	V-418
483	TransPriDescr	V-419
484	TrkManRefCd	V-419
485	TrnsCd	V-420
486	TrnsSeqNo	V-421
487	Ty-Air-Man-Cd	V-422
488	TyAsCd	V-423
489	TyAsCdDescr	V-426
490	TyCarrCd	V-427
491	TyCarrCdDescr	V-428
492	TyCgoCd	V-428
493	TyMovCd	V-429
494	TyMovCdDescr	V-430
495	TyMovNoCd	V-431
496	TyMovNoCdDescr	V-432
497	TyPackCd	V-433
498	TyPwrCd	V-434
499	UDsg	V-435
500	UIC	V-435
501	UICCurr	V-436
502	UICOld	V-436
503	UN/NA	V-437
504	UN/NANo	V-437
505	UNClass	V-438
506	USAFSerNo	V-438
507	UltmCnsgn	V-439
508	VanNo	V-439
509	VesNme	V-440
510	VoyDocuNoFltNo	V-441
511	WPOD	V-442
512	WPOE	V-442
513	Wdth	V-443
514	Wt	V-443
515	WtOnePc	V-444
516	WtSTDay	V-444
517	WtThisLotNo	V-445

PARAGRAPH	DICTIONARY OBJECTS	PAGE
518	XRefTMR	V-445
519	XRefTMRPrefix	V-446
520	Xmit-Detail-No	V-446
521	ZipCd	V-447

```
1       DEFINE ELEMENT                          AAC ;
     SYNONYM IS:     ACTV-ADRS-CD ,
                     Activity-Address-Code ;
     DESCRIPTION;
Activity Address Code
A distinctive, six-position, alpha and/or alphanumeric code assigned
to specific units, activities, or organizations for identification
purposes.
 ;
     KEYWORD IS:     'Container' ,
                     'CMM' ,
                     'Freight' ,
                     'TMAS' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
     SOURCE IS:      'TM 38-LZ1-2-1-C' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '6' ,
          TYPE             'AN' ,
          PICTURE          'X(06)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          CMM-DBMS-NME      'AAC' ,
          PROJ-DED-NME      'ACTV-ADRS-CD' ,
          FORMAT           'ROOT' ,
          USE              'CODE' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB WORK GROUPS' ;
```

```
2       DEFINE ELEMENT                          AACBBP ;
     SYNONYM IS:     BBP ,
                     DODAAC-BBP ;
     DESCRIPTION;
Department of Defense Activity Address Code Breakbulk Point
The DODAAC of an activity/installation designated for receipt and
separation of consolidated small lot shipments.
 ;
     KEYWORD IS:     'EURAAF' ,
                     'TMAS' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Code-Tbl-Validation-Memo ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '6' ,
          TYPE             'AN' ,
          PICTURE          'X(06)' ,
          DUI              'AAC' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'CODE' ;
     CONTAINED:        IN  BBPUnique ;
     CONTAINED:        IN  FreightAdrs ;
     IDENTIFIES:     bbPUnique ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;

3       DEFINE ELEMENT                          AACBBPDescr ;
     SYNONYM IS:     DODAAC-BBP-Description ;
     DESCRIPTION;
Department of Defense Activity Address Code Breakbulk Point Description
Identifies the name of the activity or installation associated with the
DODAAC-BBP.
 ;
     KEYWORD IS:     'TMAS' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          TYPE             'AN' ,
          FIELD-LENGTH     '35' ,
          PICTURE          'X(35)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'TEXT' ;
     CONTAINED:        IN  BBPUnique ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;
```

```
4       DEFINE ELEMENT                          AACBnMCCMCC ;
      SYNONYM IS:     DODAAC-Bn-MC/CMCC ;
      DESCRIPTION;
Department of Defense Activity Address Code Battalion Movement Control/
Corps Movement Control Center
The DODAAC of the Transportation Battalion (Movement Control) servic-
ing the Ship-to-DODAAC.
 ;
      KEYWORD IS:       'TMAS' ,
                        'Freight' ,
                        'Container' ,
                        'Data Model' ,
                        'LOB' ;
      SOURCE IS:        'TMAS DATA MODEL' ,
                        'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH      '6' ,
           TYPE              'AN' ,
           [illegible]       '[illegible]' ,
           DUI               'AAC' ,
           SEC-CLAS          'UNCLASSIFIED' ,
           USE               'CODE' ;
      CONTAINED:        IN  CgoMCE ;
      CONTAINED:        IN  MovConElm ;
      RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB WORK GROUPS' ;
```

```
5       DEFINE ELEMENT                          AACCurr ;
        SYNONYM IS:     AAC-CURR ,
                        ACTV-ADRS-CD-CURR ,
                        DODAAC-Current ,
                        REQAAC ,
                        Tracing-Activity ;
        DESCRIPTION;
    Department of Defense Activity Address Code Current.
    The current Department of Defense Activity Address Code of an activity
    or unit.
     ;
        KEYWORD IS:     'Container' ,
                        'CMM' ,
                        'Freight' ,
                        'EURAAF' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TMAS/CNTNR/FRT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '6' ,
             TYPE             'AN' ,
             PICTURE          'X(06)' ,
             DUI              'AAC' ,
             CMM-DBMS-NME      'AAC-CURR' ,
             PROJ-DED-NME      'ACTV-ADRS-CD-CURR' ,
             USE              'CODE' ,
             SEC-CLASS        'UNCLASSIFIED' ;
        CONTAINED:       IN  Activity ;
        CONTAINED:       IN  CgoActivity ;
        CONTAINED:       IN  MEvent ;
        CONTAINED:       IN  RemarkLine ;
        CONTAINED:       IN  ShpmtUTCN ;
        IDENTIFIES:      Activity ;
        IDENTIFIES:      CgoActivity ;
        IDENTIFIES:      RemarkLine ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
6       DEFINE ELEMENT                          AACMCE ;
        SYNONYM IS:     AAC-BMCT/ITO ,
                        AAC-ITO ,
                        AAC-MCT ,
                        AAC-TMO ,
                        ACTIVITY-ADDRESS-CODE-ITO ,
                        ACTIVITY-ADDRESS-CODE-TMO ,
                        DODAAC-BMCT ,
                        DODAAC-MCT ,
                        DODAAC-Movement-Con-Element ;
        DESCRIPTION;
    Department of Defense Activity Address Code of the Movement Control
    Element.
    The DODAAC of the MCE servicing the Ship-to-DODAAC.
     ;
        KEYWORD IS:     'CMM' ,
                        'CMM-DBMS' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOE' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '6' ,
             TYPE             'AN' ,
             DUI              'AAC' ,
             PICTURE          'X(06)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'CODE' ;
        CODE:           'OOMCTA'
                         MEANS
                        'AAFES-Giessen' ;
        CODE:           'OOMCTB'
                         MEANS
                        'TMO Bremerhaven' ;
        CODE:           'OOMCTE'
                         MEANS
                        'TMO Frankfurt' ;
        CODE:           'OOMCTH'
                         MEANS
                        'TMO Idar-Oberstein' ;
        CODE:           'OOMCTJ'
                         MEANS
                        'TMO Kaiserslautern' ;
        CODE:           'OOMCTK'
                         MEANS
                        'AAFES-Gruenstadt' ;
        CODE:           'OOMCTM'
                         MEANS
                        'TMO Mannheim' ;
```

```
CODE:           'OOMCTN'
                 MEANS
                'TMO Nuernberg' ;
CODE:           'OOMCTR'
                 MEANS
                'TMO Rotterdam' ;
CODE:           'OOMCTT'
                 MEANS
                'TMO Stuttgart' ;
CODE:           'ATMCTP'
                 MEANS
                'AATCO Ramstein' ;
CODE:           'ATMCTZ'
                 MEANS
                'AATCO Rhein Main' ;
CODE:           'OOMCTG'
                 MEANS
                'Moenchengladbach' ;
CODE:           'OOMCTC'
                 MEANS
                'All country except GE-Benelux' ,
                'MCT Naples, Italy' ;
CODE:           'OOMCTS'
                 MEANS
                'MCT Cadiz, Spain' ;
CODE:           'OOMCTP'
                 MEANS
                'MCT Pizaeus, Greece' ;
CODE:           'OOMCTL'
                 MEANS
                'MCT Livorno, Italy' ;
CONTAINED:       IN  MovCosElm ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB TMAS GROUP' ;
```

```
7       DEFINE ELEMENT                          AACMMC ;
    SYNONYM IS:     DODAAC-MMC ;
    DESCRIPTION;
Department of Defense Activity Address Code of the Materiel Management
Center.
A DODAAC which uniquely identifies a MMC related to an activity.
Specific uses include AACMMC1 and AACMMC2.
 ;
    KEYWORD IS:     'TMAS' ,
                    'Data Model' ,
                    'LOB' ;
    SEF MEMO:
         Code-Tbl-Validation-Memo ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '6' ,
         TYPE             'AN' ,
         PICTURE          'X(06)' ,
         DUI              'AAC' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         FORMAT           'ROOT' ,
         USE              'CODE' ;
    CODE:               'nA6RDA'
                         MEANS
                        'Port Liaison Br Rotterdam' ;
    CODE:               'SC0312'
                         MEANS
                        'DSRE Europe' ;
    CODE:               'SB0200'
                         MEANS
                        'DSRE Europe HQ' ;
    CODE:               'WK4VWJ'
                         MEANS
                        'TSA European Field Office' ;
    CODE:               'WK4GGB'
                         MEANS
                        '3 SUPCOM Corps MMC' ;
    CODE:               'OOAFCM'
                         MEANS
                        'Air Force Commissaries' ;
    CODE:               'WK4GGD'
                         MEANS
                        '200 TAMMC Sst Mgt Div Zweibk' ;
    CODE:               'FB5612'
                         MEANS
                        '8F TFW Base Equip Mat Ofc' ;
    CODE:               'WK4FYS'
                         MEANS
                        'CFCE POMCUS Prep Book Ofc' ;
```

```
CODE:           'WK4VID'
                 MEANS
                '21 SUPCOM 3LOGC Kaiserslautern' ;
CODE:           'WK4E1E'
                 MEANS
                '800 MMC Stk Con Actv/Boeb' ;
CODE:           'W80A51'
                 MEANS
                '142 S&S Bn HHC/Mainz/K' ;
CODE:           'WK3FQ2'
                 MEANS
                'NATO/SHAPE SG Stk Acct' ;
CODE:           'WK4FSR'
                 MEANS
                'Berlin Bde S&S Div' :
CODE:           'WK4PJG'
                 MEANS
                '500 Trans Co Frankfurt' ;
CODE:           'HXGAAA'
                 MEANS
                'AAFES Europe HQ' ;
CODE:           'WK4F5E'
                 MEANS
                'US Army Med Mat Cen Eur' ;
CODE:           'WK4WM7'
                 MEANS
                '800 MMC COSCOM' ;
CODE:           'WK3G2A'
                 MEANS
                '5C FE Fw BMMC SSA Neu Ulm' ;
CODE:           'W80UZG'
                 MEANS
                'Red Cross(MMC for all DODAACs)' ;
CODE:           'WK4F20'
                 MEANS
                '32 AADCOM 1 Cbt Spt MMC' ;
CODE:           'W8002M'
                 MEANS
                '27 AFSC NATO/SHAPE SC FAO' ;
CONTAINED:       IN  MMCUnique ;
IDENTIFIES:     MMCUnique ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB TMAS GROUP' ;
```

```
8       DEFINE ELEMENT                          AACMMC1 ;
     SYNONYM IS:     AAC-MMC1 ,
                     ACTIVITY-ADDRESS-CODE-MMC ,
                     DODAAC-MMC1 ;
     DESCRIPTION;
Department of Defense Activity Address Code of the Materiel Management
Center 1.
The DODAAC of the primary MMC servicing the Ship-to-DODAAC.
 ;
     KEYWORD IS:     'CMM' ,
                     'CMM-DBMS' ,
                     'TMAS' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '6' ,
          TYPE             'AN' ,
          PICTURE          'X(06)' ,
          DUI              'AACMMC' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          CMM-DBMS-NME      'AAC-MMC1' ,
          [illegible]-NME   'ACTV-ADRS-CD-MMC-ONE' ,
          USE              'CODE' ;
     CONTAINED:       IN  FreightAdrs ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;
```

```
9       DEFINE ELEMENT                          AACMMC2 ;
        SYNONYM IS:     AAC-MMC2 ,
                        ACTIVITY-ADDRESS-CODE-MMC2 ,
                        DODAAC-MMC2 ;
        DESCRIPTION;
    Department of Defense Activity Address Code of the Materiel Management
    Center 2.
    The DODAAC of the alternate MMC servicing the Ship-to-DODAAC.
     ;
        KEYWORD IS:     'CMM' ,
                        'CMM-DBMS' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '6' ,
             TYPE             'AN' ,
             PICTURE          'X(06)' ,
             DUI              'AACMMC' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             CMM-DBMS-NME      'AAC-MMC2' ,
             PROJ-DED-NME      'ACTV-ADRS-CD-MMC-TWO' ,
             USE              'CODE' ;
        CONTAINED:       IN  FreightAdrs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;

10      DEFINE ELEMENT                          AACMMCDescr ;
        SYNONYM IS:     DODAAC-MMC-Description ;
        DESCRIPTION:
    Department of Defense Activity Address Code of the Materiel Management
    Center Description.
    Identifies the name of the DODAAC-MMC.
     ;
        KEYWORD IS:     'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             TYPE             'AN' ,
             FIELD-LENGTH      '35' ,
             PICTURE          'X(35)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'TEXT' ;
        CONTAINED:       IN  MMCUnique ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
11      DEFINE ELEMENT                          AACXRef ;
        SYNONYM IS:     AAC-CROSS-REFERENCE ,
                        AAC-CURR-XREF ,
                        DODAAC-XRef ;
        DESCRIPTION;
    Department of Defense Activity Address Code Cross Reference
    Identifies the old DODAAC to be cross referenced with the AACCurr.
     ;
        KEYWORD IS:     'CMM' ,
                        'CMM-DBMS' ,
                        'EURAAC' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '6' ,
             TYPE             'AN' ,
             PICTURE          'X(06)' ,
             DUI              'AAC' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             CMM-DBMS-NME      'AAC-CURR-XREF' ,
             PROJ-DED-NME      'ACTV-ADRS-CD-XREF' ,
             USE              'CODE' ;
        CONTAINED:       IN  Activity ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;

12      DEFINE ELEMENT                          ACANo ;
        DESCRIPTION;
    Air Clearance Authority Number.
    A 12-position field issued by the air clearance authority to identify
    cargo cleared for air movement.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '12' ,
             TYPE             'AN' ,
             PICTURE          'X(12)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ID-NO' ;
        CONTAINED:       IN  ExportAir ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```


```
13      DEFINE ELEMENT                          ACARefNo ;
     DESCRIPTION;
  Air Clearance Authority Reference Number.
   ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '6' ,
          TYPE             'AN' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'ID-NO' ,
          PICTURE          'X(06)' ;
     CONTAINED:       IN  ExportAir ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;


14      DEFINE ELEMENT                          ACARmrks ;
     DESCRIPTION;
  Air Clearance Authority Remarks.
   ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '50' ,
          TYPE             'AN' ,
          PICTURE          'X(50)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'TEXT' ;
     CONTAINED:       IN  ExportAir ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;
```

15 DEFINE ELEMENT ADCATCd ;
SYNONYM IS: ADCAT ,
ADCAT-CURRENT ,
ADCAT-Code ,
ADDRESS-CATEGORY ,
ADRS-CAT ;
DESCRIPTION;
Address Category Code
A code which identifies a grouping of addresses with similar mission functions.
;
KEYWORD IS: 'CMM' ,
'CMM-DBMS' ,
'TMAS' ,
'Data Model' ,
'LOB' ;
SEE MEMO:
Code-Tbl-Validation-Memo ;
SOURCE IS: 'TM 38-LZ1-11, App. B-4' ,
'TMAS DATA MODEL' ;
ATTRIBUTE IS:
FIELD-LENGTH '2' ,
TYPE 'AN' ,
PICTURE 'X(02)' ,
SEC-CLASS 'UNCLASSIFIED' ,
CMM-DBMS-NME 'ADCAT' ,
PROJ-DEP-NME 'ADRS-CAT' ,
USE 'CODE' ;
CODE: '1A'
MEANS
'All Army, [illegible]' ;
CODE: '1B'
MEANS
'APO (mailing addresses)' ;
CODE: '1C'
MEANS
'All AF DODAACs N.O.S.' ;
CODE: '1D'
MEANS
'AAFES, except CK4GE8, CK4GB9' ;
CODE: '1E'
MEANS
'HE _____ school system' ;
CODE: '1G'
MEANS
'SWE300 Germersheim FSA' ;
CODE: '1H'
MEANS
'SWE,SWK,(SWE[illegible],SWLA03,SWLB03)' ;

```
CODE:       '1K'
            MEANS
            'SWK303(Kaiserslautern cold st)' ;
CODE:       '1M'
            MEANS
            'SWE303(Bremerhaven cold store)' ;
CODE:       '1P'
            MEANS
            'POV (Privately Owned Vehicles)' ;
CODE:       '1S'
            MEANS
            'Stars and Stripes (WK4FQF)' ;
CODE:       '1X'
            MEANS
            'XDE (Direct Support Supply)' ;
CODE:       '1Y'
            MEANS
            'Direct Support Supply(AF only)' ;
CODE:       '1Z'
            MEANS
            'Break Bulk Points' ;
CODE:       '11'
            MEANS
            291, Army(Direct Delivery Com)' ;
CODE:       '12'
            MEANS
            '291, AF(Direct Delivery Comm)' ;
CODE:       '13'
            MEANS
            'HX8AEW,HX8ADW,(EES Gruenstadt)' ;
CODE:       '16'
            MEANS
            'Class 6 (FY 7116, WK4FVE)' ;
CODE:       '2A'
            MEANS
            'MMC, Army (MMC)' ;
CODE:       '2F'
            MEANS
            'TSA (Troop Support Agency)' ;
CODE:       '2M'
            MEANS
            'MILVANS' ;
CODE:       '3A'
            MEANS
            'TMO, Army MCT' ;
CODE:       '3B'
            MEANS
            'AF TMO' ;
CODE:       '3C'
```

AD-A190 395 FUNCTIONAL DESCRIPTION FOR THE DEPARTMENT OF THE ARMY 6/10
MOVEMENTS MANAGEMEN..(U) INTERNATIONAL BUSINESS
SERVICES INC PRINCE GEORGE VA DEFENSE S.. W ANCKAITIS
UNCLASSIFIED 31 DEC 87 DSDPG-375-049-87-3-VOL-3 F/G 12/7 NL

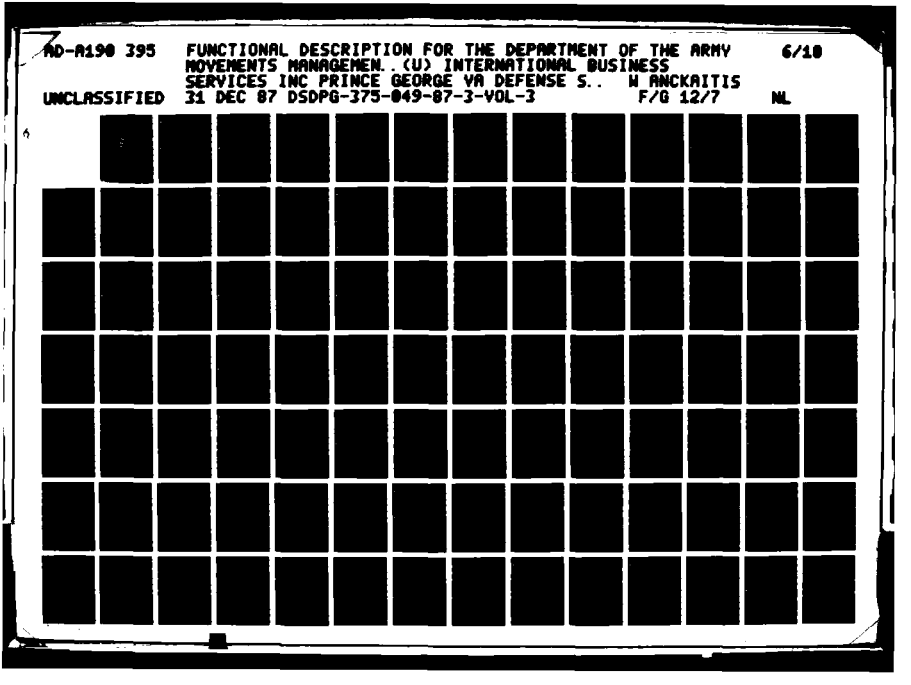

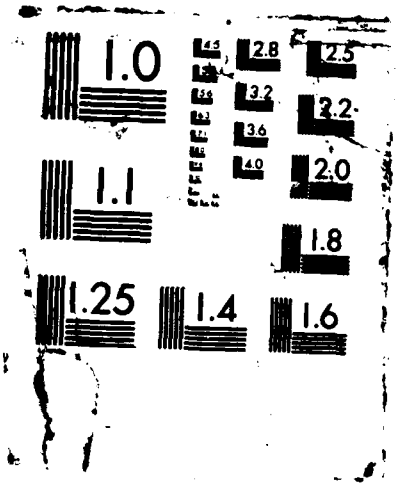
1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0

```
                    MEANS
                   'ITO, Army(ITO)' ;
        CODE:      'IT'
                    MEANS
                   'Italian DODAAC(incl)Naples' ;
        CODE:      '14'
                    MEANS
                   'AAFES Giessen' ;
        CODE:      'SS'
                    MEANS
                   'Cadiz' ;
        CODE:      'SP'
                    MEANS
                   'Piracus' ;
        CODE:      'IL'
                    MEANS
                   'Livorno' ;
        CONTAINED:      IN  AddressCat ;
        CONTAINED:      IN  FreightAdrs ;
        IDENTIFIES:    AddressCat ;
        RESPONSIBLE PROBLEM DEFINER IS:
                   'TACCS-LOB TMAS GROUP' ;

016     DEFINE ELEMENT                          ADCATCdDescr ;
        DESCRIPTION:
    Address Category Code Description
    A narrative description of the ADCATCd.
     ;
        KEYWORD IS:     'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             TYPE            'AN' ,
             FIELD-LENGTH     '60' ,
             PICTURE         'X(60)' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             USE             'TEXT' ;
        CONTAINED:      IN  AddressCat ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
19       DEFINE ELEMENT                          APOLst4 ;
     DESCRIPTION;
Army Post Office number or Zip Code, Last Four Digits
The last four digits in a 9-digit designator of the APO number or Zip
Code in a billing, freight, or mailing address.
 ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '4' ,
          TYPE             'N' ,
          PICTURE          '9(04)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          FORMAT           'ROOT' ,
          USE              'ADDRESS' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;

20       DEFINE ELEMENT                          ATMCTAct ;
     DESCRIPTION;
Air Terminal Movement Control Team Activity.
A code which identifies the ATMCT.
 ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '1' ,
          TYPE             'A' ,
          PICTURE          'A(01)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'CODE' ;
     CONTAINED:       IN  ExportAir ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;
```

```
21      DEFINE ELEMENT                          Action ;
      DESCRIPTION;
   Action.
   Used to identify what activity has taken place during the Update Process
   for the System Unique Tables.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CNTNR/FRT DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '8' ,
           TYPE             'A' ,
           PICTURE          'A(08)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      RANGE IS:       'Added' ,
                      'Deleted' ,
                      'Modified' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;

22      DEFINE ELEMENT                          ActlCst ;
      DESCRIPTION;
   Actual Cost.
   Identifies the actual cost (in dollar and cents) of the move.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '8' ,
           TYPE             'N' ,
           PICTURE          '9(08)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DOL-AMT' ;
      CONTAINED:       IN  FreightMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
23      DEFINE ELEMENT                          ActlLoadDte ;
    DESCRIPTION;
Actual Load Date.
The Julian date that the consignor loads and presents
necessary documentation to the carrier.
 ;
    KEYWORD IS:     'Freight' ,
                    'Data Model' ,
                    'LOB' ;
    SEE MEMO:
         Julian-Date-Edit-Check-Memo ;
    SOURCE IS:      'FREIGHT DATA MODEL' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '5' ,
         TYPE             'N' ,
         PICTURE          '9(05)' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'DATE' ,
         DUI              'JulianDte' ,
         FORMAT           'DATACHAIN' ;
    CONTAINED:       IN  FrtMovAsset ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB FREIGHT GROUP' ;

24      DEFINE ELEMENT                          ActlPcCnt ;
    DESCRIPTION;
Actual Piece Count.
Identifies the actual piece count associated with a shipment unit when
loaded onto or discharged from a conveyance.
 ;
    KEYWORD IS:     'Container' ,
                    'Data Model' ,
                    'LOB' ;
    SOURCE IS:      'CMM pg C-335' ,
                    'TM 38-LZ1-2-1-C' ,
                    'CONTAINER DATA MODEL' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '4' ,
         TYPE             'N' ,
         PICTURE          '9(04)' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'QUANTITY' ;
    CONTAINED:       IN  MEvent ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB CONTAINER GROUP' ;
```

```
25      DEFINE ELEMENT                          ActlPullDte ;
     SYNONYM IS:     Date-Departed-APOD ,
                     Departure-Date ;
     DESCRIPTION;
  Actual Pull Date.
  The Julian date that the carrier pulled the shipment from the
  consignor to commence onward movement to the consignee.

  It is also the Julian date that a parcal was turned over to UPS
  for delivery.
   ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Julian-Date-Edit-Check-Memo ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '5' ,
          TYPE             'N' ,
          PICTURE          '9(05)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'DATE' ,
          FORMAT           'DATACHAIN' ,
          DUI              'JulianDte' ;
     CONTAINED:       IN  FrtMovAsset ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOR FREIGHT GROUP' ;
```

```
26      DEFINE ELEMENT                          ActlPullTime ;
    DESCRIPTION;
Actual Pull Time.
The time in hours and minutes that an asset departed the consignor
location.
 ;
    KEYWORD IS:     'Freight' ,
                    'Data Model' ,
                    'LOB' ;
    SEE MEMO:
         Time-Edit-Check-Memo ;
    SOURCE IS:      'FREIGHT DATA MODEL' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '4' ,
         TYPE             'N' ,
         PICTURE          '9(04)' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'TIME' ,
         DUI              'Time24Hr' ;
    CONTAINED:       IN  FrtMovAsset ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB FREIGHT GROUP' ;

27      DEFINE ELEMENT                          ActlRelTime ;
    DESCRIPTION;
Actual Release Time.
The time in hours and minutes that an asset was released to the carrier
at the consignor location.
 ;
    KEYWORD IS:     'Freight' ,
                    'Data Model' ,
                    'LOB' ;
    SEE MEMO:
         Time-Edit-Check-Memo ;
    SOURCE IS:      'FREIGHT DATA MODEL' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '4' ,
         TYPE             'N' ,
         PICTURE          '9(04)' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'TIME' ,
         DUI              'Time24Hr' ;
    CONTAINED:       IN  FrtMovAsset ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB FREIGHT GROUP' ;
```

```
28      DEFINE ELEMENT                          ActlSpotDte ;
        SYNONYM IS:    Construct-Place-Date ;
        DESCRIPTION;
    Actual Spot Date.
    The Julian date that the carrier spotted/positioned a
    conveyance at the consignor location.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Julian-Date-Edit-Check-Memo ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '5' ,
             TYPE             'N' ,
             PICTURE          '9(05)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'DATE' ,
             DUI              'JulianDte' ,
             FORMAT           'DATACHAIN' ;
        CONTAINED:       IN  FrtMovAsset ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

29      DEFINE ELEMENT                          ActlSpotTime ;
        DESCRIPTION;
    Actual Spot Time.
    The time in hours and minutes that an asset was spotted at the
    consignor location.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Time-Edit-Check-Memo ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '4' ,
             TYPE             'N' ,
             PICTURE          '9(04)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'TIME' ,
             DUI              'Time24hr' ;
        CONTAINED:       IN  FrtMovAsset ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
30      DEFINE ELEMENT                          AirDim ;
        SYNONYM IS:     AIR-DMN-CD ;
        DESCRIPTION;
    Air Dimension Code.
    A code which relates dimensions of air shipment, pallets, and containers
    to dimensional restrictions of aircraft.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'CMM' ,
                        'CMM-DBMS' ;
        SOURCE IS:       FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE            'AN' ,
             PICTURE         'X(01)' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             USE             'CODE' ,
             CMM-DBMS-NME     'AIR-DMN-CD' ,
             PROJ-DED-NME     'AIR-DMN-CD' ;
        CONTAINED:       IN  ExportAir ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

31      DEFINE ELEMENT                          ArrDte ;
        DESCRIPTION;
    Arrival Date.
    The Julian date on which a conveyance arrives at a consignee stop point.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Julian-Date-Edit-Check-Memo ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '5' ,
             TYPE            'N' ,
             PICTURE         '9(05)' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             USE             'DATE' ,
             FORMAT          'DATACHAIN' ,
             DDI             'JulianDte' ;
        CONTAINED:       IN  VehStopPtAs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
32       DEFINE ELEMENT                          ArrTime ;
     DESCRIPTION;
Arrival Time.
The actual time that the assets were delivered to the consignee.
 ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Time-Edit-Check-Memo ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '4' ,
          TYPE             'N' ,
          PICTURE          '9(04)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'DATE' ;
     CONTAINED:        IN  STMRStop ;
     CONTAINED:        IN  VehStopPtAs ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;

33       DEFINE ELEMENT                          As-Sta-Dte ;
     DESCRIPTION;
Asset Status Date.
The 4-position Julian date on which the status of a particular
transportation asset is reported.
 ;
     KEYWORD IS:     'Freight' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
     SOURCE IS:      'TACCS-LOB FREIGHT DFD' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '4' ,
          TYPE             'N' ,
          PICTURE          '9(04)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'DATE' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;
```

```
34       DEFINE ELEMENT                          AsQty ;
     DESCRIPTION;
Asset Quantity.
Depicts the exact number of assets, by type, requested by a commitment.
 ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '2' ,
          TYPE             'N' ,
          PICTURE          '9(02)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'QUANTITY' ;
     CONTAINED:        IN  AssetRqmt ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;

35       DEFINE ELEMENT                          Assistance-Required-Other ;
     DESCRIPTION;
Assistance Required Other.
Textual entry indicating any other assistance required for a damaged or
deadlined container.
 ;
     KEYWORD IS:     'Container' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
     SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
     ATTRIBUTE IS:
          TYPE             'AN' ,
          FIELD-LENGTH     '35' ,
          PICTURE          'X(35)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'TEXT' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB CONTAINER GROUP' ;
```

```
36      DEFINE ELEMENT                    Assistance-Rqr-Carr-Maint-Team ;
      DESCRIPTION;
   Assistance Required, Carrier Maintenance Team.
   A code indicating whether or not carrier maintenance team assistance is
   needed for a damaged or deadlined container.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE              'A' ,
           FIELD-LENGTH       '1' ,
           PICTURE           'A(01)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'CODE' ;
      CODE:             'Y'
                         MEANS
                        'YES' ;
      CODE:             'N'
                         MEANS
                        'NO' ;
      RANGE IS:         'Y' ,
                        'N' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
37       DEFINE ELEMENT                        Asst-Rqr-Carr-Claims-Invest ;
     DESCRIPTION;
Assistance Required, Carrier Claims Investigation.
A code indicating whether or not a carrier claims investigation is
required for a damaged or deadlined container.
 ;
     KEYWORD IS:      'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
     SOURCE IS:       'TACCS-LOB CONTAINER DFD' ;
     ATTRIBUTE IS:
          TYPE              'A' ,
          FIELD-LENGTH       '1' ,
          PICTURE           'A(01)' ,
          SEC-CLASS         'UNCLASSIFIED' ,
          USE               'CODE' ;
     CODE:             'Y'
                        MEANS
                       'YES' ;
     CODE:             'N'
                        MEANS
                       'NO' ;
     RANGE IS:         'Y' ,
                       'N' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;

38       DEFINE ELEMENT                            Attn ;
     SYNONYM IS:      ATTN ;
     DESCRIPTION;
Attention Line
The office symbol of the POC at the Billing Fiscal Station Number,
the Ship-to-DODAAC, or the DODAAC-Current.
 ;
     KEYWORD IS:      'TMAS' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH       '20' ,
          TYPE              'AN' ,
          PICTURE           'X(20)' ,
          SEC-CLASS         'UNCLASSIFIED' ,
          FORMAT            'POST' ,
          USE               'ADDRESS' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
39       DEFINE ELEMENT                          AuthzdSpots ;
      DESCRIPTION;
   Authorized Spots.
   Identifies the number of assets available and reserved for a specific
   location on a daily basis.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE             'N' ,
           PICTURE          '9(03)' ,
           SEC-CLASS        'UNCLASSIFIED' .
           USE              'QUANTITY' ;
      CONTAINED:        IN  SpotLimit ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

40       DEFINE ELEMENT                          BAPO1st5 ;
      DESCRIPTION;
   Billing Army Post Office number or Zip Code, First Five Digits
   The first five digits of the APO number or Zip Code in the billing
   address of the B-Fiscal-Station number.
    ;
      KEYWORD IS:     'EURAAF' ,
                      'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           APO-1st-Five-Edit-Check-Memo ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           DUI              'APO1st5' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ;
      CONTAINED:        IN  BillingAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

41 DEFINE ELEMENT BAPOLst4 ;
DESCRIPTION;
Billing Army Post Office number or Zip Code, Last Four Digits
The last four digits in a 9-digit designator of the APO number or Zip Code in the billing address of the B-Fiscal-Station-Number.
;
KEYWORD IS: 'EURAAF' ,
'TMAS' ,
'Data Model' ,
'LOB' ;
SEE MEMO:
APO-Last-Four-Edit-Check-Memo ;
SOURCE IS: 'TMAS DATA MODEL' ;
ATTRIBUTE IS:
FIELD-LENGTH '4' ,
TYPE 'N' ,
PICTURE '9(04)' ,
DOI 'APOLst4' ,
SEC-CLASS 'UNCLASSIFIED' ,
USE 'ADDRESS' ;
CONTAINED: IN BillingAdrs ;
RESPONSIBLE PROBLEM DEFINER IS:
'TACCS-LOB TMAS GROUP' ;

42 DEFINE ELEMENT BASATel ;
DESCRIPTION;
BASA Telephone (Bahn Amlicher Selbst Anschluss) (railway official self connection)

The telephone number of the nearest station in the German railway system to the Ship-to-AAC.
;
KEYWORD IS: 'Freight' ,
'Container' ,
'TMAS' ,
'Data Model' ,
'LOB' ;
SOURCE IS: [illegible] DATA MODEL' ;
ATTRIBUTE IS:
FIELD-LENGTH '20' ,
TYPE 'AN' ,
PICTURE 'X(20)' ,
SEC-CLASS 'UNCLASSIFIED' ,
USE 'ADDRESS' ;
CONTAINED: IN CgoAddress ;
CONTAINED: IN FreightAdrs ;
RESPONSIBLE PROBLEM DEFINER IS:
'TACCS-LOB TMAS GROUP' ;

```
43       DEFINE ELEMENT                          BAttn ;
      DESCRIPTION;
   Billing Attention Line
   The office symbol of the POC at the Billing Fiscal Station Number,
   e.g. AEXYZ-TM.
    ;
      KEYWORD IS:      'EURAAF' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '20' ,
           TYPE             'AN' ,
           PICTURE          'X(20)' ,
           DUI              'Attn' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ;
      CONTAINED:        IN  BillingAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

44       DEFINE ELEMENT                          BBldgNo ;
      DESCRIPTION;
   Billing Civilian Building Number
   The building number (if applicable) of the Billing Fiscal Station
   Number used in the billing address.
    ;
      KEYWORD IS:      'EURAAF' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH     '10' ,
           PICTURE          'X(10)' ,
           DUI              'Bldg' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ;
      CONTAINED:        IN  BillingAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
45      DEFINE ELEMENT                          BCityRgn ;
    DESCRIPTION;
Billing City/Region
The in-the-clear Bundespost city/region associated with the billing
address of the Billing Fiscal Station Number, e.g. Oberursel/Taunus.
 ;
    KEYWORD IS:     'EURAAF' ,
                    'TMAS' ,
                    'Data Model' ,
                    'LOB' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '25' ,
         TYPE             'AN' ,
         PICTURE          'X(25)' ,
         DOI              'CityRgn' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'NAME' ;
    CONTAINED:       IN  BillingAdrs ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;

46      DEFINE ELEMENT                          BCntry ;
    DESCRIPTION;
Billing Country Code
An abbreviation of the country name in the billing address of the
Billing Fiscal Station Number.
 ;
    KEYWORD IS:     'EURAAF' ,
                    'TMAS' ,
                    'Data Model' ,
                    'LOB' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '2' ,
         TYPE             'A' ,
         PICTURE          'A(02)' ,
         DOI              'CntryCd' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'CODE' ;
    CONTAINED:       IN  BillingAdrs ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;
```

```
47       DEFINE ELEMENT                          BDteLstUpd ;
     DESCRIPTION;
   Billing Date Last Update
   The last date that the Billing Fiscal Station Number billing address
   was updated.
    ;
     KEYWORD IS:     'TMAS' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Julian-Date-Edit-Check-Memo ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '5' ,
          TYPE             'N' ,
          PICTURE          '9(05)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'DATE' ,
          DUI              'JulianDte' ,
          FORMAT           'DATACHAIN' ;
     CONTAINED:        IN  BillingAdrs ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;

48       DEFINE ELEMENT                          BFSN :
     DESCRIPTION;
   Billing Fiscal Station Number
   The fiscal station office number assigned to the billing activity
   supporting the DODAAC-Current.
    ;
     KEYWORD IS:     'EURAAF' ,
                     'TMAS' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '5' ,
          TYPE             'N' ,
          PICTURE          '9(05)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'CODE' ;
     CONTAINED:        IN  Activity ;
     CONTAINED:        IN  BillingAdrs ;
     IDENTIFIES:     BillingAdrs ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;
```

```
49       DEFINE ELEMENT                          BIIPcs ;
     DESCRIPTION;
Basic Issue Item Pieces.
Accessories and tools necessary to operate an end item.  The basic issue
items are identified on an Export Clearance Request for Military
Vehicles and Equipment (TVS).
 ;
     KEYWORD IS:      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
     SOURCE IS:       'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '5' ,
          TYPE             'AN' ,
          PICTURE          'X(05)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'QUANTITY' ;
     CONTAINED:         IN  ExportWater ;
     RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
50       DEFINE ELEMENT                          BMCTMthCd ;
     DESCRIPTION;
   Branch Movement Control Team Month Code.
   A code that indicates the month of the year. Used in a BMCT Reference
   System generated using DteRecCreat data element.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'A' ,
           PICTURE          'A(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'MthCd' ,
           USE              'CODE' ;
      CODE:           'A'
                       MEANS
                      'January' ;
      CODE:           'B'
                       MEANS
                      'February' ;
      CODE:           'C'
                       MEANS
                      'March' ;
      CODE:           'D'
                       MEANS
                      'April' ;
      CODE:           'E'
                       MEANS
                      'May' ;
      CODE:           'F'
                       MEANS
                      'June' ;
      CODE:           'G'
                       MEANS
                      'July' ;
      CODE:           'H'
                       MEANS
                      'August' ;
      CODE:           'I'
                       MEANS
                      'September' ;
      CODE:           'J'
                       MEANS
                      'October' ;
```

```
        CODE:           'K'
                         MEANS
                        'November' ;
        CODE:           'L'
                         MEANS
                        'December' ;
        CONTAINED:       IN  BMCTRefNo ;
        CONTAINED:       IN  FreightMov ;
        RANGE IS:       'A'
                         THROUGH 'L' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

51        DEFINE GROUP                          BMCTRefNo ;
        DESCRIPTION;
    Branch Movement Control Team Reference Number.
    A 7 position number assigned by a MCE (BMCT) to control, monitor and
    process movement requests for a shipment unit.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '7' ,
             TYPE             'AN' ,
             PICTURE          'X(07)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ID-NO' ,
             FORMAT           'DATACHAIN' ;
        CONSISTS OF:
             OriginBMCECd ,
             BMCTMthCd ,
             BMCTSerNo ;
        CONTAINED:       IN  FreightMov ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
52       DEFINE ELEMENT                          BMCTSerNo ;
      DESCRIPTION;
   Branch Movement Control Team Serial Numebr.
   The number assigned by an Origin BMCT to ensure unique identification of
   a particular BMCT Reference Number. These numbers are reused each month.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ,
           DUI              'SerNo' ;
      CONTAINED:        IN  BMCTRefNo ;
      CONTAINED:        IN  FreightMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

53       DEFINE ELEMENT                          BPostCd ;
      DESCRIPTION;
   Billing Postal Code
   The Bundespost Postal Code associated with the city in the billing
   address of the Billing Fiscal Station Number, e.g. 6900 Heidelberg 1.
   B-Post-Code is 6900.
    ;
      KEYWORD IS:     'EURAAF' ,
                      'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '6' ,
           TYPE             'N' ,
           PICTURE          '9(06)' ,
           DUI              'PostCd' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ;
      CONTAINED:        IN  BillingAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
54      DEFINE ELEMENT                          BStPOBox ;
    DESCRIPTION;
Billing Street Address or Post Office Box number.
The in-the-clear street or post office box address of the Billing
Fiscal Station Number used in the billing address, e.g.
Kaiserstrasse 52 or P.O. Box 1234.
 ;
    KEYWORD IS:     'EURAAF' ,
                    'TMAS' ,
                    'Data Model' ,
                    'LOB' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '25' ,
         TYPE             'AN' ,
         PICTURE          'X(25)' ,
         DUI              'StAdrs' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'ADDRESS' ;
    CONTAINED:       IN  BillingAdrs ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;

55      DEFINE ELEMENT                          BUDsg ;
    DESCRIPTION;
Billing Unit Designation
The in-the-clear name associated with the billing address of the
Billing Fiscal Station Number.
 ;
    KEYWORD IS:     'EURAAF' ,
                    'TMAS' ,
                    'Data Model' ,
                    'LOB' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         TYPE             'AN' ,
         FIELD-LENGTH     '35' ,
         PICTURE          'X(35)' ,
         DUI              'UDsg' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'NAME' ;
    CONTAINED:       IN  BillingAdrs ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;
```

```
56       DEFINE ELEMENT                          Bckld ;
     DESCRIPTION;
   Backload.
   Identifies an asset that has been authorized for use as a
   backload/backhaul in a Freight Record.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '1' ,
            TYPE             'A' ,
            PICTURE          'A(01)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ;
       CODE:           'Y'
                        MEANS
                       'Yes' ;
       CODE:           'Blank'
                        MEANS
                       'NO' ;
       CONTAINED:       IN  FreightMov ;
       RANGE IS:       'Y' ,
                       'Blank' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;

57       DEFINE ELEMENT                          BeamAssy ;
     DESCRIPTION;
   Beam Assembly.
   Identifies the number of beam assemblies inside a MILVAN.
    ;
       KEYWORD IS:     'Freight' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '2' ,
            TYPE             'N' ,
            PICTURE          '9(02)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'QUANTITY' ;
       CONTAINED:       IN  ExportWater ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
58       DEFINE ELEMENT                          Bldg ;
     DESCRIPTION;
Building
The building number associated with the billing, freight, or mailing
address.
 ;
     KEYWORD IS:     'TMAS' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '10' ,
          TYPE             'AN' ,
          PICTURE          'X(10)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          FORMAT           'ROOT' ,
          USE              'ADDRESS' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;
```

```
59       DEFINE ELEMENT                          CH-CD ;
      DESCRIPTION;
   Change Code.
   A code which identifies the add, change, or delete change required by
   CMM.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
       SOURCE IS:      'TACCS-LOB TMAS DFD' ;
       ATTRIBUTE IS:
            TYPE              'A' ,
            FIELD-LENGTH       '1' ,
            PICTURE           'A(01)' ,
            SEC-CLASS         'UNCLASSIFIED' ,
            USE               'CODE' ;
       CODE:           'A'
                        MEANS
                       'Add' ;
       CODE:           'C'
                        MEANS
                       'Change' ;
       CODE:           'D'
                        MEANS
                       'Delete' ;
       RANGE IS:       'A' ,
                       'C' ,
                       'D' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
60      DEFINE ELEMENT                          CMM-Change-Number ;
      DESCRIPTION;
   Change Number.
   A numeric designator given to each transaction for accountability and to
   ensure that transactions are processed in the proper sequence.
    ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '2' ,
           TYPE             'N' ,
           PICTURE          '9(02)' ,
           FORMAT           'ROOT' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'SYS-PAR' ,
           DEFAULT-VALUE     'Y' ,
           CMM-DBMS-NME     'CH-NO' ,
           PROJ-DED-NME     'CH-NO' ;
      CONTAINED:       IN  TMAS-System-Parameter-Record ;
      RANGE IS:       '01 thru 99' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
61      DEFINE ELEMENT                          CMM-Environment-Code ;
     DESCRIPTION;
Cargo Movement Module Environment Code.
A code to indicate if the system is operating in conjunction with CMM. A
"yes" code indicates TMAS will generate CMM update transaction. A "no"
code indicates CMM is not a part of the system.
 ;
    KEYWORD IS:     'TMAS' ,
                    'LOB' ,
                    'NOT IN DATA MODEL' ;
    SOURCE IS:      'TACCS-LOB TMAS DFD' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '1' ,
         TYPE             'A' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         PICTURE          'A(01)' ,
         FORMAT           'ROOT' ,
         USE              'SYS-PAR' ;
    CODE:           'Y'
                     MEANS
                    'Sys will generate CMM trns' ;
    CODE:           'N'
                     MEANS
                    'CMM not part of system' ;
    CONTAINED:       IN  TMAS-System-Parameter-Record ;
    RANGE IS:       'Y' ,
                    'N' ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;
```

```
62      DEFINE ELEMENT                          CMMEvntDte ;
    DESCRIPTION;
Cargo Movement Module Event Date.
A 3-position Julian date stored in the TACCS ISAM file prior to
transmitting to CMM. Normally derived from LOB element EvntDte.
 ;
    KEYWORD IS:     'Container' ,
                    'NOT IN DATA MODEL' ,
                    'LOB' ;
    SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '3' ,
         TYPE             'N' ,
         PICTURE          '9(03)' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         FORMAT           'DATACHAIN' ,
         USE              'DATE' ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB CONTAINER GROUP' ;

63      DEFINE ELEMENT                          CMMIndicrCd ;
    DESCRIPTION;
Cargo Movements Module Indicator Code
A code indicating whether or not the AACCurr is contained in the
CMM consignee address file.
 ;
    KEYWORD IS:     'TMAS' ,
                    'Data Model' ,
                    'LOB' ;
    SOURCE IS:      'TMAS DATA MODEL' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '1' ,
         TYPE             'A' ,
         PICTURE          'A(01)' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'CODE' ;
    CODE:           'Y'
                     MEANS
                    'Yes' ;
    CODE:           'N'
                     MEANS
                    'No' ;
    CONTAINED:       IN  Activity ;
    RANGE IS:       'Y' ,
                    'N' ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;
```

```
64      DEFINE ELEMENT                          CanREFAMNoncfm ;
    DESCRIPTION;
  Cancel REFAM.
  Cancelled, Returned for Another Mode, Non Confirmation.
  Identifies the status of a commitment in the freight record.
   ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'A' ,
           PICTURE          'A(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'C'
                       MEANS
                      'Cancel' ;
      CODE:           'R'
                       MEANS
                      'REFAM' ;
      CONTAINED:       IN  FreightMov ;
      RANGE IS:       'C' ,
                      'R' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

65      DEFINE ELEMENT                          CarrDescr ;
    DESCRIPTION;
  Carrier Description.
  Identifies the specific carrier types of service used to account
  for distribution of cargo in a theater.
   ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '25' ,
           TYPE             'AN' ,
           PICTURE          'X(25)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      CONTAINED:       IN  Carrier ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
66      DEFINE ELEMENT                          CarrNme ;
    SYNONYM IS:     CARR-NME-CD ,
                    Carrier-Category-Code ;
    DESCRIPTION;
ARA: US Army Logistics Center
     ATTN:  ATCL-SST
     Fort Lee, VA 23801
Carrier Name.
A code assigned to the specific carrier type service (e.g. Army,
Navy, Marines etc).  The codes are used to account for distribution
of cargo in the theater.
 ;
    KEYWORD IS:     'CMM' ,
                    'Freight' ,
                    'Data Model' ,
                    'LOB' ;
    SOURCE IS:      'TM 38-LZ1-2-1-C' ,
                    'FREIGHT DATA MODEL' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '5' ,
         TYPE             'A' ,
         PICTURE          'A(05)' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'CODE' ,
         PROJ-DED-NME     'CARR-NME-CD' ;
    CODE:           'COMML'
                     MEANS
                    'COMMERCIAL' ;
    CODE:           'OARMY'
                     MEANS
                    'ARMY' ;
    CODE:           'MARIN'
                     MEANS
                    'MARINES' ;
    CODE:           'ONAVY'
                     MEANS
                    'NAVY' ;
    CODE:           'OUSAF'
                     MEANS
                    'AIR FORCE' ;
    CODE:           'UPUDO'
                     MEANS
                    'UNIT PICKUP' ;
    CONTAINED:       IN  AirIdentNo ;
    CONTAINED:       IN  Carrier ;
    IDENTIFIES:     Carrier ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB FREIGHT GROUP' ;
```

```
67       DEFINE ELEMENT                          CgoDescr ;
     DESCRIPTION;
   Cargo Description.
   The description of the cargo to be shipped.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '50' ,
            TYPE             'AN' ,
            PICTURE          'X(50)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'TEXT' ;
       CONTAINED:        IN  ExportAir ;
       CONTAINED:        IN  VehStopPt ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
68      DEFINE ELEMENT                          ChCd ;
      DESCRIPTION;
   Change Code.
   A code used to report a change of conveyance, a mode change or a
   reconsignment at a consignee location.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'USAREUR Reg 55-355, App G' ,
                      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           FORMAT           'ROOT' ,
           DUI              'ChCd' ;
      CODE:           'M'
                       MEANS
                      'Transship, ModeChange' ;
      CODE:           'C'
                       MEANS
                      'Transship, ConveyCh w/o ModeCh' ;
      CODE:           'R'
                       MEANS
                      'Reconsignment' ;
      CONTAINED:       IN  ChangeType ;
      CONTAINED:       IN  VehStopPtAs ;
      IDENTIFIES:     ChangeType ;
      RANGE IS:       'M' ,
                      'C' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
69      DEFINE ELEMENT                          ChCdDescr ;
     DESCRIPTION;
Change Code Description.
A description of the change type codes used in freight
transactions.
 ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'FREIGHT DATA MODEL' ,
                     'USAREUR Reg 55-355, App G' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '50' ,
          TYPE             'AN' ,
          PICTURE          'X(50)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'TEXT' ;
     CONTAINED:       IN  ChangeType ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;

70      DEFINE ELEMENT                          ChDte ;
     DESCRIPTION;
Change Date.
The Julian date on which a change of conveyance, mode change or
reconsignment occured at a consignee location.
 ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Julian-Date-Edit-Check-Memo ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '5' ,
          TYPE             'N' ,
          PICTURE          '9(05)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          DUI              'JulianDte' ,
          USE              'DATE' ,
          FORMAT           'DATACHAIN' ;
     CONTAINED:       IN  VehStopPtAs ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;
```

```
71        DEFINE ELEMENT                          Chain-Tot ;
      DESCRIPTION;
   Chain Total.
   The total number of AF chains on-hand in an MCT area.
    ;
      KEYWORD IS:     'Freight' ,
                      'NOT IN DATA MODEL' ,
                      'LOB' ;
      SOURCE IS:      'TACCS-LOB DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

72        DEFINE ELEMENT                          ChainQty ;
      DESCRIPTION;
   Chain Quantity.
   Number of AF chains associated with a specific move.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE             'N' ,
           PICTURE          '9(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      CONTAINED:       IN  VehStopPt ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
73       DEFINE ELEMENT                          Chains ;
     DESCRIPTION;
   Chains.
   The total number of AF chains used with 463L pallets which are on-hand
   at an activity.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '4' ,
            TYPE             'N' ,
            PICTURE          '9(04)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'QUANTITY' ;
       CONTAINED:        IN  Pallet463L ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
74      DEFINE ELEMENT                          CityGpCd ;
     SYNONYM IS:     CITY-GP-CODE ,
                     CMM-CITY-CODE ;
     DESCRIPTION;
City Group Code
A code, assigned by the theater command, to a particular city
group within the theater.
 ;
     KEYWORD IS:     'Freight' ,
                     'CMM' ,
                     'CMM-DBMS' ,
                     'Container' ,
                     'TMAS' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Code-Tbl-Validation-Memo ;
     SOURCE IS:      'TM 38-LZ1-11, App.K' ,
                     'TMAS/CNTNR/FRT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH    '2' ,
          TYPE            'N' ,
          PICTURE         '9(02)' ,
          SEC-CLASS       'UNCLASSIFIED' ,
          USE             'CODE' ;
     CODE:           '01'
                      MEANS
                     'Augsburg Group' ;
     CODE:           '02'
                      MEANS
                     'Bad Kreuznach Group' ;
     CODE:           '03'
                      MEANS
                     'Bad Toelz Group' ;
     CODE:           '04'
                      MEANS
                     'Berchtesgaden Group' ;
     CODE:           '05'
                      MEANS
                     'Berlin Group' ;
     CODE:           '06'
                      MEANS
                     'Bitburg Group' ;
     CODE:           '07'
                      MEANS
                     'Reserved for future use' ;
     CODE:           '08'
                      MEANS
                     'Bonn Group' ;
```

```
CODE:       '09'
             MEANS
            'Bremen Group' ;
CODE:       '10'
             MEANS
            'Bremerhaven Group' ;
CODE:       '11'
             MEANS
            'Chiemsee Group' ;
CODE:       '12'
             MEANS
            'Hannover Group' ;
CODE:       '13'
             MEANS
            'Reserved for future use' ;
CODE:       '14'
             MEANS
            'Flensburg Group' ;
CODE:       '15'
             MEANS
            'Frankfurt Group' ;
CODE:       '16'
             MEANS
            'Fulda Group' ;
CODE:       '17'
             MEANS
            'Garmisch Group' ;
CODE:       '18'
             MEANS
            'Giessen Group' ;
CODE:       '19'
             MEANS
            'Hahn Group' ;
CODE:       '20'
             MEANS
            'Hamburg Group' ;
CODE:       '21'
             MEANS
            'Heilbronn Group' ;
CODE:       '22'
             MEANS
            'Hof Group' ;
CODE:       '23'
             MEANS
            'Idar Oberstein Group' ;
CODE:       '24'
             MEANS
            'Reserved for future use' ;
CODE:       '25'
```

```
                MEANS
               'Kaiserslautern Group' ;
CODE:          '26'
                MEANS
               'Karlsruhe Group' ;
CODE:          '27'
                MEANS
               'Kassel Group' ;
CODE:          '28'
                MEANS
               'Mannheim Group' ;
CODE:          '29'
                MEANS
               'Munich Group' ;
CODE:          '30'
                MEANS
               'Nuernberg Group' ;
CODE:          '31'
                MEANS
               'Pirmasens Groups' ;
CODE:          '32'
                MEANS
               'Regensburg Group' ;
CODE:          '33'
                MEANS
               'Schweinfurt Group' ;
CODE:          '34'
                MEANS
               'Mulheim Gp' ;
CODE:          '35'
                MEANS
               'Soest Group' ;
CODE:          '36'
                MEANS
               'Stuttgart Group' ;
CODE:          '37'
                MEANS
               'Todendorf Group' ;
CODE:          '38'
                MEANS
               'Ulm Group' ;
CODE:          '39'
                MEANS
               'Wuerzburg Group' ;
CODE:          '40'
                MEANS
               'Chievres AB Group (Belgium)' ;
CODE:          '41'
                MEANS
```

```
                    'Soesterberg Group(Netherlands)' ;
      CODE:         '42'
                     MEANS
                    'Casteau (Belgium)' ;
      CONTAINED:     IN  CgoAddress ;
      CONTAINED:     IN  City ;
      CONTAINED:     IN  CityGroup ;
      CONTAINED:     IN  FreightAdrs ;
      IDENTIFIES:   City ;
      IDENTIFIES:   CityGroup ;
      RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;

75      DEFINE ELEMENT                        CityGpNme ;
      DESCRIPTION;
   City Group Name.
   The Name of the City Group associated with the City Group Code.
    ;
      KEYWORD IS:   'CMM-DBMS' ,
                    'TMAS' ,
                    'Data Model' ,
                    'LOB' ;
      SOURCE IS:    'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH    '25' ,
           TYPE            'A' ,
           PICTURE         'A(25)' ,
           SEC-CLASS       'UNCLASSIFIED' ,
           USE             'NAME' ;
      CONTAINED:     IN  CityGroup ;
      RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;
```



```
76       DEFINE ELEMENT                          CityNme ;
     DESCRIPTION;
  City Name
  Identifies the name of the city associated with the City Group Code.
   ;
     KEYWORD IS:     'TMAS' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Code-Tbl-Validation-Memo ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '25' ,
          TYPE             'A' ,
          PICTURE          'A(25)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'NAME' ;
     CONTAINED:        IN  City ;
     IDENTIFIES:     City ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;

77       DEFINE ELEMENT                          CityRgn ;
     DESCRIPTION;
  City/Region
  The in-the-clear Bundespost city/region associated with the billing,
  freight, or mailing address.
   ;
     KEYWORD IS:     'TMAS' ,
                     'EURAAF' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '25' ,
          TYPE             'AN' ,
          PICTURE          'X(25)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'NAME' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;
```



```
78       DEFINE ELEMENT                          ClusterCd ;
        DESCRIPTION;
   Cluster Code.
   A code representing a central drop point for a cluster of units.
    ;
      KEYWORD IS:      'SDP' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           USE              'CODE' ,
           TYPE             'AN' ,
           PICTURE          'X(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      CONTAINED:       IN  FreightAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
79        DEFINE ELEMENT                        CmdtyCd ;
      DESCRIPTION;
Commodity Code.
This element is a code that identifies specific types of cargo within a
commodity category of material with similar characteristics.
 ;
      KEYWORD IS:      'Container' ,
                       'Freight' ,
                       'Data Model' ,
                       'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:       'MILSTAMP Para B-13' ,
                       'CNTNR/FRT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE             'AN' ,
           PICTURE          'X(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           FORMAT           'ROOT' ;
      CONTAINED:         IN  CntnrMov ;
      CONTAINED:         IN  Commodity ;
      CONTAINED:         IN  ExportAir ;
      CONTAINED:         IN  ExportWater ;
      CONTAINED:         IN  STMR ;
      CONTAINED:         IN  VehStopPt ;
      IDENTIFIES:      Commodity ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
80       DEFINE ELEMENT                          CmdtyCdDescr ;
      DESCRIPTION;
   Commodity Code Description.
   The description of a commodity code.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'MILSTAMP App B B-8' ,
                      'CNTNR/FRT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '20' ,
           TYPE             'AN' ,
           PICTURE          'X(20)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      CONTAINED:       IN  Commodity ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;

81       DEFINE ELEMENT                          CnsgnrAAC ;
      SYNONYM IS:     AAC-CNSGNR ;
      DESCRIPTION;
   Consignor Activity Address Code.
   The activity from which a shipment unit or container was shipped.
    ;
      KEYWORD IS:     'Container' ,
                      'CMM' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TM 38-LZ1-2-1-C' ,
                      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '6' ,
           TYPE             'AN' ,
           PICTURE          'X(06)' ,
           DUI              'AAC' ,
           CMM-DBMS-NME      'AAC-CR' ,
           PROJ-DED-NME      'ACTV-ADRS-CD-CNSGNR' ,
           USE              'CODE' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      CONTAINED:       IN  CntnrMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
82      DEFINE ELEMENT                          CntnDistrCd ;
      DESCRIPTION;
   Contents Distributing Code.
   A code which indicates whether the container contents are consigned to a
   single or multiple consignees, and various delivery conditions e.g.,
   multi-stop.  '
    ;
      KEYWORD IS:     'Freight' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           REGULATION       'DOD 4500.32R' ;
      CONTAINED:       IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;

83      DEFINE ELEMENT                          Cntnr-Deletion-Criteria ;
      SYNONYM IS:     x60DaDelProc ;
      DESCRIPTION;
   Container Deletion Criteria.
   This parameter determines the number of days that a forecasted container
   which did not arrive, will be retained in the database before it is
   deleted.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '2' ,
           TYPE             'N' ,
           PICTURE          '9(02)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DEFAULT-VALUE     '60' ,
           USE              'SYS-PAR' ;
      CONTAINED:       IN  System-Parameter-Record ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
84      DEFINE ELEMENT                          Cntnr-Deletion-Notification ;
        SYNONYM IS:    NtfyTMCADel ;
        DESCRIPTION;
   Container Deletion Notification.
   This parameter determines the numebr of days to wait for a reply from
   1st TMCA before deleting a container record that has been identified for
   deletion in the Delete 60 Day Old Container process.
    ;
        KEYWORD IS:    'Container' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
        SOURCE IS:     'TACCS-LOB CONTAINER DFD' ;
        ATTRIBUTE IS:
             FIELD-LENGTH    '1' ,
             TYPE            'N' ,
             PICTURE         '9(01)' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             DEFAULT-VALUE     '4' ,
             USE             'SYS-PAR' ;
        CONTAINED:       IN  System-Parameter-Record ;
        RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;

85      DEFINE ELEMENT                          Cntnr-History-Sel-Criteria ;
        SYNONYM IS:    SelCntnrHist ;
        DESCRIPTION;
   Container History Selection Criteria.
   This parameter determines the number of days a commitment is retained in
   the active file after it is completed and before it is sent to the
   Container History File.
    ;
        KEYWORD IS:    'Container' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
        SOURCE IS:     'TACCS-LOB CONTAINER DFD' ;
        ATTRIBUTE IS:
             FIELD-LENGTH    '2' ,
             TYPE            'N' ,
             PICTURE         '9(02)' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             DEFAULT-VALUE    '45' ,
             USE             'SYS-PAR' ;
        CONTAINED:       IN  System-Parameter-Record ;
        RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
86      DEFINE ELEMENT                          Cntnr-On-Hand-Over-X-Criteria ;
        SYNONYM IS:     CntnrOHDays ;
        DESCRIPTION;
    Container On Hand Over X Days Criteria.
    This parameter controls the number of days between arrival and discharge
    of a container before it is reflected on a report.
     ;
        KEYWORD IS:     'Container' ,
                        'LOB' ,
                        'NOT IN DATA MODEL' ;
        SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'N' ,
             PICTURE          '9(01)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             DEFAULT-VALUE     '5' ,
             USE              'SYS-PAR' ;
        CONTAINED:       IN  System-Parameter-Record ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;

87      DEFINE ELEMENT                          Cntnr-Origin-Code ;
        SYNONYM IS:     CntnrOrigCd ;
        DESCRIPTION;
    Container Origin Code.
    This parameter represents the Origin Code of the container section of
    the host movement control element.
     ;
        KEYWORD IS:     'Container' ,
                        'LOB' ,
                        'NOT IN DATA MODEL' ;
        SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '3' ,
             TYPE             'AN' ,
             PICTURE          'X(03)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             DUI              'CntnrOrigCd' ,
             USE              'SYS-PAR' ;
        CONTAINED:       IN  System-Parameter-Record ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
88        DEFINE ELEMENT                          CntnrDam ;
      DESCRIPTION;
   Container Damaged
   A code showing if a container was received in a damaged condition or
   was damaged while in the possession of the government.
    ;
      KEYWORD IS:      'Container' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CONTAINED:         IN  CntnrMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
89        DEFINE ELEMENT                          CntnrNo ;
      SYNONYM IS:     CNTNR-NO ,
                      SEAVAN-NO-4-8 ;
      DESCRIPTION;
    Container Number
    Identifies the commercial SEAVAN or military container/van being used
    to transport cargo by use of its permanently assigned number.
     ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           PROJ-DED-NME      'CNTNR-NO' ,
           USE              'ID-NO' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           CMM-DBMS-NME      'SEAVAN-NO-4-8' ;
      CONTAINED:        IN  CntnrDiscrp ;
      CONTAINED:        IN  CntnrMov ;
      CONTAINED:        IN  CntnrMovStp ;
      CONTAINED:        IN  CntnrRmrkLn ;
      CONTAINED:        IN  MEvent ;
      IDENTIFIES:     CntnrDiscrp ;
      IDENTIFIES:     CntnrMov ;
      IDENTIFIES:     CntnrMovStp ;
      IDENTIFIES:     CntnrRmrkLn ;
      IDENTIFIES:     MEvent ;
      RANGE IS:       '00001'
                       THROUGH '99999' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
90       DEFINE ELEMENT                          CntnrNoPrefix ;
      DESCRIPTION;
   Container Number Prefix
   Identifies the first 3 numbers of a commercial SEAVAN being used to
   transport cargo by use of its permanently assigned numbers.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE             'N' ,
           PICTURE          '9(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      CONTAINED:        IN  CntnrMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

91       DEFINE ELEMENT                          CntnrNoTlrNo ;
      DESCRIPTION;
   Container Number or Trailer Number.
   A specific number in a series assigned to an individual shipping
   container or equipment for the purpose of identification and control,
   i.e., MILVAN No, SEAVAN No, CONEX No, Pallet No, etc.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'AN' ,
           PICTURE          'X(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
92      DEFINE ELEMENT                          CntnrOwnAbbr ;
        SYNONYM IS:     CNTNR-OWN-ABB ,
                        Owner-Code ,
                        Van-Owner ;
        DESCRIPTION;
Container Owner Abbreviation.
A MILSTAMP abbreviation identifying the owner of a container
regardless of which ocean carrier is used.
 ;
        KEYWORD IS:     'CMM' ,
                        'Container' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        SOURCE IS:      'MILSTAMP Para B-46' ,
                        'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '4' ,
             TYPE             'AN' ,
             PICTURE          'X(04)' ,
             CMM-DBMS-NME     'CNTNR-OWN-ABB' ,
             PROJ-DED-NME     'CNTNR-OWNER-ABBR' ,
             REGULATION       'DOD 4500.32R' ,
             USE              'CODE' ,
             SEC-CLASS        'UNCLASSIFIED' ;
        CODE:           'ACFS'
                         MEANS
                        'Amercian Coastal Lines' ;
        CODE:           'ACSU'
                         MEANS
                        'Adriantic Container Service' ;
        CODE:           'ADCU'
                         MEANS
                        'Flexi-Van Leasing Inc' ;
        CODE:           'AEIL'
                         MEANS
                        'Farrell Lines Inc' ;
        CODE:           'AEIU'
                         MEANS
                        'Farrell Lines Inc' ;
        CODE:           'ALHT'
                         MEANS
                        'Alaska Hydro-Train Corp' ;
        CODE:           'AMAL'
                         MEANS
                        'American Marine Lines' ;
        CODE:           'APLS'
                         MEANS
```

```
                'American President Lines Inc' ;
CODE:           'ARMY'
                 MEANS
                'US Army' ;
CODE:           'BHCU'
                 MEANS
                'Bridge Head Container Service' ;
CODE:           'CATU'
                 MEANS
                'CATU Containers S.A.' ;
CODE:           'CCCU'
                 MEANS
                'Compass Container Corp' ;
CODE:           'CCSU'
                 MEANS
                'Society Location Container' ;
CODE:           'CENT'
                 MEANS
                'Central Gulf Lines Inc' ;
CODE:           'CLUU'
                 MEANS
                'Container Pool Inc' ;
CODE:           'CMLU'
                 MEANS
                'Farrell Lines Inc' ;
CODE:           'CONU'
                 MEANS
                'Contrans' ;
CODE:           'CTIU'
                 MEANS
                'CTI - Cntnr Transport Intl' ;
CODE:           'CTIZ'
                 MEANS
                'CTI - Cntnr Transport Intl' ;
CODE:           'DACP'
                 MEANS
                'American President Lines Inc' ;
CODE:           'DELT'
                 MEANS
                'Delta Steamship Lines Inc' ;
CODE:           'DVRU'
                 MEANS
                'Delman(Eur Box Ls by US Lines)' ;
CODE:           'EVIU'
                 MEANS
                'Flexi Van Leasing Inc' ;
CODE:           'EXPU'
                 MEANS
                'US Van Lines (Exper Van)' ;
```

```
CODE:       'FAAA'
             MEANS
            'Farrell Lines Inc' ;
CODE:       'FLOU'
             MEANS
            'Pulman-Trailmobile' ;
CODE:       'FOSS'
             MEANS
            'Foss Alaska' ;
CODE:       'FRLL'
             MEANS
            'Farrell Lines Inc' ;
CODE:       'FRLN'
             MEANS
            'Farrell Lines Inc' ;
CODE:       'GORU'
             MEANS
            'GOT Euffoni S.P.A.' ;
CODE:       'GRAU'
             MEANS
            'Graziosi' ;
CODE:       'ICEL'
             MEANS
            'Icelandic Steamship Co' ;
CODE:       'ICSU'
             MEANS
            'Integrated Cntnr Service Inc' ;
CODE:       'IEAU'
             MEANS
            'Intl Equip Association' ;
CODE:       'IKKU'
             MEANS
            'Itel Leasing Company' ;
CODE:       'ILIZ'
             MEANS
            'Compass Container Co' ;
CODE:       'INBU'
             MEANS
            'Interpool' ;
CODE:       'IOLU'
             MEANS
            'Inter Ocean Leasing' ;
CODE:       'JSCU'
             MEANS
            'Container Pool Inc' ;
CODE:       'KNUT'
             MEANS
            'Knutsen Lines Inc' ;
CODE:       'LCSU'
```

```
                MEANS
               'NIC Leasing' ;
CODE:          'LYKU'
                MEANS
               'Lyke Bros Steamship Co' ;
CODE:          'MATS'
                MEANS
               'Matson Navigation Cc' ;
CODE:          'MATU'
                MEANS
               'Matson Navigation Co' ;
CODE:          'MSCL'
                MEANS
               'MSC Leased/Con SEAVAN/MILVAN' ;
CODE:          'NICA'
                MEANS
               'Lyons Transport' ;
CODE:          'NICB'
                MEANS
               'NIC Leasing' ;
CODE:          'NICC'
                MEANS
               'NIC Leasing' ;
CODE:          'NICU'
                MEANS
               'NIC Leasing' ;
CODE:          'NKKA'
                MEANS
               'Pajushina' ;
CODE:          'NLSU'
                MEANS
               'Nautilus Steamship Company' ;
CODE:          'PFEL'
                MEANS
               'Farrell Lines Inc' ;
CODE:          'PGIU'
                MEANS
               'Delta Stamship Lines Inc' ;
CODE:          'PGLU'
                MEANS
               'Prudential Lines Inc' ;
CODE:          'PLIU'
                MEANS
               'Delta Steamship Lines Inc' ;
CODE:          'PRCH'
                MEANS
               'Traco Container Leasing' ;
CODE:          'PRMU'
                MEANS
```

```
                'Puerto Rico Maritime Ship Auth' ;
CODE:           'PRMZ'
                 MEANS
                'Puerto Rico Maritime Ship Auth' ;
CODE:           'REAZ'
                 MEANS
                'Trailer Marine Transport Corp' ;
CODE:           'RLMZ'
                 MEANS
                'Realco' ;
CODE:           'RPMZ'
                 MEANS
                'Puerto Rico Maritime Trns Corp' ;
CODE:           'RTMZ'
                 MEANS
                'Trailer Marine Transport Corp' ;
CODE:           'RTOZ'
                 MEANS
                'Totem Ocean Trailer Exp' ;
CODE:           'SCPU'
                 MEANS
                'S.C. Pacific Ltd' ;
CODE:           'SCXU'
                 MEANS
                'Sea Container' ;
CODE:           'SEAU'
                 MEANS
                'Sea-Land Service' ;
CODE:           'SLCU'
                 MEANS
                'Society Location Container' ;
CODE:           'SSIU'
                 MEANS
                'Itel Container Intl B.V.' ;
CODE:           'SUCU'
                 MEANS
                'Columbus Lines' ;
CODE:           'STLU'
                 MEANS
                'Seatrain Lines Inc' ;
CODE:           'TOLU'
                 MEANS
                'Trans Ocean Leasing Corp' ;
CODE:           'TOLZ'
                 MEANS
                'Trans Ocean Leasing Corp' ;
CODE:           'TROU'
                 MEANS
                'Traco Container Leasing' ;
```

```
CODE:           'TMTZ'
                 MEANS
                'Tailer Marine Transport Corp' ;
CODE:           'TTOZ'
                 MEANS
                'Totem Ocean Trailer Exp' ;
CODE:           'UFCU'
                 MEANS
                'Evergreen Line' ;
CODE:           'USAA'
                 MEANS
                'US Army MILVAN (Ammo)' ;
CODE:           'USAG'
                 MEANS
                'US Army MILVAN (General)' ;
CODE:           'USAR'
                 MEANS
                'US Army MILVAN (Refer)' ;
CODE:           'USLU'
                 MEANS
                'United States Lines Inc' ;
CODE:           'XCLU'
                 MEANS
                'Cross-Country Leasing Std' ;
CODE:           'XTRU'
                 MEANS
                'XTRA Inc' ;
CODE:           'XXXX'
                 MEANS
                'Own Code Not Marked on SEAVAN' ;
CONTAINED:       IN  CntnrDiscrp ;
CONTAINED:       IN  CntnrMov ;
CONTAINED:       IN  CntnrMovStp ;
CONTAINED:       IN  CntnrOwner ;
CONTAINED:       IN  CntnrRmrkLn ;
CONTAINED:       IN  ExportWater ;
CONTAINED:       IN  MEvent ;
IDENTIFIES:     CntnrDiscrp ;
IDENTIFIES:     CntnrMov ;
IDENTIFIES:     CntnrMovStp ;
IDENTIFIES:     CntnrOwner ;
IDENTIFIES:     CntnrRmrkLn ;
IDENTIFIES:     MEvent ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB CONTAINER GROUP' ;
```

```
93        DEFINE ELEMENT                          CntnrOwnNme ;
       DESCRIPTION;
    Container Owner Name.
    In the clear name of the container owner.
     ;
        KEYWORD IS:     'Container' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             TYPE             'AN' ,
             FIELD-LENGTH      '25' ,
             PICTURE          'X(25)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'NAME' ;
        CONTAINED:        IN  CntnrOwner ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
94      DEFINE ELEMENT                          CntnrOwnTyCd ;
      SYNONYM IS:     Container-Owner-Type-Code ;
      DESCRIPTION;
   Container Owner Type Code.
   A code which identifies the container as commercial or government owned.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'C'
                       MEANS
                      'Commercial' ;
      CODE:           'M'
                       MEANS
                      'Military' ;
      CONTAINED:       IN  CntnrOwnTy ;
      CONTAINED:       IN  CntnrOwner ;
      IDENTIFIES:     CntnrOwnTy ;
      RANGE IS:       'C' ,
                      'M' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
95        DEFINE ELEMENT                          CntnrOwnTyDescr ;
          DESCRIPTION;
     Container Owner Type Description.
     The description of the Container Owner Type Code.
      ;
          KEYWORD IS:     'Container' ,
                          'Data Model' ,
                          'LOB' ;
          SOURCE IS:      'CONTAINER DATA MODEL' ;
          ATTRIBUTE IS:
               TYPE            'AN' ,
               FIELD-LENGTH     '25' ,
               PICTURE         'X(25)' ,
               SEC-CLASS       'UNCLASSIFIED' ,
               USE             'TEXT' ;
          CONTAINED:       IN  CntnrOwnTy ;
          RESPONSIBLE PROBLEM DEFINER IS:
                          'TACCS-LOB CONTAINER GROUP' ;

96        DEFINE ELEMENT                          CntnrRmrk ;
          DESCRIPTION;
     Container Remarks Line.
     A unique line of information not provided for in the other container
     subsystem elements that is deemed essential for clarification.
      ;
          KEYWORD IS:     'Container' ,
                          'Data Model' ,
                          'LOB' ;
          SEE MEMO:
               CntnrRmrk-Examples-Memo ;
          SOURCE IS:      'CONTAINER DATA MODEL' ;
          ATTRIBUTE IS:
               FIELD-LENGTH     '50' ,
               TYPE            'AN' ,
               PICTURE         'X(50)' ,
               SEC-CLASS       'UNCLASSIFIED' ,
               USE             'TEXT' ;
          CONTAINED:       IN  CntnrRmrkLn ;
          RESPONSIBLE PROBLEM DEFINER IS:
                          'TACCS-LOB CONTAINER GROUP' ;
```

```
97      DEFINE ELEMENT                          CntnrRmrkLnNo ;
        SYNONYM IS:     Container-Remark-Line-Number ;
        DESCRIPTION;
    Container Remark Line Number.
    The unique number assigned to a container remark line.  Provides
    for specific identification of the line in a particular entity.
     ;
        KEYWORD IS:     'Container' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '2' ,
             TYPE             'N' ,
             PICTURE          '9(02)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ID-NO' ;
        CONTAINED:       IN  CntnrRmrkLn ;
        IDENTIFIES:     CntnrRmrkLn ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;

98      DEFINE ELEMENT                          CntnrSz ;
        SYNONYM IS:     CNTNR-SIZE ,
                        Container-Size ;
        DESCRIPTION;
    Identifies the length in feet (size), as defined by American National
    Standards Institute and current rate guide, of a container used for
    transportation of cargo in the Defense Transportation System (DTS).
     ;
        KEYWORD IS:     'Container' ,
                        'CMM' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        SOURCE IS:      'TM 38-LZ1-2-1-C' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '2' ,
             TYPE             'N' ,
             PICTURE          '9(02)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'MEASURE' ;
        CONTAINED:       IN  CntnrMov ;
        CONTAINED:       IN  CntnrSize ;
        CONTAINED:       IN  ExportWater ;
        IDENTIFIES:     CntnrSize ;
```



```
99       DEFINE ELEMENT                          CntnrSzDescr ;
       DESCRIPTION;
   A description of the container size.
    ;
       KEYWORD IS:     'Container' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'TM 38-LZ1-2-1-C' ,
                       'CONTAINER DATA MODEL' ,
                       'CMM pg C-487' ;
       ATTRIBUTE IS:
            TYPE             'AN' ,
            FIELD-LENGTH      '25' ,
            PICTURE          'X(25)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'TEXT' ;
       CONTAINED:        IN  CntnrSize ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;

100      DEFINE GROUP                            CntnrTCN ;
       SYNONYM IS:     TCN-MOV-NO ;
       DESCRIPTION;
   Container Transportation Control Number (TCN).
   A number assigned to control a van throughout the transportation
   cycle within the defense transportation system.
    ;
       KEYWORD IS:     'Container' ,
                       'CMM' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH      '17' ,
            TYPE             'AN' ,
            PICTURE          'X(17)' ,
            DUI              'TCN' ,
            CMM-DBMS-NME      'MOV-NO-TCN' ,
            PROJ-DED-NME      'TCN-MOV-NO' ,
            REGULATION       'DOD 4500.43R' ,
            USE              'ID-NO' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            FORMAT           'DATACHAIN' ;
       CONTAINED:        IN  CntnrMov ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```



```
101      DEFINE ELEMENT                          CntnrTyCd ;
       SYNONYM IS:     Type-of-SEAVAN ;
       DESCRIPTION;
   Container Type Code.
   A code that identifies the type of commercial or government-owned or
   leased shipping container (SEAVAN) being used in shipment of cargo.
    ;
       KEYWORD IS:      'Container' ,
                        'Data Model' ,
                        'LOB' ;
       SOURCE IS:       'CMM pg C-487' ,
                        'TM 38-LZ1-2-1-C' ,
                        'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '1' ,
            TYPE             'AN' ,
            PICTURE          'X(01)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ;
       CODE:            '2'
                         MEANS
                        'Dry Cargo' ;
       CODE:            '3'
                         MEANS
                        'Platform or Flatbed' ;
       CODE:            '4'
                         MEANS
                        'Open Top' ;
       CODE:            '5'
                         MEANS
                        'Refrigerated' ;
       CODE:            '6'
                         MEANS
                        'Top Filling' ;
       CODE:            '7'
                         MEANS
                        'Insulated' ;
       CODE:            '8'
                         MEANS
                        'Open Framer or Rack' ;
       CODE:            '9'
                         MEANS
                        'Tank Type' ;
       CODE:            'X'
                         MEANS
                        'Special/Experimental' ;
       CONTAINED:        IN  CntnrMov ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
102      DEFINE ELEMENT                          CntryCd ;
       DESCRIPTION;
   Country Code
   A code which identifies a country.
    ;
       KEYWORD IS:     'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            Code-Tbl-Validation-Memo ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '2' ,
            TYPE             'A' ,
            PICTURE          'A(02)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            FORMAT           'ROOT' ,
            USE              'CODE' ;
       CODE:            'AF'
                         MEANS
                        'Afghanistan' ;
       CODE:            'AC'
                         MEANS
                        'Algeria' ;
       CODE:            'AN'
                         MEANS
                        'Andorra' ;
       CODE:            'AR'
                         MEANS
                        'Argentina' ;
       CODE:            'AT'
                         MEANS
                        'Australia' ;
       CODE:            'AU'
                         MEANS
                        'Austria' ;
       CODE:            'BF'
                         MEANS
                        'Bahamas' ;
       CODE:            'BA'
                         MEANS
                        'Bahrain' ;
       CODE:            'BB'
                         MEANS
                        'Barbados' ;
       CODE:            'BE'
                         MEANS
                        'Belgium' ;
       CODE:            'BT'
```

```
                    MEANS
                   'Bhutan' ;
CODE:              'BL'
                    MEANS
                   'Bolivia' ;
CODE:              'BC'
                    MEANS
                   'Botswana' ;
CODE:              'BR'
                    MEANS
                   'Brazil' ;
CODE:              'BX'
                    MEANS
                   'Brunei' ;
CODE:              'BM'
                    MEANS
                   'Burma' ;
CODE:              'BY'
                    MEANS
                   'Burundi' ;
CODE:              'CM'
                    MEANS
                   'Cameroon' ;
CODE:              'CN'
                    MEANS
                   'Canada' ;
CODE:              'CT'
                    MEANS
                   'Central African Rep' ;
CODE:              'CD'
                    MEANS
                   'Chad' ;
CODE:              'CI'
                    MEANS
                   'Chile' ;
CODE:              'TW'
                    MEANS
                   'China (Taipei)' ;
CODE:              'CO'
                    MEANS
                   'Colombia' ;
CODE:              'CF'
                    MEANS
                   'Congo (Brazza.)' ;
CODE:              'CS'
                    MEANS
                   'Costa Rica' ;
CODE:              'CU'
                    MEANS
```

```
                'Cuba' ;
CODE:           'CY'
                 MEANS
                'Cyprus' ;
CODE:           'DA'
                 MEANS
                'Dahomey' ;
CODE:           'DE'
                 MEANS
                'Denmark' ;
CODE:           'DR'
                 MEANS
                'Dominican Republic' ;
CODE:           'EC'
                 MEANS
                'Ecuador' ;
CODE:           'EG'
                 MEANS
                'Egypt' ;
CODE:           'ES'
                 MEANS
                'El Salvador' ;
CODE:           'EK'
                 MEANS
                'Equatorial Guinea' ;
CODE:           'ET'
                 MEANS
                'Ethiopia' ;
CODE:           'FI'
                 MEANS
                'Finland' ;
CODE:           'FR'
                 MEANS
                'France' ;
CODE:           'GB'
                 MEANS
                'Gabon' ;
CODE:           'GA'
                 MEANS
                'Gambia' ;
CODE:           'GY'
                 MEANS
                'Germany (Bonn)' ;
CODE:           'GH'
                 MEANS
                'Ghana' ;
CODE:           'GR'
                 MEANS
                'Greece' ;
```

```
CODE:          'GT'
                MEANS
               'Guatemala' ;
CODE:          'GV'
                MEANS
               'Guinea' ;
CODE:          'BG'
                MEANS
               'Guyana' ;
CODE:          'HA'
                MEANS
               'Haiti' ;
CODE:          'HO'
                MEANS
               'Honduras' ;
CODE:          'IL'
                MEANS
               'Iceland' ;
CODE:          'IN'
                MEANS
               'India' ;
CODE:          'IC'
                MEANS
               'Indochina' ;
CODE:          'ID'
                MEANS
               'Indonesia' ;
CODE:          'IR'
                MEANS
               'Iran' ;
CODE:          'IQ'
                MEANS
               'Iraq' ;
CODE:          'EI'
                MEANS
               'Ireland' ;
CODE:          'IS'
                MEANS
               'Israel' ;
CODE:          'IT'
                MEANS
               'Italy' ;
CODE:          'IV'
                MEANS
               'Ivory Coast' ;
CODE:          'JM'
                MEANS
               'Jamaica' ;
CODE:          'JA'
```

```
                MEANS
               'Japan' ;
CODE:          'JO'
                MEANS
               'Jordan' ;
CODE:          'KE'
                MEANS
               'Kenya' ;
CODE:          'CB'
                MEANS
               'Khmer Republic' ;
CODE:          'KS'
                MEANS
               'Korea (Seoul)' ;
CODE:          'KU'
                MEANS
               'Kuwait' ;
CODE:          'LA'
                MEANS
               'Laos' ;
CODE:          'LE'
                MEANS
               'Lebanon' ;
CODE:          'LT'
                MEANS
               'Lesotho' ;
CODE:          'LI'
                MEANS
               'Liberia' ;
CODE:          'LY'
                MEANS
               'Libya' ;
CODE:          'LS'
                MEANS
               'Liechtenstein' ;
CODE:          'LX'
                MEANS
               'Luxembourg' ;
CODE:          'MA'
                MEANS
               'Malagasy Rep.' ;
CODE:          'MI'
                MEANS
               'Malawi' ;
CODE:          'MF'
                MEANS
               'Malaysia' ;
CODE:          'NV'
                MEANS
```

```
                'Maldive Islands' ;
CODE:           'RM'
                 MEANS
                'Mali' ;
CODE:           'MT'
                 MEANS
                'Malta' ;
CODE:           'MR'
                 MEANS
                'Mauritania' ;
CODE:           'MP'
                 MEANS
                'Mauritius' ;
CODE:           'MX'
                 MEANS
                'Mexico' ;
CODE:           'MN'
                 MEANS
                'Monaco' ;
CODE:           'MO'
                 MEANS
                'Morocco' ;
CODE:           'NP'
                 MEANS
                'Nepal' ;
CODE:           'NE'
                 MEANS
                'Netherlands' ;
CODE:           'NZ'
                 MEANS
                'New Zealand' ;
CODE:           'NU'
                 MEANS
                'Nicaragua' ;
CODE:           'NR'
                 MEANS
                'Niger' ;
CODE:           'NI'
                 MEANS
                'Nigeria' ;
CODE:           'NO'
                 MEANS
                'Norway' ;
CODE:           'MU'
                 MEANS
                'Oman' ;
CODE:           'PK'
                 MEANS
                'Pakistan' ;
```

```
CODE:       'PN'
             MEANS
            'Panama' ;
CODE:       'PA'
             MEANS
            'Paraguay' ;
CODE:       'PE'
             MEANS
            'Peru' ;
CODE:       'PI'
             MEANS
            'Philippines' ;
CODE:       'PT'
             MEANS
            'Portugal' ;
CODE:       'QA'
             MEANS
            'Qatar' ;
CODE:       'RW'
             MEANS
            'Rwanda' ;
CODE:       'SM'
             MEANS
            'San Marino' ;
CODE:       'SR'
             MEANS
            'Saudi Arabia' ;
CODE:       'SI'
             MEANS
            'Saudi Arabian National Guard' ;
CODE:       'SK'
             MEANS
            'Senegal' ;
CODE:       'SL'
             MEANS
            'Sierra Leone' ;
CODE:       'SN'
             MEANS
            'Singapore' ;
CODE:       'SO'
             MEANS
            'Somalia' ;
CODE:       'UA'
             MEANS
            'South Africa' ;
CODE:       'YS'
             MEANS
            'Southern Yemen' ;
CODE:       'SP'
```

```
                    MEANS
                   'Spain' ;
CODE:              'CE'
                    MEANS
                   'Sri Lanka (Ceylon)' ;
CODE:              'SU'
                    MEANS
                   'Sudan' ;
CODE:              'WZ'
                    MEANS
                   'Swaziland' ;
CODE:              'SW'
                    MEANS
                   'Sweden' ;
CODE:              'SZ'
                    MEANS
                   'Switzerland' ;
CODE:              'SY'
                    MEANS
                   'Syria' ;
CODE:              'TZ'
                    MEANS
                   'Tanzania' ;
CODE:              'TH'
                    MEANS
                   'Thailand' ;
CODE:              'TO'
                    MEANS
                   'Togo' ;
CODE:              'TN'
                    MEANS
                   'Tonga' ;
CODE:              'TD'
                    MEANS
                   'Trinidad-Tobago' ;
CODE:              'TU'
                    MEANS
                   'Tunisia' ;
CODE:              'TK'
                    MEANS
                   'Turkey' ;
CODE:              'UG'
                    MEANS
                   'Uganda' ;
CODE:              'TC'
                    MEANS
                   'United Arab Emirates' ;
CODE:              'UK'
                    MEANS
```

```
                'United Kingdom' ;
CODE:           'UV'
                 MEANS
                'Upper Volta' ;
CODE:           'UY'
                 MEANS
                'Uruguay' ;
CODE:           'VE'
                 MEANS
                'Venezuela' ;
CODE:           'VS'
                 MEANS
                'Vietnam (Saigon)' ;
CODE:           'WS'
                 MEANS
                'Western Samoa' ;
CODE:           'YE'
                 MEANS
                'Yemen' ;
CODE:           'YU'
                 MEANS
                'Yugoslavia' ;
CODE:           'ZA'
                 MEANS
                'Zambia' ;
CODE:           'CX'
                 MEANS
                'Zaire(formerly Congo-Kinshasa)' ;
CONTAINED:       IN  Country ;
IDENTIFIES:     Country ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB TMAS GROUP' ;
```

```
103      DEFINE ELEMENT                          CntryCdDescr ;
        DESCRIPTION;
   Country Code Description
   Identifies the name of the country associated with the Country-Code.
    ;
      KEYWORD IS:     'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '25' ,
           TYPE             'A' ,
           PICTURE          'A(25)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' :
      CONTAINED:        IN  Country ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;

104      DEFINE ELEMENT                          ComlCarrNme ;
        DESCRIPTION;
   Commercial Carrier Name.
   The name of the commerical carrier used to transport the shipment.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '25' ,
           TYPE             'AN' ,
           PICTURE          'X(25)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'NAME' ;
      CONTAINED:        IN  FreightMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
105      DEFINE ELEMENT                          ComlConNo ;
      DESCRIPTION;
   Commercial Control Number.
   The number on a controlled serialized, document used as the authority
   to move a shipment.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '6' ,
           TYPE             'AN' ,
           PICTURE          'X(06)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      CONTAINED:       IN  FreightMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

106      DEFINE ELEMENT                          ComlCst ;
      DESCRIPTION;
   Commercial Cost.
   The estimated cost to accomplish a move via a commercial mode.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DOL-AMT' ;
      CONTAINED:       IN  FreightMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
107      DEFINE ELEMENT                          Commitment-Print-Flag ;
         SYNONYM IS:     PrintComt ;
         DESCRIPTION;
    Commitment Print Flag.
    This parameter controls the printing of a commitment whicle performing
    various freight functions.
     ;
        KEYWORD IS:      'Freight' ,
                         'LOB' ,
                         'NOT IN DATA MODEL' ;
        SOURCE IS:       'TACCS-LOB CONTAINER DFD' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'A' ,
             PICTURE          'A(01)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             DEFAULT-VALUE      'N' ,
             USE              'SYS-PAR' ;
        CODE:            'Y'
                          MEANS
                         'Yes, print commitment' ;
        CODE:            'N'
                          MEANS
                         'No, do not print commitment' ;
        CONTAINED:        IN  System-Parameter-Record ;
        RANGE IS:        'Y' ,
                         'N' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB CONTAINER GROUP' ;
```

```
108      DEFINE ELEMENT                          CompGp ;
      DESCRIPTION;
   Compatability Group.
   A code which identifies the cargo characteristics by type for the
   purpose of determining which groups may be stored or transported
   together.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
109      DEFINE ELEMENT                          Consignee ;
         SYNONYM IS:     Previous-Shipment-Consignee ;
         DESCRIPTION;
    Consignee.
    The receiving agency, unit, depot, or person to whom a shipment unit is
    addressed or consigned (USAREUR Reg 55-355).
     ;
         KEYWORD IS:     'Freight' ,
                         'Container' ,
                         'Data Model' .
                         'LOB' ;
         SOURCE IS:      'CNTNR/FRT DATA MODEL' ,
                         'USAREUR Reg 55-355' ;
         ATTRIBUTE IS:
              FIELD-LENGTH     '6' ,
              TYPE             'AN' ,
              PICTURE          'X(06)' ,
              DUI              'AAC' ,
              CMM-DBMS-NME      'AAC-CN' ,
              PROJ-DED-NME      'ACTV-ADRS-CD-CNSGNE' ,
              USE              'CODE' ,
              SEC-CLASS        'UNCLASSIFIED' ;
         CONTAINED:       IN  CntnrDiscrp ;
         CONTAINED:       IN  CntnrMovStp ;
         CONTAINED:       IN  CntnrRmrkLn ;
         CONTAINED:       IN  ExportAir ;
         CONTAINED:       IN  ExportWater ;
         CONTAINED:       IN  MEvent ;
         CONTAINED:       IN  Pallet463L ;
         CONTAINED:       IN  VehStopPt ;
         IDENTIFIES:     CntnrDiscrp ;
         IDENTIFIES:     CntnrMovStp ;
         IDENTIFIES:     CntnrRmrkLn ;
         IDENTIFIES:     MEvent ;
         IDENTIFIES:     Pallet463L ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
110      DEFINE ELEMENT                          Consignor ;
      DESCRIPTION;
   Consignor.
   The Activity Address Code of the activity originating a shipment.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '6' ,
           TYPE             'AN' ,
           PICTURE          'X(06)' ,
           DUI              'AAC' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CONTAINED:        IN  ExportAir ;
      CONTAINED:        IN  ExportWater ;
      CONTAINED:        IN  FreightMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

111      DEFINE ELEMENT                          ContrEnd ;
      DESCRIPTION;
   Contract End Date
   The end date used to control commmercial DODAAC requests.
    ;
      KEYWORD IS:     'EURAAF' ,
                      'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           DUI              'JulianDte' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:        IN  Activity ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
112      DEFINE ELEMENT                          ContrNo ;
       DESCRIPTION;
    Contract Number
    Contract number is required to justify a 1st TMCA request for a
    DODAAC assignment to a civilian commercial organization which is
    under contract to the US Government and authorized logistic support
    from the US Army.
     ;
       KEYWORD IS:     'EURAAF' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '20' ,
            TYPE             'AN' ,
            PICTURE          'X(20)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ID-NO' ;
       CONTAINED:        IN  Activity ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

113      DEFINE ELEMENT                          ContrStart ;
       DESCRIPTION;
    Contract Start Date
    The start date used to control commercial DODAAC requests.
     ;
       KEYWORD IS:     'EURAAF' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '5' ,
            TYPE             'N' ,
            PICTURE          '9(05)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'DATE' ,
            DUI              'JulianDte' ,
            FORMAT           'DATACHAIN' ;
       CONTAINED:        IN  Activity ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
114      DEFINE ELEMENT                        CstFvrblCd ;
     DESCRIPTION;
   Cost Favorable Code.
   A code which identifies the selected mode according to cost for each
   shipment.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'N' ,
           PICTURE          '9(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           '1'
                       MEANS
                      'Cost Favorable (Lowest)' ;
      CODE:           '2'
                       MEANS
                      'Next Highest Cost' ;
      CODE:           '3'
                       MEANS
                      'Highest Cost' ;
      CONTAINED:       IN  CostFavor ;
      CONTAINED:       IN  FreightMov ;
      IDENTIFIES:     CostFavor ;
      RANGE IS:       '1' ,
                      '2' ,
                      '3' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
115      DEFINE ELEMENT                          CstFvrblCdDescr ;
         SYNONYM IS:    Cost-Favorable-Code-Desc ;
         DESCRIPTION;
    An in-the-clear identification of all cost favorable codes.
     ;
         KEYWORD IS:     'Freight' ,
                         'Data Model' ,
                         'LOB' ;
         SOURCE IS:      'FREIGHT DATA MODEL' ;
         ATTRIBUTE IS:
              FIELD-LENGTH     '30' ,
              TYPE             'AN' ,
              PICTURE          'X(30)' ,
              SEC-CLASS        'UNCLASSIFIED' ,
              USE              'TEXT' ;
         CONTAINED:        IN  CostFavor ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB FREIGHT GROUP' ;

116      DEFINE ELEMENT                          Cu ;
         DESCRIPTION;
    Cube.
    This element identifies the amount of cube for a comitment in cubic
    feet.
     ;
         KEYWORD IS:     'Freight' ,
                         'Data Model' ,
                         'LOB' ;
         SOURCE IS:      'FREIGHT DATA MODEL' ;
         ATTRIBUTE IS:
              TYPE             'N' ,
              FIELD-LENGTH     '5' ,
              PICTURE          '9(05)' ,
              SEC-CLASS        'UNCLASSIFIED' ,
              USE              'MEASURE' ;
         CONTAINED:        IN  ExportAir ;
         CONTAINED:        IN  ExportWater ;
         CONTAINED:        IN  VehStopPt ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB FREIGHT GROUP' ;
```

```
117      DEFINE ELEMENT                          CuOnePc ;
      DESCRIPTION;
   Cube of One Piece.
   The cube of one piece with these dimensions.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'MEASURE' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

118      DEFINE ELEMENT                          CuThisLotNo ;
      DESCRIPTION;
   Cube This Lot Number.
   A measure of the total cube per lot number in cubic feet of ammunition
   or explosives.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'MEASURE' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
119      DEFINE ELEMENT                          Current-Container-Location ;
      DESCRIPTION;
   Current Container Location.
   A free text description of the current location of a damaged or
   deadlined container.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '35' ,
           PICTURE           'X(35)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'TEXT' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

120      DEFINE ELEMENT                          DB-Name ;
      DESCRIPTION;
   Database Name.
   The name of the TACCS database which is being accessed by the history
   processes.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '9' ,
           PICTURE           'X(09)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'DESCRIPTION' ;
      RANGE IS:       'Container' ,
                      'Freight' ,
                      'Unit Move' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
121      DEFINE ELEMENT                          DDActlSptDte ;
      DESCRIPTION;
   Delayed Delivery Actual Spot Date.
   The Julian date on which a container arrives at a consignee after being
   in a delayed delivery status.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           DUI              'JulianDte' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:       IN  CntnrMovStp ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

122      DEFINE ELEMENT                          DDCarrPOCNotif ;
      DESCRIPTION;
   Delayed Delivery Carrier Contact Name Notified Start.
   The in the clear name of the carriers' Point of Contact (POC) that
   was notified of the delayed delivery request.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH     '25' ,
           PICTURE          'X(25)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'NAME' ;
      CONTAINED:       IN  CntnrMovStp ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
123      DEFINE ELEMENT                          DDCarrPOCNotifRel ;
     DESCRIPTION;
   Delayed Delivery Date Carrier Contact Name Notified Release.
   The in the clear name of the carrier's point of contact (POC) that
   was notified to release a container that was in a delayed delivery
   (DD) status.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '25' ,
           PICTURE           'X(25)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'NAME' ;
      CONTAINED:        IN  CntnrMovStp ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

124      DEFINE ELEMENT                          DDCnsgnPOCNotif ;
     DESCRIPTION;
   Delayed Delivery Consignee Contact Name Notified Start.
   The in the clear name of the consignee's point of contact (POC) that
   was notified that a container was approved for delayed delivery (DD).
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '25' ,
           PICTURE           'X(25)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'NAME' ;
      CONTAINED:        IN  CntnrMovStp ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
125      DEFINE ELEMENT                          DDDteCarrNotif ;
      DESCRIPTION;
   Delayed Delivery Date Carrier Notified Start.
   The Julian date that the carrier was notified to place a container
   into a delayed delivery (DD) status.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'N' ,
           FIELD-LENGTH       '5' ,
           PICTURE           '9(05)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'DATE' ,
           DUI               'JulianDte' ,
           FORMAT            'DATACHAIN' ;
      CONTAINED:         IN  CntnrMovStp ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

126      DEFINE ELEMENT                          DDDteCnsgnNotif ;
      DESCRIPTION;
   Delayed Delivery Date Consignee Notified Start
   The Julian date that the consignee was notified that a container was
   placed in a delayed delivery (DD) status.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'N' ,
           FIELD-LENGTH       '5' ,
           PICTURE           '9(05)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'DATE' ,
           DUI               'JulianDte' ,
           FORMAT            'DATACHAIN' ;
      CONTAINED:         IN  CntnrMovStp ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
127      DEFINE ELEMENT                          DDDteCnsgnReqRelDte ;
     DESCRIPTION;
  Delayed Delivery Date Consignee Requested Release.
  The Julian date the consignee requested that a container be released
  from a delayed delivery (DD) status and delivered to his location.
   ;
     KEYWORD IS:     'Container' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Julian-Date-Edit-Check-Memo ;
     SOURCE IS:      'CONTAINER DATA MODEL' ;
     ATTRIBUTE IS:
          TYPE              'N' ,
          FIELD-LENGTH       '5' ,
          PICTURE           '9(05)' ,
          SEC-CLASS         'UNCLASSIFIED' ,
          USE               'DATE' ,
          DUI               'JulianDte' ,
          FORMAT            'DATACHAIN' ;
     CONTAINED:        IN  CntnrMovStp ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB CONTAINER GROUP' ;

128      DEFINE ELEMENT                          DDDteRel ;
     DESCRIPTION;
  Delayed Delivery Date of Release.
  The Julian date that a container was released from the delayed
  delivery (DD) status.
   ;
     KEYWORD IS:     'Container' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Julian-Date-Edit-Check-Memo ;
     SOURCE IS:      'CONTAINER DATA MODEL' ;
     ATTRIBUTE IS:
          TYPE              'N' ,
          FIELD-LENGTH       '5' ,
          PICTURE           '9(05)' ,
          SEC-CLASS         'UNCLASSIFIED' ,
          USE               'DATE' ,
          DUI               'JulianDte' ,
          FORMAT            'DATACHAIN' ;
     CONTAINED:        IN  CntnrMovStp ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB CONTAINER GROUP' ;
```

```
129      DEFINE ELEMENT                          DDLoc ;
       DESCRIPTION;
   Delayed Delivery Location.
   The location of a container in a delayed delivery status.
    ;
       KEYWORD IS:     'Container' ,
                       'LOB' ,
                       'Data Model' ;
       SOURCE IS:      'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '25' ,
            TYPE             'AN' ,
            PICTURE          'X(25)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'TEXT' ;
       CONTAINED:       IN  CntnrMovStp ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
130     DEFINE ELEMENT                          DDNHostCd ;
        SYNONYM IS:     DDN/MINET-Host-Code ;
        DESCRIPTION;
    Defense Data Network/Movement Information Network Host Code.
    A code used for identification of the DDN/MINET Host.  Made up of
    username and hostname in the form username@hostname.  The @ is not
    included in the 12-character limitation.  May be less than 12
    characters.
     ;
        KEYWORD IS:     'Freight' ,
                        'Container' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'NIC 50006' ,
                        'TMAS/CNTNR/FRT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '12' ,
             TYPE             'AN' ,
             PICTURE          'X(12)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'CODE' ;
        CODE:           'Hostname LON'
                         MEANS
                        'Eastcote, England' ;
        CODE:           'Hostname OBL'
                         MEANS
                        'Oberursel, Germany' ;
        CODE:           'Hostname CPO'
                         MEANS
                        'Capodichino, Italy' ;
        CONTAINED:       IN  Activity ;
        CONTAINED:       IN  CgoActivity ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
131     DEFINE ELEMENT                          DDNUserId ;
        SYNONYM IS:     DDN/MINET-User-ID ;
        DESCRIPTION;
   Defense Data Network/Movement Information Network User Identification.
   The identification code assigned to the DODAAC-Current which authorizes
   access to the DDN/MINET system.
    ;
       KEYWORD IS:      'Freight' ,
                        'Container' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
       SOURCE IS:       'TMAS/CNTNR/FRT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '12' ,
            TYPE             'AN' ,
            PICTURE          'X(12)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ID-NO' ;
       CONTAINED:        IN  Activity ;
       CONTAINED:        IN  CgoActivity ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;

132     DEFINE ELEMENT                          DDPostDte ;
        DESCRIPTION;
   Delayed Delivery Post Date.
   The data (system-generated) that a delayed delivery is initially posted
   to the database.
    ;
       KEYWORD IS:      'Container' ,
                        'Data Model' ,
                        'LOB' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       SOURCE IS:       'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            TYPE             'N' ,
            FIELD-LENGTH     '5' ,
            PICTURE          '9(05)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'DATE' ,
            DUI              'JulianDte' ,
            DUI-2            'DteCurr' ,
            FORMAT           'DATACHAIN' ;
       CONTAINED:        IN  CntnrMovStp ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
133      DEFINE ELEMENT                          DIC ;
        DESCRIPTION;
    Document Identifier Code.
    A military code which identifies a particular type of transaction within
    logistic systems.
     ;
        KEYWORD IS:     'Freight' ,
                        'CMM' ,
                        'CMM-DBMS' ,
                        'LOB' ,
                        'NOT IN DATA MODEL' ;
        SOURCE IS:      'DOD 4500.32R, App B-1-2' ,
                        'TM 38-LZ1-11' ;
        ATTRIBUTE IS:
             TYPE              'AN' ,
             FIELD-LENGTH       '3' ,
             PICTURE           'X(03)' ,
             SEC-CLASS         'UNCLASSIFIED' ,
             USE               'CODE' ,
             PROJ-DED-NME       'DIC' ,
             CMM-DBMS-NME       'DIC' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
134      DEFINE ELEMENT                          DLCd ;
      DESCRIPTION;
   Deadline Code.
   A code identifying the cause of deadline for a specific conveyance.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE             'AN' ,
           PICTURE          'X(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'OBF'
                       MEANS
                      'Bent Frame' ;
      CODE:           'ODB'
                       MEANS
                      'Defective Brakes' ;
      CODE:           'ODL'
                       MEANS
                      'Defective Lights' ;
      CODE:           'DLG'
                       MEANS
                      'Defective Landing Gear' ;
      CODE:           'OFD'
                       MEANS
                      'Floorboard Damage' ;
      CODE:           'OFT'
                       MEANS
                      'Flat Tire' ;
      CODE:           'OTH'
                       MEANS
                      'Other Unspecified' ;
      CODE:           'SBD'
                       MEANS
                      'Sideboard Damaged' ;
      CODE:           'SBM'
                       MEANS
                      'Sideboard Missing' ;
      CODE:           'OTM'
                       MEANS
                      'Tire Missing' ;
      CODE:           'TPM'
                       MEANS
```

```
                    'Tarps Missing' ;
        CODE:       'TPT'
                     MEANS
                    'Tarp Missing' ;
        CONTAINED:   IN  Deadline ;
        IDENTIFIES:  Deadline ;
        RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB FREIGHT GROUP' ;

135     DEFINE ELEMENT                      DLCdDescr ;
        DESCRIPTION;
    Deadline Code Description.
    An in-the-clear identification of all Deadline Codes.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH    '20' ,
             TYPE            'AN' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             USE             'TEXT' ,
             PICTURE         'X(20)' ;
        CONTAINED:      IN  Deadline ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

136     DEFINE ELEMENT                      DODIC ;
        DESCRIPTION;
    DOD Identification Code.
    A code assigned to an item of supply in Federal Supply Groups FSG-13,
    Ammunition and Explosives and FSG-14, Guided Missiles.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH    '4' ,
             TYPE            'AN' ,
             PICTURE         'X(04)' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             USE             'CODE' ;
        CONTAINED:      IN  ExportWater ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
137      DEFINE ELEMENT                          DSSALOCCd ;
      DESCRIPTION;
   Direct Supply Support/Air Line of Communication Code.
   A code assigned to an activity to indicate whether
   it is or is not an authorized DSS or ALOC customer.
    ;
      KEYWORD IS:      'Freight' ,
                       'Container' ,
                       'SDP' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:       'TMAS/CNTNR/FRT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'N' ,
           PICTURE          '9(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:            '7'
                        MEANS
                       'DSS unit served by NCAD' ;
      CODE:            '8'
                        MEANS
                       'ALOC unit served by NCAD' ;
      CODE:            '9'
                        MEANS
                       'NonDSSALOC unit served by NCAD' ;
      CONTAINED:        IN  Activity ;
      CONTAINED:        IN  CgoActivity ;
      CONTAINED:        IN  DSSALOC ;
      IDENTIFIES:      DSSALOC ;
      RANGE IS:        '7' ,
                       '8' ,
                       '9' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
138      DEFINE ELEMENT                          DSSALOCCdDescr ;
     DESCRIPTION;
  Direct Supply Support/Air Line of Communication Code Description.
  Description of DSS/ALOC Code values.
   ;
     KEYWORD IS:     'TMAS' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '60' ,
          TYPE             'AN' ,
          PICTURE          'X(60)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'TEXT' ;
     CONTAINED:       IN  DSSALOC ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;

139      DEFINE ELEMENT                          DTG ;
     DESCRIPTION;
  Date Time Group.

  A 9 digit field consisting of the Julian date and the time on a 24-hour
  clock, e.g., 1600 hours, 22 April 1987 is expressed as 871121600.
  Format is YYDDDHHHH.
   ;
     KEYWORD IS:     'Freight' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
     SEE MEMO:
          Date-Time-Gp-Edit-Check-Memo ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '09' ,
          TYPE             'AN' ,
          PICTURE          'X(09)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'DATE' ,
          FORMAT           'DATACHAIN' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;
```

```
140      DEFINE ELEMENT                    DTG-Damage/Deadline-Occurred ;
    DESCRIPTION;
  Date TIME GROUP Damage or Deadline Occurred.
  The date time group that the damage to or deadline of a container
  occurred.
   ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE            'N' ,
           FIELD-LENGTH     '9' ,
           PICTURE         '9(09)' ,
           SEC-CLASS       'UNCLASSIFIED' ,
           USE             'DATA' ,
           FORMAT          'DATACHAIN' ,
           DUI             'DTG' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

141      DEFINE ELEMENT                    DTGATMCTFwdExprtClnc ;
      DESCRIPTION;
  Date Time Group ATMCT Forwarded Export Clearance.
  The date time group that the ATMCT passed a request for an export
  shipment to the aerial port clearance authority.
   ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Date-Time-Gp-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '9' ,
           TYPE            'AN' ,
           PICTURE         'X(09)' ,
           SEC-CLASS       'UNCLASSIFIED' ,
           USE             'DATE' ,
           DUI             'DTG' ,
           FORMAT          'DATACHAIN' ;
      CONTAINED:       IN  ExportAir ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```


```
142      DEFINE ELEMENT                          DTGATMCTRecExprtClnc ;
     DESCRIPTION;
  Date Time Group ATMCT Received Export Clearance.
  Date time group ATMCT received export clearance from the aerial port
  clearance authority.
   ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Date-Time-Gp-Edit-Check-Memo ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '9' ,
          TYPE             'AN' ,
          PICTURE          'X(09)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'DATE' ,
          DUI              'DTG' ,
          FORMAT           'DATACHAIN' ;
     CONTAINED:       IN  ExportAir ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;


143      DEFINE ELEMENT                          DTGATMCTRecExprtReqClnc ;
     DESCRIPTION;
  Date Time Group ATMCT Received Export Request For Clearance.
  The date time group received the export clearance request from the
  requesting movements control element.
   ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Date-Time-Gp-Edit-Check-Memo ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '9' ,
          TYPE             'AN' ,
          PICTURE          'X(09)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'DATE' ,
          DUI              'DTG' ,
          FORMAT           'DATACHAIN' ;
     CONTAINED:       IN  ExportAir ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;
```

```
144      DEFINE ELEMENT                          DTGComtFwd ;
      DESCRIPTION;
   Date Time Group Commitment Forwarded.
   Date time group the movement control element forwarded the commitment
   to the carrier and the destination MCT.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Date-Time-Gp-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '9' ,
           TYPE             'AN' ,
           PICTURE          'X(09)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'DTG' ,
           USE              'DATE' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:       IN  FreightMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

145      DEFINE ELEMENT                          DTGExprtClncRecFrPrt ;
      DESCRIPTION;
   Date Time Group Export Clearance Received From Port.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Date-Time-Gp-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '9' ,
           TYPE             'AN' ,
           PICTURE          'X(09)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           DUI              'DTG' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:       IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

AD-A190 395 FUNCTIONAL DESCRIPTION FOR THE DEPARTMENT OF THE ARMY 7/10
MOVEMENTS MANAGEMEN..(U) INTERNATIONAL BUSINESS
SERVICES INC PRINCE GEORGE VA DEFENSE S.. W ANCKAITIS
UNCLASSIFIED 31 DEC 87 DSDPG-375-049-87-3-VOL-3 F/G 12/7 NL

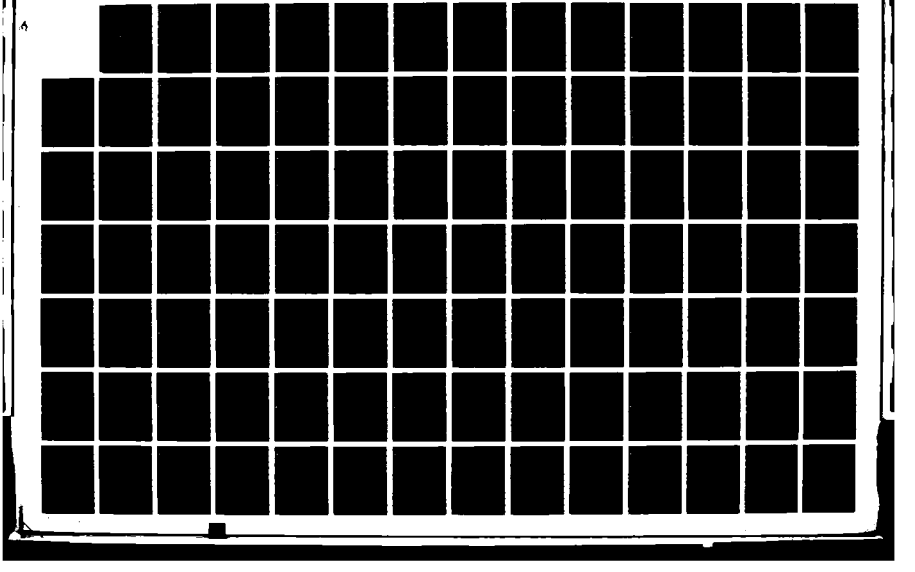

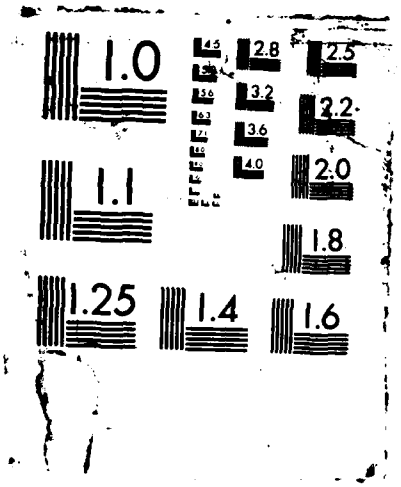
1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0

```
146     DEFINE ELEMENT                          DTGExprtClncReqFwd ;
      DESCRIPTION;
   Date Time Group Export Clearance Request Forwarded.
   Date time group the ATMCT forwards the approved request for export
   clearance to the requesting movements control element.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Date-Time-Gp-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '9' ,
           TYPE             'AN' ,
           PICTURE          'X(09)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           DUI              'DTG' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:       IN  ExportAir ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

147     DEFINE ELEMENT                          DTGExprtClncReqFwdACA ;
      DESCRIPTION;
   Date Time Group Export Clearance Forwarded to Air Clearance Authority.
   The date time group that the request for an export clearance control
   number was sent to the air clearance authority (ACA).
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Date-Time-Gp-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '9' ,
           TYPE             'AN' ,
           PICTURE          'X(09)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           DUI              'DTG' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:       IN  ExportAir ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
148      DEFINE ELEMENT                          DTGExprtClncReqRec ;
      DESCRIPTION;
   Date Time Group Export Clearance Request Received.
   The date time group that the movement control element (i.e. MCT)
   received the request for an export clearance requirement.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Date-Time-Gp-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '9' ,
           TYPE             'AN' ,
           PICTURE          'X(09)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           DUI              'DTG' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:       IN  ExportAir ;
      CONTAINED:       IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
149      DEFINE ELEMENT                          DTGMCTFwdExprtClnc ;
     DESCRIPTION;
Date Time Group MCT Forwarded Export Clearance Request.
The date time group that the movement control element forwarded the
request for export clearance to the ATMCT.
 ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Date-Time-Gp-Edit-Check-Memo ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '9' ,
          TYPE             'AN' ,
          PICTURE          'X(09)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'DATE' ,
          DUI              'DTG' ,
          FORMAT           'DATACHAIN' ;
     CONTAINED:        IN  ExportAir ;
     CONTAINED:        IN  ExportWater ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;

150      DEFINE ELEMENT                          DTGMarCredFwd ;
     DESCRIPTION;
Date Time Group March Credit Forwarded.
This data element is the date time group the march credit
(approval number) was sent to the requestor.
 ;
     KEYWORD IS:     'Freight' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
     SEE MEMO:
          Date-Time-Gp-Edit-Check-Memo ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '9' ,
          TYPE             'AN' ,
          PICTURE          'X(09)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'DATE' ,
          DUI              'DTG' ,
          FORMAT           'DATACHAIN' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;
```

```
151      DEFINE ELEMENT                          DTGMovBidFwd ;
      DESCRIPTION;
   Date Time Group Movement Bid Forwarded.
   This element is the date time group a movement bid was set to the
   approving authority.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SEE MEMO:
           Date-Time-Gp-Edit-Check-Memo ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '9' ,
           TYPE             'AN' ,
           PICTURE          'X(09)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           DUI              'DTG' ,
           FORMAT           'DATACHAIN' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

152      DEFINE ELEMENT                          DTGMovBidRec ;
      DESCRIPTION;
   Date Time Group Movement Bid Received.
   This element is the date time group that the movement bid was
   received by the MCT from the requestor.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SEE MEMO:
           Date-Time-Gp-Edit-Check-Memo ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '9' ,
           TYPE             'AN' ,
           PICTURE          'X(09)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           DUI              'DTG' ,
           FORMAT           'DATACHAIN' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
153      DEFINE ELEMENT                          Damaged/Deadlined-Remarks ;
      DESCRIPTION;
   Damaged/Deadlined Remarks.
   Any additional remarks concerning a damaged or deadlined container.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH      '150' ,
           PICTURE          'X(150)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

154      DEFINE ELEMENT                          Day-of-Yr ;
      DESCRIPTION;
   Day of Year.
   The numbered day of the year.
    ;
      KEYWORD IS:     'LOB' ,
                      'Container' ,
                      'Freight' ,
                      'TMAS' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB DFD' ;
      ATTRIBUTE IS:
           FORMAT           'ROOT' ,
           PROJ-DED-NME      'DAY-OF-YR' ,
           USE              'DATE' ,
           TYPE             'N' ,
           FIELD-LENGTH      '3' ,
           PICTURE          'X(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      CONTAINED:        IN  DteCurr ;
      CONTAINED:        IN  JulianDte ;
      RANGE IS:       '1'
                       THROUGH '366' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB WORK GROUPS' ;
```

```
155      DEFINE ELEMENT                          DelFlag ;
     DESCRIPTION;
   Delete Flag.
   A flag which indicates whether or not a record is a candidate for
   deletion.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'FLAG' ;
      CONTAINED:       IN  CntnrMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

156      DEFINE ELEMENT                          Description-of-Damage ;
      DESCRIPTION;
   Description of Damage.
   A narrative description of the damage done to a damaged or deadlined
   container.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH     '150' ,
           PICTURE          'X(150)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
157      DEFINE ELEMENT                          DestMCEPrefix ;
       DESCRIPTION;
   Destination Movement Control Element Prefix.
   A code assigned to identify the MCT which currently services
   the consignee.
    ;
       KEYWORD IS:      'Freight' ,
                        'Container' ,
                        'Data Model' ,
                        'LOB' ;
       SOURCE IS:       'CNTNR/FRT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '1' ,
            TYPE             'AN' ,
            PICTURE          'X(01)' ,
            DUI              'MCEPrefix' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ;
       CONTAINED:        IN  CntnrMovStp ;
       CONTAINED:        IN  Movement-Number ;
       CONTAINED:        IN  STMRStop ;
       CONTAINED:        IN  VehStopPt ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;

158      DEFINE ELEMENT                          DestMCESuffix ;
       DESCRIPTION;
   Destination Movement Control Element Suffix.
   A code assigned to identify the BMCT which currently services
   the consignee.
    ;
       KEYWORD IS:      'Data Model' ,
                        'LOB' ,
                        'Container' ;
       SOURCE IS:       'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            TYPE             'AN' ,
            FIELD-LENGTH     '1' ,
            PICTURE          'X(01)' ,
            DUI              'MCESuffix' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ;
       CONTAINED:        IN  CntnrMovStp ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
159      DEFINE ELEMENT                          DestRhd ;
      DESCRIPTION;
   Destination Railhead.
   The name of the railhead at the destination off-load site.
    ;
      KEYWORD IS:     'Freight' ,
                      'NOT IN DATA MODEL' ,
                      'LOB' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '50' ,
           TYPE             'AN' ,
           PICTURE          'X(50)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

160      DEFINE ELEMENT                          Device-Tot ;
      DESCRIPTION;
   Device Total.
   The total number of AF turn-buckle devices on-hand in an MCT area.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB DFD' ;
      ATTRIBUTE IS:
           TYPE             'N' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ,
           FIELD-LENGTH      '4' ,
           PICTURE          '9(04)' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
161     DEFINE ELEMENT                          DeviceQty ;
      DESCRIPTION;
   Device Quantity.
   Number of AF turn-buckle devices associated with a specific move.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE             'N' ,
           PICTURE          '9(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      CONTAINED:       IN  VehStopPt ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

162     DEFINE ELEMENT                          Devices ;
      DESCRIPTION;
   Devices.
   The total number of AF turn buckle devices used with 463L pallets which
   are on-hand at an activity.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE             'N' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ,
           FIELD-LENGTH     '4' ,
           PICTURE          '9(04)' ;
      CONTAINED:       IN  Pallet463L ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
163       DEFINE ELEMENT                          DiscrpCd ;
      SYNONYM IS:     DISCRP-CD ;
      DESCRIPTION;
   Discrepancy Code.
   A code used to report types of discrepancies (damages) to cargo and
   the conditions under which the damage occurred.
    ;
       KEYWORD IS:      'Freight' ,
                        'Container' ,
                        'CMM' ,
                        'Data Model' ,
                        'LOB' ;
       SEE MEMO:
            Code-Tbl-Validation-Memo ;
       SOURCE IS:       'TM 38-LZ1-2-1-C' ,
                        'AR 55-38' ,
                        'TM 38-LZ1-11, A-4' ,
                        'CNTNR/FRT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '2' ,
            TYPE            'AN' ,
            PICTURE         'X(02)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'CODE' ,
            CMM-DBMS-NME     'DISCRP-CD' ,
            PROJ-DED-NME     'DISCRP-CD' ;
       CODE:            'A3'
                         MEANS
                        'Astray - Incomplete Marking' ;
       CODE:            'A4'
                         MEANS
                        'Astray - Illegible Marking ' ;
       CODE:            'AA'
                         MEANS
                        'Astray - Unknown' ;
       CODE:            'SL'
                         MEANS
                        'Shortage - Leakage/Spoilage' ;
       CODE:            'S5'
                         MEANS
                        'Shortage - Improper Docu' ;
       CODE:            'ST'
                         MEANS
                        'Shortage - Theft' ;
       CODE:            'SP'
                         MEANS
                        'Shortage - Pilferage' ;
       CODE:            'SI'
                         MEANS
```

```
                'Shortage - Status W Cargo' ;
CODE:           'SK'
                 MEANS
                'Shortage - Improper Loading' ;
CODE:           'SS'
                 MEANS
                'Shortage - Unknown' ;
CODE:           'DF'
                 MEANS
                'Damage - Fire' ;
CODE:           'DK'
                 MEANS
                'Damage - Improper Loading' ;
CODE:           'D6'
                 MEANS
                'Damage - MHE' ;
CODE:           'D1'
                 MEANS
                'Damage - Marine Casualty' ;
CODE:           'DG'
                 MEANS
                'Damage - Spoilage' ;
CODE:           'DQ'
                 MEANS
                'Damage - Rough Handling' ;
CODE:           'D2'
                 MEANS
                'Damage - Stevedoring' ;
CODE:           'DE'
                 MEANS
                'Damage - Water' ;
CODE:           'DW'
                 MEANS
                'Damage - Wreck' ;
CODE:           'DV'
                 MEANS
                'Damage - Vandalism' ;
CODE:           'DZ'
                 MEANS
                'Damage - Concealed' ;
CODE:           'DD'
                 MEANS
                'Damage - Unknown' ;
CODE:           'XB'
                 MEANS
                'Other - Broken, etc, Seals' ;
CODE:           'XC'
                 MEANS
                'Other - Agreements/Reg not Obs' ;
```

```
CODE:           'XH'
                 MEANS
                'Other - Excess Transit Time' ;
CODE:           'X3'
                 MEANS
                'Other - Incomplete Marking' ;
CODE:           'X4'
                 MEANS
                'Other - Illegible Marking' ;
CODE:           'XJ'
                 MEANS
                'Other - Improper Carr Hdlg' ;
CODE:           'XK'
                 MEANS
                'Other - Improper Loading' ;
CODE:           'XM'
                 MEANS
                'Other - Improper Marking' ;
CODE:           'XN'
                 MEANS
                'Other - Misconsignment' ;
CODE:           'XR'
                 MEANS
                'Other - Agreements/Reg not Obs' ;
CODE:           'XX'
                 MEANS
                'Other - Not Specified Above' ;
CONTAINED:       IN  CntnrDiscrp ;
CONTAINED:       IN  DiscrpType ;
CONTAINED:       IN  FrtDiscrp ;
IDENTIFIES:     DiscrpType ;
IDENTIFIES:     FrtDiscrp ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
164      DEFINE ELEMENT                          DiscrpCdDescr ;
       DESCRIPTION;
   Discrepancy Code Description.
   The description that applies to each discrepancy code.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TM 38-LZ1-11, A-4' ,
                      'AR 55-38' ,
                      'CNTNR/FRT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH      '40' ,
           PICTURE          'X(40)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      CONTAINED:        IN  DiscrpType ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;

165      DEFINE ELEMENT                          DiscrpDte ;
       DESCRIPTION;
   Discrepancy Date.
   The Julian date on which a container discrepancy occurred.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'Data Model' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH      '05' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           DUI              'JulianDte' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:        IN  CntnrDiscrp ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
166      DEFINE ELEMENT                          DiscrpPc ;
        DESCRIPTION;
   Discrepancy Pieces.
   Actual piece count identified in the discrepancy report.
    ;
       KEYWORD IS:      'Freight' ,
                        'Container' ,
                        'Data Model' ,
                        'LOB' ;
       SOURCE IS:       'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '4' ,
            TYPE             'N' ,
            PICTURE          '9(04)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'QUANTITY' ;
       CONTAINED:        IN  CntnrDiscrp ;
       CONTAINED:        IN  FrtDiscrp ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;

167      DEFINE GROUP                            DiscrpTCN ;
       DESCRIPTION;
   Discrepancy TCN.
   Transportation Control Number of cargo reported on the discrepancy
   report.
    ;
       KEYWORD IS:      'Freight' ,
                        'Container' ,
                        'Data Model' ,
                        'LOB' ;
       SOURCE IS:       'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '17' ,
            TYPE             'AN' ,
            PICTURE          'X(17)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ID-NO' ,
            DUI              'TCN' ,
            FORMAT           'DATACHAIN' ;
       CONTAINED:        IN  CntnrDiscrp ;
       CONTAINED:        IN  FrtDiscrp ;
       IDENTIFIES:      CntnrDiscrp ;
       IDENTIFIES:      FrtDiscrp ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
168      DEFINE ELEMENT                          DivrsnDte ;
     DESCRIPTION;
Diversion Date.
This is a Julian date that indicates the date the diversion request was
approved by TMCA.
 ;
     KEYWORD IS:     'Container' ,
                     'LOB' ,
                     'Data Model' ;
     SEE MEMO:
          Julian-Date-Edit-Check-Memo ;
     SOURCE IS:      'CONTAINER DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '05' ,
          TYPE             'N' ,
          PICTURE          '9(05)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'DATE' ,
          DUI              'JulianDte' ,
          FORMAT           'DATACHAIN' ;
     CONTAINED:       IN  CntnrMovStp ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB CONTAINER GROUP' ;
```

```
169      DEFINE ELEMENT                          DivrsnIndic ;
      DESCRIPTION;
   Diversion Indicator.
   Indicates the status of a diversion in the container log.
    ;
      KEYWORD IS:      'Container' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:            'Y'
                        MEANS
                       'Yes' ;
      CODE:            'Blank'
                        MEANS
                       'No' ;
      CONTAINED:        IN  CntnrMovStp ;
      RANGE IS:        'Y' ,
                       'Blank' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
170     DEFINE ELEMENT                          DivrsnRecngnCnsgn ;
        SYNONYM IS:     New-Consignee ,
                        Reconsignment-Consignee ,
                        Req-Reconsignment-Consignee ;
        DESCRIPTION;
    Diversion/Reconsignment Consignee.
    The DODAAC of the diverted-to or reconsigned-to consignee.
     ;
        KEYWORD IS:     'Container' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             TYPE               'AN' ,
             FIELD-LENGTH        '6' ,
             PICTURE            'X(06)' ,
             DUI                'AAC' ,
             SEC-CLASS          'UNCLASSIFIED' ,
             USE                'CODE' ;
        CONTAINED:        IN  CntnrMovStp ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;

171     DEFINE ELEMENT                          DprtDte ;
        DESCRIPTION;
    Departure Date.
    The Julian date on which a conveyance departs a consignee stop point.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Julian-Date-Edit-Check-Memo ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH        '5' ,
             TYPE               'N' ,
             PICTURE            '9(05)' ,
             SEC-CLASS          'UNCLASSIFIED' ,
             USE                'DATE' ,
             FORMAT             'DATACHAIN' ,
             DUI                'JulianDte' ;
        CONTAINED:        IN  VehStopPtAs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
172      DEFINE ELEMENT                          DprtTime ;
      DESCRIPTION;
   Departure Time.
   The time in hours and minutes when a conveyance departs a consignee stop
   point.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Time-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           DUI              'Time24Hr' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TIME' ;
      CONTAINED:        IN  VehStopPtAs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

173      DEFINE ELEMENT                          Driver-Name ;
      DESCRIPTION;
   Driver Name.
   The name of the military driver/operator of a military conveyance of the
   damaged/deadlined cargo, chasis, and/or container.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH     '20' ,
           PICTURE          'X(20)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'NAME' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
174      DEFINE ELEMENT                          Driver-Rank ;
       DESCRIPTION;
   Driver Rank.
   The military rank of the military driver/operator of a military
   conveyance of the damaged/deadlined cargo, chassis and/or container.
    ;
       KEYWORD IS:     'Container' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
       SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
       ATTRIBUTE IS:
            TYPE            'AN' ,
            FIELD-LENGTH     '3' ,
            PICTURE         'X(03)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'NAME' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;

175      DEFINE ELEMENT                          Driver-Unit ;
       DESCRIPTION;
   Driver Unit.
   The name of the unit the military driver/operator of a military
   conveyance of the damaged/deadlined cargo, chassis, and/or container.
    ;
       KEYWORD IS:     'Container' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
       SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
       ATTRIBUTE IS:
            TYPE            'AN' ,
            FIELD-LENGTH     '35' ,
            PICTURE         'X(35)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'ADDRESS' ,
            DUI             'UDsg' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
176      DEFINE ELEMENT                          Driver-Unit-Phone ;
      DESCRIPTION;
   Driver Unit Telephone Number.
   The unit telephone number of the military driver of a military
   conveyance of the damaged/deadlined cargo, chassis, and/or container.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH      '15' ,
           PICTURE          'X(15)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

177      DEFINE ELEMENT                          DspoActv ;
      SYNONYM IS:     ACTV-ADRS-CD-DSPO-ACTV ,
                      DISPO-ACTV-AAC ;
      DESCRIPTION;
   Disposition Activity.
   The DODAAC of the element or entity which authorizes the release of a
   container from a hold status.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH      '06' ,
           TYPE             'AN' ,
           PICTURE          'X(06)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'AAC' ,
           USE              'CODE' ,
           CMM-DBMS-NME      'DISPO-ACTV-AAC' ,
           PROJ-DED-NME      'ACTV-ADRS-CD-DSPO-ACTV' ;
      CONTAINED:        IN  MEvent ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
178     DEFINE ELEMENT                          DteAvalShpmt ;
      DESCRIPTION;
   Date Available for Shipment.
   The Julian date a specified shipment if available to be transported to
   the air or water port.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           FORMAT           'DATACHAIN' ,
           DUI              'JulianDte' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

179     DEFINE ELEMENT                          DteCgoTrf ;
      DESCRIPTION;
   Date Cargo Transferred.
   The Julian date cargo was turned over to the ATMCT by the APOD.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'JulianDte' ,
           USE              'DATE' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:        IN  AirIdentNo ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
180      DEFINE ELEMENT                          DteCnsgnNotif ;
     DESCRIPTION;
  Date Consignee Notified.
  The Julian date that the consignee was notified of an
  inbound container.
   ;
     KEYWORD IS:     'Container' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Julian-Date-Edit-Check-Memo ;
     SOURCE IS:      'CONTAINER DATA MODEL' ;
     ATTRIBUTE IS:
          TYPE            'N' ,
          FIELD-LENGTH     '5' ,
          PICTURE         '9(05)' ,
          SEC-CLASS       'UNCLASSIFIED' ,
          USE             'DATE' ,
          DUI             'JulianDte' ,
          FORMAT          'DATACHAIN' ;
     CONTAINED:       IN  CntnrMovStp ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOP CONTAINER GROUP' ;
```

```
181      DEFINE GROUP                          DteCurr ;
      DESCRIPTION;
   Date Current.
   The current, 5-position Julian date, produced by the System Calendar
   Function.
    ;
      KEYWORD IS:     'LOB' ,
                      'Freight' ,
                      'Container' ,
                      'TMAS' ,
                      'NOT IN DATA MODEL' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '05' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           DUI              'JulianDte' ,
           FORMAT           'ROOT' ;
      CONSISTS OF:
           Lst-Two-Digit-CY ,
           Day-of-Yr ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB WORK GROUPS' ;
```

```
182       DEFINE ELEMENT                          DteDprtCnsgnr ;
        DESCRIPTION;
   Date Departed Consignor.
   The day on which a shipment, unit, or container (van) departed
   the consignor.
    ;
       KEYWORD IS:      'Container' ,
                        'Data Model' ,
                        'LOB' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       SOURCE IS:       'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '5' ,
            TYPE             'N' ,
            PICTURE          '9(05)' ,
            CMM-DBMS-NME     'DA-DPRT-CR' ,
            FORMAT           'DATACHAIN' ,
            PROJ-DED-NME     'DATE-DPRT-CNSGNR' ,
            USE              'DATE' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            DUI              'JulianDte' ;
       CONTAINED:         IN  CntnrMov ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
183      DEFINE ELEMENT                          DteDprtWPOE ;
         SYNONYM IS:     DATE-SAIL ,
                         ORD-DATE-MILSTD-LOGSYS ;
         DESCRIPTION;
    Date Departed Water Port of Embarkation.
    The date a containe or shipment departed the water port of embarkation.
    Note:  This is a 4-position Julian date, as contained in the reformatted
    ETA forecast.
     ;
         KEYWORD IS:     'Container' ,
                         'LOB' ,
                         'NOT IN DATA MODEL' ,
                         'CMM' ;
         SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
         ATTRIBUTE IS:
              TYPE            'N' ,
              FIELD-LENGTH     '4' ,
              PICTURE         '9(04)' ,
              SEC-CLASS       'UNCLASSIFIED' ,
              USE             'DATE' ,
              FORMAT          'DATACHAIN' ,
              CMM-DBMS-NME     'DATE-SAIL' ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB CONTAINER GROUP' ;

184      DEFINE ELEMENT                          DteHoldStart ;
         DESCRIPTION;
    Date Hold Started.
    The Julian date on which a container was placed in a hold status.
     ;
         KEYWORD IS:     'Container' ,
                         'LOB' ,
                         'Data Model' ;
         SEE MEMO:
              Julian-Date-Edit-Check-Memo ;
         SOURCE IS:      'CONTAINER DATA MODEL' ;
         ATTRIBUTE IS:
              FIELD-LENGTH     '05' ,
              TYPE            'N' ,
              PICTURE         '9(05)' ,
              SEC-CLASS       'UNCLASSIFIED' ,
              USE             'DATE' ,
              DUI             'JulianDte' ;
         CONTAINED:       IN  CntnrMovStp ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB CONTAINER GROUP' ;
```

```
185      DEFINE ELEMENT                          DteHoldStop ;
     DESCRIPTION;
  Date Hold Stopped.
  The Julian date on which a container was released from hold status.
   ;
     KEYWORD IS:      'Container' ,
                      'LOB' ,
                      'Data Model' ;
     SOURCE IS:       'CONTAINER DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '05' ,
          TYPE             'N' ,
          PICTURE          '9(05)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'DATE' ,
          DUI              'JulianDte' ;
     CONTAINED:         IN  CntnrMovStp ;
     RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

186      DEFINE ELEMENT                          DteLstUpdCgoActv ;
     DESCRIPTION;
  Date Last Update Cargo Activity.
  The date on which a change to the Cargo Activity File was posted.
   ;
     KEYWORD IS:      'Freight' ,
                      'Container' ,
                      'Data Model' ,
                      'LOB' ;
     SEE MEMO:
          Julian-Date-Edit-Check-Memo ;
     SOURCE IS:       'FREIGHT DATA MODEL' ,
                      'CONTAINER DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '5' ,
          TYPE             'N' ,
          PICTURE          '9(05)' ,
          FORMAT           'DATACHAIN' ,
          USE              'DATE' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          DUI              'JulianDte' ,
          DUI-2            'DteCurr' ;
     CONTAINED:         IN  CgoActivity ;
     RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
187      DEFINE ELEMENT                        DteLstUpdCgoAdrs ;
       DESCRIPTION;
   Date Last Update Cargo Address.
   The date on which a change to the Cargo Address File was posted.
    ;
       KEYWORD IS:      'Freight' ,
                        'Container' ,
                        'Data Model' ,
                        'LOB' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       SOURCE IS:       'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '5' ,
            TYPE             'N' ,
            PICTURE          '9(05)' ,
            FORMAT           'DATACHAIN' ,
            USE              'DATE' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            DUI              'JulianDte' ,
            DUI-2            'DteCurr' ;
       CONTAINED            IN  CgoAddress ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
188      DEFINE ELEMENT                          DteLstUpdCntnr ;
      DESCRIPTION;
   Date Last Update Container.
   The Julian date when the container log was last updated.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'N' ,
           FIELD-LENGTH       '5' ,
           PICTURE           '9(05)' ,
           FORMAT            'DATACHAIN' ,
           USE               'DATE' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           DUI               'JulianDte' ,
           DUI-2             'DteCurr' ;
      CONTAINED:        IN  CntnrMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

189      DEFINE ELEMENT                          DteLstUpdFrt ;
      DESCRIPTION;
   Date Last Update Freight.
   A date on which an event or change occured with respect to a TMR, or on
   which a new record was created.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH       '5' ,
           TYPE              'N' ,
           PICTURE           '9(05)' ,
           FORMAT            'DATACHAIN' ,
           USE               'DATE' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           DUI               'JulianDte' ,
           DUI-2             'DteCurr' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
190      DEFINE ELEMENT                          DteRecCreat ;
       DESCRIPTION;
   Date Record Created.
   The date a record is initially entered into the system.
    ;
       KEYWORD IS:      'Container' ,
                        'Freight' ,
                        'Data Model' ,
                        'LOB' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       SOURCE IS:       'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '5' ,
            TYPE             'N' ,
            PICTURE          '9(05)' ,
            FORMAT           'DATACHAIN' ,
            USE              'DATE' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            DUI              'JulianDte' ,
            DUI-2            'DteCurr' ;
       CONTAINED:         IN  CntnrMov ;
       CONTAINED:         IN  FreightMov ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
191      DEFINE ELEMENT                          DteRecFrLSSA ;
       DESCRIPTION;
   Date Received from Logistics Support System Agency.
   The date TMCA receives command initiated and/or modification
   to a DODAAC from the Army Materiel Command Logistics
   Support System Agency.
    ;
      KEYWORD IS:      'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:       'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'JulianDte' ,
           USE              'DATE' ,
           FORMAT           'DATACHAIN' ,
           DUI-2            'DteCurr' ;
      CONTAINED:         IN  Activity ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
192     DEFINE ELEMENT                          DteRecngnCfmNoncfm ;
        DESCRIPTION;
    Date Reconsignment Confirmed/Nonconfirmed.
    The Julian date when a request for reconsignment was either
    confirmed or nonconfirmed.
     ;
        KEYWORD IS:     'Container' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Julian-Date-Edit-Check-Memo ;
        SOURCE IS:      'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             USE              'DATE' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             PICTURE          '9(05)' ,
             FIELD-LENGTH      '5' ,
             TYPE             'N' ,
             DUI              'JulianDte' ,
             FORMAT           'DATACHAIN' ;
        CONTAINED:       IN  CntnrMovStp ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;

193     DEFINE ELEMENT                          DteRecngnReq ;
        DESCRIPTION;
    Date Reconsignment Requested.
    The date that the movement control element requested authorization
    to reconsign a shipment.
     ;
        KEYWORD IS:     'Container' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Julian-Date-Edit-Check-Memo ;
        SOURCE IS:      'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             TYPE             'N' ,
             FIELD-LENGTH      '5' ,
             PICTURE          '9(05)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'DATE' ,
             DUI              'JulianDte' ,
             FORMAT           'DATACHAIN' ;
        CONTAINED:       IN  CntnrMovStp ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
194      DEFINE ELEMENT                          DteSailWPOE ;
       SYNONYM IS:     DT-SAIL ,
                       Day-Departed-Consignor ;
       DESCRIPTION;
   Date Sailed Water Port of Embarkation.
   The date a vessel departed the water port of embarkation.
    ;
       KEYWORD IS:     'Container' ,
                       'Data Model' ,
                       'CMM' ,
                       'LOB' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       SOURCE IS:      'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            TYPE              'N' ,
            FIELD-LENGTH       '5' ,
            PICTURE           '9(05)' ,
            SEC-CLASS         'UNCLASSIFIED' ,
            USE               'DATE' ,
            DUI               'JulianDte' ,
            FORMAT            'DATACHAIN' ;
       CONTAINED:         IN  Voyage ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;

195      DEFINE ELEMENT                          DteStageStart ;
       DESCRIPTION;
   Date Staging Started.
   The Julian date on which the staging of a container began.
    ;
       KEYWORD IS:     'Container' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       SOURCE IS:      'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH       '5' ,
            TYPE              'N' ,
            PICTURE           '9(05)' ,
            SEC-CLASS         'UNCLASSIFIED' ,
            DUI               'JulianDte' ,
            USE               'DATE' ,
            FORMAT            'DATACHAIN' ;
       CONTAINED:         IN  CntnrMov ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
196      DEFINE ELEMENT                          DteStageStop ;
        DESCRIPTION;
    Date Staging Stopped.
    The Julian date on which the staging of a container ended.
     ;
        KEYWORD IS:     'Container' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Julian-Date-Edit-Check-Memo ;
        SOURCE IS:      'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '5' ,
             TYPE             'N' ,
             PICTURE          '9(05)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             DUI              'JulianDte' ,
             USE              'DATE' ,
             FORMAT           'DATACHAIN' ;
        CONTAINED:       IN  CntnrMov ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;

197      DEFINE ELEMENT                          DteToLSSA ;
        DESCRIPTION;
    Date to Logistics Support System Agency
    The date TMCA submits a command initiated request for addition,
    deletion and/or modification of a  DODAAC to the Army Materiel
    Command Logistics Support System Agency.
     ;
        KEYWORD IS:     'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Julian-Date-Edit-Check-Memo ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '5' ,
             TYPE             'N' ,
             PICTURE          '9(05)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'DATE' ,
             DUI              'JulianDte' ,
             FORMAT           'DATACHAIN' ,
             DUI-2            'DteCurr' ;
        CONTAINED:       IN  Activity ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
198      DEFINE ELEMENT                          Dunnage ;
     DESCRIPTION;
  Dunnage.
  The total amount of dunnage used with 463L pallets which is on-hand at
  an activity.
   ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '4' ,
          TYPE             'N' ,
          PICTURE          '9(04)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'QUANTITY' ;
     CONTAINED:       IN  Pallet463L ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;

199      DEFINE ELEMENT                          Dunnage-Tot ;
     DESCRIPTION;
  Dunnage Total.
  The total number of dunnage on-hand in an MCT area.
   ;
     KEYWORD IS:     'Freight' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
     SOURCE IS:      'TACCS-LOB DFD' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '4' ,
          TYPE             'N' ,
          PICTURE          '9(04)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'QUANTITY' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;
```

```
200      DEFINE ELEMENT                          DunnageQty ;
       DESCRIPTION;
   Dunange Quantity.
   Amount of dunnage associated with a specific move.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE             'N' ,
           PICTURE          '9(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      CONTAINED:        IN  VehStopPt ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
201      DEFINE ELEMENT                        DupeStpIndex ;
      DESCRIPTION;
   Duplicate Stop Index.
   A number which indicates whether a CntnrMovStop record has previously
   been created for the same CntnrOwnAbbr, CntnrNo, and Consignee.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'N' ,
           PICTURE          '9(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'SEQ-NO' ;
      CODE:           '1'
                       MEANS
                      '1 record exists' ;
      CODE:           '2'
                       MEANS
                      '2 records exist' ;
      CONTAINED:       IN  CntnrDiscrp ;
      CONTAINED:       IN  CntnrMovStp ;
      CONTAINED:       IN  CntnrRmrkLn ;
      CONTAINED:       IN  MEvent ;
      IDENTIFIES:     CntnrDiscrp ;
      IDENTIFIES:     CntnrMovStp ;
      IDENTIFIES:     CntnrRmrkLn ;
      IDENTIFIES:     MEvent ;
      RANGE IS:       '1'
                       THROUGH '9' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
202      DEFINE ELEMENT                          ETA ;
      DESCRIPTION;
   Estimated Time of Arrival.
   A code used by shipping activities to identify the number of days a
   shipment will be intransit from the consignor to a port.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
203      DEFINE ELEMENT                          ETA-Err-Cd ;
     DESCRIPTION;
   Expected Time of Arrival Error Code.
   A code which defines the type of error detected on a container ETA
   forecast.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '1' ,
           PICTURE           'X(01)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'CODE' ;
      CODE:             '1'
                        MEANS
                        'field cannot be blank' ;
      CODE:             '2'
                        MEANS
                        'no match on table' ;
      CODE:             '3'
                        MEANS
                        'data must be alphanumeric' ;
      CODE:             '4'
                        MEANS
                        'first position must be alpha' ;
      CODE:             '5'
                        MEANS
                        'last 4 pos must be numeric' ;
      CODE:             '6'
                        MEANS
                        'codes 4 & 5 apply' ;
      CODE:             '7'
                        MEANS
                        'MultiStpNo must be 1-9 or Z' ;
      CODE:             '8'
                        MEANS
                        'TotStp must be 01-10' ;
      CODE:             '9'
                        MEANS
                        'Pos 11 of TCN must be V' ;
      CODE:             'A'
                        MEANS
                        'TCN contains alphanumeric data' ;
      CODE:             'B'
                        MEANS
                        'codes 9 & A apply' ;
```

```
CODE:           'C'
                 MEANS
                'DteDprtWPOE failed edit' ;
CODE:           'D'
                 MEANS
                'DteDprtWPOE >=current date' ;
CODE:           'E'
                 MEANS
                'codes C & D apply' ;
CODE:           'F'
                 MEANS
                'data must be numeric' ;
CODE:           'X'
                 MEANS
                'Cnsgn not in MCT area' ;
RANGE IS:       '1'
                 THROUGH '9' ,
                'A'
                 THROUGH 'F' ,
                'X' ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB CONTAINER GROUP' ;
```

```
204       DEFINE ELEMENT                          ETABCnsgn ;
          SYNONYM IS:     ETA-BB-HVC ,
                          FCST-CD-HI-VOL-CNSGNE-ETA-B/B ,
                          HVC-FCST-CODE-FOR-BREAKBULK ;
          DESCRIPTION;
     Estimated Time of Arrival Breakbulk Consignee
     A code that identifies the type of ETA forecast requested
     by the breakbulk consignee.
      ;
          KEYWORD IS:     'CMM' ,
                          'CMM-DBMS' ,
                          'TMAS' ,
                          'Data Model' ,
                          'LOB' ;
          SEE MEMO:
               ETA-Fcst-Lvl-Edit-Check-Memo ;
          SOURCE IS:      'TMAS DATA MODEL' ;
          ATTRIBUTE IS:
               FIELD-LENGTH     '1' ,
               TYPE             'N' ,
               PICTURE          '9(01)' ,
               DUI              'ETAFcstLvlCd' ,
               SEC-CLASS        'UNCLASSIFIED' ,
               USE              'CODE' ,
               CMM-DBMS-NME      'ETA-BB-HVC' ,
               PROJ-DED-NME      'FCST-CD-HI-VOL-CNSGNE-ETA-B/B' ;
          CONTAINED:       IE Freight/Ad.s ;
          RESPONSIBLE PROBLEM DEFINER IS:
                          'TACCS-LOB TMAS GROUP' ;
```

```
205     DEFINE ELEMENT                          ETABMCT ;
        SYNONYM IS:     ETA-BB-MCT ,
                        ETA-BB-TMO ,
                        FCST-CD-MCT-ETA-B/B ,
                        TMO-FORECAST-CD-FOR-BREAKBULK ;
        DESCRIPTION;
    Estimated Time of Arrival Breakbulk Movement Control Team
    A code that identifies the type of ETA forecast requested
    by the breakbulk MCT.
     ;
        KEYWORD IS:     'CMM' ,
                        'CMM-DBMS' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             ETA-Fcst-Lvl-Edit-Check-Memo ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'N' ,
             PICTURE          '9(01)' ,
             DUI              'ETAFcstLvlCd' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'CODE' ,
             CMM-DBMS-NME      'ETA-BB-MCT' ,
             PROJ-DED-NME      'FCST-CD-MCT-ETA-B/B' ;
        CONTAINED:       IN  FreightAdrs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
206       DEFINE ELEMENT                          ETABMMC1 ;
          SYNONYM IS:     FCTST-CD-MMC1-B/B ,
                          FMMC1-BB-SW ;
          DESCRIPTION;
     Estimated Time of Arrival Breakbulk Materiel Management Center 1.
     A code that identifies the type of ETA forecast requested by the primary
     breakbulk MMC.
      ;
          KEYWORD IS:     'CMM' ,
                          'CMM-DBMS' ,
                          'TMAS' ,
                          'Data Model' ,
                          'LOB' ;
          SEE MEMO:
               ETA-Fcst-Lvl-Edit-Check-Memo ;
          SOURCE IS:      'TMAS DATA MODEL' ;
          ATTRIBUTE IS:
               FIELD-LENGTH     '1' ,
               TYPE             'N' ,
               PICTURE          '9(01)' ,
               DUI              'ETAFcstLvlCd' ,
               SEC-CLASS        'UNCLASSIFIED' ,
               USE              'CODE' ,
               CMM-DBMS-NME      'FMMC1-BB-SW' ,
               PROJ-DED-NME      'FACT-CD-MMC1-B/B' ;
          CONTAINED:       IN  FreightAdrs ;
          RESPONSIBLE PROBLEM DEFINER IS:
                          'TACCS-LOB TMAS GROUP' ;
```

```
207      DEFINE ELEMENT                          ETABMMC2 ;
       SYNONYM IS:     FCST-CD-MMC2-B/B ,
                       FMMC2-BB-SW ;
       DESCRIPTION;
   Estimated Time of Arrival Breakbulk Materiel Management Center 2.
   A code that identifies the type of ETA forecast requested by
   the alternate breakbulk MMC.
    ;
       KEYWORD IS:     'CMM' ,
                       'CMM-DBMS' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            ETA-Fcst-Lvl-Edit-Check-Memo ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '1' ,
            TYPE             'N' ,
            PICTURE          '9(01)' ,
            DUI              'ETAFcstLvlCd' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ,
            CMM-DBMS-NME      'FMMC2-BB-SW' ,
            PROJ-DED-NME      'FCST-CD-MMC2-B/B' ;
       CONTAINED:        IN  FreightAdrs ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
208      DEFINE ELEMENT                          ETACCnsgn ;
     SYNONYM IS:     ETA-CGO-HVC ,
                     FCST-CD-HI-VOL-CNSGNE-ETA-CGO ,
                     HVC-FCST-CODE-FOR-CONTAINER ;
     DESCRIPTION;
  Estimated Time of Arrival Container Consignee.
  A code that identifies the type of ETA forecast requested by
  the container consignee.
   ;
     KEYWORD IS:     'CMM' ,
                     'CMM-DBMS' ,
                     'TMAS' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          ETA-Fcst-Lvl-Edit-Check-Memo ;
     SOURCE IS:      'TMAS DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '1' ,
          TYPE             'N' ,
          PICTURE          '9(01)' ,
          DUI              'ETAFcstLvlCd' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'CODE' ,
          PROJ-DED-NME     'FCST-CD-HI-VOL-CNSGNE-ETA-CGO' ,
          CMM-DBMS-NME     'ETA-CGO-HVC' ;
     CONTAINED:       IN  FreightAdrs ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB TMAS GROUP' ;
```

```
209      DEFINE ELEMENT                          ETACMCT ;
       SYNONYM IS:     ETA-CGO-MCT ,
                       ETA-CGO-TMO ,
                       FCST-CD-MCT-ETA-CNTNR-CGO ,
                       TMO-FCST-CODE-FOR-CONTAINER ;
       DESCRIPTION;
   Estimated Time of Arrival Container Movement Control Team.
   A code that identifies the type of ETA forecast requested
   by the container MCT.
    ;
       KEYWORD IS:     'CMM' ,
                       'CMM-DBMS' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            ETA-Fcst-Lvl-Edit-Check-Memo ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '1' ,
            TYPE             'N' ,
            PICTURE          '9(01)' ,
            EDIT             'ETAFcstLvlCd' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ,
            PROJ-DED-NME     'FCST-CD-MCT-ETA-CNTNR-CGO' ,
            CMM-DBMS-NME     'ETA-CGO-MCT' ;
       CONTAINED:       IN  FreightAdrs ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOD TMAS GROUP' ;
```

```
210      DEFINE ELEMENT                          ETACMMC1 ;
       SYNONYM IS:     FCST-CD-MMC1-CNTNR-CGO ,
                       FMMC1-CGO-SW ;
       DESCRIPTION;
   Estimated Time of Arrival Container Materiel Management Center 1.
   A code that identifies the type of ETA forecast requested
   by the primary container MMC.
    ;
       KEYWORD IS:     'CMM' ,
                       'CMM-DBMS' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            ETA-Fcst-Lvl-Edit-Check-Memo ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '1' ,
            TYPE             'N' ,
            PICTURE          '9(01)' ,
            DUI              'ETAFcstLvlCd' ,
            SECURITY-CLASS   'UNCLASSIFIED' ,
            USE              'CODE' ,
            CMM-DBMS-NME      'FMMC1-CGO-SW' ,
            PROJ-DED-NME      'FCST-CD-MMC1-CNTNR-CGO' ;
       CONTAINED:        IN  FreightAdrs ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
211      DEFINE ELEMENT                          ETACMMC2 ;
         SYNONYM IS:     FCST-CD-MMC2-CNTNR-CGO ,
                         FMMC2-CGO-SW ;
         DESCRIPTION;
    Estimated Time of Arrival Container Materiel Management Center 2.
    A code that identifies the type of ETA forecast requested
    by the alternate container MMC.
     ;
         KEYWORD IS:     'CMM' ,
                         'CMM-DBMS' ,
                         'TMAS' ,
                         'Data Model' ,
                         'LOB' ;
         SEE MEMO:
              ETA-Fcst-Lvl-Edit-Check-Memo ;
         SOURCE IS:      'TMAS DATA MODEL' ;
         ATTRIBUTE IS:
              FIELD-LENGTH     '1' ,
              TYPE             'N' ,
              PICTURE          '9(01)' ,
              DUI              'ETAFcstLvlCd' ,
              SEC-CLASS        'UNCLASSIFIED' ,
              USE              'CODE' ,
              CMM-DBMS-NME      'FMMCS-CGO-SW' ,
              PROJ-DED-NME      'FCST-CD-MMC2-CNTNR-CGO' ;
         CONTAINED:       IN  FreightAdrs ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB TMAS GROUP' ;
```

```
212      DEFINE ELEMENT                          ETAFcstLvlCd ;
      DESCRIPTION;
   Estimated Time of Arrival Forecast Level Code.
   A code which identifies the format of the ETA Forecast requested,
   and which is utilized by ETA-B-Consignee, ETA-C-Consignee, ETA-B-MCT,
   ETA-C-MCT, ETA-B-MMC1, ETA-C-MMC1, ETA-B-MMC2, and ETA-C-MMC2.
    ;
      KEYWORD IS:     'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ,
           ETA-Fcst-Lvl-Edit-Check-Memo ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           FORMAT           'ROOT' ,
           USE              'CODE' ,
           TYPE             'N' ,
           PICTURE          '9(01)' ;
      CONTAINED:        IN  ETAFcstLvl ;
      IDENTIFIES:     ETAFcstLvl ;
      RANGE IS:       '1' ,
                      '2' ,
                      '3' ,
                      'Blank' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;

213      DEFINE ELEMENT                          ETAFcstLvlCdDescr ;
      DESCRIPTION;
   Estimated Time of Arrival Forecast Level Code Description.
   A narrative description of the ETA-Fcst-Lvl-Code.
    ;
      KEYWORD IS:     'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH     '60' ,
           PICTURE          'X(60)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      CONTAINED:        IN  ETAFcstLvl ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
214     DEFINE ELEMENT                          ETRRmrks ;
        SYNONYM IS:    Routing-Instructions ;
        DESCRIPTION;
    Export Traffic Release Remarks.
    The remarks received from the Water Clearance Authority with
    routing instructions.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '50' ,
             TYPE             'AN' ,
             PICTURE          'X(50)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'TEXT' ;
        CONTAINED:        IN  ExportWater ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

215     DEFINE ELEMENT                          EffDte ;
        SYNONYM IS:    Effective-Date ;
        DESCRIPTION;
    Effective Date.
    The date when an address code becomes effective in the military
    logistics system.
     ;
        KEYWORD IS:     'EURAAF' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Julian-Date-Edit-Check-Memo ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '5' ,
             TYPE             'N' ,
             PICTURE          '9(05)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'DATE' ,
             DUI              'JulianDte' ,
             FORMAT           'DATACHAIN' ;
        CONTAINED:        IN  Activity ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
216       DEFINE ELEMENT                          Err-Diag ;
       DESCRIPTION;
   Error Diagnostic
   A diagnostic message that explains possible corrective actions for a
   corresponding error condition.
    ;
       KEYWORD IS:      'Freight' ,
                        'Container' ,
                        'NOT IN DATA MODEL' ;
       SOURCE IS:       'TACCS-LOB DFD' ;
       ATTRIBUTE IS:
            FORMAT           'ROOT' ,
            USE              'TEXT' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            DUI              'Err-Diag' ,
            FIELD-LENGTH      '160' ,
            TYPE             'AN' ,
            PICTURE          'X(160)' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;

217       DEFINE ELEMENT                          Err-Msg ;
       DESCRIPTION;
   Error Message
   An error narrative message that explains the possible causes for a
   corresponding error condition.
    ;
       KEYWORD IS:      'Freight' ,
                        'Container' ,
                        'NOT IN DATA MODEL' ;
       SOURCE IS:       'TACCS-LOB DFD' ;
       ATTRIBUTE IS:
            FORMAT           'ROOT' ,
            USE              'TEXT' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            DUI              'Err-Msg' ,
            FIELD-LENGTH      '160' ,
            TYPE             'AN' ,
            PICTURE          'X(160)' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
218       DEFINE ELEMENT                          Error-Cd ;
      DESCRIPTION;
   Error Code.
   A code used to identify an error condition that has occurred during the
   Update System Unique Table Processes.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CNTNR/FRT DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'N' ,
           PICTURE          '9(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      RANGE IS:       '1 Thru 6' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
219       DEFINE ELEMENT                          EvntDte ;
          SYNONYM IS:     Date-Arrival ,
                          Date-Event-Arrival ,
                          Date-Event-Carrier-Notified ,
                          Date-Event-Carrier-Pickup ,
                          Date-Event-Discharged ,
                          Day-Event ;
          DESCRIPTION;
     Event Date.
     The Julian date of the occurrence of an event in the movement of a
     container or freight.
      ;
          KEYWORD IS:     'Container' ,
                          'Freight' ,
                          'Data Model' ,
                          'LOB' ;
          SEE MEMO:
               Julian-Date-Edit-Check-Memo ;
          SOURCE IS:      'CONTAINER DATA MODEL' ,
                          'FREIGHT DATA MODEL' ;
          ATTRIBUTE IS:
               TYPE              'N' ,
               FIELD-LENGTH       '5' ,
               PICTURE           '9(05)' ,
               SEC-CLASS         'UNCLASSIFIED' ,
               USE               'DATE' ,
               DUI               'JulianDte' ,
               FORMAT            'DATACHAIN' ,
               DUI-2             'DteCurr' ;
          CONTAINED:        IN  FrtMEvent ;
          CONTAINED:        IN  MEvent ;
```



```
220      DEFINE ELEMENT                          EvntLoc ;
       SYNONYM IS:     ACTV-ADRS-CD-EVENT-LOC ,
                       EVNT-LO-AAC ;
       DESCRIPTION;
    Event Location.
    The location at which a movement event occurs, or the location from
    which it is reported.
     ;
       KEYWORD IS:     'LOB' ,
                       'Data Model' ,
                       'Freight' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '6' ,
            TYPE             'AN' ,
            USE              'CODE' ,
            DUI              'AAC' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            CMM-DBMS-NME      'EVNT-LO-AAC' ,
            PROJ-DED-NME      'ACTV-ADRS-CD-EVENT-LOC' ,
            REGULATION       'USAREUR REG 55-5' ,
            PICTURE          'X(06)' ;
       CONTAINED:       IN  FrtMEvent ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```





```
221       DEFINE ELEMENT                          EvntTy ;
      SYNONYM IS:     Event-Code ,
                      Event-Type ,
                      Event-Type-Code ;
      DESCRIPTION;
   Event Type.
   A code which identifies the type of event being reported.
    ;
      KEYWORD IS:     'Freight' ,
                      'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'TIP5' ,
                      'CMM' ,
                      'CONTAINER DATA MODEL' ,
                      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           CMM-DBMS-NME     'TY-EVNT-CD' ,
           FORMAT           'ROOT' ,
           PROJ-DED-NME     'TYPE-EVENT-CD' ,
           REGULATION       'TM 38-LZ1-11' ,
           USE              'CODE' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      CODE:           'A'
                       MEANS
                      'Conveyance Arrival in TTB' ,
                      'Add in TT7' ,
                      'Add in TT9' ;
      CODE:           'B'
                       MEANS
                      'Cnts Disch w/o Discrp in TTB' ;
      CODE:           'C'
                       MEANS
                      'Cnts Disch w/Discrp in TTB' ,
                      'Dam Cntnr w/o Ch Conv in TTU' ,
                      'Change in TT7' ,
                      'Change in TT8' ;
      CODE:           'D'
                       MEANS
                      'Carrier Notified in TTB' ,
                      'Dam Chas w/o Ch Conv in TTU' ,
                      'Delete in TT7' ;
      CODE:           'E'
                       MEANS
```

```
                'Conveyance Departed in TTB' ,
                'Conveyance Departed in TTQ' ,
                'Start/Stop Elec Power in TTP' ,
                'Fail Cntnr w/o Ch Conv in TTU' ,
                'Conveyance Departed in TTF' ;
CODE:           'F'
                 MEANS
                'Fail Chas w/o Ch Conv in TTU' ;
CODE:           'G'
                 MEANS
                'Start/Stop Gas Power in TTP' ;
CODE:           'J'
                 MEANS
                'Cgo Disch w/o Discrp in TTW' ;
CODE:           'K'
                 MEANS
                'Cgo Disch w/Discrp in TTW' ;
CODE:           'L'
                 MEANS
                'Cgo not Rec/Nondel in TTW' ;
CODE:           'M'
                 MEANS
                'Multiple Change in TT9' ,
                'Container Staged in TTS' ;
CODE:           'N'
                 MEANS
                'Cntnr Rel fr Staging in TTS' ;
CODE:           'P'
                 MEANS
                'Container ETA at WPOD in TTQ' ;
CODE:           'R'
                 MEANS
                'Voyage Docu Arrival in TTV' ;
CODE:           'S'
                 MEANS
                'Voyage Docu Discharged in TTV' ;
CODE:           'T'
                 MEANS
                'Transceiver Tml Changed in TT9' ,
                'Unit Pickup w/Discrp in TTW' ;
CODE:           'U'
                 MEANS
                'Unit Pickup w/o Discrp in TTW' ;
CODE:           'V'
                 MEANS
                'Ls Notice Chas w/Cntnr in TTR' ;
CODE:           'W'
                 MEANS
                'Lease Notice Chas alone in TTR' ;
```

```
CODE:           'X'
                 MEANS
                'Lease of Cntnr Only in TTR' ;
CODE:           'Y'
                 MEANS
                'Termination of Lease in TTR' ;
CODE:           '1'
                 MEANS
                'Cost Favorable in TTX' ,
                'Hold the Cargo in TT2' ,
                'Hold Mov Current Loc in TT3' ,
                'Gas On in TTP' ;
CODE:           '2'
                 MEANS
                'Next Highest Cost in TTX' ,
                'Change Stop Consignee in TT3' ,
                'Reconsign/Divert Cargo in TT2' ,
                'Gas Off in TTP' ;
CODE:           '3'
                 MEANS
                'Highest Cost in TTX' ,
                'DAM Cntnr w/Ch Conv in TTU' ,
                'Deny Request in TT2' ,
                'Elec On in TTP' ;
CODE:           '4'
                 MEANS
                'Dam Chas w/Ch Conv in TTU' ,
                'Elec Off in TTP' ;
CODE:           '5'
                 MEANS
                'Fail Cntnr w/Ch Conv in TTU' ;
CODE:           '6'
                 MEANS
                'Fail Chassis w/Ch Conv in TTU' ;
CONTAINED:       IN  CntnrDiscrp ;
CONTAINED:       IN  FrtDiscrp ;
CONTAINED:       IN  FrtMEvent ;
CONTAINED:       IN  MEvent ;
CONTAINED:       IN  MEventType ;
CONTAINED:       IN  MovEvntTyCd ;
IDENTIFIES:     CntnrDiscrp ;
IDENTIFIES:     FrtDiscrp ;
IDENTIFIES:     FrtMEvent ;
IDENTIFIES:     MEvent ;
IDENTIFIES:     MEventType ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
222     DEFINE ELEMENT                          ExprtClncNo ;
      DESCRIPTION;
   Export Clearance Number.
   A number used to control the movement of export shipments moving to a
   POE. It is the ACANo for export air or the ExprtTfcRelNo for export
   water.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '13' ,
           TYPE             'AN' ,
           PICTURE          'X(13)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

223     DEFINE ELEMENT                          ExprtClncReqCd ;
      DESCRIPTION;
   Export Clearance Request Code.
   A code identifying the clearance requirement for export air shipments.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'A' ,
           PICTURE          'A(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'A'
                       MEANS
                      'Air' ;
      CODE:           'W'
                       MEANS
                      'Water' ;
      CONTAINED:       IN  ExportAir ;
      CONTAINED:       IN  ExportWater ;
      CONTAINED:       IN  FreightMov ;
      RANGE IS:       'A' ,
                      'S' ,
                      'N' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
224      DEFINE ELEMENT                          ExprtTfcRelNo ;
      SYNONYM IS:    ETR-No ;
      DESCRIPTION;
   Export Traffic Release Number.
   Identifies a specific Export Release Request.  The first 6 positions are
   the requestors DODAAC and the last 7 positions are the DTG of the
   request.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           FIELD-LENGTH      '13' ,
           PICTURE          'X(13)' ,
           FORMAT           'DATACHAIN' ,
           USE              'ID-NO' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

225      DEFINE ELEMENT                          Extent-of-Damage-Cargo ;
      DESCRIPTION;
   Extent of Damage to Cargo.
   A description of the damage to the cargo in a damaged or deadlined
   container.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH      '50' ,
           PICTURE          'X(50)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
226      DEFINE ELEMENT                          Extent-of-Damage-Chassis ;
     DESCRIPTION;
   Extent of Damage to Chassis.
   A description of the damage to the container chasis or a damaged or
   deadlined container.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '50' ,
           PICTURE           'X(50)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'TEXT' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

227      DEFINE ELEMENT                          Extent-of-Damage-Container ;
     DESCRIPTION;
   Extent of Damage to Container.
   A description of the damage to the container or a damaged or deadlined
   container.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '50' ,
           PICTURE           'X(50)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'TEXT' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
228      DEFINE ELEMENT                    Extent-of-Damage-Tractor ;
       DESCRIPTION;
   Extent of Damage to Tractor.
   A description of the damage to the tractor (if possible) with a damaged
   or deadlined container.
    ;
       KEYWORD IS:     'Container' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
       SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
       ATTRIBUTE IS:
            TYPE            'AN' ,
            FIELD-LENGTH     '50' ,
            PICTURE         'X(50)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'TEXT' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
229       DEFINE ELEMENT                          FAPO1st5 ;
      DESCRIPTION;
   Freight Army Post Office Number or Zip Code, First Five.
   The first five digits of the APO number or Zip Code in the freight
   address of the Ship-to-DODAAC.
    ;
      KEYWORD IS:      'Freight' ,
                       'EURAAF' ,
                       'CMM' ,
                       'CMM-DBMS' ,
                       'Container' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SEE MEMO:
           APO-1st-Five-Edit-Check-Memo ;
      SOURCE IS:       'TMAS DATA MODEL' ,
                       'FREIGHT DATA MODEL' ,
                       'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           DUI              'APO1st5' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ;
      CONTAINED:        IN  CgoAddress ;
      CONTAINED:        IN  FreightAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
230       DEFINE ELEMENT                          FAPOLst4 ;
      DESCRIPTION;
   Freight Army Post Office Number or Zip Code, Last Four Digits.
   The last four digits in a 9-digit designator, of the APO number
   or Zip Code in the freight address of the Ship-to-DODAAC.
    ;
      KEYWORD IS:      'Freight' ,
                       'EURAAF' ,
                       'Container' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SEE MEMO:
           APO-Last-Four-Edit-Check-Memo ;
      SOURCE IS:       'TMAS DATA MODEL' ,
                       'FREIGHT DATA MODEL' ,
                       'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           DUI              'APOLst4' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ;
      CONTAINED:        IN  CgoAddress ;
      CONTAINED:        IN  FreightAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
231       DEFINE ELEMENT                          FAttn ;
          DESCRIPTION;
     Freight Attention Line.
     The office symbol of the POC at the Ship-to-DODAAC, e.g. AEXYZ-TM.
      ;
          KEYWORD IS:      'Freight' ,
                           'EURAAF' ,
                           'Container' ,
                           'TMAS' ,
                           'Data Model' ,
                           'LOB' ;
          SOURCE IS:       'TMAS DATA MODEL' ,
                           'FREIGHT DATA MODEL' ,
                           'CONTAINER DATA MODEL' ;
          ATTRIBUTE IS:
               FIELD-LENGTH     '20' ,
               TYPE             'AN' ,
               PICTURE          'X(20)' ,
               DUI              'Attn' ,
               SEC-CLASS        'UNCLASSIFIED' ,
               USE              'ADDRESS' ;
          CONTAINED:        IN  CgoAddress ;
          CONTAINED:        IN  FreightAdrs ;
          RESPONSIBLE PROBLEM DEFINER IS:
                           'TACCS-LOB TMAS GROUP' ;
```

```
232      DEFINE ELEMENT                          FBldgNo ;
      DESCRIPTION;
   Freight Building Number.
   The building number of the Ship-to-DODAAC.
    ;
      KEYWORD IS:      'Freight' ,
                       'EURAAF' ,
                       'Container' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'TMAS DATA MODEL' ,
                       'FREIGHT DATA MODEL' ,
                       'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '10' ,
           PICTURE           'X(10)' ,
           DUI               'Bldg' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'ADDRESS' ;
      CONTAINED:         IN  CgoAddress ;
      CONTAINED:         IN  FreightAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
233      DEFINE ELEMENT                          FBrksKsrn ;
        DESCRIPTION;
    Freight Barracks/Kaserne.
    The name of the barracks or kaserne of the Ship-to-DODAAC.
     ;
        KEYWORD IS:     'Freight' ,
                        'EURAAF' ,
                        'Container' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TMAS DATA MODEL' ,
                        'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '25' ,
             TYPE             'AN' ,
             PICTURE          'X(25)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ADDRESS' ;
        CONTAINED:        IN  CgoAddress ;
        CONTAINED:        IN  FreightAdrs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
234      DEFINE ELEMENT                          FCityCd ;
      DESCRIPTION;
   Freight City Code.
   A code assigned to identify the city in the freight address of the
   Ship-to-DODAAC, e.g. MANNH is Mannheim. It is the first five position of
   the group FCityRgn.
    ;
      KEYWORD IS:     'Freight' ,
                      'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           FCityCd-Memo ;
      SOURCE IS:      '37th Trans Gp Reg 55-108,Ann.B' ,
                      'FREIGHT DATA MODEL' ,
                      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'A' ,
           PICTURE          'A(05)' ,
           DUI              'CityCd' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'AHLHO'
                       MEANS
                      'Ahlhorn' ;
      CODE:           'ALBOR'
                       MEANS
                      'Alborg' ;
      CODE:           'ALTEN'
                       MEANS
                      'Altenbuseck' ;
      CODE:           'AMBER'
                       MEANS
                      'Amberg' ;
      CODE:           'ANSBA'
                       MEANS
                      'Ansbach' ;
      CODE:           'ASCHA'
                       MEANS
                      'Aschaffenburg' ;
      CODE:           'AUGSB'
                       MEANS
                      'Augsburg' ;
      CODE:           'BABEN'
                       MEANS
                      'Babenhausen' ;
      CODE:           'BADAI'
                       MEANS
```

```
                'Bad Aibling' ;
CODE:           'BADCA'
                 MEANS
                'Bad Cannstadt' ;
CODE:           'GODES'
                 MEANS
                'Bad Godesberg' ;
CODE:           'BADHR'
                 MEANS
                'Bad Hersfeld' ;
CODE:           'BADHM'
                 MEANS
                'Bad Homburg' ;
CODE:           'BADKR'
                 MEANS
                'Bad Kreuznach' ;
CODE:           'BADKI'
                 MEANS
                'Bad Kissingen' ;
CODE:           'BADME'
                 MEANS
                'Bad Mergentheim' ;
CODE:           'BADNA'
                 MEANS
                'Bad Nauheim' ;
CODE:           'BADTO'
                 MEANS
                'Bad Toelz' ;
CODE:           'BALES'
                 MEANS
                'Balesfeld' ;
CODE:           'BAMBE'
                 MEANS
                'Bamberg' ;
CODE:           'BAUHM'
                 MEANS
                'Baumholder' ;
CODE:           'BAYRE'
                 MEANS
                'Bayreuth' ;
CODE:           'BERCH'
                 MEANS
                'Berchtesgaden' ;
CODE:           'BELLH'
                 MEANS
                'Bellheim' ;
CODE:           'BERG'
                 MEANS
                'Berg' ;
```

```
CODE:          'BHOGN'
                MEANS
               'Bergen-Hohne' ;
CODE:          'BERNB'
                MEANS
               'Bernbach' ;
CODE:          'BETTE'
                MEANS
               ' Bettembourg' ;
CODE:          'BINDL'
                MEANS
               'Bindlach' ;
CODE:          'BINGE'
                MEANS
               'Bingen' ;
CODE:          'BITBU'
                MEANS
               'Bitburg' ;
CODE:          'BOEBL'
                MEANS
               'Boeblingen' ;
CODE:          'BOERR'
                MEANS
               'Boerrstadt' ;
CODE:          'BONN'
                MEANS
               'Bonn' ;
CODE:          'BREME'
                MEANS
               'Bremerhaven' ;
CODE:          'BREMN'
                MEANS
               'Bremen' ;
CODE:          'BREMG'
                MEANS
               'Bremgarten' ;
CODE:          'BRUCH'
                MEANS
               'Bruchsal' ;
CODE:          'BRUES'
                MEANS
               'Bruessel' ;
CODE:          'BRUNS'
                MEANS
               'Brunsum' ;
CODE:          'BUEDI'
                MEANS
               'Buedingen' ;
CODE:          'BUERE'
```

```
                    MEANS
                   'Bueren' ;
CODE:              'BUESC'
                    MEANS
                   'Bueschfeld' ;
CODE:              'BUNDE'
                    MEANS
                   'Bundenthal' ;
CODE:              'BUTZB'
                    MEANS
                   'Butzbach' ;
CODE:              'CAPEL'
                    MEANS
                   'Cappellen' ;
CODE:              'CHIEV'
                    MEANS
                   'Chievres' ;
CODE:              'CLAUS'
                    MEANS
                   'Clausen' ;
CODE:              'COBUR'
                    MEANS
                   'Coburg' ;
CODE:              'CRAIL'
                    MEANS
                   'Crailsheim' ;
CODE:              'CACHA'
                    MEANS
                   'Dachau' ;
CODE:              'DARMS'
                    MEANS
                   'Darmstadt' ;
CODE:              'DAHN'
                    MEANS
                   'Dahn' ;
CODE:              'DELLF'
                    MEANS
                   'Dellfeld' ;
CODE:              'DEXHM'
                    MEANS
                   'Dexheim' ;
CODE:              'DICHT'
                    MEANS
                   'Dichtelbach' ;
CODE:              'DIFFN'
                    MEANS
                   'Differten' ;
CODE:              'ECHTE'
                    MEANS
```

```
                'Echterdingen' ;
CODE:           'EDENK'
                 MEANS
                'Edenkoben' ;
CODE:           'EGGEN'
                 MEANS
                'Eggenstein' ;
CODE:           'EINSI'
                 MEANS
                'Einsiedlerhof' ;
CODE:           'ELLWA'
                 MEANS
                'Ellwangen' ;
CODE:           'ELSEN'
                 MEANS
                'Elsenborn/Belgium' ;
CODE:           'ERLAN'
                 MEANS
                'Erlangen' ;
CODE:           'ERDIN'
                 MEANS
                'Erding' ;
CODE:           'ERLEU'
                 MEANS
                'Erleusee' ;
CODE:           'ESELF'
                 MEANS
                'Eselfuerth' ;
CODE:           'ESSLI'
                 MEANS
                'Esslingen' ;
CODE:           'ETTLN'
                 MEANS
                'Ettlingen' ;
CODE:           'FALLI'
                 MEANS
                'Fallingbostel' ;
CODE:           'FEUCH'
                 MEANS
                'Feucht' ;
CODE:           'FINTH'
                 MEANS
                'Finthen' ;
CODE:           'FISCH'
                 MEANS
                'Fischbach' ;
CODE:           'FISCT'
                 MEANS
                'Fischstein' ;
```

```
CODE:       'FRANK'
             MEANS
            'Frankfurt' ;
CODE:       'FRIED'
             MEANS
            'Friedberg' ;
CODE:       'FUERF'
             MEANS
            'Fuerfeld' ;
CODE:       'FUERT'
             MEANS
            'Fuerth' ;
CODE:       'FULDA'
             MEANS
            'Fulda' ;
CODE:       'GABLI'
             MEANS
            'Gablingen' ;
CODE:       'GARLS'
             MEANS
            'Garlstadt' ;
CODE:       'GARMI'
             MEANS
            'Garmisch' ;
CODE:       'GEILE'
             MEANS
            'Geilenkirchen' ;
CODE:       'GELNH'
             MEANS
            'Gelnhausen' ;
CODE:       'GERDA'
             MEANS
            'Gerbach' ;
CODE:       'GERME'
             MEANS
            'Germersheim' ;
CODE:       'GIEBE'
             MEANS
            'Giebelstadt' ;
CODE:       'GIESS'
             MEANS
            'Giessen' ;
CODE:       'GOEPP'
             MEANS
            'Goeppingen' ;
CODE:       'GRAFE'
             MEANS
            'Grafenwoehr' ;
CODE:       'GRIES'
```

```
                MEANS
               'Griesheim' ;
CODE:          'GROSS'
                MEANS
               'Grossauheim' ;
CODE:          'GRUEN'
                MEANS
               'Gruenstadt' ;
CODE:          'GUENZ'
                MEANS
               'Guenzburg' ;
CODE:          'HAHN'
                MEANS
               'Hahn' ;
CODE:          'HAMBU'
                MEANS
               'Hamburg' ;
CODE:          'HANAU'
                MEANS
               'Hanau' ;
CODE:          'HAUST'
                MEANS
               'Haustadt' ;
CODE:          'HEIDE'
                MEANS
               'Heidelberg' ;
CODE:          'HEILB'
                MEANS
               'Heilbronn' ;
CODE:          'HERBO'
                MEANS
               'Herbornseelbach' ;
CODE:          'HERON'
                MEANS
               'Herongen' ;
CODE:          'HERZO'
                MEANS
               'Herzogenaurach' ;
CODE:          'HESHO'
                MEANS
               'Hessisch-Oldendorf' ;
CODE:          'HINTE'
                MEANS
               'Hinterweidenthal' ;
CODE:          'HOEHM'
                MEANS
               'Hoehmuehlbach' ;
CODE:          'HOF'
                MEANS
```

```
                'Hof' ;
CODE:           'HOHEN'
                 MEANS
                'Hohenfels' ;
CODE:           'HOMBU'
                 MEANS
                'Homburg' ;
CODE:           'HOOGB'
                 MEANS
                'Hoogbuhl' ;
CODE:           'HOPPS'
                 MEANS
                'Hoppstaedten' ;
CODE:           'IDOBS'
                 MEANS
                'Idar-Oberstein' ;
CODE:           'ILLES'
                 MEANS
                'Illesheim' ;
CODE:           'INGOL'
                 MEANS
                'Ingolstadt' ;
CODE:           'JEVER'
                 MEANS
                'Jever' ;
CODE:           'JUELI'
                 MEANS
                'Juelich' ;
CODE:           'KAISE'
                 MEANS
                'Kaiserslautern' ,
                'Rhein Ordnance Barracks' ;
CODE:           'KARLS'
                 MEANS
                'Karlsruhe' ;
CODE:           'KARUP'
                 MEANS
                'Karup' ;
CODE:           'KANDL'
                 MEANS
                'Kandel' ;
CODE:           'KASSE'
                 MEANS
                'Kassel' ;
CODE:           'KATTE'
                 MEANS
                'Katterbach' ;
CODE:           'KINDS'
                 MEANS
```

```
                'Kindsbach' ;
CODE:           'KIRCH'
                 MEANS
                'Kirchgoens' ;
CODE:           'KRCHB'
                 MEANS
                'Kircheimbolanden' ;
CODE:           'KITZI'
                 MEANS
                'Kitzingen' ;
CODE:           'KOEPP'
                 MEANS
                'Koeppern' ;
CODE:           'KILDI'
                 MEANS
                'Kolding' ;
CODE:           'KORNW'
                 MEANS
                'Kornwestheim' ;
CODE:           'KRIEG'
                 MEANS
                'Kriegsfeld' ;
CODE:           'LAHR'
                 MEANS
                'Lahr' ;
CODE:           'LAMPE'
                 MEANS
                'Lampertheim' ;
CODE:           'LANDA'
                 MEANS
                'Laudau' ;
CODE:           'LANGE'
                 MEANS
                'Langendiebach' ,
                'Langen/Walldorf' ;
CODE:           'LANGL'
                 MEANS
                'Langlau' ;
CODE:           'LEIPH'
                 MEANS
                'Leipheim' ;
CODE:           'LEMBG'
                 MEANS
                'Lemberg' ;
CODE:           'LIMBA'
                 MEANS
                'Limbach' ;
CODE:           'LINDER'
                 MEANS
```

```
                'Linderhofe' ;
CODE:           'LORSC'
                 MEANS
                'Lorsch' ;
CODE:           'LUDWI'
                 MEANS
                'Ludwigsburg' ;
CODE:           'LUSEM'
                 MEANS
                'Luxembourg' ;
CODE:           'MAINZ'
                 MEANS
                'Mainz' ;
CODE:           'MANIK'
                 MEANS
                'Mainz-Kastel' ;
CODE:           'MANIF'
                 MEANS
                'Mainz-Finthen' ;
CODE:           'MANNH'
                 MEANS
                'Mannheim' ;
CODE:           'MARBU'
                 MEANS
                'Marburg' ;
CODE:           'MASSW'
                 MEANS
                'Massweiler' ;
CODE:           'MEPPE'
                 MEANS
                'Meppen' ;
CODE:           'MIESA'
                 MEANS
                'Miesau' ;
CODE:           'MOEHR'
                 MEANS
                'Moehringen' ;
CODE:           'MORBA'
                 MEANS
                'Morbach' ;
CODE:           'MUENC'
                 MEANS
                'Muenchweiler' ;
CODE:           'MUENS'
                 MEANS
                'Muensingen' ,
                'Muenster' ;
CODE:           'MWEST'
                 MEANS
```

```
                'Muenster/Westf' ;
CODE:           'MLAGE'
                 MEANS
                'Muenster/Lager' ;
CODE:           'MUNIC'
                 MEANS
                'Munich' ;
CODE:           'MUEND'
                 MEANS
                'Muenster-Dieburg' ;
CODE:           'NAHBO'
                 MEANS
                'Nahbollenbach' ;
CODE:           'NECKA'
                 MEANS
                'Neckarhausen' ,
                'Neckarsulm' ;
CODE:           'NELLI'
                 MEANS
                'Nellingen' ;
CODE:           'NEUBR'
                 MEANS
                'Neubruecke' ;
CODE:           'NUEST'
                 MEANS
                'Neustadt' ;
CODE:           'NORDE'
                 MEANS
                'Nordenham' ;
CODE:           'NORDH'
                 MEANS
                'Nordholz' ;
CODE:           'NRTPT'
                 MEANS
                'North Point' ;
CODE:           'NUERN'
                 MEANS
                'Nuernberg' ;
CODE:           'NUTH'
                 MEANS
                'Nuth' ;
CODE:           'NEULM'
                 MEANS
                'Neu Ulm' ;
CODE:           'OBERD'
                 MEANS
                'Oberdachstetten' ;
CODE:           'OBERM'
                 MEANS
```

```
                'Obermoerlen' ;
CODE:           'OBERO'
                 MEANS
                'Oberolm' ;
CODE:           'OBERR'
                 MEANS
                'Oberramstadt' ;
CODE:           'OBRWS'
                 MEANS
                'Oberweiss' ;
CODE:           'OFFEN'
                 MEANS
                'Offenbach' ;
CODE:           'OLFEN'
                 MEANS
                'Olfen' ;
CODE:           'OTTRA'
                 MEANS
                'Ottrau' ;
CODE:           'PARSB'
                 MEANS
                'Parsberg' ;
CODE:           'PFORZ'
                 MEANS
                'Pforzheim' ;
CODE:           'PFUNG'
                 MEANS
                'Pfungstadt' ;
CODE:           'PIRMA'
                 MEANS
                'Pirmasens' ;
CODE:           'RAMST'
                 MEANS
                'Ramstein' ;
CODE:           'REBEN'
                 MEANS
                'Regensburg' ;
CODE:           'RHEIN'
                 MEANS
                'Rheindahlen' ;
CODE:           'RRTER'
                 MEANS
                'Rhein River Term' ;
CODE:           'RHEIE'
                 MEANS
                'Rheinberg' ;
CODE:           'RMAIN'
                 MEANS
                'Rhein Main' ;
```

```
CODE:          'ROEDE'
                MEANS
               'Roedelheim' ;
CODE:          'RUESS'
                MEANS
               'Ruesselsheim' ;
CODE:          'RUPPE'
                MEANS
               'Ruppertsweiler' ;
CODE:          'SAARB'
                MEANS
               'Saarbruecken' ;
CODE:          'SALZG'
                MEANS
               'Salzgitter' ;
CODE:          'SCHIN'
                MEANS
               ' Schinner' ;
CODE:          'SWGMD'
                MEANS
               'Schwabisch Gmuend' ;
CODE:          'SWBHL'
                MEANS
               'Schwaebisch Hall' ;
CODE:          'SCHWA'
                MEANS
               'Schwabach' ;
CODE:          'SCHWE'
                MEANS
               'Schweinfurt' ;
CODE:          'SCWTZ'
                MEANS
               'Schwetzingen' ;
CODE:          'SECKE'
                MEANS
               'Seckenheim' ;
CODE:          'SEMBA'
                MEANS
               'Sembach' ;
CODE:          'SENNE'
                MEANS
               'Sennelager' ;
CODE:          'SIEGE'
                MEANS
               'Siegelsbach' ;
CODE:          'SOEGE'
                MEANS
               'Soegel' ;
CODE:          'SOELL'
```

```
                MEANS
               'Soellingen' ;
CODE:          'SOEST'
                MEANS
               'Soesterberg' ;
CODE:          'SPANG'
                MEANS
               'Spangdahlem' ;
CODE:          'SPABR'
                MEANS
               'Spabruecken' ;
CODE:          'STUTT'
                MEANS
               'Stuttgart' ;
CODE:          'TODEN'
                MEANS
               'Todendorf' ;
CODE:          'UHLER'
                MEANS
               'Uhlerborn' ;
CODE:          'UNTER'
                MEANS
               'Unterluiess' ;
CODE:          'UREXW'
                MEANS
               'Urexweiler' ;
CODE:          'VAIHI'
                MEANS
               'Vaihingen' ;
CODE:          'VIELB'
                MEANS
               'Vielbrunn' ;
CODE:          'VILSE'
                MEANS
               'Vilseck' ;
CODE:          'WACKE'
                MEANS
               'Wackernheim' ;
CODE:          'WALSR'
                MEANS
               'Walsrode' ;
CODE:          'WEIDE'
                MEANS
               'Weideu' ;
CODE:          'WENIG'
                MEANS
               'Wenigerrath' ;
CODE:          'WERTH'
                MEANS
```

```
                'Wentheim' ;
CODE:           'WEILE'
                 MEANS
                'Weilerbach' ;
CODE:           'WIESB'
                 MEANS
                'Wiesbaden' ;
CODE:           'WILDE'
                 MEANS
                'Wildenvath' ;
CODE:           'WILDF'
                 MEANS
                'Wildflecken' ;
CODE:           'WORMS'
                 MEANS
                'Worms' ;
CODE:           'WUERZ'
                 MEANS
                'Wuerzburg' ;
CODE:           'WUESC'
                 MEANS
                'Wueschheim' ;
CODE:           'ZIRND'
                 MEANS
                'Zirndorf' ;
CODE:           'ZUFFE'
                 MEANS
                'Zuffenhausen' ;
CODE:           'ZWEIB'
                 MEANS
                'Zweibruecken' ;
CONTAINED:       IN  CgoAddress ;
CONTAINED:       IN  FCityRgn ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
235       DEFINE GROUP                          FCityRgn ;
          DESCRIPTION;
     Freight City/Region.
     The Bundespost city/region associated with the freight
     address of the Ship-to-DODAAC.  E.g., Oberursel/Taunus.
      ;
         KEYWORD IS:     'Freight' ,
                         'EURAAF' ,
                         'CMM' ,
                         'CMM-DBMS' ,
                         'Container' ,
                         'TMAS' ,
                         'Data Model' ,
                         'LOB' ;
         SOURCE IS:      'TMAS DATA MODEL' ,
                         'FREIGHT DATA MODEL' ,
                         'CONTAINER DATA MODEL' ;
         ATTRIBUTE IS:
              FIELD-LENGTH     '25' ,
              TYPE             'AN' ,
              PICTURE          'X(25)' ,
              DUI              'CityRgn' ,
              SEC-CLASS        'UNCLASSIFIED' ,
              USE              'NAME' ;
         CONSISTS OF:
              FCityCd ,
              FCityRgnLst20 ;
         CONTAINED:        IN  CgoAddress ;
         CONTAINED:        IN  FreightAdrs ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB WORK GROUPS' ;
```

```
236       DEFINE ELEMENT                        FCityRgnLst20 ;
      DESCRIPTION;
   Freight City Region Last 20 Positions.
   This is the last 20 positions of the 25-position group FCityRgn. The
   first five positions of FCityRgn constitute the element FCityCd. The
   remaining 20 positions constitute filler positions, not otherwise used.
    ;
      KEYWORD IS:      'Freight' ,
                       'Container' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'CONTAINER DATA MODEL' ,
                       'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '20' ,
           TYPE             'A' ,
           PICTURE          'A(20)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'FILLER' ;
      CONTAINED:        IN  CgoAddress ;
      CONTAINED:        IN  FCityRgn ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB WORK GROUPS' ;
```

```
237      DEFINE ELEMENT                          FCntry ;
        DESCRIPTION;
Freight Country.
An abbreviation of the country name in the freight address of the
Ship-to-DODAAC.
 ;
    KEYWORD IS:     'Freight' ,
                    'CMM' ,
                    'CMM-DBMS' ,
                    'EURAAF' ,
                    'Container' ,
                    'TMAS' ,
                    'Data Model' ,
                    'LOB' ;
    SOURCE IS:      'TMAS DATA MODEL' ,
                    'FREIGHT DATA MODEL' ,
                    'CONTAINER DATA MODEL' ,
                    'DOD 4500-32-R, Fig M-2' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '2' ,
         TYPE             'A' ,
         PICTURE          'A(02)' ,
         DUI              'CntryCd' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'CODE' ;
    CONTAINED:       IN  CgoAddress ;
    CONTAINED:       IN  FreightAdrs ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB TMAS GROUP' ;
```

```
238      DEFINE ELEMENT                          FDteLstUpd ;
       DESCRIPTION;
   Freight Date Last Update.
   The last date the Ship-to-DODAAC information was updated.
    ;
       KEYWORD IS:     'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '5' ,
            DUI              'JulianDte' ,
            USE              'DATE' ,
            TYPE             'N' ,
            PICTURE          '9(05)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            FORMAT           'DATACHAIN' ;
       CONTAINED:       IN  FreightAdrs ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

239      DEFINE ELEMENT                          FMCTCivTel ;
       DESCRIPTION;
   Freight Movement Control Team Civilian Phone Number(s).
   The civilian telephone number(s) of the F-MCT-POC.
    ;
       KEYWORD IS:     'Freight' ,
                       'Container' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'TMAS DATA MODEL' ,
                       'FREIGHT DATA MODEL' ,
                       'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '25' ,
            TYPE             'AN' ,
            PICTURE          'X(25)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ADDRESS' ;
       CONTAINED:       IN  CgoAddress ;
       CONTAINED:       IN  FreightAdrs ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
240     DEFINE ELEMENT                          FMCTMilTel ;
        DESCRIPTION;
    Freight Movement Control Team Military Phone Number(s).
    The military telephone number(s) of the F-MCT-POC.
     ;
        KEYWORD IS:     'Freight' ,
                        'Container' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TMAS DATA MODEL' ,
                        'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '15' ,
             TYPE             'AN' ,
             PICTURE          'X(15)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ADDRESS' ;
        CONTAINED:       IN  CgoAddress ;
        CONTAINED:       IN  FreightAdrs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;

241     DEFINE ELEMENT                          FMCTPOC ;
        DESCRIPTION;
    Freight Movement Control Team Point of Contact.
    The person or office of the Ship-to-DODAAC that the MCT contacts for
    freight address information.
     ;
        KEYWORD IS:     'Freight' ,
                        'Container' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TMAS DATA MODEL' ,
                        'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '25' ,
             TYPE             'AN' ,
             PICTURE          'X(25)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'NAME' ;
        CONTAINED:       IN  CgoAddress ;
        CONTAINED:       IN  FreightAdrs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
242      DEFINE ELEMENT                          FPostCd ;
     DESCRIPTION;
   Freight Postal Code.
   The Bundespost Postal Code associated with the city in the mailing
   address of the Ship-to-DODAAC.  E.g., in 6900 Heidelberg 1, the FPostCd
   is 6900.
    ;
       KEYWORD IS:      'Freight' ,
                        'EURAAF' ,
                        'CMM' ,
                        'CMM-DBMS' ,
                        'Container' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
       SOURCE IS:       'TMAS DATA MODEL' ,
                        'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '6' ,
            TYPE             'N' ,
            PICTURE          '9(06)' ,
            DUI              'PostCd' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ADDRESS' ;
       CONTAINED:        IN  CgoAddress ;
       CONTAINED:        IN  FreightAdrs ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
243      DEFINE ELEMENT                          FSt ;
         DESCRIPTION;
    Freight Street Address.
    The in-the-clear street address (name and number) of the Ship-to-DODAAC
    used in the freight address.  E.g., Kaiserstrasse 52.
     ;
        KEYWORD IS:      'Freight' ,
                         'EURAAF' ,
                         'Container' ,
                         'TMAS' ,
                         'Data Model' ,
                         'LOB' ;
        SOURCE IS:       'TMAS DATA MODEL' ,
                         'FREIGHT DATA MODEL' ,
                         'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '25' ,
             TYPE             'AN' ,
             PICTURE          'X(25)' ,
             DUI              'StAdrs' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USF              'ADDRESS' ;
        CONTAINED:        IN  CgoAddress ;
        CONTAINED:        IN  FreightAdrs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB TMAS GROUP' ;
```

```
244      DEFINE ELEMENT                          FUDsg ;
       DESCRIPTION;
   Freight Unit Designation.
   The in-the-clear unit name associated with the freight address of the
   Ship-to-DODAAC.  E.g., 574 S&S Co.
    ;
       KEYWORD IS:      'EURAAF' ,
                        'CMM' ,
                        'CMM-DBMS' ,
                        'Container' ,
                        'Freight' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
       SOURCE IS:       'TMAS DATA MODEL' ,
                        'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '35' ,
            TYPE             'AN' ,
            PICTURE          'X(35)' ,
            DUI              'UDsg' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ADDRESS' ;
       CONTAINED:       IN  CgoAddress ;
       CONTAINED:       IN  FreightAdrs ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
245      DEFINE ELEMENT                          FUDsgCont ;
       DESCRIPTION;
    Freight Unit Designation Continued.
    The continuation line for the F-Unit-Designation freight address.
     ;
        KEYWORD IS:      'Freight' ,
                         'EURAAF' ,
                         'Container' ,
                         'TMAS' ,
                         'Data Model' ,
                         'LOB' ;
        SOURCE IS:       'TMAS DATA MODEL' ,
                         'FREIGHT DATA MODEL' ,
                         'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '35' ,
             TYPE             'AN' ,
             PICTURE          'X(35)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ADDRESS' ;
        CONTAINED:         IN  CgoAddress ;
        CONTAINED:         IN  FreightAdrs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB TMAS GROUP' ;
```

```
246     DEFINE ELEMENT                          FWTNo ;
      SYNONYM IS:     FRT-WRNT-NO ,
                      FWT-NO ;
      DESCRIPTION;
  Freight Warrant Number.
  The number assigned to identify and control military freight warrants,
  used for the procedurement of transportation and related services from
  commercial carriers when the charges for such services are properly
  payable by the government.
   ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ,
                      'CMM' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ,
                      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           CMM-DBMS-NME       'FWT-NO' ,
           PROJ-DED-NME       'FRT-WRNT-NO' ,
           USE               'ID-NO' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           PICTURE           'X(11)' ,
           FIELD-LENGTH       '11' ;
      CONTAINED:        IN  CntnrMov ;
      CONTAINED:        IN  FreightMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
247      DEFINE ELEMENT                          File-Name ;
     DESCRIPTION;
   File Name.
   The name of the calendar month associated with the element Record-Month-
   of-Hist-Disk in the History-Management-File.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE             'A' ,
           FIELD-LENGTH      '9' ,
           PICTURE          'A(09)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DESCRIPTION' ;
      RANGE IS:       'January'
                       THROUGH 'December' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

248      DEFINE ELEMENT                          File-No ;
     DESCRIPTION;
   File Number.
   A string of characters of variable length (15 to 18) which is used to
   identify each record generated by a process. It consists of a process-
   specific prefix (3 to 6 characters), followed by the system generated
   date/time designator in the format YYMMDDHHMMSS.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH      '18 (VARIABLE)' ,
           PICTURE          'X(18)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
249      DEFINE ELEMENT                    Freight-History-Sel-Criteria ;
      SYNONYM IS:    SelFrtHist ;
      DESCRIPTION;
   Freight History Selection Critria.
   This parameter determines the number of days a commitment is retained in
   the active file after it is completed and before it is sent to the
   Freight History File.
    ;
      KEYWORD IS:    'Freight' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
      SOURCE IS:     'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH    '2' ,
           TYPE            'N' ,
           PICTURE         '9(02)' ,
           SEC-CLASS       'UNCLASSIFIED' ,
           DEFAULT-VALUE    '45' ,
           USE             'SYS-PAR' ;
      CONTAINED:       IN  System-Parameter-Record ;
      RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB CONTAINER GROUP' ;

250      DEFINE ELEMENT                    Freight-Origin-Code ;
      DESCRIPTION;
   Freight Origin Code.
   This parameter represents the Origin Code of the freight section of the
   host movement control element.
    ;
      KEYWORD IS:    'Freight' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
      SOURCE IS:     'TACCS-LOB CONTAINER DFD' ,
                     'TACCS-LOB FREIGHT DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH    '3' ,
           TYPE            'AN' ,
           PICTURE         'X(03)' ,
           SEC-CLASS       'UNCLASSIFIED' ,
           DUI             'OrigCd' ,
           USE             'SYS-PAR' ;
      CONTAINED:       IN  System-Parameter-Record ;
      RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB CONTAINER GROUP' ;
```

```
251      DEFINE ELEMENT                          Freq ;
      DESCRIPTION;
   Frequency.
   Identifies the times/days that the event will or must occur.
    ;
      KEYWORD IS:      'Freight' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '7' ,
           TYPE             'N' ,
           PICTURE          '9(07)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'MEASURE' ;
      CODE:            '1'
                        MEANS
                       'Sun' ;
      CODE:            '2'
                        MEANS
                       'Mon' ;
      CODE:            '3'
                        MEANS
                       'Tue' ;
      CODE:            '4'
                        MEANS
                       'Wed' ;
      CODE:            '5'
                        MEANS
                       'Thr' ;
      CODE:            '6'
                        MEANS
                       'Fri' ;
      CODE:            '7'
                        MEANS
                       'Sat' ;
      CONTAINED:        IN  STMRStop ;
      RANGE IS:        'Day of Week' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```


```
252      DEFINE ELEMENT                          FrtRmrk ;
     DESCRIPTION;
   Freight Remarks.
   A unique line of information not provided for in the other freight
   subsystem attributes but deemed essential for clarification.
   There may be any number of freight remark lines for a given
   event.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ,
           FIELD-LENGTH      '250' ,
           PICTURE          'X(250)' ;
      CONTAINED:        IN  FrtRemarkLn ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;


253      DEFINE ELEMENT                          GBLNo ;
     DESCRIPTION;
   Government Bill of Lading Number.
   The number assigned to identify and control government bills of lading,
   used for procedurement of transportation and related services from
   commercial carriers when the charge for such services are properly
   payable by the government.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ,
                      'CMM' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH      '8' ,
           TYPE             'AN' ,
           PICTURE          'X(08)' ,
           USE              'ID-NO' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           CMM-DBMS-NME      'GBL-NO' ;
      CONTAINED:        IN  FreightMsg ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
254     DEFINE ELEMENT                          HolAreaCd ;
        DESCRIPTION;
    Holiday Area Code.
    A code assigned to a geographical area of central Europe.  A code
    exists for each state in the Federal Republic of Germany, plus one
    for Belgium and one for the Netherlands.
     ;
        KEYWORD IS:     'CMM' ,
                        'CMM-DBMS' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        SOURCE IS:      'TM 38-LZ1-11, App.J' ,
                        'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'AN' ,
             PICTURE          'X(01)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'CODE' ;
        CODE:           'A'
                         MEANS
                        'Baden Wurtemburg' ;
        CODE:           'B'
                         MEANS
                        'Bavaria' ;
        CODE:           'C'
                         MEANS
                        'Hesse' ;
        CODE:           'D'
                         MEANS
                        'Hamburg' ;
        CODE:           'E'
                         MEANS
                        'North Rhine-Westphalia' ;
        CODE:           'F'
                         MEANS
                        'Rhineland-Palatinate' ;
        CODE:           'G'
                         MEANS
                        'Saarland' ;
        CODE:           'H'
                         MEANS
                        'Bremen' ;
        CODE:           'J'
                         MEANS
                        'Berlin' ;
```

```
        CODE:           'K'
                         MEANS
                        'Schleswig Holstein' ;
        CODE:           'L'
                         MEANS
                        'Nieder Holstein (Lower Saxony)' ;
        CODE:           'M'
                         MEANS
                        'Netherlands' ;
        CODE:           'N'
                         MEANS
                        'Belgium' ;
        CODE:           'X'
                         MEANS
                        'All other areas' ;
        CONTAINED:       IN  FreightAdrs ;
        CONTAINED:       IN  Holiday ;
        IDENTIFIES:     Holiday ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;

255       DEFINE ELEMENT                        HolAreaCdDescr ;
        DESCRIPTION;
    Holiday Area Code Description.
    Identifies the name of the city/state or country associated with
    the Holiday-Area-Code.
     ;
        KEYWORD IS:     'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             TYPE            'AN' ,
             FIELD-LENGTH     '25' ,
             PICTURE         'X(25)' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             USE             'NAME' ;
        CONTAINED:       IN  Holiday ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

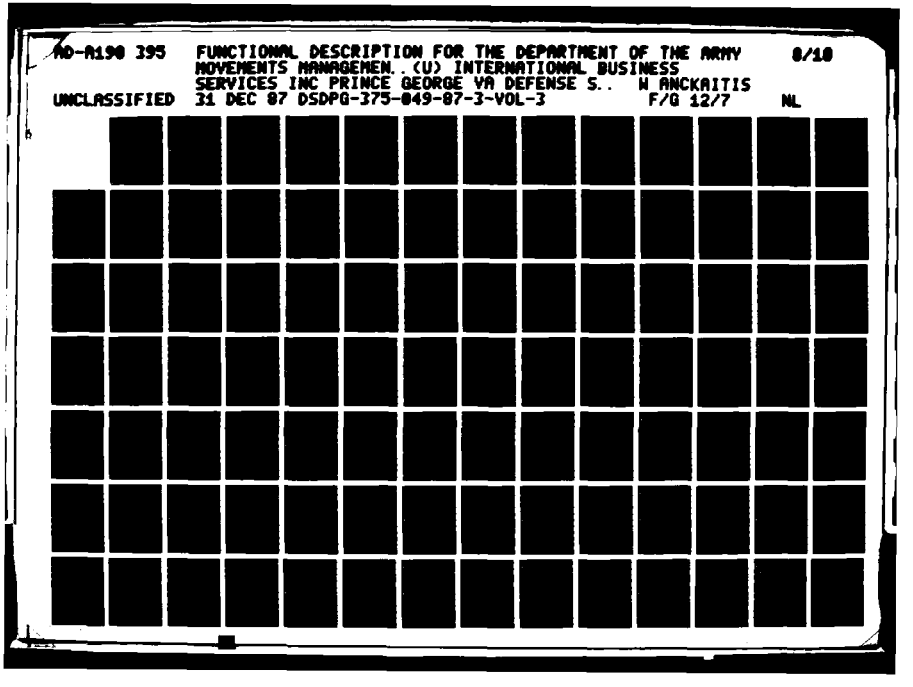
AD-A190 395 FUNCTIONAL DESCRIPTION FOR THE DEPARTMENT OF THE ARMY 8/10
MOVEMENTS MANAGEMEN..(U) INTERNATIONAL BUSINESS
SERVICES INC PRINCE GEORGE VA DEFENSE S.. W ANCKAITIS
UNCLASSIFIED 31 DEC 87 DSDPG-375-049-87-3-VOL-3 F/G 12/7 NL

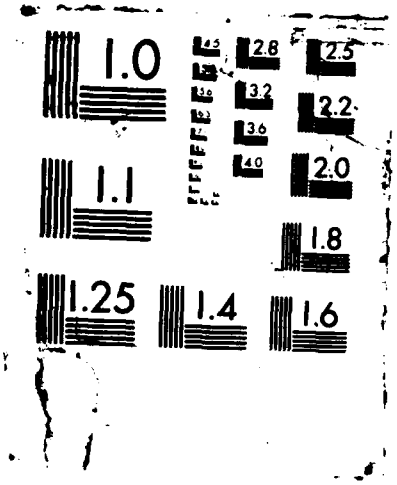
1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0

```
256      DEFINE ELEMENT                          HoldLoc ;
       DESCRIPTION;
    Hold Location.
    The location of a container in a hold status.
     ;
        KEYWORD IS:     'Container' ,
                        'LOB' ,
                        'Data Model' ;
        SOURCE IS:      'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '25' ,
             TYPE             'AN' ,
             PICTURE          'X(25)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'TEXT' ;
        CONTAINED:        IN  CntnrMovStp ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
257       DEFINE ELEMENT                          Hrs-24-Min ;
      DESCRIPTION;
   Hours 24, Minutes.
   The time of day obtained using the clock resident on the
   computer system. A datachain consisting of hours (24-hour clock)
   and minutes.
    ;
      KEYWORD IS:      'LOB' ,
                       'Freight' ,
                       'NOT IN DATA MODEL' ;
      SOURCE IS:       'TACCS-LOB DFD' ;
      ATTRIBUTE IS:
           FORMAT           'DATACHAIN' ,
           USE              'TIME' ,
           TYPE             'N' ,
           FIELD-LENGTH      '4' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'Time24Hr' ;
      RANGE IS:        '0001'
                        THROUGH '0059' ,
                       '0100'
                        THROUGH '0159' ,
                       '0200'
                        THROUGH '0259' ,
                       '0300'
                        THROUGH '0359' ,
                       '0400'
                        THROUGH '0459' ,
                       '0500'
                        THROUGH '0559' ,
                       '0600'
                        THROUGH '0659' ,
                       '0700'
                        THROUGH '0759' ,
                       '0800'
                        THROUGH '0859' ,
                       '0900'
                        THROUGH '0959' ,
                       '1000'
                        THROUGH '1059' ,
                       '1100'
                        THROUGH '1159' ,
                       '1200'
                        THROUGH '1259' ,
                       '1300'
                        THROUGH '1359' ,
                       '1400'
                        THROUGH '1459' ,
```

```
                    '1500'
                     THROUGH '1559' ,
                    '1600'
                     THROUGH '1659' ,
                    '1700'
                     THROUGH '1759' ,
                    '1800'
                     THROUGH '1859' ,
                    '1900'
                     THROUGH '1959' ,
                    '2000'
                     THROUGH '2059' ,
                    '2100'
                     THROUGH '2159' ,
                    '2200'
                     THROUGH '2259' ,
                    '2300'
                     THROUGH '2400' ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB FREIGHT GROUP' ;

258   DEFINE ELEMENT                          Ht ;
    DESCRIPTION;
  Height.
  The height of a piece of cargo in inches.
   ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE             'N' ,
           PICTURE          '9(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'MEASURE' ;
      CONTAINED:        IN  ExportAir ;
      CONTAINED:        IN  ExportWater ;
      CONTAINED:        IN  VehStopPt ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
259      DEFINE ELEMENT                          HwyClncRqmtCd ;
     DESCRIPTION;
   Highway Clearance Requirement Code.
   A code which identifies the type or requirement for a special
   clearance for a highway move.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'A' ,
           PICTURE          'A(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'R'
                       MEANS
                      'Routine' ;
      CODE:           'E'
                       MEANS
                      'Emergency' ;
      CODE:           'S'
                       MEANS
                      'Special' ;
      CODE:           'N'
                       MEANS
                      '??' ;
      CONTAINED:       IN  FreightMov ;
      CONTAINED:       IN  HwyClncCd ;
      IDENTIFIES:     HwyClncCd ;
      RANGE IS:       'R' ,
                      'S' ,
                      'E' ,
                      'N' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
260      DEFINE ELEMENT                        HwyClncRqmtCdDescr ;
       DESCRIPTION;
   Highway Clearance Requirement Code Description.
   An in-the-clear description of the clearance requirement data
   for a highway commitment.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '20' ,
            TYPE             'AN' ,
            PICTURE          'X(20)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'TEXT' ;
       CONTAINED:       IN  HwyClncCd ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;

261      DEFINE ELEMENT                        IdNo ;
       DESCRIPTION;
   Identification Number.
   Unique number given or assigned to a particular item or thing.  Used
   here to identify the USA number or vehicle number of export vehicles and
   equipment.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '13' ,
            TYPE             'AN' ,
            PICTURE          'X(13)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ID-NO' ;
       CONTAINED:       IN  ExportWater ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
262      DEFINE ELEMENT                          InsdCuCap ;
       DESCRIPTION;
   Inside Cube Capacity.
   The inside cubic capacity of a container, in cubic feet.
    ;
       KEYWORD IS:     'Freight' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '4' ,
            TYPE             'N' ,
            PICTURE          '9(04)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'MEASURE' ;
       CONTAINED:       IN  ExportWater ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' :

263      DEFINE GROUP                            JulianDte ;
       SYNONYM IS:     Julian-Date ;
       DESCRIPTION;
   Julian Date.
   A 5-position Julian date, where the first two positions represent the
   year, and the last three positions represent the day of the year. For
   example, 87032 means 1 February, 1987.
    ;
       KEYWORD IS:     'LOB' ,
                       'Freight' ,
                       'Container' ,
                       'TMAS' ,
                       'NOT IN DATA MODEL' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '05' ,
            TYPE             'N' ,
            PICTURE          '9(05)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'DATE' ,
            FORMAT           'ROOT' ;
       CONSISTS OF:
            Lst-Two-Digit-CY ,
            Day-of-Yr ;
       CONTAINED:       IN  Seq-No ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB WORK GROUPS' ;
```

```
264     DEFINE ELEMENT                          LHC ;
        SYNONYM IS:     DOL-CST-LINE-HAUL ,
                        LINE-HAUL-CST ;
        DESCRIPTION;
Line Haul Cost.
The total cost in dollars for transportation of cargo from point of
origin to destination, excluding local pick-up, delivery, and switching
charges.
 ;
        KEYWORD IS:     'Container' ,
                        'CMM' ,
                        'LOB' ,
                        'CMM-DBMS' ,
                        'NOT IN DATA MODEL' ,
                        'Freight' ;
        SOURCE IS:      'TM 38-[illegible]-2-1-C' ,
                        'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '5' ,
             TYPE             'N' ,
             PICTURE          '9(05)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'DOL-AMT' ,
             CMM-DBMS-NME      'LINE-HAUL-CST' ,
             PROJ-DED-NME      'DOL-CST-LINE-HAUL' ,
             FORMAT           'ROOT' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
265     DEFINE ELEMENT                          LMF1 ;
      SYNONYM IS:    LANG-MEDIA-FORMAT-CD-1 ;
      DESCRIPTION;
   Language Media Format (LMF) 1.
   A code which indicates how an activity prefers to send and receive
   message communications regarding ETA forecast.  The first position
   pertains to transmission and the second position to receipt.
    ;
      KEYWORD IS:     'CMM' ,
                      'CMM-DBMS' ,
                      'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TMAS DATA MODEL' ,
                      'JANAP 128' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '2' ,
           TYPE             'A' ,
           PICTURE          'A(02)' ,
           DUI              'LMFCd' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           CMM-DBMS-NME      'LMF' ,
           PROJ-DED-NME      'LMF' ;
      CODE:           'CC'
                       MEANS
                      'Card to Card' ;
      CODE:           'CT'
                       MEANS
                      'Card to Tape' ;
      CODE:           'TC'
                       MEANS
                      'Tape to Card' ;
      CODE:           'TT'
                       MEANS
                      'Tape to Tape' ;
      CONTAINED:       IN  FreightAdrs ;
      RANGE IS:       'CC' ,
                      'CT' ,
                      'TC' ,
                      'TT' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
266      DEFINE ELEMENT                          LMF2 ;
       SYNONYM IS:    LANG-MEDIA-FORMAT-CD-2 ;
       DESCRIPTION;
   Language Media Format (LMF) 2.
   A code which indicates how an activity prefers to send and receive
   message communications regarding Hold/Diversion, Intransit Data Cards,
   and Transportation Status Requests.  The first position pertains to
   transmission and the second position to receipt.
    ;
       KEYWORD IS:     'CMM' ,
                       'CMM-DBMS' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'TMAS DATA MODEL' ,
                       'JANAP 128' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '2' ,
            TYPE             'A' ,
            PICTURE          'A(02)' ,
            DUI              'LMFCd' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ,
            CMM-DBMS-NME      'LMF2' ,
            PROJ-DED-NME      'LMF2' ;
       CONTAINED:       IN  FreightAdrs ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
267     DEFINE ELEMENT                          LMFCd ;
        SYNONYM IS:     LANG-MEDIA-FORMAT-CD ,
                        LMF-Code ;
        DESCRIPTION;
    Language Media Format Code.
    A code which identifies the preferred message communication format by
    transceiver terminal.  First position indicates the media of submission
    at the telecommunications center (TCC) servicing the system.  The second
    position indicates the media of receipt at the AAC.
     ;
        KEYWORD IS:     'CMM-DBMS' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '2' ,
             TYPE             'AN' ,
             PICTURE          'X(02)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'CODE' ,
             CMM-DBMS-NME      'LMF' ,
             PROJ-DED-NME      'LANG-MEDIA-FORMAT-CD' ,
             FORMAT           'ROOT' ;
        CODE:           'CC'
                         MEANS
                        'Card to Card' ;
        CODE:           'CT'
                         MEANS
                        'Card to Tape' ;
        CODE:           'TC'
                         MEANS
                        'Tape to Card' ;
        CODE:           'TT'
                         MEANS
                        'Tape to Tape' ;
        CONTAINED:       IN  LMF ;
        IDENTIFIES:     LMF ;
        RANGE IS:       'CC' ,
                        'CT' ,
                        'TC' ,
                        'TT' ;
```

```
268      DEFINE ELEMENT                          LMFCdDescr ;
         DESCRIPTION;
    Language Media Format Code Description.
    Identifies the LMF associated with the LMF Code.
     ;
         KEYWORD IS:      'TMAS' ,
                          'Data Model' ,
                          'LOB' ;
         SOURCE IS:       'TMAS DATA MODEL' ;
         ATTRIBUTE IS:
              TYPE              'AN' ,
              FIELD-LENGTH       '20' ,
              PICTURE           'X(20)' ,
              SEC-CLASS         'UNCLASSIFIED' ,
              USE               'TEXT' ;
         CONTAINED:         IN  LMF ;
         RESPONSIBLE PROBLEM DEFINER IS:
                          'TACCS-LOB TMAS GROUP' ;

269      DEFINE ELEMENT                          Label-Print-Flag ;
         SYNONYM IS:      PrintLabel ;
         DESCRIPTION;
    Label Print Flag.
    This parameter controls the printing of shipping labels for various
    freight processes.
     ;
         KEYWORD IS:      'Freight' ,
                          'LOB' ,
                          'NOT IN DATA MODEL' ;
         SOURCE IS:       'TACCS-LOB CONTAINER DFD' ;
         ATTRIBUTE IS:
              FIELD-LENGTH       '1' ,
              TYPE              'A' ,
              PICTURE           'A(1)' ,
              SEC-CLASS         'UNCLASSIFIED' ,
              DEFAULT-VALUE      'N' ,
              USE               'SYS-PAR' ;
         CODE:                'Y'
                               MEANS
                              'Yes, print labels' ;
         CODE:                'N'
                               MEANS
                              'No, do not print labels' ;
         CONTAINED:            IN  System-Parameter-Record ;
         RANGE IS:            'Y' ,
                              'N' ;
         RESPONSIBLE PROBLEM DEFINER IS:
                              'TACCS-LOB CONTAINER GROUP' ;
```

```
270      DEFINE ELEMENT                          Lgth ;
      DESCRIPTION;
   Length.
   The length of a piece of cargo in inches.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'MEASURE' ;
      CONTAINED:        IN  ExportAir ;
      CONTAINED:        IN  ExportWater ;
      CONTAINED:        IN  VehStopPt ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

271      DEFINE ELEMENT                          Loc-Damaged/Deadlined-Occurred ;
      DESCRIPTION;
   Location Damaged/Deadline Occurred.
   A description of the location at which damage or deadline to a container
   occurred.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH     '35' ,
           PICTURE          'X(35)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
272     DEFINE ELEMENT                          LotNo ;
        DESCRIPTION;
    Lot Number.
    A number identifying a quantity of ammunition processed and manufactured
    a the same time.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '14' ,
             TYPE             'AN' ,
             PICTURE          'X(14)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ID-NO' ;
        CONTAINED:       IN  ExportWater ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

273     DEFINE ELEMENT                          LsOdrIdNo ;
        SYNONYM IS:     LEASE-O-IDENT-NO ,
                        LES-ORD-ID-NO ;
        DESCRIPTION;
    Lease Order Identification Number.
    A number used to identify the contract order number which covers the
    carrier's equipment leased by the government.
     ;
        KEYWORD IS:     'Container' ,
                        'CMM' ,
                        'LOB' ,
                        'CMM-DBMS' ,
                        'NOT IN DATA MODEL' ;
        SOURCE IS:      'TACCS-LOB DFD' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '5' ,
             TYPE             'AN' ,
             PICTURE          'X(05)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ID-NO' ,
             CMM-DBMS-NME     'LES-ORD-ID-NO' ,
             PROJ-DED-NME     'LEASE-O-IDENT-NO' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
274      DEFINE ELEMENT                          Lst-Two-Digit-CY ;
      DESCRIPTION;
   Last Two Digits of Calendar Year.
    ;
      KEYWORD IS:     'LOB' ,
                      'Container' ,
                      'Freight' ,
                      'TMAS' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB DED' ;
      ATTRIBUTE IS:
           FORMAT           'ROOT' ,
           PROJ-DED-NME      'LAST-TWO-DIGIT-CY' ,
           USE              'DATE' ,
           FIELD-LENGTH      '2' ,
           TYPE             'N' ,
           PICTURE          'X(02)' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      CONTAINED:        IN  DteCurr ;
      CONTAINED:        IN  JulianDte ;
      RANGE IS:        '00'
                        THROUGH '99' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB WORK GROUPS' ;
```

```
275      DEFINE ELEMENT                          LvlCd ;
         SYNONYM IS:     LEVEL-CD ,
                         LVL-CD ;
         DESCRIPTION;
    Level Code.
    A code which indicates the level of transportation control number
    affected in accomplishing a requested hold/diversion.
     ;
         KEYWORD IS:     'Container' ,
                         'CMM' ,
                         'LOB' ,
                         'CMM-DBMS' ,
                         'NOT IN DATA MODEL' ;
         SOURCE IS:      'TM 38-LZ1-2-1-C' ,
                         'TACCS-LOB DFD' ;
         ATTRIBUTE IS:
              FIELD-LENGTH     '1' ,
              TYPE             'N' ,
              PICTURE          '9(01)' ,
              SEC-CLASS        'UNCLASSIFIED' ,
              USE              'CODE' ,
              CMM-DBMS-NME      'LVL-CD' ,
              PROJ-DED-NME      'LEVEL-CD' ;
         CODE:           '1'
                          MEANS
                         'TCN of Request' ;
         CODE:           '2'
                          MEANS
                         'Next Highest Consol TCN' ;
         CODE:           '3'
                          MEANS
                         'Highest Consolidated TCN' ;
         CODE:           '4'
                          MEANS
                         'Split Shipment' ;
         RANGE IS:       '1'
                          THROUGH '4' ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB CONTAINER GROUP' ;
```

```
276       DEFINE ELEMENT                          MACOMCd ;
       DESCRIPTION;
   Major Command Code.
   Those codes assigned to organizations viewed to be major command
   elements within the theater as determined by the theater movement
   control agency.
    ;
       KEYWORD IS:     'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            Code-Tbl-Validation-Memo ;
       SOURCE IS:      'Copes Notes' ,
                       'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '3' ,
            TYPE             'AN' ,
            PICTURE          'X(03)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ;
       CODE:           'A'
                        MEANS
                       'USAREUR/Army HQ & AGNC II' ;
       CODE:           'AAA'
                        MEANS
                       'USAREUR HQ' ;
       CODE:           'AAB'
                        MEANS
                       '26 Spt Gp' ;
       CODE:           'AAC'
                        MEANS
                       'USMCA Heidelberg' ;
       CODE:           'ACA'
                        MEANS
                       'USA Special Forces Det' ;
       CODE:           'ADA'
                        MEANS
                       '1 PERSCOM' ;
       CODE:           'ADB'
                        MEANS
                       'AG Postal' ;
       CODE:           'AEA'
                        MEANS
                       '7 USA ATC' ;
       CODE:           'AFA'
                        MEANS
                       'WOZRAA (Berlin)' ;
       CODE:           'AGA'
                        MEANS
```

```
                '42 MP Group' ;
CODE:           'AHA'
                 MEANS
                '59 Ord Gp' ;
CODE:           'AZA'
                 MEANS
                '200 TAMMC' ;
CODE:           'B'
                 MEANS
                'V Corps Units' ;
CODE:           'BAA'
                 MEANS
                'V Corps HQ & Troops' ;
CODE:           'BBA'
                 MEANS
                '22 Sig Bde' ;
CODE:           'BDA'
                 MEANS
                '205 MP Gp' ;
CODE:           'BEA'
                 MEANS
                '130 Engr Bde' ;
CODE:           'BGA'
                 MEANS
                '11 ACR' ;
CODE:           'BHA'
                 MEANS
                '41 FA Bde' ;
CODE:           'BJA'
                 MEANS
                '42 FA Bde' ;
CODE:           'BKE'
                 MEANS
                '3 SUPCOM (19 MMC)' ;
CODE:           'BKY'
                 MEANS
                '3 SUPCOM (SPBS)' ;
CODE:           'BMA'
                 MEANS
                '3 AR Div' ;
CODE:           'BQA'
                 MEANS
                '8 IN Div' ;
CODE:           'BWA'
                 MEANS
                'V Corps Communities' ;
CODE:           'C'
                 MEANS
                'VII Corps' ;
```

```
CODE:          'CAA'
                MEANS
               'VII Corps HQ & Troops' ;
CODE:          'CBA'
                MEANS
               '11 Avn Gp Hq' ;
CODE:          'CCA'
                MEANS
               '93 Sig Bde' ;
CODE:          'CDA'
                MEANS
               '207 MP Gp' ;
CODE:          'CEA'
                MEANS
               '7 Engr Bde' ;
CODE:          'CFA'
                MEANS
               '17 FA Bde' ;
CODE:          'CGA'
                MEANS
               '2 ACR' ;
CODE:          'CHA'
                MEANS
               '72 FA Bde' ;
CODE:          'CJA'
                MEANS
               '210 FA Bde' ;
CODE:          'CKA'
                MEANS
               '2 SUPCOM' ;
CODE:          'CMA'
                MEANS
               '1 AR Div' ;
CODE:          'CPA'
                MEANS
               '1 IN Div' ;
CODE:          'CQA'
                MEANS
               '3 IN Div' ;
CODE:          'CWA'
                MEANS
               'VII Corps Communities' ;
CODE:          'E'
                MEANS
               '21 SUPCOM' ;
CODE:          'EAA'
                MEANS
               '21 SUPCOM HQ (9 Spt Ctr)' ;
CODE:          'EBA'
```

```
                MEANS
               'CEGE (For POMCUS Use)' ;
CODE:          'EEA'
                MEANS
               'CEGE TDA Units' ;
CODE:          'EFA'
                MEANS
               '60 Ord Gp' ;
CODE:          'EWA'
                MEANS
               '21 SUPCOM Communities' ;
CODE:          'EXA'
                MEANS
               'NATO/SHAPE Spt Gp' ;
CODE:          'F'
                MEANS
               '32d AADCOM' ;
CODE:          'FAA'
                MEANS
               '3 Ord' ;
CODE:          'FAY'
                MEANS
               '10 ADA Bde' ;
CODE:          'FCA'
                MEANS
               '69 ADA Bde' ;
CODE:          'FDA'
                MEANS
               '94 ADA Bde' ;
CODE:          'FEA'
                MEANS
               '108 ADA Bde' ;
CODE:          'G'
                MEANS
               'USASETAF' ;
CODE:          'GAA'
                MEANS
               '5 SUPCOM' ;
CODE:          'GBA'
                MEANS
               '528 FA Gp' ;
CODE:          'GCA'
                MEANS
               '558 FA Gp' ;
CODE:          'GDA'
                MEANS
               '559 FA Gp' ;
CODE:          'GEA'
                MEANS
```

```
                '325 IN 4 Bn' ;
CODE:           'GFA'
                 MEANS
                '8 Spt Gp Log' ;
CODE:           'GWA'
                 MEANS
                'USASETAF Communities' ;
CODE:           'H'
                 MEANS
                'USA Berlin Brigade' ;
CODE:           'HAA'
                 MEANS
                'USA Berlin Bde HQ' ;
CODE:           'J'
                 MEANS
                '7 MEDCOM' ;
CODE:           'JAA'
                 MEANS
                '7 MEDCOM HQ' ;
CODE:           'JBA'
                 MEANS
                '421 FMD Com' ;
CODE:           'JDA'
                 MEANS
                '7 MEDCOM MMC' ;
CODE:           'JEA'
                 MEANS
                'MEDDAC Nuernberg' ;
CODE:           'JFA'
                 MEANS
                '97 Gen Hosp' ;
CODE:           'JGA'
                 MEANS
                '30 Gen Hosp' ;
CODE:           'JHA'
                 MEANS
                '130 Gen Hosp' ;
CODE:           'JJA'
                 MEANS
                '196 Gen Hosp' ;
CODE:           'JKA'
                 MEANS
                'MEDDAC Augsburg' ;
CODE:           'JLA'
                 MEANS
                '2 Gen Hosp' ;
CODE:           'JMA'
                 MEANS
                '5 Gen Hosp' ;
```

```
CODE:           'JNA'
                 MEANS
                'MEDDAC Berlin' ;
CODE:           'JPA'
                 MEANS
                'MEDDAC Bremerhaven' ;
CODE:           'JQA'
                 MEANS
                'MEDDAC Vicenza' ;
CODE:           'JRA'
                 MEANS
                'MEDDAC Wuerzburg' ;
CODE:           'K'
                 MEANS
                '4 TRANSCOM' ;
CODE:           'KAA'
                 MEANS
                '4 TRANSCOM HQ' ;
CODE:           'M'
                 MEANS
                '18 Engr Bde' ;
CODE:           'MAA'
                 MEANS
                '18 Engr Bde HQ' ;
CODE:           'N'
                 MEANS
                '56 FA Bde' ;
CODE:           'NAA'
                 MEANS
                '56 FA Bde HQ' ;
CODE:           'NAY'
                 MEANS
                '56 FA Bde SPBS' ;
CONTAINED:       IN  Activity ;
CONTAINED:       IN  MACOM ;
IDENTIFIES:     MACOM ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB TMAS GROUP' ;
```

```
277      DEFINE ELEMENT                          MACOMCdDescr ;
     DESCRIPTION;
   Major Command Code Description.
   Identifies the unit name of a theater major command associated with
   the MACOM-Code.
    ;
       KEYWORD IS:     'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            TYPE              'AN' ,
            FIELD-LENGTH      '35' ,
            PICTURE           'X(35)' ,
            SEC-CLASS         'UNCLASSIFIED' ,
            USE               'NAME' ;
       CONTAINED:        IN  MACOM ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

278      DEFINE ELEMENT                          MAPO1st5 ;
       DESCRIPTION;
   Mailing Arm, Post Office Number or Zip Code, First Five Digits.
   The first five digits of the APO number or Zip Code in the DODAAC-
   Current mailing address.
    ;
       KEYWORD IS:     'Freight' ,
                       'EURAAF' ,
                       'Container' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            APO-1st-Five-Edit-Check-Memo ;
       SOURCE IS:      'TMAS DATA MODEL' ,
                       'FREIGHT DATA MODEL' ,
                       'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH      '5' ,
            TYPE              'N' ,
            PICTURE           '9(05)' ,
            DUI               'APO1st5' ,
            SEC-CLASS         'UNCLASSIFIED' ,
            USE               'ADDRESS' ;
       CONTAINED:        IN  Activity ;
       CONTAINED:        IN  CgoActivity ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
279     DEFINE ELEMENT                          MAPOLst4 ;
        DESCRIPTION;
    Mailing Army Post Office Number or Zip Code, Last Four Digits.
    The last four digits in a 9-digit designator of the APO number or
    Zip Code in the DODAAC-Current mailing address.
     ;
        KEYWORD IS:     'Freight' ,
                        'EURAAF' ,
                        'Container' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             APO-Last-Four-Edit-Check-Memo ;
        SOURCE IS:      'TMAS DATA MODEL' ,
                        'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '4' ,
             TYPE             'N' ,
             PICTURE          '9(04)' ,
             DUI              'APOLst4' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ADDRESS' ;
        CONTAINED:       IN  Activity ;
        CONTAINED:       IN  CgoActivity ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
280      DEFINE ELEMENT                          MAttn ;
      DESCRIPTION;
   Mailing Attention Line.
   The office symbol of the POC at the DODAAC-Current, e.g. AEXYZ-TM.
    ;
      KEYWORD IS:      'Freight' ,
                       'EURAAF' ,
                       'Container' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'TMAS DATA MODEL' ,
                       'FREIGHT DATA MODEL' ,
                       'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '20' ,
           TYPE             'AN' ,
           PICTURE          'X(20)' ,
           DUI              'Attn' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ;
      CONTAINED:       IN  Activity ;
      CONTAINED:       IN  CgoActivity ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
281      DEFINE ELEMENT                          MBldgNo ;
     DESCRIPTION;
  Mailing Building Number.
  The building number (if applicable) of the DODAAC-Current, used in the
  mailing address.
   ;
     KEYWORD IS:      'Freight' ,
                      'Container' ,
                      'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
     SOURCE IS:       'TMAS DATA MODEL' ,
                      'FREIGHT DATA MODEL' ,
                      'CONTAINER DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '10' ,
          TYPE             'AN' ,
          PICTURE          'X(10)' ,
          DUI              'Bldg' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'ADDRESS' ;
     CONTAINED:       IN  Activity ;
     CONTAINED:       IN  CgoActivity ;
     RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
282       DEFINE GROUP                              MCECd ;
          SYNONYM IS:     BMCT-Code ;
          DESCRIPTION;
     Movement Control Element Code.
     A two-digit code (made up of a first position MCEPrefix and
     MCESuffix) assigned to identify the MCE which currently services
     the Ship-to-DODAAC.
      ;
          KEYWORD IS:     'Contact' ,
                          'Freight' ,
                          'Container' ,
                          'TMAS' ,
                          'Data Model' ,
                          'LOB' ;
          SEE MEMO:
               Code-Tbl-Validation-Memo ;
          SOURCE IS:      'TMAS DATA MODEL' ,
                          'FREIGHT DATA MODEL' ,
                          'CONTAINER DATA MODEL' ;
          ATTRIBUTE IS:
               FIELD-LENGTH     '2' ,
               TYPE             'AN' ,
               PICTURE          'X(02)' ,
               SEC-CLASS        'UNCLASSIFIED' ,
               USE              'CODE' ,
               FORMAT           'DATACHAIN' ;
          CONSISTS OF:
               MCEPrefix ,
               MCESuffix ;
          CONTAINED:       IN  CgoAddress ;
          CONTAINED:       IN  CgoMCE ;
          CONTAINED:       IN  MovConElm ;
          IDENTIFIES:     CgoMCE ;
          IDENTIFIES:     MovConElm ;
          RESPONSIBLE PROBLEM DEFINER IS:
                          'TACCS-LOB TMAS GROUP' ;
```

```
283       DEFINE ELEMENT                          MCENme ;
          SYNONYM IS:     MCT-Unit-Designation ;
          DESCRIPTION;
     Movement Control Element Name.
     Identifies the name of the MCE which currently services the ShipToAAC.
      ;
          KEYWORD IS:     'Container' ,
                          'TMAS' ,
                          'Data Model' ,
                          'Freight' ,
                          'LOB' ;
          SOURCE IS:      'TMAS DATA MODEL' ,
                          'FREIGHT DATA MODEL' ,
                          'CONTAINER DATA MODEL' ;
          ATTRIBUTE IS:
               TYPE                'AN' ,
               FIELD-LENGTH         '35' ,
               PICTURE             'X(35)' ,
               SEC-CLASS           'UNCLASSIFIED' ,
               USE                 'NAME' ;
          CONTAINED:        IN  CgoMCE ;
          CONTAINED:        IN  MovConElm ;
          RESPONSIBLE PROBLEM DEFINER IS:
                          'TACCS-LOB TMAS GROUP' ;
```

```
284      DEFINE ELEMENT                          MCEPrefix ;
         SYNONYM IS:     MCT-Code ;
         DESCRIPTION;
   Movement Control Element Prefix.
   A code assigned to identify the MCT which currently services
   a DODAAC.
    ;
         KEYWORD IS:     'Freight' ,
                         'Container' ,
                         'TMAS' ,
                         'Data Model' ,
                         'LOB' ;
         SOURCE IS:      'Dooley Backchannel 23 Apr 86' ,
                         'TIP4 Fig 2' ,
                         'TIP5 Fig 1' ,
                         'TM 38-LZ1-11, App. B-3' ,
                         'HFMS Draft, Fig 18' ,
                         'FREIGHT DATA MODEL' ,
                         'TMAS DATA MODEL' ,
                         'CONTAINER DATA MODEL' ;
         ATTRIBUTE IS:
              FIELD-LENGTH     '1' ,
              TYPE             'AN' ,
              PICTURE          'X(01)' ,
              SEC-CLASS        'UNCLASSIFIED' ,
              USE              'CODE' ;
         CODE:            'A'
                          MEANS
                         'AAFES Giessen' ;
         CODE:            'B'
                          MEANS
                         'Bremerhaven' ;
         CODE:            'C'
                          MEANS
                         'MID, 1 TMCA' ;
         CODE:            'E'
                          MEANS
                         'Frankfurt' ;
         CODE:            'H'
                          MEANS
                         'Idar-Oberstein' ;
         CODE:            'J'
                          MEANS
                         'Kaiserslautern' ;
         CODE:            'M'
                          MEANS
                         'Mannheim' ;
         CODE:            'G'
                          MEANS
```

```
                    'Moenchengladbach' ;
CODE:               'N'
                     MEANS
                    'Nuernberg' ;
CODE:               'R'
                     MEANS
                    'Rotterdam' ;
CODE:               'T'
                     MEANS
                    'Stuttgart' ;
CODE:               'Z'
                     MEANS
                    'ATMCT Rhein Main' ,
                    'Rhein Main ATMCT' ;
CODE:               'P'
                     MEANS
                    'ATMCT Ramstein' ,
                    'Ramstein ATMCT' ;
CODE:               'K'
                     MEANS
                    '1 TMCA Freight Branch' ;
CONTAINED:           IN  CgoAddress ;
CONTAINED:           IN  CgoMCE ;
CONTAINED:           IN  FreightAdrs ;
CONTAINED:           IN  MCECd ;
CONTAINED:           IN  MovConElm ;
CONTAINED:           IN  STMRStop ;
CONTAINED:           IN  TMRRefNo ;
RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB WORK GROUPS' ;
```

```
285      DEFINE ELEMENT                          MCESuffix ;
       SYNONYM IS:     BMCT-Designator ;
       DESCRIPTION;
   Movement Control Element Suffix.
   A code assigned to identify the BMCT which currently services
   the ShipToAAC.
    ;
       KEYWORD IS:     'Freight' ,
                       'Container' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'TMAS DATA MODEL' ,
                       'FREIGHT DATA MODEL' ,
                       'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '1' ,
            TYPE             'AN' ,
            PICTURE          'X(01)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ;
       CONTAINED:        IN  CgoAddress ;
       CONTAINED:        IN  CgoMCE ;
       CONTAINED:        IN  FreightAdrs ;
       CONTAINED:        IN  MCECd ;
       CONTAINED:        IN  MovConElm ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
286      DEFINE ELEMENT                          MCETyCd ;
     DESCRIPTION;
   Movement Control Element Type Code.
   A code which uniquely identifies the type of MCE which currently
   services the ShipToAAC.
    ;
      KEYWORD IS:      'Container' ,
                       'Freight' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:       'TMAS DATA MODEL' ,
                       'FREIGHT DATA MODEL' ,
                       'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'A' ,
           PICTURE          'A(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:            'M'
                        MEANS
                       'MCT' ;
      CODE:            'B'
                        MEANS
                       'BMCT' ;
      CONTAINED:        IN  CgoMCE ;
      CONTAINED:        IN  MCEType ;
      CONTAINED:        IN  MovConElm ;
      IDENTIFIES:      MCEType ;
      RANGE IS:        'M' ,
                       'B' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
287      DEFINE ELEMENT                          MCETyCdDescr ;
     DESCRIPTION;
   Movement Control Element Type Code Description.
   A description of the code used to identify a specific type of
   movement control element.
    ;
      KEYWORD IS:     'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '30' ,
           USE              'TEXT' ,
           TYPE             'AN' ,
           PICTURE          'X(30)' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      CONTAINED:        IN  MCEType ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;

288      DEFINE ELEMENT                          MCityRgn ;
     DESCRIPTION;
   Mailing City/Region.
   The Bundespost city/region associated with the mailing address
   of the DODAAC-Current.  E.g., Oberursel/Taunus.
    ;
      KEYWORD IS:     'Freight' ,
                      'EURAAF' ,
                      'Container' ,
                      'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TMAS DATA MODEL' ,
                      'FREIGHT DATA MODEL' ,
                      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '25' ,
           PICTURE          'X(25)' ,
           TYPE             'AN' ,
           DUI              'CityRgn' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'NAME' ;
      CONTAINED:        IN  Activity ;
      CONTAINED:        IN  CgoActivity ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
289       DEFINE ELEMENT                          MCntry ;
        DESCRIPTION;
    Mailing Country.
    A code assigned to identify the country name in the mailing address
    of the DODAAC-Current.
     ;
        KEYWORD IS:      'Freight' ,
                         'EURAAF' ,
                         'Container' ,
                         'TMAS' ,
                         'Data Model' ,
                         'LOB' ;
        SOURCE IS:       'TMAS DATA MODEL' ,
                         'FREIGHT DATA MODEL' ,
                         'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '2' ,
             TYPE             'A' ,
             PICTURE          'A(02)' ,
             DUI              'CntryCd' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'CODE' ;
        CONTAINED:       IN  Activity ;
        CONTAINED:       IN  CgoActivity ;
        RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB TMAS GROUP' ;
```

```
290      DEFINE ELEMENT                          MDteLstUpd ;
       DESCRIPTION;
   Mailing Date Last Update.
   The last date that the DODAAC-Current mailing address was updated.
    ;
       KEYWORD IS:     'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            USE              'DATE' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            PICTURE          '9(05)' ,
            TYPE             'N' ,
            FIELD-LENGTH      '5' ,
            DUI              'JulianDte' ,
            FORMAT           'DATACHAIN' ;
       CONTAINED:       IN  Activity ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
291     DEFINE ELEMENT                          MINIndic ;
        SYNONYM IS:     INDIC-CD-MIN ,
                        MINIZ-IND-CD ;
        DESCRIPTION;
    Minimize Indicator Code.
    A code that indicates the message traffic restrictions which pertain
    to an activity.  I.e., whether minimize is in effect or not.
     ;
        KEYWORD IS:     'CMM' ,
                        'CMM-DBMS' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TM 38-LZ1-2-1-C' ,
                        'TMAS DATA MODEL' ,
                        'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'A' ,
             PICTURE          'A(01)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'FLAG' ,
             CMM-DBMS-NME      'MINIZ-IND-CD' ,
             PROJ-DED-NME      'INDIC-CD-MIN' ;
        CODE:           'Y'
                         MEANS
                        'YES' ;
        CODE:           'N'
                         MEANS
                        'NO' ;
        CONTAINED:       IN  FreightAdrs ;
        RANGE IS:       'Y' ,
                        'N' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
292      DEFINE ELEMENT                          MPostCd ;
      DESCRIPTION;
   Mailing Postal Code.
   The Bundepost Postal Code associated with the city in the mailing
   address of the DODAAC-Current.  E.g., in 6900 Heidelberg 1, the MPostCod
   is 6900.
    ;
      KEYWORD IS:      'Freight' ,
                       'EURAAF' ,
                       'Container' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'TMAS DATA MODEL' ,
                       'FREIGHT DATA MODEL' ,
                       'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '6' ,
           TYPE             'N' ,
           PICTURE          '9(06)' ,
           DUI              'PostCd' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ;
      CONTAINED:        IN  Activity ;
      CONTAINED:        IN  CgoActivity ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

293      DEFINE ELEMENT                          MSCCCO ;
      DESCRIPTION;
   Military Sealift Command Cargo Clearance Order.
   A number assigned by the Military Sealift Command to identify a cargo
   offering which has been cleared for transoceanic shipment.
    ;
      KEYWORD IS:      'Freight' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '8' ,
           TYPE             'AN' ,
           PICTURE          'X(08)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
294      DEFINE ELEMENT                          MStPOBox ;
      DESCRIPTION;
   Mailing Street Address.
   The street or post office box address of the DODAAC-
   Current, used in the mailing address.  E.g., Kaiserstrasse 52 or
   P.O. Box 1234.
    ;
      KEYWORD IS:      'Freight' ,
                       'Container' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'TMAS DATA MODEL' ,
                       'FREIGHT DATA MODEL' ,
                       'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '25' ,
           TYPE             'AN' ,
           PICTURE          'X(25)' ,
           DUI              'StAdrs' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ;
      CONTAINED:        IN  Activity ;
      CONTAINED:        IN  CgoActivity ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

295      DEFINE ELEMENT                          MTSR-Rmrk ;
      DESCRIPTION;
   Military Trailer Status Report Remarks.
   A text explanation used in conjunction with the asset status codes of
   "other".
    ;
      KEYWORD IS:      'Freight' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '20' ,
           TYPE             'AN' ,
           PICTURE          'X(20)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
296      DEFINE ELEMENT                          MUDsg ;
       DESCRIPTION;
   Mailing Unit Designation.
   The name of the unit associated with the mailing address
   of the DODAAC-Current.  E.g., 574 S&S Co.
    ;
       KEYWORD IS:      'Freight' ,
                        'EURAAF' ,
                        'Container' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
       SOURCE IS:       'TMAS DATA MODEL' ,
                        'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '35' ,
            TYPE             'AN' ,
            PICTURE          'X(35)' ,
            DUI              'UDsg' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ADDRESS' ;
       CONTAINED:        IN  Activity ;
       CONTAINED:        IN  CgoActivity ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
297      DEFINE ELEMENT                          MUDsgCont ;
      DESCRIPTION;
   Mailing Unit Designation Continued.
   The continuation line for the M-Unit-Designation mailing address.
    ;
      KEYWORD IS:      'Freight' ,
                       'EURAAF' ,
                       'Container' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'TMAS DATA MODEL' ,
                       'FREIGHT DATA MODEL' ,
                       'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '35' ,
           TYPE             'AN' ,
           PICTURE          'X(35)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ;
      CONTAINED:        IN  Activity ;
      CONTAINED:        IN  CgoActivity ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

298      DEFINE ELEMENT                          ManStaCd ;
      DESCRIPTION;
   Manifesting Station Code.
   The air terminal identification code of the actual air terminal
   preparing the truck manifest.
    ;
      KEYWORD IS:      'Freight' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE             'AN' ,
           PICTURE          'X(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CONTAINED:        IN  AirIdentNo ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
299      DEFINE ELEMENT                          MarCredNo ;
      DESCRIPTION;
   March Credit Number.
   The approval number assigned by the host nation approving authority
   authorizing a move which requires a highway clearance.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '10' ,
           TYPE             'AN' ,
           PICTURE          'X(10)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

300      DEFINE ELEMENT                          MgrCd ;
      DESCRIPTION;
   Manager Code.
   A code used to identify the materiel/system management center project
   officer.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '2' ,
           TYPE             'AN' ,
           PICTURE          'X(02)' ,
           CMM-DBMS-NME      'MGR-CD' ,
           FORMAT           'ROOT' ,
           PROJ-DED-NME      'MGR-CD' ,
           USE              'CODE' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      CONTAINED:       IN  MEvent ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
301      DEFINE ELEMENT                          MilCst ;
      DESCRIPTION;
   Military Cost.
   The estimated dollar cost of a movement transported via military
   highway.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DOL-CST' ;
      CONTAINED:       IN  FreightMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
302      DEFINE ELEMENT                          ModeCd ;
      DESCRIPTION;
   Mode Code.
   Identifies type of mode asset employed for a movement.  Used in the TMR
   Number.
    ;
      KEYWORD IS:     'Freight' ,
                      'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           ModeCd-Memo ,
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'CNTNR/FRT DATA MODEL' ,
                      'UR 55-X, Dec 1986, App. F' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'A' ,
           PICTURE          'A(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'A'
                       MEANS
                      'Commercial Highway' ;
      CODE:           'C'
                       MEANS
                      'Corps Air' ;
      CODE:           'D'
                       MEANS
                      'Driveaway/Towaway' ;
      CODE:           'F'
                       MEANS
                      'MAC' ;
      CODE:           'G'
                       MEANS
                      'AF Sherpa' ;
      CODE:           'K'
                       MEANS
                      'Rail' ;
      CODE:           'I'
                       MEANS
                      'Military Highway (Theater)' ;
      CODE:           'M'
                       MEANS
                      'Military Highway (V Corps)' ;
      CODE:           'O'
                       MEANS
                      'Organic Air (205th Avn)' ;
      CODE:           'Q'
```

```
                    MEANS
                   'Military Highway (VII Corps)' ;
CODE:              'W'
                    MEANS
                   'Water' ;
CONTAINED:          IN  CntnrMov ;
CONTAINED:          IN  ExportWater ;
CONTAINED:          IN  FreightMov ;
CONTAINED:          IN  MovModeCode ;
CONTAINED:          IN  Movement-Number ;
CONTAINED:          IN  TMR ;
CONTAINED:          IN  XRefTMR ;
IDENTIFIES:        MovModeCode ;
RANGE IS:          'A' ,
                   'C' ,
                   'D' ,
                   'F' ,
                   'G' ,
                   'K' ,
                   'I' ,
                   'M' ,
                   'O' ,
                   'R' ,
                   'W' ;
RESPONSIBLE PROBLEM DEFINER IS:
                   'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
303      DEFINE ELEMENT                          ModeCdDescr ;
        DESCRIPTION;
   Mode Code Description.
   A description of the Mode Code.
    ;
      KEYWORD IS:      'Container' ,
                       'Freight' ,
                       'Data Model' ,
                       'LOB' ;
      SEE MEMO:
           ModeCd-Memo ;
      SOURCE IS:       'CONTAINER DATA MODEL' ,
                       'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '25' ,
           PICTURE           'X(25)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'TEXT' ;
      CONTAINED:         IN  MovModeCode ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
304      DEFINE ELEMENT                          ModeMethShpmtCd ;
         SYNONYM IS:     MOD-METH-SHPMT ,
                         MODE-METHOD-SHPMT-CD ;
         DESCRIPTION;
    Mode/Method of Shipment Code.
    A code that identifies the mode/method of shipment within segments of
    the transportation pipeline.
     ;
         KEYWORD IS:     'Container' ,
                         'CMM' ,
                         'Freight' ,
                         'Data Model' ,
                         'LOB' ,
                         'CMM-DBMS' ;
         SEE MEMO:
              ModeCd-Memo ,
              Code-Tbl-Validation-Memo ;
         SOURCE IS:      'MILSTAMP, para B-86' ,
                         'CONTAINER DATA MODEL' ,
                         'FREIGHT DATA MODEL' ;
         ATTRIBUTE IS:
              FIELD-LENGTH     '1' ,
              TYPE             'AN' ,
              PICTURE          'X(01)' ,
              SEC-CLASS        'UNCLASSIFIED' ,
              USE              'CODE' ,
              CMM-DBMS-NME      'MOD-METH-SHPMT' ,
              PROJ-DED-NME      'MODE-METHOD-SHPMT-CD' ;
         CODE:           '2'
                          MEANS
                         'Government watercraft, barge' ;
         CODE:           '3'
                          MEANS
                         'RORO service' ;
         CODE:           '4'
                          MEANS
                         'Armed Forces Courier Service' ;
         CODE:           '5'
                          MEANS
                         'Surface small package carrier' ;
         CODE:           '6'
                          MEANS
                         'Military official mail' ;
         CODE:           '7'
                          MEANS
                         'Express mail' ;
         CODE:           '8'
                          MEANS
                         'Pipeline' ;
```

```
CODE:       '9'
             MEANS
            'Local delivery by truck' ;
CODE:       'A'
             MEANS
            'Motor, truckload' ;
CODE:       'B'
             MEANS
            'Motor, less than truckload' ;
CODE:       'C'
             MEANS
            'Van (unpacked property)' ;
CODE:       'D'
             MEANS
            'Driveaway/towaway' ;
CODE:       'E'
             MEANS
            'Bus' ;
CODE:       'F'
             MEANS
            'Military Airlift Command' ;
CODE:       'G'
             MEANS
            'Surface parcel post' ;
CODE:       'H'
             MEANS
            'Air parcel post' ;
CODE:       'I'
             MEANS
            'Government truck (theater)' ;
CODE:       'J'
             MEANS
            'Air-small package carrier' ;
CODE:       'K'
             MEANS
            'Rail, carload' ;
CODE:       'L'
             MEANS
            'Rail, less than carload' ;
CODE:       'M'
             MEANS
            'Surface freight forwarder' ;
CODE:       'N'
             MEANS
            'LOGAIR' ;
CODE:       'O'
             MEANS
            'Organic military air (Incl-HN)' ;
CODE:       'P'
```

```
                    MEANS
                   'TGBL' ;
CODE:              'Q'
                    MEANS
                   'Commercial air freight' ;
CODE:              'R'
                    MEANS
                   'Reserved for future use' ;
CODE:              'S'
                    MEANS
                   'Scheduled truck service' ;
CODE:              'T'
                    MEANS
                   'Air freight forwarder' ;
CODE:              'U'
                    MEANS
                   'QUICKTRANS' ;
CODE:              'V'
                    MEANS
                   'SEAVAN' ;
CODE:              'W'
                    MEANS
                   'Water/river/lake/coastal (CMM)' ;
CODE:              'X'
                    MEANS
                   'Bearer, walk-thru cust pickup' ;
CODE:              'Y'
                    MEANS
                   'Military intratheater airlift' ;
CODE:              'Z'
                    MEANS
                   'Military Sealift Command' ;
CONTAINED:          IN  CntnrMov ;
CONTAINED:          IN  FreightMov ;
CONTAINED:          IN  ShpmtMethod ;
IDENTIFIES:        ShpmtMethod ;
RANGE IS:          '2'
                    THROUGH 'Y' ,
                   'A'
                    THROUGH 'Z' ;
RESPONSIBLE PROBLEM DEFINER IS:
                   'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
305      DEFINE ELEMENT                          ModeMethShpmtCdDescr ;
     DESCRIPTION;
  Mode/Method of Shipment Code Description.
  The description of the codes used to identify the method of the
  shipment.
   ;
     KEYWORD IS:      'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
     SOURCE IS:       'MILSTAMP Para B-86' ,
                      'CMM pg C-287' ,
                      'TM 38-LZ1-2-1-C' ,
                      'CONTAINER DATA MODEL' ,
                      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '25' ,
          TYPE             'AN' ,
          PICTURE          'X(25)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'TEXT' ;
     CONTAINED:        IN  ShpmtMethod ;
     RANGE IS:        'A'
                       THROUGH 'Z' ,
                      '2'
                       THROUGH '9' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;

306      DEFINE ELEMENT                          Model ;
     DESCRIPTION;
  Model or Vehicle Type.
  A style or design of a vehicle or equipment produced by a specific
  manufacturers, e.g., M60A1 (Tank Combat).
   ;
     KEYWORD IS:      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
     SOURCE IS:       'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '6' ,
          TYPE             'AN' ,
          PICTURE          'X(06)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'ID-NO' ;
     CONTAINED:        IN  ExportWater ;
     RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
307      DEFINE ELEMENT                          MovCompDte ;
       DESCRIPTION;
   Movement Complete Date.
   A system-generated date in the move record which indicates when the
   movement has been completed.  It is the date that the movement complete
   flag is turned on.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            TYPE             'N' ,
            FIELD-LENGTH      '5' ,
            PICTURE          '9(05)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'DATE' ,
            DUI              'JulianDte' ,
            FORMAT           'DATACHAIN' ;
       CONTAINED:        IN  FreightMov ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;

308      DEFINE ELEMENT                          MovCompFlag ;
       DESCRIPTION;
   Movement Complete Flag.
   A flag in the move record which indiates when a movement is
   complete.
    ;
       KEYWORD IS:     'Container' ,
                       'Data Model' ,
                       'LOB' ,
                       'Freight' ;
       SOURCE IS:      'CONTAINER DATA MODEL' ,
                       'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH      '1' ,
            TYPE             'AN' ,
            PICTURE          'X(01)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'FLAG' ;
       CONTAINED:        IN  CntnrMov ;
       CONTAINED:        IN  FreightMov ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
309      DEFINE ELEMENT                          MovEvntCd ;
     DESCRIPTION;
  Movement Event Code.
  The 3-position Document Identifier Code (DIC).  A code which identifies
  a particular type transaction being input into the system.  E.g., input
  transaction, requests for hold diversion, status cards, and correc-
  tion.
   ;
     KEYWORD IS:      'Freight' ,
                      'Container' ,
                      'Data Model' ,
                      'LOB' ;
     SEE MEMO:
          Code-Tbl-Validation-Memo ;
     SOURCE IS:       'CONTAINER DATA MODEL' ,
                      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '3' ,
          TYPE            'AN' ,
          PICTURE         'X(03)' ,
          CMM-DBMS-NME     'DIC' ,
          PROJ-DED-NME     'DIC' ,
          REGULATION      'DOD 4500.32R & TM 38-LZ1-11' ,
          USE             'CODE' ,
          SEC-CLASS       'UNCLASSIFIED' ;
     CONTAINED:        IN  CntnrDiscrp ;
     CONTAINED:        IN  FrtDiscrp ;
     CONTAINED:        IN  FrtMEvent ;
     CONTAINED:        IN  MEvent ;
     CONTAINED:        IN  MEventType ;
     CONTAINED:        IN  MovEvntTyCd ;
     IDENTIFIES:      CntnrDiscrp ;
     IDENTIFIES:      FrtDiscrp ;
     IDENTIFIES:      FrtMEvent ;
     IDENTIFIES:      MEvent ;
     IDENTIFIES:      MEventType ;
     RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
310      DEFINE ELEMENT                          MovEvntDescr ;
      DESCRIPTION;
   Movement Event Description.
   A description of the type of movement event being reported.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ,
                      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '15' ,
           PICTURE           'X(15)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'TEXT' ;
      CONTAINED:        IN  MEventType ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
311      DEFINE GROUP                          MovEvntTyCd ;
      DESCRIPTION;
   Movement Event Type Code.
   This is not being used by the data model as an attribute.  However,
   it explains the dependancy that Movement Event Code (DIC) has with
   Event Type.  That is, one cannot occur without the other.

   Examples are:     TTU 3
                     TTU 4
                     TTU 5
                     TTU 6
                     TTU C
                     TTU D
                     TTU E
                     TTU F
    ;
      KEYWORD IS:      'Container' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ,
                       'Freight' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'AN' ,
           PICTURE          'X(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           FORMAT           'DATACHAIN' ;
      CONSISTS OF:
           MovEvntCd ,
           EvntTy ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

312 DEFINE GROUP Movement-Number ;
DESCRIPTION;
Movement Number.
An alphanumeric number assigned to a movement to control the movement of cargo from its origin to its destination. It normally consists of the TMR and the TIN, but can take on different configurations depending on the transaction. Alternate configurations are:

a. FWTNo
TIN

b. GBLNo
TIN

c. CntnrOwnAbbr
CntnrNo

d. TCN

e. VoyDocuNoFltNo

;

KEYWORD IS: 'Freight' ,
'LOB' ,
'NOT IN DATA MODEL' ,
'Container' ,
'CMM' ,
'CMM-DBMS' ;
SOURCE IS: 'TACCS-LOB FREIGHT DFD' ,
'TACCS-LOB CONTAINER DFD' ;
ATTRIBUTE IS:
FIELD-LENGTH '20' ,
TYPE 'AN' ,
PICTURE 'X(20)' ,
USE 'ID-NO' ,
SEC-CLASS 'UNCLASSIFIED' ,
FORMAT 'DATACHAIN' ,
CMM-DBMS-NME 'MOV-NO' ,
PROJ-DED-NME 'MOV-NO-NEW' ;
CONSISTS OF:
TMRPrefix ,
DestMCEPrefix ,
StpSeqNo ,
SpIntCd ,
ModeCd ,
TransPriCd ,
TIN ;
RESPONSIBLE PROBLEM DEFINER IS:
'TACCS-LOB CNTNR/FRT GROUP' ;

```
313      DEFINE ELEMENT                          MsgCdId ;
      DESCRIPTION;
   Message Code Identifier.
   A code used to identify types of transactions entering the system
   which allows the system to automatically perform the designated
   function.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOD' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE             'AN' ,
           PICTURE          'X(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'CTA'
                       MEANS
                      'Code table add trns' ;
      CODE:           'CTC'
                       MEANS
                      'Code table change trns' ;
      CODE:           'CTD'
                       MEANS
                      'Code table delete trns' ;
      CODE:           'UPC'
                       MEANS
                      'Cancel trns' ;
      CODE:           'CR3'
                       MEANS
                      'Change to Cargo File trns' ;
      CODE:           'ROD'
                       MEANS
                      'Rept of delivery trns' ;
      CODE:           'COD'
                       MEANS
                      'Change rept of shpmt trns' ;
      CODE:           'UPD'
                       MEANS
                      'Rept of shipment trns' ;
      CODE:           'CPD'
                       MEANS
                      'Change rept of shpmt trns' ;
      CODE:           'FRC'
                       MEANS
                      'Destination frt record trns' ;
```

```
        CODE:           'FR1'
                         MEANS
                        'Destination TIN rec trns' ;
        CODE:           'FR2'
                         MEANS
                        'Destination frt remark trns' ;
        CODE:           'NCF'
                         MEANS
                        'HL/Ammo nonconfirmation trns' ;
        CODE:           'POC'
                         MEANS
                        'POC update trns' ;
        CONTAINED:       IN  MsgCd ;
        IDENTIFIES:     MsgCd ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

314       DEFINE ELEMENT                        MsgCdIdDescr ;
        DESCRIPTION;
    Message Code Identifier Description.
    The description of a Message Code Identifier.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '35' ,
             TYPE             'AN' ,
             PICTURE          'X(35)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'TEXT' ;
        CONTAINED:       IN  MsgCd ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
315     DEFINE ELEMENT                          MthCd ;
      DESCRIPTION;
   Month Code.
   A code that indicates the month of the year.  Used in the TMR Number.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'Copes Notes' ,
                      'TIP4' ,
                      'HFMS Draft, Fig 17' ,
                      'FREIGHT DATA MODEL' ,
                      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'A' ,
           PICTURE          'A(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'A'
                       MEANS
                      'January' ;
      CODE:           'B'
                       MEANS
                      'February' ;
      CODE:           'C'
                       MEANS
                      'March' ;
      CODE:           'D'
                       MEANS
                      'April' ;
      CODE:           'E'
                       MEANS
                      'May' ,
      CODE:           'F'
                       MEANS
                      'June' ;
      CODE:           'G'
                       MEANS
                      'July' ;
      CODE:           'H'
                       MEANS
                      'August' ;
      CODE:           'I'
                       MEANS
                      'September' ;
```

```
        CODE:           'J'
                         MEANS
                        'October' ;
        CODE:           'K'
                         MEANS
                        'November' ;
        CODE:           'L'
                         MEANS
                        'December' ;
        CONTAINED:       IN  CntnrMov ;
        CONTAINED:       IN  FreightMov ;
        CONTAINED:       IN  Month ;
        CONTAINED:       IN  STMRStop ;
        CONTAINED:       IN  TMRPrefix ;
        CONTAINED:       IN  TMRRefNo ;
        CONTAINED:       IN  XRefTMRPrefix ;
        IDENTIFIES:     Month ;
        RANGE IS:       'A'
                         THROUGH 'L' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;

316       DEFINE ELEMENT                        MthCdDescr ;
        DESCRIPTION;
    Month Code Description.
    The description of the codes that represent months of the year.
     ;
        KEYWORD IS:     'Freight' ,
                        'Container' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH    '3' ,
             TYPE            'A' ,
             PICTURE         'A(03)' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             USE             'TEXT' ;
        CONTAINED:       IN  Month ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
317       DEFINE ELEMENT                          MultiStpNo ;
        DESCRIPTION;
    Multi Stop Number.
    Identifies the stop sequence of a container.
     ;
        KEYWORD IS:      'Container' ,
                         'Data Model' ,
                         'LOB' ;
        SOURCE IS:       'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'AN' ,
             PICTURE          'X(01)' ,
             CMM-DBMS-NME      'STP-IND-CNTN' ,
             PROJ-DED-NME      'STP-OFF-INDIC-CD-CNTNR' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'SEQ-NO' ;
        CODE:            '1'
                          MEANS
                         'First Stop' ;
        CODE:            '2'
                          MEANS
                         'Second Stop' ;
        CODE:            '3'
                          MEANS
                         'Third Stop' ;
        CODE:            '4'
                          MEANS
                         'Fourth Stop' ;
        CODE:            '5'
                          MEANS
                         'Fifth Stop' ;
        CODE:            '6'
                          MEANS
                         'Sixth Stop' ;
        CODE:            '7'
                          MEANS
                         'Seventh Stop' ;
        CODE:            '8'
                          MEANS
                         'Eighth Stop' ;
        CODE:            '9'
                          MEANS
                         'Ninth Stop' ;
        CODE:            'Z'
                          MEANS
                         'Last Stop' ;
        CONTAINED:        IN  CntnrMovStp ;
        RANGE IS:        '1'
```

```
                    THROUGH '9' ,
                   'Z' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                   'TACCS-LOB CONTAINER GROUP' ;

318    DEFINE ELEMENT                          NEW ;
     DESCRIPTION;
   Net Explosive Weight.
   The weight by class, in pounds, of a shipment unit of explosives,
   excluding the packing materials or containers.
    ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '6' ,
          TYPE             'N' ,
          PICTURE          '9(06)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'MEASURE' ;
     CONTAINED:       IN  ExportWater ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;

319    DEFINE ELEMENT                          NNSN ;
     DESCRIPTION;
   National/NATO Stock Number.
   A two-part number assigned to each item of supply which is
   repetitively used, purchased, stocked or distributed within
   the Federal Government.
    ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '13' ,
          TYPE             'AN' ,
          PICTURE          'X(13)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'ID-NO' ;
     CONTAINED:       IN  ExportWater ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;
```

```
320      DEFINE ELEMENT                          NetExploWt ;
      DESCRIPTION;
   Net Explosive Weight.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '6' ,
           TYPE             'N' ,
           PICTURE          '9(06)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'MEASURE' ;
      CONTAINED:        IN  ExportAir ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

321      DEFINE ELEMENT                          New-ModeCd ;
      DESCRIPTION;
   New Mode Code.
   Identifies type of mode asset employed for a movement which has been
   referred for another mode. The new ModeCd will be the mode code of the
   new TMRPrefix.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'A' ,
           PICTURE          'A(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           DUI              'ModeCd' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
322      DEFINE ELEMENT                          New-SerNo ;
       DESCRIPTION;
   New Serial Number.
   The new number assigned by an origin MCT when a TMR is referred for
   another mode and an XRefTMR is used. The New SerNo will be the SerNo of
   the new TMRPrefix.
    ;
       KEYWORD IS:     'Freight' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH    '4' ,
            TYPE            'N' ,
            PICTURE         '9(04)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'ID-NO' ,
            DUI             'SerNo' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;

323      DEFINE ELEMENT                          NewEvntLoc ;
       DESCRIPTION;
   New Event Location
   The DODAAC or event location code of the activity where a new event
   has or will occur.
    ;
       KEYWORD IS:     'Container' ,
                       'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'CONTAINER DATA MODEL' ,
                       'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH    '6' ,
            TYPE            'AN' ,
            PICTURE         'X(06)' ,
            DUI             'AAC' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'CODE' ;
       CONTAINED:       IN  FrtMEvent ;
       CONTAINED:       IN  MEvent ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
324       DEFINE ELEMENT                          NewFWTNo ;
      DESCRIPTION;
   New Freight Warrant Number.
   Identifies the new freight warrant used when an additional movement is
   required, such as a respot or reconsignment.
    ;
      KEYWORD IS:      'Freight' ,
                       'Data Model' ,
                       'LOB' ;
      SOURCE IS:       'FREIG...  ...A MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '12' .
           TYPE             'AN' ,
           PICTURE          'X(12)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      CONTAINED:         IN  FrtMEvent ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
325     DEFINE ELEMENT                          NewModeMethShpmtCd ;
        DESCRIPTION;
    New Mode/Method of Shipment Code.
    Identifies the new type of assets employed for a movement.
     ;
        KEYWORD IS:     'Container' ,
                        'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        SOURCE IS:      'CONTAINER DATA MODEL' ,
                        'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'AN' ,
             PICTURE          'X(01)' ,
             DUI              'ModeMethShpmtCd' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'CODE' ;
        CONTAINED:        IN  FrtMEvent ;
        CONTAINED:        IN  MEvent ;
        RANGE IS:       'A' ,
                        'G' ,
                        'I' ,
                        'K' ,
                        'M' ,
                        'N' ,
                        'T' ,
                        'V' ,
                        'W' ,
                        'Z' ,
                        '3' ,
                        '9' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
326       DEFINE GROUP                          NewMovNo ;
      DESCRIPTION;
   New Movement Number.
   A movement number is an identifier assigned to a movement which is used
   for control between origin and destination. A new movement number
   results from a conveyance change. It may consist of the combination
   of FWTNo and TIN, TMR and TIN, CntnrOwnAbbr and CntnrNo, TCN, or
   VoyDocuNoFltNo, with blank fields, as necessary.
    ;
      KEYWORD IS:      'Data Model' ,
                       'LOB' ,
                       'Container' ;
      SOURCE IS:       'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '20' ,
           PICTURE           'X(20)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'ID-NO' ,
           PROJ-DED-NME       'MOV-NO-NEW' ,
           FORMAT            'DATACHAIN' ,
           DDI               'Movement-Number' ,
           CMM-DBMS-NME       'NEW-MOV-NO' ;
      CONTAINED:         IN  MEvent ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
327      DEFINE ELEMENT                          NewTAC ;
      DESCRIPTION;
   New Transportation Account Code.
   The code that identifies the new appropriate DOD agency, or contractor
   and transportation account chargeable for the movement after a
   reconsignment or diversion.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'AN' ,
           PICTURE          'X(04)' ,
           DUI              'TAC' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           FORMAT           'DATACHAIN' ;
      CODE:           'A'
                       MEANS
                      'Army' ;
      CODE:           'F'
                       MEANS
                      'Air Force' ;
      CODE:           'H'
                       MEANS
                      'Other DOD' ;
      CODE:           'J'
                       MEANS
                      'Joint Task Force 8' ;
      CODE:           'M'
                       MEANS
                      'Marine Corps' ;
      CODE:           'N'
                       MEANS
                      'Navy' ;
      CODE:           'S'
                       MEANS
                      'DSA' ;
      CODE:           'T'
                       MEANS
                      'Contractor' ;
      CODE:           'X'
                       MEANS
                      'Government Agencies' ;
      CODE:           'Z'
                       MEANS
                      'Coast Guard' ;
```

```
        CODE:           '2'
                         MEANS
                        'Agency for Internl Development' ;
        CODE:           '4'
                         MEANS
                        'Agency for Internl Development' ;
        CODE:           '7'
                         MEANS
                        'Agency for Internl Development' ;
        CONTAINED:       IN  MEvent ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;

328       DEFINE ELEMENT                        NewTIN ;
        DESCRIPTION;
    New Transportation Identification Number.
    Identifies the new transportation identification number assigned
    after a change of conveyance event.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH    '8' ,
             TYPE            'AN' ,
             PICTURE         'X(08)' ,
             DUI             'TIN' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             USE             'ID-NO' ;
        CONTAINED:       IN  FrtMEvent ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
329       DEFINE GROUP                              NewTMR ;
      DESCRIPTION;
   New Transportation Movements Release Number.
   The new transportation movement release number (TMR) used to
   control a cargo shipment after a reconsignment.
    ;
      KEYWORD IS:      'Data Model' ,
                       'Freight' ,
                       'LOB' ;
      SOURCE IS:       'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '12' ,
           TYPE             'AN' ,
           PICTURE          'X(12)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ,
           DUI              'TMR' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:        IN  FrtMEvent ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
330     DEFINE ELEMENT                          NewTyCarrCd ;
      DESCRIPTION;
   New Type Carrier Code.
   The new type carrier after a change in conveyance occurs.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'CONTAINER DATA MODEL' ,
                      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           DUI              'TyCarrCd' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'C'
                       MEANS
                      'Commercial' ;
      CODE:           'H'
                       MEANS
                      'Host Nation' ;
      CODE:           'M'
                       MEANS
                      'Military' ;
      CODE:           'N'
                       MEANS
                      'Non Appropriated Funds' ;
      CONTAINED:       IN  FrtMEvent ;
      CONTAINED:       IN  MEvent ;
      RANGE IS:       'C' ,
                      'H' ,
                      'M' ,
                      'N' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
331      DEFINE ELEMENT                          NewTyMovNoCd ;
       DESCRIPTION;
    New Type Movement Number Code.
    The new type movement number code to be used as a result of a change
    in conveyance.
     ;
        KEYWORD IS:     'Container' ,
                        'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'CMM' ;
        SOURCE IS:      'CONTAINER DATA MODEL' ,
                        'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'A' ,
             PICTURE          'A(01)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'CODE' ,
             DUI              'TyMovNoCd' ;
        CODE:           'C'
                         MEANS
                        'SEAVAN TCN' ;
        CODE:           'M'
                         MEANS
                        'TMR/TIN' ;
        CODE:           'F'
                         MEANS
                        'Freight Warrant/TIN' ;
        CODE:           'V'
                         MEANS
                        'Van Owner/Van No' ;
        CODE:           'D'
                         MEANS
                        'Voy Docu No' ;
        CONTAINED:       IN  FrtMEvent ;
        CONTAINED:       IN  MEvent ;
        RANGE IS:       'C' ,
                        'M' ,
                        'F' ,
                        'V' ,
                        'D' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
332      DEFINE ELEMENT                        No-Hist-Disks-per-Month ;
      DESCRIPTION;
   Number of History Disks per Month.
   The number of history storage disks that have been used for a specific
   calendar month to retain the selected history record data.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE             'N' ,
           FIELD-LENGTH      '4' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

333      DEFINE ELEMENT                        No-Records-on-Month-Disks ;
      DESCRIPTION;
   Number of Records on Month Disks.
   The number of history records stored on any calendar month disk(s).
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE             'N' ,
           FIELD-LENGTH      '4' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
334      DEFINE ELEMENT                    Number-463L-Pallet-Criteria ;
     DESCRIPTION;
Number of 463L Pallets Criteria.
This parameter set s the criteria for the allowable number of 463L
pallets on-hand at an activity, which if exceeded will cause the
activity name to appear on a report.
 ;
    KEYWORD IS:     'Freight' ,
                    'LOB' ,
                    'NOT IN DATA MODEL' ;
    SOURCE IS:      'TACCS-LOB CONTAINER DFD' ,
                    'TACCS-LOB FREIGHT DFD' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '2' ,
         TYPE             'N' ,
         PICTURE          '9(02)' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'SYS-PAR' ,
         DEFAULT-VALUE     '25' ;
    CONTAINED:       IN  System-Parameter-Record ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB CONTAINER GROUP' ;
```

```
335     DEFINE ELEMENT                          OceanCarrAbbr ;
        SYNONYM IS:     OC-CARR-ABB ,
                        OCEAN-CARR-ABBR ,
                        Ocean-Carrier ;
        DESCRIPTION;
    Ocean Carrier Abbreviaiton.
    Abbreviation identifying the ocean carrier who is actually transporting
    the container.
     ;
        KEYWORD IS:     'Container' ,
                        'Data Model' ,
                        'LOB' ,
                        'Freight' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        SOURCE IS:      'FREIGHT DATA MODEL' ,
                        'CONTAINER DATA MODEL' ,
                        'MILSTAMP PARA B-47' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '4' ,
             TYPE             'AN' ,
             PICTURE          'X(04)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'CODE' ,
             CMM-DBMS-NME      'OC-CARR-ABB' ,
             PROJ-DED-NME      'OCEAN-CARR-ABBR' ;
        CODE:           'ACAD'
                         MEANS
                        'ACADIAN Marinea Services' ;
        CODE:           'ACSL'
                         MEANS
                        'American Coastal Lines' ;
        CODE:           'ALHT'
                         MEANS
                        'Alaska Hydro-Train Corp.' ;
        CODE:           'APLS'
                         MEANS
                        'American President Lines' ;
        CODE:           'BSLU'
                         MEANS
                        'Blue Star Line, LTD' ;
        CODE:           'CDBA'
                         MEANS
                        'Cobelfret' ;
        CODE:           'CENT'
                         MEANS
                        'Central Gulf Lines' ;
        CODE:           'CLIW'
                         MEANS
```

```
                'Columbus Lines, Inc.' ;
CODE:           'DSSL'
                 MEANS
                'Delta Steamship Lines' ;
CODE:           'EACL'
                 MEANS
                'EAC Lines' ;
CODE:           'FRLN'
                 MEANS
                'Farrell Lines' ;
CODE:           'FALU'
                 MEANS
                'Foss Alaska Lines' ;
CODE:           'HMRL'
                 MEANS
                'Hawaiian Marine Lines' ;
CODE:           'ISSU'
                 MEANS
                'Icelandic Steamship Co.' ;
CODE:           'KNUU'
                 MEANS
                'Knutsen Lines' ;
CODE:           'LAVS'
                 MEANS
                'Lavino Shipping Co.' ;
CODE:           'LYKU'
                 MEANS
                'Lykes Brothers Steamship Co.' ;
CODE:           'MATS'
                 MEANS
                'Matson Navigation Co.' ;
CODE:           'MMCL'
                 MEANS
                'Moore McCormack Lines' ;
CODE:           'NLBU'
                 MEANS
                'Nedlloyd Lines' ;
CODE:           'PADU'
                 MEANS
                'Pacific Australian Direct Line' ;
CODE:           'PEEX'
                 MEANS
                'Pacific Europe Express Line' ;
CODE:           'PGLU'
                 MEANS
                'Prudential Graco Lines' ;
CODE:           'PITL'
                 MEANS
                'Pacific Island Transport Line' ;
```

```
CODE:           'PMOL'
                 MEANS
                'PM&O Lines' ;
CODE:           'POLY'
                 MEANS
                'Polynesia Line' ;
CODE:           'PRMU'
                 MEANS
                'Puerto Rico Maritime Shipping' ;
CODE:           'SEAU'
                 MEANS
                'Sealand Service' ;
CODE:           'SSSC'
                 MEANS
                'South Seas Steamships Company' ;
CODE:           'SSTB'
                 MEANS
                'Samson Tug and Barge Co.' ;
CODE:           'TFEI'
                 MEANS
                'Trans Freight Lines' ;
CODE:           'TMIT'
                 MEANS
                'Trailer Marine Terminal Corp.' ;
CODE:           'TOTE'
                 MEANS
                'Totem Ocean Trailer Express' ;
CODE:           'USLU'
                 MEANS
                'United Status Lines, Inc.' ;
CODE:           'WSLL'
                 MEANS
                'Waterman Steamship Corp.' ;
CODE:           'USAA'
                 MEANS
                'US Army Milvan (Ammo)' ;
CODE:           'MSCL'
                 MEANS
                'Military Sealift Comm Leased' ;
CODE:           'XXXX'
                 MEANS
                'Owner code not marked SEAVAN' ;
CONTAINED:       IN  ExportWater ;
CONTAINED:       IN  OceanCarr ;
CONTAINED:       IN  Voyage ;
IDENTIFIES:     OceanCarr ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB FREIGHT GROUP' ;
```

```
336      DEFINE ELEMENT                          OceanCarrNme ;
     DESCRIPTION;
Ocean Carrier Name.
The name of an ocean carrier.  It is used to identify ocean carrier
abbreviations.
 ;
     KEYWORD IS:     'Container' ,
                     'LOB' ,
                     'Data Model' ;
     SOURCE IS:      'CONTAINER DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '25' ,
          TYPE             'AN' ,
          PICTURE          'X(25)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'TEXT' ;
     CONTAINED:       IN  OceanCarr ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB CONTAINER GROUP' ;

337      DEFINE ELEMENT                          OrdnDescr ;
     DESCRIPTION;
Ordinal Description.
Describes the type of equipment identified by an ordinal number for rail
shipment.
 ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '50' ,
          TYPE             'AN' ,
          PICTURE          'X(50)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'TEXT' ;
     CONTAINED:       IN  OrdinalCd ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;
```

```
338      DEFINE ELEMENT                          OrdnNo ;
      DESCRIPTION;
   Ordinal Number.
   A number assigned by the German Federal Railway (DB) and identifies
   specific equipment.
    ;
      KEYWORD IS:      'Freight' ,
                       'Data Model' ,
                       'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:       'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '7' ,
           TYPE             'N' ,
           PICTURE          '9(07)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      CONTAINED:         IN  OrdinalCd ;
      CONTAINED:         IN  RailMov ;
      IDENTIFIES:      OrdinalCd ;
      IDENTIFIES:      RailMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
339     DEFINE ELEMENT                          OrigCd ;
        SYNONYM IS:     ORIG-CD ;
        DESCRIPTION;
    Origin Code.
    A code used as a means of identifying organizational elements
    responsible for submitting input data to CMM.  The first position
    designates the major command and also indicates the cargo category,
    e.g. Code LG4 pertains to HQ 37th Trans Gp, Container and MG4
    pertains to HQ 37th Trans Gp, Breakbulk.
     ;
        KEYWORD IS:     'CMM-DBMS' ,
                        'Container' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TM 38-LZ1-11, App.B-1' ,
                        'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '3' ,
             FORMAT          'DATACHAIN' ,
             PICTURE         'X(03)' ,
             TYPE            'AN' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             USE             'CODE' ,
             CMM-DBMS-NME     'ORICO' ,
             PROJ-DED-NME     'ORIG-CD' ;
        CONTAINED:       IN  MEvent ;
        CONTAINED:       IN  ORICO ;
        IDENTIFIES:     ORICO ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
340      DEFINE ELEMENT                          OrigCdDescr ;
        DESCRIPTION;
   Origin Code Description.
   Identifies the name of organizational element responsible for submitting
   input data to CMM.
    ;
       KEYWORD IS:     'Container' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'CONTAINER DATA MODEL' ,
                       'TM 38-LZ1-11, App. B-1' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '25' ,
            TYPE             'AN' ,
            PICTURE          'X(25)' ,
            USE              'NAME' ,
            SEC-CLASS        'UNCLASSIFIED' ;
       CONTAINED:       IN  ORICO ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
341      DEFINE ELEMENT                          OrigCdTy ;
      DESCRIPTION;
   Origin Code Type.
   A code which indicates whether the origin code pertains to freight
   (breakbulk) or containers.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'A' ,
           PICTURE          'A(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'C'
                       MEANS
                      'Container' ;
      CODE:           'B'
                       MEANS
                      'Breakbulk' ;
      CONTAINED:       IN  MEvent ;
      CONTAINED:       IN  ORICO ;
      CONTAINED:       IN  ORICOTy ;
      IDENTIFIES:     ORICO ;
      IDENTIFIES:     ORICOTy ;
      RANGE IS:       'C' ,
                      'F' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
342      DEFINE ELEMENT                          OrigCdTyDescr ;
      DESCRIPTION;
   Origin Code Type Description.
   Identifies the meaning of the origin type code or being either container
   or freight (breakbulk).
    ;
       KEYWORD IS:     'Container' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '25' ,
            TYPE             'AN' ,
            PICTURE          'X(25)' ,
            USE              'TEXT' ,
            SEC-CLASS        'UNCLASSIFIED' ;
       CONTAINED:        IN  ORICOTy ;
       RANGE IS:       'Container' ,
                       'Freight (Breakbulk)' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
343      DEFINE ELEMENT                          OrigChCd ;
       DESCRIPTION;
    Change Code.
    A code used to report a change of conveyance, a mode change or a
    reconsignment at a consignor location.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        SOURCE IS:      'USAREUR Reg 55-355, App G' ,
                        'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'AN' ,
             PICTURE          'X(01)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             DUI              'ChCd' ,
             USE              'CODE' ;
        CODE:           'M'
                         MEANS
                        'Transship, ModeChange' ;
        CODE:           'C'
                         MEANS
                        'Transship, ConveyCh w/o ModeCh' ;
        CONTAINED:       IN  FrtMovAsset ;
        RANGE IS:       'M' ,
                        'C' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
344      DEFINE ELEMENT                          OrigChDte ;
      DESCRIPTION;
   Change Date.
   The Julian date of a change in conveyance, change of mode, or
   reconsignment at a consignor location.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'JulianDte' ,
           USE              'DATE' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:       IN  FrtMovAsset ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

345      DEFINE ELEMENT                          OrigRhd ;
      DESCRIPTION;
   Origin Railhead.
   The name of the railhead to be used as the origin loading site.
    ;
      KEYWORD IS:     'Freight' ,
                      'NOT IN DATA MODEL' ,
                      'LOB' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '50' ,
           TYPE             'AN' ,
           PICTURE          'X(50)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
346     'DEFINE ELEMENT                         Origin-DODAAC ;
        DESCRIPTION;
    Origin DODAAC.
    This parameter provides the Activity Address Code of the Origin MCT.
     ;
        KEYWORD IS:     'Container' ,
                        'LOB' ,
                        'Movement Control' ,
                        'Freight' ,
                        'NOT IN DATA MODEL' ;
        SOURCE IS:      'TACCS-LOB CONTAINER DFD' ,
                        'TACCS-LOB FREIGHT DFD' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '6' ,
             TYPE             'AN' ,
             PICTURE          'X(06)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'SYS-PAR' ,
             DUI              'AACCurr' ;
        CONTAINED:        IN  System-Parameter-Record ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
347      DEFINE ELEMENT                    Origin-MCE-Prefix ;
      DESCRIPTION;
   Origin Movement Control Element Prefix.
   This parameter represents the MCEPrefix of the host MCE.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'Movement Control' ,
                      'NOT IN DATA MODEL' ,
                      'Freight' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ,
                      'TACCS-LOB FREIGHT DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'MCEPrefix' ,
           USE              'SYS-PAR' ;
      CODE:           'B'
                       MEANS
                      'Bremerhaven' ;
      CODE:           'E'
                       MEANS
                      'Frankfurt' ;
      CODE:           'H'
                       MEANS
                      'Idar-Oberstein' ;
      CODE:           'J'
                       MEANS
                      'Kaiserslautern' ;
      CODE:           'M'
                       MEANS
                      'Mannheim' ;
      CODE:           'G'
                       MEANS
                      'Moenchengladbach' ;
      CODE:           'N'
                       MEANS
                      'Nuernberg' ;
      CODE:           'R'
                       MEANS
                      'Rotterdam' ;
      CODE:           'T'
                       MEANS
                      'Stuttgart' ;
      CODE:           'Z'
                       MEANS
                      'ATMCT Rhein Main' ,
```

```
                    'Rhein Main ATMCT' ;
        CODE:       'P'
                     MEANS
                    'ATMCT Ramstein' ,
                    'Ramstein ATMCT' ;
        CODE:       'K'
                     MEANS
                    '1st TMCA Freight Branch' ;
        CONTAINED:    IN  System-Parameter-Record ;
        RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB CONTAINER GROUP' ;

348       DEFINE GROUP                          OriginBMCECd ;
        DESCRIPTION;
    Origin Branch Movement Control Element Code.
    A 2 position code which identifies the origin BMCT of a shipment unit.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '2' ,
             TYPE             'AN' ,
             PICTURE          'X(02)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'CODE' ,
             FORMAT           'DATACHAIN' ;
        CONSISTS OF:
             OriginBMCEPrefix ,
             OriginBMCESuffix ;
        CONTAINED:       IN  BMCTRefNo ;
        CONTAINED:       IN  FreightMov ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
349     DEFINE ELEMENT                          OriginBMCEPrefix ;
      DESCRIPTION;
   Origin Branch Movement Control Element Prefix.
   A 1 position code which identifies the servicing MCT of a BMCT.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           USE              'CODE' ,
           DUI              'MCEPrefix' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      CONTAINED:        IN  FreightMov ;
      CONTAINED:        IN  OriginBMCECd ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

350     DEFINE ELEMENT                          OriginBMCESuffix ;
      DESCRIPTION;
   Origin Branch Movement Control Element Suffix.
   A 1 position code which identifies an origin BMCT.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           DUI              'MCESuffix' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CONTAINED:        IN  FreightMov ;
      CONTAINED:        IN  OriginBMCECd ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
351      DEFINE ELEMENT                        OriginMCEPrefix ;
     DESCRIPTION;
   A one-digit code assigned to identify the MCT which currently services
   the consignor.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ,
                      'Freight' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'CONTAINER DATA MODEL' ,
                      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH      '1' ,
           PICTURE          'X(01)' ,
           DUI              'MCEPrefix' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'B'
                       MEANS
                      'Bremerhaven' ;
      CODE:           'E'
                       MEANS
                      'Frankfurt' ;
      CODE:           'H'
                       MEANS
                      'Idar-Oberstein' ;
      CODE:           'J'
                       MEANS
                      'Kaiserslautern' ;
      CODE:           'M'
                       MEANS
                      'Mannheim' ;
      CODE:           'G'
                       MEANS
                      'Moenchengladbach' ;
      CODE:           'N'
                       MEANS
                      'Nuernberg' ;
      CODE:           'R'
                       MEANS
                      'Rotterdam' ;
      CODE:           'T'
                       MEANS
                      'Stuttgart' ;
      CODE:           'Z'
                       MEANS
```

```
                'ATMCT Rhein Main' ,
                'Rhein Main ATMCT' ;
CODE:           'P'
                 MEANS
                'ATMCT Ramstein' ,
                'Ramstein ATMCT' ;
CODE:           'K'
                 MEANS
                '1st TMCA Freight Branch' ;
CONTAINED:       IN  CntnrMov ;
CONTAINED:       IN  FreightMov ;
CONTAINED:       IN  TMRPrefix ;
CONTAINED:       IN  XRefTMRPrefix ;
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
352     DEFINE ELEMENT                          POD ;
        SYNONYM IS:     TML-IDENT-CD-POD ;
        DESCRIPTION;
    Port of Debarkation.
    This coded identifier of an authorized point of entry into a country by
    air (APOD) or water (WPOD).
     ;
        KEYWORD IS:     'Container' ,
                        'CMM' ,
                        'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        SOURCE IS:      'CONTAINER DATA MODEL' ,
                        'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '3' ,
             TYPE             'AN' ,
             PICTURE          'X(03)' ,
             DUI              'PrtCd' ,
             CMM-DBMS-NME      'POD' ,
             PROJ-DED-NME      'TML-IDENT-CD-POD' ,
             USE              'CODE' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             REGULATION       'DOD 4500.32R' ;
        CONTAINED:        IN  CntnrMov ;
        CONTAINED:        IN  ExportAir ;
        CONTAINED:        IN  ExportWater ;
        CONTAINED:        IN  VoyageStop ;
        IDENTIFIES:     VoyageStop ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
353     DEFINE ELEMENT                          POE ;
        SYNONYM IS:     TML-IDENT-CD-POE ;
        DESCRIPTION;
    Port of Embarkation.
    This coded indentifier of an authorized point of departure from a
    country by air (APOE) or water (WPOE).
     ;
        KEYWORD IS:     'Container' ,
                        'CMM' ,
                        'CMM-DBMS' ,
                        'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'CONTAINER DATA MODEL' ,
                        'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '3' ,
             TYPE             'AN' ,
             PICTURE          'X(03)' ,
             DUI              'PrtCd' ,
             CMM-DBMS-NME      'POE' ,
             PROJ-DED-NME      'TML-IDENT-CD-POE' ,
             REGULATION       'DOD 4500.32R' ,
             USE              'CODE' ,
             SEC-CLASS        'UNCLASSIFIED' ;
        CONTAINED:        IN  ExportAir ;
        CONTAINED:        IN  ExportWater ;
        CONTAINED:        IN  Voyage ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
354      DEFINE ELEMENT                          PSPCivTel ;
       DESCRIPTION;
   Principal Service Point Civilian Phone Number.
   The civilian telephone number(s) of the PSP-POC.
    ;
       KEYWORD IS:     'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '25' ,
            TYPE             'AN' ,
            PICTURE          'X(25)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ADDRESS' ;
       CONTAINED:       IN  Activity ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

355      DEFINE ELEMENT                          PSPMilTel ;
       DESCRIPTION;
   Principal Service Point Military Phone Number.
   The military telephone number(s) of the PSP-POC.
    ;
       KEYWORD IS:     'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '15' ,
            TYPE             'AN' ,
            PICTURE          'X(15)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ADDRESS' ;
       CONTAINED:       IN  Activity ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
356      DEFINE ELEMENT                          PSPPOC ;
      DESCRIPTION;
   Principal Service Point - Point of Contact.
   The person or office of the AACCurr to contact for address
   information.
    ;
      KEYWORD IS:     'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '25' ,
           TYPE             'AN' ,
           PICTURE          'X(25)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'NAME' ;
      CONTAINED:        IN  Activity ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;

357      DEFINE ELEMENT                          Pallet-Tot ;
      DESCRIPTION;
   Pallet Total.
   The total number of pallets on-hand in an MCT area.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB DFD' ;
      ATTRIBUTE IS:
           TYPE             'N' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ,
           FIELD-LENGTH     '4' ,
           PICTURE          '9(04)' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
358      DEFINE ELEMENT                          PalletQty ;
       DESCRIPTION;
   Pallet Quantity.
   Number of AF 463L pallets associated with a specific move.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '2' ,
            TYPE             'N' ,
            PICTURE          '9(02)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'QUANTITY' ;
       CONTAINED:       IN  VehStopPt ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;

359      DEFINE ELEMENT                          Pallets ;
       DESCRIPTION;
   Pallets.
   The total number of AF 463L pallets on-hand at an activity.
    ;
       KEYWORD IS:     'Freight' ,
                       'LOB' ,
                       'Data Model' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            TYPE             'N' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'QUANTITY' ,
            FIELD-LENGTH     '4' ,
            PICTURE          '9(04)' ;
       CONTAINED:       IN  Pallet463L ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
360     DEFINE ELEMENT                          Pc ;
      DESCRIPTION;
   Piece.
   The actual piece count associated with a shipment unit loaded onto or
   discharged from a conveyance.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      CONTAINED:        IN  ExportAir ;
      CONTAINED:        IN  ExportWater ;
      CONTAINED:        IN  VehStopPt ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;


361     DEFINE ELEMENT                          PcThisDim ;
      DESCRIPTION;
   Pieces This Dimensions.
   The number of oversize items with the same dimensions.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```


```
362     DEFINE ELEMENT                          PcThisLotNo ;
        DESCRIPTION;
    Pieces This Lot Number.
    The number of items which pertain to a specific lot number of
    ammunition.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '4' ,
             TYPE             'N' ,
             PICTURE          '9(04)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'QUANTITY' ;
        CONTAINED:       IN  ExportWater ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

363       DEFINE ELEMENT                        PostCd ;
        DESCRIPTION;
    Post Code
    The Bundespost Postal Code associated with the city in the billing,
    freight, or mailing address.
     ;
        KEYWORD IS:     'TMAS' ,
                        'LOB' ,
                        'NOT IN DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '6' ,
             TYPE             'N' ,
             PICTURE          '9(06)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ADDRESS' ,
             FORMAT           'ROOT' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
364      DEFINE ELEMENT                          Prefix-Code ;
      DESCRIPTION;
   Prefix Code.
   The first position, single-digit code of the Seq-No which identifies
   whether an ETA forecast error occurred in data model key or non-key
   elements.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'N' ,
           PICTURE          '9(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           '0'
                       MEANS
                      'Record not added to database' ;
      CODE:           '1'
                       MEANS
                      'Record added to database' ;
      CONTAINED:       IN  Seq-No ;
      RANGE IS:       '0' ,
                      '1' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

AD-A190 395 FUNCTIONAL DESCRIPTION FOR THE DEPARTMENT OF THE ARMY 9/10
MOVEMENTS MANAGEMEN..(U) INTERNATIONAL BUSINESS
SERVICES INC PRINCE GEORGE VA DEFENSE S.. W ANCKAITIS
UNCLASSIFIED 31 DEC 87 DSDPG-375-049-87-3-VOL-3 F/G 12/7 NL

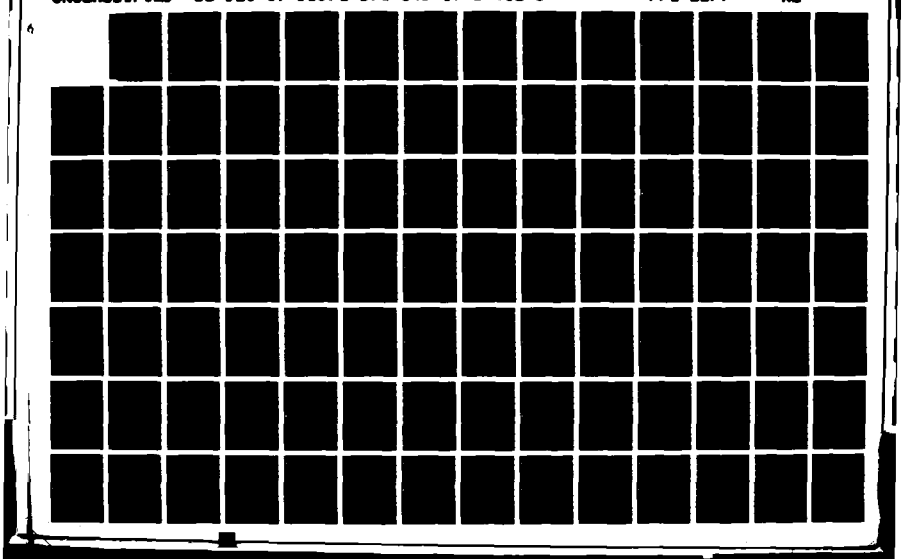

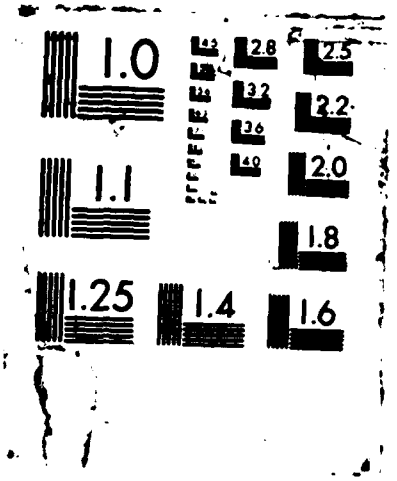
1.0
1.1
1.25
1.4
2.8
3.2
3.6
4.0
2.5
2.2
2.0
1.8
1.6

```
365      DEFINE GROUP                          PrimeTCN ;
      DESCRIPTION;
   Primary Transportation Control Number.
   Identifies the TCN under which cargo is moving.  Can be a single
   shipment unit TCN or a TCN controlling multiple shipment unit TCN in
   consolidation.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH      '17' ,
           PICTURE           'X(17)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           DUI               'TCN' ,
           USE               'ID-NO' ,
           FORMAT            'DATACHAIN' ;
      CONTAINED:        IN  VehStopPt ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

366      DEFINE ELEMENT                        ProjCd ;
      DESCRIPTION;
   Project Code.
   A code assigned to identify shipments of material for specific projects
   or programs.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH      '3' ,
           TYPE              'AN' ,
           PICTURE           'X(03)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'CODE' ;
      CONTAINED:        IN  ExportAir ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
367     DEFINE ELEMENT                          PrtCd ;
        SYNONYM IS:     Air-Terminal-Identifier-Code ,
                        TML-IDENT-CD ,
                        Water-Port-Identifier-Code ;
        DESCRIPTION;
    Port Code.
    A code which identifies the name and location of an air, ground, or
    water terminal within the Department of Defense (DOD) Transportation
    System.
     ;
        KEYWORD IS:     'Container' ,
                        'Freight' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        SOURCE IS:      'DOD 4500.32-R, App. B' ,
                        'CONTAINER DATA MODEL' ,
                        'FREIGHT DATA MODEL' ,
                        'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '3' ,
             TYPE             'AN' ,
             PICTURE          'X(03)' ,
             FORMAT           'ROOT' ,
             PROJ-DED-NME      'TML-IDENT-CD' ,
             REGULATION       'DOD 4500.32R' ,
             USE              'CODE' ,
             SEC-CLASS        'UNCLASSIFIED' ;
        CODE:           'HA1'
                         MEANS
                        'Plymouth, England' ;
        CODE:           'HAA'
                         MEANS
                        'Isle of Grain, England' ;
        CODE:           'HA2'
                         MEANS
                        'Exeter, England' ;
        CODE:           'HAB'
                         MEANS
                        'Harwich, England' ;
        CODE:           'HA3'
                         MEANS
                        'Hamble, England' ;
        CODE:           'HAC'
                         MEANS
                        'Newhaven, England' ;
        CODE:           'HAD'
```

```
                MEANS
               'Tilbury, England' ;
CODE:          'HAE'
                MEANS
               'Orford Ness, England' ;
CODE:          'HAF'
                MEANS
               'Chatham, England' ;
CODE:          'HAG'
                MEANS
               'Sheerness, England' ;
CODE:          'HA4'
                MEANS
               'Southhampton, England' ;
CODE:          'HA5'
                MEANS
               'Portsmouth, England' ;
CODE:          'HA6'
                MEANS
               'Thameshaven, England' ;
CODE:          'HA7'
                MEANS
               'London, England' ;
CODE:          'HA8'
                MEANS
               'Felixstowe, England' ;
CODE:          'HA9'
                MEANS
               'Dover, England' ;
CODE:          'HAJ'
                MEANS
               'Shoreham-by-the-Sea, England' ;
CODE:          'HAK'
                MEANS
               'Fawley, England' ;
CODE:          'HAL'
                MEANS
               'Purfleet, England' ;
CODE:          'HAM'
                MEANS
               'Coryton, England' ;
CODE:          'HAN'
                MEANS
               'Turfleet, England' ;
CODE:          'HAP'
                MEANS
               'High Wycombe, England' ;
CODE:          'HAQ'
                MEANS
```

```
                'Gravesend, England' ;
CODE:           'HAR'
                 MEANS
                'Rochester, England' ;
CODE:           'HB1'
                 MEANS
                'Bristol, England' ;
CODE:           'HB2'
                 MEANS
                'Avonmouth, England' ;
CODE:           'HB3'
                 MEANS
                'Milford Haven, England' ;
CODE:           'HB4'
                 MEANS
                'Liverpool, England' ;
CODE:           'HB5'
                 MEANS
                'Manchester, England' ;
CODE:           'HB6'
                 MEANS
                'Barry (S.Wales),England' ;
CODE:           'HB7'
                 MEANS
                'Swansea, England' ;
CODE:           'HB8'
                 MEANS
                'Poole, England' ;
CODE:           'HB9'
                 MEANS
                'Preston, England' ;
CODE:           'HBA'
                 MEANS
                'Anderton, England' ;
CODE:           'HBB'
                 MEANS
                'Garston, England' ;
CODE:           'HBC'
                 MEANS
                'Eastham, England' ;
CODE:           'HBD'
                 MEANS
                'Ellesmere Port, England' ;
CODE:           'HBE'
                 MEANS
                'Runcorn, England' ;
CODE:           'HBG'
                 MEANS
                'Newport (S. Wales), England' ;
```

```
CODE:       'HCA'
             MEANS
            'Saltend, England' ;
CODE:       'HC1'
             MEANS
            'Hull, England' ;
CODE:       'HC2'
             MEANS
            'Newcastle, England' ;
CODE:       'HC3'
             MEANS
            'Immingham, England' ;
CODE:       'HC4'
             MEANS
            'Ipswich, England' ;
CODE:       'HC5'
             MEANS
            'Grimsby, England' ;
CODE:       'HC6'
             MEANS
            'Great Yarmouth, England' ;
CODE:       'HC7'
             MEANS
            'Wallsend, England' ;
CODE:       'HC8'
             MEANS
            'Tees Port, England' ;
CODE:       'HC9'
             MEANS
            'Tynemouth, England' ;
CODE:       'HCB'
             MEANS
            'Killingholme, England' ;
CODE:       'HCC'
             MEANS
            'Middlesbrough, England' ;
CODE:       'HCD'
             MEANS
            'Kings Lynn' ;
CODE:       'HD1'
             MEANS
            'Belfast, Ireland' ;
CODE:       'HD2'
             MEANS
            'Cork, Ireland' ;
CODE:       'HD3'
             MEANS
            'Dublin, Ireland' ;
CODE:       'HD4'
```

```
                MEANS
               'Londonderry, Ireland' ;
CODE:          'HD5'
                MEANS
               'Galway, Ireland' ;
CODE:          'HD6'
                MEANS
               'Cobh, Ireland' ;
CODE:          'HD7'
                MEANS
               'Larne, Ireland' ;
CODE:          'HD8'
                MEANS
               'Red Bay, Ireland' ;
CODE:          'HE1'
                MEANS
               'Bowling, Scotland' ;
CODE:          'HEA'
                MEANS
               'Stranraer, Scotland' ;
CODE:          'HE2'
                MEANS
               'Prestwick, Scotland' ;
CODE:          'HE3'
                MEANS
               'Holy Loch, Scotland' ;
CODE:          'HEB'
                MEANS
               'Shandon, Scotland' ;
CODE:          'HEC'
                MEANS
               'Loch Long, Scotland' ;
CODE:          'HED'
                MEANS
               'Greenock, Scotland' ;
CODE:          'HE4'
                MEANS
               'Glasgow, Scotland' ;
CODE:          'HE5'
                MEANS
               'Cairn Ryan, Scotland' ;
CODE:          'HE6'
                MEANS
               'Loch Striven, Scotland' ;
CODE:          'HE7'
                MEANS
               'Campbeltown, Scotland' ;
CODE:          'HE8'
                MEANS
```

```
                'Ardrossan, Scotland' ;
CODE:           'HE9'
                 MEANS
                'Loch Ewe, Scotland' ;
CODE:           'HEE'
                 MEANS
                'Fairlie, Scotland' ;
CODE:           'HEF'
                 MEANS
                'Glen Douglas, Scotland' ;
CODE:           'HEG'
                 MEANS
                'Faslane, Scotland' ;
CODE:           'HF1'
                 MEANS
                'Invergorden, Scotland' ;
CODE:           'HF2'
                 MEANS
                'Aberdeen, Scotland' ;
CODE:           'HF3'
                 MEANS
                'Rosyth, Scotland' ;
CODE:           'HF4'
                 MEANS
                'Leith(Edinborough), Scotland' ;
CODE:           'HF5'
                 MEANS
                'Scrabster, Caithness, Scotland' ;
CODE:           'HF6'
                 MEANS
                'Grangemouth, Scotland' ;
CODE:           'HF7'
                 MEANS
                'Hound Point, Scotland' ;
CODE:           'HG1'
                 MEANS
                'Lerwich, Shetland Is, Scottish' ;
CODE:           'HG2'
                 MEANS
                'Balta Sound, Scottish Is area' ;
CODE:           'HG3'
                 MEANS
                'Ly Ness,Orkney Is,Scott.Is ar' ;
CODE:           'HJ1'
                 MEANS
                'Faeroe Is, Faeroe Island area' ;
CODE:           'JA1'
                 MEANS
                'Oslo, Norway' ;
```

```
CODE:       'JA2'
             MEANS
            'Horten, Norway' ;
CODE:       'JAB'
             MEANS
            'Moss, Norway' ;
CODE:       'JA3'
             MEANS
            'Narvik, Norway' ;
CODE:       'JAC'
             MEANS
            'Bjerkvik, Norway' ;
CODE:       'JA4'
             MEANS
            'Bergen, Norway' ;
CODE:       'JAD'
             MEANS
            'Salangsverket, Norway' ;
CODE:       'JA5'
             MEANS
            'Stavenger, Norway' ;
CODE:       'JA6'
             MEANS
            'Trondheim, Norway' ;
CODE:       'JA7'
             MEANS
            'Bodo (Port), Norway' ;
CODE:       'JAG'
             MEANS
            'Gauske, Norway' ;
CODE:       'JAH'
             MEANS
            'Andoya, Norway' ;
CODE:       'JAK'
             MEANS
            'MO-J-Rana, Norway' ;
CODE:       'JA8'
             MEANS
            'Kristiansand, Norway' ;
CODE:       'JA9'
             MEANS
            'Drammen, Norway' ;
CODE:       'JAE'
             MEANS
            'Hovringen, Norway' ;
CODE:       'JAF'
             MEANS
            'Humla, Norway' ;
CODE:       'JAL'
```

```
                MEANS
               'Sorreisa, Norway' ;
CODE:          'JC1'
                MEANS
               'Copenhagen, Denmark' ;
CODE:          'JC2'
                MEANS
               'Aarhus, Denmark' ;
CODE:          'JC3'
                MEANS
               'Aalborg, Denmark' ;
CODE:          'JC4'
                MEANS
               'Frederikshavn, Denmark' ;
CODE:          'JFA'
                MEANS
               'Wilhelmshaven, Germany' ;
CODE:          'JFC'
                MEANS
               'Kiel, Germany' ;
CODE:          'JF1'
                MEANS
               'Bremerhaven, Germany' ;
CODE:          'JF2'
                MEANS
               'Bremen, Germany' ;
CODE:          'JF4'
                MEANS
               'Hamburg, Germany' ;
CODE:          'JF6'
                MEANS
               'Nordenheim, Germany' ;
CODE:          'JF7'
                MEANS
               'Sylt, Germany' ;
CODE:          'JF8'
                MEANS
               'Cuxhaven, Germany' ;
CODE:          'JF9'
                MEANS
               'Farge, Germany' ;
CODE:          'JG1'
                MEANS
               'Rotterdam, Netherlands' ;
CODE:          'JG2'
                MEANS
               'Amsterdam, Netherlands' ;
CODE:          'JG3'
                MEANS
```

```
                'Portershaven, Netherlands' ;
CODE:           'JG4'
                 MEANS
                'Buitenbuizen, Netherlands' ;
CODE:           'JG5'
                 MEANS
                'Terneuzen, Netherlands' ;
CODE:           'JG6'
                 MEANS
                'Hook of Holland, Netherlands' ;
CODE:           'JG7'
                 MEANS
                'Dordrecht, Netherlands' ;
CODE:           'JG8'
                 MEANS
                'Permis, Netherlands' ;
CODE:           'JG9'
                 MEANS
                'Vlissingen(Flushing), NE' ;
CODE:           'JH1'
                 MEANS
                'Zeebrugge, Belgium' ;
CODE:           'JH2'
                 MEANS
                'Antwerp, Belgium' ;
CODE:           'JH3'
                 MEANS
                'Ostend, Ostende, Belgium' ;
CODE:           'JH4'
                 MEANS
                'Ghent, Belgium' ;
CODE:           'JJ1'
                 MEANS
                'Cherbourg, France' ;
CODE:           'JJ2'
                 MEANS
                'Dunkerque, France' ;
CODE:           'JJ3'
                 MEANS
                'LeHavre, France' ;
CODE:           'JJ4'
                 MEANS
                'Rouen, France' ;
CODE:           'JJ5'
                 MEANS
                'Calais, France' ;
CODE:           'JJ6'
                 MEANS
                'Boulogne, France' ;
```

```
CODE:       'JJ7'
             MEANS
            'Dieppe, France' ;
CODE:       'JKA'
             MEANS
            'Piriac, France' ;
CODE:       'JK1'
             MEANS
            'Bordeaux, France' ;
CODE:       'JK2'
             MEANS
            'Bassens, France' ;
CODE:       'JK3'
             MEANS
            'Donges, France' ;
CODE:       'JK4'
             MEANS
            'La Pallice, France' ;
CODE:       'JK5'
             MEANS
            'Nantes, France' ;
CODE:       'JK6'
             MEANS
            'Pauillac, France' ;
CODE:       'JK7'
             MEANS
            'St. Herblain, France' ;
CODE:       'JK8'
             MEANS
            'St. Nazaire, France' ;
CODE:       'JK9'
             MEANS
            'Rochefort, France' ;
CODE:       'JL1'
             MEANS
            'Santander, Spain' ;
CODE:       'JL2'
             MEANS
            'El Ferrol, Spain' ;
CODE:       'JL3'
             MEANS
            'Gijon, Spain' ;
CODE:       'JL4'
             MEANS
            'La Coruna, Spain' ;
CODE:       'JL5'
             MEANS
            'San Sebastian, Spain' ;
CODE:       'JL6'
```

```
                MEANS
               'Bilbao, Spain' ;
CODE:          'JL7'
                MEANS
               'Vigo, Spain' ;
CODE:          'JM1'
                MEANS
               'Germersheim, Germany' ;
CODE:          'JM2'
                MEANS
               'Mainz, Germany' ;
CODE:          'JM3'
                MEANS
               'Mannheim, Germany' ;
CODE:          'JM4'
                MEANS
               'Bingen, Germany' ;
CODE:          'KA1'
                MEANS
               'Lisbon, Portugal' ;
CODE:          'KA2'
                MEANS
               'Porto, Portugal' ;
CODE:          'KA3'
                MEANS
               'Funchal, Madeira Is, Portugal' ;
CODE:          'KA4'
                MEANS
               'Alverca, Portugal' ;
CODE:          'KA5'
                MEANS
               'Setubal, Portugal' ;
CODE:          'KEA'
                MEANS
               'Mellili, Sicily' ;
CODE:          'KEB'
                MEANS
               'Messina, Sicily' ;
CODE:          'KE1'
                MEANS
               'Palermo, Sicily' ;
CODE:          'KE2'
                MEANS
               'Augusta, Sicily' ;
CODE:          'KE3'
                MEANS
               'Catania, NAF/Sigonella' ;
CODE:          'KE4'
                MEANS
```

```
                'Valetta, Malta Island' ;
CODE:           'KE5'
                 MEANS
                'Siracusa, Sicily' ;
CODE:           'KE6'
                 MEANS
                'Trapani, Sicily' ;
CODE:           'KE7'
                 MEANS
                'Lampedusa Island, Sicily' ;
CODE:           'KE8'
                 MEANS
                'Porto Empedocle, Sicily' ;
CODE:           'KE9'
                 MEANS
                'Milazzo, Sicily' ;
CODE:           'KF1'
                 MEANS
                'Naples, Italy' ;
CODE:           'KF2'
                 MEANS
                'Pozzuoli, Italy' ;
CODE:           'KF3'
                 MEANS
                'Leghorn(Livorno), Italy' ;
CODE:           'KF4'
                 MEANS
                'Genoa, Italy' ;
CODE:           'KF5'
                 MEANS
                'La Spezia, Italy' ;
CODE:           'KF6'
                 MEANS
                'Givitavecchia, Italy' ;
CODE:           'KF7'
                 MEANS
                'Bastia, Corsica (Port), Italy' ;
CODE:           'KF8'
                 MEANS
                'Gaeta (Port), Italy' ;
CODE:           'KF9'
                 MEANS
                'Salerno, Italy' ;
CODE:           'KG1'
                 MEANS
                'Cagliari, Sardinia Area, Italy' ;
CODE:           'KG2'
                 MEANS
                'LaMaddalena, Sardinia Area, IT' ;
```

```
CODE:       'KG3'
             MEANS
            'Olbia, Sardinia Area, Italy' ;
CODE:       'KG4'
             MEANS
            'Torres, Sardinia Area, Italy' ;
CODE:       'KH1'
             MEANS
            'Marseille, France' ;
CODE:       'KH2'
             MEANS
            'Toulon, France' ;
CODE:       'KH3'
             MEANS
            'Cannes, France' ;
CODE:       'KH4'
             MEANS
            'Port de Bouc, France' ;
CODE:       'KH5'
             MEANS
            'Monte Carlo, Monaco, France' ;
CODE:       'KH6'
             MEANS
            'L Espiguette, France' ;
CODE:       'KJ1'
             MEANS
            'Cadiz, Spain' ;
CODE:       'KJ2'
             MEANS
            'Rota, Spain' ;
CODE:       'KJ3'
             MEANS
            'Seville, Spain' ;
CODE:       'KJ4'
             MEANS
            'Gibraltar, Spain' ;
CODE:       'KJ5'
             MEANS
            'Huelva, Spain' ;
CODE:       'KJ6'
             MEANS
            'Algeciras, Spain' ;
CODE:       'KL1'
             MEANS
            'Barcelona, Spain' ;
CODE:       'KL2'
             MEANS
            'Cartagena, Spain' ;
CODE:       'KL3'
```

```
                MEANS
               'Alicante, Spain' ;
CODE:          'KL4'
                MEANS
               'La Algameca, Spain' ;
CODE:          'KL5'
                MEANS
               'Valencia, Spain' ;
CODE:          'KL6'
                MEANS
               'Tarragona, Spain' ;
CODE:          'KL7'
                MEANS
               'Palma (Balearic Is), Spain' ;
CODE:          'KL8'
                MEANS
               'Almeria, Spain' ;
CODE:          'KL9'
                MEANS
               'Malaga, Spain' ;
CODE:          'KLA'
                MEANS
               'Castellon, Spain' ;
CODE:          'LA1'
                MEANS
               'Venice, Italy' ;
CODE:          'LA2'
                MEANS
               'Taranto, Italy' ;
CODE:          'LA3'
                MEANS
               'Brindisi, Italy' ;
CODE:          'LA4'
                MEANS
               'Bari, Italy' ;
CODE:          'LA5'
                MEANS
               'Ancona, Italy' ;
CODE:          'LA6'
                MEANS
               'Priola, Italy' ;
CODE:          'LB1'
                MEANS
               'Trieste, Italy' ;
CODE:          'LD1'
                MEANS
               'Piraeus, Greece' ;
CODE:          'LDA'
                MEANS
```

```
                'Skaramanga Bay, Greece' ;
CODE:           'LDB'
                 MEANS
                'Ayioi, Theodhoroi, Greece' ;
CODE:           'LD2'
                 MEANS
                'Elevsis, Greece' ;
CODE:           'LD3'
                 MEANS
                'Patras, Greece' ;
CODE:           'LD4'
                 MEANS
                'Hatteras, Greece' ;
CODE:           'LD5'
                 MEANS
                'Candia (Crete), Greece' ;
CODE:           'LD6'
                 MEANS
                'Salamis, Greece' ;
CODE:           'LD7'
                 MEANS
                'Antikyra, Greece' ;
CODE:           'LD8'
                 MEANS
                'Iraklion, Crete' ;
CODE:           'LD9'
                 MEANS
                'Suda Bay, Crete' ;
CODE:           'LDC'
                 MEANS
                'Perama, Greece' ;
CODE:           'LE1'
                 MEANS
                'Thessaloniki, Greece' ;
CODE:           'LE2'
                 MEANS
                'Volos, Greece' ;
CODE:           'LE3'
                 MEANS
                'Stilis, Greece' ;
CODE:           'LE4'
                 MEANS
                'Oropus, Greece' ;
CODE:           'LE5'
                 MEANS
                'Akhillion, Greece' ;
CODE:           'LE6'
                 MEANS
                'Rhodes, Greece' ;
```

```
CODE:       'LE7'
             MEANS
            'Leros Island, Greece' ;
CODE:       'LE8'
             MEANS
            'Achinos, Greece' ;
CODE:       'LE9'
             MEANS
            'Megara, Greece' ;
CODE:       'LEB'
             MEANS
            'Kavalla, Greece' ;
CODE:       'LEC'
             MEANS
            'Mykonos Island, Greece' ;
CODE:       'LED'
             MEANS
            'Kos Island, Greece' ;
CODE:       'LQ1'
             MEANS
            'Iskenderum, Turkey' ;
CODE:       'LQ2'
             MEANS
            'Mersin, Turkey' ;
CODE:       'LQ3'
             MEANS
            'Antalya, Turkey' ;
CODE:       'LQ4'
             MEANS
            'Yumurtalik, Turkey' ;
CODE:       'LR1'
             MEANS
            'Izmir, Turkey' ;
CODE:       'LR2'
             MEANS
            'Istanbul (Mil.Term), Turkey' ;
CODE:       'LR3'
             MEANS
            'Derince, Turkey' ;
CODE:       'LR4'
             MEANS
            'Gelibolu (Galipoli), Turkey' ;
CODE:       'LR5'
             MEANS
            'Golcuk, Turkey' ;
CODE:       'LR6'
             MEANS
            'Istanbul (Buyukedere),Turkey' ;
CODE:       'LR7'
```

```
                MEANS
               'Haydarpass, (Istanbul),Turkey' ;
CODE:          'LR8'
                MEANS
               'Karamursel, Turkey' ;
CODE:          'LS1'
                MEANS
               'Samsum, Turkey' ;
CODE:          'LS2'
                MEANS
               'Sinop, Turkey' ;
CODE:          'LS3'
                MEANS
               'Trabzon, Turkey' ;
CODE:          'LS4'
                MEANS
               'Amasra, Turkey' ;
CODE:          'LS5'
                MEANS
               'Constantza, Romania' ;
CODE:          'LS6'
                MEANS
               'Galati, Romania' ;
CODE:          'LT1'
                MEANS
               'Corfu Island, Ionian Is,Greece' ;
CODE:          'LT2'
                MEANS
               'Igoumenitsa, Ionian Is, Greece' ;
CODE:          'ABB'
                MEANS
               'Abington RAFSTA, Berkshire,Eng' ;
CODE:          'ADA'
                MEANS
               'Incirlik AB, Adana, Turkey' ;
CODE:          'ATH'
                MEANS
               'Athens Central Airpt,Athens,GR' ;
CODE:          'AVB'
                MEANS
               'Aviano, Italy' ;
CODE:          'AYH'
                MEANS
               'Alconbury RAF, Huntingdon, ENG' ;
CODE:          'BBJ'
                MEANS
               'Bitburg AB, Germany' ;
CODE:          'BDS'
                MEANS
```

```
                'Brindisi, Italy' ;
CODE:           'BRH'
                 MEANS
                'Natl Airpt, Brussels, Belgium' ;
CODE:           'BWY'
                 MEANS
                'Bentwaters RAF, Suffolk, ENG' ;
CODE:           'BZZ'
                 MEANS
                'Brize Norton RAF, Witney, ENG' ;
CODE:           'CHE'
                 MEANS
                'Chieves, Belgium' ;
CODE:           'CHM'
                 MEANS
                'Chambley AB, France' ;
CODE:           'CMJ'
                 MEANS
                'Chaumont AB, France' ;
CODE:           'CPH'
                 MEANS
                'Kastrup Airpt, Copenhagen, DM' ;
CODE:           'DEO'
                 MEANS
                'Deols Chateauroux AB, France' ;
CODE:           'DIY'
                 MEANS
                'Diyarbakir, Turkey' ;
CODE:           'ERD'
                 MEANS
                'Erding AB, Germany' ;
CODE:           'ERZ'
                 MEANS
                'Erzurum, Turkey' ;
CODE:           'ESB'
                 MEANS
                'Esenboga Airpt, Ankara,Turkey' ;
CODE:           'ESK'
                 MEANS
                'Eskisehir, Turkey' ;
CODE:           'ETI'
                 MEANS
                'Etain-Rouvres, France' ;
CODE:           'EVX'
                 MEANS
                'Evreaux AB, Fauville, France' ;
CODE:           'EWY'
                 MEANS
                'Greenham CommonsRAF,NewburyENG' ;
```

```
CODE:       'FBU'
             MEANS
            'Fornebu Airport, Oslo, Norway' ;
CODE:       'FKH'
             MEANS
            'Sculthrope RAF, Fakenham, ENG' ;
CODE:       'FRF'
             MEANS
            'Rhein Main AB, Frankfurt, GE' ;
CODE:       'HHN'
             MEANS
            'Hahn AB, Germany' ;
CODE:       'IGL'
             MEANS
            ' Cigli AB, Ismir, Turkey' ;
CODE:       'IST'
             MEANS
            'Yesilkov Airport,Istanbul, TK' ;
CODE:       'KNF'
             MEANS
            'Marham RAF, Kingslynn,Norf,ENG' ;
CODE:       'LKZ'
             MEANS
            'Lakenheath RAF, Bran,Suff,ENG' ;
CODE:       'LON'
             MEANS
            'Croydon Airport, London, Eng' ;
CODE:       'LRA'
             MEANS
            'Larissa, Greece' ;
CODE:       'LYE'
             MEANS
            'Lyneham RAF Station, England' ;
CODE:       'MAH'
             MEANS
            'Mahon, Spain' ;
CODE:       'MHZ'
             MEANS
            'Mildenhall,RAF,Suffolk, ENG' ;
CODE:       'NAP'
             MEANS
            'Capodichino Airport, Naples,IT' ;
CODE:       'NHT'
             MEANS
            'Northolt RAF Station, England' ;
CODE:       'OKH'
             MEANS
            'JLCottesmore RAF, Rutland ENG' ;
CODE:       'ORM'
```

```
                MEANS
               'Wittering RAF,NorthHampton,ENG' ;
CODE:          'ORY'
                MEANS
               'Orly International, Paris, FR' ;
CODE:          'OSL'
                MEANS
               'Oslo, Norway' ;
CODE:          'OZP'
                MEANS
               'Moron AB, Spain' ;
CODE:          'PGB'
                MEANS
               'Phalsoburg AB, Spain' ;
CODE:          'PIK'
                MEANS
               'Prestwick RAF, Scotland' ;
CODE:          'PMI'
                MEANS
               'Palma De Majorca, Spain' ;
CODE:          'PSA'
                MEANS
               'San Guisto Airport, Pisa, IT' ;
CODE:          'REG'
                MEANS
               'Reggio, Italy' ;
CODE:          'RMS'
                MEANS
               'Ramstein AB, Germany' ;
CODE:          'RTA'
                MEANS
               'Rota NAS, Spain' ;
CODE:          'SEX'
                MEANS
               'Semback AB, Kaiserslautern, GE' ;
CODE:          'SIZ'
                MEANS
               'Sigonella, Sicily' ;
CODE:          'SPM'
                MEANS
               'Spangdahlem AB, Germany' ;
CODE:          'SQZ'
                MEANS
               'Scampton RAF, Lincoln, England' ;
CODE:          'SSS'
                MEANS
               'Soesterberg, Netherlands' ;
CODE:          'SSX'
                MEANS
```

```
                'Xamsun AB, Turkey' ;
CODE:           'STR'
                 MEANS
                'Stuttgart, Germany' ;
CODE:           'SIO'
                 MEANS
                'Sinop AAF, Sinop, Turkey' ;
CODE:           'TGR'
                 MEANS
                'Tanagra, Greece' ;
CODE:           'THF'
                 MEANS
                'Tempelhof, Berlin, Germany' ;
CODE:           'TOJ'
                 MEANS
                'Torrejon AB, Madrid, Spain' ;
CODE:           'TXL'
                 MEANS
                'Berlin, Germany' ;
CODE:           'TYA'
                 MEANS
                'Yalova AB, Turkey' ;
CODE:           'TZK'
                 MEANS
                'Trabzon AB, Turkey' ;
CODE:           'UHF'
                 MEANS
                'UpperHeyfordRAF,OxfordshireENG' ;
CODE:           'WEM'
                 MEANS
                'West Malling, England' ;
CODE:           'WIE'
                 MEANS
                'Wiesbaden AB, Germany' ;
CODE:           'WOB'
                 MEANS
                'Woodbridge RAF, Suffolk, ENG' ;
CODE:           'WTN'
                 MEANS
                'Waddington RAF, Lincoln,ENG' ;
CODE:           'WXF'
                 MEANS
                'Wethersfield RAF, Essex,ENG' ;
CODE:           'ZAZ'
                 MEANS
                'Zaragossa AB, Spain' ;
CONTAINED:       IN  APOD ;
CONTAINED:       IN  CgoPort ;
CONTAINED:       IN  MEvent ;
```

```
        CONTAINED:        IN  Port ;
        CONTAINED:        IN  WPOD ;
        CONTAINED:        IN  WPOE ;
        IDENTIFIES:     CgoPort ;
        IDENTIFIES:     Port ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
        TRACE KEY IS:   'Root' ;

368       DEFINE ELEMENT                        PrtNme ;
        DESCRIPTION;
    Port Name.
    Identifies the name of the port associated with the Port-Code.
     ;
        KEYWORD IS:     'Container' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ,
                        'Freight' ;
        SOURCE IS:      'TMAS/CNTNR/FRT DATA MODEL' ;
        ATTRIBUTE IS:
             TYPE             'AN' ,
             FIELD-LENGTH      '25' ,
             PICTURE          'X(25)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'NAME' ;
        CONTAINED:        IN  CgoPort ;
        CONTAINED:        IN  Port ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
369      DEFINE ELEMENT                          PrtTyCd ;
      DESCRIPTION;
   Port Type Code.
   A that uniquely identifies the type of port.
    ;
      KEYWORD IS:     'Container' ,
                      'TMAS' ,
                      'Data Model' ,
                      'LOB' ,
                      'Freight' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'TMAS/CNTNR/FRT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'A' ,
           PICTURE          'A(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'A'
                       MEANS
                      'Air' ,
                      'Aerial' ;
      CODE:           'W'
                       MEANS
                      'Water' ;
      CODE:           'B'
                       MEANS
                      'Both Air and Water' ;
      CONTAINED:       IN  APOD ;
      CONTAINED:       IN  CgoPort ;
      CONTAINED:       IN  Port ;
      CONTAINED:       IN  PortType ;
      CONTAINED:       IN  WPOD ;
      CONTAINED:       IN  WPOE ;
      IDENTIFIES:     Port ;
      IDENTIFIES:     PortType ;
      RANGE IS:       'A' ,
                      'W' ,
                      'B' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
370      DEFINE ELEMENT                          PrtTyDescr ;
        DESCRIPTION;
    Port Type Description
    A narrative description of the Port-Type-Code.
     ;
        KEYWORD IS:     'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             TYPE             'AN' ,
             FIELD-LENGTH      '5' ,
             PICTURE          'X(05)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'TEXT' ;
        CONTAINED:        IN  PortType ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
371      DEFINE ELEMENT                          PstDte ;
       SYNONYM IS:     DATE-TRNS-POST-CNTNR-FILE ,
                       DT-PTD-CNTNR ,
                       Day-Hold-Requested ,
                       Day-Posted ;
       DESCRIPTION;
   Post Date.
   Identifies the machine date used to update a record or event.
    ;
       KEYWORD IS:     'Container' ,
                       'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
       ATTRIBUTE IS:
            TYPE              'N' ,
            FIELD-LENGTH       '5' ,
            PICTURE           '9(05)' ,
            CMM-DBMS-NME       'DT-PTD-CNTNR' ,
            FORMAT            'DATACHAIN' ,
            PROJ-DED-NME       'DATE-TRNS-POST-CNTNR-FILE' ,
            USE               'DATE' ,
            SEC-CLASS         'UNCLASSIFIED' ,
            DUI               'JulianDte' ,
            DUI-2             'DteCurr' ;
       CONTAINED:         IN  FrtMEvent ;
       CONTAINED:         IN  MEvent ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
372     DEFINE ELEMENT                          PullDte ;
        DESCRIPTION;
    Pull Date.
    The Julian date that a conveyance was pulled or removed from a
    location.
     ;
        KEYWORD IS:     'Freight' ,
                        'NOT IN DATA MODEL' ,
                        'LOB' ;
        SEE MEMO:
             Julian-Date-Edit-Check-Memo ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '5' ,
             TYPE             'N' ,
             PICTURE          '9(05)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             DUI              'JulianDte' ,
             USE              'DATE' ,
             FORMAT           'DATACHAIN' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

373     DEFINE ELEMENT                          PullTime ;
        DESCRIPTION;
    Pull Time.
    The actual time in hours and minutes that a conveyance was pulled
    or removed from a location.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Time-Edit-Check-Memo ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '4' ,
             TYPE             'N' ,
             PICTURE          '9(04)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'DATE' ;
        CONTAINED:       IN  STMRStop ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
374      DEFINE ELEMENT                          RDD ;
      DESCRIPTION;
   Required Delivery Date.
   The required delivery date of a shipment.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           FORMAT           'DATACHAIN' ,
           USE              'DATE' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'JulianDte' ;
      CONTAINED:        IN  ExportAir ;
      CONTAINED:        IN  ExportWater ;
      CONTAINED:        IN  VehStopPt ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

375      DEFINE ELEMENT                          RdCtTot ;
      DESCRIPTION;
   Round Count Total.
   The total quantity of ammunition rounds in a shipment unit.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '6' ,
           TYPE             'N' ,
           PICTURE          '9(06)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
376      DEFINE ELEMENT                          RecngnCfmNoncfm ;
     DESCRIPTION;
  Reconsignment Confirmed/Nonconfirmed.
  A flag indicating whether a request for reconsignment of a container has
  been confirmed or nonconfirmed.
   ;
     KEYWORD IS:     'Container' ,
                     'Data Model' ,
                     'LOB' ;
     SOURCE IS:      'CONTAINER DATA MODEL' ;
     ATTRIBUTE IS:
          USE              'FLAG' ,
          TYPE             'AN' ,
          FIELD-LENGTH      '1' ,
          PICTURE          'A(01)' ,
          SEC-CLASS        'UNCLASSIFIED' ;
     CODE:           'C'
                      MEANS
                     'Confirmed' ;
     CODE:           'N'
                      MEANS
                     'Nonconfirmed' ;
     CONTAINED:       IN  CntnrMovStp ;
     RANGE IS:       'C' ,
                     'N' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB CONTAINER GROUP' ;

377      DEFINE ELEMENT                          Record-Month-of-Hist-Disk ;
     DESCRIPTION;
  Record Month of History Disk.
  The calendar month of the history storage disk.
   ;
     KEYWORD IS:     'Container' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
     SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
     ATTRIBUTE IS:
          TYPE             'N' ,
          FIELD-LENGTH      '2' ,
          PICTURE          '9(02)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'ID-NO' ;
     RANGE IS:       '1'
                      THROUGH '12' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB CONTAINER GROUP' ;
```

```
378      DEFINE ELEMENT                          Record-Year-of-Hist-Disk ;
      DESCRIPTION;
   Record Year of History Disk.
   The last two digits of the calendar year of the history storage disk.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE              'N' ,
           FIELD-LENGTH       '2' ,
           PICTURE           '9(02)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'DATE' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

379      DEFINE ELEMENT                          RelDte ;
      DESCRIPTION;
   Release Date.
   The Julian date on which a conveyance is released to the carrier at a
   consignee stop point.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH       '5' ,
           TYPE              'N' ,
           PICTURE           '9(05)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'DATE' ,
           DUI               'JulianDte' ,
           FORMAT            'DATACHAIN' ;
      CONTAINED:        IN  VehStopPtAs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
380     DEFINE ELEMENT                          RelTime ;
        SYNONYM IS:     Time-Carrier-Notified ;
        DESCRIPTION;
    Release Time.
    The time in hours and minutes when a conveyance is released to a carrier
    at a consignee stop point.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Time-Edit-Check-Memo ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '4' ,
             TYPE             'N' ,
             PICTURE          '9(04)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'TIME' ,
             DUI              'Time24Hr' ;
        CONTAINED:       IN  VehStopPtAs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

381     DEFINE ELEMENT                          Report-Submitted-by-Name ;
        DESCRIPTION;
    Report Submitted by Name.
    The name of the individual submitting a damaged/deadlined container
    report.
     ;
        KEYWORD IS:     'Container' ,
                        'LOB' ,
                        'NOT IN DATA MODEL' ;
        SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
        ATTRIBUTE IS:
             TYPE             'AN' ,
             FIELD-LENGTH     '20' ,
             PICTURE          'X(20)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'NAME' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
382      DEFINE ELEMENT                          Report-Submitted-by-Rank ;
     DESCRIPTION;
  Report Submitted by Rank.
  The rank of the individual submitting a damaged/deadlined container
  report.
   ;
     KEYWORD IS:     'Container' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
     SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
     ATTRIBUTE IS:
          TYPE              'AN' ,
          FIELD-LENGTH       '3' ,
          PICTURE           'X(03)' ,
          SEC-CLASS         'UNCLASSIFIED' ,
          USE               'NAME' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB CONTAINER GROUP' ;

383      DEFINE ELEMENT                          Report-Submitted-by-Unit ;
     DESCRIPTION;
  Report Submitted by Unit.
  The military unit designation of the individual submitting a damaged/
  deadlined container report.
   ;
     KEYWORD IS:     'Container' ,
                     'LOB' ,
                     'NOT IN DATA MODEL' ;
     SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
     ATTRIBUTE IS:
          TYPE              'AN' ,
          FIELD-LENGTH       '35' ,
          PICTURE           'X(35)' ,
          SEC-CLASS         'UNCLASSIFIED' ,
          USE               'ADDRESS' ;
     RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB CONTAINER GROUP' ;
```

```
384     DEFINE ELEMENT                      Report-Submitted-by-Unit-Phone ;
      DESCRIPTION;
   Report Submitted by Unit Telephone Number.
   The unit telephone number of the individual submitting a damaged/
   deadlined container report.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH      '15' ,
           PICTURE          'X(15)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

385     DEFINE ELEMENT                      ReqAAC ;
      SYNONYM IS:     ACTV-ADRS-CD-TRAC-ACTV ,
                      TR-ACTV-AAC ;
      DESCRIPTION;
   Requesting Activity Address Code.
   The activity address code of a unit which is tracing a cargo shipment.
   Used in the TMS DIC.
    ;
      KEYWORD IS:     'Container' ,
                      'CMM' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH      '6' ,
           TYPE             'AN' ,
           PICTURE          'X(06)' ,
           DUI              'AAC' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           CMM-DBMS-NME      'TR-ACTV-AAC' ,
           PROJ-DED-NME      'ACTV-ADRS-CD-TRAC-ACTV' ,
           USE              'CODE' ;
      CONTAINED:        IN  CntnrMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
386      DEFINE ELEMENT                          ReqDTG ;
      DESCRIPTION;
   Request Date Time Group.
   The date time group a movement request is received by a Movement Control
   Element.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '9' ,
           TYPE             'AN' ,
           PICTURE          'X(09)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           DUI              'DTG' ;
      CONTAINED:       IN  FreightMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

387      DEFINE ELEMENT                          ReqLoadDte ;
      DESCRIPTION;
   Requested Load Date.
   The shippers requested date for loading a conveyance.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           FORMAT           'DATACHAIN' ,
           USE              'DATE' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'JulianDte' ;
      CONTAINED:       IN  FreightMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
388     DEFINE ELEMENT                          ReqNme ;
        DESCRIPTION;
    Requestor Name.
    This element is the name of the person who submits a movement request.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '15' ,
             TYPE             'AN' ,
             PICTURE          'X(15)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'NAME' ;
        CONTAINED:       IN  FreightMov ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

389       DEFINE ELEMENT                        ReqNo ;
        SYNONYM IS:     REQ-NO ;
        DESCRIPTION;
    Request Number.
    A number assigned to identify hold/diversion requests against a cargo
    or movement record.
     ;
        KEYWORD IS:     'Container' ,
                        'CMM' ,
                        'CMM-DBMS' ,
                        'NOT IN DATA MODEL' ,
                        'LOB' ;
        SOURCE IS:      'TM 38-LZ1-2-1-C' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '2' ,
             TYPE             'N' ,
             PICTURE          '9(02)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ID-NO' ,
             PROJ-DED-NME     'REQ-NO' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
390      DEFINE ELEMENT                          ReqPullDte ;
     DESCRIPTION;
   Requested Pull Date.
   This shipment requested date for pulling a conveyance.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           FORMAT           'DATACHAIN' ,
           USE              'DATE' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'JulianDte' ;
      CONTAINED:       IN  FreightMov ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

391      DEFINE ELEMENT                          ReqSpotDte ;
     DESCRIPTION;
   Requested Spot Date.
   The shippers requested date for a conveyance to be spotted.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           FORMAT           'DATACHAIN' ,
           USE              'DATE' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'JulianDte' ;
      CONTAINED:       IN  FreightMov ;
      CONTAINED:       IN  SpotLimit ;
      IDENTIFIES:     SpotLimit ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
392     DEFINE ELEMENT                          ReqSpotQty ;
        DESCRIPTION;
    Requested Spot Quantity.
    The number of conveyances requested by the shipper for a commitment.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '3' ,
             TYPE             'N' ,
             PICTURE          '9(03)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'QUANTITY' ;
        CONTAINED:        IN  SpotLimit ;
        RANGE IS:       '001'
                         THROUGH '999' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

393       DEFINE ELEMENT                        ReqUnit ;
        DESCRIPTION;
    Requesting Unit.
    This element is the name of the unit requesting a movement.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '20' ,
             TYPE             'AN' ,
             PICTURE          'X(20)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'TEXT' ,
             DUI              'FUDsg' ;
        CONTAINED:        IN  FreightMov ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
394     DEFINE ELEMENT                          RespCd ;
      SYNONYM IS:     RESP-CD ;
      DESCRIPTION;
   Response Code.
   A code that identifies the type media to be used in responding to
   a transaction.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           CMM-DBMS-NME      'RESP-CD' ,
           FORMAT           'ROOT' ,
           PROJ-DED-NME      'RESP-CD' ,
           USE              'CODE' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      CODE:           'A'
                       MEANS
                      'Autodin' ;
      CODE:           'E'
                       MEANS
                      'Magnetic Tape' ;
      CODE:           'M'
                       MEANS
                      'Mail' ;
      CODE:           'P'
                       MEANS
                      'Phone' ;
      CODE:           'T'
                       MEANS
                      'TELEX' ;
      CONTAINED:       IN  MEvent ;
      CONTAINED:       IN  RespMediaCd ;
      IDENTIFIES:     RespMediaCd ;
      RANGE IS:       'A' ,
                      'E' ,
                      'M' ,
                      'P' ,
                      'T' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
395      DEFINE ELEMENT                          RespCdDescr ;
       DESCRIPTION;
   Response Code Description.
   The description of the response codes.
    ;
       KEYWORD IS:     'Container' ,
                       'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
       ATTRIBUTE IS:
            TYPE            'AN' ,
            FIELD-LENGTH     '10' ,
            PICTURE         'X(10)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'TEXT' ;
       CONTAINED:       IN  RespMediaCd ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CNTNR/FRT GROUP' ;

396      DEFINE ELEMENT                          RmnSpots ;
       DESCRIPTION;
   Remaining Spots.
   The remaining spots authorized after subtracting requested spots
   from authorized spots.
    ;
       KEYWORD IS:     'Freight' ,
                       'NOT IN DATA MODEL' ,
                       'LOB' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '2' ,
            TYPE            'N' ,
            PICTURE         '9(02)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'QUANTITY' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
397      DEFINE ELEMENT                          Rmrk ;
      DESCRIPTION;
   Remarks.
   Any unique information not provided for in the other TMAF elements that
   is deemed essential for the AACCurr.
    ;
      KEYWORD IS:     'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           PICTURE          'X(50)' ,
           FIELD-LENGTH      '50' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      CONTAINED:        IN  RemarkLine ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;

398      DEFINE ELEMENT                          RmrkLineNo ;
      DESCRIPTION;
   Remark Line Number.
   A sequence number used to keep remarks in the proper order.
    ;
      KEYWORD IS:     'Freight' ,
                      'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TMAS/FRT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE             'N' ,
           FIELD-LENGTH      '2' ,
           PICTURE          '9(02)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'SEQ-NO' ;
      CONTAINED:        IN  FrtRemarkLn ;
      CONTAINED:        IN  RemarkLine ;
      IDENTIFIES:     FrtRemarkLn ;
      IDENTIFIES:     RemarkLine ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS/FRT GROUP' ;
```

```
399      DEFINE ELEMENT                          RmrksCgoDescr ;
       DESCRIPTION;
   Remarks/CargoDescription.
   Identifies additional descriptive data per shipment unit TCN, of cargo
   being offered, such as description of general cago not otherwise
   specified, vehicle description, special cargo description. etc.  Also
   used for full 8-position shipping container number.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '26' ,
            TYPE             'AN' ,
            PICTURE          'X(26)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'TEXT' ;
       CONTAINED:        IN  ExportWater ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
400     DEFINE ELEMENT                          Rsn-Cd ;
        DESCRIPTION;
   Reason Code.
   A code which identifies the reason an asset is in an inbound loaded
   status for more than 72 hours.
    ;
       KEYWORD IS:     'Freight' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
       SOURCE IS:      'TIP 4, Encl 15' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '1' ,
            TYPE             'A' ,
            PICTURE          'A(01)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ;
       CODE:           'A'
                        MEANS
                       'No MHE available' ;
       CODE:           'B'
                        MEANS
                       'Lack of storage space' ;
       CODE:           'C'
                        MEANS
                       'Higher priority cargo on hand' ;
       CODE:           'D'
                        MEANS
                       'Lack of personnel' ;
       CODE:           'E'
                        MEANS
                       'Pending reconsignment' ;
       RANGE IS:       'A'
                        THROUGH 'F' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
401       DEFINE ELEMENT                          RsnDenyCd ;
          SYNONYM IS:     RSN-CD-HOLD-DIVRSN-DENY ,
                          RSN-DEND-CD ;
          DESCRIPTION;
     Reason Denied Code.
     A code used to identify the reason a hold or diversion was denied.
      ;
          KEYWORD IS:     'Container' ,
                          'CMM' ,
                          'Data Model' ,
                          'LOB' ,
                          'CMM-DBMS' ;
          SEE MEMO:
               Code-Tbl-Validation-Memo ;
          SOURCE IS:      'CONTAINER DATA MODEL' ;
          ATTRIBUTE IS:
               FIELD-LENGTH     '2' ,
               TYPE             'AN' ,
               PICTURE          'X(02)' ,
               SEC-CLASS        'UNCLASSIFIED' ,
               USE              'CODE' ,
               CMM-DBMS-NME      'RSN-DEND-CD' ,
               PROJ-DED-NME      'RSN-CD-HOLD-DIVRSN-DENY' ;
          CODE:           'UN'
                           MEANS
                          'Unit Location Unknown' ;
          CODE:           'AD'
                           MEANS
                          'Shipment Enroute' ;
          CODE:           'XX'
                           MEANS
                          'Not Economically Feasible' ;
          CODE:           'FU'
                           MEANS
                          'Requested Hold Facility Full' ;
          CODE:           'AA'
                           MEANS
                          'Inadequate Hold Fac Aval' ;
          CODE:           'LR'
                           MEANS
                          'Limited Resources Available' ;
          CODE:           'CD'
                           MEANS
                          'Consignee Cannot Receive' ;
          CODE:           'MM'
                           MEANS
                          'Other' ;
          CODE:           '07'
                           MEANS
```

```
                    'Cargo Discharged at Consignee' ;
      CODE:         '16'
                     MEANS
                    'Cargo Arrived at Destination' ;
      CONTAINED:     IN  MEvent ;
      CONTAINED:     IN  ReasonDeny ;
      IDENTIFIES:   ReasonDeny ;
      RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB CONTAINER GROUP' ;

402     DEFINE ELEMENT                        RsnDenyCdDescr ;
      DESCRIPTION;
   Reason Denied Code Description.
   A narrative description of RsnDenyCd.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '25' ,
           TYPE             'AN' ,
           PICTURE          'X(25)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      CONTAINED:        IN  ReasonDeny ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

403     DEFINE ELEMENT                        RtCd ;
      DESCRIPTION;
   Route Code.
   A code representing a designated route.
    ;
      KEYWORD IS:     'SDP' ,
                      'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE             'AN' ,
           PICTURE          'X(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CONTAINED:        IN  FreightAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
404      DEFINE ELEMENT                          RtSeqNo ;
       SYNONYM IS:    Route-Sequence-Number ;
       DESCRIPTION;
   Route Sequence Number.
   The sequence of cargo deliveries/stops on the delivery route.
    ;
       KEYWORD IS:     'SDP' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH    '4' ,
            TYPE            'AN' ,
            PICTURE         'X(04)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'SEQ-NO' ;
       CONTAINED:       IN  FreightAdrs ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

405      DEFINE ELEMENT                          STMRAsQty ;
       DESCRIPTION;
   Standing Transportation Movement Request Asset Quantity.
   The number of assets required by an STMR.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH    '2' ,
            TYPE            'AN' ,
            PICTURE         'X(02)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'QUANTITY' ;
       CONTAINED:       IN  STMR ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
406     DEFINE ELEMENT                          STMRAsTy ;
      DESCRIPTION;
   Standing Transportation Movement Request Asset Type.
   A code requesting the type of assets required by an STMR.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           STMRAsTy-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '2' ,
           TYPE             'AN' ,
           PICTURE          'X(02)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           DUI              'TyAsCd' ;
      CONTAINED:       IN  STMR ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

407     DEFINE ELEMENT                          STMRCgoDescr ;
      DESCRIPTION;
   Standing Transportation Movemenet Release Cargo Description.
   A description of the type of cargo moving by an STMR.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '10' ,
           TYPE             'AN' ,
           PICTURE          'X(10)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      CONTAINED:       IN  STMR ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
408      DEFINE ELEMENT                          STMRConsignee ;
      DESCRIPTION;
   Standing Transportation Movement Release Consignee.
   The DODAAC of the consignee on a STMR.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '6' ,
           TYPE             'AN' ,
           PICTURE          'X(06)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           DUI              'AAC' ;
      CONTAINED:        IN  STMRAdrs ;
      CONTAINED:        IN  STMRStop ;
      IDENTIFIES:     STMRAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

409      DEFINE ELEMENT                          STMRConsignor ;
      DESCRIPTION;
   Standing Transportation Movement Release Consignor.
   The DODAAC of the consignor on a STMR.
    ;
      KEYWORD IS:     'Freight' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '6' ,
           TYPE             'AN' ,
           PICTURE          'X(06)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           DUI              'AAC' ;
      CONTAINED:        IN  STMRStop ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
410      DEFINE ELEMENT                          STMRFBldgNo ;
      DESCRIPTION;
   Standing Transportation Movement Release Freight Building Number.
   The building number of the ship-to address on a STMR.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '10' ,
           TYPE             'AN' ,
           PICTURE          'X(10)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'Bldg' ,
           USE              'ADDRESS' ;
      CONTAINED:        IN  STMRAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

411      DEFINE ELEMENT                          STMRFBrksKsrn ;
      DESCRIPTION;
   Standing Transportation Movement Release Freight Barracks Kaserne.
   The barracks or Kaserne of the ship-to address on a STMR.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '25' ,
           TYPE             'AN' ,
           PICTURE          'X(25)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ADDRESS' ,
           DUI              'FBrksKsrn' ;
      CONTAINED:        IN  STMRAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
412      DEFINE ELEMENT                          STMRFMCTPOC ;
      DESCRIPTION;
   Standing Transportation Movement Release Freight Movement Control Team
   Point of Contact.
   The MCT's point of contact at the ship-to address for a STMR.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '25' ,
           TYPE             'AN' ,
           PICTURE          'X(25)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'NAME' ,
           DUI              'FMCTPOC' ;
      CONTAINED:       IN  STMRAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

413      DEFINE ELEMENT                          STMRFMCTTel ;
      DESCRIPTION;
   Standing Transportation Movement Release Freight Movement Control Team
   Telephone.
   The telephone number of the MCT's point of contact at the ship-to
   address on an STMR.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '25' ,
           TYPE             'AN' ,
           PICTURE          'X(25)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'FMCTTel' ,
           USE              'ADDRESS' ;
      CONTAINED:       IN  STMRAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
414      DEFINE ELEMENT                          STMRFUDsg ;
      DESCRIPTION;
   Standing Transportation Movement Release Freight unit Designation.
   The unit designation of the ship-to activity on a STMR.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '35' ,
           TYPE             'AN' ,
           PICTURE          'X(35)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'FUDsg' ,
           USE              'ADDRESS' ;
      CONTAINED:        IN  STMRAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

415      DEFINE ELEMENT                          STMRJulDte ;
      DESCRIPTION;
   A 4-position Julian date which is included in the TMR RefNo of a STMR.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'DATE' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:        IN  STMRStop ;
      CONTAINED:        IN  TMRRefNo ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
416      DEFINE ELEMENT                          STMRNo ;
        DESCRIPTION;
    Standing Transportation Movement Release Number.
    A control number assigned by the STMR approving authority.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '4' ,
             TYPE             'AN' ,
             PICTURE          'X(04)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ID-NO' ;
        CONTAINED:        IN  STMR ;
        CONTAINED:        IN  STMRStop ;
        IDENTIFIES:     STMR ;
        IDENTIFIES:     STMRStop ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

417      DEFINE ELEMENT                          STMRRmrk ;
        DESCRIPTION;
    Standing Transportation Movement Release Remarks.
     ;
        KEYWORD IS:     'Freight' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '50' ,
             TYPE             'AN' ,
             PICTURE          'X(50)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'TEXT' ;
        CONTAINED:        IN  STMRStop ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
418      DEFINE ELEMENT                          SealNo ;
      DESCRIPTION;
   Seal Number.
   Identifies the full seal number.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '8' ,
           TYPE             'AN' ,
           PICTURE          'X(08)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

419      DEFINE ELEMENT                          SecConsolNo ;
      DESCRIPTION;
   Second Consolidation Number.
   Used to identify the shipment in double consolidation.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'AN' ,
           PICTURE          'X(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
420      DEFINE GROUP                          Seq-No ;
       DESCRIPTION;
   Sequence Number.
   A value used to identify erroneous or incomplete ETA forecast records.
    ;
       KEYWORD IS:     'Container' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
       SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
       ATTRIBUTE IS:
            TYPE            'N' ,
            FIELD-LENGTH     '10' ,
            PICURE          '9(10)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'SEQ-NO' ;
       CONSISTS OF:
            JulianDte ,
            Sequence-No ,
            Prefix-Code ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;

421      DEFINE ELEMENT                        SeqNo ;
       DESCRIPTION;
   Sequence Number.
   Identifies the sequence in which events are recorded/reported.
    ;
       KEYWORD IS:     'Container' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '1' ,
            TYPE            'AN' ,
            PICTURE         'X(01)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'SEQ-NO' ;
       CONTAINED:       IN  MEvent ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
422      DEFINE ELEMENT                          Sequence-No ;
     DESCRIPTION;
   Sequence Number.
   The last four digits of the Seq-No which is used to count and identify
   the records containing ETA forecast errors.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      CONTAINED:        IN  Seq-No ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

423      DEFINE ELEMENT                          SerNo ;
     DESCRIPTION;
   Serial Number.
   The number assigned by an origin MCT to ensure unique identification
   of a particular TMR.  These numbers are reused each month.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      CONTAINED:        IN  CntnrMov ;
      CONTAINED:        IN  FreightMov ;
      CONTAINED:        IN  TMRPrefix ;
      CONTAINED:        IN  XRefTMRPrefix ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
424     DEFINE ELEMENT                          ShipToAAC ;
      SYNONYM IS:     ACTV-ADRS-CD-SHPMT-U-CNSGNE ,
                      ConsigneeAAC ,
                      DestAAC ,
                      SHPMT-U-CN-AAC ,
                      Ship-to-DODAAC ;
      DESCRIPTION;
Ship-To Department of Defense Activity Address Code.
The DODAAC assigned to the unit receiving freight/cargo for the
AACCurr.
 ;
      KEYWORD IS:     'Freight' ,
                      'CMM' ,
                      'CMM-DBMS' ,
                      'EURAAF' ,
                      'Container' ,
                      'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TMAS/CNTNR/FRT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '6' ,
           TYPE             'AN' ,
           PICTURE          'X(06)' ,
           DUI              'AAC' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           CMM-DBMS-NME      'SHPMT-U-CN-AAC' ,
           PROJ-DED-NME      'ACTV-ADRS-CD-SHPMT-U-CNSGNE' ;
      CONTAINED:        IN  Activity ;
      CONTAINED:        IN  CgoActivity ;
      CONTAINED:        IN  CgoAddress ;
      CONTAINED:        IN  FreightAdrs ;
      IDENTIFIES:     CgoAddress ;
      IDENTIFIES:     FreightAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB WORK GROUPS' ;
```

```
425     DEFINE ELEMENT                          ShpmtU ;
      DESCRIPTION;
   Shipment Unit.
   The number of shipment units contained in a consolidation container.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '2' ,
           TYPE             'AN' ,
           PICTURE          'X(02)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

426     DEFINE GROUP                            ShpmtUTCN ;
      SYNONYM IS:     Cargo-TCN ,
                      SHPMT-U-TCN ,
                      TCN-SHPMT-U ;
      DESCRIPTION;
   The TCN applicable to a shipment unit (CMM Definition).
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '17' ,
           TYPE             'AN' ,
           PICTURE          'X(17)' ,
           DUI              'TCN' ,
           CMM-DBMS-NME      'SHPMT-U-TCN' ,
           FORMAT           'DATACHAIN' ,
           PROJ-DED-NME      'TCN-SHPMT-U' ,
           USE              'ID-NO' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      CONSISTS OF:
           AACCurr ,
           TCNSuffix ;
      CONTAINED:         IN  ExportWater ;
      CONTAINED:         IN  MEvent ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
427      DEFINE ELEMENT                          SideNet-Tot ;
       DESCRIPTION;
   Side Net Total.
   The total number of AF side nets on-hand in an MCT area.
    ;
       KEYWORD IS:     'Freight' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
       SOURCE IS:      'TACCS-LOB DFD' ;
       ATTRIBUTE IS:
            TYPE            'N' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'QUANTITY' ,
            FIELD-LENGTH     '4' ,
            PICTURE         '9(04)' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;

428      DEFINE ELEMENT                          SideNetQty ;
       DESCRIPTION;
   Side Net Quantity.
   Number of AF side nets associated with a specific move.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '3' ,
            TYPE            'N' ,
            PICTURE         '9(03)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'QUANTITY' ;
       CONTAINED:        IN  VehStopPt ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
429      DEFINE ELEMENT                          SideNets ;
      DESCRIPTION;
   Side Nets.
   The total number of AF side nets used with 463L pallets which are
   on-hand at an activity.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'N' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'QUANTITY' ,
           FIELD-LENGTH       '4' ,
           PICTURE           '9(04)' ;
      CONTAINED:         IN  Pallet463L ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

430      DEFINE ELEMENT                          SpHdlCd ;
      SYNONYM IS:     SP-HDLG-CD ,
                      SPELL-HDLG-CD ;
      DESCRIPTION;
   Special Handling Code.
   A code that identifies materiel requiring special handling.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ,
                      'MILSTAMP Para B-15' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'CODE' ,
           FIELD-LENGTH       '1' ,
           PICTURE           'X(01)' ,
           CMM-DBMS-NME       'SPELL-HDLG-CD' ,
           PROJ-DED-NME       'SP-HDLG-CD' ;
      CONTAINED:         IN  ExportAir ;
      CONTAINED:         IN  ExportWater ;
      CONTAINED:         IN  SpecialHdl ;
      IDENTIFIES:       SpecialHdl ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
431     DEFINE ELEMENT                          SpHdlCdDescr ;
        DESCRIPTION;
    Special Handling Code Description.
    The description of Special Handling Code.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '25' ,
             TYPE             'AN' ,
             PICTURE          'X(25)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'TEXT' ;
        CONTAINED:        IN  SpecialHdl ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
432      DEFINE ELEMENT                    SpIntCd ;
      DESCRIPTION;
   Special Interest Code.
   A code used to identify different types of cargo moves.  It is used in
   the construction of the TMR number, occuping positions 9 and 10 of a
   12-position TMR.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'CNTNR/FRT DATA MODEL' ,
                      'TIP4' ,
                      'Copes Notes' ,
                      'DOD 4500.32R' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '2' ,
           TYPE             'A' ,
           PICTURE          'A(02)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           FORMAT           'DATACHAIN' ,
           USE              'CODE' ,
           REGULATION       'DOD 4500.32R' ;
      CODE:           'AB'
                       MEANS
                      'ALOC Breakbulk' ;
      CODE:           'AC'
                       MEANS
                      'Mail Container (20 ft)' ;
      CODE:           'AF'
                       MEANS
                      'Air Force MICAP' ;
      CODE:           'AI'
                       MEANS
                      'DSS Breakbulk' ;
      CODE:           'AJ'
                       MEANS
                      'DB Express' ;
      CODE:           'AK'
                       MEANS
                      'Commercial Pick-up at APOD' ;
      CODE:           'AM'
                       MEANS
                      'Medical ALOC' ;
      CODE:           'AN'
                       MEANS
                      'Medical Supplies (not ALOC)' ;
```

```
CODE:       'AP'
             MEANS
            '463L Pallet Returns to APOD' ;
CODE:       'AT'
             MEANS
            'ALOC Thruput' ;
CODE:       'AY'
             MEANS
            'DSS Thruput' ;
CODE:       'AZ'
             MEANS
            'Other Air Cargo' ;
CODE:       'BB'
             MEANS
            'Berlin/Bremerhaven Duty Train' ;
CODE:       'BF'
             MEANS
            'Berlin/Frankfurt Duty Train' ;
CODE:       'BN'
             MEANS
            'Brand Name Resupply' ;
CODE:       'BR'
             MEANS
            'REFORGER Baggage' ;
CODE:       'CA'
             MEANS
            'Empty MILVAN' ;
CODE:       'CI'
             MEANS
            'Command Interest' ;
CODE:       'CS'
             MEANS
            'Military Traction of SEAVAN' ;
CODE:       'DA'
             MEANS
            'Driveaway' ;
CODE:       'EA'
             MEANS
            'USAF AMMO' ;
CODE:       'EB'
             MEANS
            'Explosives Breakbulk' ;
CODE:       'EC'
             MEANS
            'CADS (Containerized Ammo)' ;
CODE:       'EG'
             MEANS
            'Explosives Sensitive Cat I' ;
CODE:       'EH'
```

```
                MEANS
               'Explosives Sensitive Cat II' ;
CODE:          'EJ'
                MEANS
               'Explo Rail Surv Svc Rqr' ;
CODE:          'ER'
                MEANS
               'REFORGER Ammo' ;
CODE:          'EX'
                MEANS
               'Ammo Other (non-sensitive)' ;
CODE:          'EZ'
                MEANS
               'Ammo Other' ;
CODE:          'FB'
                MEANS
               'Fkt/Bremerhaven Duty Train' ;
CODE:          'FG'
                MEANS
               'REFORGER Cargo (General)' ;
CODE:          'GA'
                MEANS
               'AAFES' ;
CODE:          'GC'
                MEANS
               'General Classified' ;
CODE:          'GG'
                MEANS
               'Cgo Requiring Guard Protection' ;
CODE:          'GF'
                MEANS
               'Cargo Subject to Freeze Damage' ;
CODE:          'GS'
                MEANS
               'Signature Service' ;
CODE:          'HF'
                MEANS
               'Hvy Lift (Sp/Emergency Moves)' ;
CODE:          'HL'
                MEANS
               'Regular Heavy Lift' ;
CODE:          'HM'
                MEANS
               'Heavy Lift (MI)' ;
CODE:          'HN'
                MEANS
               'Hvy Lift (One-for-One-Exch)' ;
CODE:          'HP'
                MEANS
```

```
                    'Heavy Lift (POMCUS)' ;
CODE:               'HR'
                     MEANS
                    'Heavy Lift (REFORGER)' ;
CODE:               'MA thru MZ'
                     MEANS
                    'Mail STMR' ;
CODE:               'NA thru NZ'
                     MEANS
                    'Mail STMR' ;
CODE:               'RA thru RJ'
                     MEANS
                    'Reefer STMR' ;
CODE:               'RO'
                     MEANS
                    'Reefer' ;
CODE:               'RS'
                     MEANS
                    'Reefer Static' ;
CODE:               'SB'
                     MEANS
                    'Surface Breakbulk' ;
CODE:               'TA'
                     MEANS
                    'Towaway' ;
CODE:               'XM'
                     MEANS
                    'MI Moves (Not Hvy Lift)' ;
CODE:               'XN'
                     MEANS
                    'One-for-One Exch (Not HL)' ;
CODE:               'XP'
                     MEANS
                    'POMCUS (Not Hvy Lift)' ;
CODE:               'XV'
                     MEANS
                    'Outsize Cgo (Not Hvy Lift)' ;
CODE:               'ZZ'
                     MEANS
                    'Not Otherwise Specified' ;
CONTAINED:           IN  CntnrMov ;
CONTAINED:           IN  Movement-Number ;
CONTAINED:           IN  STMR ;
CONTAINED:           IN  SpecialInt ;
CONTAINED:           IN  TMR ;
CONTAINED:           IN  VehStopPt ;
CONTAINED:           IN  XRefTMR ;
IDENTIFIES:        SpecialInt ;
RESPONSIBLE PROBLEM DEFINER IS:
```

```
                    'TACCS-LOB CNTNR/FRT GROUP' ;

433      DEFINE ELEMENT                          SpIntCdDescr ;
     DESCRIPTION;
   Special Interest Code Description.
   The description of the special interest code.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '25' ,
           TYPE             'AN' ,
           PICTURE          'X(25)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      CONTAINED:       IN  SpecialInt ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;

434      DEFINE ELEMENT                          Spot-Exceeded ;
     DESCRIPTION;
   Spots Exceeded.
   The number of spots computed when the requested spot quantity exceeds
   the number of authorized spots from the new Military Highway Asset
   Forecast.  Generation of this element will occur when the previously
   projected authorized spots is reduced by the mode operator on the new
   Military Highway Asset Forecast.
    ;
      KEYWORD IS:     'Freight' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '02' ,
           TYPE             'N' ,
           PICTURE          '9(02)' ,
           USE              'ERROR MESSAGE' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      RANGE IS:       '00'
                       THROUGH '99' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
435      DEFINE ELEMENT                          SpotFactorCd ;
     DESCRIPTION;
   Spot Factor Code.
   Identifies the reason for the reduction of authorized spots on the
   Military Highway Asset Forecast.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ,
                      '37th Trans Gp Msg 160016Sep86' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '01' ,
           TYPE             'A' ,
           PICTURE          'A(01)' ,
           USE              'CODE' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      CONTAINED:        IN  SpotFactor ;
      CONTAINED:        IN  SpotLimit ;
      IDENTIFIES:     SpotFactor ;
      RANGE IS:       'A'
                       THROUGH 'Z' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

436      DEFINE ELEMENT                          SpotFactorCdDescr ;
     DESCRIPTION;
   Spot Factor Code Description.
   The description of the Spot Factor Codes that explain why
   asset availabilty has been decreased by the mode operator.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ,
                      '37th Trans Gp Msg 160016Sep86' ,
                      '37th Trans Gp Msg' ;
      ATTRIBUTE IS:
           SEC-CLASS        'UNCLASSIFIED' ,
           PICTURE          'X(60)' ,
           FIELD-LENGTH      '60' ,
           USE              'TEXT' ,
           TYPE             'AN' ;
      CONTAINED:        IN  SpotFactor ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
437      DEFINE ELEMENT                    SpotLimitCd ;
     DESCRIPTION;
  Spot Limit Code.
  A code used to identify the type shipment and/or spotting location at
  which assets are positioned for a commitment.

  This datachain is composed of 1st digit MCEPrefix and Spot
  Location/Asset Type.
   ;
     KEYWORD IS:     'Freight' ,
                     'Data Model' ,
                     'LOB' ;
     SEE MEMO:
          Code-Tbl-Validation-Memo ;
     SOURCE IS:      'FREIGHT DATA MODEL' ;
     ATTRIBUTE IS:
          FIELD-LENGTH     '2' ,
          USE              'CODE' ,
          FORMAT           'DATACHAIN' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          TYPE             'A' ,
          PICTURE          'A(02)' ;
     CODE:           'BA'
                      MEANS
                     'Bremerhaven GENNOS' ;
     CODE:           'GA'
                      MEANS
                     'Moenchengladbach GENNOS' ;
     CODE:           'RA'
                      MEANS
                     'Rotterdam GENNOS' ;
     CODE:           'HA'
                      MEANS
                     'Idar-Oberstein GENNOS' ;
     CODE:           'HB'
                      MEANS
                     'Mainz Depot' ;
     CODE:           'HC'
                      MEANS
                     'Belgium' ;
     CODE:           'JA'
                      MEANS
                     'Kaiserslautern GENNOS' ;
     CODE:           'JB'
                      MEANS
                     'Luxembourg' ;
     CODE:           'JC'
                      MEANS
                     'JP4' ;
```

```
CODE:       'JD'
             MEANS
            'MOGAS' ;
CODE:       'JE'
             MEANS
            'JP5' ;
CODE:       'JF'
             MEANS
            'Diesel' ;
CODE:       'JG'
             MEANS
            'Mix (Fuel Pods)' ;
CODE:       'JH'
             MEANS
            'KCS' ;
CODE:       'KA'
             MEANS
            '4th GENNOS' ;
CODE:       'MA'
             MEANS
            'Mannheim GENNOS' ;
CODE:       'MB'
             MEANS
            'Light Van' ;
CODE:       'EA'
             MEANS
            'Frankfurt GENNOS' ;
CODE:       'EB'
             MEANS
            'Giessen' ;
CODE:       'EC'
             MEANS
            'Nahbollenbach' ;
CODE:       'NA'
             MEANS
            'Nuernberg GENNOS' ;
CODE:       'NB'
             MEANS
            'Aschaffenberg' ;
CODE:       'TA'
             MEANS
            'Stuttgart GENNOS' ;
CODE:       'XA'
             MEANS
            'HET (8)' ;
CODE:       'XB'
             MEANS
            'HET (9)' ;
CODE:       'XC'
```

```
                    MEANS
                   'Lowboy' ;
      CODE:        'XD'
                    MEANS
                   'Escort (8)' ;
      CODE:        'XE'
                    MEANS
                   'Escort (9)' ;
      CODE:        'XF'
                    MEANS
                   'Ammo' ;
      CONTAINED:     IN  FreightMov ;
      CONTAINED:     IN  SpotCd ;
      CONTAINED:     IN  SpotLimit ;
      IDENTIFIES:   SpotCd ;
      IDENTIFIES:   SpotLimit ;
      RESPONSIBLE PROBLEM DEFINER IS:
                   'TACCS-LOB FREIGHT GROUP' ;

438     DEFINE ELEMENT                        SpotLimitCdDescr ;
      DESCRIPTION;
   Spot Limit Code Description.
   The description of SpotLimitCd.
    ;
      KEYWORD IS:    'Freight' ,
                     'Data Model' ,
                     'LOB' ;
      SOURCE IS:     'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH    '25' ,
           TYPE            'AN' ,
           PICTURE         'X(25)' ,
           USE             'TEXT' ,
           SEC-CLASS       'UNCLASSIFIED' ;
      CONTAINED:      IN  SpotCd ;
      RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;
```

```
439      DEFINE ELEMENT                          SpotTime ;
       DESCRIPTION;
   Spot Time.
   The time an asset is to be spotted on a STMR.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '4' ,
            TYPE             'N' ,
            PICTURE          '9(04)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'DATE' ;
       CONTAINED:        IN  STMRStop ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;

440      DEFINE ELEMENT                          StAdrs ;
       DESCRIPTION;
   Street Address.
   The street address (name and number) associated with the freight
   address, or the street or post office box address of the billing
   or mailing address.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '25' ,
            TYPE             'AN' ,
            PICTURE          'X(25)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            FORMAT           'ROOT' ,
            USE              'ADDRESS' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
441       DEFINE ELEMENT                        StaCd ;
      DESCRIPTION;
   Status Code.
   A code which indicates the status of a conveyance.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '2' ,
           TYPE             'N' ,
           PICTURE          '9(02)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:             '01'
                         MEANS
                        'Empty Available (No TMR)' ;
      CODE:             '03'
                         MEANS
                        'Empty and Deadlined (No TMR)' ;
      CODE:             '11'
                         MEANS
                        'Misspot, No Trailer Available' ;
      CODE:             '12'
                         MEANS
                        'Misspot, No Tractor Available' ;
      CODE:             '13'
                         MEANS
                        'Misspot, Other' ;
      CODE:             '17'
                         MEANS
                        'Spotted Loaded/Pending Load' ;
      CODE:             '18'
                         MEANS
                        'Loaded and Deadlined' ;
      CODE:             '19'
                         MEANS
                        'Loaded and Pending Pull' ;
      CODE:             '22'
                         MEANS
                        'Mispulled and Deadlined' ;
      CODE:             '23'
                         MEANS
                        'Misspulled No Documentation' ;
      CODE:             '24'
                         MEANS
```

```
                    'Misspulled and Not Loaded' ;
        CODE:       '26'
                     MEANS
                    'Mispulled, Other' ;
        CODE:       '27'
                     MEANS
                    'Mispulled, Inclement Weather' ;
        CODE:       '42'
                     MEANS
                    'Loaded Inbound' ;
        CODE:       '50'
                     MEANS
                    'Arrive Loaded' ,
                    'Dischg/Dprt Empty Same Day' ;
        CODE:       '55'
                     MEANS
                    'Arrived Loaded' ,
                    'Dischg/Dprted (Multistop)' ;
        CODE:       '60'
                     MEANS
                    'Spotted for Outbound' ,
                    'Loaded/Departed Same Day' ;
        CONTAINED:    IN  AssetStatus ;
        IDENTIFIES:  AssetStatus ;
        RESPONSIBLE PROBLEM DEFINER IS:
                    'TACCS-LOB FREIGHT GROUP' ;

442       DEFINE ELEMENT                    StaCdDescr ;
        DESCRIPTION;
    Status Code Description.
    The description of the status codes.
     ;
        KEYWORD IS:    'Freight' ,
                       'Data Model' ,
                       'LOB' ;
        SOURCE IS:     'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH    '50' ,
             TYPE            'AN' ,
             PICTURE         'X(50)' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             USE             'TEXT' ;
        CONTAINED:     IN  AssetStatus ;
        RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
443      DEFINE ELEMENT                          StgIndic ;
       DESCRIPTION;
   Staging Indicator.
   A code which indicates the staging status of a container move.
    ;
       KEYWORD IS:     'Container' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '1' ,
            TYPE             'AN' ,
            PICTURE          'X(01)' ,
            USE              'CODE' ,
            SEC-CLASS        'UNCLASSIFIED' ;
       CODE:           'Y'
                        MEANS
                       'Yes' ;
       CODE:           'Blank'
                        MEANS
                       'No' ;
       CONTAINED:       IN  CntnrMov ;
       RANGE IS:       'Y' ,
                       'Blank' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
444      DEFINE ELEMENT                          StpCompDte ;
       DESCRIPTION;
    Stop Complete Date.
    A system-generated date in the stop record which indicates when the
    record is complete.  It is the date that the stop complete flag is
    turned on.
     ;
       KEYWORD IS:     'Freight' ,
                       'LOB' ,
                       'Data Model' ;
       SEE MEMO:
            Julian-Date-Edit-Check-Memo ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            TYPE             'N' ,
            FIELD-LENGTH      '5' ,
            PICTURE          '9(05)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'DATE' ,
            DUI              'JulianDte' ,
            FORMAT           'DATACHAIN' ;
       CONTAINED:        IN  VehStopPt ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;

445      DEFINE ELEMENT                          StpCompFlag ;
       DESCRIPTION;
    Stop Complete Flag.
    A flag which indicates when a container has been diverted or
    reconsigned, or picked up by one commerical carrier.
     ;
       KEYWORD IS:     'Container' ,
                       'Data Model' ,
                       'LOB' ,
                       'Freight' ;
       SOURCE IS:      'CONTAINER DATA MODEL' ,
                       'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH      '1' ,
            TYPE             'AN' ,
            PICTURE          'X(01)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'FLAG' ;
       CONTAINED:        IN  CntnrMovStp ;
       CONTAINED:        IN  VehStopPt ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
446      DEFINE ELEMENT                        StpNonFcst ;
     DESCRIPTION;
   Stop Non-Forecasted Container.
   A flag in the container move stop record that indicates a container was
   not forecasted for that stop.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'FLAG' ;
      CODE:           'Y'
                       MEANS
                      'Yes' ;
      CODE:           'Blank'
                       MEANS
                      'No' ;
      CODE:           'R'
                       MEANS
                      'Cntnr manifest & rept to TMCA' ;
      CONTAINED:       IN  CntnrMovStp ;
      RANGE IS:       'Y' ,
                      'Blank' ,
                      'R' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
447      DEFINE ELEMENT                          StpOffCd ;
       DESCRIPTION;
    Stop Off Code.
    Identifies the stop sequence on a STMR.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'A' ,
             PICTURE          'A(01)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'SEQ-NO' ;
        CONTAINED:       IN  STMRStop ;
        IDENTIFIES:     STMRStop ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

448      DEFINE ELEMENT                          StpOffIndicr ;
       DESCRIPTION;
    Stop Off Indicator.
    Indicates stop off and sequence of a contents within a container.
     ;
        KEYWORD IS:     'Freight' ,
                        'LOB' ,
                        'Data Model' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'AN' ,
             PICTURE          'X(01)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'SEQ-NO' ;
        CONTAINED:       IN  ExportWater ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
449      DEFINE ELEMENT                          StpSeqNo ;
     DESCRIPTION;
   Stop Sequence Number.
   The 8th position of a 12-position TMR number depicting the stop sequence
   of the commitment.

   For Freight, values are A thru Z (less I and O).
   For Container, values are 1 thru 9 and Z.
    ;
       KEYWORD IS:      'Container' ,
                        'CMM' ,
                        'Freight' ,
                        'Data Model' ,
                        'LOB' ;
       SOURCE IS:       'TM 38-LZ1-2-1-C' ,
                        'CNTNR/FRT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '1' ,
            TYPE             'AN' ,
            PICTURE          'X(01)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'SEQ-NO' ;
       CONTAINED:        IN  AirIdentNo ;
       CONTAINED:        IN  CntnrMovStp ;
       CONTAINED:        IN  FrtDiscrp ;
       CONTAINED:        IN  FrtMEvent ;
       CONTAINED:        IN  FrtRemarkLn ;
       CONTAINED:        IN  Movement-Number ;
       CONTAINED:        IN  RailMov ;
       CONTAINED:        IN  STMRStop ;
       CONTAINED:        IN  TMR ;
       CONTAINED:        IN  VehStopPt ;
       CONTAINED:        IN  VehStopPtAs ;
       CONTAINED:        IN  XRefTMR ;
       IDENTIFIES:      AirIdentNo ;
       IDENTIFIES:      FrtDiscrp ;
       IDENTIFIES:      FrtMEvent ;
       IDENTIFIES:      FrtRemarkLn ;
       IDENTIFIES:      RailMov ;
       IDENTIFIES:      STMRStop ;
       IDENTIFIES:      VehStopPt ;
       IDENTIFIES:      VehStopPtAs ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
450      DEFINE ELEMENT                          Strap-Tot ;
      DESCRIPTION;
   Strap Total.
   The total number of AF straps on-hand in an MCT area.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB DFD' ;
      ATTRIBUTE IS:
           TYPE            'N' ,
           SEC-CLASS       'UNCLASSIFIED' ,
           USE             'QUANTITY' ,
           FIELD-LENGTH     '4' ,
           PICTURE         '9(04)' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

451      DEFINE ELEMENT                          StrapQty ;
      DESCRIPTION;
   Strap Quantity.
   Number of AF straps associated with a specific move.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE            'N' ,
           PICTURE         '9(03)' ,
           SEC-CLASS       'UNCLASSIFIED' ,
           USE             'QUANTITY' ;
      CONTAINED:       IN  VehStopPt ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
452      DEFINE ELEMENT                          Straps ;
     DESCRIPTION;
   Straps.
   The total number of AF straps used with 463L pallets which are
   on-hand at an activity.
    ;
       KEYWORD IS:     'Freight' ,
                       'LOB' ,
                       'Data Model' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            TYPE              'N' ,
            SEC-CLASS         'UNCLASSIFIED' ,
            USE               'QUANTITY' ,
            FIELD-LENGTH       '4' ,
            PICTURE           '9(04)' ;
       CONTAINED:         IN  Pallet463L ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;

453      DEFINE ELEMENT                          T9SeqNo ;
     DESCRIPTION;
   T9 Sequence Number.
   A number, sequentially assigned, to each set or group of 26 characters
   of misellaneous data.
    ;
       KEYWORD IS:     'Freight' ,
                       'LOB' ,
                       'Data Model' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH       '1' ,
            TYPE              'N' ,
            PICTURE           '9(01)' ,
            SEC-CLASS         'UNCLASSIFIED' ,
            USE               'SEQ-NO' ;
       CONTAINED:         IN  ExportWater ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
454     DEFINE ELEMENT                          TAC ;
      DESCRIPTION;
   Transportation Account Code.
   A code that identifies the appropriate DOD agency, non-DOD agencies,
   or contractor and transportation account chargeable for movement of
   materiel through the defense transportation system (DTS) which
   requires reimbursement for services rendered.  Data items and codes
   are assigned locally by the appropriate agency. The first position
   identifies the organization.  Values are A, F, H, J, M, N, S, T, X, Z,
   2, 4, and 7 for first position.
    ;
      KEYWORD IS:     'Container' ,
                      'CMM' ,
                      'CMM-DBMS' ,
                      'Data Model' ,
                      'LOB' ,
                      'Freight' ;
      SOURCE IS:      'DOD 4500.32-R, Vol II' ,
                      'FREIGHT DATA MODEL' ,
                      'CONTAINER DATA MODEL' ,
                      'TM 38-LZ1-11' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'AN' ,
           PICTURE          'X(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           CMM-DBMS-NME      'TAC' ,
           PROJ-DED-NME      'TAC' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:       IN  CntnrMov ;
      CONTAINED:       IN  ExportAir ;
      CONTAINED:       IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
455      DEFINE ELEMENT                          TAT-Cu ;
     DESCRIPTION;
   TAT Cube.
   Identifies the cubic feet of pieces associated with a TAT record.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'MEASURE' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

456      DEFINE ELEMENT                          TAT-Pc ;
     DESCRIPTION;
   TAT Peices.
   The piece count associated with a TAT record.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
457      DEFINE ELEMENT                          TAT-Wt ;
       DESCRIPTION;
   TAT Weight.
   Identifies in pounds the weight of pieces associated with a TAT record.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '6' ,
           TYPE             'N' ,
           PICTURE          '9(06)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'MEASURE' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

458      DEFINE ELEMENT                          TCMD-IDENT-CON-NO ;
       DESCRIPTION;
   Transportation Control Movement Document Identification Control Number.
   Sequentially assigned serial number for control of accountable
   Transportation Control Movement Documents (TCMD).
    ;
      KEYWORD IS:     'LOB' ,
                      'NOT IN DATA MODEL' ,
                      'Freight' ;
      SOURCE IS:      'TACCS-LOB FREIGHT DFD' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH     '7' ,
           PICTURE          'X(07)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
459      DEFINE GROUP                              TCN ;
       DESCRIPTION;
   Transportation Control Number
   A number assigned to control a shipment unit throughout the transpor-
   tation cycle within the Defense Transportation System.
    ;
       KEYWORD IS:     'Container' ,
                       'CMM' ,
                       'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'TM 38-LZ1-2-1-C' ,
                       'TIP5, para 55' ,
                       'MILSTAMP, Appendix K' ,
                       'CNTNR/FRT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '17' ,
            TYPE             'AN' ,
            PICTURE          'X(17)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            FORMAT           'ROOT' ,
            CMM-DBMS-NME      'TCN' ,
            PROJ-DED-NME      'TCN' ,
            REGULATION       'DOD 4200.5R' ,
            USE              'ID-NO' ;
       CONTAINED:        IN  ExportAir ;
       CONTAINED:        IN  ExportWater ;
       CONTAINED:        IN  FrtMEvent ;
       IDENTIFIES:     ExportAir ;
       IDENTIFIES:     ExportWater ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
460      DEFINE ELEMENT                          TCN-of-Request ;
     DESCRIPTION;
   Transportation Control Number of Request.
   The TCN (container or shipment unit) which has been used on a request to
   hold, stage, or divert a container.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH      '17' ,
           PICTURE          'X(17)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ,
           DUI              'TCN' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

461      DEFINE ELEMENT                          TCNPc ;
     DESCRIPTION;
   Transportation Control Number Pieces.
   The piece count associated with a TCN for a TTF (new movment event)
   transaction.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE             'N' ,
           FIELD-LENGTH      '4' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      CONTAINED:        IN  FrtMEvent ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
462      DEFINE ELEMENT                          TCNSuffix ;
       DESCRIPTION;
   Transportation Control Number Suffix
   The last 11 positions of a standard 17 position TCN number.
    ;
       KEYWORD IS:     'Container' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '11' ,
            TYPE             'AN' ,
            PICTURE          'X(11)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ID-NO' ;
       CONTAINED:        IN  ShpmtUTCN ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;

463      DEFINE ELEMENT                          TELEX ;
       DESCRIPTION;
   Telephone Exchange.
   Telephone exchange identification for the DODAAC-Current.
    ;
       KEYWORD IS:     'Freight' ,
                       'Container' ,
                       'TMAS' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'TMAS/CNTNR/FRT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '20' ,
            TYPE             'AN' ,
            PICTURE          'X(20)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ADDRESS' ;
       CONTAINED:        IN  Activity ;
       CONTAINED:        IN  CgoActivity ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
464     DEFINE ELEMENT                          TIN ;
        SYNONYM IS:     TRANS-IDENT-NO ,
                        VAN-NO ;
        DESCRIPTION;
    Transportation Identification Number.
    A number that identifies and controls a conveyance/trailer on which
    a breakbulk shipment unit is being transported. I.e., the number of
    a railcar, barge, commercial truck, US government truck, trailer,
    MILVAN, light or heavy military vehicle, driveaway or towaway,
    aircraft, or train.
     ;
        KEYWORD IS:     'Freight' ,
                        'CMM' ,
                        'Data Model' ,
                        'Container' ,
                        'LOB' ;
        SOURCE IS:      'CNTNR/FRT DATA MODEL' ,
                        'TIP3, Encl 15' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '8' ,
             PICTURE          'X(08)' ,
             TYPE             'AN' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'ID-NO' ,
             FORMAT           'ROOT' ,
             CMM-DBMS-NME      'TIN' ,
             PROJ-DED-NME      'TRANS-IDENT-NO' ;
        CONTAINED:        IN  CntnrMov ;
        CONTAINED:        IN  FrtDiscrp ;
        CONTAINED:        IN  FrtMEvent ;
        CONTAINED:        IN  FrtMovAsset ;
        CONTAINED:        IN  Movement-Number ;
        CONTAINED:        IN  VehStopPtAs ;
        IDENTIFIES:     FrtDiscrp ;
        IDENTIFIES:     FrtMEvent ;
        IDENTIFIES:     FrtMovAsset ;
        IDENTIFIES:     VehStopPtAs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
465     DEFINE ELEMENT                          TMAFDteLstUpd ;
      DESCRIPTION;
   Theater Master Address File Date Last Update
   The last date that the TMAF record was updated.
    ;
      KEYWORD IS:     'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Julian-Date-Edit-Check-Memo ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           DUI              'JulianDte' ,
           USE              'DATE' ,
           FORMAT           'DATACHAIN' ;
      CONTAINED:       IN  Activity ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;

466     DEFINE ELEMENT                          TMCA-Origin-Code ;
      DESCRIPTION;
   Transportation Movement Control Agency Code.
   This parameter represents the Origin Code of the Movements Information
   Division of 1st TMCA.
    ;
      KEYWORD IS:     'TMAS' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB TMAS DFD' ;
      ATTRIBUTE IS:
           TYPE             'AN' ,
           FIELD-LENGTH     '3' ,
           PICTURE          'X(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'SYS-PAR' ,
           DUI              'OrigCd' ,
           DEFAULT-VALUE     '1TC' ;
      CONTAINED:       IN  TMAS-System-Parameter-Record ;
      RANGE IS:       '1TC' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```

```
467      DEFINE GROUP                              TMR ;
         SYNONYM IS:     TMR-Number ;
         DESCRIPTION;
    Transportation Movement Request.
    A 12-position field consisting of the OriginMCEPrefix, MthCd,
    SerNo, DestMCEPrefix, StpSeqNo, SpIntCd, ModeCd, and TransPriCd.
     ;
         KEYWORD IS:     'LOB' ,
                         'NOT IN DATA MODEL' ,
                         'Container' ,
                         'Freight' ;
         SOURCE IS:      'TACCS-LOB DFD' ;
         ATTRIBUTE IS:
              FIELD-LENGTH     '12' ,
              TYPE             'AN' ,
              PICTURE          'X(12)' ,
              SEC-CLASS        'UNCLASSIFIED' ,
              USE              'ID-NO' ,
              FORMAT           'DATACHAIN' ;
         CONSISTS OF:
              TMRPrefix ,
              StpSeqNo ,
              SpIntCd ,
              ModeCd ,
              TransPriCd ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
468      DEFINE GROUP                              TMRPrefix ;
       DESCRIPTION;
    Transportation Movement Release Number Prefix.
    The first six characters of transportation movement release (TMR)
    number.
     ;
        KEYWORD IS:     'Container' ,
                        'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '6' ,
             TYPE             'AN' ,
             PICTURE          'X(06)' ,
             FORMAT           'DATACHAIN' ,
             USE              'ID-NO' ,
             SEC-CLASS        'UNCLASSIFIED' ;
        CONSISTS OF:
             OriginMCEPrefix ,
             MthCd ,
             SerNo ;
        CONTAINED:        IN  AirIdentNo ;
        CONTAINED:        IN  AssetRqmt ;
        CONTAINED:        IN  CntnrMov ;
        CONTAINED:        IN  ExportWater ;
        CONTAINED:        IN  FreightMov ;
        CONTAINED:        IN  FrtDiscrp ;
        CONTAINED:        IN  FrtMEvent ;
        CONTAINED:        IN  FrtMovAsset ;
        CONTAINED:        IN  FrtRemarkLn ;
        CONTAINED:        IN  Movement-Number ;
        CONTAINED:        IN  RailMov ;
        CONTAINED:        IN  TMR ;
        CONTAINED:        IN  VehStopPt ;
        CONTAINED:        IN  VehStopPtAs ;
        IDENTIFIES:     AirIdentNo ;
        IDENTIFIES:     AssetRqmt ;
        IDENTIFIES:     FreightMov ;
        IDENTIFIES:     FrtDiscrp ;
        IDENTIFIES:     FrtMEvent ;
        IDENTIFIES:     FrtMovAsset ;
        IDENTIFIES:     FrtRemarkLn ;
        IDENTIFIES:     RailMov ;
        IDENTIFIES:     VehStopPt ;
        IDENTIFIES:     VehStopPtAs ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
469       DEFINE GROUP                              TMRRefNo ;
          DESCRIPTION;
     Transportation Movement Release Reference Number.
          ;
             KEYWORD IS:     'Freight' ,
                             'LOB' ,
                             'Data Model' ;
             SOURCE IS:      'FREIGHT DATA MODEL' ;
             ATTRIBUTE IS:
                  SEC-CLASS       'UNCLASSIFIED' ,
                  FIELD-LENGTH     '6' ,
                  TYPE             'AN' ,
                  PICTURE          'X(06)' ,
                  USE              'ID-NO' ,
                  FORMAT           'DATACHAIN' ;
             CONSISTS OF:
                  MCEPrefix ,
                  MthCd ,
                  STMRJulDte ;
             CONTAINED:        IN  STMRStop ;
             IDENTIFIES:     STMRStop ;
             RESPONSIBLE PROBLEM DEFINER IS:
                             'TACCS-LOB FREIGHT GROUP' ;
```

```
470     DEFINE ELEMENT                          TTPCd ;
       DESCRIPTION;
   Trailer Transfer Point Code.
   A code which identifies a TTP servicing a Ship-to-DODAAC.
    ;
       KEYWORD IS:     'TMAS' ,
                       'Freight' ,
                       'Container' ,
                       'Data Model' ,
                       'LOB' ;
       SEE MEMO:
            Code-Tbl-Validation-Memo ;
       SOURCE IS:      '37th Trans Gp Reg 55-108, Ch.6' ,
                       'TMAS DATA MODEL' ,
                       'FREIGHT DATA MODEL' ,
                       'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '1' ,
            TYPE             'A' ,
            PICTURE          'A(01)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ;
       CODE:           'A'
                        MEANS
                       'Rhein-Main AB' ;
       CODE:           'B'
                        MEANS
                       'Bremerhaven' ;
       CODE:           'C'
                        MEANS
                       'Ramstein AB' ;
       CODE:           'D'
                        MEANS
                       'Giessen' ;
       CODE:           'E'
                        MEANS
                       'Kaiserslautern Panzer Kaserne' ;
       CODE:           'F'
                        MEANS
                       'Mannheim' ;
       CODE:           'G'
                        MEANS
                       'Fuerth (Nuernberg)' ;
       CODE:           'H'
                        MEANS
                       'Mannheim (Temporary)' ;
       CODE:           'I'
                        MEANS
                       'Boeblingen' ;
```

```
        CODE:           'J'
                         MEANS
                        'Nahbollenbach' ;
        CONTAINED:       IN  CgoAddress ;
        CONTAINED:       IN  FreightAdrs ;
        CONTAINED:       IN  TTPUnique ;
        IDENTIFIES:     TTPUnique ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB WORK GROUPS' ;

471     DEFINE ELEMENT                          TTPDescr ;
        DESCRIPTION;
    Trailer Transfer Point Description
    Identifies the TTP associated with the TTP Code.
     ;
        KEYWORD IS:     'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             TYPE            'AN' ,
             FIELD-LENGTH     '35' ,
             PICTURE         'X(35)' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             USE             'NAME' ;
        CONTAINED:       IN  TTPUnique ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;

472     DEFINE ELEMENT                          Tbl-Cd ;
        DESCRIPTION;
    Table Code.
    The code used to identify the record to be added, modified or deleted in
    the Update System Unique Table Processes.
     ;
        KEYWORD IS:     'Container' ,
                        'Freight' ,
                        'LOB' ,
                        'NOT IN DATA MODEL' ;
        SOURCE IS:      'TACCS-LOB CNTNR/FRT DFD' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '5' ,
             TYPE            'AN' ,
             PICTURE         'X(05)' ,
             SEC-CLASS       'UNCLASSIFIED' ,
             USE             'CODE' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
473     DEFINE ELEMENT                          Tbl-Cd-Descr ;
    DESCRIPTION;
Table Code Description.
The textual description of the code in the table which is the object of
the table update process. The description is stored in the database by
its specific name - for example:

   CntnrSzDescr
        CmdtyCdDesr
        OrigCdDescr
        RsnDenyCdDescr
        SpIntCdDescr
        etc.

NOTE:  The field length of specific code descriptions are generally less
than 60 characters and need to be verified for each individual table
accessed.
 ;
    KEYWORD IS:     'NOT IN DATA MODEL' ,
                    'Freight' ,
                    'Container' ,
                    'LOB' ;
    SOURCE IS:      'TACCS-LOB FREIGHT DFD' ;
    ATTRIBUTE IS:
         FIELD-LENGTH     '60' ,
         TYPE             'AN' ,
         PICTURE          'X(60)' ,
         SEC-CLASS        'UNCLASSIFIED' ,
         USE              'TEXT' ;
    RESPONSIBLE PROBLEM DEFINER IS:
                    'TACS-LOB FREIGHT GROUP' ;
```

```
474       DEFINE ELEMENT                          Tbl-Nme ;
      DESCRIPTION;
   Table Name.
   The name used to identify the table which is to be accessed or updated
   by table update and maintenance processes.
    ;
      KEYWORD IS:      'Container' ,
                       'Freight' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
      SOURCE IS:       'TACCS-LOB CNTNR/FRT DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '15' ,
           TYPE             'A' ,
           PICTURE          'A(15)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
475     DEFINE ELEMENT                          TcrTml ;
      SYNONYM IS:     RIC ,
                      TRANSCEIVER-CODE ,
                      XCVR-TERM ;
      DESCRIPTION;
   Transceiver Terminal
   The Routing Indicator Code (RIC) of the current communication center
   supporting a Ship-to-DODAAC.
    ;
      KEYWORD IS:     'CMM' ,
                      'CMM-DBMS' ,
                      'TMAS' ,
                      'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'JANAP 128' ,
                      'ACP 117' ,
                      'TMAS DATA MODEL' ,
                      'CONTAINER DATA MODEL' ,
                      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '7' ,
           TYPE             'A' ,
           PICTURE          'A(07)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ,
           REGULATION       'JANAP 128' ;
      CONTAINED:       IN  CgoAddress ;
      CONTAINED:       IN  FreightAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;
```


```
476      DEFINE ELEMENT                          TopNet-Tot ;
         DESCRIPTION;
    Top Net Total.
    The total number of AF top nets on-hand in an MCT area.
     ;
         KEYWORD IS:     'Freight' ,
                         'LOB' ,
                         'NOT IN DATA MODEL' ;
         SOURCE IS:      'TACCS-LOB DFD' ;
         ATTRIBUTE IS:
              FIELD-LENGTH    '4' ,
              TYPE            'N' ,
              PICTURE         '9(04)' ,
              SEC-CLASS       'UNCLASSIFIED' ,
              USE             'QUANTITY' ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB FREIGHT GROUP' ;


477      DEFINE ELEMENT                          TopNetQty ;
         DESCRIPTION;
    Top Net Quantity.
    Number of AF top nets associated with a specific move.
     ;
         KEYWORD IS:     'Freight' ,
                         'Data Model' ,
                         'LOB' ;
         SOURCE IS:      'FREIGHT DATA MODEL' ;
         ATTRIBUTE IS:
              FIELD-LENGTH    '3' ,
              TYPE            'N' ,
              PICTURE         '9(03)' ,
              SEC-CLASS       'UNCLASSIFIED' ,
              USE             'QUANTITY' ;
         CONTAINED:       IN  VehStopPt ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB FREIGHT GROUP' ;
```

```
478      DEFINE ELEMENT                          TopNets ;
      DESCRIPTION;
   Top Nets.
   The total number of AF top nets used with 463L pallets which
   are on-hand at an activity.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'N' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'QUANTITY' ;
      CONTAINED:        IN  Pallet463L ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

479      DEFINE ELEMENT                          TotCu ;
      DESCRIPTION;
   Total Cube.
   Total number of cubic feet required for a STMR.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '4' ,
           TYPE             'AN' ,
           PICTURE          '9(04)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'MEASURE' ;
      CONTAINED:        IN  STMR ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

AD-A190 395 FUNCTIONAL DESCRIPTION FOR THE DEPARTMENT OF THE ARMY 10/10
MOVEMENTS MANAGEMEN..(U) INTERNATIONAL BUSINESS
SERVICES INC PRINCE GEORGE VA DEFENSE S.. W ANCKAITIS
UNCLASSIFIED 31 DEC 87 DSDPG-375-049-87-3-VOL-3 F/G 12/7 NL

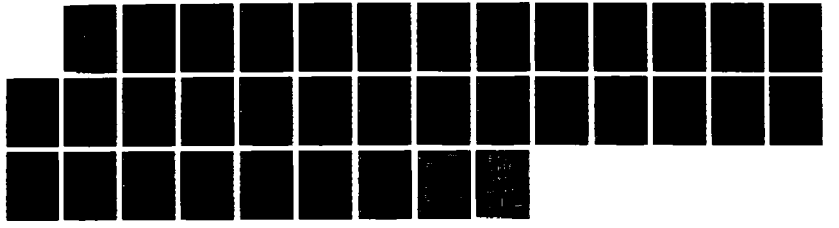

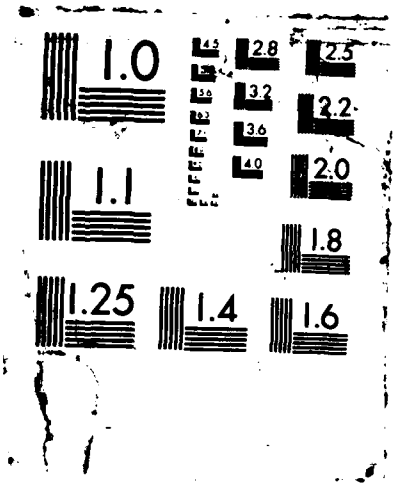
1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0

```
480      DEFINE ELEMENT                          TotDaysHeld ;
      DESCRIPTION;
   Total Days Hold.
   Total number of days a rail car is held by the consignee.
    ;
      KEYWORD IS:     'Freight' ,
                      'NOT IN DATA MODEL' ,
                      'LOB' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '2' ,
           TYPE             'N' ,
           PICTURE          '9(02)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'MEASURE' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
481      DEFINE ELEMENT                          TotStp ;
     DESCRIPTION;
  Total Stops.
  A number which indicates the total number of discharge stops a container
  is scheduled to make.
   ;
     KEYWORD IS:      'Container' ,
                      'Data Model' ,
                      'LOB' ;
     SOURCE IS:       'CONTAINER DATA MODEL' ;
     ATTRIBUTE IS:
          SEC-CLASS        'UNCLASSIFIED' ,
          TYPE             'N' ,
          USE              'QUANTITY' ,
          FIELD-LENGTH      '2' ,
          PICTURE          '9(02)' ;
     CODE:            '1'
                       MEANS
                      '1 Stop' ;
     CODE:            '2'
                       MEANS
                      '2 Stops' ;
     CODE:            '3'
                       MEANS
                      '3 Stops' ;
     CODE:            '4'
                       MEANS
                      '4 Stops' ;
     CODE:            '5'
                       MEANS
                      '5 Stops' ;
     CODE:            '6'
                       MEANS
                      '6 Stops' ;
     CODE:            '7'
                       MEANS
                      '7 Stops' ;
     CODE:            '8'
                       MEANS
                      '8 Stops' ;
     CODE:            '9'
                       MEANS
                      '9 Stops' ;
     CODE:            '10'
                       MEANS
                      '10 Stops' ;
     CONTAINED:        IN  CntnrMov ;
     RANGE IS:        '1'
                       THROUGH '10' ;
```

```
RESPONSIBLE PROBLEM DEFINER IS:
                'TACCS-LOB CONTAINER GROUP' ;
```

```
482     DEFINE ELEMENT                          TransPriCd ;
      DESCRIPTION;
   Transportation Priority Code.
   A code which identifies the movement precedence within the
   transportation network.  It occupies the 12th position of the TMR.
   Order of priority is 9, 1, 2, 3.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:      'TIP4' ,
                      'Copes Notes' ,
                      'HFMS Draft, Fig 19' ,
                      'CNTNR/FRT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'N' ,
           PICTURE          '9(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           1
                       MEANS
                      'TP 1' ;
      CODE:           2
                       MEANS
                      'TP 2' ;
      CODE:           9
                       MEANS
                      999 ;
      CODE:           3
                       MEANS
                      'TP 3' ;
      CONTAINED:       IN  CntnrMov ;
      CONTAINED:       IN  ExportAir ;
      CONTAINED:       IN  ExportWater ;
      CONTAINED:       IN  Movement-Number ;
      CONTAINED:       IN  TMR ;
      CONTAINED:       IN  TransPri ;
      CONTAINED:       IN  VehStopPt ;
      CONTAINED:       IN  XRefTMR ;
      IDENTIFIES:     TransPri ;
      RANGE IS:       '9' ,
                      '1' ,
                      '2' ,
                      '3' ;
      RESPONSIBLE PROBLEM DEFINER IS:
```

```
                    'TACCS-LOB CNTNR/FRT GROUP' ;

483     DEFINE ELEMENT                          TransPriDescr ;
        DESCRIPTION;
    Transportation Priority Description.
    The description of Transportation Priority Codes.
     ;
        KEYWORD IS:     'Freight' ,
                        'Container' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '35' ,
             TYPE             'AN' ,
             PICTURE          'X(35)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'TEXT' ;
        CONTAINED:        IN  TransPri ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;

484       DEFINE ELEMENT                        TrkManRefCd ;
        SYNONYM IS:     Air-Cargo-Manifest-Ref-Cd ;
        DESCRIPTION;
    A locally assigned code by the APOD.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '2' ,
             TYPE             'AN' ,
             PICTURE          'X(02)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'CODE' ;
        CONTAINED:        IN  AirIdentNo ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
485     DEFINE ELEMENT                          TrnsCd ;
      DESCRIPTION;
   A code usde to identify rthe specific file that a transaction is to act
   against.
    ;
      KEYWORD IS:     'Container' ,
                      'Freight' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CNTNR/FRT DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'A' ,
           PICTURE          '9(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CODE:           'A'
                       MEANS
                      'Cargo Activity File Trns' ;
      CODE:           'B'
                       MEANS
                      'Cargo Address File Trns' ;
      RANGE IS:       'A' ,
                      'B' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB WORK GROUPS' ;
```

```
486      DEFINE ELEMENT                          TrnsSeqNo ;
         SYNONYM IS:     CH-NO ;
         DESCRIPTION;
    Transaction Sequence Number.
    A sequential number assigned to each transaction to ensure that it is
    processed in the proper order.
     ;
        KEYWORD IS:      'CMM' ,
                         'CMM-DBMS' ,
                         'TMAS' ,
                         'Data Model' ,
                         'LOB' ;
        SOURCE IS:       'TMAS DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '2' ,
             TYPE             'N' ,
             PICTURE          '9(02)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'SEQ-NO' ,
             CMM-DBMS-NME      'CH-NO' ,
             PROJ-DED-NME      'CH-NO' ;
        CONTAINED:        IN  FreightAdrs ;
        RANGE IS:        '01'
                          THROUGH '99' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB TMAS GROUP' ;
```

```
487      DEFINE ELEMENT                          Ty-Air-Man-Cd ;
       DESCRIPTION;
   Type Air Manifest Code.
   Identifies the type air manifest as either cargo or mail.
    ;
      KEYWORD IS:     'LOB' ,
                      'NOT IN DATA MODEL' ,
                      'Freight' ;
      SOURCE IS:      'TACCS-LOB DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'A' ,
           PICTURE          'A(01)' ,
           USE              'CODE' ,
           SEC-CLASS        'UNCLASSIFIED' ;
      CODE:           'C'
                       MEANS
                      'Cargo' ;
      CODE:           'M'
                       MEANS
                      'Mail' ;
      RANGE IS:       'C' ,
                      'M' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
488     DEFINE ELEMENT                          TyAsCd ;
        SYNONYM IS:     Asset-Code ,
                        Type-Asset ;
        DESCRIPTION;
    Type Asset Code.
    A code which identifies the asset type required for a movement.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        SOURCE IS:      'TIP 4, Encl 4' ,
                        'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '2' ,
             TYPE             'A' ,
             PICTURE          'A(02)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'CODE' ,
             FORMAT           'ROOT' ;
        CODE:           'SP'
                         MEANS
                        'S&P Semi-trailer M127 27 ft' ;
        CODE:           'FB'
                         MEANS
                        'Flat Bed Semi-Tlr M127 27 ft' ;
        CODE:           'SV'
                         MEANS
                        'Security Van Semi-trailer' ;
        CODE:           'MV'
                         MEANS
                        'MILVAN on Chassis' ;
        CODE:           'MC'
                         MEANS
                        'MILVAN Chassis' ;
        CODE:           'MX'
                         MEANS
                        'MILVAN on M871' ;
        CODE:           'CD'
                         MEANS
                        'M871 Accepting 20ft containers' ;
        CODE:           'CX'
                         MEANS
                        'M872 Accepting 20ft containers' ;
        CODE:           'CZ'
                         MEANS
                        'M872 Accepting 40ft containers' ;
        CODE:           'RV'
```

```
                MEANS
               'Reefer Van Semi-Tlr (M349)' ;
CODE:          'RS'
                MEANS
               'Refrigerated Van SC209' ;
CODE:          'TK'
                MEANS
               '5000 gal. Tanker Semi-trailer' ;
CODE:          'LT'
                MEANS
               '2 1/2 Ton Truck, Cargo' ;
CODE:          'LV'
                MEANS
               'Mercedes Van' ;
CODE:          'T4'
                MEANS
               'IHC 4070' ;
CODE:          'T9'
                MEANS
               'M915 12T Tractor' ;
CODE:          'TH'
                MEANS
               'HET Tractor' ;
CODE:          'HL'
                MEANS
               'HET' ;
CODE:          'LB'
                MEANS
               'Low Bed Semi-trailer' ;
CODE:          'DA'
                MEANS
               'Driver Only-Driveaway' ;
CODE:          'MS'
                MEANS
               'M871 30ft Tlr W/SB (Box Tlr)' ;
CODE:          'MB'
                MEANS
               'M871 30ft Tlr W/O SB (FlatBed)' ;
CODE:          'ML'
                MEANS
               'M871 Dropside' ;
CODE:          'XB'
                MEANS
               'M872 40ft Tlr W/O SB (FlatBed)' ;
CODE:          'XL'
                MEANS
               'M872 Dropside' ;
CODE:          'XS'
                MEANS
```

```
                'M872 40ft Tlr W/SB (Box Tlr)' ;
CODE:           'XC'
                 MEANS
                'Leased 40ft Chassis' ;
CODE:           'XF'
                 MEANS
                'Flat Rack' ;
CODE:           'BC'
                 MEANS
                'Berlin Car' ;
CODE:           'BX'
                 MEANS
                'Box Car' ;
CODE:           'FC'
                 MEANS
                'Flat Car' ;
CODE:           'FS'
                 MEANS
                'Flat Car, Special Purpose' ;
CODE:           'FH'
                 MEANS
                'Flat Car, Heavy Duty' ;
CODE:           'SC'
                 MEANS
                'Military Sedan Car' ;
CODE:           'TC'
                 MEANS
                'Military Passenger Car' ;
CODE:           'TX'
                 MEANS
                'Tank Car' ;
CODE:           '1C'
                 MEANS
                '1 Car, Mobile Comd Post' ;
CODE:           '2C'
                 MEANS
                '2 Car, Mobile Comd Post' ;
CODE:           'TA'
                 MEANS
                'Towaway' ;
CODE:           'BG'
                 MEANS
                'Barge' ;
CODE:           'CT'
                 MEANS
                'Commercial Highway' ;
CODE:           'ET'
                 MEANS
                'Rail, Existing Traffic' ;
```

```
      CODE:          'TN'
                      MEANS
                     'Rail, Special Train' ;
      CODE:          'UH'
                      MEANS
                     'Army Air, UH-1' ;
      CODE:          'CH'
                      MEANS
                     'Army Air, CH47' ;
      CODE:          'FW'
                      MEANS
                     'Army Air, Fixed Wing' ;
      CONTAINED:      IN  AssetRqmt ;
      CONTAINED:      IN  TypeAssetCd ;
      IDENTIFIES:    AssetRqmt ;
      IDENTIFIES:    TypeAssetCd ;
      RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;

489     DEFINE ELEMENT                        TyAsCdDescr ;
      DESCRIPTION;
   The description of type asset codes.
    ;
      KEYWORD IS:    'Freight' ,
                     'Data Model' ,
                     'LOB' ;
      SOURCE IS:     'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH    '25' ,
           TYPE            'AN' ,
           PICTURE         'X(25)' ,
           SEC-CLASS       'UNCLASSIFIED' ,
           USE             'TEXT' ;
      CONTAINED:      IN  TypeAssetCd ;
      RESPONSIBLE PROBLEM DEFINER IS:
                     'TACCS-LOB FREIGHT GROUP' ;
```

```
490     DEFINE ELEMENT                          TyCarrCd ;
        SYNONYM IS:     TY-CARR-CD ,
                        TYPE-CARR-CD ;
        DESCRIPTION;
    Type Carrier Code.
    A code which identifies the type carrier or organization responsible
    for accomplishing the transport of cargo to its destination.
     ;
        KEYWORD IS:     'Container' ,
                        'Data Model' ,
                        'LOB' ,
                        'Freight' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        SOURCE IS:      'CONTAINER DATA MODEL' ,
                        'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'A' ,
             PICTURE          'A(01)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             FORMAT           'ROOT' ,
             USE              'CODE' ,
             CMM-DBMS-NME      'TY-CARR-CD' ,
             PROJ-DED-NME      'TYPE-CARR-CD' ;
        CODE:           'C'
                         MEANS
                        'Commercial' ;
        CODE:           'H'
                         MEANS
                        'Host Nation' ;
        CODE:           'M'
                         MEANS
                        'Military' ;
        CODE:           'N'
                         MEANS
                        'Nonappropriated Fund' ;
        CONTAINED:       IN  CntnrMov ;
        CONTAINED:       IN  FreightMov ;
        CONTAINED:       IN  OceanCarr ;
        CONTAINED:       IN  TypeCarrier ;
        IDENTIFIES:     TypeCarrier ;
        RANGE IS:       'C' ,
                        'H' ,
                        'M' ,
                        'N' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
491      DEFINE ELEMENT                          TyCarrCdDescr ;
      DESCRIPTION;
   The description of the type carrier codes.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'Data Model' ,
                      'Freight' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ,
                      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '25' ,
           TYPE             'AN' ,
           PICTURE          'X(25)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'TEXT' ;
      CONTAINED:       IN  TypeCarrier ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;

492      DEFINE ELEMENT                          TyCgoCd ;
      DESCRIPTION;
   Type Cargo Code.
   Identifies the type of cargo in relationship to its hazardous or
   dangerous properties.  E.g. radioactive, explosive, toxic and/or effects
   resulting from exposure to other elements, such as heat, freezing,
   water, etc.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CONTAINED:       IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
493      DEFINE ELEMENT                          TyMovCd ;
     DESCRIPTION;
   Type Movement Code
   A one-position code that identifies whether a shipment is an import,
   export, or intra-theater movement.
    ;
      KEYWORD IS:      'Container' ,
                       'CMM' ,
                       'Data Model' ,
                       'LOB' ,
                       'Freight' ;
      SEE MEMO:
           Code-Tbl-Validation-Memo ;
      SOURCE IS:       'TM38-LZ1-2-1-C' ,
                       'CONTAINER DATA MODEL' ,
                       'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '1' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           PICTURE           'X(01)' ,
           USE               'CODE' ;
      CODE:            '1'
                        MEANS
                       'Import Movement' ;
      CODE:            '2'
                        MEANS
                       'Intratheater Movement' ;
      CODE:            '3'
                        MEANS
                       'Export Movement' ;
      CONTAINED:        IN  FreightMov ;
      CONTAINED:        IN  MEvent ;
      CONTAINED:        IN  TypeMove ;
      IDENTIFIES:      TypeMove ;
      RANGE IS:        'Blank' ,
                       '1' ,
                       '2' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
494       DEFINE ELEMENT                        TyMovCdDescr ;
      DESCRIPTION;
   Type Movement Code Description.
   The description of TypeMovCd.
    ;
      KEYWORD IS:      'Container' ,
                       'Data Model' ,
                       'LOB' ,
                       'Freight' ;
      SOURCE IS:       'CONTAINER DATA MODEL' ,
                       'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '25' ,
           PICTURE           'X(25)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'TEXT' ;
      CONTAINED:         IN  TypeMove ;
      RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;
```

```
495     DEFINE ELEMENT                          TyMovNoCd ;
        SYNONYM IS:     TY-MOV-NO-CD ,
                        TYPE-MOV-NO-CD ;
        DESCRIPTION;
    Type Movement Number Code.
    A code which identifies the type movement number used as the document
    key.
     ;
        KEYWORD IS:     'Container' ,
                        'Data Model' ,
                        'CMM' ,
                        'LOB' ;
        SEE MEMO:
             Code-Tbl-Validation-Memo ;
        SOURCE IS:      'CONTAINER DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '1' ,
             TYPE             'A' ,
             PICTURE          'A(01)' ,
             CMM-DBMS-NME      'TY-MOV-NO-CD' ,
             FORMAT           'ROOT' ,
             PROJ-DED-NME      'TYPE-MOV-NO-CD' ,
             USE              'CODE' ,
             SEC-CLASS        'UNCLASSIFIED' ;
        CODE:           'C'
                         MEANS
                        'SEAVAN TCN' ;
        CODE:           'M'
                         MEANS
                        'TMR' ;
        CODE:           'F'
                         MEANS
                        'Freight Warrant/TIN' ;
        CODE:           'V'
                         MEANS
                        'Van Owner/Van No' ;
        CODE:           'D'
                         MEANS
                        'Voy Docu No' ;
        CONTAINED:       IN  MEvent ;
        CONTAINED:       IN  TypeMovNo ;
        IDENTIFIES:     TypeMovNo ;
        RANGE IS:       'C' ,
                        'M' ,
                        'F' ,
                        'V' ,
                        'D' ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CONTAINER GROUP' ;
```

```
496     DEFINE ELEMENT                          TyMovNoCdDescr ;
      DESCRIPTION;
   The description of the Type Movement Number Code.
    ;
      KEYWORD IS:     'Container' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'CONTAINER DATA MODEL' ;
      ATTRIBUTE IS:
          FIELD-LENGTH     '25' ,
          TYPE             'AN' ,
          PICTURE          'X(25)' ,
          SEC-CLASS        'UNCLASSIFIED' ,
          USE              'TEXT' ;
      CONTAINED:        IN  TypeMovNo ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
497     DEFINE ELEMENT                          TyPackCd ;
        SYNONYM IS:     TY-PK-CD ,
                        TYPE-PK-CD ;
        DESCRIPTION;
    Type Pack Code.
    Identifies the type of packing used for container and breakbulk
    shipments.  The first position of the code for CONEX is always X and the
    second position is based on the CONEX serial number.  The first position
    of the code is always A for MSCVAN, Y for MILVAN, and Z for SEAVAN
    ahe vans and to what capacity the vans were loaded.  Data items and
    codes can be found in DOD 4500.32R, Appendix B.  This datachain consists
    of: TYPE-PD-CD-1, TYPE-PK-CD-2.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ,
                        'CMM-DBMS' ;
        SOURCE IS:      'DOD 4500.32-R' ,
                        'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '2' ,
             PROJ-DED-NME     'TYPE-PK-CD' ,
             CMM-DBMS-NME     'TY-PK-CD' ,
             FORMAT          'DATACHAIN' ,
             USE             'CODE' ,
             TYPE            'AN' ,
             PICTURE         'X(02)' ,
             SEC-CLASS       'UNCLASSIFIED' ;
        CONTAINED:       IN  ExportAir ;
        CONTAINED:       IN  ExportWater ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
498      DEFINE ELEMENT                          TyPwrCd ;
      SYNONYM IS:     TY-PWR-CD ,
                      TYPE-POWER-CD ;
      DESCRIPTION;
   Type Power Code
   A code which identifies the type of power being used for refrigerated
   containers.
    ;
      KEYWORD IS:     'Container' ,
                      'CMM' ,
                      'CMM-DBMS' ,
                      'Data Model' ,
                      'LOB' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '1' ,
           TYPE             'AN' ,
           PICTURE          'X(01)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ,
           CMM-DBMS-NME      'TY-PWR-CD' ,
           PROJ-DED-NME     'TYPE-POWER-CD' ;
      CODE:           'E'
                       MEANS
                      'Electric' ;
      CODE:           'G'
                       MEANS
                      'Gas' ;
      CONTAINED:       IN  CntnrDiscrp ;
      CONTAINED:       IN  MEvent ;
      IDENTIFIES:     CntnrDiscrp ;
      IDENTIFIES:     MEvent ;
      RANGE IS:       'E' ,
                      'G' ;
```

```
499      DEFINE ELEMENT                          UDsg ;
       DESCRIPTION;
   Unit Designation
   The in-the-clear name of the unit associated with the billing, freight,
   or mailing address.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '35' ,
            TYPE             'AN' ,
            PICTURE          'X(35)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            FORMAT           'ROOT' ,
            USE              'NAME' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;

500      DEFINE ELEMENT                          UIC ;
       DESCRIPTION;
   Unit Identification Code
   The current/old UIC of the DODAAC-Current.
    ;
       KEYWORD IS:     'TMAS' ,
                       'LOB' ,
                       'NOT IN DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '6' ,
            TYPE             'AN' ,
            PICTURE          'X(06)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            FORMAT           'ROOT' ,
            USE              'CODE' ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB TMAS GROUP' ;
```

```
501       DEFINE ELEMENT                        UICCurr ;
       DESCRIPTION;
   Unit Identification Code Current.
   The current UIC of the AACCurr.
    ;
       KEYWORD IS:      'EURAAF' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
       SOURCE IS:       'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '6' ,
            TYPE             'AN' ,
            PICTURE          'X(06)' ,
            DUI              'UIC' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ;
       CONTAINED:        IN  Activity ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;

502       DEFINE ELEMENT                        UICOld ;
       DESCRIPTION;
   Unit Identification Code Old.
   The former (if any) UIC of the AACCurr.
    ;
       KEYWORD IS:      'EURAAF' ,
                        'TMAS' ,
                        'Data Model' ,
                        'LOB' ;
       SOURCE IS:       'TMAS DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '6' ,
            TYPE             'AN' ,
            PICTURE          'X(06)' ,
            DUI              'UIC' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ;
       CONTAINED:        IN  Activity ;
       RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB TMAS GROUP' ;
```

```
503      DEFINE ELEMENT                          UN/NA ;
       DESCRIPTION;
   United Nations/North America.
   An indicator which precedes the UN or NA number.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '2' ,
            TYPE             'A' ,
            PICTURE          'A(02)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ;
       CONTAINED:        IN  ExportWater ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;

504      DEFINE ELEMENT                          UN/NANo ;
       DESCRIPTION;
   United Nation or North American Number.
   A number assigned to a substance or article by the United Nations or
   North American Committee of experts on transportation of dangerous or
   hazardous goods.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '4' ,
            TYPE             'N' ,
            PICTURE          '9(04)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'CODE' ;
       CONTAINED:        IN  ExportWater ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
505      DEFINE ELEMENT                          UNClass ;
      DESCRIPTION;
   United Nations Class.
   A code which cross references type of cargo code in the International
   Classification System to the water movement of hazardous material.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '2' ,
           TYPE             'N' ,
           PICTURE          '9(02)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'CODE' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

506      DEFINE ELEMENT                          USAFSerNo ;
      DESCRIPTION;
   US Air Force Serial Number.
   A locally produced serial number by the APOD.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'AN' ,
           PICTURE          'X(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ;
      CONTAINED:        IN  AirIdentNo ;
      IDENTIFIES:     AirIdentNo ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
507      DEFINE ELEMENT                          UltmCnsgn ;
       DESCRIPTION;
   Ultimate Consignee.
   The address of activity to which the material or weapon is ultimately
   shipped.
    ;
       KEYWORD IS:     'Container' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'CONTAINER DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '6' ,
            TYPE            'AN' ,
            PICTURE         'X(06)' ,
            DUI             'AAC' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'CODE' ;
       CONTAINED:       IN  CntnrMov ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB CONTAINER GROUP' ;

508      DEFINE ELEMENT                          VanNo ;
       SYNONYM IS:     VAN-NO-8 ;
       DESCRIPTION;
   Van Number.
   Identifies the complete van or container number.
    ;
       KEYWORD IS:     'Freight' ,
                       'LOB' ,
                       'Data Model' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '8' ,
            TYPE            'N' ,
            PICTURE         '9(08)' ,
            SEC-CLASS       'UNCLASSIFIED' ,
            USE             'ID-NO' ,
            CMM-DBMS-NME     'VAN-NO-8' ,
            PROJ-DED-NME     'VAN-NO-8' ;
       CONTAINED:       IN  ExportWater ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
509       DEFINE ELEMENT                          VesNme ;
          SYNONYM IS:     VES-NME ;
          DESCRIPTION;
     Vessel Name.
     The in the clear name of a vessel.  If the name is not available, the
     vessel class and hull number are used.
      ;
          KEYWORD IS:     'CMM' ,
                          'CMM-DBMS' ,
                          'Data Model' ,
                          'LOB' ,
                          'Freight' ;
          SOURCE IS:      'FREIGHT DATA MODEL' ;
          ATTRIBUTE IS:
               FIELD-LENGTH     '17' ,
               TYPE             'AN' ,
               PICTURE          'X(17)' ,
               SEC-CLASS        'UNCLASSIFIED' ,
               USE              'TEXT' ,
               CMM-DBMS-NME      'VES-NME' ,
               PROJ-DED-NME      'VES-NME' ;
          CONTAINED:        IN  ExportWater ;
          RESPONSIBLE PROBLEM DEFINER IS:
                          'TACCS-LOB FREIGHT GROUP' ;
```

```
510     DEFINE ELEMENT                          VoyDocuNoFltNo ;
        SYNONYM IS:     VOY-DOC-NO ,
                        VOYAGE-DOCU-NO ;
        DESCRIPTION;
    Voyage Document Number/Flight Number.
    A serially assigned number applied at the time of firm cargo booking by
    the Military Sealift Command (MSC).  Consists of MSC-AREA-Cd and
    VOYAGE-NO.
     ;
        KEYWORD IS:     'Container' ,
                        'CMM' ,
                        'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'CNTNR/FRT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '5' ,
             TYPE             'AN' ,
             PICTURE          'X(05)' ,
             CMM-DBMS-NME      'VOY-DOC-NO' ,
             FORMAT           'DATACHAIN' ,
             PROJ-DED-NME      'VOYAGE-DOCU-NO' ,
             USE              'ID-NO' ,
             SEC-CLASS        'UNCLASSIFIED' ;
        CONTAINED:       IN  CntnrMov ;
        CONTAINED:       IN  ExportWater ;
        CONTAINED:       IN  FreightMov ;
        CONTAINED:       IN  Voyage ;
        CONTAINED:       IN  VoyageStop ;
        IDENTIFIES:     Voyage ;
        IDENTIFIES:     VoyageStop ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB CNTNR/FRT GROUP' ;
```

```
511      DEFINE GROUP                          WPOD ;
      DESCRIPTION;
   Water Port of Debarkation.
   An authorized point of entry into a foreign country or the United
   States by water.
    ;
      KEYWORD IS:     'EURAAF' ,
                      'TMAS' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'TMAS DATA MODEL' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '4' ,
           PICTURE           'X(04)' ,
           DUI               'PrtCd' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'CODE' ,
           FORMAT            'DATACHAIN' ;
      CONSISTS OF:
           PrtCd ,
           PrtTyCd ;
      CONTAINED:        IN  FreightAdrs ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB TMAS GROUP' ;

512      DEFINE GROUP                          WPOE ;
      DESCRIPTION;
   Water Port of Embarkation.
   An authorized point of departure from a country by water.
    ;
      KEYWORD IS:     'Container' ,
                      'LOB' ,
                      'NOT IN DATA MODEL' ;
      SOURCE IS:      'TACCS-LOB CONTAINER DFD' ;
      ATTRIBUTE IS:
           TYPE              'AN' ,
           FIELD-LENGTH       '4' ,
           PICTURE           'X(04)' ,
           SEC-CLASS         'UNCLASSIFIED' ,
           USE               'CODE' ,
           FORMAT            'DATACHAIN' ;
      CONSISTS OF:
           PrtCd ,
           PrtTyCd ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB CONTAINER GROUP' ;
```

```
513     DEFINE ELEMENT                          Wdth ;
        DESCRIPTION;
    Width.
    The width of cargo in inches.
     ;
        KEYWORD IS:     'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '3' ,
             TYPE             'N' ,
             PICTURE          '9(03)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'MEASURE' ;
        CONTAINED:       IN  ExportAir ;
        CONTAINED:       IN  ExportWater ;
        CONTAINED:       IN  VehStopPt ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;

514     DEFINE ELEMENT                          Wt ;
        DESCRIPTION;
    Weight.
    The specified quantity representing the heaviness of an object as
    cited in a selected unit of measure, e.g., pounds, hundreds of pounds,
    tons, kilograms.

    This element is depicted in short tons to the nearest tenth.
     ;
        KEYWORD IS:     'CMM' ,
                        'Freight' ,
                        'Data Model' ,
                        'LOB' ;
        SOURCE IS:      'FREIGHT DATA MODEL' ;
        ATTRIBUTE IS:
             FIELD-LENGTH     '6' ,
             TYPE             'N' ,
             PICTURE          '9(06)' ,
             SEC-CLASS        'UNCLASSIFIED' ,
             USE              'MEASURE' ;
        CONTAINED:       IN  ExportAir ;
        CONTAINED:       IN  ExportWater ;
        CONTAINED:       IN  VehStopPt ;
        RESPONSIBLE PROBLEM DEFINER IS:
                        'TACCS-LOB FREIGHT GROUP' ;
```

```
515      DEFINE ELEMENT                          WtOnePc ;
      DESCRIPTION;
   Weight of One Piece.
   The weight of one piece with these dimensions.
    ;
      KEYWORD IS:     'Freight' ,
                      'LOB' ,
                      'Data Model' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'MEASURE' ;
      CONTAINED:        IN  ExportWater ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

516      DEFINE ELEMENT                          WtSTDay ;
      DESCRIPTION;
   Weight Short Tons per Day.
   Total number of short tons moved per day on an STMR.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '5' ,
           TYPE             'N' ,
           PICTURE          '9(05)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'MEASURE' ;
      CONTAINED:        IN  STMR ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
517      DEFINE ELEMENT                          WtThisLotNo ;
       DESCRIPTION;
   Weight of This Lot Number.
   The weight which pertains to a specific lot number of ammunition.
    ;
       KEYWORD IS:     'Freight' ,
                       'Data Model' ,
                       'LOB' ;
       SOURCE IS:      'FREIGHT DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '5' ,
            TYPE             'N' ,
            PICTURE          '9(05)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'MEASURE' ;
       CONTAINED:       IN  ExportWater ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;

518      DEFINE GROUP                            XRefTMR ;
       DESCRIPTION;
   Cross-Reference Transportation Movement Release Number.
   Identifies a TMR which has a direct relationship to the TMR record that
   XRefTMR is resident.
    ;
       KEYWORD IS:     'LOB' ,
                       'Freight' ,
                       'NOT IN DATA MODEL' ;
       ATTRIBUTE IS:
            FIELD-LENGTH     '12' ,
            TYPE             'AN' ,
            PICTURE          'X(12)' ,
            SEC-CLASS        'UNCLASSIFIED' ,
            USE              'ID-NO' ,
            FORMAT           'DATACHAIN' ;
       CONSISTS OF:
            XRefTMRPrefix ,
            StpSeqNo ,
            SpIntCd ,
            ModeCd ,
            TransPriCd ;
       RESPONSIBLE PROBLEM DEFINER IS:
                       'TACCS-LOB FREIGHT GROUP' ;
```

```
519      DEFINE GROUP                          XRefTMRPrefix ;
     DESCRIPTION;
   This group is the first 6 positions of a TMR that is used in conjuction
   with another TMR for a single movement.
    ;
      KEYWORD IS:     'Freight' ,
                      'Data Model' ,
                      'LOB' ;
      SOURCE IS:      'FREIGHT DATA MODEL' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '6' ,
           TYPE             'AN' ,
           PICTURE          'X(06)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'ID-NO' ,
           FORMAT           'DATACHAIN' ;
      CONSISTS OF:
           OriginMCEPrefix ,
           MthCd ,
           SerNo ;
      CONTAINED:        IN  FreightMov ;
      CONTAINED:        IN  XRefTMR ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;

520      DEFINE ELEMENT                        Xmit-Detail-No ;
     DESCRIPTION;
   Transmission Detail Number.
   A sequence number identifying each commitment record sent to the mode
   operator.
    ;
      KEYWORD IS:     'Freight' ,
                      'NOT IN DATA MODEL' ,
                      'LOB' ;
      SOURCE IS:      'TACCS-LOB DFD' ;
      ATTRIBUTE IS:
           FIELD-LENGTH     '3' ,
           TYPE             'N' ,
           PICTURE          '9(03)' ,
           SEC-CLASS        'UNCLASSIFIED' ,
           USE              'SEQ-NO' ;
      RESPONSIBLE PROBLEM DEFINER IS:
                      'TACCS-LOB FREIGHT GROUP' ;
```

```
521      DEFINE ELEMENT                          ZipCd ;
         DESCRIPTION;
      Zip Code.
      Zip code, preceeded by X, used to identify the origin of a SEAVAN.
       ;
         KEYWORD IS:     'Freight' ,
                         'LOB' ,
                         'Data Model' ;
         SOURCE IS:      'FREIGHT DATA MODEL' ;
         ATTRIBUTE IS:
              FIELD-LENGTH     '6' ,
              TYPE             'AN' ,
              PICTURE          'X(06)' ,
              SEC-CLASS        'UNCLASSIFIED' ,
              USE              'ADDRESS' ;
         CONTAINED:        IN  ExportWater ;
         RESPONSIBLE PROBLEM DEFINER IS:
                         'TACCS-LOB FREIGHT GROUP' ;
```

ADSM 18-L24-AKM-BUR-FD
DECEMBER 1987

The proponent of this system is the Deputy Chief of Staff for Logistics, Headquarters, Department of the Army, Washington, DC. This system is maintained by the US Army Logistics Center, Fort Lee, Virginia. Users are invited to send any comments or suggested improvements on a DA Form 2028 (Recommended Changes to Publications and Blank Forms) to Commander, US Army Logistics Center, ATTN: ATCL-SDB, Fort Lee, Virginia 23801-6000.

BY ORDER OF THE SECRETARY OF THE ARMY:

CARL E. VUONO
General, United States Army
Chief of Staff

OFFICIAL:

R. L. DILWORTH
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:

Special Distribution: Copies of this manual are provided on a limited - as required basis to specific offices and activities.

Request for this manual and its changes will be made on a DA Form 17 forwarded to Commander, United States Army Logistics Center, ATTN: ATCL-SR, Fort Lee, Virginia 23801-6000. All requests must contain a justification and your complete mailing address, to include unit/organization, office reference symbol, building and room number (if applicable), installation/state and zip code or APO number. Requests will also contain a point of contact and telephone number. Point of contact for this Headquarters can be reached at the following telephone numbers: Commercial 804-734-3260/3818, AUTOVON 687-3260/3818.

Army-Fort Lee, VA

END

DATE

FILMED

4-88

DTIC