


SAGEN (SADMT (STRATEGIC DEFENSE INITIATIVE ARCHITECTURE 1/1
DATAFLOW MODELING.. (U) INSTITUTE FOR DEFENSE ANALYSES
ALEXANDRIA VA M R KAPPEL ET AL. APR 89 IDA-P-2028

IDA/HQ-87-32466 MDA903-84-C-0031 F/G 15/3.1 NL

SAGEN (SADMT (STRATEGIC DEFENSE INITIATIVE ARCHITECTURE 1/1
DATAFLOW MODELING. (U) INSTITUTE FOR DEFENSE ANALYSES
ALEXANDRIA VA H R KAPPEL ET AL. APR 88 IDA-P-2028
IDA/HQ-87-32466 MDA983-84-C-0031 F/O 15/3 1 NL



UNCLASSIFIED

Copy 20 of 247 copies

DTIC FILE COPY


2

IDA PAPER P-2028

AD-A195 858

SAGEN USER'S GUIDE
Version 1.5

Michael R. Kappel
Cy D. Ardoin
Cathy Jo Linn
Joseph L. Linn
John Salasin

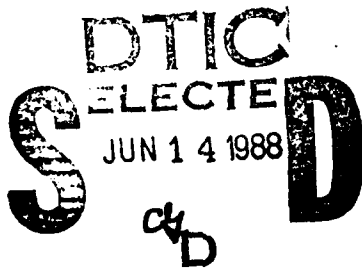

April 1988

DISTRIBUTION STATEMENT A
Approved for public release
Distribution Unlimited

Prepared for
Strategic Defense Initiative Organization (SDIO)



INSTITUTE FOR DEFENSE ANALYSES
1801 N. Beauregard Street, Alexandria, Virginia 22311

88 6 13 11 1

UNCLASSIFIED

IDA Log No. HQ 87-32466

DEFINITIONS

IDA publishes the following documents to report the results of its work.

Reports

Reports are the most authoritative and most carefully considered products IDA publishes. They normally embody results of major projects which (a) have a direct bearing on decisions affecting major programs, or (b) address issues of significant concern to the Executive Branch, the Congress and/or the public, or (c) address issues that have significant economic implications. IDA Reports are reviewed by outside panels of experts to ensure their high quality and relevance to the problems studied, and they are released by the President of IDA.

Papers

Papers normally address relatively restricted technical or policy issues. They communicate the results of special analyses, interim reports or phases of a task, ad hoc or quick reaction work. Papers are reviewed to ensure that they meet standards similar to those expected of refereed papers in professional journals.

Memorandum Reports

IDA Memorandum Reports are used for the convenience of the sponsors or the analysts to record substantive work done in quick reaction studies and major interactive technical support activities; to make available preliminary and tentative results of analyses or of working group and panel activities; to forward information that is essentially unanalyzed and unevaluated; or to make a record of conferences, meetings, or briefings, or of data developed in the course of an investigation. Review of Memorandum Reports is suited to their content and intended use.

The results of IDA work are also conveyed by briefings and informal memoranda to sponsors and others designated by the sponsors, when appropriate.

The work reported in this document was conducted under contract MDA 903 84 C 0031 for the Department of Defense. The publication of this IDA document does not indicate endorsement by the Department of Defense, nor should the contents be construed as reflecting the official position of that agency.

This paper has been reviewed by IDA to assure that it meets high standards of thoroughness, objectivity, and sound analytical methodology and that the conclusions stem from the methodology.

Approved for public release; distribution unlimited

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

AD-A195-85-8

1a REPORT SECURITY CLASSIFICATION Unclassified			1b RESTRICTIVE MARKINGS		
2a SECURITY CLASSIFICATION AUTHORITY			3 DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release: distribution unlimited.		
2b DECLASSIFICATION/DOWNGRADING SCHEDULE					
4 PERFORMING ORGANIZATION REPORT NUMBER(S) IDA Paper P-2028			5 MONITORING ORGANIZATION REPORT NUMBER(S)		
6a NAME OF PERFORMING ORGANIZATION Institute for Defense Analyses		6b OFFICE SYMBOL IDA	7a NAME OF MONITORING ORGANIZATION OUSDA, DIMO		
6c ADDRESS (City, State, and Zip Code) 1801 N. Beauregard St. Alexandria, VA 22311			7b ADDRESS (City, State, and Zip Code) 1801 N. Beauregard St. Alexandria, VA 22311		
8a NAME OF FUNDING/SPONSORING ORGANIZATION Strategic Defense Initiative Org.		8b OFFICE SYMBOL (if applicable) SDIO	9 PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER MDA 903 84 C 0031		
8c ADDRESS (City, State, and Zip Code) SDIO/PI Room 1E149 Pentagon, Washington D.C. 20301-7100			10 SOURCE OF FUNDING NUMBERS		
			PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO. T-R5-422
			WORK UNIT ACCESSION NO.		
11 TITLE (Include Security Classification) SAGEN USER'S GUIDE Version 1.5 (UNCLASSIFIED)					
12 PERSONAL AUTHOR(S) Michael R. Kappel, Cy D. Ardoin, Cathy Jo Linn, Joseph L. Linn, John Salasin					
13a TYPE OF REPORT Final	13b TIME COVERED FROM _____ TO _____		14 DATE OF REPORT (Year, Month, Day) 1988 April		15 PAGE COUNT 53
16 SUPPLEMENTARY NOTATION					
17 COSATI CODES			18 SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	System Architecture; Dataflow Modeling; Simulation; Ada; Battle Management (BM); Command, Control and Communications.		
19 ABSTRACT (Continue on reverse if necessary and identify by block number)					
IDA Paper P-2028 documents a tool that can facilitate the description of processes for the Strategic Defense System (SDS) and Battle Management/Command, Control and Communications (BM/C3) architectures. The process descriptions generated by this tool conform to the Strategic Defense Initiative (SDI) Architecture Dataflow Modeling Technique (SADMT)					
20 DISTRIBUTION/AVAILABILITY OF ABSTRACT ☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT. ☐ DTIC USERS			21 ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a NAME OF RESPONSIBLE INDIVIDUAL Dr. Cathy Jo Linn, IDA			22b TELEPHONE (Include area code) (703) 824-5520	22c OFFICE SYMBOL IDA/CSED	

UNCLASSIFIED

IDA PAPER P-2028

SAGEN USER'S GUIDE
Version 1.5

Michael R. Kappel
Cy D. Ardoin
Cathy Jo Linn
Joseph L. Linn
John Salasin



April 1988

Accession For	
NTIS	ONAS1
DTIC	1-8
Unlimited	U
Justification	U
By	
Date	
A-1	



INSTITUTE FOR DEFENSE ANALYSES

Contract MDA 903 84 C 0031
Task T-R5-422

UNCLASSIFIED

CONTENTS

1. INTRODUCTION	2
2. PROCESS MODEL	2
3. CONVENTIONS	4
3.1 Notational Conventions	4
3.2 Syntactic Conventions	6
3.3 Semantic Conventions	6
3.4 Programmatic Conventions	6
3.5 Keyword Order	7
4. SYNTAX	7
4.1 Process Hierarchy, Ports and Data Types	7
4.2 Port Linkages	7
4.3 Process Semantics	8
5. SEMANTICS	8
5.1 Process Hierarchy, Ports and Data Types	8
5.2 Port Linkages	10
5.3 Process Semantics	10
6. EXECUTION	11
7. REFERENCES	12
APPENDIX A - SAGEN EXAMPLE	14
APPENDIX B - GENERATED SADMT	20
APPENDIX C - SIMULATION OUTPUT	32

LIST OF FIGURES

Figure 1. Depiction of a BM/C3 Process	3
Figure 2. Exploded View of BM/C3	4
Figure 3. Platforms, Technology Modules and Processes	5
Figure 4. Top Level Platform	14
Figure 5. Exploded View of Parent Process	15

1. INTRODUCTION

This paper documents the use of a tool that can facilitate the description of processes for Strategic Defense System (SDS) and Battle Management/Command, Control and Communications (BM/C3) architectures. The generated process description conforms to the Strategic Defense Initiative (SDI) Architecture Dataflow Modeling Technique (SADMT). SADMT descriptions use a complex Ada template to simulate SDS and BM/C3 architectures. This tool, called SAGEN (for SADMT Generator), accepts a simpler specification of the architecture and automatically generates the required SADMT template.

SAGEN eliminates much of the drudgery of specifying the SADMT template for each module. However, Ada must still be used to specify port linkages and process semantics. SADMT modules generated by SAGEN may then be compiled by an Ada compiler, linked with the SADMT Simulation Framework [Linn 88] which is also written in Ada, and executed to simulate the performance of the system.

The SAGEN specification provides constructs to support the SADMT process model. A system is modeled as a hierarchy of processes which communicate via ports. Familiarity with this abstract model as described in [Linn 88] is assumed, but familiarity with the syntax and implementation details of SADMT is not required.

This paper is organized as follows:

Section 2	SADMT process model
Section 3	notational, syntactic, and semantic conventions
Section 4	SAGEN syntax
Section 5	SAGEN semantics
Section 6	execution of SAGEN
Section 7	references
Appendix A	SAGEN example
Appendix B	generated SADMT code
Appendix C	Simulation output

2. PROCESS MODEL

To capture SDS and BM/C3 architectural specifications in early design stages, SADMT defines an abstract entity called a "process" and a mechanism for specifying a process as a set of communicating subprocesses. SADMT processes are defined in a specific format and interprocess communications are performed according to a specific model. SADMT architectural descriptions use the standard syntax and semantics of Ada to capture the information needed to simulate the system.

In SADMT, a system is viewed as a hierarchy of processes. The system itself is the zero-th level process and is specified as a network of level-one processes; similarly, a level-n process may be specified as an interconnected set of level-(n+1) processes. Eventually, some processes will be leaf nodes since they are not decomposed further. The leaf processes contain the semantics of

UNCLASSIFIED

the system. Leaf processes need not all be at the same level.

SADMT processes are defined to have "ports", i.e., windows for passing data into or out of a process. All interprocess communication is accomplished via these ports. A port is either an input port or an output port; SADMT makes no provision for bi-directional ports. Furthermore, ports in SADMT are typed to restrict the data which may flow into or out of a port.

SADMT provides a facility to specify the interconnections of communicating processes. There are three types of interprocess communications links: (1) internal, (2) input-inherited, and (3) output-inherited. In all cases, the data type of the connected ports must be the same. The first type of link, internal, connects an output port of a subprocess to an input port of another subprocess of the same parent process. Inherited links capture the concept that data flowing through a port on a higher level process is actually the input or output of lower level processes. An input-inherited link connects an input port on a parent process to an input port one of its child subprocesses. An output-inherited link connects an output port on a child subprocess to an output port on its parent process.

Various types of links are depicted in Figure 1. The highest level of a BM/C3 process is shown with a single input port and a single output port. (Note that port names and types are not indicated.) Figure 2 is an exploded view of the BM/C3 process, seen as an interconnected set of three subprocesses: (1) threat assessment, (2) weapon assignment, and (3) view of world (a process to manage retained state data.) The solid lines represent internal links, while the dashed lines represent inherited links.

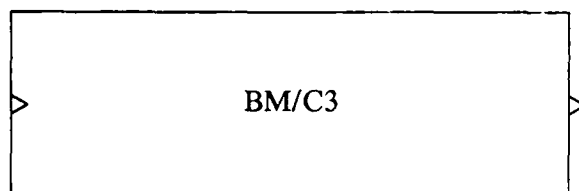


Figure 1. Depiction of a BM/C3 Process

SADMT processes are simulated within the SADMT Simulation Framework [Linn 88]. The Simulation Framework simulates the physical environment in which the SDS operates. The Simulation Framework employs two primitives - platforms and cones. Platforms represent all physical entities including the sensors, weapons, and carrier vehicles of the SDS and the weapons and debris of the threat. Cones represent entities such as communication waves and laser beams.

Platforms are composed of logical processes and technology modules (see Figure 3). Technology modules represent hardware technology such as sensors, weapons, communications and boosters. Technology modules provide the interface between SADMT processes and the Simulation Framework.

UNCLASSIFIED

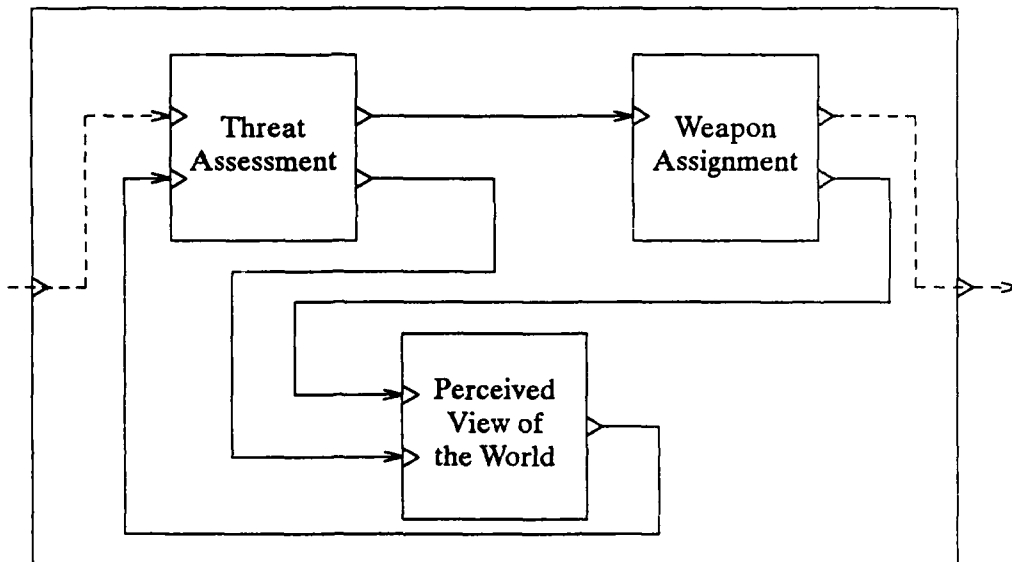


Figure 2. Exploded View of BM/C3

3. CONVENTIONS

3.1 Notational Conventions

The following notational conventions are used in the syntactic specification of SAGEN:

<item>	a variable item
[item]	an optional item
{item1 item2}	item1 or item2
{items}*	items repeated zero or more times

The variables in the syntactic specification are defined as follows:

<alias>	a string of characters
<data_type>	a valid Ada data type
<declarations>	valid Ada declarations
<default>	a valid Ada expression
<discriminant>	a valid Ada discriminant
<name>	a valid Ada identifier
<param_list>	a list of parameters separated by commas

UNCLASSIFIED

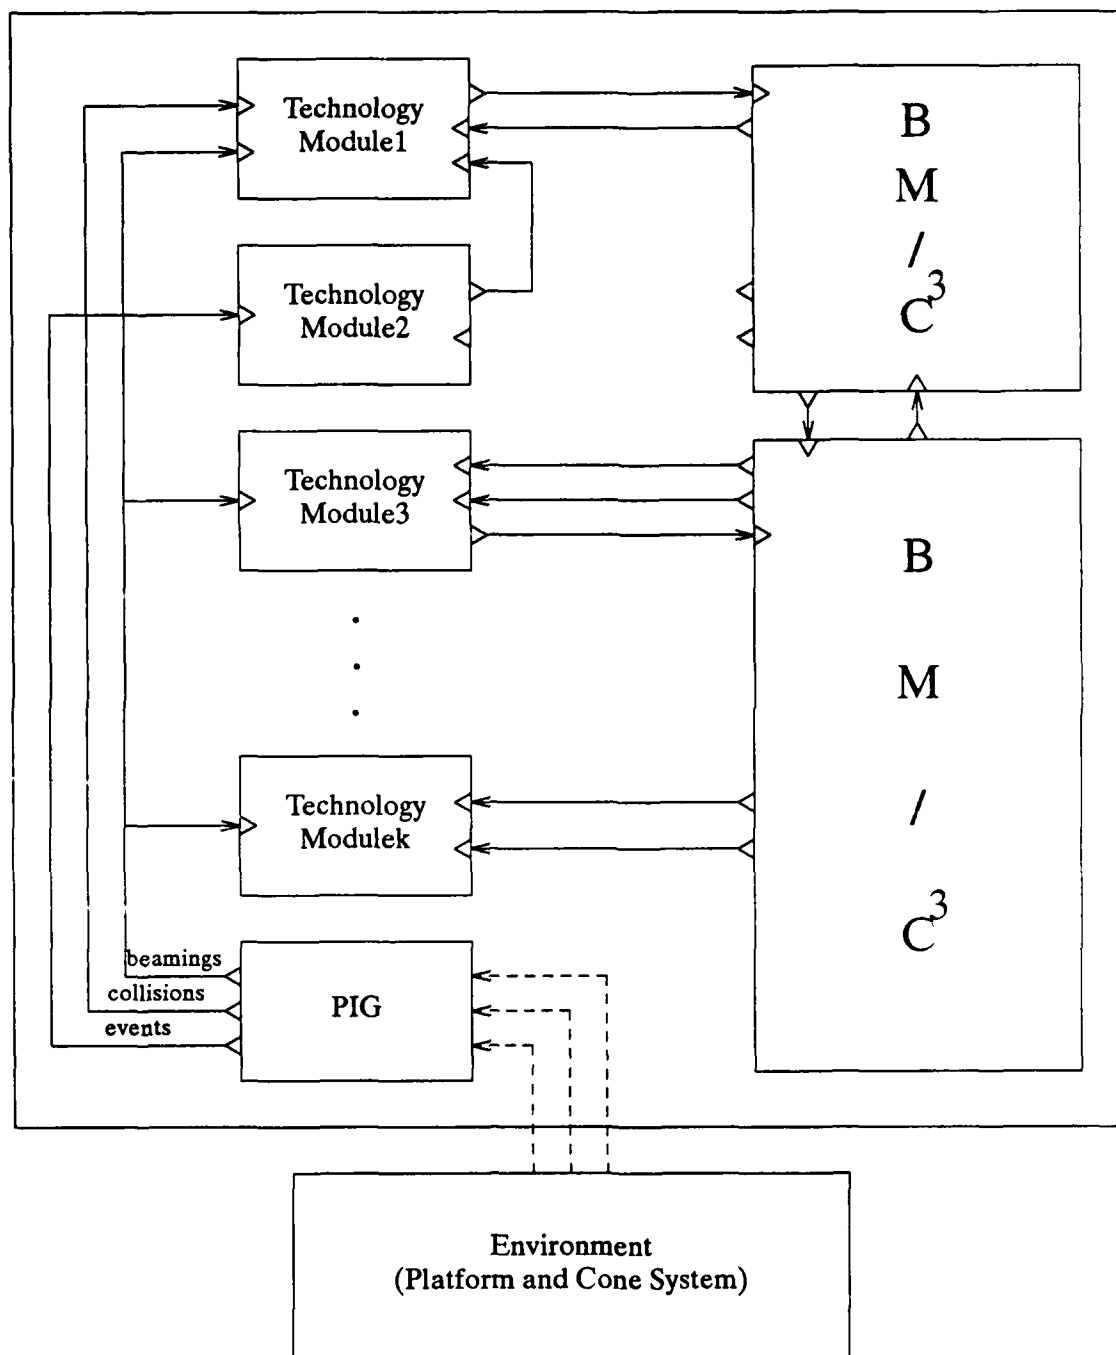


Figure 3. Platforms, Technology Modules and Processes

UNCLASSIFIED

UNCLASSIFIED

<code><range></code>	a valid Ada integer range
<code><with_or_use></code>	a set of valid Ada context and/or visibility clauses

3.2 Syntactic Conventions

SAGEN syntactic conventions are Ada-like and non-restrictive:

1. A SAGEN statement may extend over more than one physical line.
2. More than one SAGEN statement may appear on one physical line.
3. SAGEN keywords and variables may appear in any column.
4. Ada comments may be embedded within a SAGEN statement.

3.3 Semantic Conventions

SAGEN semantic conventions are as follows:

1. Non-SAGEN code (i.e. Ada source and comments) should be valid Ada. If the code is not legal Ada, SAGEN will function properly, but the generated SADMT code will not compile.
2. The Ada source code appearing within SAGEN blocks should not violate the SADMT process model. The user-supplied Ada code should not include direct calls of other process tasks nor the abort statement.
3. The data type of a port is assumed to be declared in a user-supplied package having the same name as the data type followed by “_pkg”. For example, the package `Order_pkg` will be made visible to the process that has a port of type `Order`.
4. A temporary file called `temporary.sagen` is created and deleted by SAGEN. This file may appear if SAGEN terminates abnormally.
5. Comments placed within the main SAGEN block will appear before the package specification in the generated SADMT code. Comments placed within Ada source code in any SAGEN block will appear in the generated SADMT code as entered.
6. Any non-SAGEN code placed between SAGEN blocks will appear at the top of the next generated SADMT file.

3.4 Programmatic Conventions

1. The maximum number of subprocesses per parent process is set at 1000. This limit can be raised by changing constant `max_array_bound` in the SAGEN source file.
2. Variable names are limited to 80 characters. This limit can be raised by changing constant `max_line_length` in the SAGEN source file.
3. The generated SADMT files will be 80 characters wide. This convention can be altered by changing constant `max_line_length` in the SAGEN source file.
4. One physical input line is limited to 256 characters. This limit can be raised by changing variable `line` in the SAGEN source file.

UNCLASSIFIED

UNCLASSIFIED

3.5 Keyword Order

Process, platform or technology module must appear as the first SAGEN statement of each specification. Subprocess, inport, output, parameters, subdata and cone may follow in any order.

Process, platform or technology module and end must appear once for each specification. Subprocess, inport, output, parameters, subdata and cone may each appear zero or more times.

One link or one task block should then follow the main specification. A link block should appear for a platform or a non-leaf process or technology module. A task block should appear for a leaf process or technology module.

4. SYNTAX

SDS and BM/C3 architectures are described in three parts:

1. Process hierarchy, ports and data types
2. Port linkages
3. Process semantics

4.1 Process Hierarchy, Ports and Data Types

The syntax of SAGEN statements for specifying process hierarchy, ports and data types is:

```
[<with_or_use>]
{ $process <name> | $platform <name> := <alias> |
  $tech[nology]_module <name> |
  $dynamic_tech[nology]_module <name> := <alias> } is
  $subprocess[es] <name> [( <range> )] [ := ( <param_list> ) ]
    { , <name> [( <range> )] [ := ( <param_list> ) ] } * ;
  $[selectable_] { { data_ | control_ | mech_ } } { inport[s] | output[s] }
    <name> [( <range> )] : <data_type> [ := ( <param_list> ) ]
    { , <name> [( <range> )] : <data_type> [ := ( <param_list> ) ] } * ;
  ${cone | event | platform}_inport [ <name> ];
  $parameter[s] <name> : <data_type> [( <discriminant> ) ] := ( <default> )
    { , <name> : <data_type> [( <discriminant> ) ] := ( <default> ) } * ;
  $subdata <data_type> { , <data_type> } * ;
  $cone[s] <data_type> { , <data_type> } * ;
$begin
[Ada source lines (body)]
$end;
```

4.2 Port Linkages

The syntax of SAGEN statements for specifying port linkages is:

```
[<with_or_use>]
$link[s] <name> is
```

UNCLASSIFIED

UNCLASSIFIED

```
[<declarations>]
$begin
[Ada source lines (link)]
$end;
```

4.3 Process Semantics

The syntax of SAGEN statements for specifying process semantics is:

```
[<with_or_use>]
$task <name> is
[<declarations>]
$begin
[Ada source lines (task)]
$end;
```

5. SEMANTICS

5.1 Process Hierarchy, Ports and Data Types

The semantics of each SAGEN statement for specifying process hierarchy, ports and data types are described below.

```
[<with_or_use>]
```

These Ada context clauses (with) or visibility clauses (use) are placed at the head of the procedure specification.

```
{ $process <name> | $platform <name> := <alias> |
  $tech[nology]_module <name> |
  $dynamic_tech[nology]_module <name> := <alias> } is
```

Process, platform or technology module specifies the name of an SDI process, platform or technology module, respectively. In addition, a designator string name must be specified for a platform or a dynamic technology module. A dynamic technology module is a special module to facilitate the specification of companion modules such as sensor returns (see [Linn 88]). The specification and body of the creator task (which is what makes a platform process different from a regular SADMT process) is automatically inserted into the task body of the named platform.

```
$subprocess[es] <name> [( <range> )] [ := ( <param_list> ) ]
{ , <name> [( <range> )] [ := ( <param_list> ) ] } * ;
```

Subprocess specifies the names of the SDI subprocesses associated with the named process, platform or technology module. The range parameter is used to specify an array of subprocesses. The param_list parameter may be used to specify parameters for initializing the subprocess (see [Linn 88]). These parameters will be included in the call to procedure initialize for the subprocess. If the named process, platform or technology module has no subprocesses (i.e. it is a leaf), the subprocess statement must not appear.

UNCLASSIFIED

UNCLASSIFIED

```
$[selectable_] [{ data_ | control_ | mech_ }] { inport[s] | outport[s] }  
  <name> [( <range> )]: <data_type> [:= ( <param_list> )]  
  {, <name> [( <range> )]: <data_type> [:= ( <param_list> )] }*;
```

Inport specifies the names of ports that input data to the named process or technology module and the type of data flowing into each port. Outport specifies the names of ports that output data from the named process or technology module and the type of data flowing out of each port. (Platforms do not have ports. Dynamic technology modules have only special input ports (see below).) Ports may be further designated as selectable. A selectable port is one of a special subset of ports of the same type to which or from which data may be specifically directed (see [Linn 88]). Ports may also be designated as data, control or mechanism ports (a la the SDI System Design Language [SRS 87]). Such a designation is for documentation purposes only and does not influence the generated SADMT. The range parameter is used to specify an array of ports. The param_list parameter may be used to specify parameters for initializing the port (see [Linn 88]). These parameters will be included in the call to procedure initialize for the port.

```
#{cone | event | platform}_inport [ <name> ];
```

Cone_inport, event_inport and platform_inport specify special input ports for dynamic technology modules. These are the only types of ports allowed for dynamic technology modules (see [Linn 88]). The name parameter specifies a name for the port. If a name is not provided, a default name will be supplied - "cone_in" for cone_inport, "event_in" for event_inport, and "platform_in" for platform_inport.

```
$parameter[s] <name> : <data_type> [( <discriminant> )] := ( <default> )  
  {, <name> : <data_type> [( <discriminant> )] := ( <default> ) }*;
```

Parameter specifies a set of parameters that are supplied to the initialize procedure in the named process, platform or technology module. Data type specifies the data type of the named parameter and default specifies its default value. A discriminant may be supplied for the data type.

```
$subdata <data_type> {, <data_type> }* ;
```

Subdata specifies the types of data that flow within and between the subprocesses of the named process, platform or technology module. These data types are made visible to the package specification of the named process, platform or technology module. A data type that is already specified for a port at this level need not be respecified as subdata for its subprocesses. If the named process, platform or technology module has no subprocesses, the subdata statement must not appear.

```
$cone[s] <data_type> {, <data_type> }* ;
```

Cone specifies data types for cones. Cones only make sense for leaf technology modules. A warning will be generated by SAGEN if cones are specified for processes or platforms or nonleaf technology modules. The cone data types are made visible to the package specification of the named technology module. Furthermore, procedure create_cone is renamed in the task body.

```
$begin
```

UNCLASSIFIED

UNCLASSIFIED

Begin specifies the beginning of a block of Ada source code.

[Ada source lines (body)]

These Ada source lines are procedures which are placed in the package body to be referenced by the initialize procedure or the task associated with the named process, platform or technology module.

\$end;

End specifies the end of the process, platform or technology module block.

5.2 Port Linkages

The semantics of each SAGEN statement for specifying port linkages is described below.

[<with_or_use>]

These Ada context clauses (with) or visibility clauses (use) are placed at the head of the initialize procedure.

\$link[s] <name> is

Link indicates the start of a block of Ada source lines that perform the necessary linkages among the subprocesses of the named process, platform or technology module. The name parameter must correspond to the name of the previous process, platform or technology module block. The link block must not be specified for a leaf process or technology module.

[<declarations>]

These Ada declarations are placed in the declarative region of the initialize procedure.

\$begin

Begin specifies the beginning of a block of Ada source code.

[Ada source lines (link)]

These Ada source lines specify the linkages among the subprocesses of the named process, platform or technology module.

\$end;

End specifies the end of the linkage block.

5.3 Process Semantics

The semantics of each SAGEN statement for specifying process semantics is described below.

[<with_or_use>]

UNCLASSIFIED

UNCLASSIFIED

These Ada context clauses (with) or visibility clauses (use) are placed at the head of the task body.

\$task <name> is

Task indicates the start of a block of Ada source lines that supply the semantics of the named process or technology module. The name parameter must correspond to the name of the previous process or technology module block. The task block must not be specified for a platform or a non-leaf process or technology module.

[<declarations>]

These Ada declarations are placed in the declarative region of the task body.

\$begin

Begin specifies the beginning of a block of Ada source code.

[Ada source lines (task)]

These Ada source lines specify the semantics of the named process or technology module.

\$end;

End specifies the end of the task block.

6. EXECUTION

SAGEN is invoked at the user's terminal by typing:

sagen

The following prompt will then appear on the screen:

Please enter the name of the SAGEN file

The user should then enter the name of the file containing the code to be translated.

If any lexical or syntactic errors are detected by SAGEN, an error message will appear on the screen. The message will indicate the type of error and display the line on which the error occurred.

After translation is complete, several new files are created that contain the generated SADMT code. The names of the new files will be:

<name>.a	for package specifications
<name>_body.a	for package bodies
<name>_link.a	for port linkages
<name>_task.a	for process semantics

UNCLASSIFIED

where <name> is the name of the associated process, platform, or technology module.

7. REFERENCES

- [Bell 71] Bell, C. Gordon and Allen Newell, *Computer Structures: Readings and Examples*, McGraw-Hill, 1971.
- [Cohen 88] Cohen, Howard, Steve H. Edwards, Cathy Jo Linn, Joseph L. Linn, and Cy D. Ardoin, *A Simple Example of an SADMT Architecture Specification*, Institute for Defense Analyses, 1988.
- [Linn 88] Linn, Joseph L., Cathy Jo Linn, Stephen H. Edwards, Michael R. Kappel, Cy D. Ardoin and John Salasin, *Strategic Defense Initiative Architecture Dataflow Modeling Technique*, Version 1.50, IDA Paper P-2035, Institute for Defense Analyses, March 1988.
- [SRS 87] *SDI-SDL Description Example for Version 1.2*, SRS Technologies, October 1987.

UNCLASSIFIED

UNCLASSIFIED

UNCLASSIFIED

UNCLASSIFIED

APPENDIX A - SAGEN EXAMPLE

An example system specification in SAGEN is given in this Appendix, followed by the SADMT generated by the SAGEN processor in Appendix B, and the output generated by the Simulation Framework in Appendix C. An example of a simple SDI architecture specified in SAGEN, along with the automatically generated SADMT and the simulation output is given in [Cohen 88].

The example network of processes is shown in Figures 4 and 5.

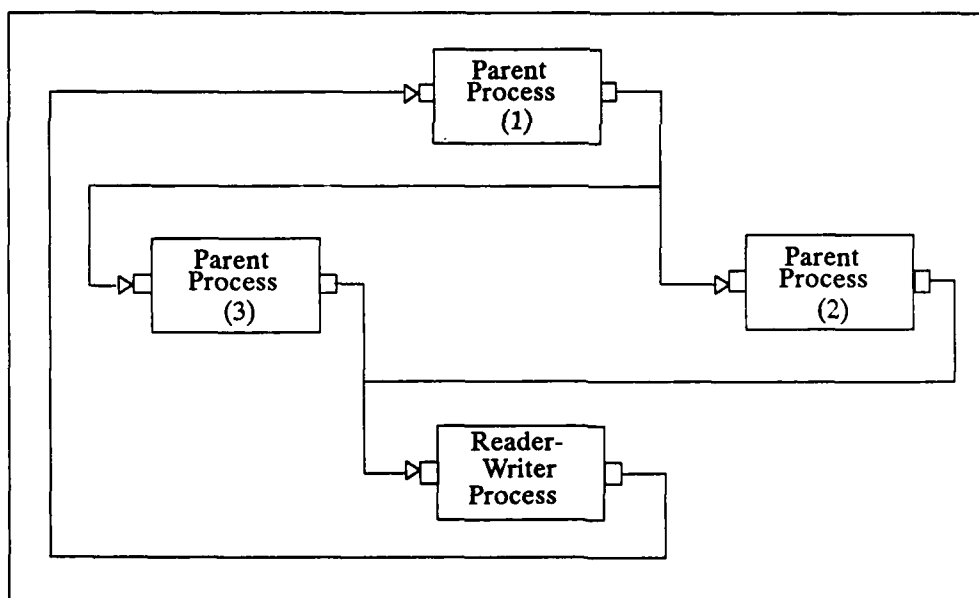


Figure 4. Top Level Platform

UNCLASSIFIED

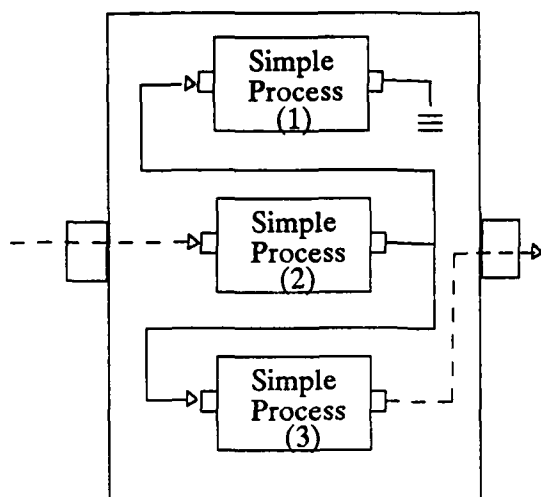


Figure 5. Exploded View of Parent Process

The following SAGEN represents the system of processes shown in these figures:

```

----- Top Level Platform -----
$platform TopLevel_Platform:=TOPLEVEL is
  $subprocesses Parent_Process(1..3), RW_Process;
  $subdata Simple_Msg;
$end;

$links TopLevel_Platform is
$begin
  internal_link (Z.SUB.Parent_Process(1).message_out,
                Z.SUB.Parent_Process(2).message_in);
  internal_link (Z.SUB.Parent_Process(1).message_out,
                Z.SUB.Parent_Process(3).message_in);
  internal_link (Z.SUB.Parent_Process(2).message_out,

```

UNCLASSIFIED

```
        Z.SUB.RW_Process.message_in);
internal_link (Z.SUB.Parent_Process(3).message_out,
        Z.SUB.RW_Process.message_in);
internal_link (Z.SUB.RW_Process.message_out,
        Z.SUB.Parent_Process(1).message_in);
$end;
```

Parent Process

```
$process Parent_Process is
    $subprocesses Simple_Process(1..3):=(wt(i));
    $inport message_in :Simple_Msg;
    $outport message_out:Simple_Msg;
$end;

$links Parent_Process is
    wt: constant array(1..3) of PDL_time_type := (20,30,50);
$begin
    internal_link (Z.SUB.Simple_Process(2).message_out,
        Z.SUB.Simple_Process(1).message_in);
    internal_link (Z.SUB.Simple_Process(2).message_out,
        Z.SUB.Simple_Process(3).message_in);
    inherited_link (Z.message_in,
        Z.SUB.Simple_Process(2).message_in);
    inherited_link (Z.SUB.Simple_Process(3).message_out,
        Z.message_out);
$end;
```

Simple Subprocess

```
$process Simple_Process is
    $inport message_in :Simple_Msg;
    $outport message_out:Simple_Msg;
    $parameter waittime:PDL_time_type:=(20);
$end;

$task Simple_Process is
    buffer: Simple_msg;
$begin
    loop
        wait_for_activity(Z.PDL);
        buffer:= port_data(Z.message_in);
        consume(Z.message_in);
        wait(Z.PDL,Z.PRM.waittime);
        buffer.last_slot:= buffer.last_slot + 1;
        buffer.route(buffer.last_slot):= integer(Z.PDL.process_id);
```

UNCLASSIFIED

UNCLASSIFIED

```
    emit(Z.message_out,buffer);
end loop;
exception
  when others =>
    write_process_id(Z.PDL,"AND THEN SOME EXCEPTION in simple_proc, ");
$end;
```

RW Subprocess

```
$process RW_Process is
  $inport message_in :Simple_Msg;
  $outport message_out:Simple_Msg;
$end;
```

```
$task RW_Process is
  buffer          : Simple_Msg;
  start_up_time, last_time : PDL_time_type := 1000;
  which_port      : integer    := -50;
$begin
  start_up_time := Current_PDL_time;
  loop
    while not port_empty(Z.message_in) loop
      write_process_id(Z.PDL,"  DEQUEUEING-",",",false);
      put_msg(port_data(Z.message_in),0);
      consume(Z.message_in);
    end loop;
    if last_time /= Current_PDL_time then
      if (Current_PDL_time - start_up_time) mod 40 = 0
        or (Current_PDL_time - start_up_time) mod 40 = 30 then
        buffer.time_created := Current_PDL_time;
        buffer.last_slot := 0;
        emit(Z.message_out,buffer);
        last_time := Current_PDL_time;
      end if;
    end if;
    wait_for_activity(Z.PDL,(Z.message_out.PORT
      ,Z.message_out.PORT
      ,Z.message_out.PORT
      ,Z.message_out.PORT
      ,Z.message_out.PORT
      ,Z.message_out.PORT
      ,Z.message_in.PORT)
      ,which_port
      ,Time_out => 10);
  end loop;
```

UNCLASSIFIED

UNCLASSIFIED

```
exception
  when others =>
    put_line("AND THEN SOME EXCEPTION in rw_proc");
$end;
```

UNCLASSIFIED

UNCLASSIFIED

UNCLASSIFIED

UNCLASSIFIED

APPENDIX B - GENERATED SADMT

The following SADMT output files are created by the SAGEN tool:

***** TopLevel_Platform.a *****

Top Level Platform

with Cones_n_Platforms, Parent_Process_pkg, RW_Process_pkg, Simple_Msg_pkg;

package TopLevel_Platform_pkg is

 use Cones_n_Platforms;

 use PDL_pkg, Simple_Msg_pkg;

 TopLevel_Platform_designator : constant platform_designator_type

 := new string("TOPELVEL");

 TopLevel_Platform_name : PDL_string_ptr := new string'
 ("TopLevel_Platform");

 TopLevel_Platform_discr_name : PDL_string_ptr := empty_string;

 TopLevel_Platform_characteristic : PDL_string_ptr := new string'
 ("typename=TopLevel_Platform");

 type TopLevel_Platform_subprocesses is private;

package TopLevel_Platform_PARAM_pkg is

 type TopLevel_Platform_parameterization is record

 null;

 end record;

 type TopLevel_Platform_parameterization_ptr is access

 TopLevel_Platform_parameterization;

end TopLevel_Platform_PARAM_pkg;

use TopLevel_Platform_PARAM_pkg;

package TopLevel_Platform_CP_pkg is new interface_procs.PlatformDefiner_pkg

 (T=>TopLevel_Platform_parameterization,

 T_ptr=>TopLevel_Platform_parameterization_ptr);

private

 use PIG_pkg, Parent_Process_pkg, RW_Process_pkg;

 type Parent_Process_vector is array(integer range <>) of
 Parent_Process_type;

 type TopLevel_Platform_subprocesses is record

 PIG: PIG_type;

 Parent_Process: Parent_Process_vector(1..3);

 RW_Process: RW_Process_type;

 end record;

end TopLevel_Platform_pkg;

UNCLASSIFIED

UNCLASSIFIED

***** TopLevel_Platform_body.a *****

```
package body TopLevel_Platform_pkg is
  use Simple_Msg_pkg.PD.Procedures;
  use PDL_IO; use TXT_IO, INT_IO, TIME_IO, DURATION_IO;
  use interface_procs;

  type TopLevel_Platform_block;
  type TopLevel_Platform_type is access TopLevel_Platform_block;

  type TopLevel_Platform_block is record
    PDL: PDL_ptr := new_PDL_block(platform);
    SUB: TopLevel_Platform_subprocesses;
  end record;

  procedure initialize (ZZ: out PIG_type; param:
    TopLevel_Platform_parameterization_ptr; my_name: PDL_string_ptr :=
    TopLevel_Platform_name; discr_name: PDL_string_ptr :=
    TopLevel_Platform_discr_name; characteristic: PDL_string_ptr :=
    TopLevel_Platform_characteristic) is separate;

  package Creator is new PlatformCreator_pkg (
    TopLevel_Platform_parameterization,
    TopLevel_Platform_parameterization_ptr, lookup_platform_designator
    (TopLevel_Platform_designator), initialize);
end TopLevel_Platform_pkg;
```

***** TopLevel_Platform_link.a *****

```
separate (TopLevel_Platform_pkg)
procedure initialize (ZZ: out PIG_type; param:
  TopLevel_Platform_parameterization_ptr; my_name: PDL_string_ptr :=
  TopLevel_Platform_name; discr_name: PDL_string_ptr :=
  TopLevel_Platform_discr_name; characteristic: PDL_string_ptr :=
  TopLevel_Platform_characteristic) is
  Z: TopLevel_Platform_type;

begin
  Z := new TopLevel_Platform_block;
  declare
    PIG : PIG_type renames Z.SUB.PIG;
    Parent_Process : Parent_Process_vector renames Z.SUB.Parent_Process;
    RW_Process : RW_Process_type renames Z.SUB.RW_Process;
    MYSELF : PDL_ptr renames Z.PDL;
  begin
    set_process_parent(MYSELF,null,my_name,discr_name,characteristic);
    if init_debug_level > 100 then
```

UNCLASSIFIED

UNCLASSIFIED

```

    write_process_full(MYSELF,"*init> ", " before start_up");
end if;
initialize(PIG,MYSELF);
for i in 1..3 loop
    initialize(Parent_Process(i),MYSELF
        ,discr_name => new string'(integer'IMAGE(i)));
end loop;
initialize(RW_Process,MYSELF);
ZZ := PIG;

internal_link (Z.SUB.Parent_Process(1).message_out,
    Z.SUB.Parent_Process(2).message_in);
internal_link (Z.SUB.Parent_Process(1).message_out,
    Z.SUB.Parent_Process(3).message_in);
internal_link (Z.SUB.Parent_Process(2).message_out,
    Z.SUB.RW_Process.message_in);
internal_link (Z.SUB.Parent_Process(3).message_out,
    Z.SUB.RW_Process.message_in);
internal_link (Z.SUB.RW_Process.message_out,
    Z.SUB.Parent_Process(1).message_in);
end;

if init_debug_level > 100 then
    write_process_full(Z.PDL,"*init> ", " after start_up");
end if;
exception
    when others => write_process_full(Z.PDL,"***Some error in ", "***");
end initialize;

***** Parent_Process.a *****

-----
----- Parent Process -----
-----

with PDL_pkg,Simple_Msg_pkg,Simple_Process_pkg;
package Parent_Process_pkg is
    use PDL_pkg,Simple_Msg_pkg;

    type Parent_Process_block;
    type Parent_Process_type is access Parent_Process_block;

    type Parent_Process_subprocesses is private;

    type Parent_Process_block is record
        PDL: PDL_ptr := new_PDL_block(nonleaf);
```

UNCLASSIFIED

UNCLASSIFIED

```
SUB: Parent_Process_subprocesses;  
message_in: Simple_Msg_iptr := new Simple_Msg_port(inport);  
message_out: Simple_Msg_optr := new Simple_Msg_port(outport);  
end record;
```

```
Parent_Process_name      : PDL_string_ptr := new string'  
    ("Parent_Process");  
Parent_Process_type_name  : PDL_string_ptr := new string'  
    ("Parent_Process");  
Parent_Process_discr_name : PDL_string_ptr := empty_string;  
Parent_Process_characteristic : PDL_string_ptr := new string'  
    ("typename=Parent_Process");
```

```
procedure initialize (Z: in out Parent_Process_type; Parent: PDL_ptr;  
    my_name: PDL_string_ptr := Parent_Process_name;  
    discr_name: PDL_string_ptr := Parent_Process_discr_name;  
    type_name: PDL_string_ptr := Parent_Process_type_name;  
    characteristic: PDL_string_ptr := Parent_Process_characteristic);
```

```
private  
    use Simple_Process_pkg;  
    type Simple_Process_vector is array(integer range <>) of  
        Simple_Process_type;  
    type Parent_Process_subprocesses is record  
        Simple_Process: Simple_Process_vector(1..3);  
    end record;  
end Parent_Process_pkg;
```

***** Parent_Process_body.a *****

```
package body Parent_Process_pkg is  
    use PDL_IO; use TXT_IO, INT_IO, TIME_IO, DURATION_IO;  
    use Simple_Msg_pkg.PD.Procedures;  
    procedure initialize (Z: in out Parent_Process_type; Parent: PDL_ptr;  
        my_name: PDL_string_ptr := Parent_Process_name;  
        discr_name: PDL_string_ptr := Parent_Process_discr_name;  
        type_name: PDL_string_ptr := Parent_Process_type_name;  
        characteristic: PDL_string_ptr := Parent_Process_characteristic  
    ) is separate;  
end Parent_Process_pkg;
```

***** Parent_Process_link.a *****

```
separate (Parent_Process_pkg)  
procedure initialize (Z: in out Parent_Process_type; Parent: PDL_ptr;  
    my_name: PDL_string_ptr := Parent_Process_name;  
    discr_name: PDL_string_ptr := Parent_Process_discr_name;
```

UNCLASSIFIED

UNCLASSIFIED

```
type_name: PDL_string_ptr := Parent_Process_type_name;
characteristic: PDL_string_ptr := Parent_Process_characteristic) is

wt: constant array(1..3) of PDL_time_type := (20,30,50);
begin
  Z := new Parent_Process_block;
  declare
    message_in : Simple_Msg_ipptr renames Z.message_in;
    message_out : Simple_Msg_opptr renames Z.message_out;
    Simple_Process : Simple_Process_vector renames Z.SUB.Simple_Process;
    MYSELF : PDL_ptr renames Z.PDL;
  begin
    set_process_parent(MYSELF,Parent,my_name,discr_name,characteristic);
    if init_debug_level > 130 then
      write_process_full(MYSELF,"*init> ", " before start_up");
    end if;
    initialize(message_in,MYSELF,"portname=message_in","message_in");
    initialize(message_out,MYSELF,"portname=message_out","message_out");
    for i in 1..3 loop
      initialize(Simple_Process(i),MYSELF,wt(i)
        ,discr_name => new string'(integer'IMAGE(i)));
    end loop;

    internal_link (Z.SUB.Simple_Process(2).message_out,
      Z.SUB.Simple_Process(1).message_in);
    internal_link (Z.SUB.Simple_Process(2).message_out,
      Z.SUB.Simple_Process(3).message_in);
    inherited_link (Z.message_in,
      Z.SUB.Simple_Process(2).message_in);
    inherited_link (Z.SUB.Simple_Process(3).message_out,
      Z.message_out);

    end;
    make_known(Z.PDL);

    if init_debug_level > 130 then
      write_process_full(Z.PDL,"*init> ", " after start_up");
    end if;
    exception
      when others => write_process_full(Z.PDL,"***Some error in ","***");
  end initialize;
```

***** Simple_Process.a *****

Simple Subprocess

UNCLASSIFIED

UNCLASSIFIED

```
with PDL_pkg, Simple_Msg_pkg;
package Simple_Process_pkg is
  use PDL_pkg, Simple_Msg_pkg;

  package Simple_Process_PARAM_pkg is
    type Simple_Process_parameterization is record
      waittime: PDL_time_type := 20;
    end record;
  end Simple_Process_PARAM_pkg;
  use Simple_Process_PARAM_pkg;

  type Simple_Process_block;
  type Simple_Process_type is access Simple_Process_block;

  task type Simple_Process_task is
    entry start_up(Z: Simple_Process_type);
  end Simple_Process_task;
  type Simple_Process_task_ptr is access Simple_Process_task;

  type Simple_Process_block is record
    PDL: PDL_ptr := new_PDL_block(leaf);
    SEM: Simple_Process_task_ptr;
    PRM: Simple_Process_parameterization;
    message_in: Simple_Msg_ipptr := new Simple_Msg_port(inport);
    message_out: Simple_Msg_opptr := new Simple_Msg_port(outport);
  end record;

  Simple_Process_name      : PDL_string_ptr := new string'
    ("Simple_Process");
  Simple_Process_type_name : PDL_string_ptr := new string'
    ("Simple_Process");
  Simple_Process_discr_name : PDL_string_ptr := empty_string;
  Simple_Process_characteristic : PDL_string_ptr := new string'
    ("typename=Simple_Process");

  procedure initialize (Z: in out Simple_Process_type; Parent: PDL_ptr;
    waittime_param : PDL_time_type := 20; my_name: PDL_string_ptr :=
    Simple_Process_name; discr_name: PDL_string_ptr :=
    Simple_Process_discr_name; type_name: PDL_string_ptr :=
    Simple_Process_type_name; characteristic: PDL_string_ptr :=
    Simple_Process_characteristic);
end Simple_Process_pkg;

***** Simple_Process_body.a *****
package body Simple_Process_pkg is
  use PDL_IO; use TXT_IO, INT_IO, TIME_IO, DURATION_IO;
```

UNCLASSIFIED

UNCLASSIFIED

```
use Simple_Msg_pkg.PD.Procedures;
task body Simple_Process_task is separate;
procedure initialize (Z: in out Simple_Process_type; Parent: PDL_ptr;
  waittime_param : PDL_time_type := 20; my_name: PDL_string_ptr :=
  Simple_Process_name; discr_name: PDL_string_ptr :=
  Simple_Process_discr_name; type_name: PDL_string_ptr :=
  Simple_Process_type_name; characteristic: PDL_string_ptr :=
  Simple_Process_characteristic) is separate;
end Simple_Process_pkg;

***** Simple_Process_link.a *****
separate (Simple_Process_pkg)
procedure initialize (Z: in out Simple_Process_type; Parent: PDL_ptr;
  waittime_param : PDL_time_type := 20; my_name: PDL_string_ptr :=
  Simple_Process_name; discr_name: PDL_string_ptr :=
  Simple_Process_discr_name; type_name: PDL_string_ptr :=
  Simple_Process_type_name; characteristic: PDL_string_ptr :=
  Simple_Process_characteristic) is
begin
  Z := new Simple_Process_block;
  declare
    message_in : Simple_Msg_ipptr renames Z.message_in;
    message_out : Simple_Msg_opptr renames Z.message_out;
    waittime : PDL_time_type renames Z.PRM.waittime;
    MYSELF : PDL_ptr renames Z.PDL;
  begin
    set_process_parent(MYSELF,Parent,my_name,discr_name,characteristic);
    if init_debug_level > 130 then
      write_process_full(MYSELF,"*init> ", " before start_up");
    end if;
    waittime := waittime_param;
    initialize(message_in,MYSELF,"portname=message_in","message_in");
    initialize(message_out,MYSELF,"portname=message_out","message_out");
  end;
  Z.SEM := new Simple_Process_task;
  Z.SEM.start_up(Z);

  if init_debug_level > 130 then
    write_process_full(Z.PDL,"*init> ", " after start_up");
  end if;
  exception
    when others => write_process_full(Z.PDL,"***Some error in ","***");
end initialize;

***** Simple_Process_task.a *****
```

UNCLASSIFIED

UNCLASSIFIED

```
separate (Simple_Process_pkg)
task body Simple_Process_task is
  use timing_ops;
  Z : Simple_Process_type := null;

  buffer: Simple_msg;
begin
  accept start_up(Z:Simple_Process_type) do
    Simple_Process_task.Z := Z;
    make_known(Z.PDL);
  end start_up;

  declare
    message_in : Simple_Msg_ipptr renames Z.message_in;
    message_out : Simple_Msg_opptr renames Z.message_out;
    waittime : PDL_time_type renames Z.PRM.waittime;
    MYSELF : PDL_ptr renames Z.PDL;
    package WAITING_pkg is new Wait_pkg(MYSELF);
    use WAITING_pkg;
  begin
    wait_for_initialization;
  loop
    wait_for_activity(Z.PDL);
    buffer:= port_data(Z.message_in);
    consume(Z.message_in);
    wait(Z.PDL,Z.PRM.waittime);
    buffer.last_slot:= buffer.last_slot + 1;
    buffer.route(buffer.last_slot):= integer(Z.PDL.process_id);
    emit(Z.message_out,buffer);
  end loop;
exception
  when others =>
    write_process_id(Z.PDL,"AND THEN SOME EXCEPTION in simple_proc, ");
  end;
  write_process_full(Z.PDL,"***** Invalid SADMT Process");
  kill_process(Z.PDL);
end Simple_Process_task;
```

***** RW_Process.a *****

----- RW Subprocess -----

```
with PDL_pkg,Simple_Msg_pkg;
package RW_Process_pkg is
```

UNCLASSIFIED

UNCLASSIFIED

```
use PDL_pkg, Simple_Msg_pkg;

type RW_Process_block;
type RW_Process_type is access RW_Process_block;

task type RW_Process_task is
  entry start_up(Z:RW_Process_type);
end RW_Process_task;
type RW_Process_task_ptr is access RW_Process_task;

type RW_Process_block is record
  PDL: PDL_ptr := new_PDL_block(leaf);
  SEM: RW_Process_task_ptr;
  message_in: Simple_Msg_ipptr := new Simple_Msg_port(inport);
  message_out: Simple_Msg_opptr := new Simple_Msg_port(outport);
end record;

RW_Process_name      : PDL_string_ptr := new string("RW_Process");
RW_Process_type_name : PDL_string_ptr := new string("RW_Process");
RW_Process_discr_name : PDL_string_ptr := empty_string;
RW_Process_characteristic : PDL_string_ptr := new string'
  ("typename=RW_Process");

procedure initialize (Z: in out RW_Process_type; Parent: PDL_ptr;
  my_name: PDL_string_ptr := RW_Process_name;
  discr_name: PDL_string_ptr := RW_Process_discr_name;
  type_name: PDL_string_ptr := RW_Process_type_name;
  characteristic: PDL_string_ptr := RW_Process_characteristic);
end RW_Process_pkg;

***** RW_Process_body.a *****
package body RW_Process_pkg is
  use PDL_IO; use TXT_IO, INT_IO, TIME_IO, DURATION_IO;
  use Simple_Msg_pkg.PD.Procedures;
  task body RW_Process_task is separate;
  procedure initialize (Z: in out RW_Process_type; Parent: PDL_ptr;
    my_name: PDL_string_ptr := RW_Process_name;
    discr_name: PDL_string_ptr := RW_Process_discr_name;
    type_name: PDL_string_ptr := RW_Process_type_name;
    characteristic: PDL_string_ptr := RW_Process_characteristic
  ) is separate;
end RW_Process_pkg;

***** RW_Process_link.a *****
separate (RW_Process_pkg)
procedure initialize (Z: in out RW_Process_type; Parent: PDL_ptr;
```

UNCLASSIFIED

UNCLASSIFIED

```
my_name: PDL_string_ptr := RW_Process_name; discr_name: PDL_string_ptr :=
RW_Process_discr_name; type_name: PDL_string_ptr := RW_Process_type_name;
characteristic: PDL_string_ptr := RW_Process_characteristic) is
begin
  Z := new RW_Process_block;
  declare
    message_in : Simple_Msg_iptr renames Z.message_in;
    message_out : Simple_Msg_optr renames Z.message_out;
    MYSELF : PDL_ptr renames Z.PDL;
  begin
    set_process_parent(MYSELF,Parent,my_name,discr_name,characteristic);
    if init_debug_level > 130 then
      write_process_full(MYSELF,"*init> ", " before start_up");
    end if;
    initialize(message_in,MYSELF,"portname=message_in","message_in");
    initialize(message_out,MYSELF,"portname=message_out","message_out");
  end;
  Z.SEM := new RW_Process_task;
  Z.SEM.start_up(Z);

  if init_debug_level > 130 then
    write_process_full(Z.PDL,"*init> ", " after start_up");
  end if;
  exception
    when others => write_process_full(Z.PDL,"***Some error in ", "***");
end initialize;
```

***** RW_Process_task.a *****

```
separate (RW_Process_pkg)
task body RW_Process_task is
  use timing_ops;
  Z : RW_Process_type := null;

  buffer          : Simple_Msg;
  start_up_time, last_time : PDL_time_type := 1000;
  which_port      : integer := -50;
begin
  accept start_up(Z:RW_Process_type) do
    RW_Process_task.Z := Z;
    make_known(Z.PDL);
  end start_up;

  declare
    message_in : Simple_Msg_iptr renames Z.message_in;
    message_out : Simple_Msg_optr renames Z.message_out;
```

UNCLASSIFIED

UNCLASSIFIED

```
MYSELF : PDL_ptr renames Z.PDL;
package WAITING_pkg is new Wait_pkg(MYSELF);
use WAITING_pkg;
begin
  wait_for_initialization;
start_up_time := Current_PDL_time;
loop
  while not port_empty(Z.message_in) loop
    write_process_id(Z.PDL,"  DEQUEUEING-",",",false);
    put_msg(port_data(Z.message_in),0);
    consume(Z.message_in);
  end loop;
  if last_time /= Current_PDL_time then
    if (Current_PDL_time - start_up_time) mod 40 = 0
      or (Current_PDL_time - start_up_time) mod 40 = 30 then
      buffer.time_created := Current_PDL_time;
      buffer.last_slot := 0;
      emit(Z.message_out,buffer);
      last_time := Current_PDL_time;
    end if;
  end if;
  wait_for_activity(Z.PDL,(Z.message_out.PORT
    ,Z.message_out.PORT
    ,Z.message_out.PORT
    ,Z.message_out.PORT
    ,Z.message_out.PORT
    ,Z.message_out.PORT
    ,Z.message_in.PORT)
    ,which_port
    ,Time_out => 10);
end loop;
exception
  when others =>
    put_line("AND THEN SOME EXCEPTION in rw_proc");
  end;
  write_process_full(Z.PDL,"***** Invalid SADMT Process");
  kill_process(Z.PDL);
end RW_Process_task;
```

UNCLASSIFIED

UNCLASSIFIED

UNCLASSIFIED

15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

UNCLASSIFIED

APPENDIX C - SIMULATION OUTPUT

The following is the output generated by running the SADMT description of the system of processes depicted in Figures 4 and 5 on the prototype SSF simulation facility:

hello

simulation begins.....

```
DEQUEUEING-RW_Process/[PL]PR=[1]10<t=160>|the message ts,r=0:2:3:5:6:
DEQUEUEING-RW_Process/[PL]PR=[1]10<t=160>|the message ts,r=0:2:3:8:9:
DEQUEUEING-RW_Process/[PL]PR=[2]21<t=185>|the message ts,r=25:13:14:16:17:
DEQUEUEING-RW_Process/[PL]PR=[2]21<t=185>|the message ts,r=25:13:14:19:20:
DEQUEUEING-RW_Process/[PL]PR=[1]10<t=230>|the message ts,r=30:2:3:5:6:
DEQUEUEING-RW_Process/[PL]PR=[1]10<t=230>|the message ts,r=30:2:3:8:9:
AND THEN SOME EXCEPTION in Simple_Process(1)/[PL]PR=[2]12|@|Parent_Process/[PL]PR=[2]-4|on|1
AND THEN SOME EXCEPTION in Simple_Process(2)/[PL]PR=[2]13|@|Parent_Process/[PL]PR=[2]-4|on|1
AND THEN SOME EXCEPTION in Simple_Process(3)/[PL]PR=[2]14|@|Parent_Process/[PL]PR=[2]-4|on|1
AND THEN SOME EXCEPTION in Simple_Process(1)/[PL]PR=[2]15|@|Parent_Process/[PL]PR=[2]-5|on|1
AND THEN SOME EXCEPTION in Simple_Process(2)/[PL]PR=[2]16|@|Parent_Process/[PL]PR=[2]-5|on|1
AND THEN SOME EXCEPTION in Simple_Process(3)/[PL]PR=[2]17|@|Parent_Process/[PL]PR=[2]-5|on|1
AND THEN SOME EXCEPTION in Simple_Process(1)/[PL]PR=[2]18|@|Parent_Process/[PL]PR=[2]-6|on|1
AND THEN SOME EXCEPTION in Simple_Process(2)/[PL]PR=[2]19|@|Parent_Process/[PL]PR=[2]-6|on|1
AND THEN SOME EXCEPTION in Simple_Process(3)/[PL]PR=[2]20|@|Parent_Process/[PL]PR=[2]-6|on|1
AND THEN SOME EXCEPTION in RW_Process/[PL]PR=[2]21|@|TopLevel_Platform(2)/[PL]PR=[2]0<t=
AND THEN SOME EXCEPTION in gyro, Gyro_Process/[PL]PR=[2]22<t=260>
DEQUEUEING-RW_Process/[PL]PR=[1]10<t=310>|the message ts,r=40:2:3:5:6:
DEQUEUEING-RW_Process/[PL]PR=[1]10<t=310>|the message ts,r=40:2:3:8:9:
DEQUEUEING-RW_Process/[PL]PR=[1]10<t=390>|the message ts,r=70:2:3:5:6:
DEQUEUEING-RW_Process/[PL]PR=[1]10<t=390>|the message ts,r=70:2:3:8:9:
DEQUEUEING-RW_Process/[PL]PR=[1]10<t=470>|the message ts,r=80:2:3:5:6:
DEQUEUEING-RW_Process/[PL]PR=[1]10<t=470>|the message ts,r=80:2:3:8:9:
```

UNCLASSIFIED

Distribution List for P-2028

Sponsor

LTC Jon Rindt
SDIO
Pentagon
BM/C3
1E149
Washington, DC 20301-7100

1 copy

CAPT David Hart
SDIO
Pentagon
BM/C3
1E149
Washington, DC 20301-7100

1 copy

LTC Chuck Lillie
SDIO
Pentagon
BM/C3
1E149
Washington, DC 20301-7100

1 copy

LTC Pete Sowa
SDIO
Pentagon
BM/C3
1E149
Washington, DC 20301-7100

1 copy

Other

Defense Technical Information Center
Cameron Station
Alexandria, VA 22314

2 copies

(Each should receive 1 copy.)

F.R. Albrow
MoD (PE) RSRE
St. Andrews Road
Great Malvern
Worcester WR14 3PS
England

John Anderson
11569 Hicks Court
Manassas, VA 22111

Jim Armitage
GTE SSD
1 Research Dr.
Westborough, MA 01581

David Audley, Associate
Financial Strategies
Prudential Bache Securities
26th Floor
199 Water
New York, NY 10292

Dr. Algirdas Avizienis
Computer Science Department
4731 Boelter Hall
University of California, Los Angeles
Los Angeles, CA 90024

Dan Baker
TASC
55 Walkers Brook Drive
Redding, MA 01867

Gary H. Barber
Program Manager
Intermetrics, Inc.
1100 Hercules, Suite 300
Houston, TX 77058

John Barry
SJ-72
Rockwell
P.O. Box 3644
Seal Beach, CA 90740-7644

Elizabeth Bently
Marketing Coordinator
Research Triangle Institute
P.O. Box 12184
Research Triangle Park, N.C. 27709

Cheryl Bittner
General Electric
Box 8555, Bldg. 19, Suite 200
Philadelphia, PA 19101

Grady Booch
Director, Software Engineering Program
Rational
1501 Salado Dr.
Mountain View, CA 94043

Gina Bowden
MS 202
Teledyne Brown Engineering
Cummings Research Park
Huntsville, AL 35807

James M. Boyle
Mathematics & Computer Science Division
Argonne National Laboratory
Argonne, IL 60549-4844

Craig Bredin
GTE Strategic Systems Division
3322 South Memorial Parkway
Suite 53
P.O. Box 14009
Huntsville, AL 35185

Capt. John R. Brill
USAF Space Division/ALR
DET 3 AFALC
Box 92960 WPC
Los Angeles, CA 90009

Alton L. Brintzenhoff
Manager, Ada Technology Operating Center
Syscon Corporation
3990 Sherman St.
San Diego, CA 92110

Dr. James C. Browne
Computation Center
Department of Computer Science
University of Texas at Austin
Austin, TX 78712

Dr. Robert R. Brown
Rand Corp.
1700 Main St.
P.O. Box 2138
Santa Monica, CA 90406

Miguel Carrio
Teledyne Brown Engineering
3700 Pender Dr.
Fairfax, VA 22030

Tom Cashion
CALSPAN Corporation
P.O. Box 9X
Lexington, MA 02123

Virginia Castor, Director
Ada Joint Program Office
1211 Fern St., Room C-107
Arlington, VA 22202

Yvonne Cekel
Marketing Services Manager
Cadre Technologies, Inc.
222 Richmond St.
Providence, RI 02903

Bijoy G. Chatterjee
Deputy Director
Advanced Technology Systems
ESL/TRW
495 Java Dr.
P.O. Box 3510
Sunnyvale, CA 3510

John L. Chinn
Manager, Advanced Technology program
General Electric Space Systems Division
4041 North First St.
San Jose, CA 95134

Starla Christakos
AFATL/SAI
Eglin Air Force Base, FL 320542

Dr. Joe Clema
ECAC/IITRI
185 Admiral Cochrane Drive
Annapolis, MD 21401

Karen Coates
Program Manager, Advanced Technology
ESL/TRW
495 Java Dr.
P.O. Box 3510
Sunnyvale, CA 94088-3510

Susan Coatney
Information Science Institute
University of Southern California
4676 Admiralty Way
Marina del Ray, CA 90292-5950

Mr. Danny Cohen
Director, System Division
Information Science Institute
University of Southern California
4676 Admiralty Way
Marina del Rey, CA 90292-6695

Christopher F. Cole
Marketing Representative
Technology Programs
General Electric Company
Space Systems Division
Valley Forge Space Center
P.O. Box 8555
Philadelphia, PA 19101

Carol Combs
National Security Agency
9800 Savage Road
Ft. Meade, MD 20755-6000

Edward R. Comer
Software Productivity Solutions, Inc.
122 North 4th Av.
Indialantic, FL 32903

Lawrence L. Cone
Cone Software Laboratory
312 East Summit Av.
Haddonfield, N.J. 08033

Robert P. Cook
Department of Computer Science
Thornton Hall
University of Virginia
Charlottesville, VA 22903

Chuck Cooper
Control Data Corporation
901 E. 78th Street
MS BMW 03M
Minneapolis, MN 55420

Lee Cooper
Advanced Technology
2121 Crystal Drive, Suite 200
Arlington, VA 22202

Mark Cosby
Science Applications International Corp.
1710 Goodridge Drive
McLean, VA 22012

L. Cristina
USASD
ATTN: DASD-H-SBY
P.O. 1500
106 Wynn Dr.
Huntsville, AL 35807-3801

Vincent Dambrauskas
Technical Director
Washington Technical Center
Strategic Systems Division
GTE Government Systems Corporation
6850 Versar Center, Suite 354
Springfield, VA 22151-4196

Samuel A. DeNitto
Romse Air Development Center
RADDC/COE, Bldg. 3
Griffis AFB, NY 13441-5700

Cameron M.G. Donaldson
Software Productivity Solutions, Inc.
122 North 4th Av.
Indialantic, FL 32903

Ralph Duncan
Control Data Government Systems
300 Embassy Row
Atlanta, GA 30328

Stephen Edwards
1-55 Caltech
Pasadena, CA 91126

Jim Egolf
Ford Aerospace & Computer Corp.
10440 State Hwy. 83
Colorado Springs, CO 80908

David A. Fisher
Incremental Systems Corporation
319 S. Craig St.
Pittsburgh, PA 15213

Dave Fittz
STARS Program Office
OUS
OUSDRE (R&AT/CET)
3D139
1211 Fern St., C-112
Washington, D.C. 20301-3081

Michel A. Floyd
Integrated Systems Inc.
101 University Av.
Palo Alto, CA 94301-1695

Richard Frase
SRS Technologies
1500 Wilson Blvd., Suite 800
P.O. Box 12707
Arlington, VA 22209-8707

George Gearn
Applied Research & Engineering
7 Railroad Avenue, Suite F
Bedford, MA 01730

Victor Giddings
MITRE Corporation
Burlington Road
Bedford, MA 01730

Claren Giese
SDIO
Pentagon
T/KE
Washington, DC 20301-7100

Colin Gilyeat
Advanced Technology
2121 Crystal Drive
Arlington, VA 22202

Robert T. Goettge
Advanced Systems Technology
12200 East Briarwood Av.
Suite 260
Englewood, CO 80112

H. T. Goranson
Sirius Inc.
P.O. Box 9258
760 Lynnhaven Parkway
Virginia Beach, VA 23452

Barbara Guyette
Marketing Specialist
Ada Products Division
Intermetrics, Inc.
733 Concord Av.
Cambridge, MA 02138

Sarah Hadley
National Security Agency
9800 Savage Road
Fort Meade, MD 20755-6000

Shmuel Halevi
Ad Cad Inc.
University Place, Suite 200
124 Mt. Auburn St.
Cambridge, MA 02138

Robert Haley
Director, SDI Programs
Cray Research, Inc.
1331 Pennsylvania Avenue, N.W.
Suite 1331 North
Washington, DC 2004

Margaret Hamilton, President
Hamilton Technologies, Inc.
17 Inman St.
Cambridge, MA 02139

Duane Harder
MS B-218
Los Alamos National Laboratory
Los Alamos, NM 87545

Evans C. Harrigan
Software Consultant
Cray Research, Inc.
2130 Main Street., Suite 280
Huntington Beach, CA 92648

Hal Hart
TRW Defense Systems Group
One Space Park
Redondo Beach, CA 90278

Goran Hemdahl
Technical Director
Advanced Systems Architectures
Johnson House, 73-79 Park Street
Camberley, Surrey GU15 3PE United Kingdom

Dale B. Henderson
Los Alamos National Laboratory
Receiving Department
Bldg. SM-30
Bikini Road
Los Alamos, NM 87545

John W. Hendricks
Systems Technologies, Inc.
242 Ocean Drive West
Stamford, CT 06902

Stephan L. Hise
Advanced Development Programs
Marketing Department - MS 1112
Westinghouse Electric Corporation
Defense Group
Friendship Site
Box 1693
Baltimore, MD 21203

Jung Pyo Hong
Los Alamos National Lab
MS K488
P.O. Box 1633
Los Alamos, NM 87544

Don Horne
SRS Technologies
1500 Wilson Blvd., Suite 800
Arlington, VA 22209-8707

Bill Horton
MITRE Corp.
1259 Lake Plaza Drive
Colorado Springs, CO 80906

Greg Janee
General Research Corp.
5383 Hollister Avenue
Santa Barbara, CA 93111

Andy Jazwinski, Director
Advanced Development
TASC - The Analytic Sciences Corporation
1700 N. Moore St., Suite 1220
Arlington, VA 22209

James R. Jill
Manager, Advanced Technologies
NTB Design
Martin Marietta Information & Communications Systems
P.O. Box 1260
Denver, CO 80201-1260

Sumalee Johnson
Rockwell Institute
P.O. Box 3644
Seal Beach, CA 90704-7644

W.G. (Gray) Jones
Science Applications International Corporation
1710 Goodridge Drive
McLean, VA 22102

Irene G. Kazakova
Director, Marketing
Interactive Development Environments
150 Fourth Street, Suite 210
San Francisco, CA 94103

Peter Keenan
Science Ltd.
Wavendon Towe
Milton, Keynes
England MK17-8LX

Judy Kerner
TRW R2/1134
One Space Park
Redondo Beach, CA 90278

Rebecca Kidd
General Research Corp.
307 Wynn Drive
Huntsville, AL 35805

Virginia P. Kobler
Chief, Technology Branch
Battle Management Division
Department of the Army
Office of the Chief of Staff
U.S. Army Strategic Defense Command
P.O. Box 1500
Huntsville, AL 35807-3801

Dr. Ijur Kulikov
Intermetrics
607 Louis Drive
Warminster, PA 18974

Lt. Ann Kuo
ESD/ATS
Hanscom AFB, MA 07831

John Michael Lake
2311 Galen Dr. #7
Champaign, IL 61821

John Latimer
Teledyne Brown Engineering
300 Sparkman Dr.
MS 44
Huntsville, AL 35807

Steve Layton
Senior Software Engineer
Martin Marietta Denver Aerospace
MS L0425
P.O. Box 179
Denver, CO 80201

Larry L. Lehman
Integrated Systems Inc.
2500 Mission College Road
Santa Clara, CA 95054

Eric Leighninger
Dynamics Research
60 Frontage Road
Andover, MA 01810

Peter Lempp
Software Products and Services, Inc.
14 East 38th Street, 14th Floor
New York, NY 10016

Bob Liley
Rockwell International Corporation
2600 West Minister Blvd.
Seal Beach, CA 90740-7644

Frank Poslajko
U.S. Army SDC
CSSD-H-SI
Huntsville, AL 35807-3801

Brian Smith
Mathematics & Computer Science Div.
Argonne National Laboratory
Building 221, Room C-219
9700 South Cass Avenue
Argonne, IL 60439-4844

Norman G. Snyder
Director of Software Services
Jodgrey Associates, Inc.
462 Highfield Ct.
Severna Park, MD 21146

J.R. Southern
USA-SDC
DASD-H-SBD
106 Wynn Drive
Huntsville, AL 35807-3801

Henry Sowizral
Schlumberger Palo Alto Research
3340 Hillview Avenue
Palo Alto, CA 94304

Stephen L. Squires
DARPA
Information Processing Techniques Office
1400 Wilson Blvd.
Arlington, VA 22209

C.E.R. Story
EASAMS Ltd.
Lyon Way, Frimley Road
Camberley, Surrey GU16 5EX

Dr. Richard D. Stutzke
Science Applications International Corporation
1710 Goodridge Dr.
McLean, VA 22102

Agapi Svolou
Senior Scientist
Manager of Software Science
Mellon Institute
Computer Engineering Center
4616 Henry St.
Pittsburgh, PA 15213-2683

Kathy Tammen
General Research Corp.
P.O. Box 6770
Santa Barbara, CA 93160-6770

Kenneth C. Taormina
Director, Analysis and Technology Requirements
Teledyne Brown Engineering
West Oaks Executive Park
3700 Pender Dr.
Fairfax, VA 22030

Edward Town
Rockwell International Corp.
2600 West Minister Blvd.
Seal Beach, CA 90740-7644

Larry Tubbs
US Army Strategic Defense Command
DASH-H-5B
106 Wynn Dr.
Huntsville, AL 35807

Charles M. Vairin
Martin Marietta Denver Aerospace
MS L8079
P.O. Box 179
700 W. Mineral Avenue
Littleton, CO 80201

Dr. Brooks Van Horne
TRW
One Federal Systems Park Drive
Fairfax, VA 22033

John L. Walsh
Riverside Research Institute
Washington Research Office
1701 North Fort Myer Drive, Suite 700
Arlington, VA 22209

G. Karl Warmbrod
SPARTA, Inc.
7926 Jones Branch Road
Suite 1070
McLean, VA 22180

Erwin H. Warshawsky, President
JRS Research Laboratories, Inc.
202 W. Lincoln Av.
Orange, CA 92665-1040

Capt. Charles R. Waryk
OSD/SDIO/S/SA
Pentagon
Room 1E149
Washington, DC 20301-7100

Anthony Wasserman, President
Interactive Development Environments
150 Fourth St., Suite 210
San Francisco, CA 94103

Gio C. Weiderhold
Department of Computer Science
Stanford University
Stanford, CA 94305-2085

Bruce White
500 Montezuma Avenue, Suite 118
Santa Fe, NM 87501

Dave J. Whitley
Software Engineering Section
SCICON, Ltd.
Wavedon Tower
Wavedon Village
Milton Keynes, England MK178LX

John Wiley
BDM Corporation
2227 Drake Avenue
Huntsville, AL 35805

John D. Wolfe
Programmer/Analyst
Software Consulting Specialists, Inc.
P.O. Box 15367
Fort Wayne, IN 46885

Juan A. Wood
Los Alamos National Laboratory
Receiving Department
Bldg. SM-30
Bikini Road
Los Alamos, NM 87545

Richard M. Wright
0/96-01 B/30E
2100 East St. Elmo Road
Austin, TX 78744

Robert C. Yost
Corporate Vice-President
Director, Defense Research & Analysis Operation
SAIC (Science Applications International Corporation)
1710 Goodridge Dr.
McLean, VA 22102

Christine Youngblut
17021 Sioux Lane
Gaithersburg, MD 20878

Steve Zelazny
Science Applications International Corporation
4232 Ridge Lea Road
Amherst, NY 14226

Gerald A. Zionic
NTB Program Director
Martin Marietta Information & Communication Systems
P.O. Box 1260
Denver, CO 80201-1260

CSED Review Panel

Dr. Dan Alpert, Director
Center for Advanced Study
University of Illinois
912 W. Illinois Street
Urbana, Illinois 61801

1 copy

Dr. Barry W. Boehm TRW Defense Systems Group MS 2-2304 One Space Park Redondo Beach, CA 90278	1 copy
Dr. Ruth Davis The Pymatuning Group, Inc. 2000 N. 15th Street, Suite 707 Arlington, VA 22201	1 copy
Dr. Larry E. Druffel Software Engineering Institute Shadyside Place 480 South Aiken Av. Pittsburgh, PA 15231	1 copy
Dr. C.E. Hutchinson, Dean Thayer School of Engineering Dartmouth College Hanover, NH 03755	1 copy
Mr. A.J. Jordano Manager, Systems & Software Engineering Headquarters Federal Systems Division 6600 Rockledge Dr. Bethesda, MD 20817	1 copy
Mr. Robert K. Lehto Mainstay 302 Mill St. Occoquan, VA 22125	1 copy
Mr. Oliver Selfridge 45 Percy Road Lexington, MA 02173	1 copy

IDA

General W.Y. Smith, HQ	1 copy
Mr. Seymour Deitchman, HQ	1 copy
Mr. Philip Major, HQ	1 copy
Ms. Karen H. Weber, HQ	1 copy
Dr. Jack Kramer, CSED	1 copy
Dr. Robert I. Winner, CSED	1 copy
Dr. John Salasin, CSED	1 copy
Dr. Cathy J. Linn, CSED	100 copies
Dr. Joseph L. Linn, CSED	1 copy
Mr. Michael R. Kappel, CSED	1 copy
Mr. Howard Cohen, CSED	1 copy
Ms. Deborah Heystek, CSED	1 copy
Dr. Reginald Meeson, CSED	1 copy
Dr. Karen Gordon, CSED	1 copy
Dr. Norman Howes, CSED	1 copy
Dr. Dennis Fife, CSED	1 copy
Dr. Cy Ardoin, CSED	1 copy
Ms. Julia Sensiba, CSED	2 copies
Albert J. Perrella, Jr., STD	1 copy
IDA Control & Distribution Vault	3 copies

END

DATE

FILMED

9-88

DTIC