

2

AD-A267 071



MULTIOBJECTIVE FUNCTIONS OPTIMIZATION FOR TASK ALLOCATION MAPPING TO MULTICOMPUTER NODES

Jesse Williams
Systems and Software Technology Department (Code 7033)
NAVAL AIR WARFARE CENTER
AIRCRAFT DIVISION WARMINSTER
P.O. Box 5152
Warminster, PA 18974-0591

7 AUGUST 1992

DTIC
ELECTE
JUL 22 1993
S A D

FINAL REPORT
PE 0602234N
PR RS34P11

Approved for Public Release; Distribution is Unlimited.

Prepared for
NAVAL SURFACE WARFARE CENTER (Code U33)
10901 New Hampshire Avenue
Silver Spring, MD 20903-5000

00 7 21 026

93-16522




14p5

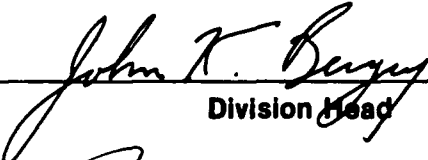
NOTICES

REPORT NUMBERING SYSTEM — The numbering of technical project reports issued by the Naval Air Warfare Center, Aircraft Division, Warminster is arranged for specific identification purposes. Each number consists of the Center acronym, the calendar year in which the number was assigned, the sequence number of the report within the specific calendar year, and the official 2-digit correspondence code of the Functional Department responsible for the report. For example: Report No. NAWCADWAR-92001-60 indicates the first Center report for the year 1992 and prepared by the Air Vehicle and Crew Systems Technology Department. The numerical codes are as follows:

CODE	OFFICE OR DEPARTMENT
00	Commanding Officer, NAWCADWAR
01	Technical Director, NAWCADWAR
05	Computer Department
10	AntiSubmarine Warfare Systems Department
20	Tactical Air Systems Department
30	Warfare Systems Analysis Department
50	Mission Avionics Technology Department
60	Air Vehicle & Crew Systems Technology Department
70	Systems & Software Technology Department
80	Engineering Support Group
90	Test & Evaluation Group

PRODUCT ENDORSEMENT — The discussion or instructions concerning commercial products herein do not constitute an endorsement by the Government nor do they convey or imply the license or right to use such products.

Reviewed By:  Date: 12/14/92
Branch Head

Reviewed By:  Date: 2/2/93
Division Head

Reviewed By:  Date: 2/3/93
Director/Deputy Director

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE 7 August 1992	3. REPORT TYPE AND DATES COVERED Final	
4. TITLE AND SUBTITLE MULTI-OBJECTIVE FUNCTIONS OPTIMIZATION FOR TASK ALLOCATION MAPPING TO MULTICOMPUTER NODES			5. FUNDING NUMBERS PE 0602234N PR RS34P11	
6. AUTHOR(S) Jesse Williams				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Systems and Software Technology Department (Code 7033) NAVAL AIR WARFARE CENTER-AIRCRAFT DIVISION WARMINSTER P.O. Box 5152 Warminster, PA 18974-5000			8. PERFORMING ORGANIZATION REPORT NUMBER NAWCADWAR-92103-70	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) NAVAL SURFACE WARFARE CENTER (Code U33) 10901 New Hampshire Ave. Silver Spring, MD 20903-5000			10. SPONSORING / MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES NAWCADWAR POC - Carl Schmiedekamp (Code 7033)				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for Public Release; Distribution is Unlimited			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The Naval Air Warfare Center - Aircraft Division Warminster, Software & Computer Technology Division, is developing software to allocate tasks to multicomputer nodes such that multiple objectives are optimized. The eventual goal of this project is to allow the decision maker to have design optimization capabilities available to her/him when designing complex systems. Two key aspects of the allocation problem are discussed: 1. The techniques used to treat multiple objectives simultaneously and 2. The techniques used to perform the search for the optimal set of model parameters. The report discusses current research reported in the literature and makes several suggestions for continuing the current effort. The current technique being used for treating multiple objectives simultaneously is to use a weighted sum of each of the individual objective functions as the objective function for the search. It is suggested that a vector of objective functions approach be implemented and experimentally compared to the weighted sum approach. Two algorithms are being				
14. SUBJECT TERMS complex systems engineering, genetic algorithm, multicomputer nodes, multiple objectives, neural network, optimization, searching simulated annealing algorithm, vector of			15. NUMBER OF PAGES 9	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

13. ABSTRACT (Continued)

used in the software: the genetic algorithm and the simulated annealing algorithm. It is suggested that a neural network search technique be added as a third alternative with experiments to determine regions of superiority of the different search techniques.

14. SUBJECT TERMS (Continued)

objective functions

NAWCADWAR-92103-70

CONTENTS

	Page
INTRODUCTION	1
LITERATURE SEARCH	1
MULTI-OBJECTIVE FUNCTIONS	2
DEFINITIONS	4
SUGGESTED APPROACHES	5
BIBLIOGRAPHY	7

DTIC QUALITY INSPECTED 5

Accession For	
NTIS CRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

Multiobjective Functions Optimization**Introduction**

At the present time the Naval Air Warfare Center (NAWC), Aircraft Division, Warminster, Software & Computer Technology Division (SCTD), is developing software to solve the problem of multiple objective task allocation to multicomputer nodes optimally. This type of optimization problem is classified as an NP-complete problem of exponential time complexity. Two algorithms are being used in the software: the genetic algorithm and the simulated annealing algorithm. The eventual goal of this project is to allow the decision maker (DM) to have options available to her/him when designing networks of allocating linked software tasks to linked computer hardware nodes.

In terms of modeling the problem, the approach is to create one objective function from a weighted sum of all the individual objective functions. SCTD is using task precedence graphs to model the problem rather than using a task interaction graph mapping. This problem can be classified as a combinatorial optimization problem concerned with finding the *best* or optimal solution among a finite or countably infinite number of alternative solutions (Sheddin).

The language implementation is in Ada, using a linked list structure.

Literature Search

A search of the literature reveals that abundant research is in progress with respect to the use of the genetic algorithms and simulated annealing algorithms in the solving of optimization problems. Another technique is also gaining much attention and that technique is the use of artificial neural networks to solve optimization problems.

Fox and Furmanski (1988) developed a "bold neural network" algorithm for balancing the load for mapping loosely synchronous problems onto hypercubes. Neural networks had been used by Hopfield and Tank (1986) for the solution of optimization problems such as the traveling salesman (TSP). Their work showed that neural networks are fast, reliable, and easy to implement.

Mansour and Fox (1991) have done experiments involving the use of genetic (GA), simulated annealing (SA), and neural network (NN) algorithms applied to different problem sets. The problem sets involve allocating data to multicomputer nodes. These experiments have compared the three algorithms with respect to solution quality, execution time, bias, parallelizability, and robustness. Their results indicated that the genetic and simulated annealing algorithms give good solutions that are close to optimal but the algorithms are very slow for problems of moderate size. However, the neural network algorithm does not give as good a solution as the genetic or simulated annealing algorithms but the algorithm is much faster than the other two algorithms. The neural network algorithm also tended to favor certain types of topologies. They use an approximate objective function that is smooth and consists of a weighted sum of individual objectives. This approximate objective function overcomes the non-smooth objective function that applies to the problem. The two goals of the optimization are load balancing and minimum communication. Their implementation language is FORTRAN.

Mansour and Fox (1992) evolve these three algorithms (GA, SA, and NN) into parallel versions. The parallel versions of these algorithms are applied to allocating irregular or general data to multicomputer nodes such that total execution time is minimized. The data allocation problem is an NP-complete resource allocation problem. The parallization of the algorithms is needed for large or dynamically varying problems. This effort was part of a larger FORTRAN D project.

The three parallel algorithms were compared for solution quality, bias, execution time, scalability, robustness, and memory space requirements. Comparisons of the three parallel algorithms consistently showed the genetic version producing the best solutions, with simulated annealing second best, and neural network solutions last. With respect to execution time the genetic version is the slowest and the neural network version is the fastest.

The parallel algorithms were less robust than their sequential counterparts.

For large problems the genetic version required large memory space. The authors indicate that this problem of large memory space requirement could be overcome by adding a preprocessing graph contraction step to the algorithm. This might lead to a decrease in solution quality, but it would lead to a significant decrease in execution time.

The parallel versions of simulated annealing and neural networks are scalable. The genetic version could be scalable, also, if the above suggestion of circumventing memory space restriction was implemented.

At NAWC, the Air Vehicles and Crew Systems Technology Department, Steinberg and DiGirolamo (1991) are using neural networks to develop flight control systems with a goal to prove that neural network based approaches are feasible in meeting flight safety requirements for implementation on manned aircraft. They are using neural networks to resolve the complex design of flight control systems (FCS) and to create designs with better performance for less labor and cost. Their implementation languages are FORTRAN and C++. They do not use Ada in their work.

Freeman and Skapura (1991), working with neural networks, recommend the use of network data arranged in groups of linearly sequential arrays, since it is much faster to step through an array sequentially than it is to look up the address of every new value as would be done if a linked-list approach were used. They give several examples using pseudo-code and data structure diagrams.

Multi-objective Functions

The discussion so far has concentrated on the algorithms to use to solve task allocation problems. We now turn to the problem of more than one objective to optimize, or the optimization of multiple objectives. Wann et al (1992) have taken the approach of optimizing a weighted sum of the individual objective functions. Warburton (1987), working with methods for approximating the set of Pareto optima paths in multiple objective, shortest-path problems, cautions that using a weighted linear combination of objective functions to approximate the optimal may miss large sections of efficient sets of acceptable solutions and we do not know which sections are unknown. Pareto optimality is the set of efficient answers that are not dominated by others. Cohen (1992) (referring to Warburton) and Warburton (1987) suggest using a vector of objective functions approach to the optimization problem. The approximation methods are fully polynomial.

Paul (1990) worked on the problem of assigning naval officers to certain billets using a hierarchy of multiple objectives. His problem was the classical 0-1 assignment problem. His technique for solving this problem was to create a hierarchy of the objectives and solve various subproblems using the objectives eventually as constraints in the subproblems. The first subproblem is solved using the highest priority objective function only. The second subproblem is solved using the second highest priority objective function, but with the first highest objective function now used as a constraint (or a high percentage of it). Continue in this manner for each additional objective function with each higher

Multiobjective Functions Optimization

objective function used as one of the constraints. The process is finished when all objective functions have been exhausted. He used the simulated annealing algorithm and obtained reasonable results on problems with small search spaces.

Ercal (1988) addressed the problem of static task mapping and used task interaction graphs to model the mapping of iterative parallel programs onto processors. His problem involved two goals: 1) even distribution of total computational load among the processors, and 2) minimization of interprocessor communication. He used two different approaches for comparison: graph-based heuristic approaches (nearest-neighbor approach and mincut-based clustering schemes) and modified simulated annealing. Comparisons were also made with a greedy algorithm. The results of his work indicated that the modified simulated annealing algorithm, with regard to solution quality and running time fell in between graph-based heuristic approach and the greedy method.

Bollinger and Midkiff (1988) worked on the problem of mapping a set of processes and their communication requirements onto a multicomputer. They did not consider the problem in which the number of processes exceeds the number of processors. The multiple objectives of load balance and minimizing interprocessor communication traffic over network links were combined into one objective using a weighted sum of the individual objectives. A weight was attached to one objective such that that objective would be heavily penalized if it increased during the optimality process.

Zojnts and Wallenius (1976) used an interactive mathematical programming method for solving the multiple criteria problem involving a single decision maker. The basis of their method is the feasibility of using linear approximations to represent the set of constraints and objective functions. Their method was to create a composite objective function (or utility function) using multipliers (weights). The composite objective function was optimized to produce an efficient or Pareto-optimal solution to the problem. An example (profits of a firm), in which the utility function is not linear, is given with the objective modified to retain the assumption of linearity.

In their model the sum of the weights is one. The weights are chosen such that it is not possible to increase (decrease) one objective without decreasing (increasing) at least one other objective function.

Loganathan and Serali (1987) discussed different classifications of the multiobjective optimization problem. The first type has the task of characterizing the set of efficient, or nondominated, or Pareto optimal, solutions. These solutions are such that no other solution can improve even one objective function without worsening the others. The task of selecting among such solutions is typically left unaddressed. Here the knowledge of the decision maker is not used.

At the other extreme the decision maker's preferences are specified as in goal programming or multiattribute utility theory. Since the decision maker's utility function is explicitly known, the problem is not a *true* multiobjective program, since it may be solved as a single scalar problem.

A third approach, and intermediate type of approach, is one that uses partial progressively revealed information regarding the decision maker's preferences. This approach is known as an interactive method because it seeks information progressively from the decision maker. These methods typically seek to solve a sequence of subproblems.

Definitions

Goldberg (1989) defines the genetic algorithm as a search algorithm based on the mechanics of natural selection and natural genetics.

Freeman and Skapura (1991) define neural networks (also known as connection networks) as a collection of *parallel processors* connected together in the form of a directed graph, organized such that the network structure lends itself to the problem being considered.

Shedden (1990) defines simulated annealing as a general purpose approximation algorithm applicable to many combinatorial optimization problems. The algorithm behaves like a local search that probabilistically accepts transitions away from a optimality, thus allowing it to escape local optima in its search for the global optimum. This algorithm is independent of initial configurations.

The combinatorial optimization problem is concerned with finding the *best* or optimal solution among a finite or countably infinite number of alternative solutions.

Chen (1990) states that simulated annealing is derived from Monte Carlo methods in statistical mechanics and is a stochastic optimization algorithm that simulates the annealing process. The algorithm was first utilized as a simulation method to examine the properties of substances consisting of interacting individual molecules. The purpose of the simulation is to find the ground states of a system which corresponds to the configurations of low energy molecular structure.

Simulated annealing has a goal of finding the minimum of a function of many variables by first *heating* the system being optimized at a high temperature and then lowering the temperature in slow stages until the system *freezes*. The sequence of temperatures, including the melting point and freezing point, is called the annealing schedule.

Blower (1990) says that simulated annealing has a goal of finding the minimum of a function of many variables by first *heating* the system being optimized at a high temperature and then lowering the temperature in slow stages until the system *freezes*. The sequence of temperatures, including the melting point and freezing point, is called the annealing schedule.

Simulated annealing is a stochastic-search technique with a control parameter represented by the temperature. The algorithm attempts to evaluate a complicated multidimensional integral by Monte Carlo sampling approach. The Monte Carlo technique is necessary because the integral is too complicated to solve through conventional analytical means. Because of the complicated nature of the integral, the Monte Carlo approach follows a scheme designed to provide better sampling of the states where major contributions to the integral are made.

Simulated annealing was very time consuming, and its performance on this highly simplified problem should not be construed as a blanket recommendation when scaling up to the real world.

Relationship between statistical mechanics and combinatorial optimization.

Statistical Mechanics

States (of system)

Energy (of states)

Ground State

Combinatorial Optimization

Solutions (to problem)

Cost (of solution)

Optimal Solution

Multiobjective Functions Optimization**Suggested Approaches**

SCTD should add a neural network algorithm to their set of algorithms which already contains genetic and simulated annealing algorithms. In order to give the user or decision maker an idea of which of these algorithms might be most suitable to meet her/his needs in the design process experiments should be performed similar to those done by Mansour and Fox (1991). Performance criteria should be solution quality, execution time, robustness, bias, and parallelizability. Performances should be critically evaluated and compared for a number of examples with different topologies, sizes, and granularities. Following the Mansour and Fox (1992) lead additional algorithms, the parallel versions of the present three algorithms, should be added to the repertoire and once again experiments for critical evaluation and comparison should be made. Once these experiments and their results are known it will be easier to advise the user as to which algorithm to use for a particular design problem. M. Wann is recognized as a neural networks expert at NAWC and the implementation of a neural nets algorithm should present no difficulty.

Additional experiments should be performed with a new model to the design problem where the individual objective functions are represented as a vector of objective functions. These results should be compared to the weighted sum results to see if better solutions can be obtained.

If the Mansour and Fox (1991) results are confirmed, i. e., neural networks are much faster than the genetic and simulated annealing algorithms, but solutions are not as good, then one should consider a situation where the user applies the neural network to an optimization problem and then takes that solution and uses it as input (starting point) for applying the simulated annealing algorithm. This is the idea of the Boltzmann machine or the Cauchy machine (Freeman and Skapura). Speedups and solution quality of this hybridization might be of interest to the user. Freeman and Skapura (1991) suggest the possibility of using classical optimizing techniques once near a minimum. This could be presented to the DM as an option.

Others are using FORTRAN for implementation of these algorithms (neural network, genetic, and simulated annealing algorithms and their parallel versions.) Steirberg and Digirolamo do not even consider using Ada as the language of implementation. SCTD is restricted to Ada. Would the tasking features of Ada improve the implementation process for these design problems?

Although Ada is designed to allow 30 tasks concurrently, actual experiments have shown a maximum of 10 to 11 tasks concurrently in reality. FORTRAN can be designed to run many more than 30 tasks concurrently. (1988 SIAM Conference on Parallel Computing, Denver, CO) This deficiency should be eliminated in Ada 9X.

The Wann et al paper does not specify how the weights for the composite objective function should be selected, or if there is any relationship between the weights. The best approach might be to have the weights sum to one. This would follow the approach of Pareto optimality where one objective cannot be improved without worsening at least one other objective.

The final product should contain pseudocode and data flow, or data structures diagrams. This would help with maintaining the code.

The simulated annealing and genetic algorithms do not appear to guarantee the avoidance of local minima. A suggestion here would be to enhance the code such that avoidance of local minima is guaranteed. The present algorithms do seem to be of a scalable nature. This would need to be taken care of if the project is to be expanded arbitrary topologies.

BIBLIOGRAPHY

DARPA Neural Network Study: October 1987 - February 1988, AFCEA International Press, Fairfax VA, November 1988.

Aarts, E.H.L., A.E. Eiben, and K.M. van Hee, *A General Theory of Genetic Algorithms*, Eindhoven University of Technology, Eindhoven, The Netherlands, December 1989. NTIS Report: Computing Science Notes - 89 08.

Blower, D.J., *Analysis of Naval Aviation Selection Test Data with Nonlinear Models. Part I. Parameter Estimation.*, Naval Aerospace Medical Research Laboratory, 1990. NAMRL Technical Memorandum 90-2.

Bollinger, S. Wayne and Scott F. Midkiff, "Processor and Link Assignment in Multicomputers Using Simulated Annealing," *Proceedings of International Conference of Parallel Processing*, pp. 1-7, August 1988.

Chen, Tung-Shen, *Simulated Annealing in Sonar Track Detection*, Naval Post Graduate School, December 1990. Master's Thesis.

Cohen, Edgar, *Algorithms for Multi-objective Optimization of a Pareto Character*, Naval Surface Warfare Center, Silver Spring MD, 1992. Preprint.

Ercal, Fikret, *Heuristic Approaches to Task Allocation for Parallel Computing*, Ohio State University, Columbus OH, 1988. Doctoral Dissertation.

Forbes, G.W. and Andrew E.W. Jones, "Towards Global Optimization with Adaptive Simulated Annealing," *International Lens Design Conference*, pp. 144-153, 11-14 June 1990.

Fox, G.C. and W. Furmanski, "Load Balancing Loosely Synchronous Problems with a Neural Network," *Proceedings of the 3rd Conference on Hypercube Concurrent Computers, and Applications*, pp. 241-278, 1988.

Freeman, James A. and David M. Skapura, *Neural Networks: Algorithms, Applications, and Programming Techniques*, Addison-Wesley, Reading MA, October 1991.

Goldberg, David E., *Genetic Algorithms in Search, Optimization, and Machine Learning*, Addison-Wesley, Reading MA, January 1989.

Holl, Loren, *Development and Implementation of a Cerebellar Model Articulation Controller Software Module*, Naval Air Warfare Center, Warminster PA, 25 March 1992. Technical Memorandum AVCSTD-92001-601.

Hopfield, John J. and David W. Tank, "Computing with Neural Circuits: A Model," *Science*, vol. 233, pp. 625-633, 8 August 1986.

Howell, Steven L., Cuong M. Nguyen, and Phillip Q. Hwang, "System Design Structuring and Allocation Optimization (DeStinAtiOn)," *Proceedings of the 1991 Systems Design Synthesis Technology Workshop*, pp. 117-128, 10-13 September 1991.

Karr, C.L., D.A. Stanley, and B.J. Scheiner, *Genetic Algorithm Applied to Least Squares Curve*

Fitting, U.S. Department of the Interior (Bureau of Mines), Washington DC, 1991. Report of Investigations 9339.

Kirkpatrick, S., C.D. Gelatt Jr., and M.P. Vecchi, "Optimization by Simulated Annealing," *Science*, vol. 220, pp. 671-680, 13 May 1983.

Knight, Kevin, "Connectionist Ideas and Algorithms," *Communications of the ACM*, vol. 33, pp. 59-74, November 1990.

Lippmann, Richard, "An Introduction to Computing with Neural Nets," *IEEE ASSP Magazine*, vol. 4, pp. 4-22, April 1987.

Loganathan, G.V. and Hanif D. Sherali, "A Convergent Interactive Cutting Plane Algorithm for Multiobjective Optimization," *Operation Research*, vol.35, pp. 365-377, May-June 1987.

Mansour, Nashat and Geoffrey C. Fox, "Physical Optimization Methods for Allocating Data to Multicomputer Nodes," *Proceedings of the 1991 Systems Design Synthesis Technology Workshop*, pp. 169-181, 10-13 September 1991.

Mansour, Nashat and Geoffrey C. Fox, *Parallel Physical Optimization Algorithms for Allocating Data to Multicomputer Nodes*, Syracuse University, Syracuse NY, 1992. Preprint.

Ogata, E.J. and E.A. Cohen, *Task Allocation and Scheduling for High Level Synthesis*, Naval Surface Warfare Center, Silver Spring Md, 3 October 1991. Draft Report No. NWSC TR 91-538.

Paul, Michael S., *An Approach to an Assignment Problem with Hierarchical Objectives*, Naval Postgraduate School, Monterey CA, March 1990. Master's Thesis.

Reitman, Ed, *Experiments in Artificial Neural Networks*, Tab Books Inc., Blue Ridge Summit PA, 1988.

Shedden, James Scott, *An Evaluation of a Modified Simulated Annealing Algorithm for Various Formulations*, Arizona State University, August 1990. Doctoral Dissertation.

Steinberg, Marc L. and Robert D. DiGirolamo, *Neural Network and Fuzzy Logic Technology for Naval Flight Control Systems*, Naval Air Development Center, Warminster PA, August 1991. Interim Report No. NADC-91080-60.

Wann, M., M. Chen, and C. Schmiedekamp, *Objective Functions and Computation Procedures for Computer Based Systems*, Naval Air Warfare Center, Warminster PA, 11 May 1992. Draft for Progress Review.

Warburton, Arthur, "Approximation of Pareto Optima in Multiple-Objective, Shortest-Path Problems," *Operations Research*, vol. 35, pp. 70-79, January-February 1987.

Zojnt, Stanley and Jyrki Wallenius, "An Interactive Programming Method for Solving the Multiple Criteria Problem," *Management Science*, vol. 22, pp. 652-663, February 1976.

DISTRIBUTION LIST
Report No. NAWCADWAR-92103-70

	No. of Copies
Naval Surface Weapons Center 10901 New Hampshire Avenue Silver Spring, MD 20903-5000 (1 for Code U33; S. Howell) (8 for Code U33; N. Cuong)	9
Naval Air Warfare Center Aircraft Division Warminster P.O. Box 5152 Warminster, PA 18974-0591 (2 for Code 0471) (10 for Code 7033; C. Schmiedekamp)	12
Defense Technical Information Center Attn: DTIC-FDAB Cameron Station BG5 Alexandria, VA 22304-6145	2
Center for Naval Analysis 4401 Fort Avenue P.O. Box 16268 Alexandria, VA 22302-0268	1