



Ballistic Testing of Australian Bisalloy Steel for Armor Applications

**by Dwight D. Showalter, William A. Gooch, Matt S. Burkins, Victoria Thorn,
Stephen J. Cimpoeu, and Russell Barnett**

ARL-RP-181

June 2007

*A reprint from the Proceedings of the 23rd International Ballistics Symposium,
Tarragona, Spain, 16 April 2007.*

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Aberdeen Proving Ground, MD 21005-5069

ARL-RP-181**June 2007**

Ballistic Testing of Australian Bisalloy Steel for Armor Applications

Dwight D. Showalter, William A. Gooch, and Matt S. Burkins
Weapons and Materials Research Directorate, ARL

Victoria Thorn and Stephen J. Cimpoeu
DSTO Melbourne, Australia

Russell Barnett
Bisalloy Steels, Australia

*A reprint from the Proceedings of the 23rd International Ballistics Symposium,
Tarragona, Spain, 16 April 2007.*

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) June 2007		2. REPORT TYPE Reprint		3. DATES COVERED (From - To) January 2006–April 2007	
4. TITLE AND SUBTITLE Ballistic Testing of Australian Bisalloy Steel for Armor Applications				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Dwight D. Showalter, William A. Gooch, Matt S. Burkins, Victoria Thorn,* Stephen J. Cimpoeu,* and Russell Barnett†				5d. PROJECT NUMBER 1L1622618AH80	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRD-ARL-WM-TA Aberdeen Proving Ground, MD 21005-5066				8. PERFORMING ORGANIZATION REPORT NUMBER ARL-RP-181	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES *DSTO Melbourne, 506 Lorimer St., Fisherman's Bend, 3207, Australia †Bisalloy Steels, P.O. Box 1246, Unanderra, 2526, Australia A reprint from the <i>Proceedings of the 23rd International Ballistics Symposium</i> , Tarragona, Spain, 16 April 2007.					
14. ABSTRACT The U.S. Army Research Laboratory (ARL) and Australian Defence Science and Technology Organisation (DSTO) have ballistically baselined a range of armor steels (277-321HB to 477-534HB) manufactured by the Australian company, Bisalloy Steels. Plate was tested in thicknesses from 10 mm to 20 mm and ARL and DSTO ballistically tested the plates against 0.30 calibre and 0.50 calibre armor piercing projectiles, 0.50 calibre and 20 mm Fragment Simulating Projectiles (FSPs) and the 14.5 mm BS41. Ballistic performance was compared for armor steels over a range of hardnesses and toughnesses, and results compared with the minimum ballistic requirements of MIL-A-12560H and MIL-A-46100D.					
15. SUBJECT TERMS steel, armor, high hard steel RHA, Brinell hardness, ballistics					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UL	18. NUMBER OF PAGES 18	19a. NAME OF RESPONSIBLE PERSON Dwight D. Showalter
a. REPORT UNCLASSIFIED	b. ABSTRACT UNCLASSIFIED	c. THIS PAGE UNCLASSIFIED			19b. TELEPHONE NUMBER (Include area code) 410-278-7308

BALLISTIC TESTING OF AUSTRALIAN BISALLOY STEEL FOR ARMOR APPLICATIONS

**D.D. Showalter¹, W.A. Gooch¹, M.S. Burkins¹, V. Thorn², S.J. Cimpoeu²
and R. Barnett³**

¹*U.S. Army Research Laboratory, APG, MD, 21005-5066*

²*DSTO Melbourne, 506 Lorimer St, Fisherman's Bend, 3207, Australia*

³*Bisalloy Steels, PO Box 1246, Unanderra, 2526, Australia*

The U.S. Army Research Laboratory (ARL) and Australian Defence Science and Technology Organisation (DSTO) have ballistically baselined a range of armor steels (277-321HB to 477-534HB) manufactured by the Australian company, Bisalloy Steels. Plate was tested in thicknesses from 10 mm to 20 mm and ARL and DSTO ballistically tested the plates against 0.30 calibre and 0.50 calibre armor piercing projectiles, 0.50 calibre and 20 mm Fragment Simulating Projectiles (FSPs) and the 14.5 mm BS41. Ballistic performance was compared for armor steels over a range of hardnesses and toughnesses, and results compared with the minimum ballistic requirements of MIL-A-12560H and MIL-A-46100D.

INTRODUCTION

The U.S. and Australia are engaged in a cooperative effort under a joint Defense Project Agreement [1] to assess light-weight armor technologies that deliver optimized performance against a range of battlefield threats, including armor piercing (AP) and fragmentation threats. Such protection has to be provided at realistic areal densities for an affordable price. Quenched and tempered steel is still quite competitive as an armor material for many ballistic applications and is the subject of the present study.

Two of the most common armor steel grades in use are MIL-A-12560H Class 1 Rolled Homogenous Armor (RHA) with a hardness range of 241-388HB [2] and MIL-A-46100D High Hardness Armor (HHA) with a hardness range of 477-534HB [3]. Both of these specifications had their origins in World War II and had not changed markedly since. The former has been modified recently (September 2000) to become more of a unified specification, incorporating a new class of wrought armor plate, Class 4, which is heat treatable to higher hardness ranges than Class 1. This new class is divided into

two sub-classes, defined by whether the armor plate is for a structural or non-structural application.

An Australian company, Bisalloy Steels Pty Ltd, produces a wide range of quenched and tempered steel grades of varied hardness and toughness which are very lean in alloy content and are starting to be used in a number of armor applications. The present study assesses the performance of these steels against a range of test projectiles, including Fragment Simulating Projectiles (FSPs), 0.30 Cal. APM2, 0.50 Cal. APM2 and 14.5 mm BS41, which will support the data obtained from the earlier assessment of steel produced by Swedish Steel SSAB [4].

An additional aim is to add to the data set that is gradually being accumulated on how ballistic performance varies with steel hardness and toughness. This will aid the further development and application of unified armor steel specifications that control armor steel properties over a wide range of steel hardness, Australian DEF(AUST) 8030 [5] and UK DEF STAN 95-24 [6] being good examples of such specifications. Table 1 compares these specifications, the U.S. Military Specifications and the Bisalloy steel grades.

DEF(AUST) 8030 is a unified armor steel specification, which controls the mechanical and chemical properties over a full range of functional rolled homogenous armor steel classes. It is a performance-based specification, allowing a contractor the freedom to choose an armor steel that best meets their needs while defining ballistic performance quality assurance requirements and, importantly, ensuring that the structural integrity of the resulting armored structure will also meet a minimum standard [7].

Table 1. Armor Classes.

Armor Class According to DEF(AUST) 8030	Hardness Equivalences (HB)			
	DEF(AUST) 8030 ¹	U.S. Military Specification Approx. Nominal Equivalent Grade	DEF STAN 95-24 Approx. Nominal Equivalent Grade	BISALLOY STEELS GRADES
Class 1	Not Explicitly Specified	No Equivalent	No Equivalent	Bisplate 80A (235-293)
Class 2	2A: 260-310 2B: 280-330	MIL-A-12560H Class 2 <31.8 mm (277-321)	Class 1 (262-311)	Bisplate High Impact Armor (HIA) Class 2 (277-321)
Class 3	340-390	MIL-A-12560H Class 1 <12.7 mm (341-388) 12.7 to <19.1 mm (331-375) 19.1 to <31.8 mm (321-375) 31.8 to <50.5 mm (293-331)	Class 2 <9 mm (341 min) 9 to <15 mm (311 min) 15 to <35 mm (285 min) 35 to <50 mm (262 min)	Bisplate High Impact Armor (HIA) Class 1 (290-390)
Class 4	370-430	MIL-A-12560H Class 4B (381 max)	No Equivalent	Bisplate High Toughness Armor (HTA) (370-430)
Class 5	420-480	MIL-A-12560H Class 4A (442 min)	Class 3A 5 to <50 mm (420-480)	Bisplate Ultra High Toughness Armor (UHTA) (420-480)
Class 6	470-535	MIL-A-46100D	Class 3 <15 mm (470-540) 15 to <35 mm (470-535)	Bisplate High Hardness Armor (HHA) (477-534)
Class 7	530-605	No Equivalent	Class 4 <15 mm (530-605) 15 to <50 mm (495-605)	No Equivalent
Class 8	560-655	No Equivalent	Class 5 (560-655)	No Equivalent

¹Each hardness range in DEF(AUST) 8030 applies for all thicknesses from 3-35 mm, unless otherwise specified.

STEEL MECHANICAL PROPERTIES AND CHEMISTRY

The collaborative research undertaken by ARL, DSTO and Bisalloy was designed to evaluate the ballistic performance of the current range of armor grade steels produced by Bisalloy Steels. The five grades assessed, HIA Class 2, HIA Class 1, HTA, UHTA and HHA, were manufactured to closely align with the main military standards of interest, namely DEF(AUST) 8030, DEF STAN 95-24 and the U.S. Military Specifications as per Table 1. These fine grained steels are vacuum degassed and calcium treated and specifically designed to optimize ballistic performance whilst maintaining good fabrication qualities and excellent weldability.

The chemical compositions for Bisplate armor grades are outlined in Table 2 below.

Table 2. Chemical Compositions of Bisplate Armor Grades.

Grade	C max	Si max	Mn max	P max	S max	Cr max	Ni max	Mo Max	B max
HIA Classes 1 & 2	.32	.50	.80	.025	.005	1.20	.50	.30	.0020
HTA	.32	.50	.80	.025	.005	1.20	.50	.30	.0020
UHTA	.25	.50	.80	.025	.005	1.20	.35	.30	.0020
HHA	.32	.50	.80	.025	.005	1.20	.50	.30	.0020

All grades are quenched and tempered through a modern Drever roller quench facility to achieve optimum levels of hardness and toughness. Mechanical properties are listed in Table 3, below.

Table 3. Mechanical Properties Specifications of Bisplate Armor Grades.

Grade	Thickness (mm)	Brinell Hardness (BHN)	Charpy V-notch @ -40C/-40F (10 x 10 mm) transverse ²
HIA Class 2	5-50	277-321	Min 40J
HIA Class 1 ³	5-50	290-390	Min 20J
HTA	5-50	370-430	Min 17J
UHTA	8-20	420-480	Min 16J
HHA	6-60	477-534	Min 16J

²Charpy V-Notch test in accordance with AS 1544.2 or BS EN 10045-1 as per DEF(AUST) 8030.

³Hardness ranges to comply with variable hardness range requirements depending on thickness as per MIL-A-12560H.

TEST DATA

Tables 4-7 show the nominal thickness; Brinell hardness (HB); angle of obliquity with zero being normal to the target; V_{50} ballistic limit; standard deviation (σ); and the mass efficiency (E_m) of the test coupons. A maximum likelihood method was used to determine the ballistic limits and standard deviations when there was a zone of mixed results, otherwise the ballistic limits were obtained by averaging. Tight velocity spreads for ballistic limit determinations were not able to be obtained in all circumstances.

The coupons tested against armor piercing projectiles, Table 4 and 5, display increasing ballistic protection as the hardness increases. This is in contrast to the Fragment Simulating Projectile (FSP) data in Table 6, which shows how the ballistic limit drops markedly as the hardness increases.

Table 4. V_{50} Data for 0.30 Cal. APM2.

Target	Actual Thickness (mm)	Brinell Hardness (HB)	Obliquity (deg.)	V_{50} (m/s)	σ	E_m
HIA Class 2	10.3	300	0	643	10.1	0.93
HIA Class 1	10.2	363	0	664	11.9	0.99
HTA	10.3	400	0	699	12.8	1.07
UHTA	10.1	450	0	708	7.6	1.11
HHA	10.4	512	0	702	12.1	1.06
HTA	12.1	403	0	763	6.4	1.07
UHTA	12.0	444	0	777	9.0	1.12
HHA	11.9	530	0	826	7.0	1.25

Table 5. V_{50} Data for 0.50 Cal. APM2.

Target	Actual Thickness (mm)	Brinell Hardness (HB)	Obliquity (deg.)	V_{50} (m/s)	σ	E_m
HIA Class 2	10.3	300	0	490	12.8	1.04
HIA Class 1	10.2	363	0	508	14.9	1.11
HTA	10.3	400	0	495	9.4	1.05
HTA	12.0	403	0	512	12.5	0.95
UHTA	12.0	444	0	463	12.8	0.83
HHA	11.9	530	30	734	16.7	1.15
HTA	19.9	372	0	705 ⁵	47	0.97
UHTA	19.9	444	0	715 ⁵	5	1.00
HHA ⁴	19.5	477	0	751 ⁵	81	1.11

⁴Shattergap problem at 0° obliquity, this result is using data obtained for intact projectiles.

⁵Data analysed using Maximum Likelihood Method.

Table 6. V₅₀ Data for 0.50 Cal. FSP.

Target	Actual Thickness (mm)	Brinell Hardness (HB)	Obliquity (deg.)	V ₅₀ (m/s)	σ	E _m
HIA Class 2	10.3	300	0	945	22.9	1.02
HIA Class 1	10.2	363	0	913	21.3	0.99
HTA	10.3	400	0	774	18.6	0.79
UHTA	10.1	450	0	708	7.2	0.70
HHA	10.4	512	0	726	6.9	0.71
HTA	12.1	403	0	868	8.3	0.78
UHTA	11.8	444	0	835	9.4	0.76
HHA	11.9	530	0	835	10.4	0.75

Table 7. V₅₀ Data for 14.5 mm BS41 and 20 mm FSP (19.6 mm actual plate thickness).

Target	Threat	Brinell Hardness (HB)	Obliquity (deg.)	V ₅₀ (m/s)	σ	E _m
HHA	14.5 mm BS41	477	30	801	13.4	1.63
HHA	20 mm FSP	477	0	845	4.2	0.81

COMPARISON WITH U.S. ARMOR SPECIFICATIONS

For armor to be accepted into service in the U.S., it must meet MIL-A-12560H or MIL-A-46100D. This test program also included tests to ensure the ballistic limit met or exceeded that required in the standards for the particular steels. Some of the tests were conducted at 30° obliquity because the HHA often induces shattergap problems with 0.30 Cal and 0.50 Cal APM2 ammunition, the acceptance tables in MIL-A-46100D implicitly acknowledging this issue. As can be seen in Table 8, all three combinations tested to the specifications *passed*.

Table 8. Comparison of results with MIL-A-12560H and MIL-A-46100D.

Target	Threat	Actual Thickness (in.)	Obliquity (degrees)	Minimum Ballistic Limit (fps)	Actual Ballistic Limit (fps)
HHA	0.50 Cal APM2	0.469 (11.9 mm)	30	2354 ⁶ (718 m/s)	2408 (734 m/s)
HHA	14.5 mm BS41	0.770 (19.6 mm)	30	2292 ⁶ (699 m/s)	2627 (801 m/s)
HIA Class 1	0.30 Cal APM2	0.402 (10.2 mm)	0	2146 ⁷ (654 m/s)	2183 (664 m/s)

⁶MIL-A-46100D.⁷MIL-A-12560H.

EFFECT OF HARDNESS ON BALLISTIC LIMIT FOR ARMOR PIERCING PROJECTILES AND FRAGMENT SIMULATORS

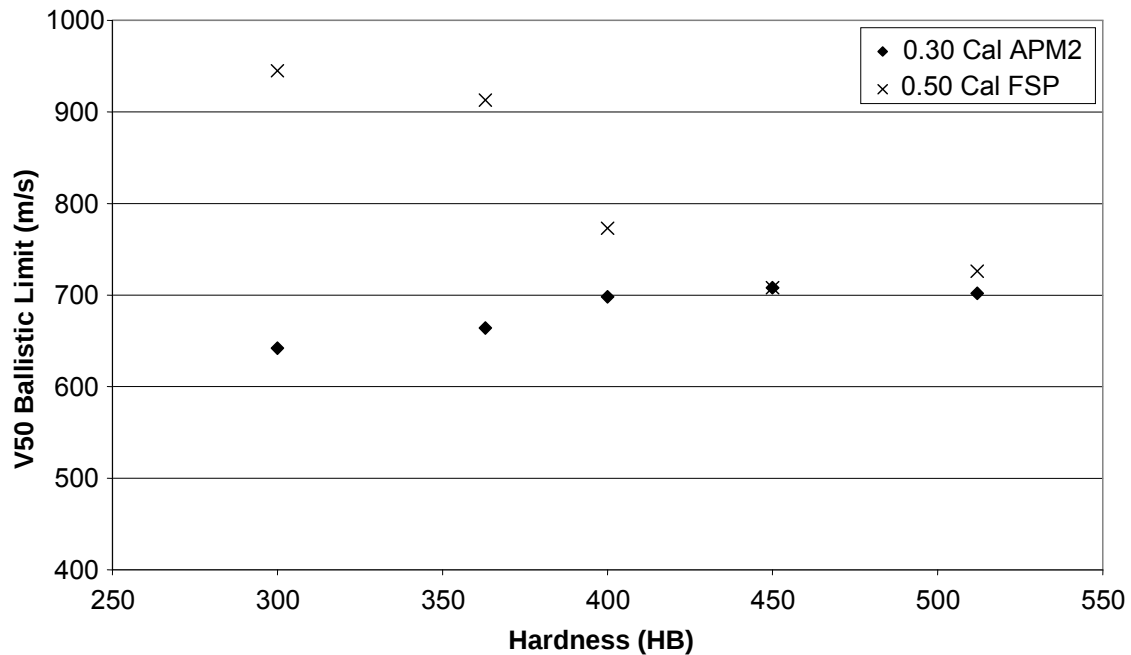


Figure 1. The effect on the V_{50} ballistic limit as the hardness increases for 10 mm Bisalloy plates against 0.30 Cal APM2 and 0.50 Cal FSPs.

From Figure 1 and Tables 4-7 it is evident that plate hardness will affect the ballistic limit achievable for armor steels. The improved ballistic resistance of steel as a function of increasing hardness is well established in the ballistic community, particularly by Rapacki et al. in the 15th Int. Ballistic Symposium [8] and for this reason armor designers are more often incorporating higher strength armor steels in their applique and structural armor solutions. Whilst this phenomenon is true for small arms protection, it does not apply for fragmentation protection. Fragmentation protection decreases significantly with increasing hardness, making the higher hardness armor grades a poor choice for such applications. This is because impacts of blunt fragments cause high strength steels to fail by adiabatic shear plugging [9].

Figure 1 also shows that there is no difference between the ballistic performance of UHTA (~450HB) and HHA (~530HB) and this is also seen for other plate thicknesses in Tables 5 and 6. The UHTA grade has a leaner chemistry, providing improved toughness and weldability compared to HHA. UHTA would be a better choice for structural applications and the more consistent ballistic performance may allow a weight saving in some circumstances.

CONCLUSIONS

The U.S. and Australia completed a cooperative effort to assess armor steel produced by Bisalloy Steels Pty Ltd. A comparison was made between the different grades of Bisalloy steels and various U.S., Australian, and U.K. armor standards. As the hardness of the steel plates increased, the V_{50} ballistic limit of the plates increased against steel-cored, armor-piercing projectiles. For nominal 10 mm plates, the Bisalloy HIA Class 2 plates (277-321HB) provided a V_{50} of 643 m/s against the 0.30 caliber APM2, but the V_{50} increased up to 702 m/s for the HHA grade at 477-534HB. For the 0.50 caliber FSP the trend was reversed with the lowest hardness plates providing the highest V_{50} . The higher strength plates tend to fail by adiabatic shear plugging when subjected to attack by the blunt FSPs. It is also seen in many instances that there is no difference in ballistic performance between UHTA (~450HB) and HHA (~530HB). The UHTA grade is more weldable, has better structural properties and sometimes has more consistent ballistic performance than HHA. Two Bisalloy HHA plates were tested and both passed the requirements of MIL-A-46100D. A single plate of Bisalloy HIA Class 1 armor plate was tested and it passed the requirements of MIL-A-12560H.

REFERENCES

- [1] Agreement between the Government of the United States of America and the Government of Australia concerning Cooperative and Collaborative Research, Development and Engineering, Project Agreement A99-0099 on Light Armour and Penetrators, dated 7 July 1999.
- [2] U.S. Military Specification, MIL-A-12560H(MR), Amendment 3, Armor Plate, Steel, Wrought, Homogeneous (For use in Combat Vehicles and Ammunition Testing), (2000).
- [3] U.S. Military Specification, MIL-A-46100D(MR), Armor Plate, Steel, Wrought, High Hardness, (1988).
- [4] W.A. Gooch, M.S. Burkins, R. Squillacioti, R. Stockman Koch, H. Oscarsson, and C. Nash, Ballistic Testing of Swedish Steel for U.S. Armor Applications, *21st Int. Symposium on Ballistics*, 174-181 (2004).
- [5] Australian Defence Standard, DEF(AUST) 8030, Rolled Armour Plate, Steel (3-35 mm) (2005).
- [6] UK Defence Standard, DEF STAN 95-24, Armour Plate, Steel (3-160 mm), Issue 3 (2004).
- [7] S.J. Cimpoeu and S.J. Alkemade, Guidelines for Effective Armour Material Specifications for Defence Applications, *Technological and Research Developments in Welded Defence Equipment Conference*, WTIA (2002).
- [8] E. Rapacki, K. Frank, B. Leavy, M. Keele, and J. Prifti, Armor Steel Hardness Influence on Kinetic Energy Penetration, *15th Int. Symposium on Ballistics*, (1995).
- [9] R.L. Woodward, The Interrelation of Failure Modes Observed in the Penetration of Metallic Targets, *Int. J. Impact Engng*, 2, 121-129 (1984).

ACKNOWLEDGEMENTS

The authors would like to thank Steve Pattie and Frank Griffio of DSTO and Ballistic and Mechanical Testing for their efforts in obtaining the Australian test data.

NO. OF
COPIES ORGANIZATION

1 DEFENSE TECHNICAL
(PDF INFORMATION CTR
ONLY) DTIC OCA
8725 JOHN J KINGMAN RD
STE 0944
FORT BELVOIR VA 22060-6218

1 US ARMY RSRCH DEV &
ENGRG CMD
SYSTEMS OF SYSTEMS
INTEGRATION
AMSRD SS T
6000 6TH ST STE 100
FORT BELVOIR VA 22060-5608

1 DIRECTOR
US ARMY RESEARCH LAB
IMNE ALC IMS
2800 POWDER MILL RD
ADELPHI MD 20783-1197

3 DIRECTOR
US ARMY RESEARCH LAB
AMSRD ARL CI OK TL
2800 POWDER MILL RD
ADELPHI MD 20783-1197

ABERDEEN PROVING GROUND

1 DIR USARL
AMSRD ARL CI OK TP (BLDG 4600)

NO. OF
COPIES ORGANIZATION

1 CDR US ARMY TACOM
AMSRD TAR R
T FURMANIAK
MS 263
6501 E 11 MILE RD
WARREN MI 48397-5000

1 CDR US ARMY TACOM
AMSRD TAR R
D HANSEN
MS 271
6501 E 11 MILE RD
WARREN MI 48397-5000

1 CDR US ARMY TACOM
AMSRD TAR R
L P FRANKS
MS 263
6501 E 11 MILE RD
WARREN MI 48397-5000

1 CDR US ARMY TACOM
AMSRD TAR R
D TEMPLETON
MS 263
6501 E 11 MILE RD
WARREN MI 48397-5000

1 PROJECT MANAGER
ABRAMS TANK SYS
SFAE GCSS W ABS
J ROWE
WARREN MI 48397-5000

2 CDR
NGIC
J CRIDER
W GSTATTEBAUER
2055 BOULDERS RD
CHARLOTTESVILLE VA 22901-5391

1 CENTRAL INTELLIGENCE AGENCY
WINPAC/CWTG/GWET
D MOORE
4P07NHB
WASHINGTON DC 20505

1 DIRECTOR
DARPA
3701 NORTH FAIRFAX DR
ARLINGTON VA 22203-1714

NO. OF
COPIES ORGANIZATION

1 PM BFVS
SFAE GCS HBCT S
M KING
6501 E 11 MILE RD
WARREN MI 48397-5000

1 CDR
CARDEROCK DIV NSWC
CODE 28
R PETERSON
9500 MACARTHUR BLVD
W BETHESDA MD 20817-5700

3 LAWRENCE LIVERMORE NATL LAB
R GOGOLEWSKI L290
R LANDINGHAM L372
J REAUGH L32
PO BOX 808
LIVERMORE CA 94550

2 LOS ALAMOS NATL LAB
F ADDESSIO
M BURKETT
LOS ALAMOS NM 87545

1 NAVAL RSCH LAB
CODE 6684
4555 OVERLOOK AVE SW
WASHINGTON DC 20375

3 SANDIA NATL LAB
J ASAY MS 0548
R BRANNON MS 0820
D CRAWFORD ORG 0821
PO BOX 5800
ALBUQUERQUE NM 87185-0307

1 AIR FORCE ARMAMENT LAB
AFATL DLJW
W COOK
EGLIN AFB FL 32542

3 INST FOR ADVNCD TECH
S BLESS
H FAIR
R SUBRAMANIAN
3925 W BRAKER LN
AUSTIN TX 78759-5316

1 UNIV OF DAYTON RSCH INST
KLA14
N BRAR
300 COLLEGE PARK
DAYTON OH 45469-0182

NO. OF
COPIES ORGANIZATION

2 SOUTHWEST RSCH INST
C ANDERSON
J WALKER
6220 CULEBRA RD
SAN ANTONIO TX 78238

2 UNIV OF CA SAN DIEGO
DEPT OF APPL MECH & ENGR
SVC R011
S NEMAT NASSER
M MEYERS
LA JOLLA CA 92093-0411

1 ARMORWORKS
W PERCIBALLI
1701 W 10TH ST STE 5
TEMPE AZ 85281

1 BRIGGS COMPANY
J BACKOFEN
2668 PETERSBOROUGH ST
HERNDON VA 222071-2443

2 BAE ADVANCED MATERIALS
R PALICKA
G NELSON
1960 WATSON WAY
VISTA CA 92083

1 CYPRESS INTERNTL
A CAPONECCHI
1201 E ABINGDON DR
ALEXANDRIA VA 22314

3 GDLS
W BURKE MZ436 21 24
G CAMPBELL MZ436 30 44
D DEBUSSCHER MZ436 20 29
38500 MOUND RD
STERLING HTS MI 48310-3200

3 GDLS
J ERIDON MZ436 21 24
W HERMAN MZ435 01 24
S PENTESCU MZ436 21 24
38500 MOUND RD
STERLING HTS MI 48310-3200

3 ARMOR HOLDINGS
G ALLEN
D MALONE
T RUSSELL
9113 LE SAINT DR
FAIRFIELD OH 45014

NO. OF
COPIES ORGANIZATION

4 POULTER LAB
SRI INTERNATIONAL
D CURRAN
R KLOOP
L SEAMAN
D SHOCKEY
333 RAVENSWOOD AVE
MENLO PARK CA 94025

1 ARMOR HOLDINGS
R WOLFFE
10016 SOUTH 51ST ST
PHOENIX AZ 85044

3 UNITED DEFENSE LP
E BRADY
R JENKINS
J JOHNSON
PO BOX 15512
YORK PA 17405-1512

1 ATI ALLEGHENY LUDLUM
R BAILEY
500 GREEN ST
WASHINGTON PA 15301

ABERDEEN PROVING GROUND

1 DIR USA EBCC
SCBRD RT
5183 BLACKHAWK RD
APG EA MD 21010-5424

1 CDR USA SBCCOM
AMSCB CII
5183 BLACKHAWK RD
APG EA MD 21010-5424

2 DIR USAMSAA
AMSRD AMS D
AMSRD AMS MP
H COHEN
BLDG 392
APG MD 21005

2 CDR USATC
CSTE DTC AT LI LV
E SANDERSON
M SIMON
400 COLLERAN RD
APG MD 21005-5059

NO. OF
COPIES ORGANIZATION

33 DIR USARL
AMSRD ARL WM
T WRIGHT
AMSRD ARL WM TA
M BURKINS
C HOPPEL
E HORWATH
T JONES
D KLEPONIS
B LEAVY
J RUNYEON
S SCHOENFELD
W GOOCH
AMSRD ARL WM TB
R SKAGGS
AMSRD ARL WM TC
R ANDERSON
T FARRAND
K KIMSEY
R MUDD
D SCHEFFLER
S SCHRAML
S SEGLETES
AMSRD ARL WM TD
S BILYK
T BJERKE
D CASEM
J CLAYTON
D DANDEKAR
M GREENFIELD
Y HUANG
K IYER
B LOVE
H MEYER
E RAPACKI
M RAFTENBERG
M SCHIEDLER
T WEERASOORIYA
AMSRD ARL WM MD
B CHEESEMAN

NO. OF
COPIES ORGANIZATION

- 1 EMBASSY OF AUSTRALIA
COUNSELLOR DEFENCE SCIENCE
1601 MASSACHUSETTS AVE NW
WASHINGTON DC 20036-2273
- 4 DEFENSE SCIENCE AND
TECHNOLOGY ORGANISATION
S CIMPOERU
V THORN
T BUSSELL
T JOYNER
506 LORIMER STREET
FISHERMANS BEND
MELBOURNE VIC 3207
AUSTRALIA
- 4 BISALLOY STEELS PTY LTD
W PANG
M SAMPSON
R BARNETT
N HARDCASTLE
18 RESOLUTION DRIVE
PO BOX 1246
UNANDERRA NSW 2526
AUSTRALIA
- 1 DEFENCE RSCH AGENCY
FORT HALSTEAD SEVEN OAKS
KENT TN14 7BP
UNITED KINGDOM
- 1 CARLOS III UNIV OF MADRID
C NAVARRO
ESCUELA POLTEENICA SUPERIOR
C/. BUTARQUE 15
28911 LEGANES MADRID
SPAIN
- 3 CENTRE D'ETUDES GRAMAT
J CAGNOUX C GALLIC
J TRANCHET
GRAMAT 46500
FRANCE
- 1 TDW
M HELD
POSTFACH 1340
D 86523 SCHROBENHAUSEN
GERMANY

NO. OF
COPIES ORGANIZATION

- 3 DEFENSE SCI AND TECHLGY LABS
T HAWKINS
B JAMES
B SHRUBSALL
PORTON DOWN
SALISBURY WILTS SP04 OJQ
UNITED KINGDOM
- 1 DEFENCE RSCH ESTAB SUFFIELD
J FOWLER
BOX 4000
MEDICINE HAT ALBERTA TIA 8K6
CANADA
- 1 DEFENCE RSCH ESTAB
VALCARTIER ARMAMENTS DIV
R DELAGRAVE
2459 PIE X1 BLVD N
PO BOX 8800
CORCELETTE QUEBEC GOA 1RO
CANADA
- 1 DEUTSCH FRANZOSISCHES
FORSCHUNGSINSTITUT ST LOUIS
H ERNST
CEDEX 5 RUE DU
GENERAL CASSAGNOU
F 68301 SAINT LOUIS
FRANCE
- 1 DYNAMEC RSCH AB
A PERSSON
PO BOX 201
S 151 23 SODERTALJE
SWEDEN
- 2 ETBS DSTI
P BARNIER
M SALLES
ROUTE DE GUERAY
BOITE POSTALE 712
18015 BOURGES CEDEX
FRANCE
- 4 FRANHOFER INSTITUT FUR
KURZZEITDYNAMIK
ERNST MACH INSTITUT
C WICKERT
E STRASSBURGER
R THAM
K THOMA
ECKERSTRASSE 4
D 79 104 FREIBURG
GERMANY

NO. OF
COPIES ORGANIZATION

1 INGENIEURBURO DEISENROTH
F DEISENROTH
AUF DE HARDT 33 35
D 5204 LOHMAR 1
GERMANY

6 INST FOR PROBLEMS IN
MATERIALS SCI
S FIRSTOV
B GALANOV
O GRIGORIEV
V KARTUZOV
V KOVTUN
Y MILMAN
3 KRHYZHANOVSKY STR
252142 KIEV 142
UKRAINE

1 INST FOR PROBLEMS
OF STRENGTH
G STEPANOV
TIMIRY AZEVSKAYA STR 2
252014 KIEV
UKRAINE

1 K&W THUN
ALLMENDSSTRASSE 86
CH 3602 THUN
SWITZERLAND

1 R OGORKIEWICZ
18 TEMPLE SHEEN
LONDON SW 14 7RP
UNITED KINGDOM

1 RAPHAEL BALLISTICS CTR
BOX 2250
HAIFA 31021
ISRAEL

1 ROYAL NETHERLANDS ARMY
J HOENEVELD
V D BURCHLAAN 31
PO BOX 90822
2509 LS THE HAGUE
NETHERLANDS

1 DEFENCE MATERIEL ADMIN
WEAPONS DIRECTORATE
A BERG
S 11588 STOCKHOLM
SWEDEN

NO. OF
COPIES ORGANIZATION

3 SWEDISH DEFENCE RSCH ESTAB
L HOLMBERG
B JANZON
P LUNDBERG
BOX 551
S 147 25 TUMBA
SWEDEN

1 TECHNION INST OF TECH
FACULTY OF MECH ENGINEERING
S BODNER
TECHNION CITY
HAIFA 32000
ISRAEL

1 TECHNISCHE UNIVERSITAT
CHEMNITZ ZWICKAU
L MEYER
POSTFACH
D 09107 CHEMINITZ
GERMANY

2 TNO DEFENSE SECURITY & SAFETY
H PESKES
R IJSSELSTEIN
PO BOX 96864
DEN HAAS
THE NETHERLANDS 2509G

7 CENTRE DE RECHERCHES
ET D'ETUDES
D'ARCUEIL
D BOUVART
C COTTENNOT
S JONNEAUX
H ORSINI
S SERROR
F TARDIVAL
16 BIS AVENUE PRIEUR DE
LA COTE D'OR
F 94114 ARCUEIL CEDEX
FRANCE