

GPS Sounding of the Ionosphere Onboard CHAMP

N. Jakowski, C. Mayer, V. Wilken

Deutsches Zentrum für Luft- und Raumfahrt (DLR) / Institut für Kommunikation und Navigation
Kalkhorstweg 53
Neustrelitz
GERMANY

Norbert.Jakowski@dlr.de / Christoph.Mayer@dlr.de / Volker.Wilken@dlr.de

ABSTRACT

Space based GPS measurements onboard Low Earth Orbiting (LEO) satellites provide a unique possibility for exploring the ionosphere on a global scale. Both the radio occultation measurements in the limb sounding mode and the navigation measurements using a zenith viewing GPS antenna provide the Total Electron Content (TEC) along numerous ray paths. TEC may effectively be used for reconstructing the spatial and temporal distribution of the electron density in the ionosphere and plasmasphere.

Reported are results obtained from radio occultation measurements on CHAMP which have provided more than 200,000 vertical electron density profiles so far. These observations contribute to a better understanding of the regular behaviour of the global ionosphere. Furthermore, the radio occultation measurements indicate irregular and/or wavelike structures in the ionosphere which may have severe impact on the functionality of radio systems.

A three-dimensional imaging of the electron density distribution near the CHAMP orbit plane between CHAMP and GPS orbit height is performed by using link related TEC data derived from dual frequency navigation measurements (zenith antenna) onboard CHAMP. This type of measurements provides a good measure of the interaction of the solar wind with the global Earth's atmosphere, thus providing a good opportunity for studying this interaction via the magnetosphere.

Key words: GPS, Ionosphere, Plasmasphere, Radio Occultation, CHAMP

1. INTRODUCTION

The capability of sounding the ionosphere by GPS measurements onboard Low Earth Orbiting (LEO) satellites has been demonstrated by several LEO satellite missions such as Microlab-1 with the GPS/MET experiment (e.g. Hajj and Romans, 1998, Schreiner et al., 1999), Ørstedt, and CHAMP (Jakowski et al., 2002, Garcia-Fernandez et al., 2003).

This paper deals with results of the ionosphere monitoring obtained by means of GPS measurements onboard the current geo-research satellite mission CHAMP (Reigber et al., 2000). The German CHAMP (CHallenging Minisatellite Payload) satellite was successfully launched on 15 July 2000 into a near polar orbit (inclination 87°, altitude 450 km). The satellite is equipped with a dual frequency «Black Jack» GPS receiver which enables not only the use of GPS radio occultation measurements in the limb sounding mode, but also the analysis of the 0.1 Hz sampled navigation data.

The GPS data measured onboard CHAMP are received at the DLR Remote Sensing Data Center in Neustrelitz and subsequently processed at DLR by an operational data processing system (Wehrenpfennig et al., 2001).

Jakowski, N.; Mayer, C.; Wilken, V. (2006) GPS Sounding of the Ionosphere Onboard CHAMP. In *Characterising the Ionosphere* (pp. 26-1 – 26-16). Meeting Proceedings RTO-MP-IST-056, Paper 26. Neuilly-sur-Seine, France: RTO.
Available from: <http://www.rto.nato.int/abstracts.asp>.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 01 JUN 2006		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE GPS Sounding of the Ionosphere Onboard CHAMP				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Deutsches Zentrum für Luft- und Raumfahrt (DLR) / Institut für Kommunikation und Navigation Kalkhorstweg 53 Neustrelitz GERMANY				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM002065., The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 52	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

GPS Sounding of the Ionosphere Onboard CHAMP

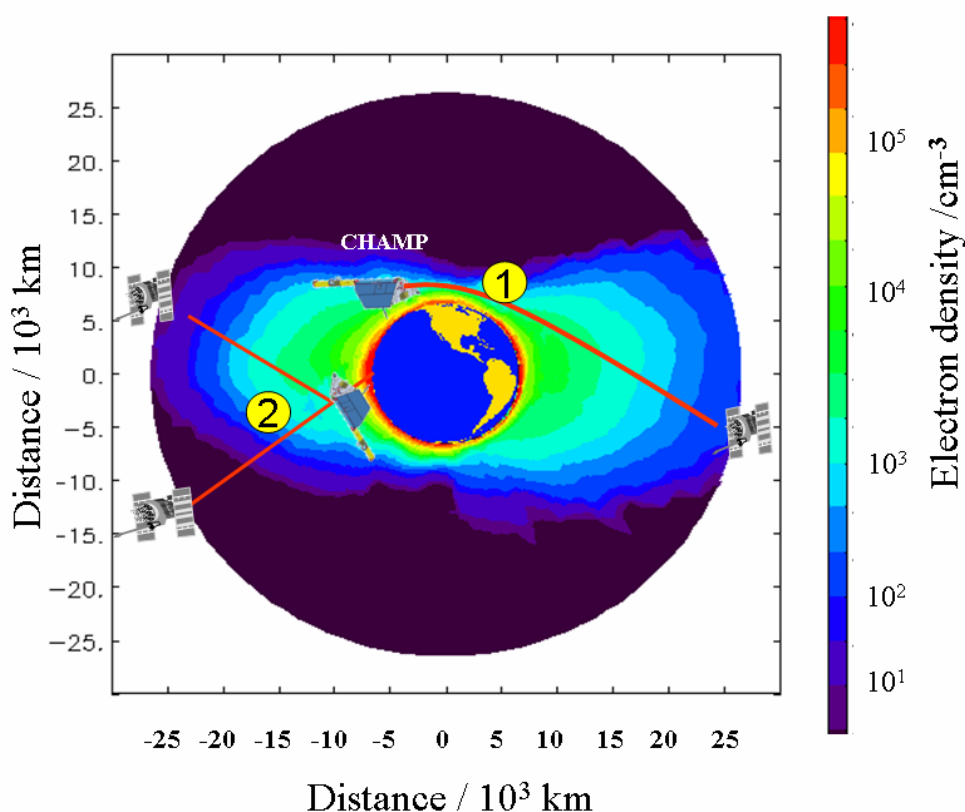


Fig. 1: Illustration of GPS measurement techniques used onboard CHAMP for sounding the ionosphere. (1): Ionospheric radio occultation (IRO) measurements in the limb sounding mode. (2): Use of 0.1 Hz sampled GPS navigation data from the zenith viewing antenna.

Fig. 1 illustrates the two different GPS measurement techniques which are used for ionosphere sounding. The Ionospheric Radio Occultation (IRO) experiment onboard CHAMP (1) provides up to 150 globally distributed vertical electron density profiles per day on a routine basis (Fig. 2). In addition to the IRO measurements, the 0.1 Hz sampled navigation data, measured with the zenith viewing antenna, can effectively be used for probing the topside ionosphere (Heise et al., 2002). Both, the IRO measurements as well as the topside data are operationally processed allowing fast access to global ionospheric information which can be used in near-real-time space weather monitoring.

2. GPS MEASUREMENT TECHNIQUES

Ionospheric Radio Occultation measurements

The GPS receiver onboard CHAMP measures carrier phases in the radio occultation or limb sounding mode starting at CHAMP orbit tangential heights down to the Earth surface with a sampling rate of 1 Hz. The measured GPS data are automatically checked and pre-processed by a highly flexible operational processing system (Wehrenpfennig et al., 2001). The processing flexibility is achieved thanks to the modular structure of the processing system in which the retrieval modules can be replaced and upgraded in the course of the CHAMP satellite mission. The original radio occultation measurements of the GPS satellites carried out with a sampling rate of 1 Hz include dual frequency L1/L2 carrier phase as well as code phase measurements.

Oppositely to the radio occultation sounding of the neutral atmosphere, the Ionospheric Radio Occultation (IRO) measurements can take benefit of the dispersive nature of the ionosphere. Thus, differential GPS phases derived from dual frequency GPS measurements can effectively be used for computing the integral of the electron density (TEC) along the ray path traversing the ionosphere.

The applied IRO retrieval method uses only the carrier phase measurements at L1 and L2 GPS frequencies which are described by the observation equation:

$$\phi = \rho + c(dt - dT) - d_I + d_{MP} + dq + dQ + N\lambda + \varepsilon \quad (1)$$

where ρ is the true geometrical range between GPS satellite and receiver, c is the vacuum speed of light, dt and dT are the satellite and receiver clock errors, d_I is the ionospheric delay along the ray path s , d_{MP} is the multipath error, dq and dQ are the instrumental satellite and receiver biases, λ is the radio wave length, N is the phase ambiguity number (integer) and ε is the residual error. The space weather sensitive ionospheric propagation term d_I is a function of the refraction index and can be written in a first order approximation by:

$$d_I = \frac{K}{f^2} \int_S^R n_e ds \quad (2)$$

with $K = 40.3 \text{ m}^3 \text{s}^{-2}$.

Here the integral of the local electron density n_e along the ray path between satellite S and receiver R is the Total Electron Content already mentioned above. Ignoring the multipath term, instrumental delays and integer ambiguities N in eq. (1), the differential carrier phase $\Delta\phi = \phi_1 - \phi_2$ computed from carrier phases measured at L_1 and L_2 frequencies provides low noise TEC values. The method neglects dispersive ray path bending effects because these effects are small compared with the first-order-effects (Schreiner et al., 1999). The 1 Hz sampled relative TEC is measured along the radio occultation ray path which has a length in the order of 1000 km in the ionosphere and continuously approaches to the Earth surface measured by the tangential height.

The subsequent measurements form a set of equations which are successively solved from top to bottom, providing the electron density in the assumed spherical shells (Jakowski et al., 2002, 2004).

Since CHAMP has a rather low orbit height of less than 450 km, which decreases with mission time, the upper boundary condition is ill posed because of considerable ionization above the occultation entry. To overcome this upper boundary problem, a specific model assisted technique has been developed for the CHAMP IRO data analysis. The solution starts with the first measurement at the greatest tangential height by using an adaptive model for the topside ionosphere and plasmasphere above the CHAMP orbit height. This adaptive model consists of a Chapman layer whose topside part is extended by a slowly decaying exponential term with a fixed scale height value of 10,000 km. Key model parameters such as the plasma scale height at the upper boundary are determined in a few iterations in order to ensure a smooth transition between model values and measurements. It has been found that the crucial element for improving the solution of the upper boundary problem is the topside scale height (Stankov and Jakowski, 2006).

GPS Sounding of the Ionosphere Onboard CHAMP

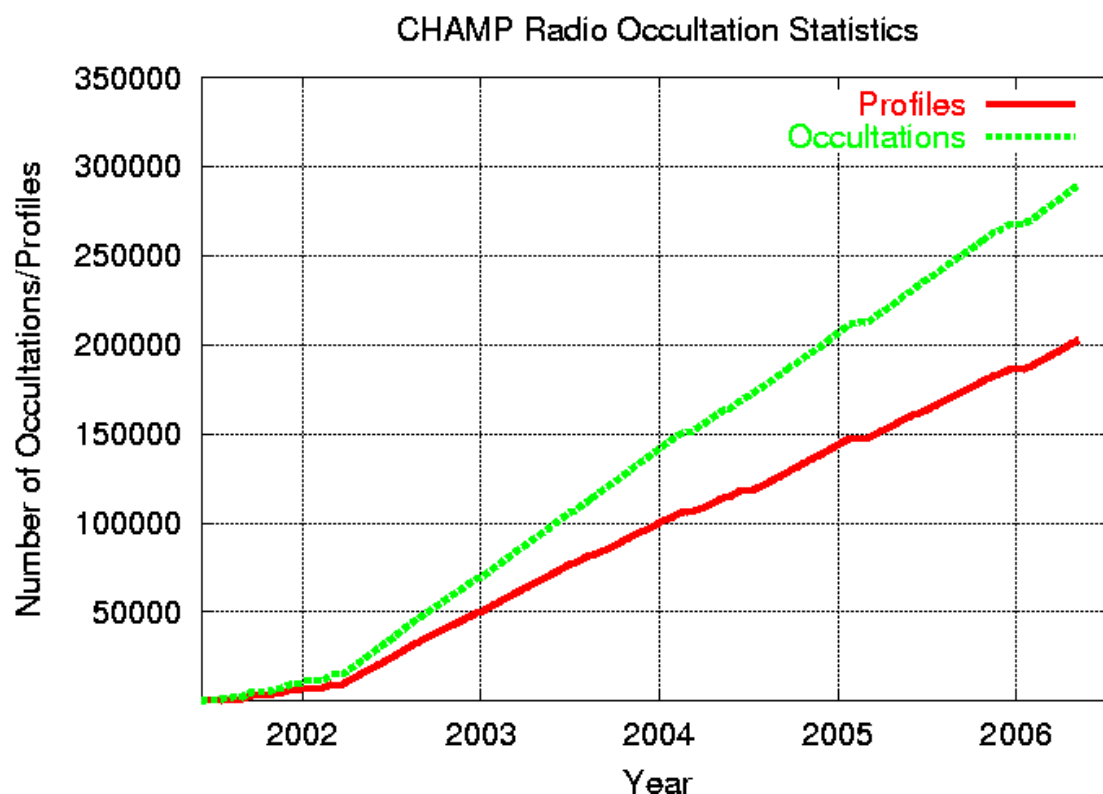


Fig. 2 Number of IRO measurements and retrieved vertical electron density profiles from 11 April 2001 until end of April 2006.

To fulfill space weather monitoring requirements, i.e. to come up with retrieval products within a latency of less than 3 hours as it is required by the traditional weather service, no further data are included in the retrieval procedure and for reasons of simplicity a spherically layered ionosphere is assumed (Abel inversion assumption). The retrieval can be improved if additional information, e.g. on horizontal gradients or local densities, as may be provided by TEC maps (<http://www.kn.nz.dlr.de/swaci/>). On average, from about 200 IRO measurements per day, about 150 electron density profiles (EDP) are successfully retrieved (Fig. 2) now adding up to the huge number of more than 200,000 profiles.

Because the processing system works automatically, the occurrence of outliers in the derived profiles cannot be avoided; however, the number of such outliers is less than 1%.

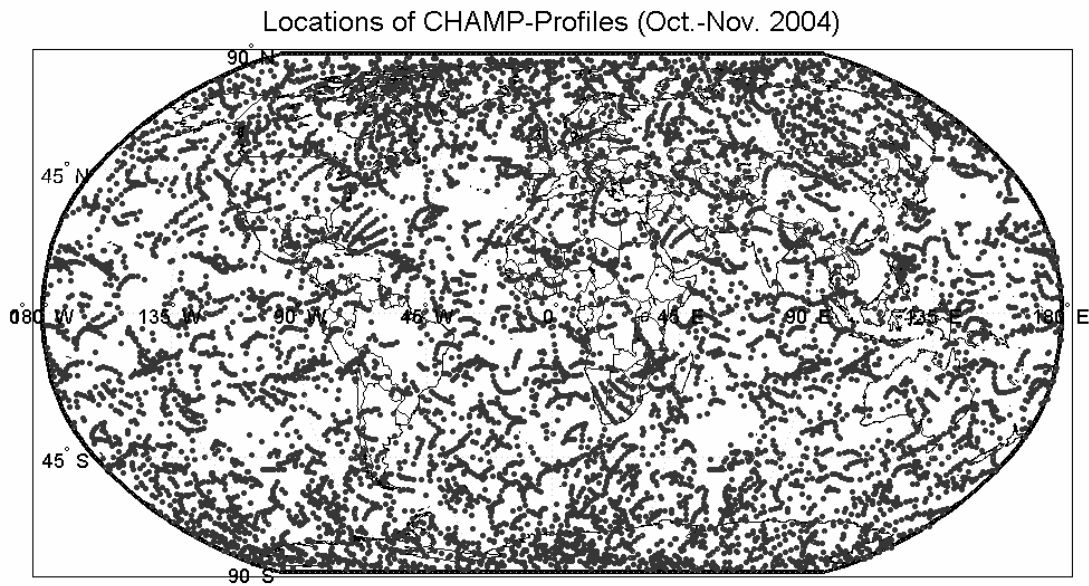


Fig. 3 Locations of retrieved radio occultation profiles during two months (October – November 2004).

As Fig. 3 shows, the measurements are uniformly distributed over the globe thus providing global information on the actual state of the ionosphere. Due to the nearly sun-synchronized orbit of CHAMP the local time sector is slowly shifting from day to day within a repetition period of 132 days (Fig. 4). Within this period the IRO measurements cover all local times. The local time constraint of IRO measurements is less restricted at high latitudes, indicated by the occurrence of measurements between the pronounced LT-bands in Fig. 4.

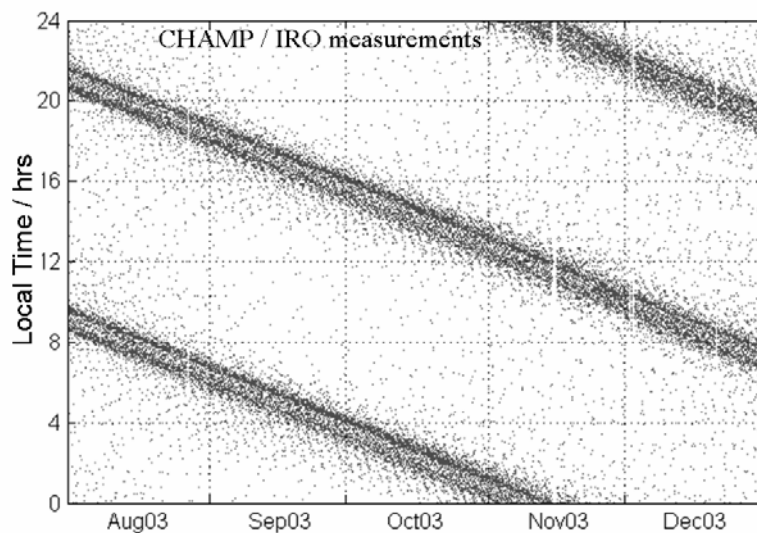


Fig. 4 Local time sector of ionospheric radio occultation measurements during months August – December 2003.

GPS Sounding of the Ionosphere Onboard CHAMP

A typical product sample obtained after automatic retrieval of IRO measurements onboard CHAMP at 48.93 °S; 128.76°E over the Indian Ocean around local noon is shown in Fig. 5. The corresponding data files can be downloaded via the DLR space weather service (<http://www.kn.nz.dlr.de/swaci/>). The quality label of the data products (0 - 9) provides a rough estimation of the reliability of the retrieval (0 marks the highest level). All analyses presented here were made with the quality label 0 or 1.

To estimate the quality of the derived electron density profiles, a number of validation efforts were undertaken including ionosonde data from the European vertical sounding stations Juliusruh (54.6°N; 13.4°E), Athens (38.0°N; 23.5°E), Rome (41.9°N; 12.5°E), Tortosa (40.8°N; 0.5°E) and Dourbes (50.1°N; 4.6°E) (Jakowski et al., 2005a).

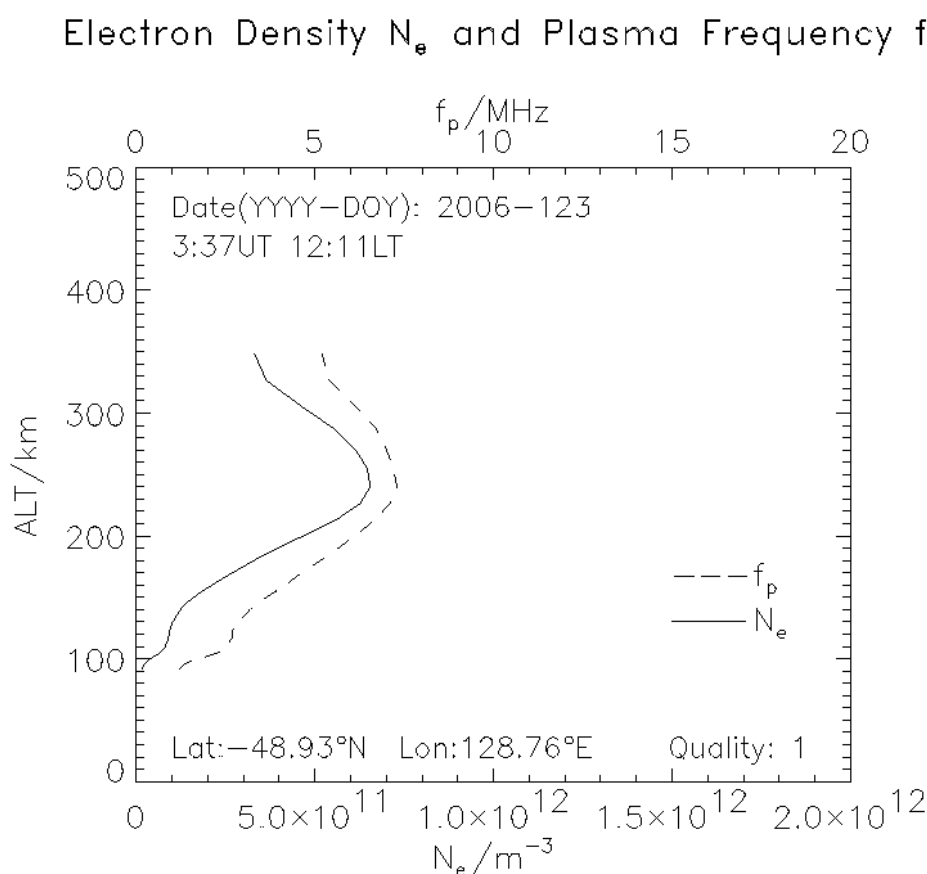


Fig. 5 Data product sample showing the IRO retrieval of the SWACI service.

To give an impression of the achieved accuracy, the validation with ionograms of the Juliusruh ionosonde station has indicated a bias of up to 0.5 MHz and a RMS error of about

1 MHz in the plasma frequency (Jakowski et al., 2004, 2005a). More validation work is required in particular for low latitude data.

Principally, it has to be stated that the IRO derived electron density profiles provide a unique measure describing the mean vertical electron density structure in comparably large areas with characteristic lengths of about 1000 km.

Topside ionosphere / plasmasphere measurements

Whereas the IRO retrieval technique can work with non-calibrated carrier phase derived TEC data (Jakowski et al. 2002), the topside assimilation reconstruction technique requires calibrated TEC data along the numerous radio links between the GPS satellites and the topside GPS antenna onboard CHAMP (Fig. 6). Depending on the relative CHAMP-GPS satellite constellation the data coverage changes permanently. Usually the data are not homogeneously distributed as Fig. 6 demonstrates. To overcome this problem, the reconstruction is made via data assimilation into a reliable background electron density model.

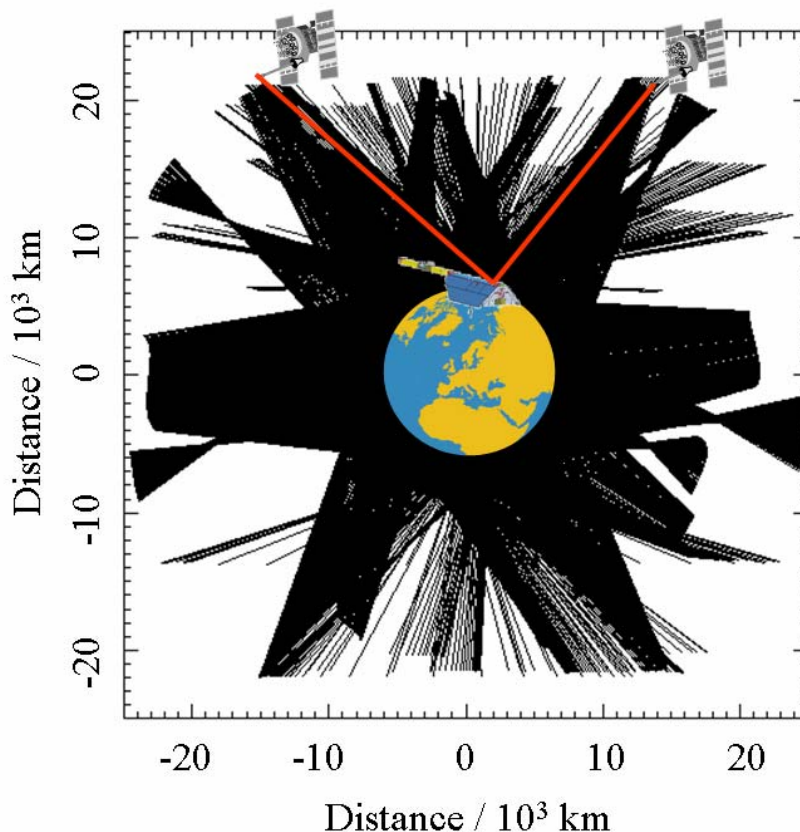


Fig. 6: Illustration of the topside radio link distribution in the CHAMP orbit plane to the visible GPS satellites during one satellite revolution.

Before starting the reconstruction, the corresponding satellite and receiver biases (eq. 1) have to be estimated properly before the assimilation procedure can be started.

During the pre-processing stage, detected outliers are being removed and cycle slips are corrected. For reconstructing the topside ionosphere/plasmasphere electron density the Parameterized Ionospheric Model PIM (Daniell et al., 1995) has been selected to act as the background model. After calibrating the differential phases, the absolute TEC data are assimilated into the PIM model by a method described by Heise et al. (2002). The assimilation results provide a 3D reconstruction of the electron density for each CHAMP revolution in the vicinity of the CHAMP orbit plane.

GPS Sounding of the Ionosphere Onboard CHAMP

Validation of the derived electron density distribution was made with in situ plasma density measurements of the Planar Langmuir Probe installed onboard CHAMP and incoherent scatter measurements at different sites.

As shown by Heise et al., 2002, the assimilation results have no significant bias and agree with the Langmuir Probe in situ data with a standard deviation of $2 \times 10^{11} \text{ m}^{-3}$. Reasonable agreement was also found with topside profiles deduced from incoherent scatter measurements.

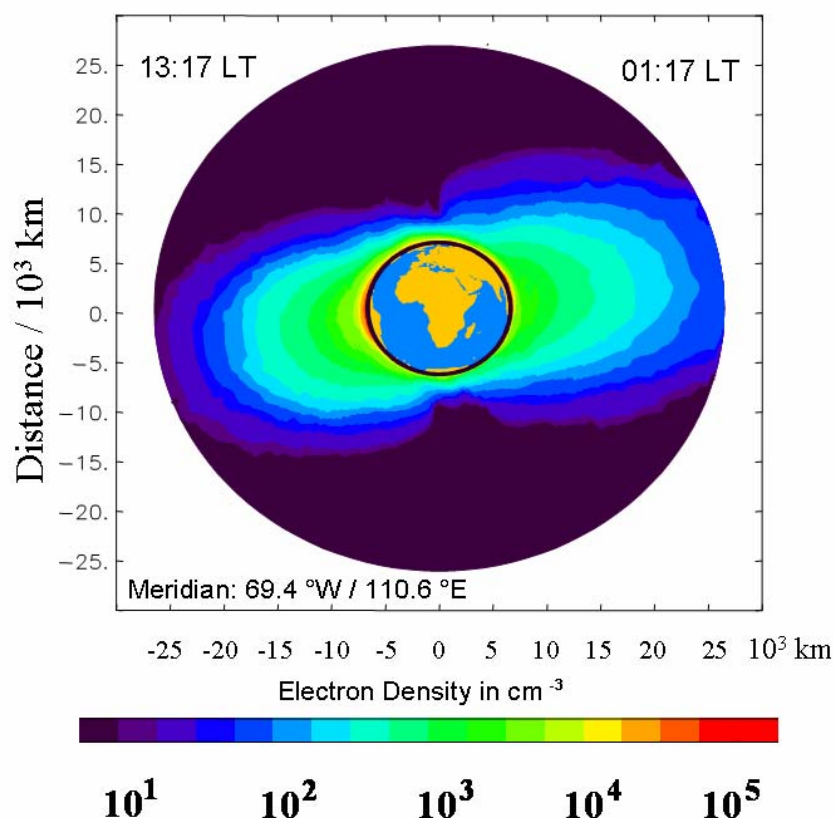


Fig. 7: Reconstruction of the electron density distribution of the topside ionosphere based on GPS data received onboard CHAMP. The reconstruction is based on medians obtained for 21:00 UT over 10 consecutive days in August 2005. Thus, the right side shows the ionosphere/plasmasphere shortly after midnight whereas the left side represents ionosphere shortly after noon.

As Fig. 7 demonstrates, the global view on the Earth's plasma environment enables the study of magnetospheric-ionospheric coupling processes. Here, the compression of the plasmasphere at the day-side and the enlarged extension of the plasmasphere at the night-side are clearly visible. Thus, it becomes evident that this type of space based GPS measurements can provide essential contributions to a space weather monitoring of the ionosphere.

3. OBSERVATION RESULTS AND DISCUSSION

Global data coverage and the huge amount of more than 200000 electron density profiles allow efficiently studying global large scale ionospheric processes. Because the first data were obtained in 2001 under

rather high solar activity conditions, the observations enable conclusions about the solar activity dependence of key ionospheric parameters.

Since the ionospheric ionization is essentially produced by solar radiation of wavelengths shorter than 130 nm, there is a strong solar cycle variation of the ionospheric peak density and other parameters related to the structure of the thermosphere/ionosphere. The solar activity control of the ionization level, well-known from TEC-measurements (e.g. Jakowski et al., 1991) is clearly visible in the level of the peak electron density derived from IRO measurements onboard CHAMP (Fig. 8).

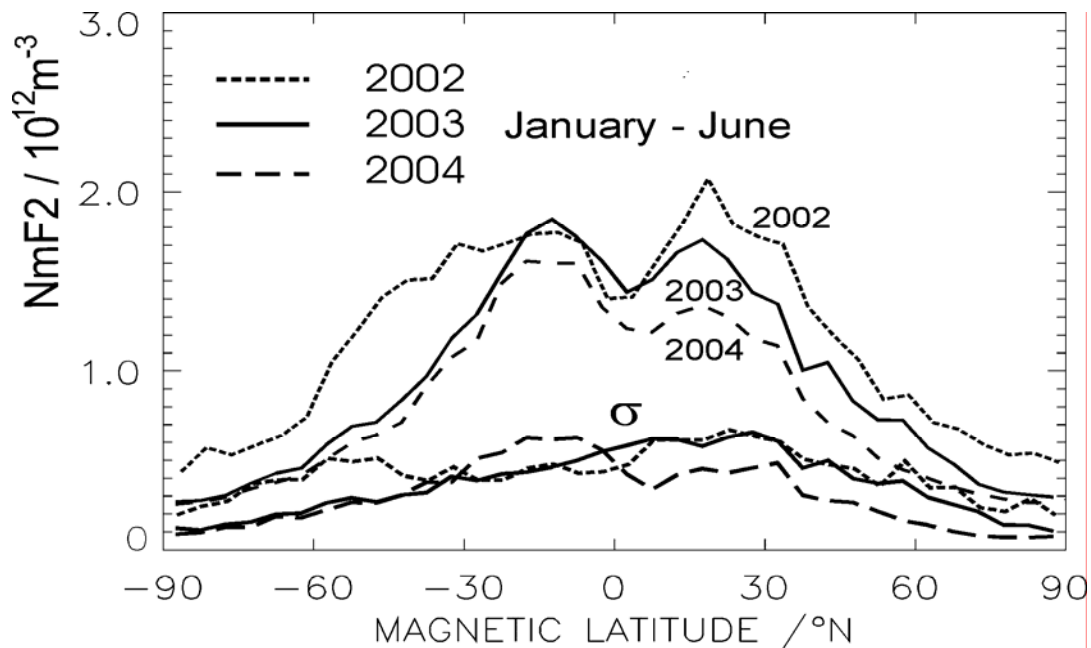


Fig. 8: Latitudinal dependency of the day-time (08:00-16:00 LT) F2 layer peak electron density NmF2 as seen in the CHAMP IRO data at three years 2002-2004 for all longitudes. The corresponding standard deviation σ is given at the bottom of the figure.

Fig. 8 shows that the F2 layer ionization reduces up to 30 % at daytime from 2002 to 2004, when the average solar radio flux F10.7 cm decreases from about 180 down to 107 by about 40%.

It is obvious that the solar radiation induced photo ionization of the Earth's atmosphere depends on the incidence angle of the irradiation. Thus, the general behavior of the latitudinal variation of the total ionization in Figs. 8 and 9 can easily be explained.

GPS Sounding of the Ionosphere Onboard CHAMP

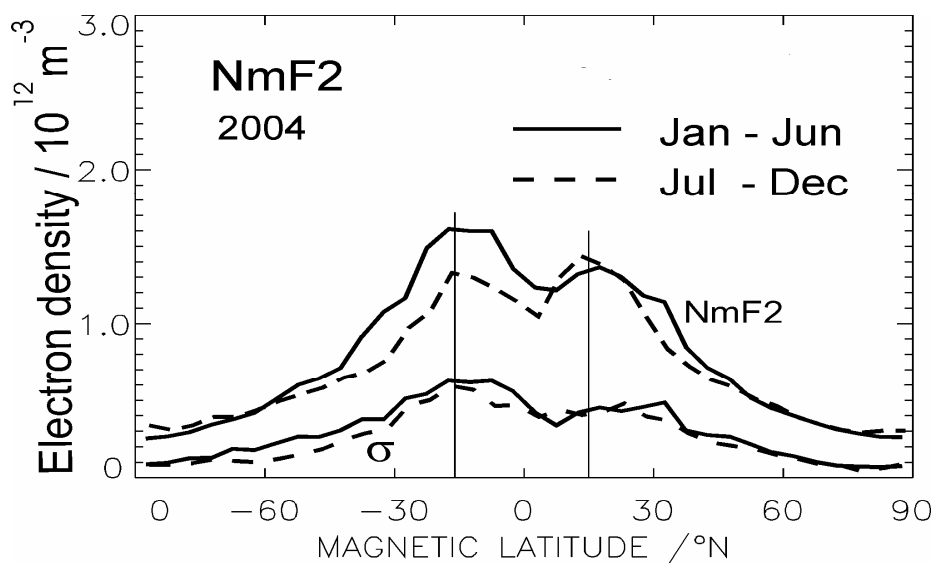


Fig. 9: Latitudinal dependence of the peak electron density NmF2 summarizing all measurements obtained in 2004 in the first and second half years at daytime (08:00 -16:00 LT) for all longitudes. The crest locations are marked at about $\pm 15^\circ$ magnetic latitude and the standard deviation σ is given at the bottom of the figure.

However, since the plasma motion is strongly influenced by magnetic and electric fields, the latitudinal dependence of the peak electron density demonstrates a more complex relationship with the solar activity. The well-known equatorial anomaly, characterized by enhanced ionization at about 15° at both sides of the geomagnetic equator is due to electric fields generated near the geomagnetic equator. The ionospheric plasma is uplifted at the geomagnetic equator via $\mathbf{E} \times \mathbf{B}$ drift and, while returning back, enhances the topside electron density at both sides of the geomagnetic equator, thus forming the so-called equatorial crest.

This can nicely be seen also in the latitudinal dependence of the day-time peak density height hmF2 in Fig. 9 where hmF2 reaches an absolute maximum of about 375 km near the geomagnetic equator. The northward shift of the maximum is due to seasonal effects because the northern summer hemisphere is stronger heated than the southern winter hemisphere. If high latitudes $> 65^\circ$ are excluded, the general behavior indicates positive linear trends directed to the warmer summer hemisphere for hmF2, the scale height H_s and the bottomside equivalent slab thickness τ_b as well. The following gradients may roughly be estimated:

The peak density height hmF2 and the scale height H_s grow up from winter to summer by about 140 m/deg whereas the bottomside slab thickness grows up in the average by a rate of approximately 410 m/deg.

Enhanced thermospheric heating during summer leads to an expansion of the thermospheric density distribution resulting in an increased peak density height and increased shape parameters slab thickness and topside scale height of the electron density profiles. This explanation is also confirmed when looking to the solar cycle dependence of these parameters showing biggest values at high solar activity conditions.

Compared with 2001, the peak density height decreases in average by about 75 km throughout all latitudes within in 2004.

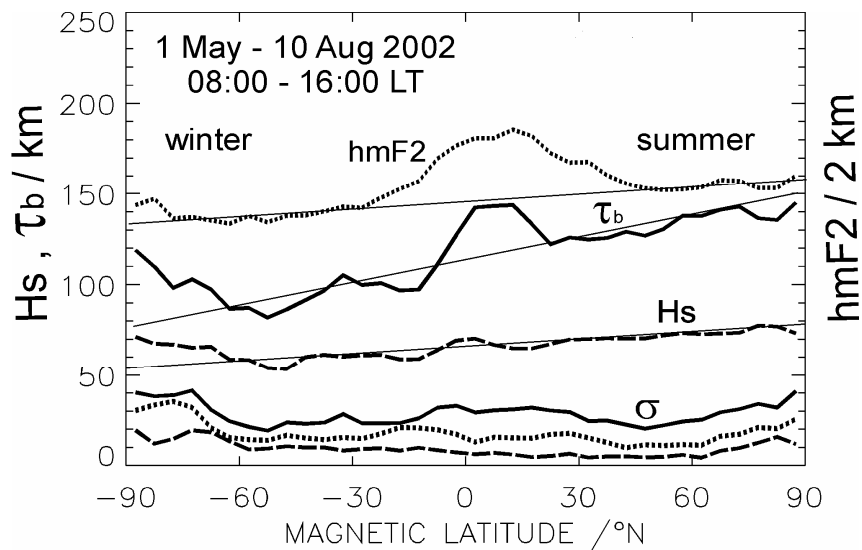


Fig. 10: Latitudinal dependence of the peak density height $hmF2$ and shape parameters such as bottomside slab thickness τ_b and the topside scale height H_s at 425 km height measured at daytime in Northern summer. The corresponding standard deviation σ of all three parameters is given at the bottom of the figure.

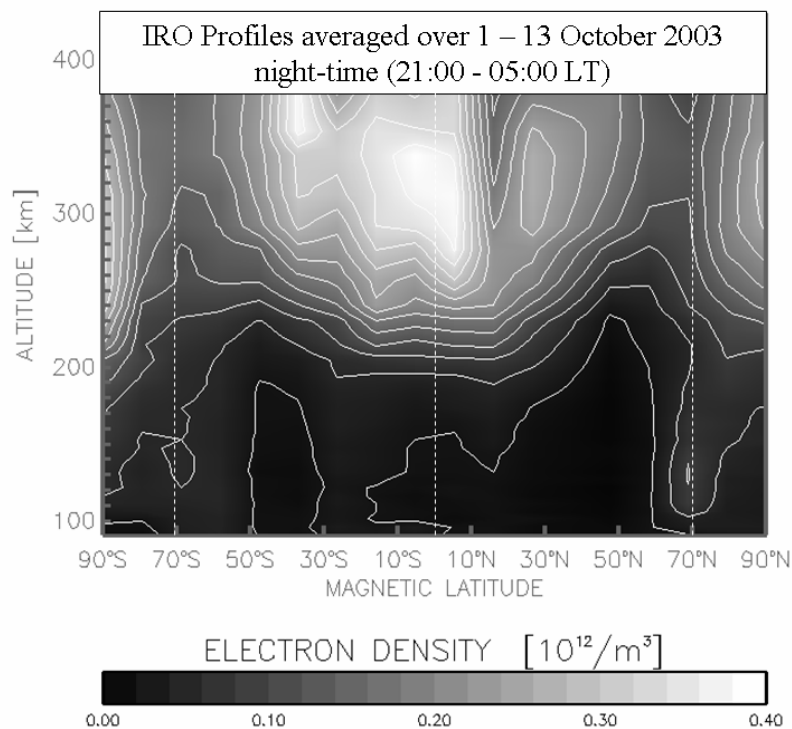


Fig. 11: Imaging of the average vertical ionization structure constructed from all IRO profiles obtained during the first 13 days in October 2003 between 21:00 and 05:00 LT. Marked are geomagnetic latitudes at 70° and at 0°.

GPS Sounding of the Ionosphere Onboard CHAMP

The observed high latitude enhancement of all three parameters at the winter hemisphere is probably due to thermospheric heating as a consequence of particle precipitation and the action of the auroral electrojet. During night-time the polar ionosphere is separated from the mid-latitude ionosphere by the so-called trough region which is characterized by very low electron densities. As Fig. 11 shows, IRO profiles reflect this phenomenon very well in their average plot.

Although the limb sounding mode principally leads to a strong averaging of the observational data, the IRO measurements document the existence of numerous irregularities in the ionosphere (Tsybulya and Jakowski, 2005).

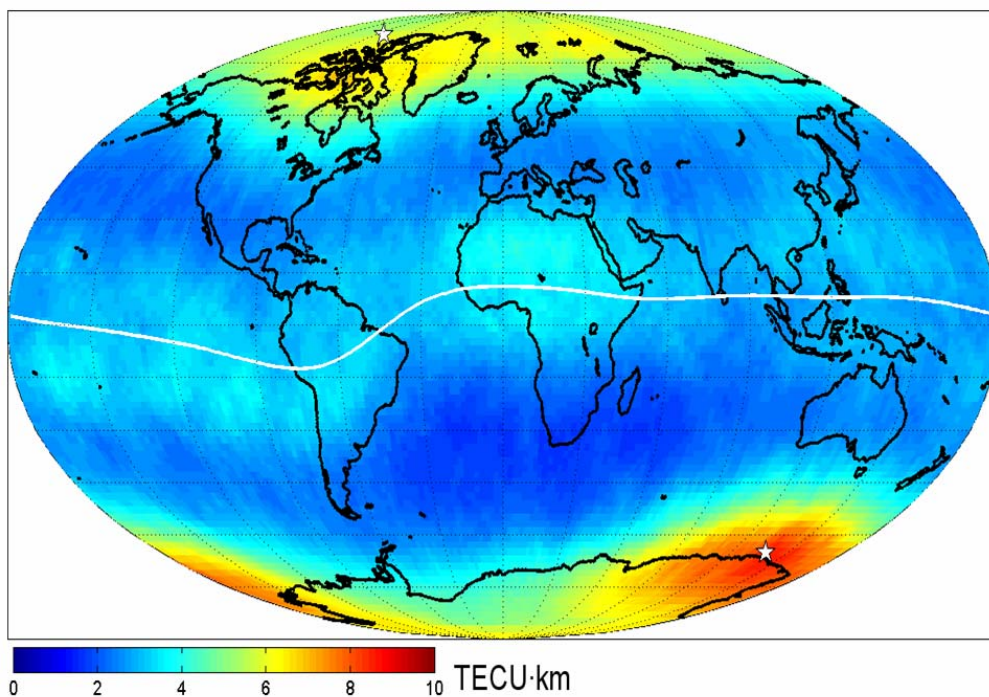


Fig. 12: Global distribution of the occurrence of ionospheric irregularities (characteristic scale length about 15-30 km) detected in IRO CHAMP data from March 2002 – February 2006. Geomagnetic poles are marked by asterisks, the magnetic equator by a full line.

As Fig. 12 shows, the perturbation level is clearly pronounced in the Polar Regions, in particular around the geomagnetic poles. Although upward propagation of atmospheric gravity waves cannot be excluded it is assumed that these perturbations are more likely related to thermospheric/ionospheric interaction processes (Tsybulya and Jakowski, 2005). Furthermore, the IRO data from CHAMP have clearly shown that the TID activity is more pronounced in winter nights.

Severe space weather events modify the magnetosphere/ionosphere and thermosphere systems at quite different spatial and temporal scales. The GNSS measurements onboard CHAMP are well suited to monitor in particular large scale effects in time and space. Thus, storm induced changes of the ionospheric plasma developing at characteristic times of a few days and scale lengths of up to several thousand kilometers can be monitored effectively by analyzing the topside electron density reconstructions (e.g. Jakowski et al., 2005b).

Ionosphere/plasmasphere electron density distribution 8 November 2004

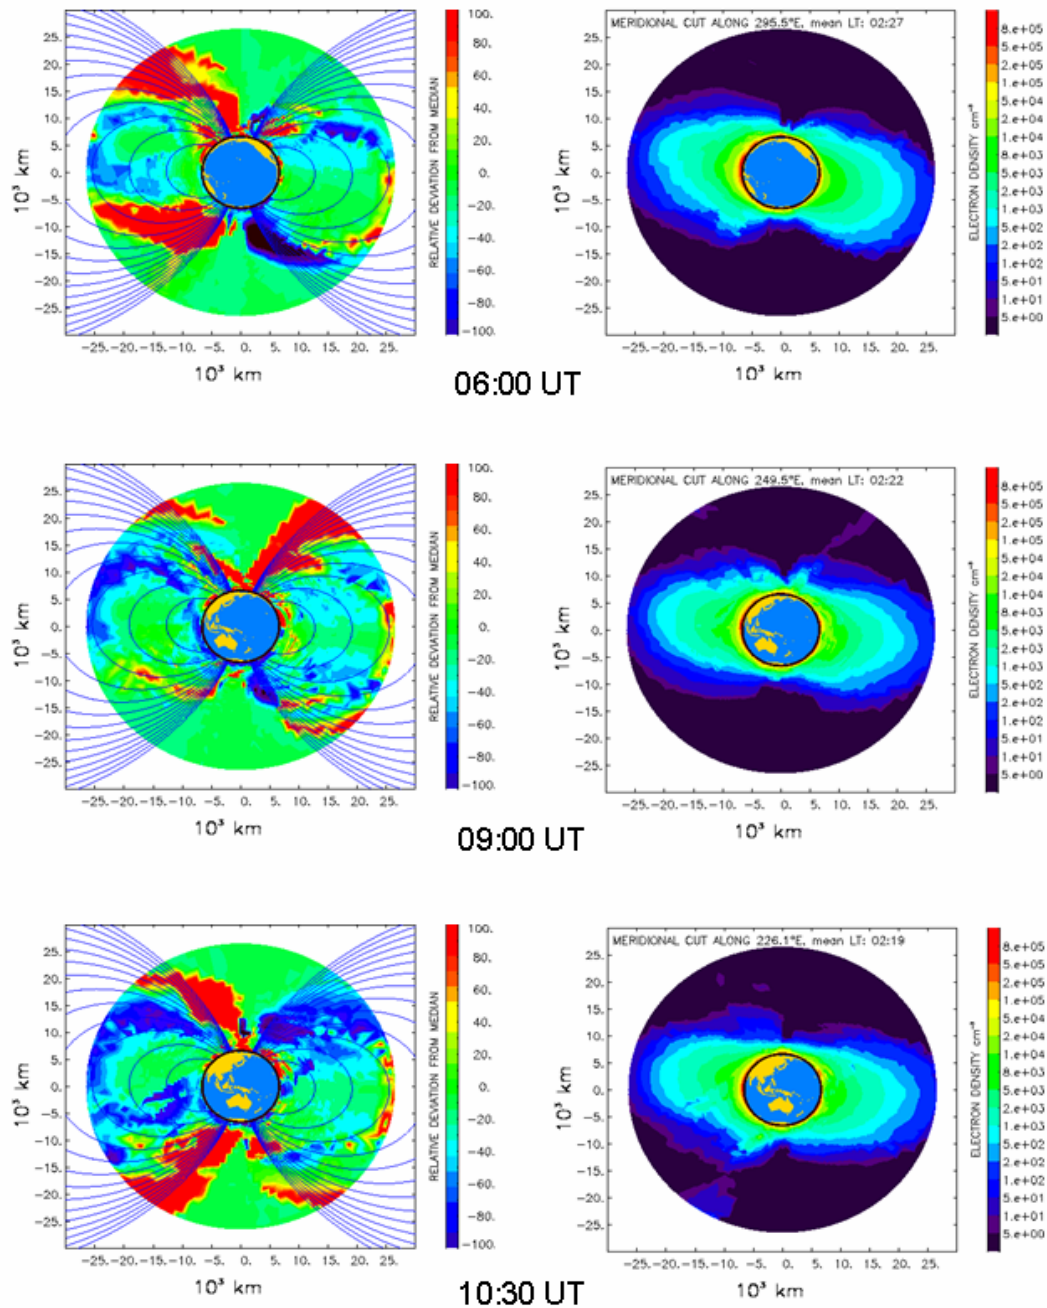


Fig. 13: Comparison of subsequent reconstructions of the 3D electron density structure during the ionospheric storm on 8 November 2004 in comparison with percentage deviations from corresponding medians ($\Delta n_e / n_e \cdot 100\%$).

GPS Sounding of the Ionosphere Onboard CHAMP

During the storm on 7/8 November 2004 the electron density reconstructions in the CHAMP orbit plane indicate strong irregular behavior in particular close to the plasma pause region. The time period covered by the plots in Fig. 13 corresponds with the time of D_{st} minimum value at 08:00 UT on November 8, 2004. Strong enhancements of the electron density are seen at high latitudes indicating plasma upflow in the auroral ionosphere at both hemispheres. Whereas such a plasma flow is more pronounced at the day-time polar zones at 6:00 UT and 10:30 UT, the outflow is focused at the northern pole around 9:00 UT. We are aware of the fact that the reconstructions are derived from a limited TEC data base and simplified assumptions. Nevertheless, the analysis of several storms indicates strong enhancements and also suppressions of the electron density. To avoid misinterpretation, we have counted only strong perturbation induced electron density deviations which exceed corresponding median values by 50% or are less than half of the median. The result, obtained for the storm on 20/21 November 2003, is shown in Fig. 14.

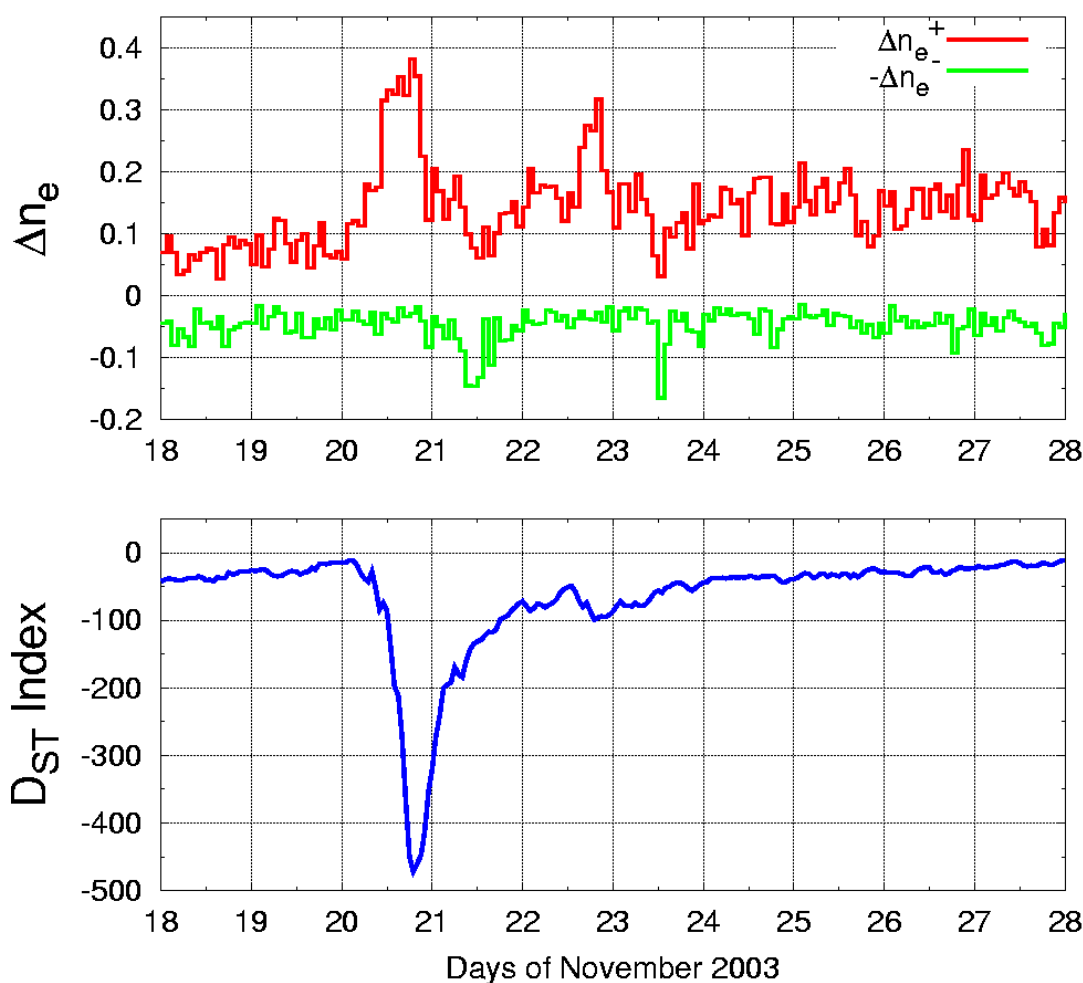


Fig. 14: Comparison of positive and negative deviation counts of the electron density values that exceed a certain threshold value ($|\Delta n_e| > 50\%$) from corresponding means with the geomagnetic D_{st} index (<http://swdcdb.kugi.kyoto-u.ac.jp/dstdir/>).

It is interesting to see that the topside ionosphere/plasmasphere considerably blows up in the growing phase of the storm whereas it reduces in the recovery phase. This behavior even repeats during a sub-storm starting around 12 UT on 22 November confirming the conclusion. Although we are aware of some

remaining constraints of the reconstruction technique, e.g. due to incomplete data coverage, we believe that the basic observation results are correct.

Conclusions on the principal behavior of the plasmaspheric dynamics during geomagnetic storms are more reliable if several storms are superposed. Corresponding studies are planned.

4. SUMMARY AND CONCLUSIONS

The large data base of IRO-derived electron density profiles and reconstructions of the topside ionosphere/plasmasphere electron density distribution is a valuable data source for the international scientific community. The obtained space based GPS measurements contribute to a better understanding of solar-terrestrial relationships, and are valuable for developing and improving global ionospheric models. Due to the near-real-time processing of the satellite data the CHAMP satellite provides operational space weather information. To make this information available as fast as possible, DLR has established a permanent space weather service under <http://www.kn.nz.dlr.de/swaci> which provides both ground as well as space based GPS measurements and corresponding ionospheric data products.

To fulfill the user requirements for a space weather service, robust and sufficiently accurate retrieval techniques are needed. The CHAMP automatic processing system is able to provide ionospheric data products within 3 hours after scientific data dump in Neustrelitz.

Validation of IRO data has revealed that the F2 layer peak electron density f_0F_2 and the corresponding height h_mF_2 agree quite well within 20% deviation.

The standard deviation of vertical sounding derived electron density profiles is in the order of 1 MHz plasma frequency throughout the entire IRO profile.

Although the good agreement between IRO measurement data and other types of independent measurements has proved the quality of the IRO retrieval technique, the validation process is planned to be continued. Further validation is also required for the topside reconstruction data which we have shown to image large scale structures of severe ionospheric perturbations.

To enhance the resolution of 3D reconstruction of the global ionospheric electron density distribution, space based GNSS sounding should be combined with ground based GNSS measurements.

The launch of new occultation satellites such as COSMIC, SWARM or TerraSAR-X offers great promise for modeling and monitoring the electron concentration in the near-Earth-space for scientific studies and continuous space weather monitoring.

Acknowledgements


This work has been financially supported by the German State Government of Mecklenburg-Vorpommern under Grant V230-630-08-TIFA-334. The authors thank K. Tsybulya for his help in preparing the paper. The authors are grateful to the international CHAMP team for maintaining the operation of the CHAMP satellite since 2000.

References

- [1] Daniell, R.E, Brown, L.D., Anderson, D.N., Fox, M.W., Doherty, P.H., Decker, D.T., Sojka, J.J., Schunk, R. W., Parameterized ionospheric model: a global ionospheric parameterization based on first principles models. Radio Sci., 30, 1499-1510, 1995.

GPS Sounding of the Ionosphere Onboard CHAMP

- [2] Garcia-Fernandez, M., M. Hernandez-Pajares, J.M. Juan, J. Sanz, Improvement of ionospheric electron density estimation with GPSMET occultations using Abel inversion and VTEC information, *J. Geophys. Res.*, 108(A9), 1338, doi: 10.1029/2003JA009952, 2003
- [3] Hajj, G.A., Romans, L.J., Ionospheric electron density profiles obtained with the Global Positioning System: Results from the GPS/MET experiment, *Radio Sci.*, 33(1), 175-190, 1998.
- [4] Heise, S., N. Jakowski, A. Wehrenpfennig, Ch. Reigber, H. Luehr, Sounding of the Topside Ionosphere/Plasmasphere Based on GPS Measurements from CHAMP: Initial Results, *Geophysical Research Letters*, 29, No. 14, 10.1029/2002GL014738, 2002
- [5] Jakowski N., B. Fichtelmann, and A. Jungstand, Solar activity control of ionospheric and thermospheric processes, *J. Atmos. Terr. Phys.*, 53, 1125-1130, 1991
- [6] Jakowski, N., Wehrenpfennig, A., Heise, S., Reigber, C., Luehr, H., Grunwaldt, L., Meehan, T., GPS radio occultation measurements of the ionosphere from CHAMP: Early results. *Geophys. Res. Lett.* 29(10), doi: 10.1029/2001GL014364, 2002.
- [7] Jakowski, N., Leitinger, R., Angling, M., Radio Occultation technique for probing the ionosphere, *Annals of Geophysics*, 47(2/3), 1049-1066, 2004.
- [8] Jakowski, N., Tsybulya, K., Mielich, J., Belehaki, A., Altadill, D., Jodogne, J.C., Zolesi, B., Validation of GPS Ionospheric Radio Occultation results onboard CHAMP by Vertical Sounding Observations in Europe, in: Ch. Reigber, H. Luehr, P. Schwintzer, J. Wickert (Eds.): *Earth Observation with CHAMP, Results from Three Years in Orbit*, Springer, Berlin, 447 - 452, 2005a.
- [9] Jakowski, N., Wilken, V., Schlueter, S., Stankov, S.M., Heise, S. Ionospheric space weather effects monitored by simultaneous ground and space based GNSS signals, *JASTP*, 67, 1074–1084, 2005b.
- [10] Reigber, C., Luehr, H., Schwintzer, P., CHAMP mission status and perspectives, *EOS Transactions - American Geophysical Union*, 81 (Suppl. to No.48), F307, 2000
- [11] Schreiner, W. S., S.V. Sokolovskiy, C. Rocken, Analysis and validation of GPS/MET radio occultation data in the ionosphere, *Radio Sci.*, 34, 949-966, 1999.
- [12] Stankov, S.M., Jakowski, N., Topside ionospheric scale height analysis and modeling based on radio occultation measurements, *J. Atmos. Solar-Terr. Phys.* 68, 134-162, 2006
- [13] Tsybulya, K. and Jakowski, N., Medium- and small-scale ionospheric irregularities detected by GPS radio occultation method, *Geophys. Res. Lett.*, 32, L09103, doi:10.1029/2005GL022420, 2005
- [14] Wehrenpfennig, A., Jakowski, N., Wickert, J., A dynamically configurable system for operational processing of Space Weather Data. *Physics and Chemistry of the Earth (C)*, 26(8), 601-604, 2001.

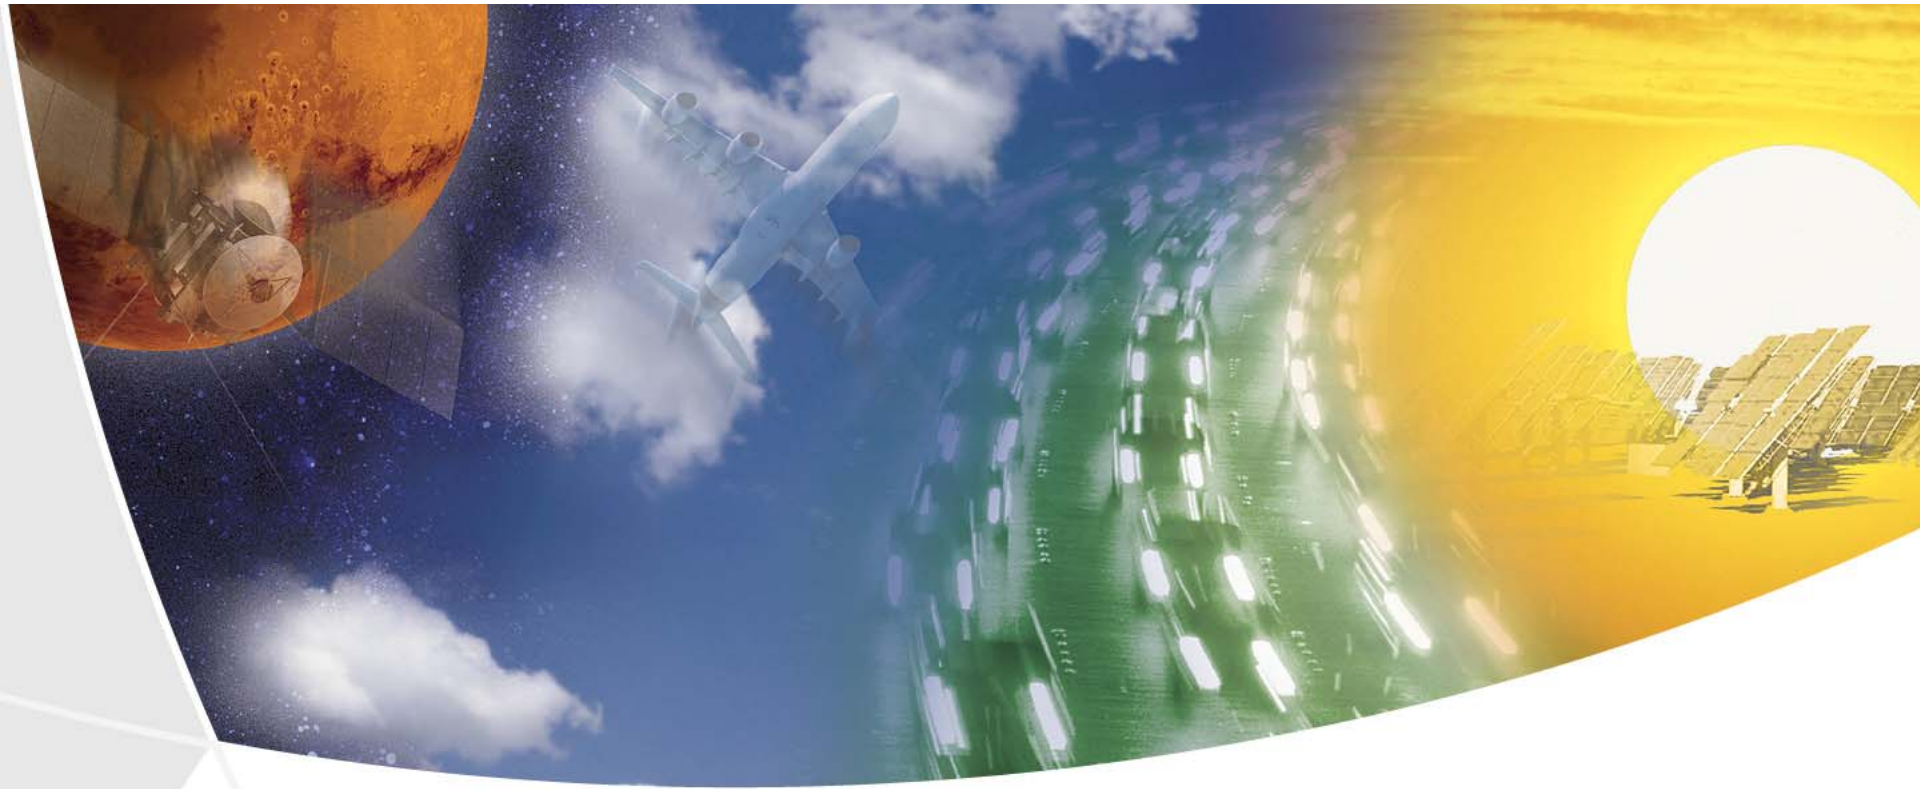

GPS Sounding of the Ionosphere Onboard CHAMP

N. Jakowski, C. Mayer, V. Wilken


German Aerospace Center (DLR),
Institute of Communications and Navigation, Neustrelitz, Germany



Outline

- **The CHAMP Satellite**
- **Ionospheric Radio Occultation (IRO) Measurements**
 - Retrieval technique and validation
 - Observations
- **Electron Density Topside Reconstruction**
 - Reconstruction technique and validation
 - Observations
- **Summary & Conclusions**

CHAMP Satellite

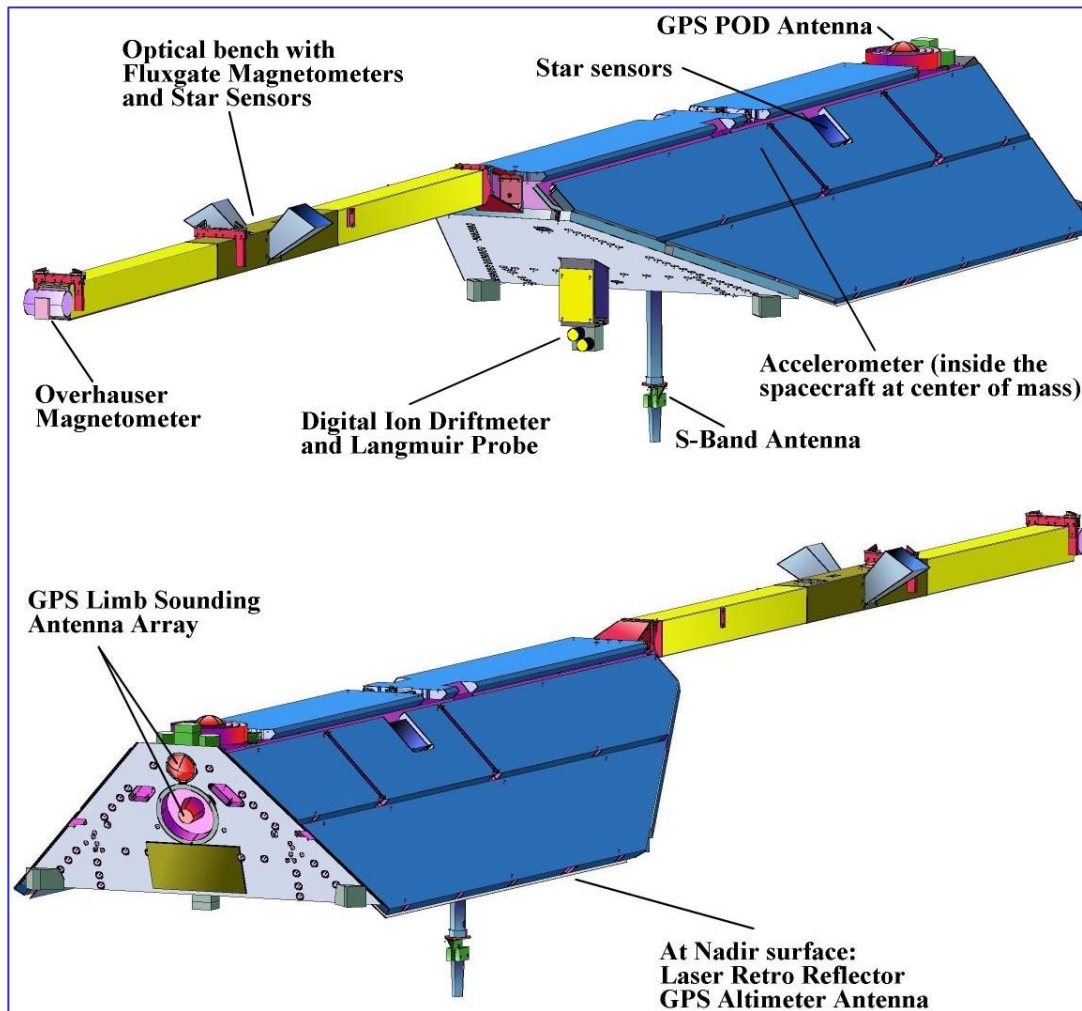


OBJECTIVES

Gravity and magnetic field,
atmosphere and ionosphere
GPS sounding

- Launch
15 July 2000
- Circular polar Orbit
 $i = 87^\circ$
Apogee: 440 – 360 km
Perigee: 410 – 340 km
- Science data reception in
DLR Neustrelitz

GPS ionosphere sounding at DLR Neustrelitz

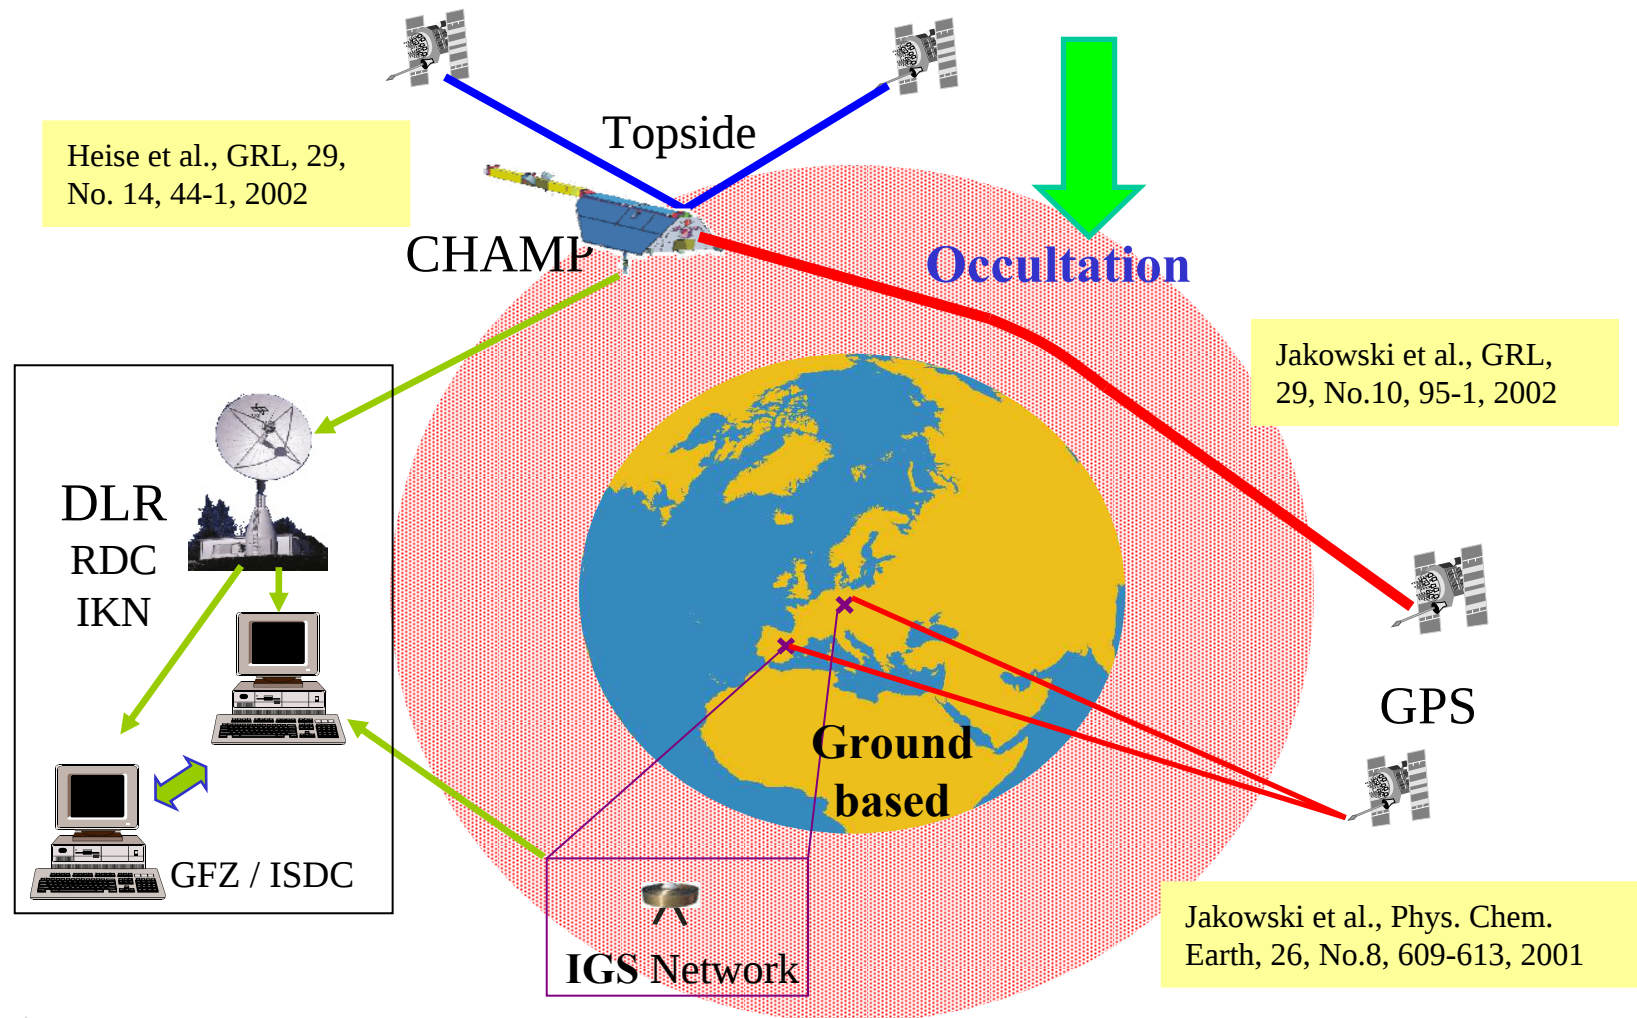



Observation Equations

The space based GPS ionosphere sounding utilizes measurements of L_1/L_2 carrier phases and pseudoranges P_1/P_2


$$P = \rho + c(dt - dT) + d_I + d_{MP} + dq + dQ + \varepsilon_p$$

$$L = \rho + c(dt - dT) - d_I + d_{MP} + dq + dQ + \lambda N + \varepsilon_L$$

with

ρ	true range between GPS satellite and receiver along ray path s
c	velocity of light
dt	satellite clock error
dT	receiver clock error
d_I	ionospheric phase delay along s
d_{MP}	error due to multipath
dq	instrumental bias of the satellite
dQ	instrumental bias of the receiver
λ	wave length of radiowave
N	phase ambiguity number (integer)
ε	residual error

GPS Ionospheric Radio Occultation - IRO

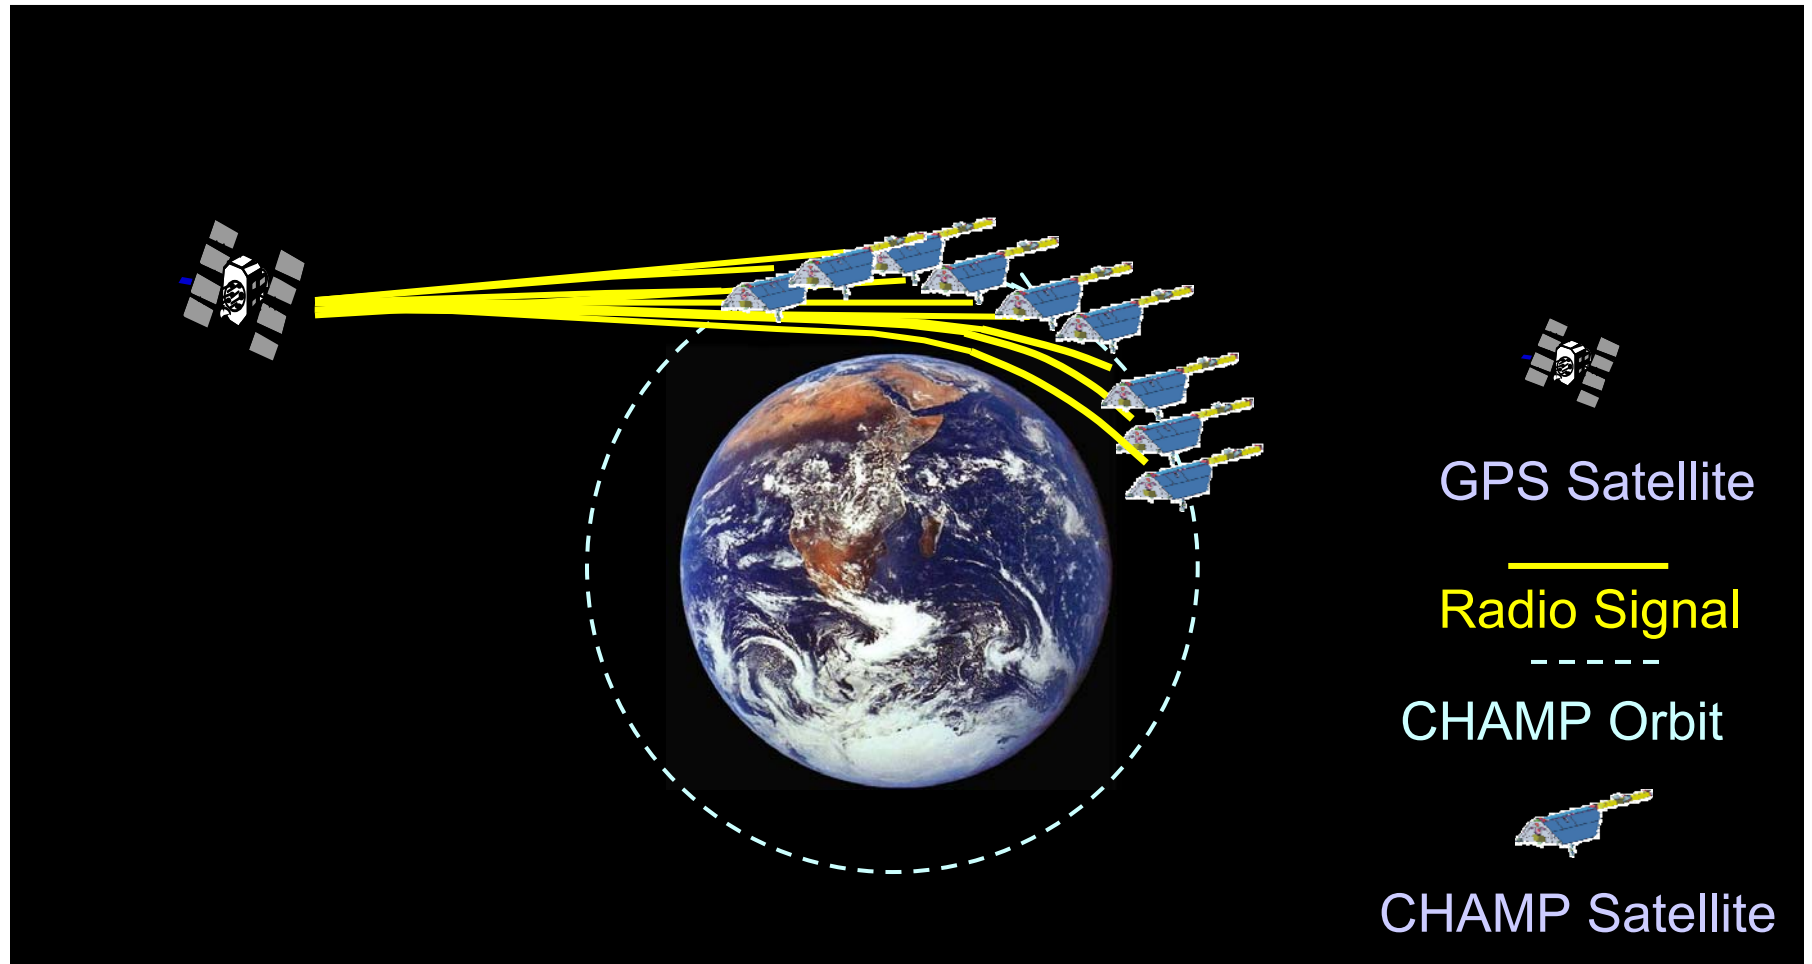

CHAMP: Launch 15 July 2000, $i = 87^\circ$, $h = 450 \text{ km} \rightarrow 340 \text{ km}$




Deutsches Zentrum
für Luft- und Raumfahrt e.V.
in der Helmholtz-Gemeinschaft

IST056, Characterising the Ionosphere
12-16 June 2006, Fairbanks, Alaska



Institute of Communications and Navigation

Page 6

Retrieval of electron density profiles

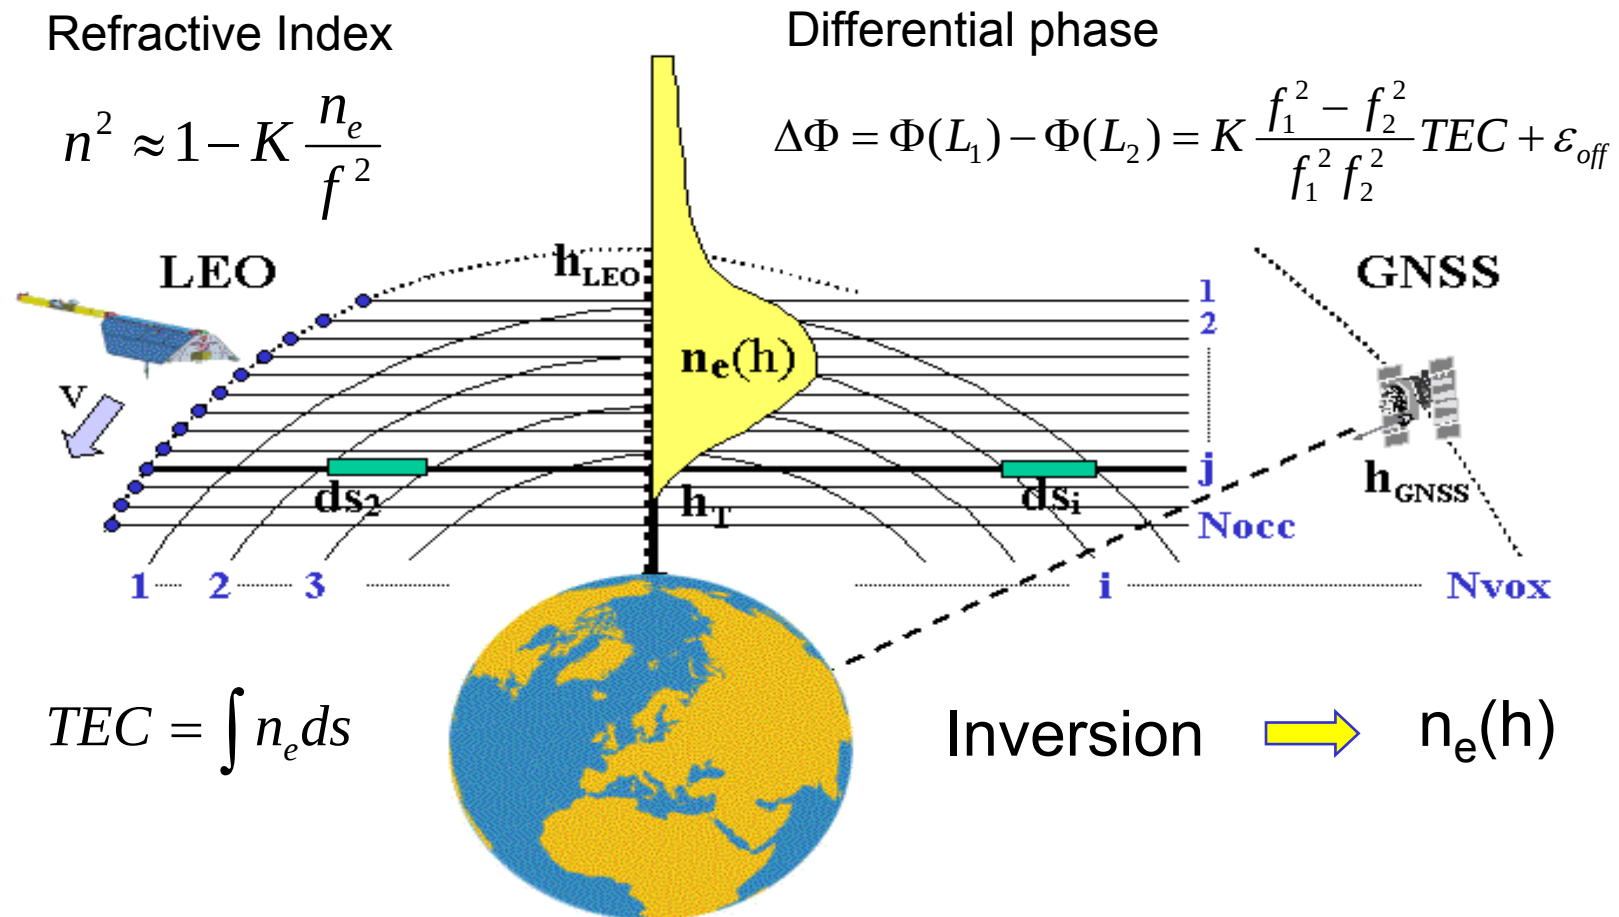


Ionospheric profiling since 11 April 2001

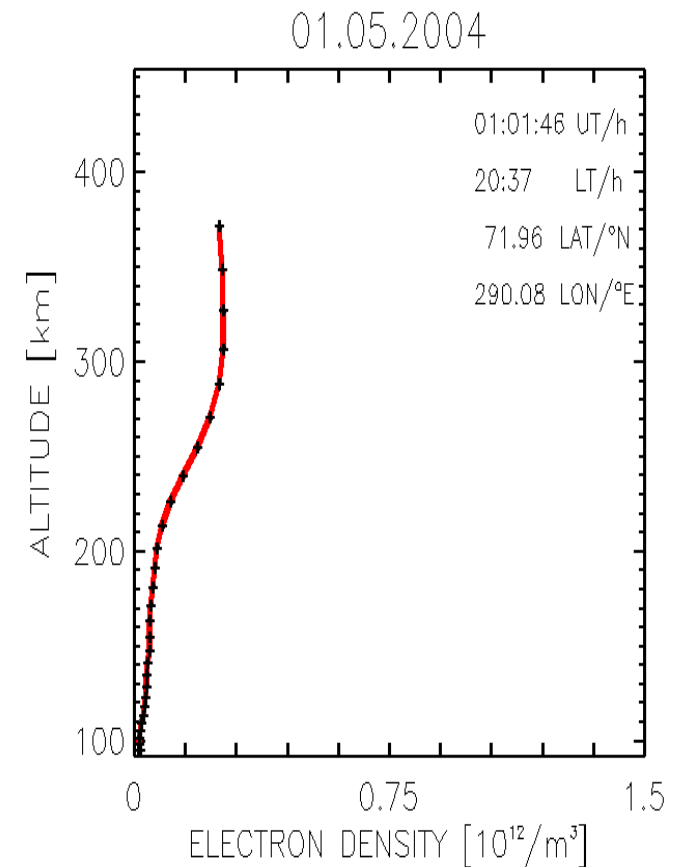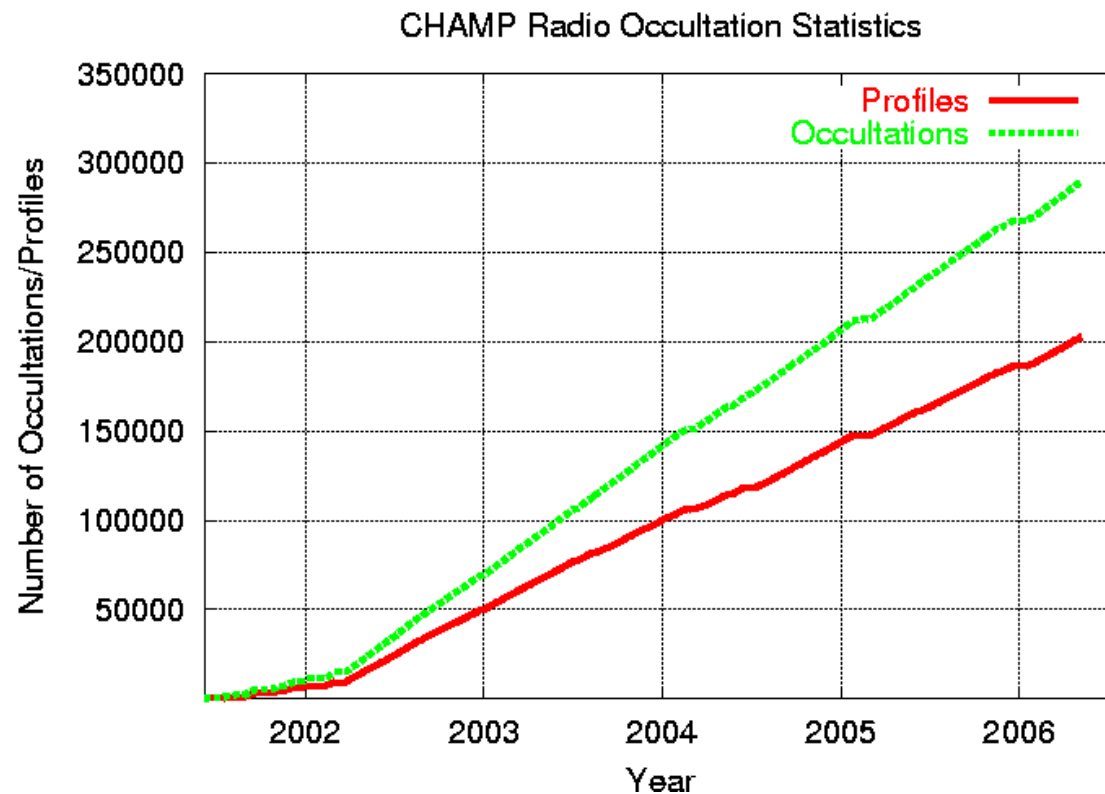


- Automatic retrieval of electron density profiles (> 70% successfully)

IRO measurements - Data coverage

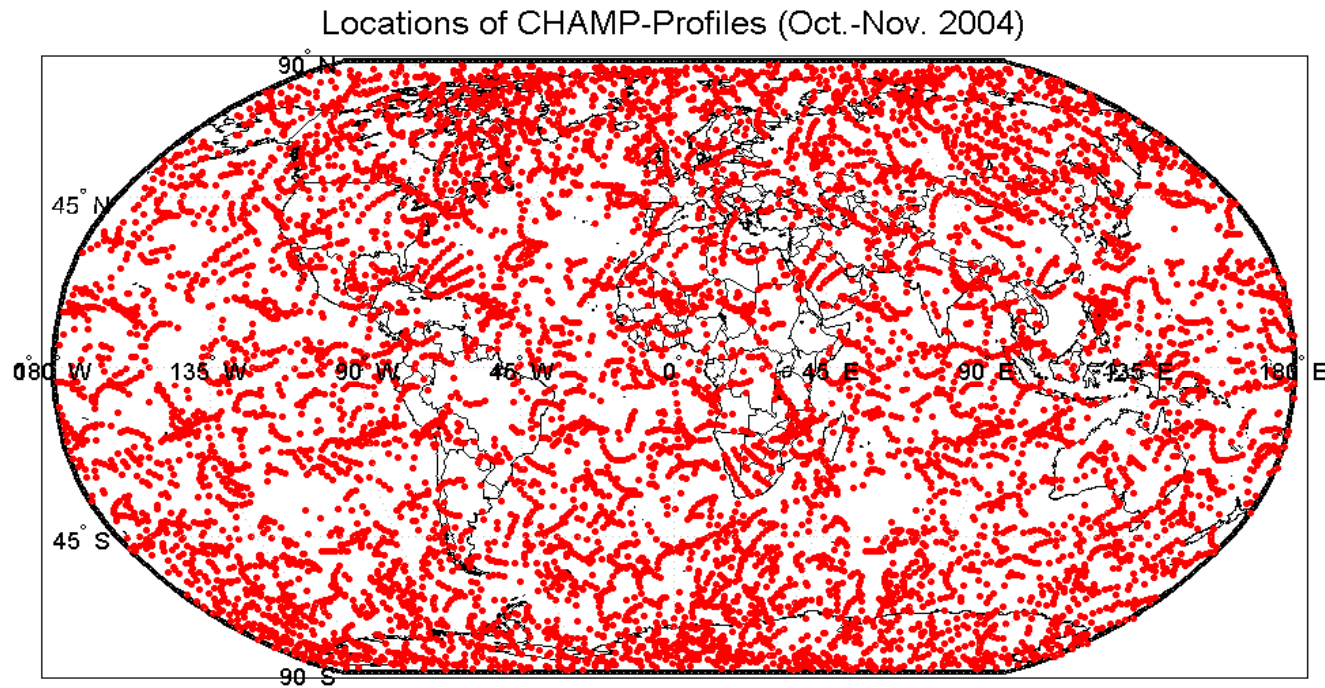



- Global IRO data coverage during 2 months, including about 8700 electron density profiles

Local Time sectors of CHAMP IRO measurements

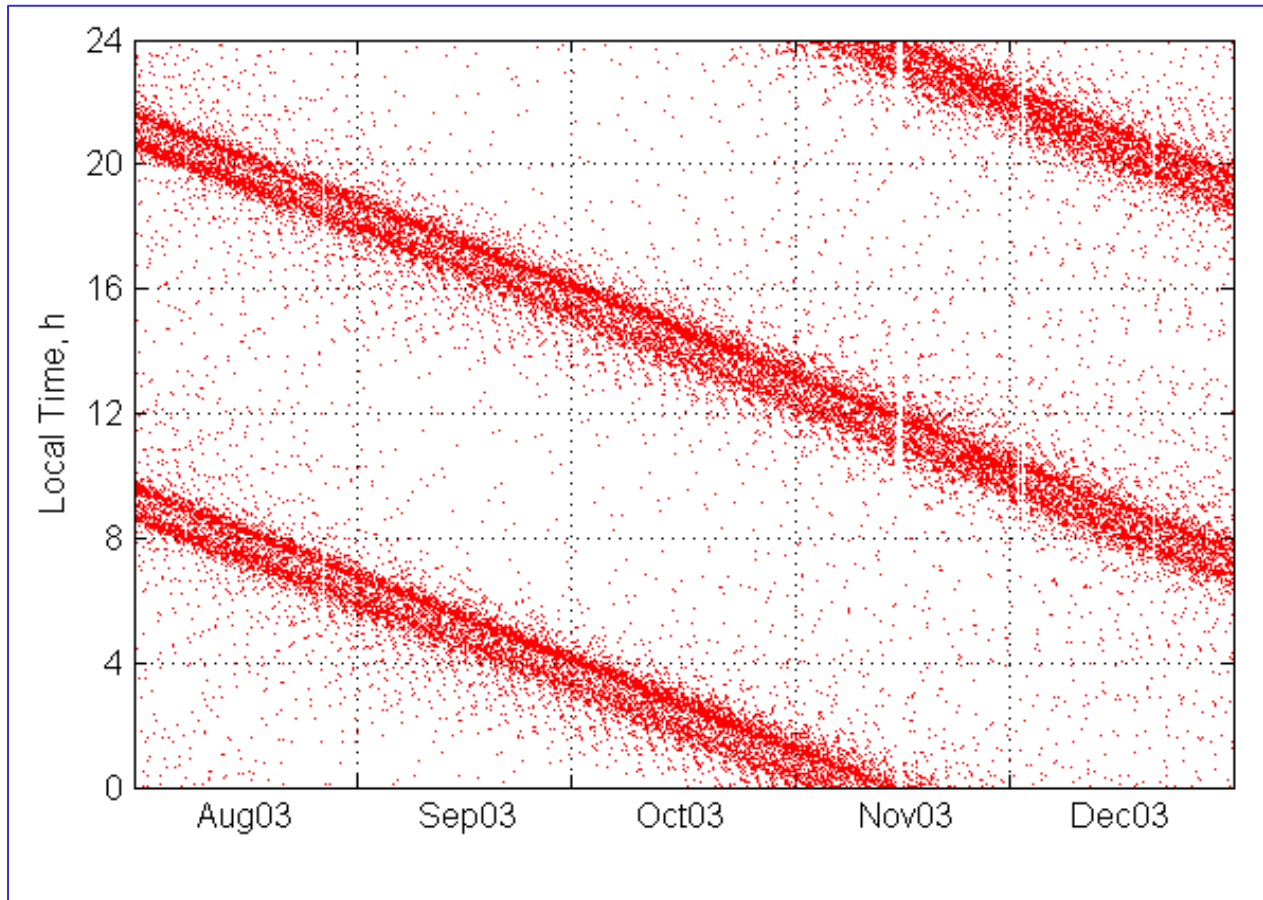


- Full 12 hours cycle within 132 days
- At high latitudes the local time constraint is less sharp

Comparison of IRO retrievals with EISCAT

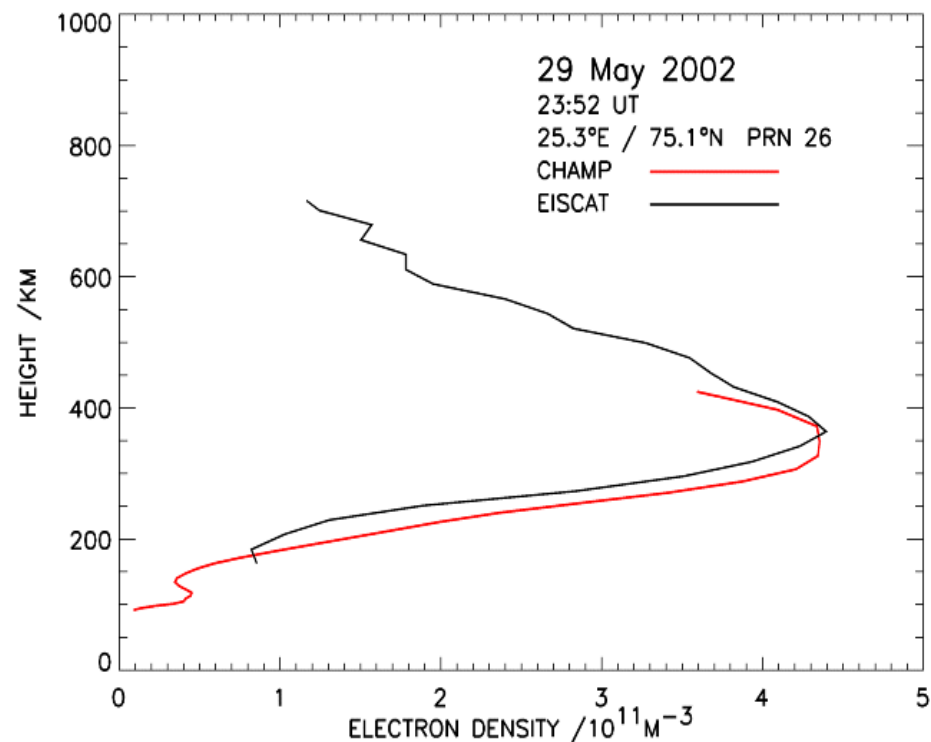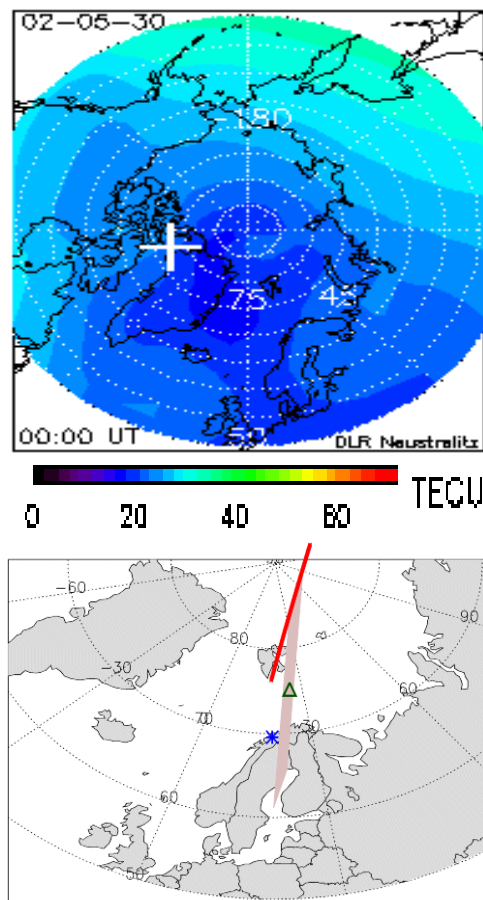

- Comparison with EISCAT data shows reasonable agreement
- Residual errors may be due to the fact that the high latitude ionosphere is often irregular

Validation of IRO derived vertical electron density profiles

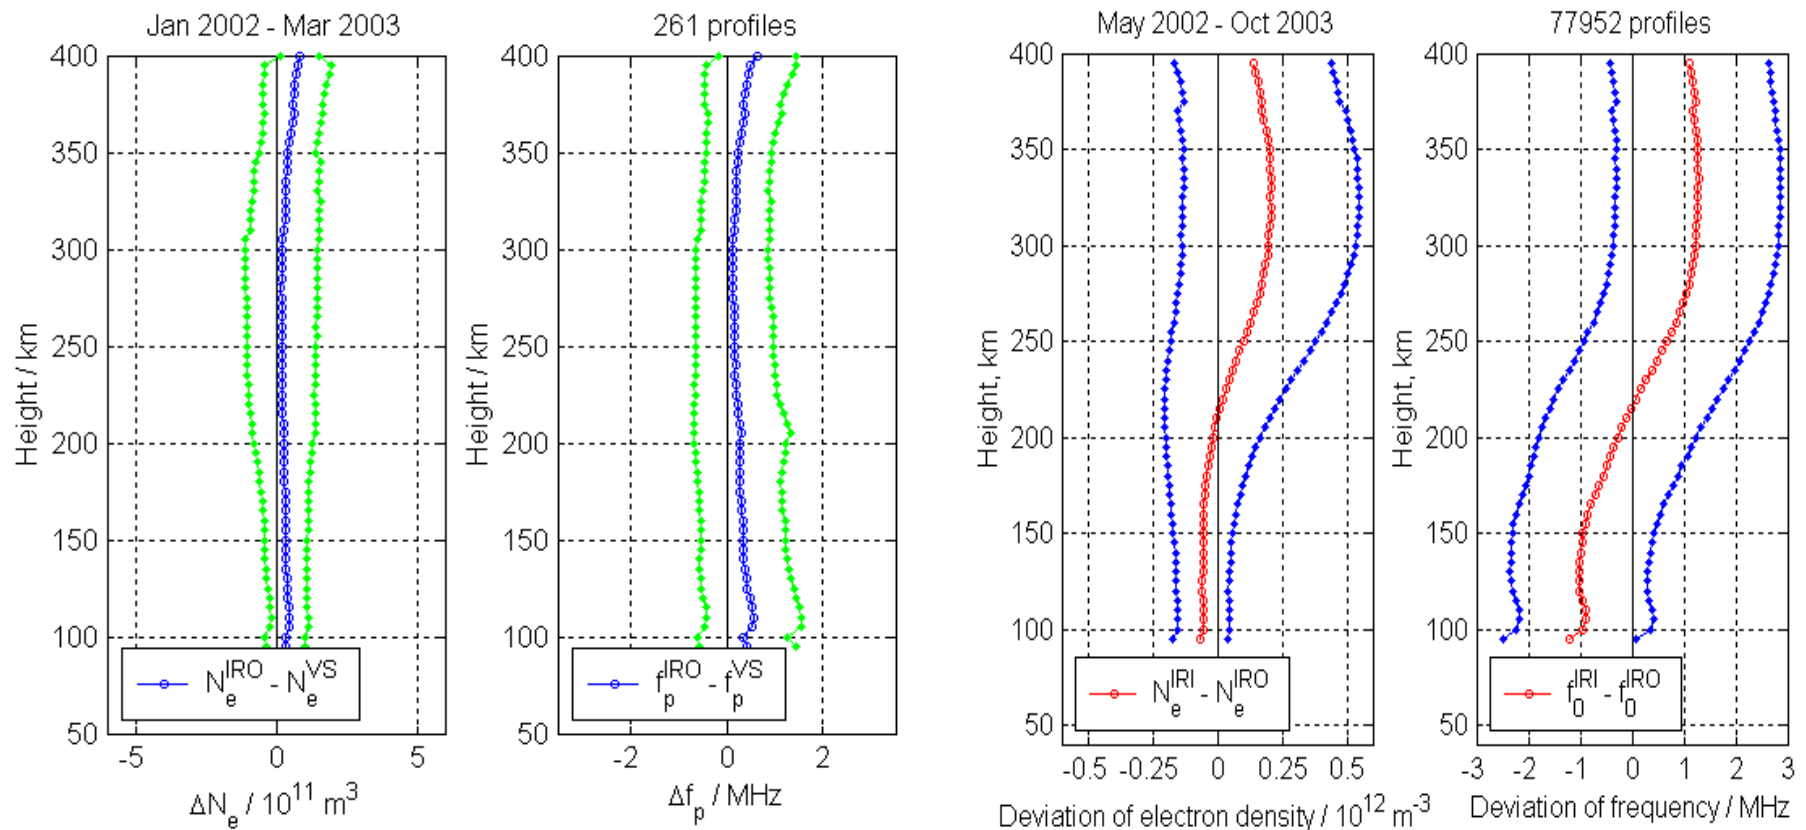


Validation of IRO with ionosonde data

Comparison of IRI 2001 with IRO data

Jakowski et al., in: Earth Observation with CHAMP, Results from Three Years in Orbit, Springer, Berlin, 447 - 452, 2005a

Jakowski, N., Tsybulya, K., Comparison of ionospheric radio occultation CHAMP data with IRI 2001, Adv. in Radio Science, 2, 275 - 279, 2004

Latitudinal dependency of NmF2 peak density

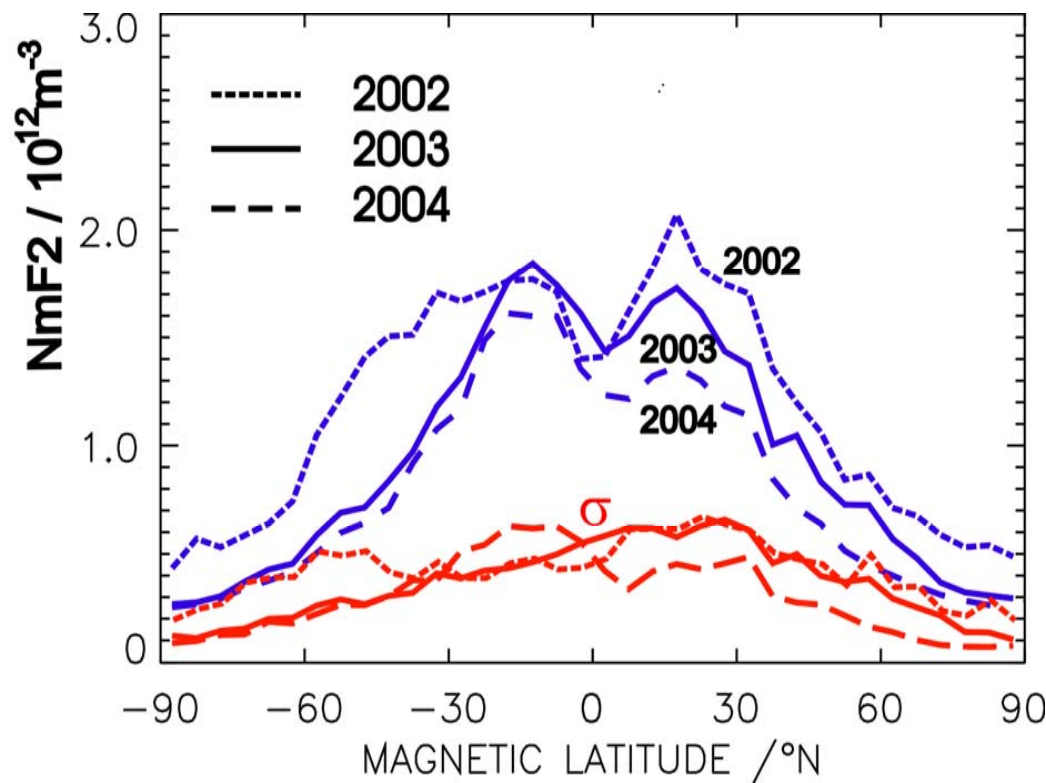

Latitudinal variation of day-time NmF2 (08-16 LT) from January – June in years 2002 -2004,


The corresponding **standard deviations** σ are plotted at the bottom of the figure.

The NmF2 peak density shows clearly the **crest** at both hemispheres and furthermore, the close relationship to the solar activity level which decreases from 2002-2004.

Density ratio $\text{NmF2}_{\text{crest}} / \text{NmF2}_{\text{pole}} \leq 6$



Latitudinal dependency of hmF2 and shape parameters τ_b and H_s

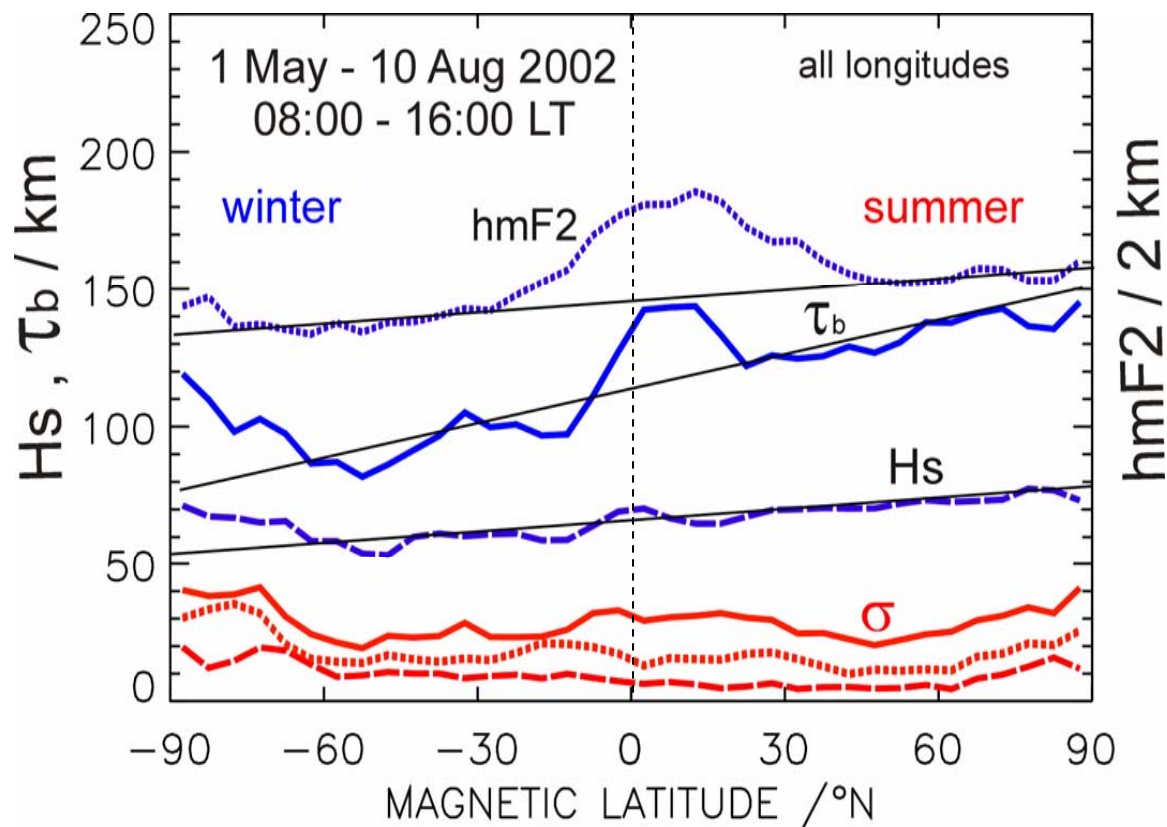


Latitudinal variation of the peak density height hmF2 and shape parameters bottomside slab thickness τ_b and the topside scale height H_s at 425 km height from 1 May -10 August 2002

The corresponding **standard deviations** σ are plotted at the bottom of the figure.


The peak density height hmF2 and shape parameters show a **linear increase** from the winter towards the summer hemisphere, exceptionally at the polar and geomagnetic anomaly regions.

Night-time peak electron density - Northern summer

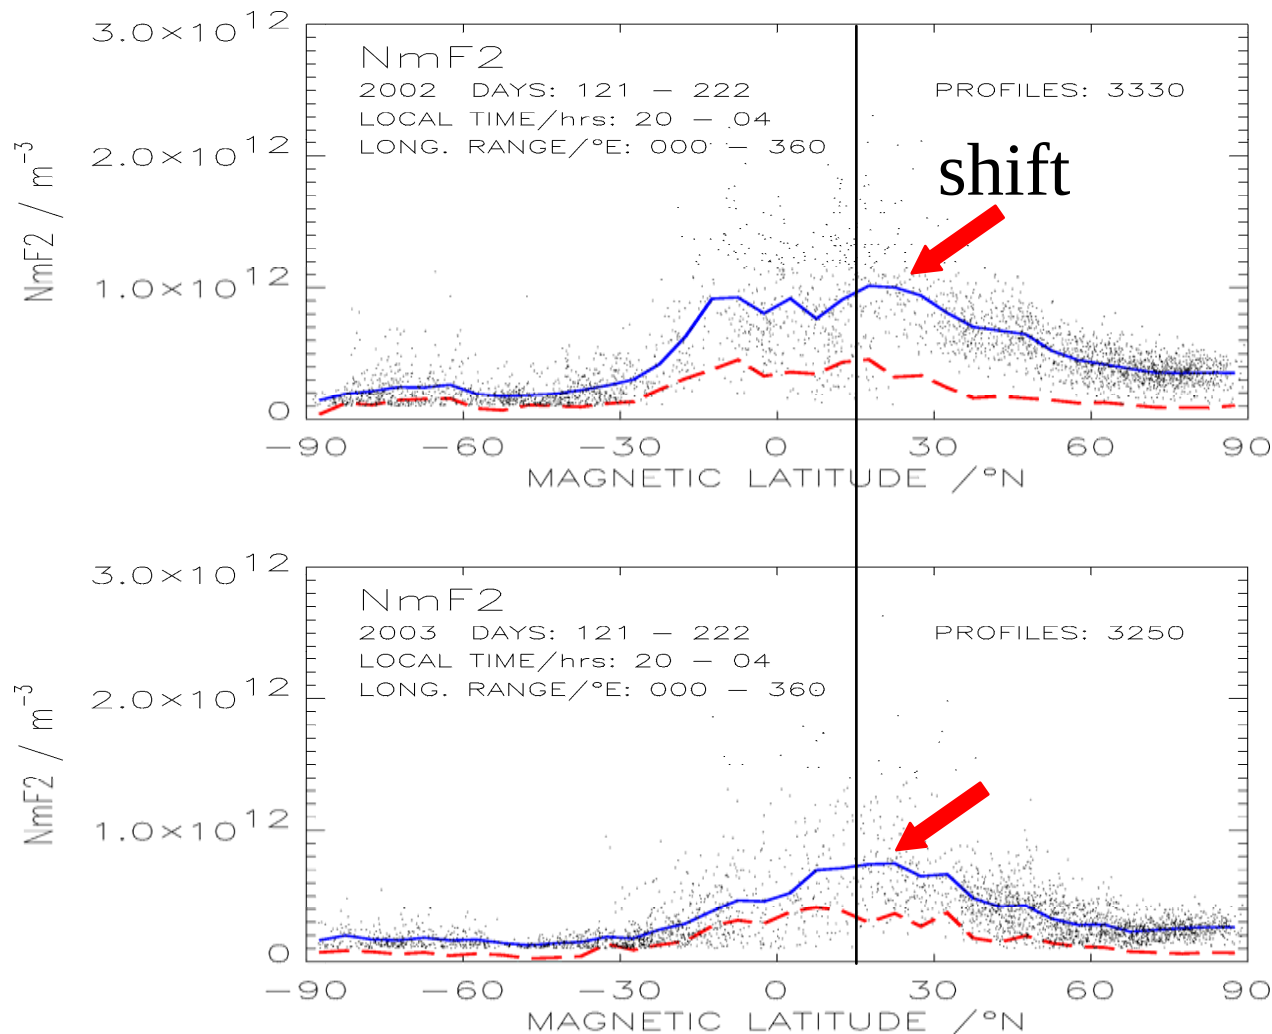


- Crest practically disappears during night-time conditions (20 – 04 LT)
- Ionisation distribution shifts towards the summer hemisphere

Regular ionosphere: Daytime Equatorial Crest

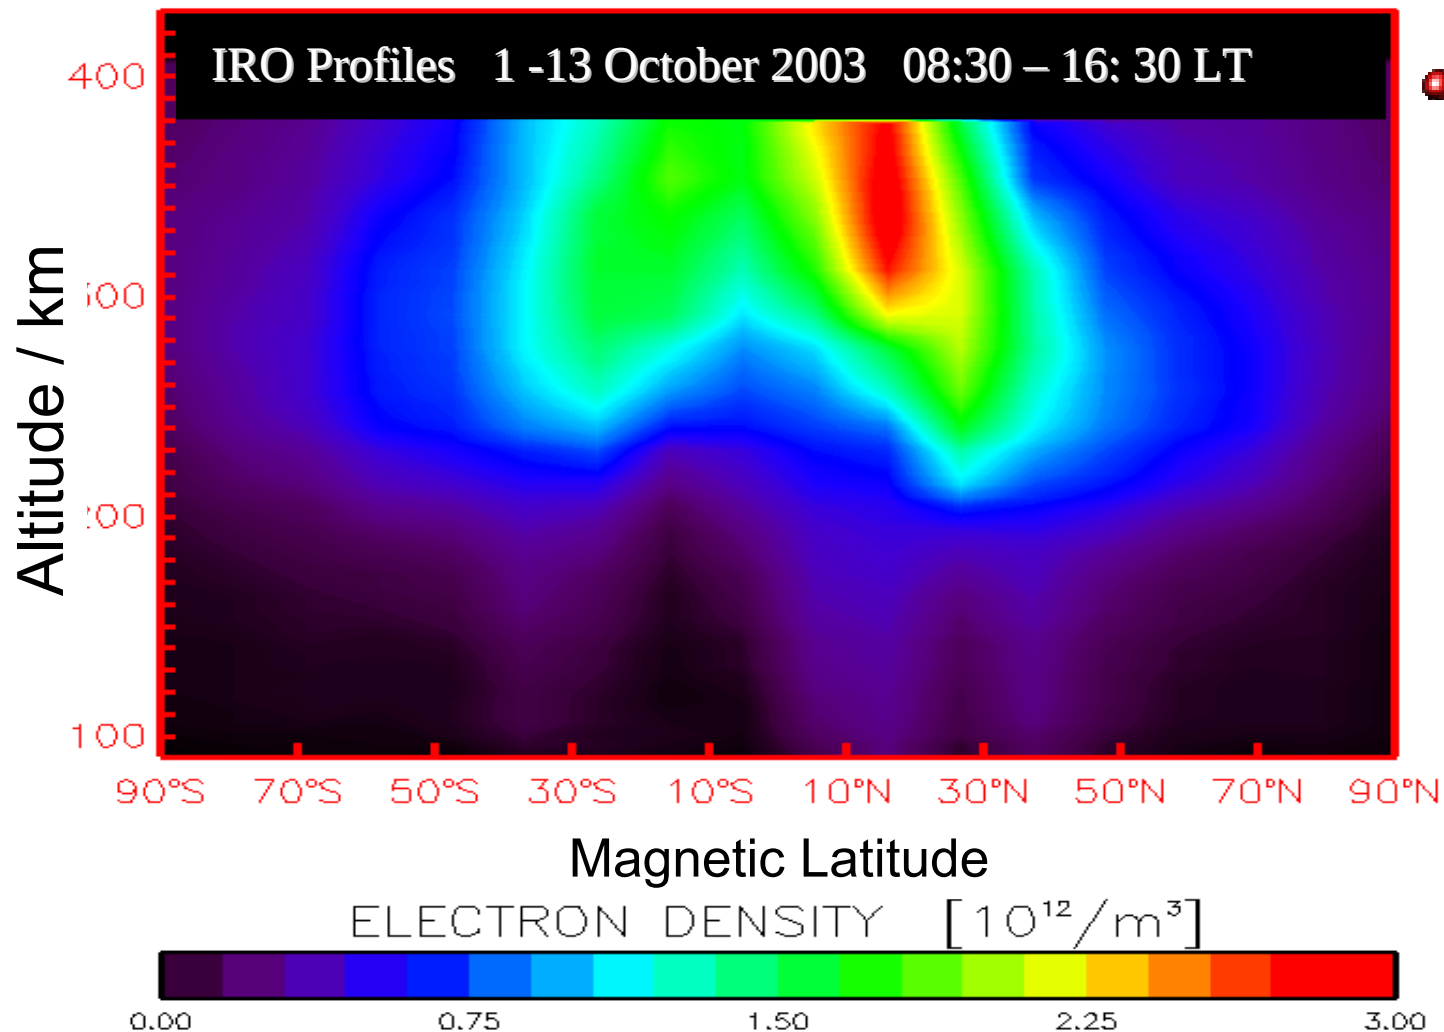


● Clear indication of the equatorial anomaly at day-time

Regular ionosphere: Nighttime high latitude trough

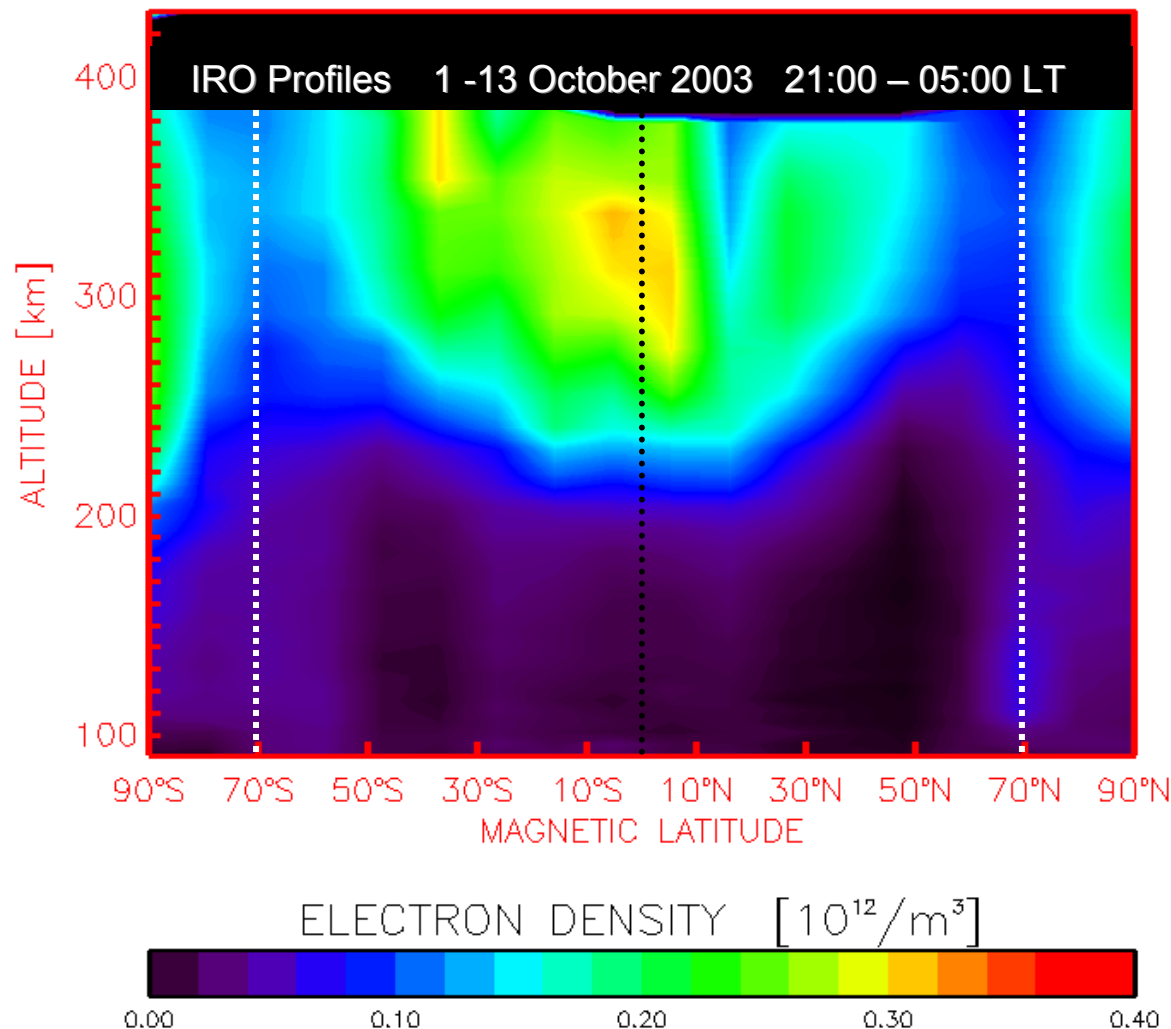

- Averaged IRO profiles during 1 -13 October 2003 representing night-time conditions (21:00 – 05:00 LT)
- The night-time ionosphere shows well pronounced troughs at both hemispheres around 70° geomagnetic latitude

GPS radio occultation derived electron density profiles during the storm in August 2003

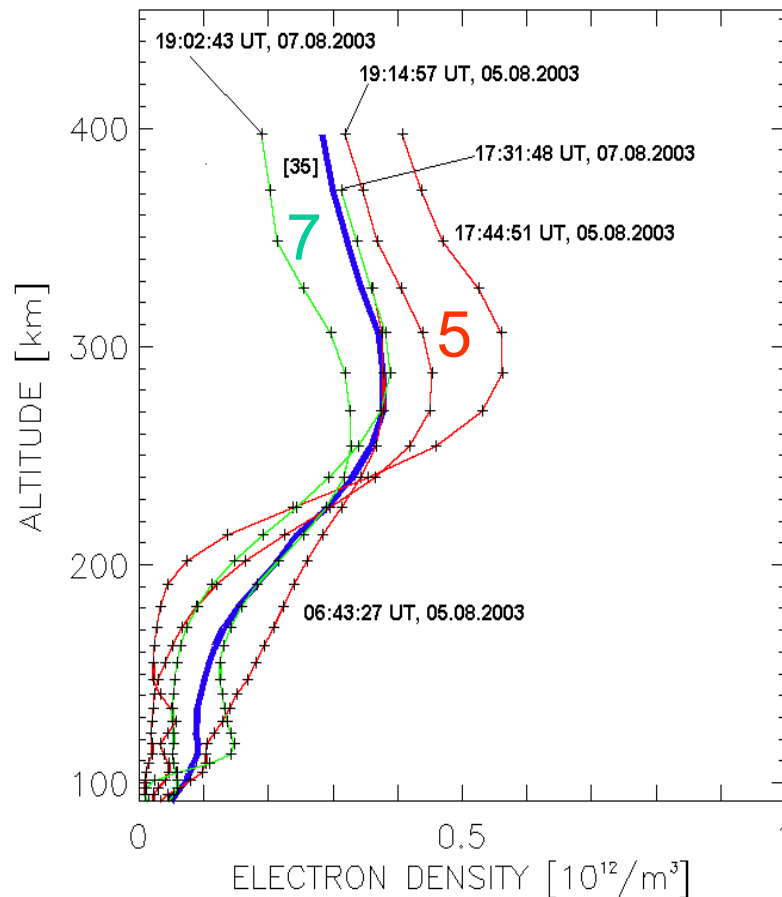

Storm onset:

5 August 2003, 05:00 UT


Latitude range: 55 - 70°N

Longitude range: -20° - 40°E

Deformation of profile shape
probably due to winds on first day
(positive phase)

Enhanced plasma loss probably
due to composition changes
on third day (negative phase)


IRO - TEC data transformation

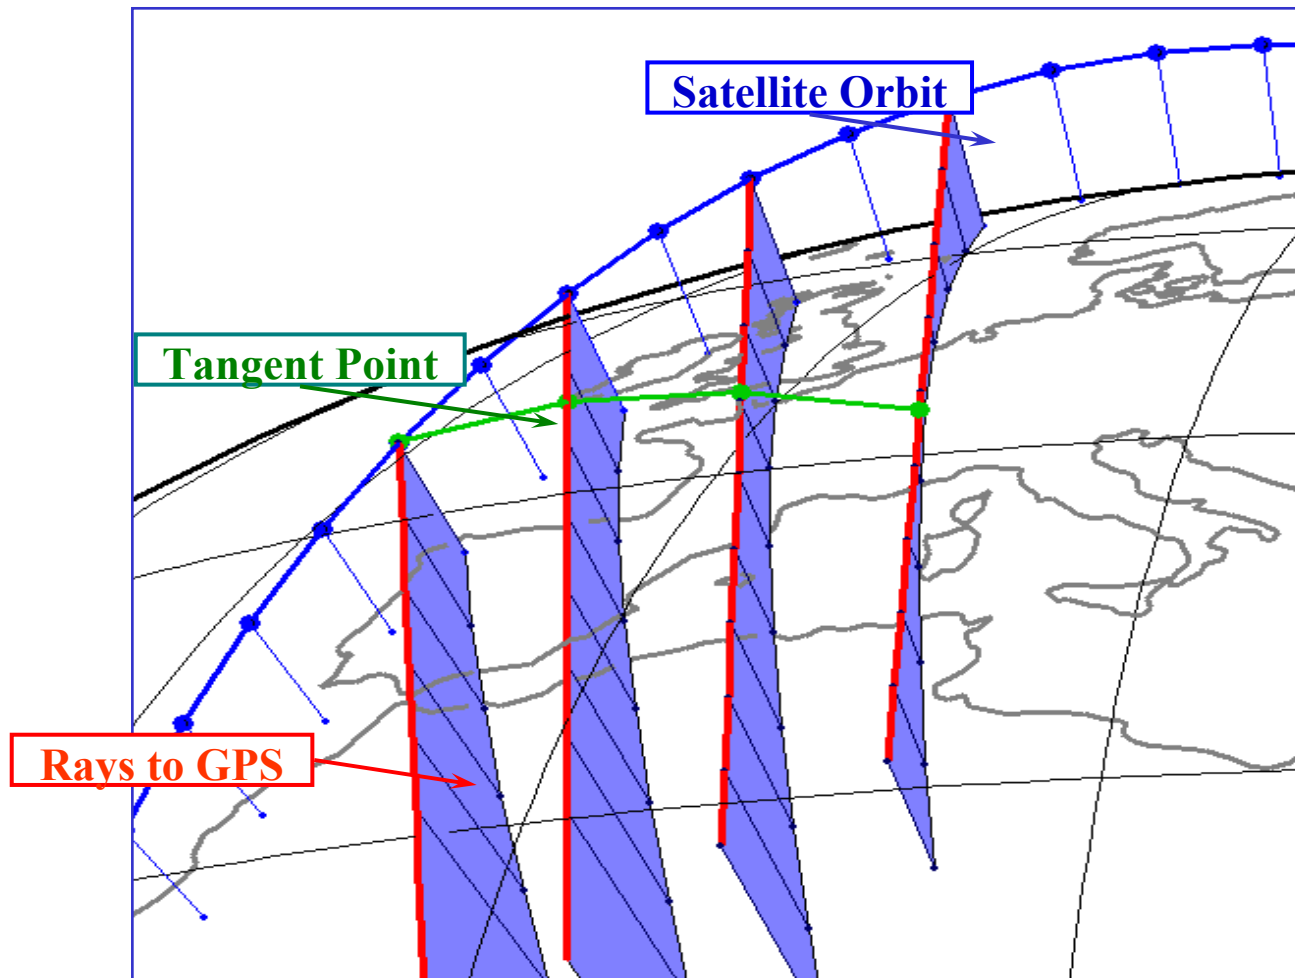

- To estimate the size of the irregularities the occultation data are related to the trace of the moving tangential point through the ionosphere
- Obtained is TEC as a function of the distance between CHAMP and the moving tangential point

Imaging of ionospheric irregularities (DA)

IRO measurement on CHAMP
after transformation

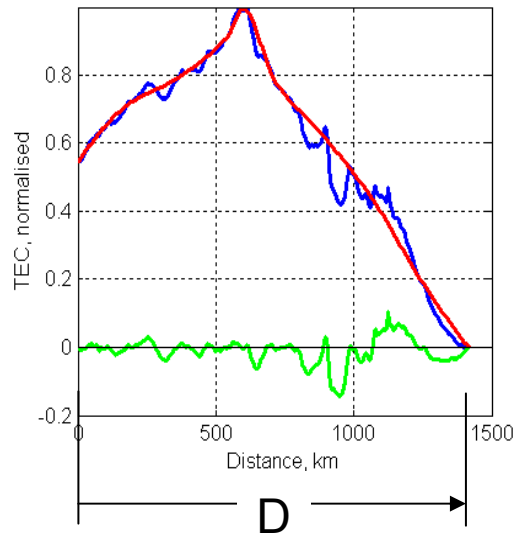


Disturbance Activity

$$DA = \sqrt{\frac{1}{D} \int_0^D \left(\frac{d}{ds} TEC(s) \right)^2 ds}$$

May 2002 – Apr 2004


00 UT

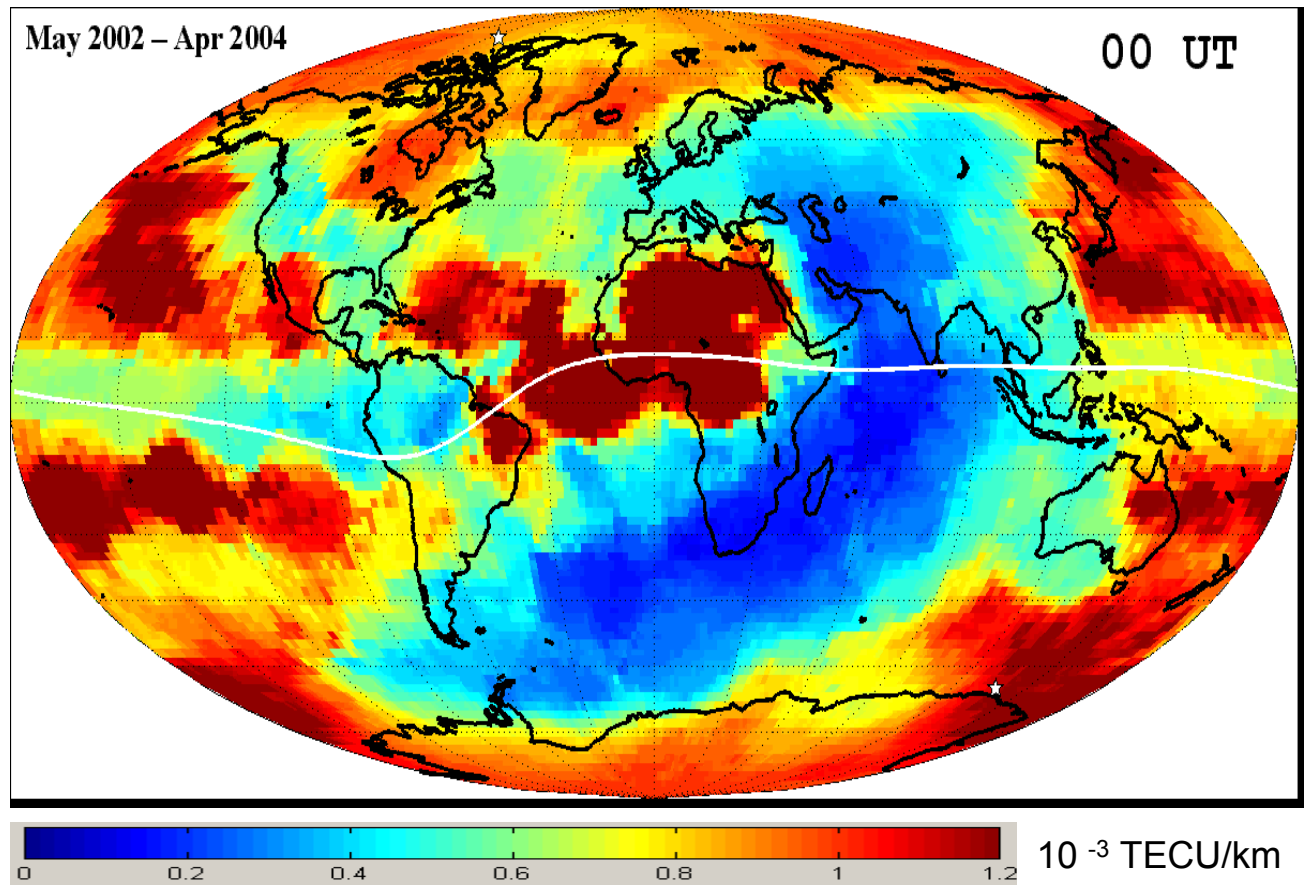

CHAMP IRO-Measurements from May 2002 – April 2004


Tsybulya, K. and Jakowski, N., Medium and small-scale ionospheric irregularities detected by GPS radio occultation method, Geophys. Res. Lett., 32, L09103, doi:10.1029/2005GL022420, 2005

Fourier Transform and Spectral Density Estimation

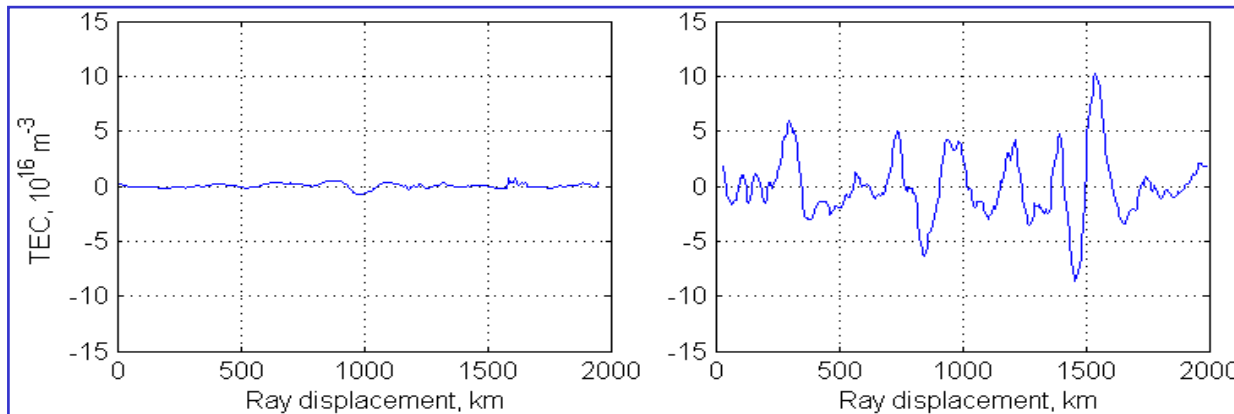


● Observation samples of Fouriertransform and Spectral Density Estimation (SDE)

● The observations are subdivided into two groups with characteristic scale lengths of 15 - 30 km and 80 - 150 km.

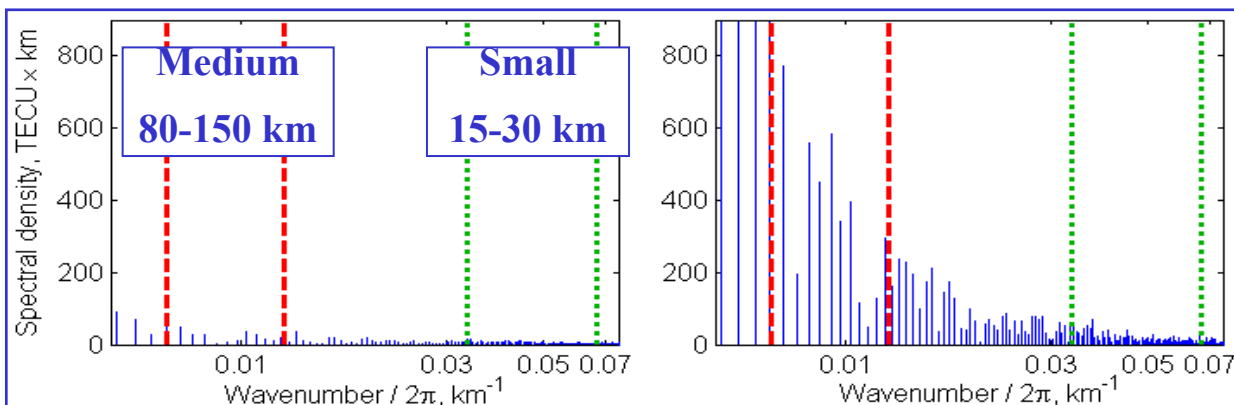


SDE: **50.7** **8.8** **346.7** **19.5** **TECU x km**

Global distribution of ionospheric irregularities

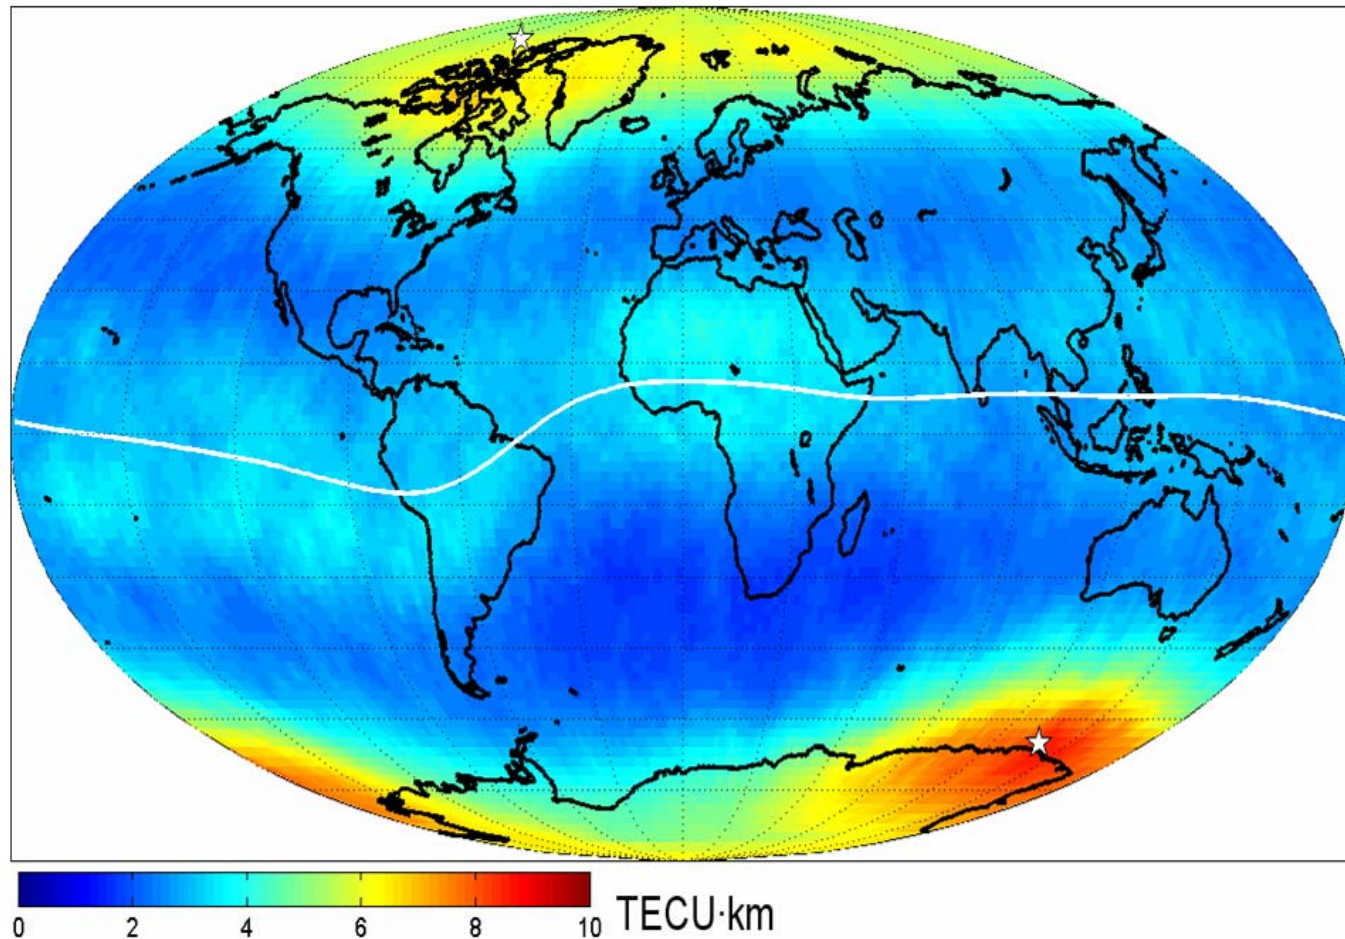

- Spectral density of ionospheric irregularities averaged over scale lengths $\lambda \approx 15\text{-}30\text{ km}$
- 250,000 occultations from March 2002 – March 2006
- Irregularities are related to the geomagnetic field structure


Occurrence of irregularities - Geomagnetic dependency

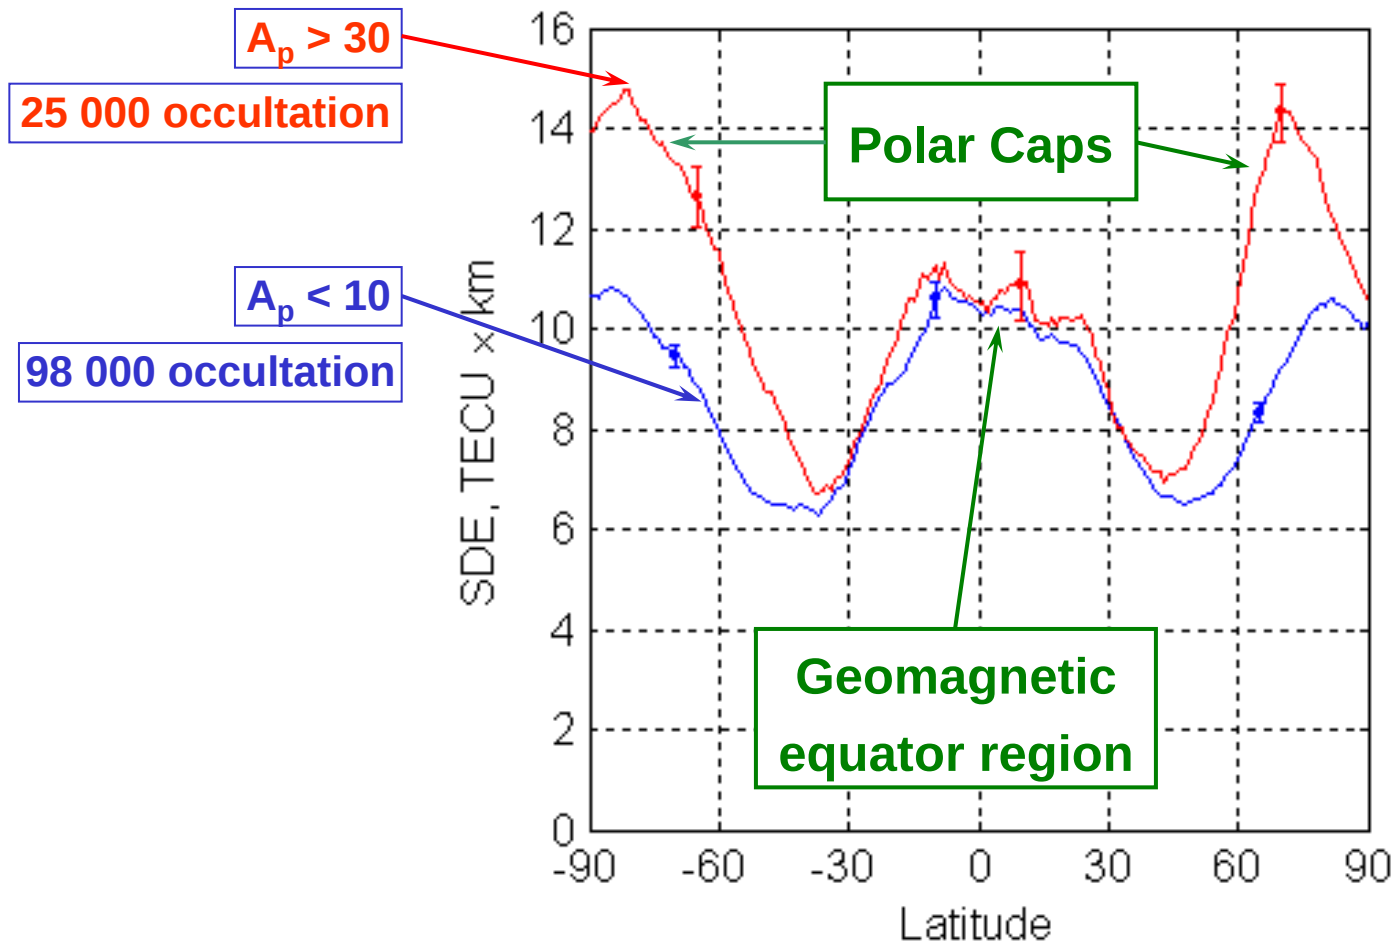


- Ionospheric electron density irregularities detected by IRO measurements preferentially occur at low and high latitude regions
- The occurrence rate at high latitudes increases during enhanced geomagnetic activity.
- The occurrence rate at low latitudes remains unchanged.

Tsybulya, K. and Jakowski, N., Medium and small-scale ionospheric irregularities detected by GPS radio occultation method, Geophys. Res. Lett., 32, L09103, doi:10.1029/2005GL022420, 2005

GPS ionosphere sounding

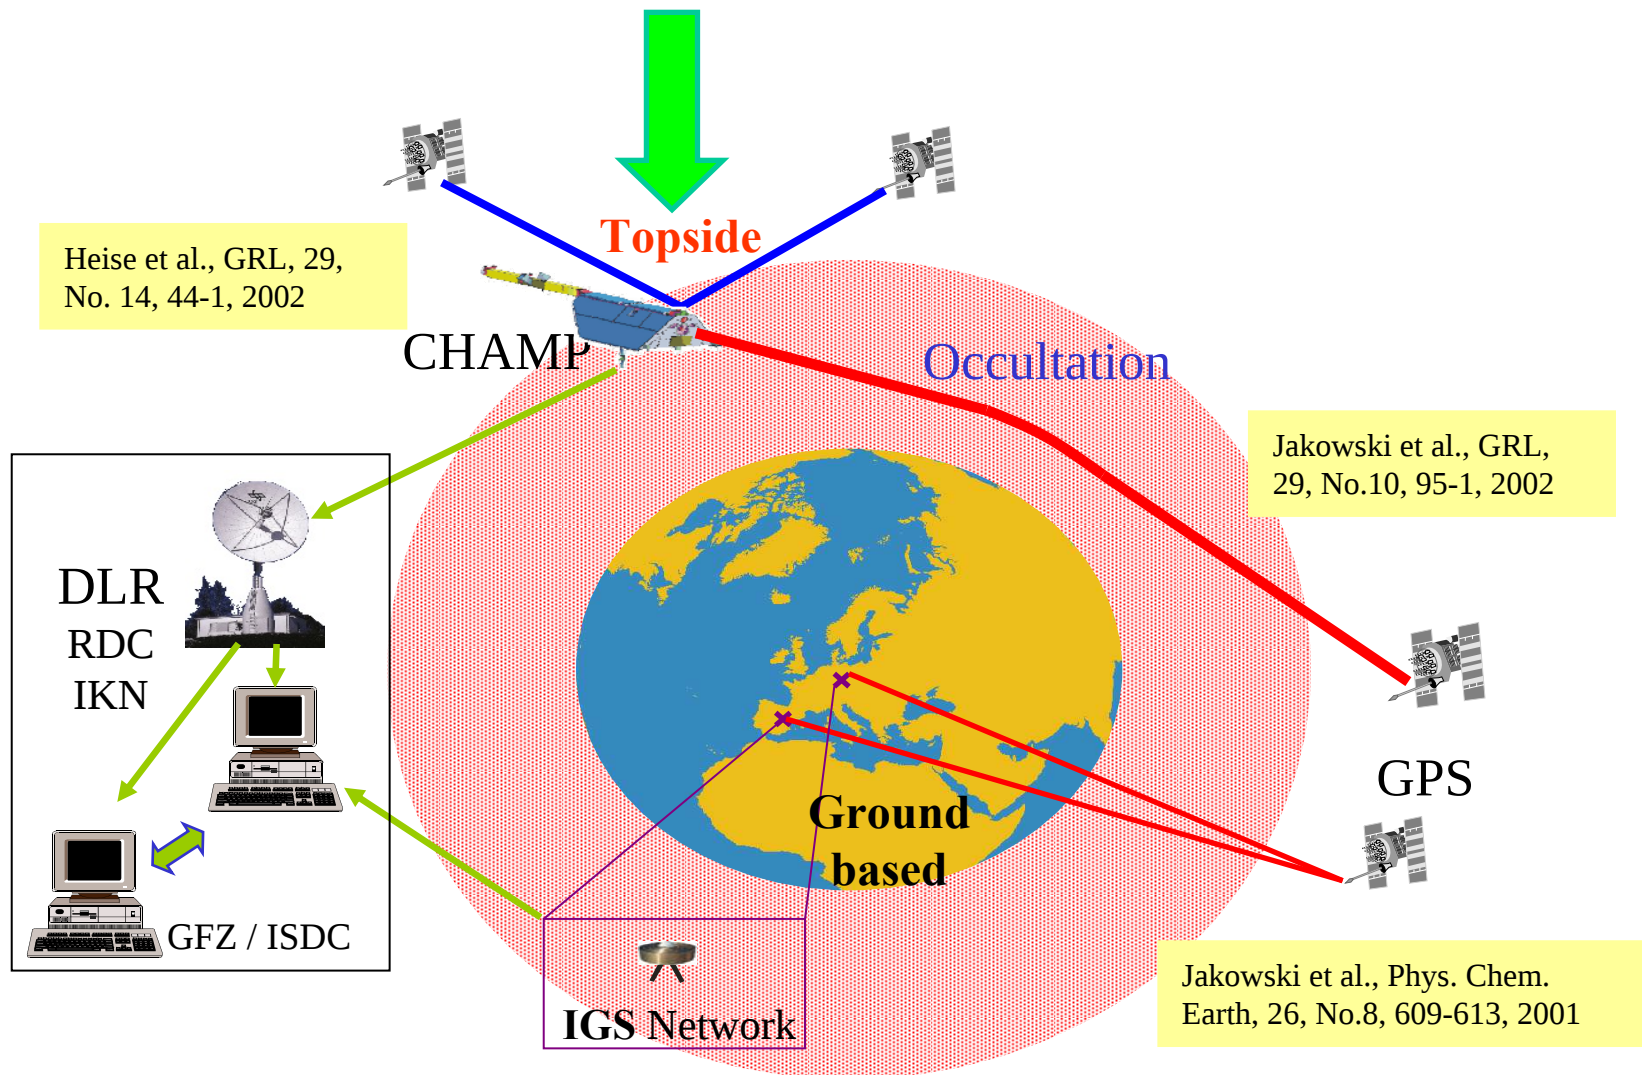


Topside ionosphere / plasmasphere sounding

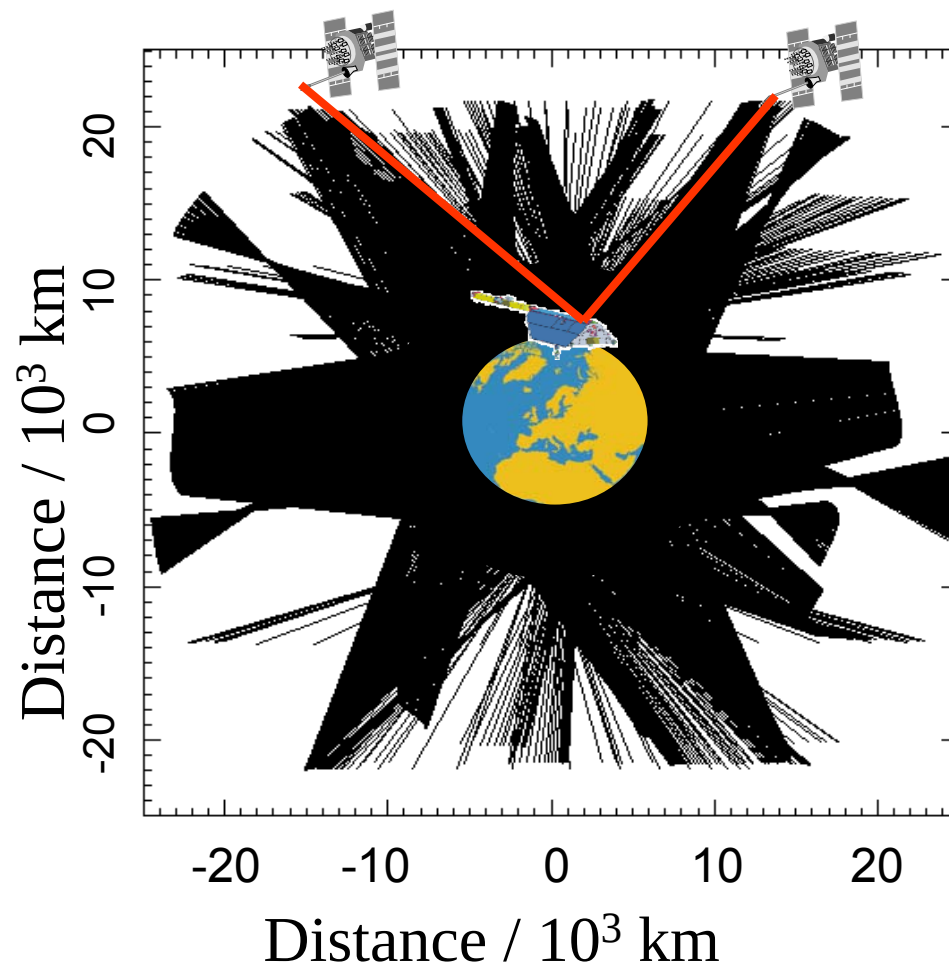

2D projection of a typical radio link distribution for a full CHAMP revolution within 93 minutes

The GPS navigation data measured onboard CHAMP (0.1 Hz sampled) provide up to about 3000 measurements during one revolution usable for the reconstruction of the electron density distribution

Upper Ionosphere/Plasmasphere – Data Assimilation

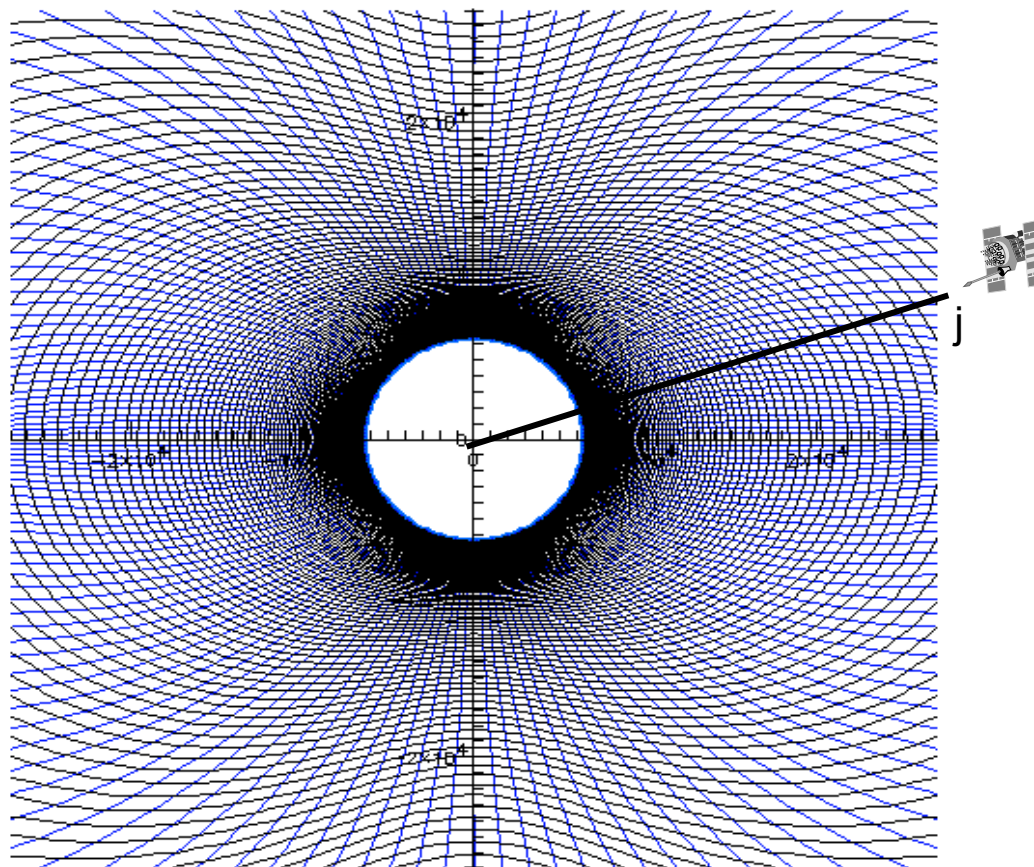

Discretization for ray path j:

$$\text{TEC}_j = \sum_i n_{e\,ij} \, ds_{ij}$$



**TEC = D*X
&
PIM**

Data
assimilation



Electron density
distribution

Voxel structure for data assimilation



Deutsches Zentrum
für Luft- und Raumfahrt e.V.
in der Helmholtz-Gemeinschaft


IST056, Characterising the Ionosphere
12-16 June 2006, Fairbanks, Alaska

S. Heise, N. Jakowski, A. Wehrenpfennig, Ch. Reigber, H. Lühr, Sounding of the Topside Ionosphere/Plasmasphere Based on GPS Measurements from CHAMP: Initial Results, Geophysical Research Letters, 29, No. 14, 10.1029/2002GL014738, 2002


Institute of Communications and Navigation

Page 26

Validation using Langmuir Probe Measurements

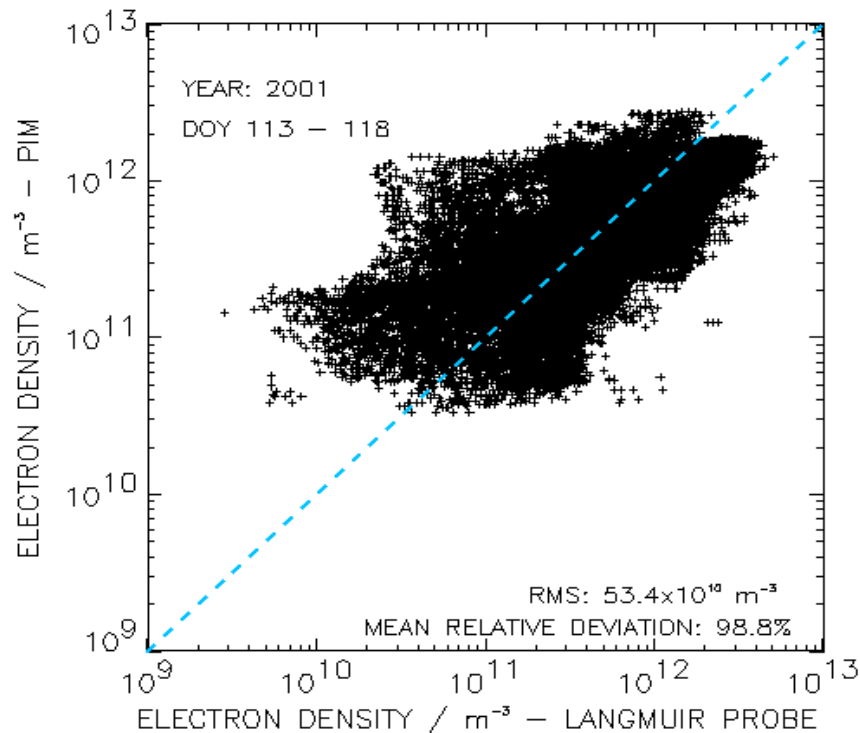

before

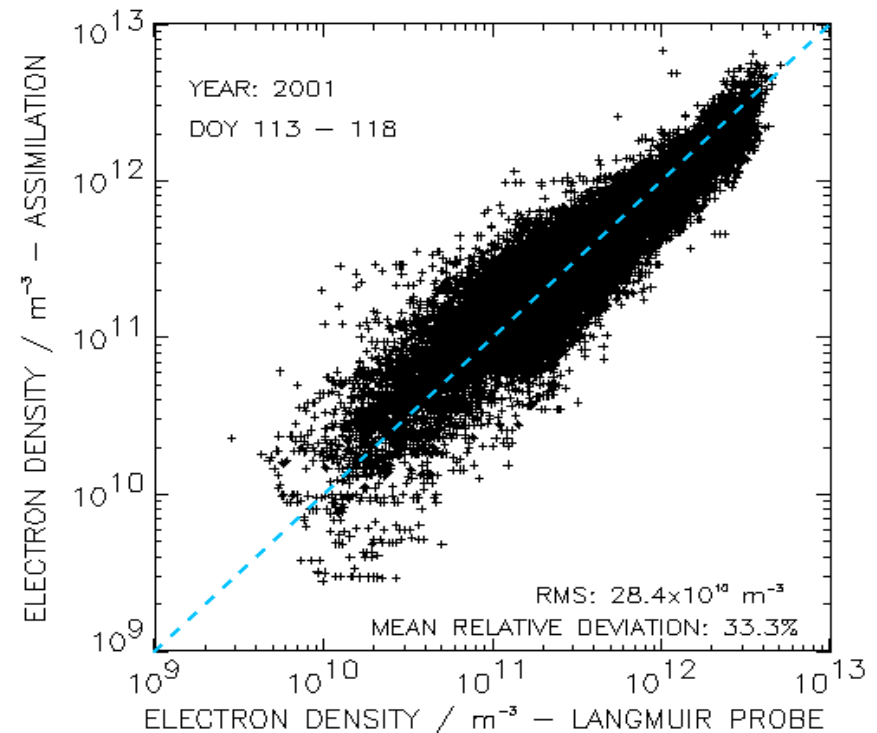


after assimilation

Scatter plots of initial model (PIM) data and assimilation results versus Langmuir Probe derived electron densities for 2001, days 113 - 118


Plasmasphere data assimilation – reconstruction result

Electron Density in the CHAMP revolution plane

- 15-16 3D maps/day
- Operational since
June 10th 2005
- Plots: SWACI website

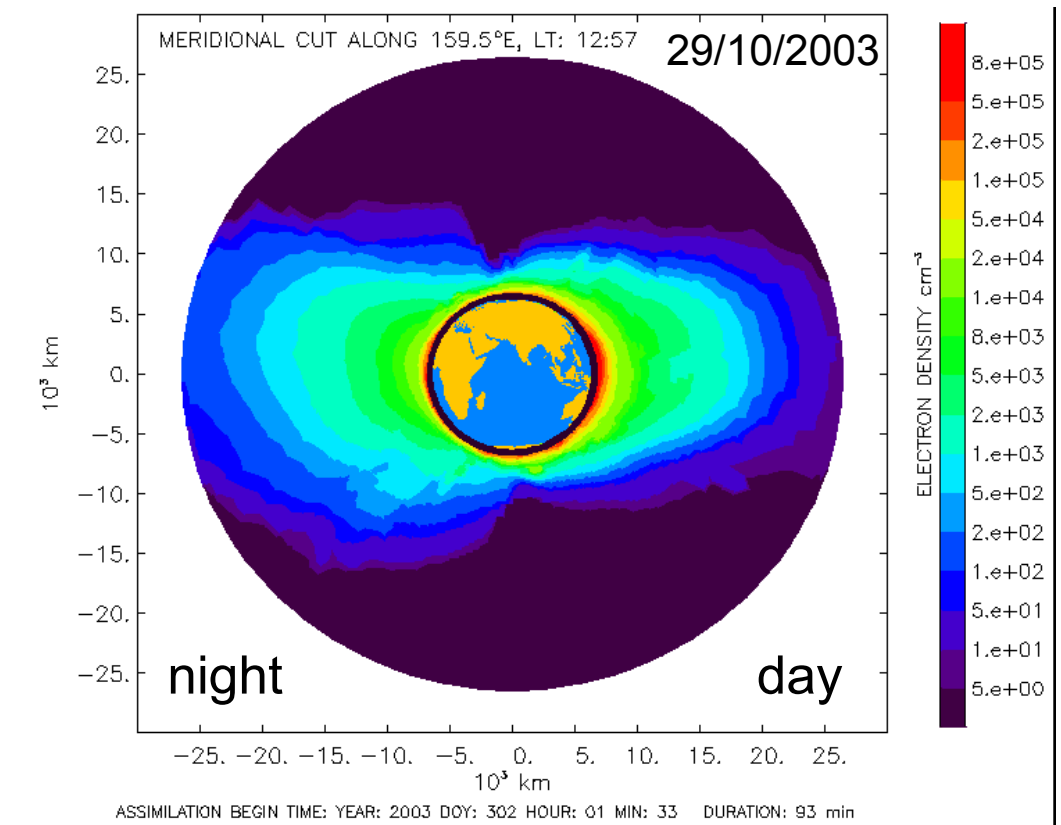

Averaged plasmasphere electron density distribution

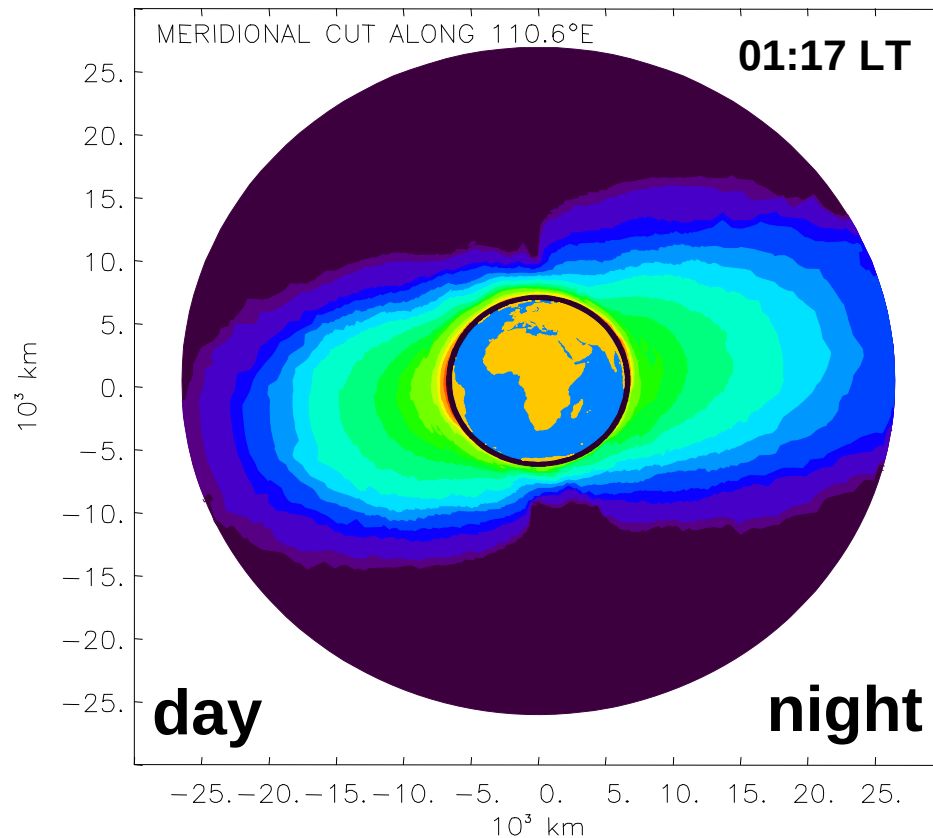

Electron Density in cm⁻³



10¹

10²



10³

10⁴

10⁵


- Number of assimilations: 9
- Time interval:
08/14/2005
until
08/23/2005
- Day-night asymmetry of the
plasmasphere visible

Ionosphere/plasmasphere electron density distribution 8 November 2004

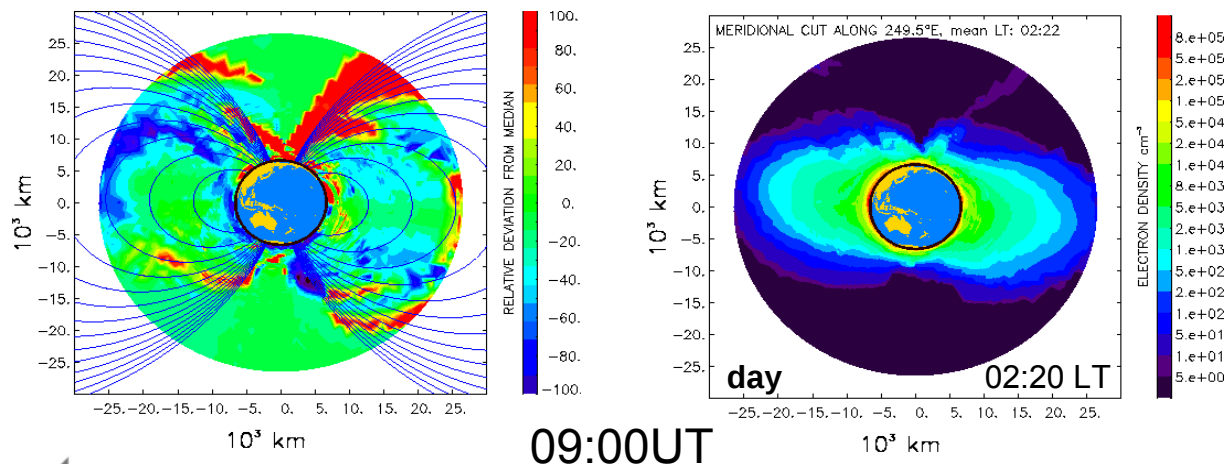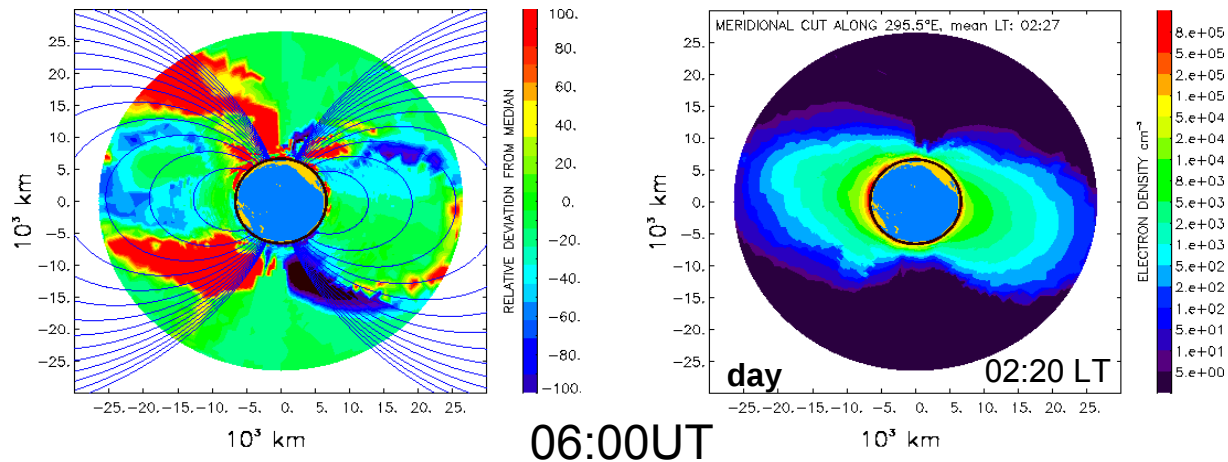

Comparison of subsequent reconstructions of the 3D electron density structure during the ionospheric storm on 8 November 2004 in comparison with plots of percentage deviations from corresponding medians ($\Delta n_e/n_e \cdot 100\%$).

Response of the topside ionosphere/plasmasphere on the storm on 20/21 November 2003

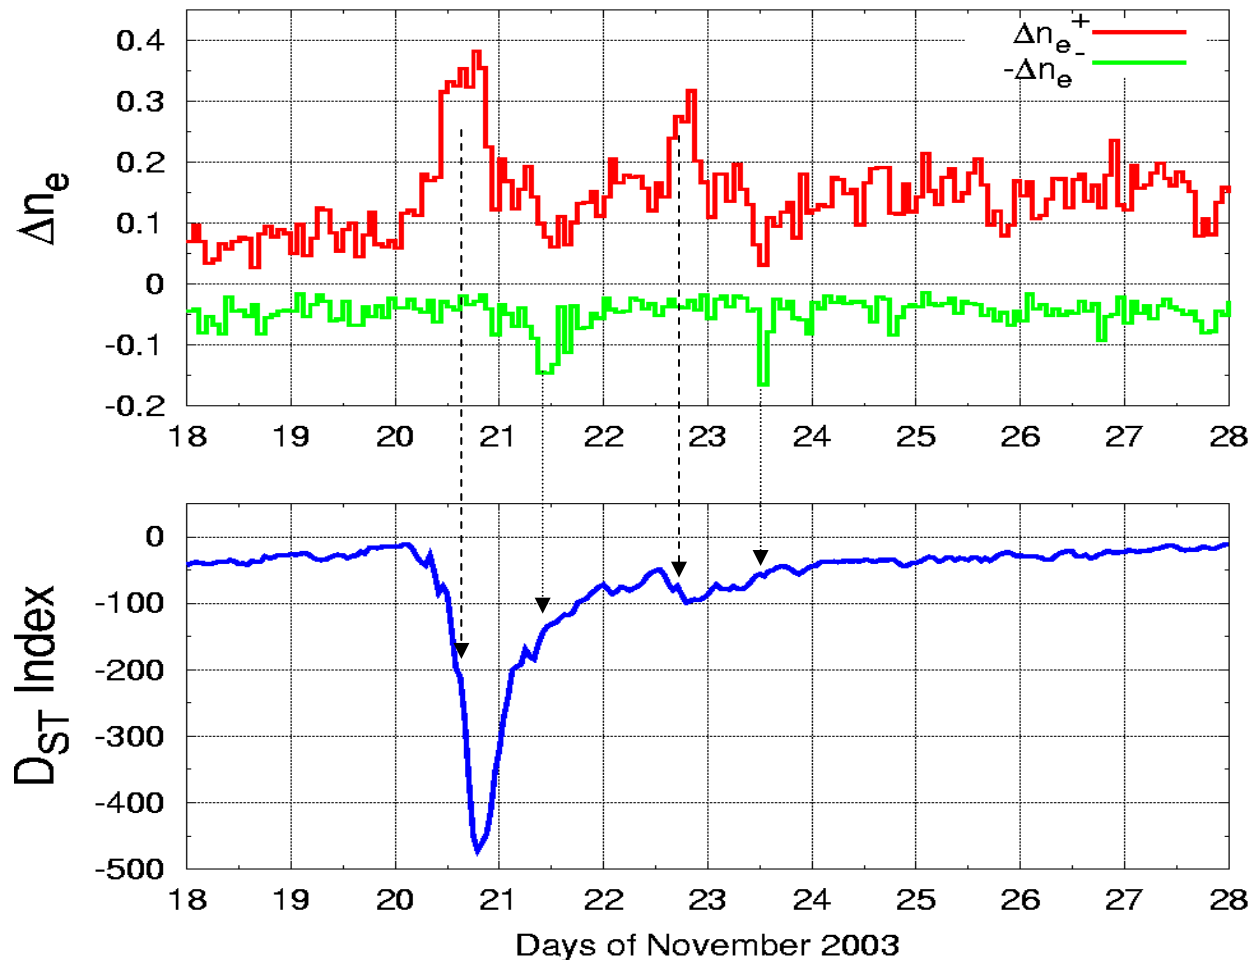


Positive deviation of the electron density exceeding $\Delta n_e/n_e > 50\%$


Negative deviation of the electron density exceeding $|\Delta n_e/n_e| > 50\%$

Storm in the topside ionosphere / plasmasphere starts with a positive phase followed by a negative phase

Ionospheric Storm on 29 October 2003

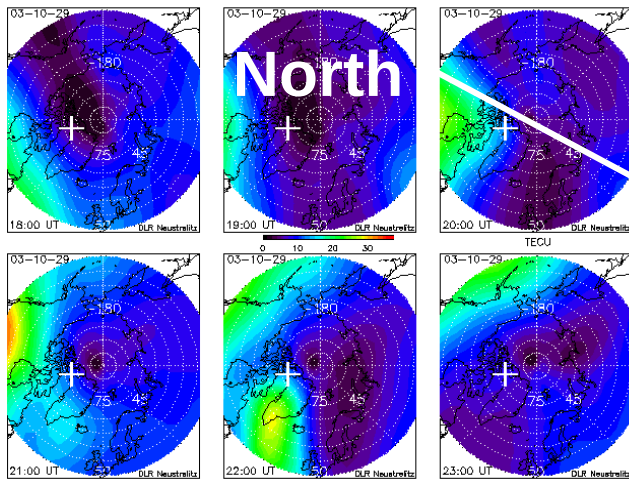

Ground Based GPS

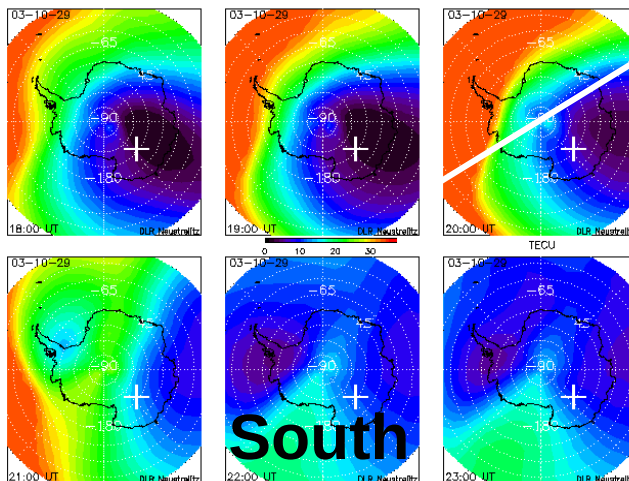

South




Left panel

Ground based
TEC maps over
North and South
pole areas from
18:00 – 23:00 UT




Right panel

Topside electron
density
reconstructions at
20:13 UT

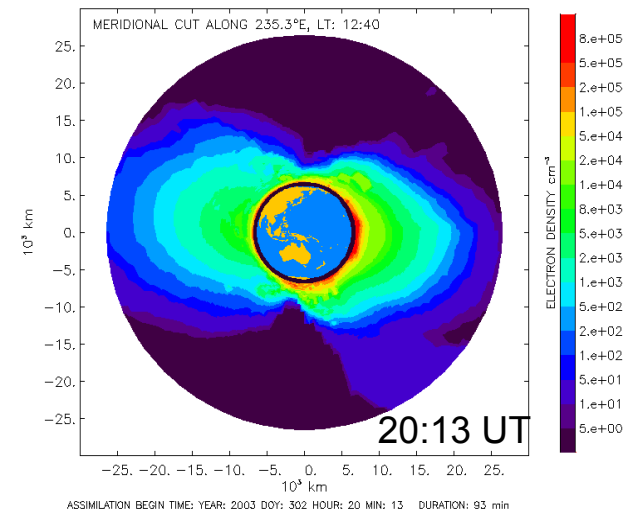


ASSIMILATION BEGIN TIME: YEAR: 2003 DOY: 302 HOUR: 20 MIN: 13 DURATION: 93 min

Space Based GPS

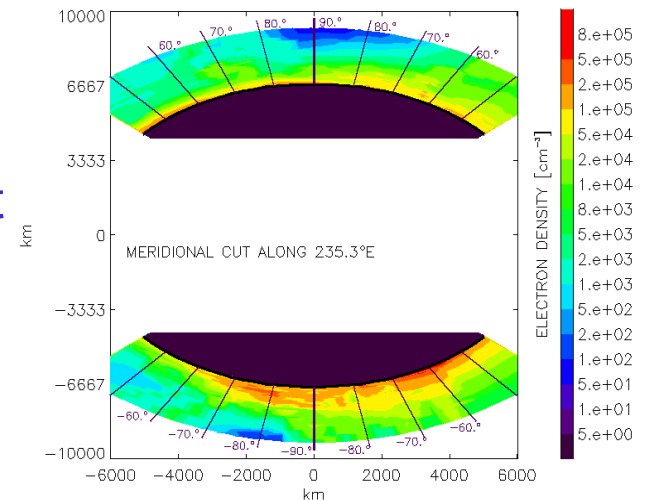


Ionospheric Storm on 29 October 2003


CHAMP IRO data
- 52.82°N; 164.73°E, 12:30 UT

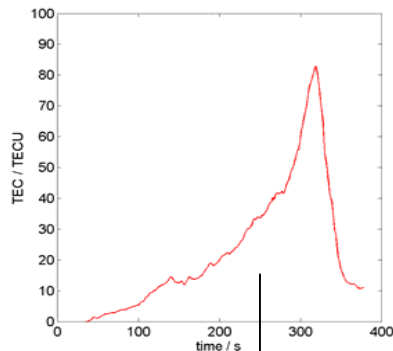



Inversion

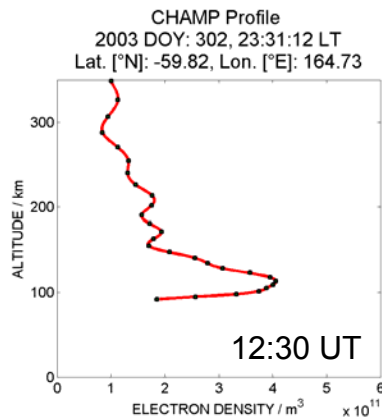

CHAMP Profile
2003 DOY: 302, 22:58:12 LT
Lat. [°N]: -68.23, Lon. [°E]: 41.54

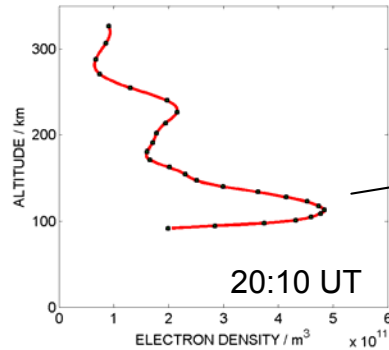

CHAMP Profile
2003 DOY: 302, 0:44:24 LT
Lat. [°N]: -51.73, Lon. [°E]: 43.63

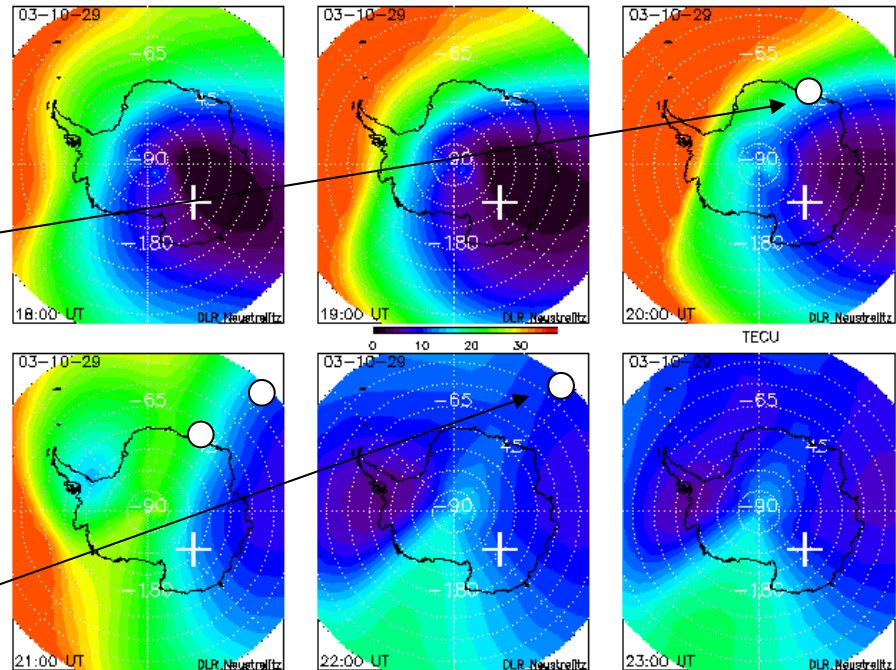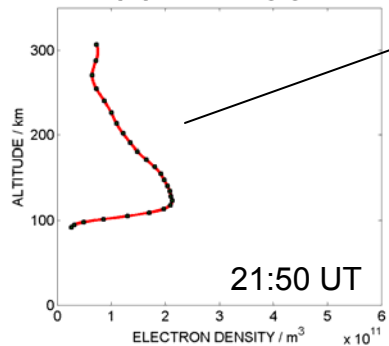

● Enhanced particle precipitation at Southern pole area indicated by vertical electron density profiles from IRO Measurements onboard CHAMP

SWACI Website – Data products access

Products & Data

The data and products available through SWACI are based on primary data, mostly of them provided by the partners and institutions listed in the section "Service Descriptions".

Furthermore, SWACI uses GPS measurements provided by European GPS ground networks like those of the International GNSS Service (IGS) and EUREF whose data are made available online via the Bundesamt für Kartographie und Geodäsie (BKG).

Space base GPS data are taken from GPS measurements on board the German Geo-Research satellite CHAMP.

We are grateful to the above mentioned institutions, commissions and services for providing such important primary data which our service is based on.

Whereas the ground based data are operational with an update rate of 5 minutes, the CHAMP data are available depending on the CHAMP science data dump received at the DLR/DFD Neustrelitz.

Access

If you are new to this service and would like to have an access to products and documents, please first register by following the link "New Users". There you will get a user name and a password via email. If you have already registered, select the link according to your membership status (CONSORTIUM, COMMERCIAL, NON-COMMERCIAL, PUBLIC). When using the SWACI service, please follow the policy on data usage.

Products

Ground based:

- o Space Weather Warnings
- o European maps of Total Electron Content (TEC)
- o Maps of Temporal Gradients of TEC
- o Maps of Latitudinal gradients of TEC
- o Maps of longitudinal gradients of TEC
- o Forecasts

Space based:

- o Vertical electron density profiles
- o 2D electron density reconstructions of topside ionosphere/plasmasphere systems in the CHAMP orbit plane

<http://www.kn.nz.dlr.de/swaci/>

Ground based data

Warnings

Maps of

- TEC
- Temporal gradients
- Latitudinal gradients
- Longitudinal gradients

Forecasts

Space Based data

Electron density

- Profiles
- Topside Reconstructions



Summary & Conclusions

- GPS sounding onboard LEO satellites is a powerful tool for studying and modelling the ionosphere on global scale
- The CHAMP mission has produced a large data base:
 - since April 2001, $\approx$ 200,000 IRO profiles
 - since July 2002, $\approx$ 21,000 Ionosphere/plasmasphere maps
- Validation of IRO data continues
- Basic ionospheric features are well reproduced in GPS sounding data from CHAMP
- Future developments shall include topside reconstructions + IRO Profiles + ground-based GPS data (TEC maps)
- Operational CHAMP ionosphere sounding data of both types are available via the internet by the SWACI service:

<http://www.kn.nz.dlr.de/swaci/>



Acknowledgement

- This work has been financially supported by the German State Government of Mecklenburg-Vorpommern under Grant V230-630-08-TIFA-334.
- We thank K. Tsybulya / IZMIRAN, Moscow and S. Heise/GFZ Potsdam for their help in preparing the presentation.
- The authors are grateful to the international CHAMP team for maintaining the operation and reception of the CHAMP satellite since 2000.