

Annual Report for AOARD Grant FA2386-11-1-4113 "Development of Silicon-Based Group IV Lasers"

17/8/2012

Name of Principal Investigators: Prof. H. H. Cheng

- e-mail address : hhcheng@ntu.edu.tw
- Institution : Center for Condensed Matter Sciences and Graduate Institute of Electronics Engineering, 1 Roosevelt Road, Section 4, National Taiwan University, Taipei, Taiwan, R. O. C
- Mailing Address :
- Phone : 86-2-33665255
- Fax : 86-2-23655404

Period of Performance: 22/8/2011 – 22/8/2013

Abstract:

The objective of the project is to develop silicon-based group IV heterostructure lasers by the incorporation of another group IV element of Sn. We have made significant progress toward the milestones described in the proposal. Optical emitter made of P-i-N diode with direct bandgap is fabricated. The structure has been characterized by various measurements to establish that emitting layer is direct bandgap. We are forwarding herewith the detection of emission on the device, if this is realized, then we could have a breakthrough on Si-based optical emitter.

This report is organized as following sections:

- (a) Material growth**
- (b) P-i-N heterostructure**
- (c) Characterization on the structure**
- (d) Future direction of work**
- (e) Publications**

(a) Material growth

On the material growth, different structures are grown by molecular beam epitaxy. First, we investigate different type of doping in GeSn alloy for serving as p- and n-type dopant. Magneto-Hall measurement is performed to identify the dopant. Then, we proceed with optical emitter made of P-i-N diode using the growth techniques of low temperature growth and virtual buffer. (For a detail description of these techniques, see Local intermixing on Ge/Si heterostructures at low temperature

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 17 SEP 2012		2. REPORT TYPE Annual		3. DATES COVERED 22-08-2011 to 20-08-2012	
4. TITLE AND SUBTITLE Development of Silicon-Based Group IV Lasers				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Hung Hsiang Cheng				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Taiwan University,1, Roosevelt Road, Section 4,Taipei 10764,Taiwan,NA,NA				8. PERFORMING ORGANIZATION REPORT NUMBER N/A	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) AOARD, UNIT 45002, APO, AP, 96338-5002				10. SPONSOR/MONITOR'S ACRONYM(S) AOARD	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) AOARD-114113	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT The objective of the project is to develop silicon-based group IV heterostructure lasers by the incorporation of another group IV element of Sn. The researchers have made significant progress toward the milestones described in the proposal. Optical emitters made of P-i-N diode with direct bandgap were fabricated. The structure has been characterized by various measurements to establish that emitting layer is direct bandgap. They are forwarding herewith the detection of emission on the device, if this is realized, then they could have a breakthrough on Si-based optical emitter.					
15. SUBJECT TERMS Electronic Materials, Heterostrucuture Semiconductor, Light Emitting Devices, Molecular Beam Epitaxy					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 3	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

growth, H. H. Cheng, W. P. Huang, V.I. Mashanov, and G. Sun, J. Appl. Phys. 108, 044314 (2010).)

The device consists of four layers: (a) a Ge layer grown at low temperature, (b) a n-type GeSn virtual substrate, (c) Ge layer grown at a normal temperature of 600°C and, (d) a p-type GeSn layer. The lattice constant of Sn is about 15% larger than that of Ge. As a result, the Ge layers are tensilely strained. Layer (b) and (d) serve as electrical contact for the diode. Systematic investigation is performed on various Sn compositions in order to obtain the structure with a direct-bandgap emitting layer.

(b) P-i-N heterostructure

In the literature, the photoluminescence emission intensity of Sn-based group IV compounds is weak as mainly attributed to the low carrier densities excited by the optical pumping. For example, with a laser of about 10 mW, the excitation gives $\sim 10^{10}/\text{cm}^3$ carrier in the sample. This is several orders of magnitude smaller than the typical carrier density used in the electrically pumped emission diode. Thus, a p-i-n diode structure would give a much stronger optical signal. The p-i-n diode is fabricated in our laboratory and the structure consists of GeSn/Ge/GeSn with different Sn compositions. A typical cross-sectional transmission electron microscope (TEM) image of the device is shown in fig. 1.

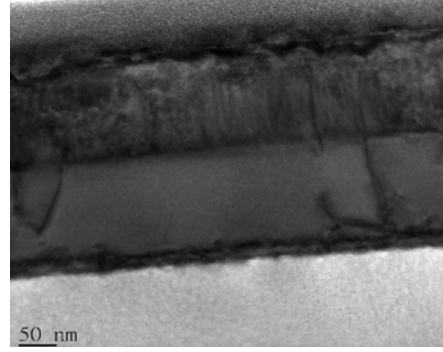


Fig. 1. TEM image of the device made of p-i-n diode structure.

(c) Characterization on the structure

Various measurements have been performed to characterize these samples, including microstructure analysis of high resolution X-ray, optical spectroscopy, etc. Here, we present the absorption spectrum measured by Fourier transform infrared spectroscopy (FTIR) to establish the directness of the energy band of the i-layer. The spectra with different Sn compositions

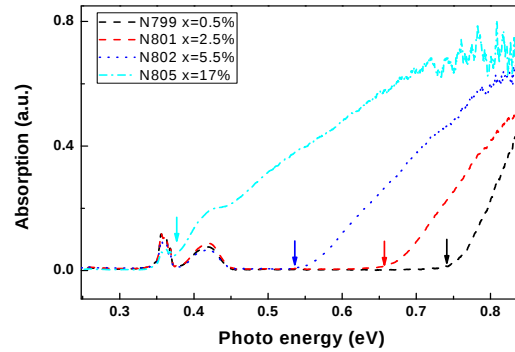


Fig. 2. Absorption spectrum of the i-layer of the p-i-n diode.

are plotted fig. 2. The absorption edge of the i-layer (as marked by the solid arrow) shifts to lower energy as Sn composition increases. From the analysis, it shows that the energy band of the i-layer (Ge) is direct as $\text{Sn} > 5.5\%$.

(d) Future direction of work

In this year, we focus on: (a) exploring the p-i-n diode structure for practical optical emitter, and (b) characterization of the structure to establish a direct bandgap emitting layer. In the next stage, we will carry out emission measurement to probe possibility of using the diode as optical emitter.

(e) Publications

- (1) Formation of Ge-Sn nanodots on Si(100) surfaces by molecular beam epitaxy, Vladimir Mashanov, Vladimir Ulyanov, Vyacheslav Timofeev, Aleksandr Nikiforov, Oleg Pchelyakov, Ing-Song Yu and Henry. H. Cheng, Nanoscale Research Letters, Vol. 6, p. 85. (2011).
- (2) Investigation of $\text{Ge}_{1-x}\text{Sn}_x/\text{Ge}$ with high Sn composition grown at low-temperature, I. S. Yu, T. H. Wu, K.Y. Wu, H. H. Cheng, V. I. Mashanov, A. I. Nikiforov, O. P. Pchelyakov, and X. S. Wu, AIP ADVANCES **1**, 042118 (2011).
- (3) Strain analysis of a wrinkled SiGe bilayer thin film, Guo-En Chang, Chia-Ou Chang, and H. H. Cheng, J. Appl. Phys. **111**, 034314 (2012).
- (4) Clustering Effect on The Band Gap of GeSn Alloys, Journal of Nanoelectronics and Optoelectronics
- (5) Transformation of a two-dimensional to one-dimensional energy profile on a spatially deformed $\text{Si}_{0.82}\text{Ge}_{0.18}/\text{Si}_{0.51}\text{Ge}_{0.49}$ wrinkled heterostructure, Guo-En Chang, H. H. Cheng, G. Sun, and R. A. Soref, J. Appl. Phys. **111**, 104321 (2012).
- (6) Franz-Keldysh Electro-Absorption Modulation in Germanium-Tin Alloys, R. A. Soref and G. Sun, and H. H. Cheng, **111**, 123113, J. Appl. Phys. (2012).