

Coherence of Sound using Navy Sonars: Deep Water Acoustics

John Spiesberger
Scientific Innovations, Inc.
6 Derrington Rd
Radnor, PA 19087
phone: (610) 225-2666 fax: (610) 225-2666 email: johnsr@sas.upenn.edu

Award Number: N00014-10-C-0480

LONG-TERM GOALS

The long term goals are to 1) determine when methods can be used to reliably and accurately predict the temporal and spatial coherence of sound at low frequencies in the sea, 2) develop reliable and accurate methods to make such predictions and, 3) determine the physical mechanisms affecting coherence. The first two goals are to be achieved without tuning with data in any way whatsoever.

OBJECTIVES

The primary objective is to determine when the temporal and spatial scales of coherence are accurately predicted by solving an approximation of the acoustic wave equation for climatological conditions in the ocean perturbed by a time-evolving field of internal gravity waves following a standard spectrum. These waves have long been thought responsible for coherence in the deep ocean at low frequencies. Despite decades of theoretical work to predict coherence, theoretical models to date are highly unreliable, often being inaccurate by several orders of magnitude. We are comparing numerical predictions for coherence with data collected with Navy sonars.

A secondary objective is to understand how to quantify the regions of the ocean that influence acoustic signals that are measured at a receiver. The classic picture of such regions is described by ray paths, which are solutions of the wave equation at high frequency. Modern theories of diffraction have the ability to quantify the regions exactly for any finite frequency and bandwidth (Spiesberger, 2011b). Since the exact regions that influence sound look very different than where rays propagate at low frequency, it may turn out in the long-term that the modern theory will replace the use of rays for many applications in basic research and surveillance.

APPROACH

To pin down whether the problems for predicting coherence time were due to the theories or the ascribed physical mechanism of internal waves, we began eight years ago a numerical set of computations of the acoustic field with standard models at time intervals matching measurements (Spiesberger et al, 2003). These computations have the advantage of not using any theoretical support from scattering theories. This allows a strong test for the hypothesis that internal gravity waves determine coherence at low frequencies in the sea. The sound speed field for the numerical model is

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 2012		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Coherence of Sound using Navy Sonars: Deep Water Acoustics				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Scientific Innovations, Inc. 6 Derringdale Rd Radnor, PA 19087				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 5	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

synthesized by adding sound speed perturbations due to internal waves to a climatological background of speed. The linear dispersion relation is used to temporally evolve a standard spectrum of internal waves. For each snapshot of sound speed along a section, the split-step sound-speed insensitive parabolic approximation (Tappert *et al.*, 1995) is solved on a computer for the frequencies used for each acoustic transmission. The temporal response is computed using the inverse Fourier transform. The predicted acoustic field at the receiver is saved. This collection is analyzed in exactly the same manner as the data, including setting the signal-to-noise ratio from the model to be the same as for each measured acoustic reception.

WORK COMPLETED

We finished analyses of sections of length 1346 km and 3709 km in the Pacific from our global acoustic warming experiment that began in 1983 (Oreskes, 2004). The 1983 component of these data are particularly useful measurements because they consist of continuous transmissions at two-minute intervals lasting five days. The source and receivers are mounted on the seafloor with time bases controlled by atomic clocks. The ocean is the only thing that affects the acoustic measurements, as there are no aberrations from instrument motion.

RESULTS

Section F in Figure 1 is a 1346 km section from transmissions in 1986-7 centered at 133 Hz and a temporal resolution of 0.06 s. It is one of six experiments analyzed to date where temporal measurements of coherence have been compared with numerical computations without tuning with data. Four of the other sections yielded excellent resemblance between observations and models. In one section (E), the comparison yielded no conclusion because the data were not analyzed correctly for this application (Spiesberger, 2006).

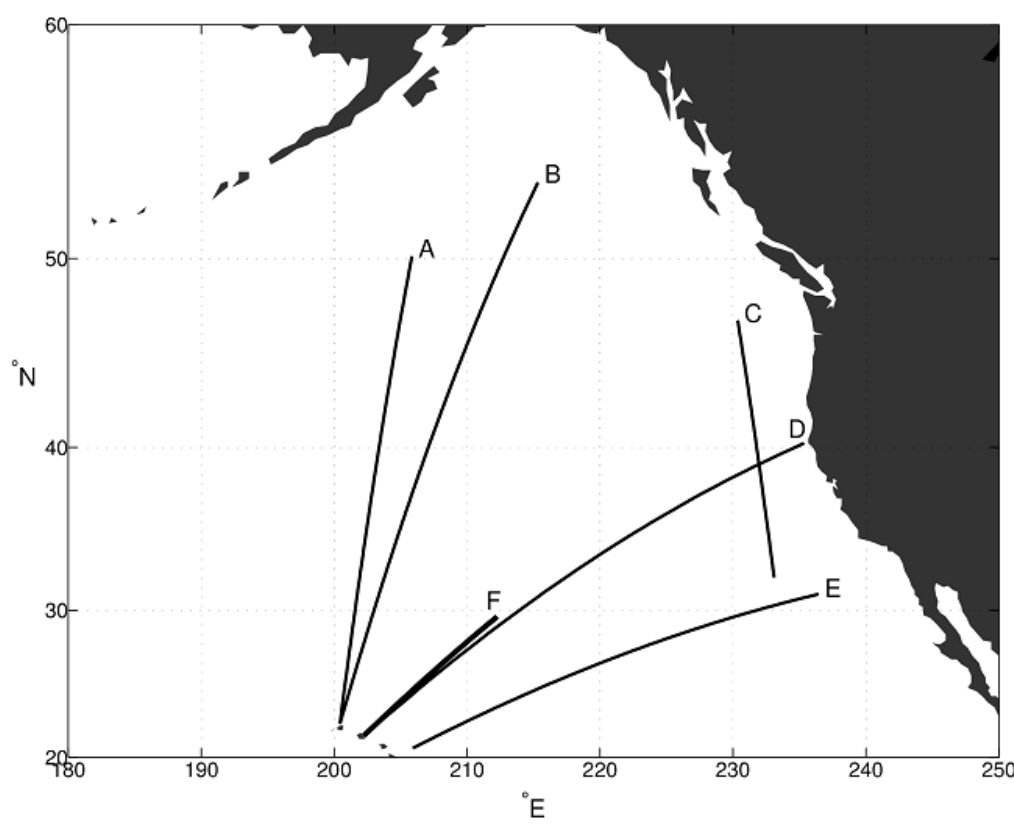


Figure 1: Six sections where the temporal coherence of sound has been compared with models without tuning with data.

The current comparison with data (Figure 2) shows the probability distribution of coherence time. Coherence time is defined to be the duration of a coherently integrated acoustic signal yielding maximum signal-to-noise ratio at the receiver. The most important result is that the model yields a very accurate prediction for coherence time without tuning with data. The comparison indicates that it is unnecessary to invoke physical mechanisms beyond internal waves to explain temporal coherence in this experiment.

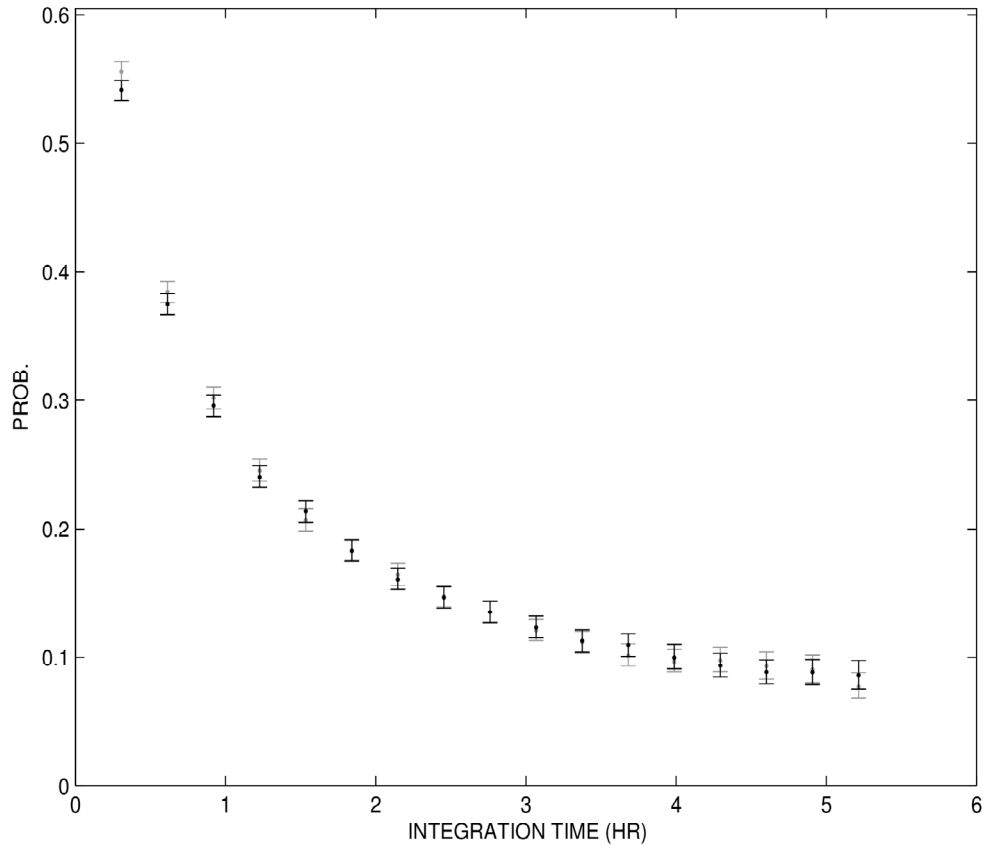


Figure 2: Coherent integration time of data (dark) and model (light gray) with 95% confidence limits for section F in Figure 1.

IMPACT/APPLICATIONS

Accurate computations and predictions for temporal coherence have applicability to surveillance, theoretical work in scattering theory, design of acoustic experiments, and underwater acoustic communication systems. Understanding temporal coherence of sound has been one of the most important issues for anti-submarine warfare since WWII.

RELATED PROJECTS

Because of the importance of acoustical coherence both theoretically and practically, many scientists study the coherence of sound. These include Drs. Buckingham, Worcester, Vera, Godin, Voronovich, Colosi, Morozov, Orr, Rouseff, Kuperman, and Duda. Many others not listed here have or are making important contributions.

REFERENCES

- Oreskes, N. Science and public policy: what's proof got to do with it?, *Environmental Science and Policy*, vol. 7, no. 5, pp. 369-383, 2004.
- Spiesberger, J.L., Numerical prediction of coherent integration time at 75 Hz, 0.03 temporal resolution at 3250 km, *Proceedings of MTE/IEEE Oceans '06*, Boston, MA, pp. 1-4, paper 060323-02, September 2006.
- Spiesberger, J.L., Tappert, F., and Jacobson, A.R., Blind prediction of broadband coherence time at basin-scales, *J. Acoust. Soc. Am.*, 114, 3147-3154, 2003.
- Tappert, F., Spiesberger, J., and Boden, L., New full-wave approximation for ocean acoustic travel time predictions, *J. Acoust. Soc. Am.*, 97, 2771-2782, 1995.

PUBLICATIONS

- Spiesberger, J., Comparison of two and three spatial dimensional solutions of a parabolic approximation of the wave equation at ocean-basin scales in the presence of internal waves: 100-150 Hz, *J. Computational Acoustics*, 18, No. 2, 117-129, 2010.
- Spiesberger, J., Internal Waves' role in Determining Probability Distribution of Coherent Integration Time near 133 Hz and 3709 km in North Pacific Ocean, *IEEE J. Oceanic Engineering*, 36, 760-771, 2011a.
- Spiesberger, J., Where the ocean influences the impulse response and its effect on synchronous changes of acoustic travel time, *J. Acoust. Soc. Am.*, 130, 3642-3650, 2011b.