

Lagrangian Tracer Transport and Dispersion in Shallow Tidal Inlets & River Mouths

Prof. R. T. Guza and Falk Feddersen
Scripps Institutions of Oceanography
IOD/SIO/UCSD 0209, 9500 Gilman Drive, La Jolla CA 92093-0209
858.534.4345, 858.534.0300 (FAX)
rguza@ucsd.edu, falk@coast.ucsd.edu
<http://iod.ucsd.edu/~falk>

Award Number: N00014-13-1-0126

LONG-TERM GOALS

Our *long-term goals* include developing and field-testing numerical models of shallow water breaking waves and wave-driven processes, including currents, and tracer transport and dispersion. Improved prediction of the fate of terrestrial runoff pollution and other substances (e.g. fine sediment, chemicals) sometimes present in very shallow water.

OBJECTIVES

The objective of this project, to measure mixing and transport in a small tidal inlet, was achieved in the RIVET 1 experiment. During RIVET I, we measured transport and dispersion from within the New River Inlet to 2-3 km offshore and alongshore, at different tidal stages. Analysis of this diverse data set of waves, currents, stratification, Lagrangian drifter, and dye-tracers in conjunction with analysis and comparison of numerical simulations is ongoing. The detailed objectives are to

- Quantify the transport and mixing (dilution or dispersion) of Lagrangian quantities within the inlet and the surrounding ocean.
- Use this quantification from observations to test numerical simulations.
- Use the combined observations and model to isolate and improve numerical model schemes (e.g., vertical mixing, bottom stress)

APPROACH

RIVET-I observations were collected from May 1-21 with instrument deployment in late April and recovery in late May at the New River Inlet N.C. (Figure 1). The inlet had a fierce concentration of remote- and in situ observations - some of which are indicated in Figure 1. Many of these locations held a current meter, pressure sensor, and a fluorometer. During the observation period,

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 SEP 2013		2. REPORT TYPE		3. DATES COVERED 00-00-2013 to 00-00-2013	
4. TITLE AND SUBTITLE Lagrangian Tracer Transport and Dispersion in Shallow Tidal Inlets & River Mouths				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of California, San Diego, Scripps Institution of Oceanography, 9500 Gilman Drive, La Jolla, CA, 92093				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 12	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

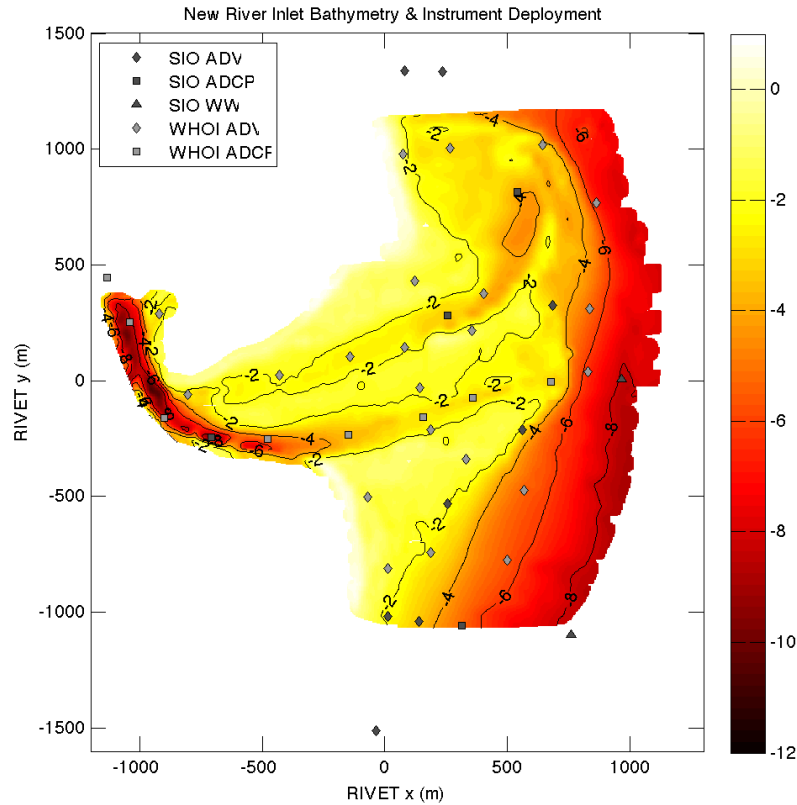


Figure 1: Map of New River Inlet NC bathymetry (from the ASACE FRF) in the RIVET coordinate system with the SIO (Feddersen/Guza) and WHOI (Raubenheimer/Elgar) ADV, ADCP, and wirewalker (WW) instrument locations as noted in the legend. The TopSail side of the inlet is below and the Camp Lejeune side is on top. SIO ADV locations are marked V1-V8. All locations also had a co-located pressure sensor and many locations also had a co-located Rhodamine WT dye fluorometer. Dye was released either near $x \approx -600$ m and $y \approx -300$ m, or about 1.2 km further up the inlet towards the Inter-Coastal Waterway.

summaries of recent observations and upcoming activities were regularly posted to <http://blogs.iod.ucsd.edu/RIVET>, a community blog that we created. Our diverse data set has been quality controlled and all data has been posted to the blog site above and is freely available to all other ONR RIVET investigators.

There approach used here is multi-pronged:

1. Develop and test an algorithm for converting aerial hyperspectral images of the ocean surface to calibrated dye concentration in parts per billion (ppb).
2. Quantify the dye transport and mixing dilution
3. Perform numerical simulations using the COAWST (coupled ROMS/SWAN) modeling sys-

tem. Test the model with the array of current meters and pressure sensors deployed in the inlet.

4. Perform numerical dye release experiments and compare these to the observations.

Similar approaches are used for analysis and modeling of the New River Inlet drifter releases.

WORK COMPLETED This effort began in March of 2013. Since then, the following tasks have been completed.

- Hello

RESULTS

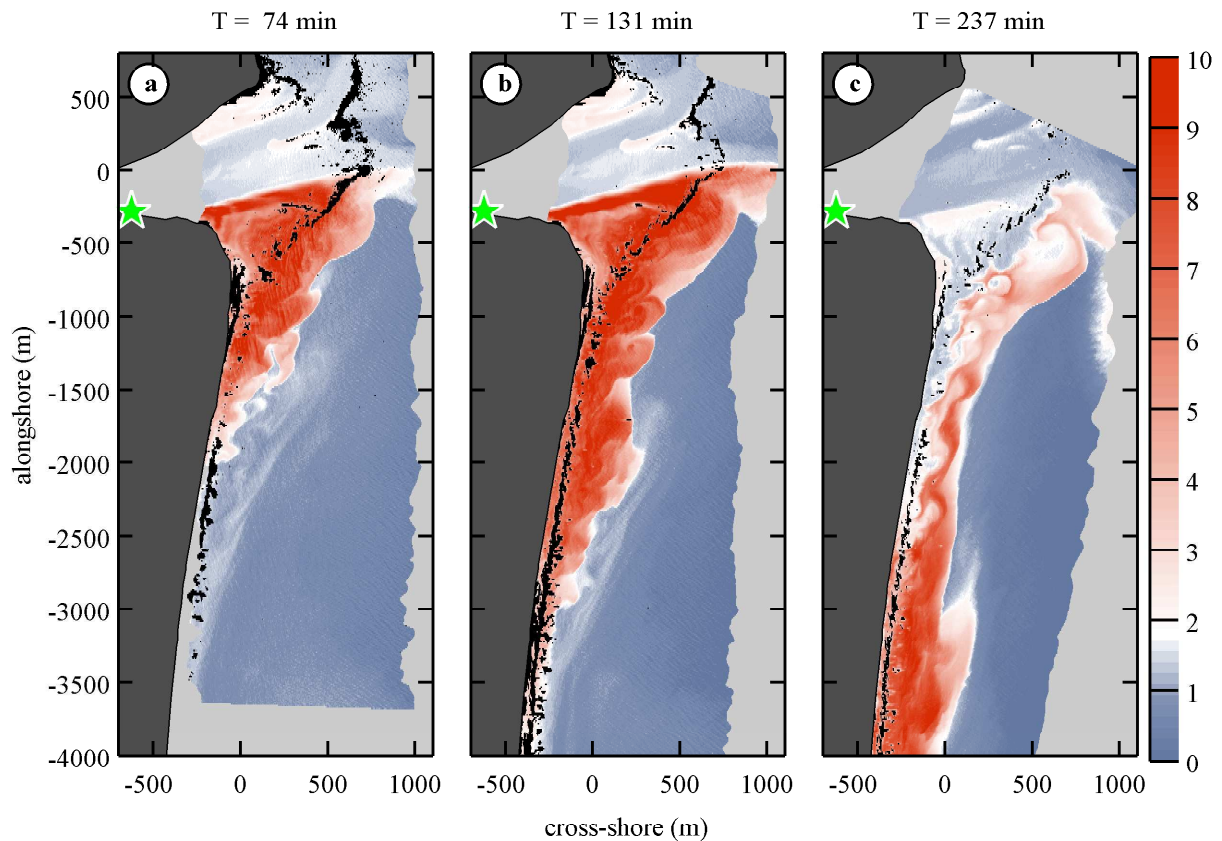


Figure 2: Hyperspectral estimated dye concentrations (ppb, see legend) on 7 May 2012 during RIVET. Dye was released continuously just inside the inlet (green star symbol) from T = 0 to 139 min, and image times are noted in the panel titles. Dark gray regions indicate land, light gray regions indicate water outside the imaged area, and black regions indicate foam from breaking waves. From *Clark et al.* [2013].

1. Aerial dye measurements and maps

Using aerial hyperspectral dye observations that he collected on 4 of the dye releases, combined with in situ jetski based dye observations, we have (a) developed an algorithm for estimating surface dye concentration from hyperspectral observations, (b) found that it works with correlation squared $r^2 = 0.85$ for all 4 dye releases combined, and (c) made aerial maps of surface dye that are very useful in quantifying tracer transport and mixing. This work has been submitted to *J. Atmospheric and Oceanic Tech.* An example of a sequence of surface dye maps from May 7th is shown in Figure 2.

2. Quantifying Observed Dye Transport and Inlet Exchange

The total amount of dye that is transported out or into the inlet can be estimated from the observations. The total dye transport is defined as

$$T_{\text{dye}}(t) = \int h D \vec{U} \cdot \hat{n} dl, \quad (1)$$

where the integral is along the 2–3 m depth contour along the inlet (Figure 1), h is the water depth, D is the 1-min averaged dye concentration, $\vec{U}$ is the 1-minute averaged current vector, and $\hat{n}$ is the outward normal to dl . In these shallow water depths, we assume that the dye is vertically well mixed. The local flux $h D \vec{U}$ is calculated at 9 pressure/velocity/dye observation points spanning the inlet. The integral (1) is calculated via the trapezoid rule across these 9 locations. If a significant amount of dye is transported out of the inlet *between* the sensors then it would imply that the instrument array did not resolve the dye field. One test for this is if the time-integral of transport T_{dye} equals the total dye released Q_{dye} , or

$$\int T_{\text{dye}}(t) dt = Q_{\text{dye}}? \quad (2)$$

This is examined by use of the statistic δ , where

$$\delta = \frac{\int T_{\text{dye}}(t) dt}{Q_{\text{dye}}}. \quad (3)$$

The dye transport $T_{\text{dye}}(t)$ is estimated for releases R1 (05/06), R2 (05/07), R4 (05/11), R5 (05/12), and R6 (05/19) and is shown in Figure 3. Data coverage on R3 and R7 was poor. On both R1 and R2, δ is near one, indicating that the dye transport out of the inlet was well resolved. On the two point releases R4 and R5, δ is small ≈ 0.2 which indicates that the dye field was not well resolved. Aerial dye images (*e.g.*, Figure 2) on R4 and R5, indicate that the instrument array should have resolved the dye. What happened instead is that the vertical salinity stratification was so strong that the dye stayed in the fresh upper water layer and the dye fluorometers in 3 m water depth did not observed the dye that passed by above them. Release R6 was a 5-hour release spanning flood tide (bottom panel in Figure 3). The dye went up the inlet and the back bay and through the ICW. When ebb tide occurred, dye at weak concentrations flowed out the inlet. Over the ebb tide, $\delta \approx 0.5$, indicating that half the released dye that went up the inlet made it back out on the subsequent ebb. This is important in estimating inlet residence times.

3. Tracer Modeling at New River Inlet

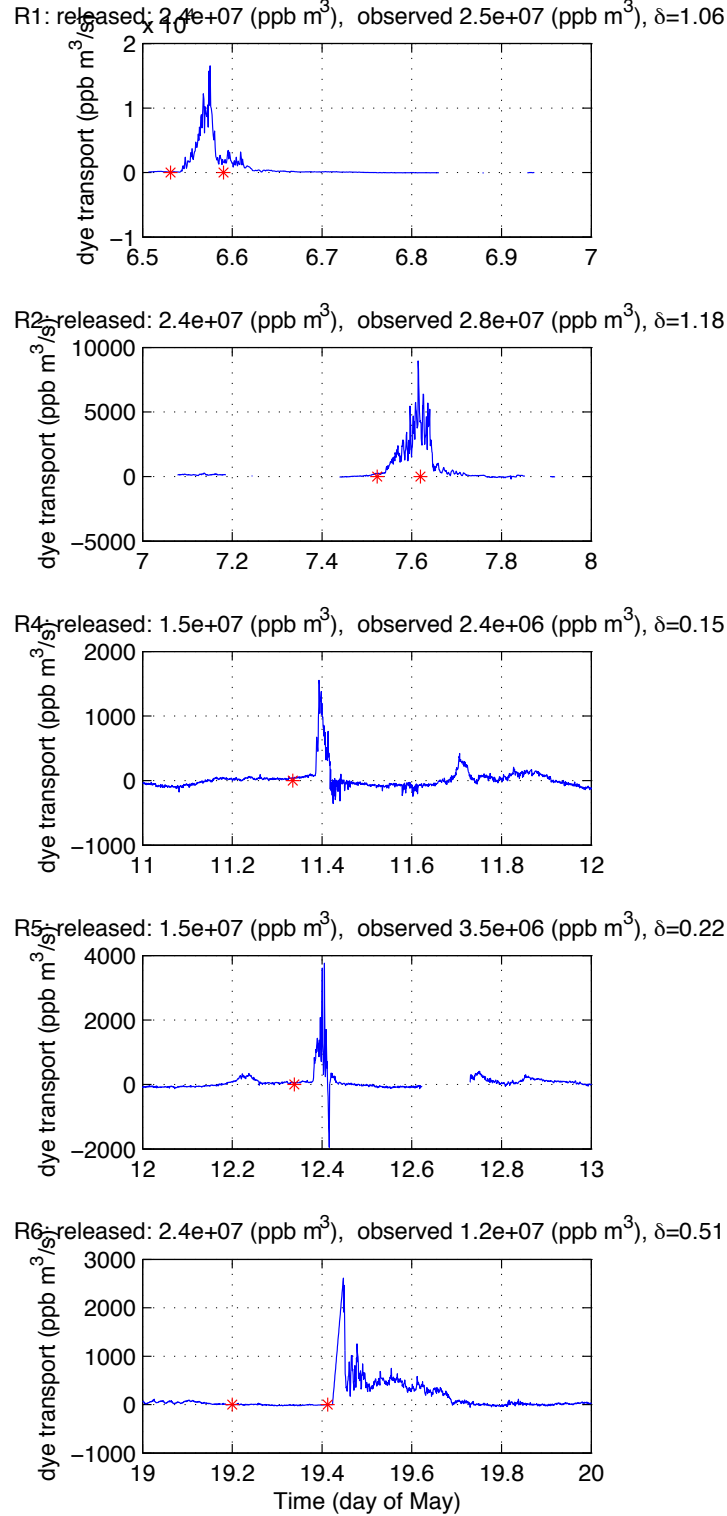


Figure 3: Time series of dye transport $T_{\text{dye}}(t)$ (ppm m³ s⁻¹) versus time for releases R1 (05/06), R2 (05/07), R4 (05/11), R5 (05/12), and R6 (05/19). In each panel the red asterisks denote the start and end of the dye release. Note R4 and R5 were point releases with one asterisk. Atop each panel is given the total dye released, the total observed dye transported, and δ (3).

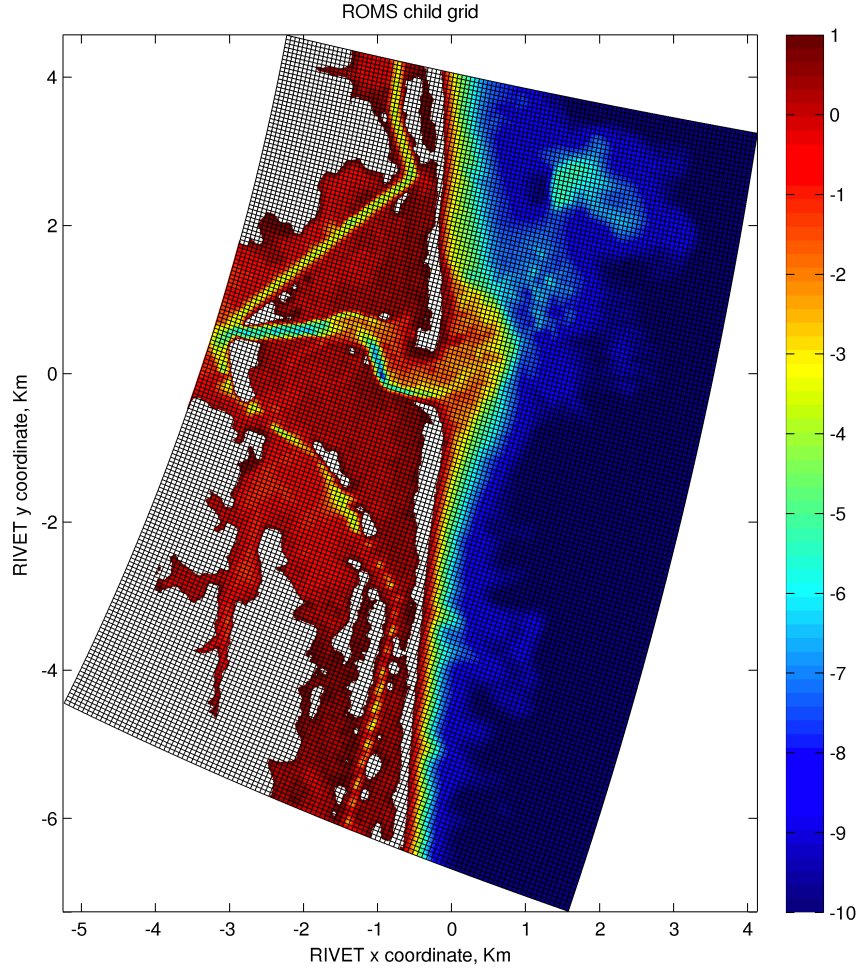


Figure 4: Map of the COAWST (SWAN/ROMS) model grid for the New River Inlet region. Bathymetry is colored (see scale at right) and the land mask is in white. Grid spacing varies between 10–15 m.

In collaboration with Maitane Olabarrieta from the University of Florida, we have performed a number of COAWST (coupled ROMS/SWAN) model simulations of the New River Inlet. This version of the model couples SWAN to ROMS using the vortex-force formalism [Kumar *et al.*, 2012]. A parent grid spanning a 50 km by 30 km is run with ADCIRC tidal forcing, WW3 waves, and observed winds. The simulations on the parent grid are too coarse for detailed simulation of flow and tracer in the inlet. Thus the parent grid simulations serves as boundary condition for simulations on a 7 km by 9 km child grid centered on the inlet (Figure 4), encompassing the ICW and out to 10 m depth in the coastal ocean, and utilizing 15 vertical levels. The model tidal elevations, currents, and waves have been compared to observations at all deployed current meters during the principal 3-week long part of the experiment. As this science topic is reserved for others, particularly Tom Hsu and his graduate student Julie Chen at UDEL, we do not focus on this result.

The dye releases with aerial hyperspectral observations have all been simulated. Here we will

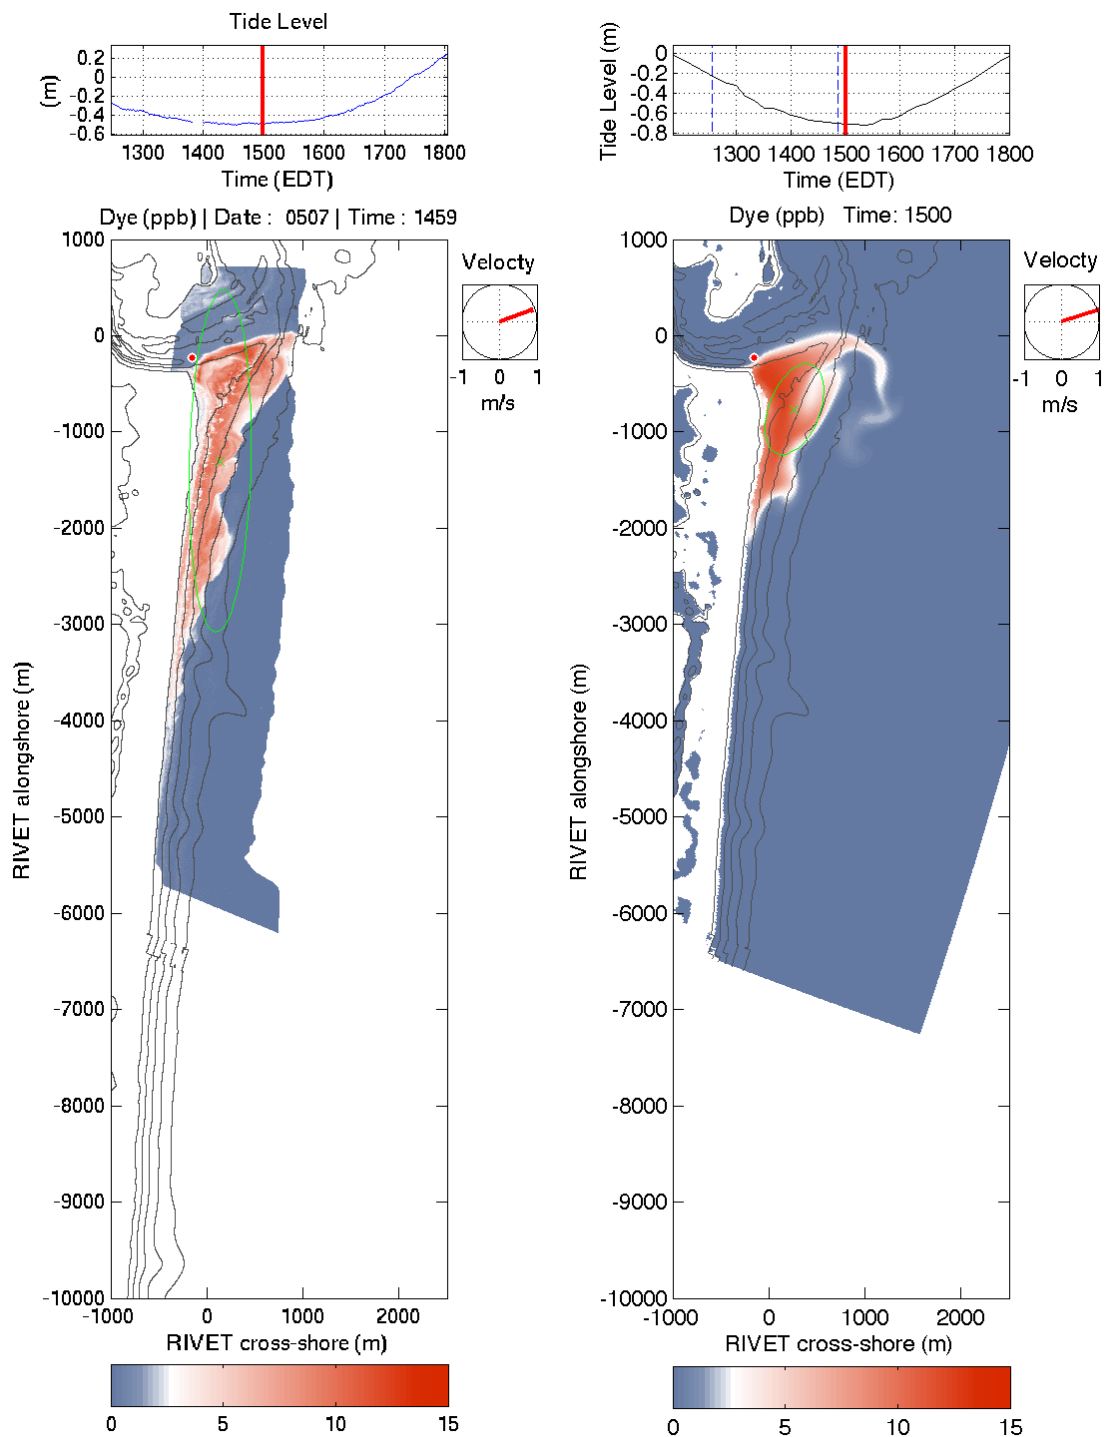


Figure 5: (Left) Observed and (Right) Modeled New River Inlet dye release on May7th at 14:59 EDT. The (top panel) tide is near low. The main panel shows surface dye as a function of x and y in ppb (scale at bottom). The modeled and observed dye field have similar patterns with dye transported over the southern shoal and advecting down coast, although the model down-coast transport is faster than observed. The “velocity” panel just to the right of the dye panel shows the current vector at WHOI ADCP 05 in the heart of the inlet (red dot). Note the similarity of the vector currents. The green ellipse is based on observed dye 2nd moments.

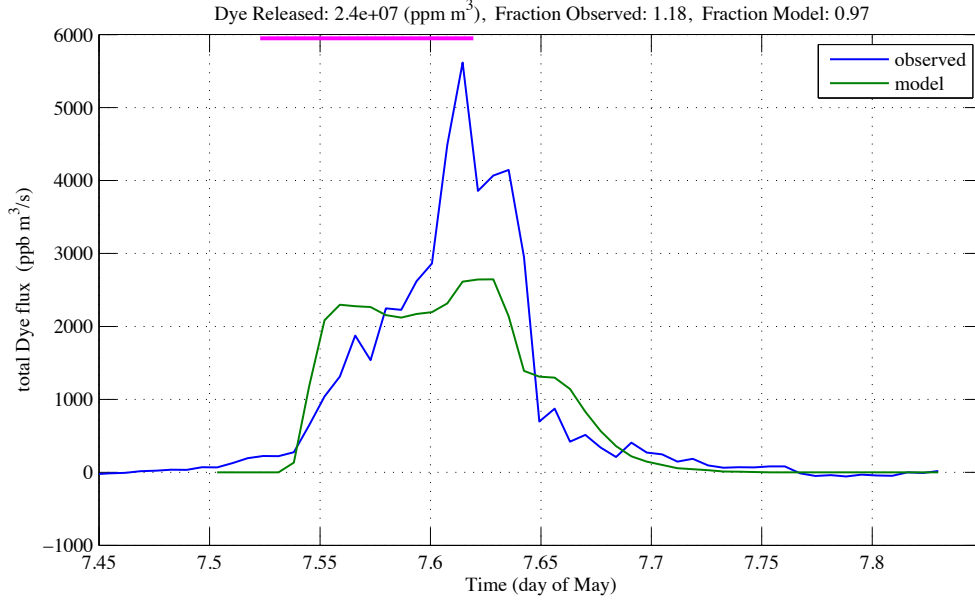


Figure 6: Time series of release R2 dye transport T ($\text{ppm m}^3 \text{s}^{-1}$) versus time for observations (blue) and model (green). The time-period of the dye release in the inlet is indicated by the pink bar.

focus on the continuous release on May 7th. Many features of the observed May 7th dye release are captured in the model. Model-data comparison movies have been posted on the RIVET-1 blog. A frame of the movie just after the 140 minute dye release ended is shown in Figure 5. The dye pathway over the SW shoal out of the inlet is similar in model and observations.

This similarity can be seen by comparing the time-series of observed and modeled dye transport out of the inlet by integrating the flux over the same boundary (Figure 6). The initiation and duration of the dye transport is similar in both as is the magnitude, but the observed dye transport has a larger maximum - about twice the modeled. This may reflect a limitation in calculating transport from a sparse array. Note that the total observed transport on R2 (May 7th) is 20% larger than the total amount of dye released.

The visual similarity between the modeled and observed dye evolution on May 7th can be further quantified by examining the evolution of the dye center of mass (calculated via 1st moments) and dye area (calculated via 2nd moments). The dye center of mass location is very well modeled for $t < 7.65$ day - both in the cross-shore ($\bar{X}$) and alongshore $\bar{Y}$ (top and middle panels in Figure 7). The observed dye area is reasonably modeled - within a factor of 2 (bottom panel Figure 7). The airplane had to return to airport to refuel between $7.63 < t < 7.67$ day.

As can be seen in Figure 6, once dye is past the SW shoal, the observed dye is transported more rapidly down the coast in the “surfzone” than is observed. This can be quantified from the dye moments once the plane resumed sampling. After $t = 7.67$ day, the dye field was advecting down the coast, and the modeled alongshore center of mass $\bar{Y}$ moves down the coast too slowly (see the different slopes in the green curve and the blue asterisks in middle panel Figure 7).

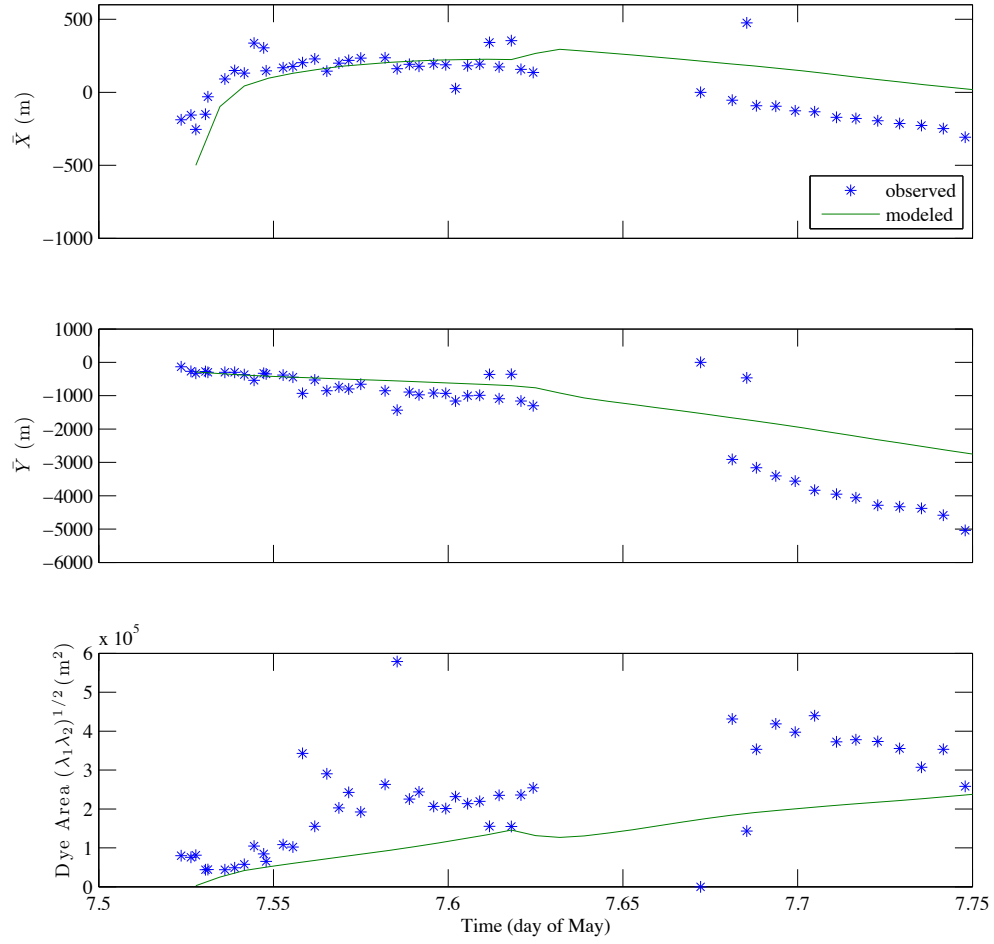


Figure 7: Time series of observed (*) and modeled (solid) May 7th Dye Release moments: (top) Cross-shore dye center of mass $\bar{X}$, (middle) alongshore dye center of mass $\bar{Y}$, and (bottom) dye ellipse area (see Figure 5) derived from 2nd moments.

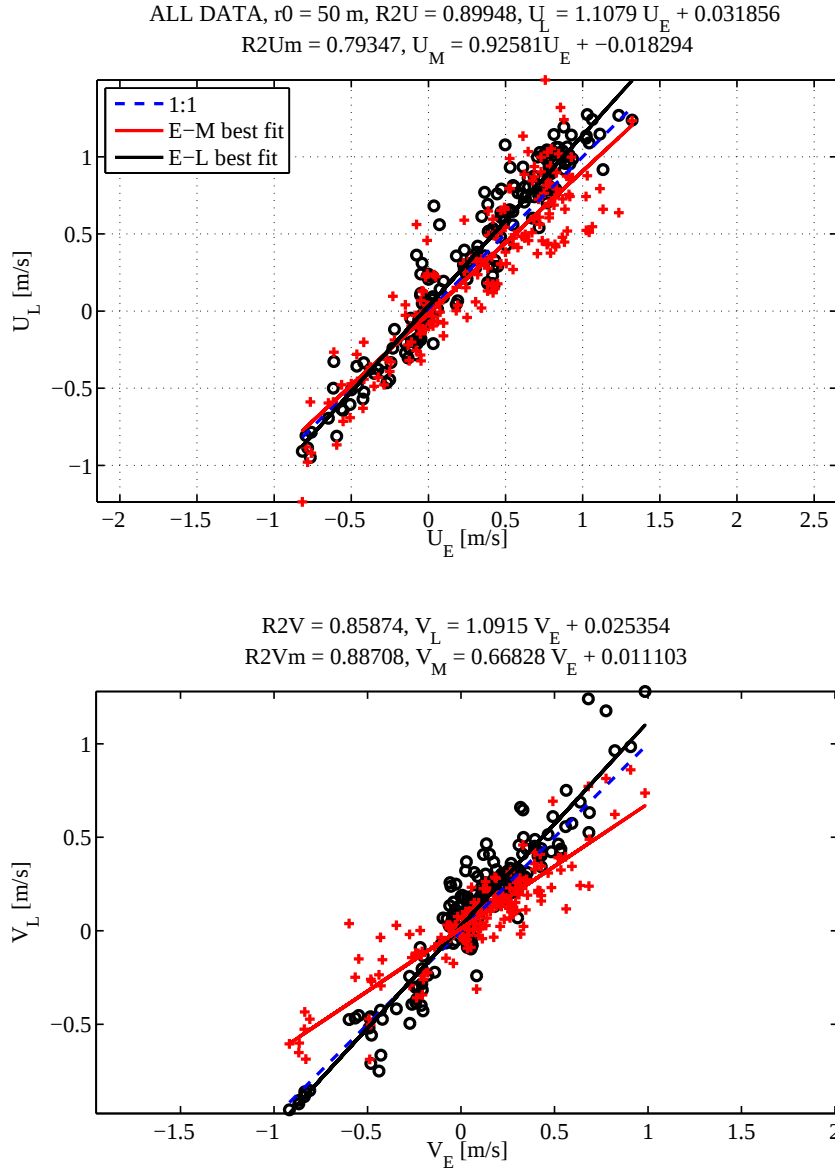


Figure 8: Observed (black) and modeled (red) mean Lagrangian velocities versus Eulerian velocities: (a) RIVET cross-shore, and (b) RIVET alongshore velocities. Best fit and 1-to-1 lines are indicated. On average, observed Lagrangian U and V are 10% larger than current meter values. Cross-shore modeled Lagrangian velocities have more scatter than observed, $r_{obs}^2 = 0.9$, $r_{mod}^2 = 0.8$. Modeled Lagrangian alongshore velocities are smaller than Eulerian, $V_L \approx 0.66V_E$.

4. Analysis of Drifter Observations and Modeling

Assistant Project Scientist Matt Spyrell has been leading the analysis of the RIVET-I drifter observations, and has been strongly collaborating with Tom Hsu and Julie Chen of University

of Delaware and using their SHORECIRC simulations in order to do model-data comparison. To summarize, 35 GPS-tracked drifters were deployed on 8 days of May. An average of approximately 140 drifter hours of data was collected per day. Specifics on the drifter release experiments and visualizations can be found on the blog [here](#).

Here, we focus on two aspects of the drifter observations. First, we compare observed and modeled Lagrangian velocities to the observed (both our own and Raubenheimer/Elgar) ADCP (depth-integrated) and ADV measurements. Lagrangian velocities are binned when they are within 50 m of a current meter and then averaged over a single drifter release. As the Eulerian velocity observations are considered closest to the truth, this allows us to both test the water following properties of the SIO drifters and the accuracy of the model. Some difference is expected because the drifters sample near the surface and many of the current meters sample near the bed.

The primary result is that the observed Lagrangian drifter velocities are quite similar to the Eulerian observed velocities (black symbols in Figure 8, confirming that the drifters are water following. The second is that the modeled Lagrangian velocities are correlated with but too weak (by 1/3) relative to the Eulerian observations (red symbols in Figure 8).

Such differences in observed and modeled Lagrangian velocities will lead to very different drifter trajectories. This is illustrated in Figure 9 where the observed (black) and SHORECIRC modeled (red) drifter trajectories are quite different. Although there was little wind this day, the observed trajectories take a left turn coming out of the inlet whereas the model drifters simply head out the main channel. Drifter dispersion statistics (not shown) are also quite different between the model and observed. How to resolve this (*i.e.*, what is missing in the model) is currently being investigated.

IMPACT/APPLICATIONS

This work will have significant impacts for Science and/or Systems Applications because it will provide (a) understanding regarding the current state of the art model deficiencies in terms of correctly modeling transport and dispersion, (b) guidance in how to improve these models, and (c) provide a testbed for future models.

RELATED PROJECTS

This project is part of the Tidal Inlets and River Mouths DRI. The field work was part of the RIVET-I field experiment held at the New River Inlet in NC. This effort is collaborative with many other RIVET-I experiment participants (Raubenheimer/Elgar/MacMahan/Lippmann/Terrill/Hsu). In addition, through this work we have developed a strong collaboration with Prof. Maitane Olabarrieta from the University of Florida who has performed all of the COAWST model simulations.

References

Clark, D. B., L. Lenain, F. Feddersen, E. Boss, and R. T. Guza, Aerial imaging of fluorescent dye in the nearshore, *J. Atmos. and Ocean. Tech.*, submitted, 2013.

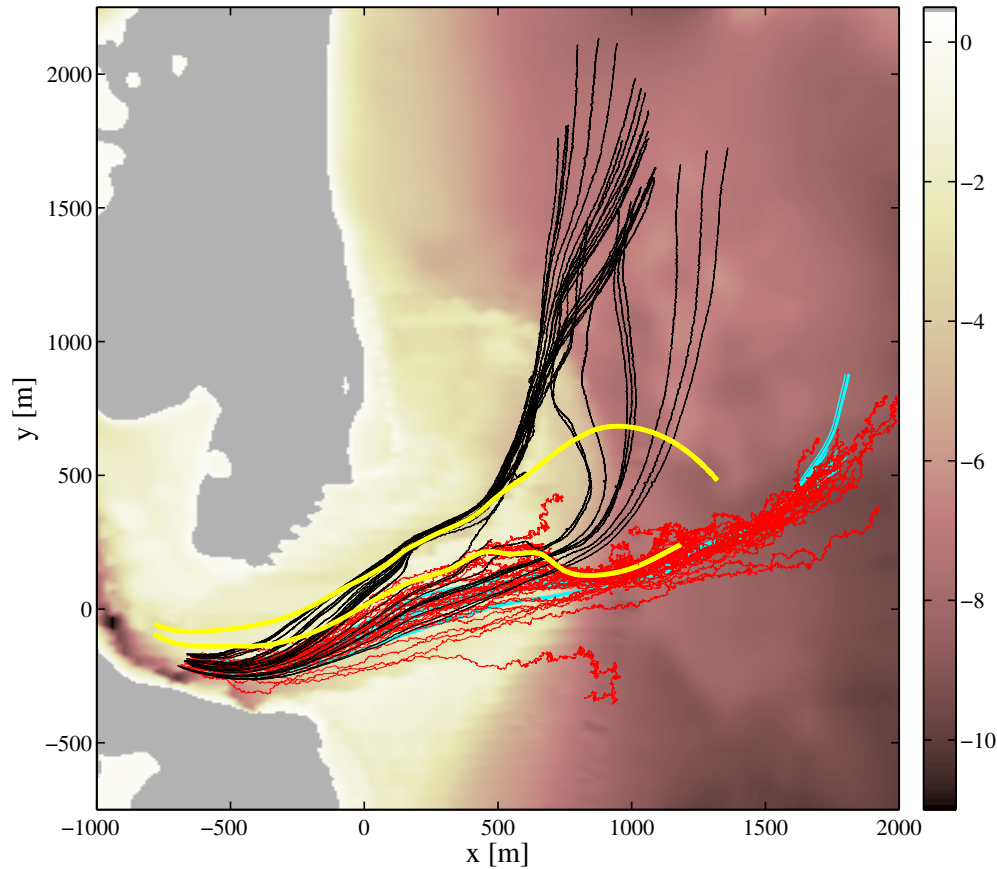


Figure 9: Observed drifter tracks (black) for one ebb tide release. Modeled drifter tracks with (red) and without (cyan) small scale ($K = 1 \text{ m}^2 \text{ s}^{-1}$) diffusivity are released from the same location and time as observed tracks. Modeled tracks released slightly further up the inlet are indicated in yellow. Notice the distinct difference in exit paths and final locations of observed and modeled drifters. Modeled dynamics include tide, wind, and wave forcing.

Kumar, N., G. Voulgaris, J. C. Warner, and M. Olabarrieta, Implementation of the vortex force formalism in the coupled ocean-atmosphere-wave-sediment transport (coawst) modeling system for inner shelf and surf zone applications, *Ocean Modelling*, 47(0), 65 – 95, doi:10.1016/j.ocemod.2012.01.003, 2012.

PUBLICATIONS,

There is currently one submitted publication from this project:

Clark, D. B., L. Lenain, F. Feddersen, E. Boss, and R. T. Guza, Aerial imaging of fluorescent dye in the nearshore, *J. Atmos. and Ocean. Tech.*, submitted, 2013.