AD-A062 065 DAMES AND MOORE LOS ANGELES CA F/G 8/6
ECOLOGICAL EFFECTS OF AN ARTIFICIAL ISLAND, RINCON ISLAND, PUNT--ETC(U)
SEP 78 G F JOHNSON, L A DEWIT DACW72-76-C-0011
UNCLASSIFIED CERC-MR-78-3 NL

1 OF 2
AD A062 065



PIED

OF 2

AD
A062065

1.0 1.1 1.25 1.4 1.6 2.8 3.2 3.6 4.0 2.5 2.2 2.0 1.8

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

LEVEL II (12)

MR 78-3

Ecological Effects of an Artifical Island, Rincon Island, Punta Gorda, California

AD A062065


DDC FILE COPY

by

G.F. Johnson and L.A. deWit

MISCELLANEOUS REPORT NO. 78-3

SEPTEMBER 1978



DDC
RECEIVED
DEC 11 1978
F

Approved for public release;
distribution unlimited.

Prepared for

U.S. ARMY, CORPS OF ENGINEERS
COASTAL ENGINEERING
RESEARCH CENTER
Kingman Building
Fort Belvoir, Va. 22060

78 12 04 · 029

Reprint or republication of any of this material shall give appropriate credit to the U.S. Army Coastal Engineering Research Center.

Limited free distribution within the United States of single copies of this publication has been made by this Center. Additional copies are available from:

National Technical Information Service
ATTN: Operations Division
5285 Port Royal Road
Springfield, Virginia 22151

Contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS BEFORE COMPLETING FORM

1. REPORT NUMBER: MR 78-3
2. GOVT ACCESSION NO.:
3. RECIPIENT'S CATALOG NUMBER:
4. TITLE (and Subtitle): ECOLOGICAL EFFECTS OF AN ARTIFICIAL ISLAND, RINCON ISLAND, PUNTA GORDA, CALIFORNIA
5. TYPE OF REPORT & PERIOD COVERED: Miscellaneous Report
6. PERFORMING ORG. REPORT NUMBER:
7. AUTHOR(s): G.F. Johnson, L.A. deWit
8. CONTRACT OR GRANT NUMBER(s): DACW 72-76-C-0011
9. PERFORMING ORGANIZATION NAME AND ADDRESS: Dames & Moore, 1100 Greendon Avenue, Los Angeles, California 90024
10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS: G31532
11. CONTROLLING OFFICE NAME AND ADDRESS: Department of the Army, Coastal Engineering Research Center, Kingman Building, Fort Belvoir, Virginia 22060
12. REPORT DATE: September 1978
13. NUMBER OF PAGES: 108 (12) 111p.
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office): (18) CERC (19) MR-78-3
15. SECURITY CLASS. (of this report): UNCLASSIFIED
15a. DECLASSIFICATION/DOWNGRADING SCHEDULE:

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Artificial island
Bottom sediment
Ecological effects
Microecosystem
Punta Gorda, California
Rincon Island

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

This study documents marine ecological conditions at Rincon Island, located approximately 0.8 kilometer offshore between Ventura and Santa Barbara, California, in a depth of 14 meters. The island, which was constructed between 1957 and 1958 to serve as a permanent platform for oil and gas production, is particularly suitable for ecological study. Habitat features associated with the armor rock and concrete tetrapods surrounding the island support a "microecosystem" which differs in biotic composition from surrounding natural bottom areas.

(continued)

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

393 643 78 12 04 029


Major associations of macrobiota (organisms >1 millimeter in size) were distinguished on the basis of cooccurrences of conspicuously dominant organisms. Thirteen major associations, covering various parts of the island between the upper intertidal zone and shell debris or natural bottom at the foot of the rock revetments, were defined. The boundaries of each of the major associations and certain questionable or transition zones were mapped over the entire island. These associations were further characterized by extensive measurements of biomass and abundance of macrobiota occurring in quadrats placed according to a stratified random sampling scheme. Using these data, statistically based comparisons of biotic character were made between certain transition areas and definite associations. In some cases, questionable associations were lumped together.

CONT

A major part of the study was devoted to analysis of seasonal dynamics in biotic composition. Permanent transects extending from the high intertidal to natural bottom were established normal to each of the four cardinal sides of the island. All macrobiota were censused in duplicate 1-square meter quadrats along each transect during each of the four seasons. Data analysis indicated that many species exhibit significant variability in abundance from one season to the next.

Other studies included a gill net survey of fish fauna, mapping of mussel "talus" beds at the base of the island, and a survey of biota along a natural bottom transect between the island and shore.

In general, the findings indicate a rich and varied fauna and flora associated with the high-relief solid substrate of Rincon Island which differs substantially from the more depauperate natural bottom habitats in the area.

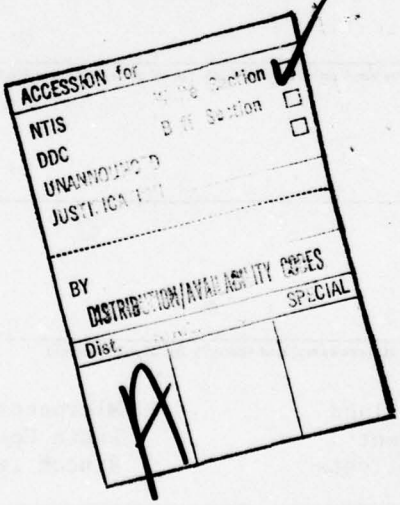

PREFACE

The U.S. Army Coastal Engineering Research Center (CERC) conducts and sponsors research to provide definitive information on the ecological impacts of constructing coastal structures such as groins, jetties, breakwaters, and islands. Rincon Island, Punta Gorda, California, was the first major artificial island to be constructed with full ocean exposure. This report describes an 18-month study sponsored by CERC to examine ecological effects of construction of Rincon Island (CERC Contract No. DACW 72-76-C-0011).

The report was prepared by G.F. Johnson, Project Marine Ecologist, and L.A. deWit, Staff Marine Ecologist, with supervision provided by Dr. B.A. Wales, Principal-in-Charge; all of Dames & Moore, Consultants in the Environmental and Applied Earth Sciences, Los Angeles, California. Professor W.L. Brisby of Moorpark College, Moorpark, California, participated in the fieldwork and provided valuable consultation and review.


Special recognition is due to the following students of Professor Brisby, who were responsible for a major part of the field data acquisition: G. Wilson, D. Ospenson, D. Rasmussen, and R. Dawson. The authors gratefully acknowledge the interest in the project and valuable assistance provided by Dr. J. Siva, J. Hundley, C. Miller, and R. Carlson, all of Atlantic Richfield Corporation.

Marine Ecological Consultants, Inc. of Solana Beach, California, were subcontractors for taxonomic work. Dr. K.R. Critchlow of Dames & Moore assisted during two of the seasonal surveys of permanent transects. Dr. R.A. Park III, Professor of Geology and Ecosystem Analysis, Renssalaer Polytechnic Institute, directed an analysis of data using an R-mode cluster analysis computer program.

A.K. Hurme of the CERC Coastal Ecology Branch was the technical monitor for this contract under the general supervision of E.J. Pullen, Chief, Coastal Ecology Branch.

Comments on this publication are invited.

Approved for publication in accordance with Public Law 166, 79th Congress, approved 31 July 1945, as supplemented by Public Law 172, 88th Congress, approved 7 November 1963.



JOHN H. COUSINS
Colonel, Corps of Engineers
Commander and Director

CONTENTS

		Page
	CONVERSION FACTORS, U.S. CUSTOMARY TO METRIC (SI)	6
I	INTRODUCTION	7
II	PROJECT SETTING	8
III	PREVIOUS RELATED STUDIES	8
	1. General Studies of Artificial Habitat	8
	2. Previous Studies at Rincon Island	11
IV	STUDY METHODS	12
	1. General	12
	2. Reconnaissance Dives	13
	3. Talus Bed Measurements	13
	4. Seasonal Survey of Permanent Transects	13
	5. Mapping of Major Species Associations	13
	6. Quantitative Characterization of Species Associations	17
	7. Natural Bottom Survey	19
	8. Gill Net Surveys	20
V	RESULTS AND DISCUSSION	20
	1. General	20
	2. Volume and Dimensions of Talus Beds	20
	3. Analysis of Seasonal Data from Permanent Transects	39
	4. Distribution of Major Species Associations	50
	5. Quantitative Characteristics of Major Species Associations	51
	6. Gill Net Survey Results	55
	7. Natural Bottom Survey Results	58
VI	SUMMARY AND CONCLUSIONS	62
	LITERATURE CITED	64
APPENDIX		
A	DETAILED METHODOLOGY	67
B	SUMMARY DATA, SURVEY OF PERMANENT SEASONAL TRANSECTS	74
C	R-MODE DENDROGRAMS AND BOUNDARIES OF PRELIMINARY SPECIES ASSOCIATIONS	82
D	SUMMARY DATA, QUANTITATIVE CHARACTERIZATION OF MAJOR SPECIES ASSOCIATIONS	92
E	OBSERVATIONS ALONG NATURAL BOTTOM TRANSECT	101
F	SIEVE ANALYSIS OF NATURAL BOTTOM SEDIMENT SAMPLES	103
G	GLOSSARY	107

CONTENTS--Continued

TABLES

		Page
1	Master species list for Rincon Island.	21
2	Seasonal transect data summary	49
3	Gill net catch per hour at Rincon Island	56
4	Biota of natural bottom sediment samples	60

FIGURES

1	Aerial photograph of Rincon Island, spring 1977.	9
2	Local bathymetry of Rincon Island.	10
3	Locations of permanent seasonal transects, gill nets, natural bottom transect, and sediment grab sampling stations.	14
4	Structrue of permanent seasonal transects.	15
5	North-side talus bed and armor rock measurements	30
6	West-side talus bed and armor rock measurements.	31
7	South-side talus bed and armor rock measurements	32
8	East-side talus bed and armor rock measurements.	33
9	Major species associations, northwest quadrant	34
10	Major species associations, southwest quadrant	35
11	Major species associations, southeast quadrant	36
12	Major species associations, northeast quadrant	37
13	Seasonal overview of distribution of major species associations and substrate character, north-side permanent transect.	40
14	Seasonal overview of distribution of major species associations and substrate character, west-side permanent transect	41
15	Seasonal overview of distribution of major species associations and substrate character, south-side permanent transect.	42
16	Seasonal overview of distribution of major species associations and substrate character, east-side permanent transect	43
17	Vertical distribution for dominant biota, north side	44
18	Vertical distribution for dominant biota, west side.	45
19	Vertical distribution for dominant biota, south side	46
20	Vertical distribution for dominant biota, east side.	47
21	Dominant biota and substrate type along natural bottom transect.	59

CONVERSION FACTORS, U.S. CUSTOMARY TO METRIC (SI)
UNITS OF MEASUREMENT

U.S. customary units of measurement used in this report can be converted to metric (SI) units as follows:

Multiply	by	To obtain
inches	25.4	millimeters
	2.54	centimeters
square inches	6.452	square centimeters
cubic inches	16.39	cubic centimeters
feet	30.48	centimeters
	0.3048	meters
square feet	0.0929	square meters
cubic feet	0.0283	cubic meters
yards	0.9144	meters
square yards	0.836	square meters
cubic yards	0.7646	cubic meters
miles	1.6093	kilometers
square miles	259.0	hectares
knots	1.852	kilometers per hour
acres	0.4047	hectares
foot-pounds	1.3558	newton meters
millibars	1.0197×10^{-3}	kilograms per square centimeter
ounces	28.35	grams
pounds	453.6	grams
	0.4536	kilograms
ton, long	1.0160	metric tons
ton, short	0.9072	metric tons
degrees (angle)	0.01745	radians
Fahrenheit degrees	5/9	Celsius degrees or Kelvins[1]

[1]To obtain Celsius (C) temperature readings from Fahrenheit (F) readings, use formula: $C = (5/9)(F - 32)$.

To obtain Kelvin (K) readings, use formula: $K = (5/9)(F - 32) + 273.15$.

ECOLOGICAL EFFECTS OF AN ARTIFICIAL ISLAND

Rincon Island, Punta Gorda, California

by
G.F. Johnson and L.A. deWit

I. INTRODUCTION

Several studies on the ecological effects of the addition of artificial substrate in a nearshore coastal marine environment have been conducted in the past. The California Department of Fish and Game, for example, has made detailed studies at oil platforms and in areas where artificial reefs composed of streetcars, old car bodies, concrete cubicles, and riprap have been established (Carlisle, Turner, and Ebert; 1964; Turner, Ebert, and Given, 1969).

In general, these studies conclude that the habitat features created by the addition of solid substrate are beneficial to the local ecosystem, especially in areas where such substrate is limited. In time, communities of organisms develop which usually support more species than the sedimentary habitat that existed before the addition of hard, high-relief substrate. The biomass of the encrusting flora and fauna is an important food source for species of recreational, commercial, or aesthetic value which would otherwise not populate the area. In addition, physical characteristics of the solid substratum, such as crevices and vertical relief in an otherwise featureless bottom, attract a variety of fishes.

The armor rock revetments of Rincon Island represent a significant addition of solid substratum to the local nearshore marine environment which has contributed to an enhancement in the richness of local marine communities (Carlisle, Turner, and Ebert, 1964; Brisby's Biota Appendix in Keith and Skjei, 1974). Although observations on Rincon Island's marine life have been made since these studies, no comprehensive delineation of major habitats nor detailed characterization of communities extant at any one time or on a seasonal basis has been done. This study was undertaken with the recognition that this information would be valuable in understanding the ecological consequences of artificial island construction. The objectives of the study were to:

(a) Delineate, map, and quantitatively characterize major species associations around Rincon Island, and compare these with the biota of the natural bottom between the island and shore;

(b) document the morphology and volume of the beds of shell debris lying along the flanks of each of the four cardinal sides of the island;

(c) establish permanent transects on each side of the island and survey major benthic organisms along these transects on a seasonal basis, documenting changes in biotic composition and habitat character; and

(d) conduct a gill net survey of the fish on each side of the island; and

(e) expand the existing species list of the area.

II. PROJECT SETTING

Rincon Island is located in the Santa Barbara Channel approximately midway between the cities of Santa Barbara and Ventura, California. The island is about 0.8 kilometer off Punta Gorda in about 14 meters of water, and is connected to the mainland by a causeway (Fig. 1). The extreme tidal range at the island is 3.05 meters. Mean sea level (MSL) lies 0.79 meter above mean lower low water (MLLW). The island covers about 0.026 square kilometer of ocean floor and the area above MLLW is approximately 0.013 square kilometer.

The island is constructed of rock revetments containing sandfill. It was constructed in stages between February 1957 and September 1958, using many types and gradations of quarry rock. The most exposed face (west side) is protected with 1,130 concrete tetrapods, each weighing about 31,000 kilograms. The general shape of the island and the local bathymetry are shown in Figure 2 (Dames & Moore, 1974). Bottom conditions vary uniformly throughout the area (Blume and Keith, 1959). The sediment consists of silty sand ranging into sandy silt with a thickness ranging from 4.3 to 7.6 meters. It overlies a geologically recent shale or "siltstone" formation. Average bottom slope is 3 percent.

Details of the construction and engineering considerations in the design of Rincon Island are summarized in Keith and Skjei (1974) and Blume and Keith (1959).

III. PREVIOUS RELATED STUDIES

1. General Studies of Artificial Reef Habitat.

The value of artificial structures for attracting marine fishes was the subject of many papers presented at an International Artificial Reef Conference, cosponsored by Texas A&M University, the Texas Coastal and Marine Council, and the National Marine Fisheries Service (Colunga and Stone, 1974). The fish-attracting properties of nearshore artificial reefs composed of tires, car bodies, and riprap on the gulf and Atlantic coasts have been documented by Buchanan (1972), Stone (1972, 1973); Stone, Buchanan, and Parker (1973); and Stone, Buchanan, and Steimle (1974). The latter investigators reported an increase in the fish-carrying capacity of an area 300 to 1,800 times that of the open bottom before reef construction.

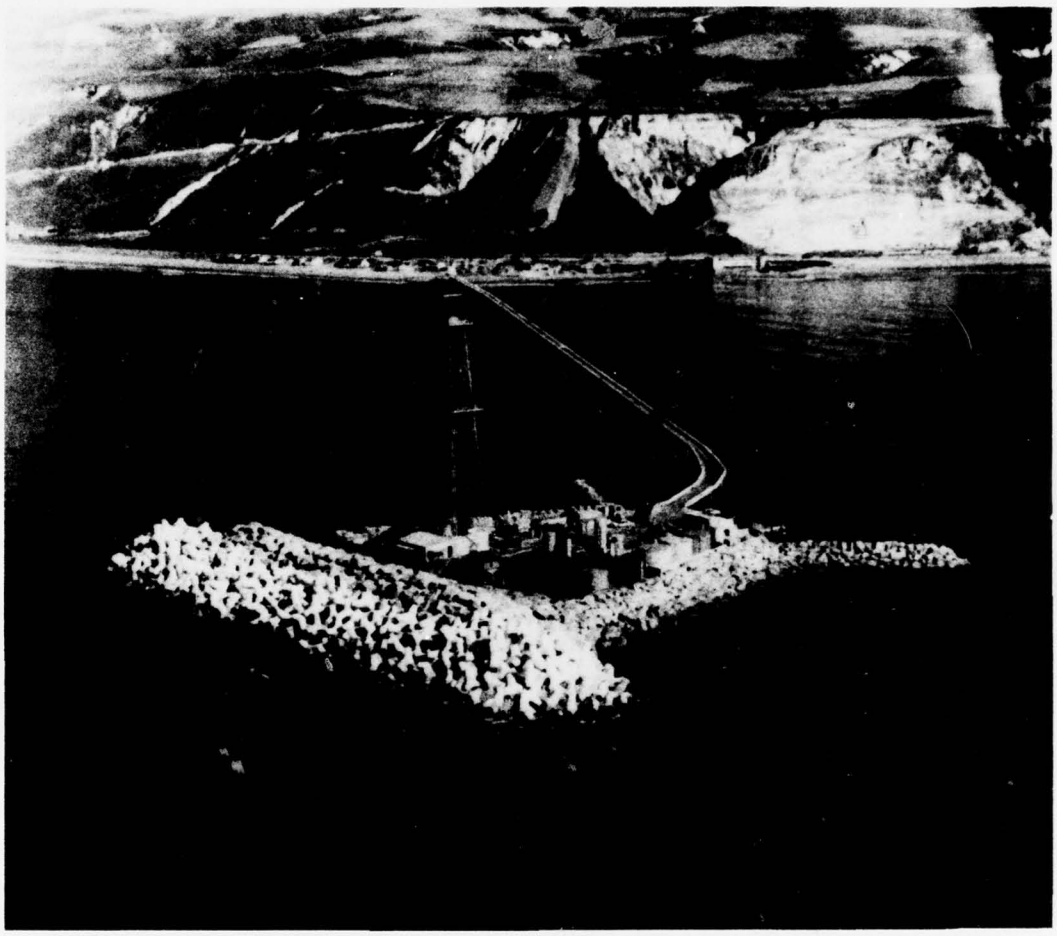


Figure 1. Aerial photograph of Rincon Island, spring 1977.

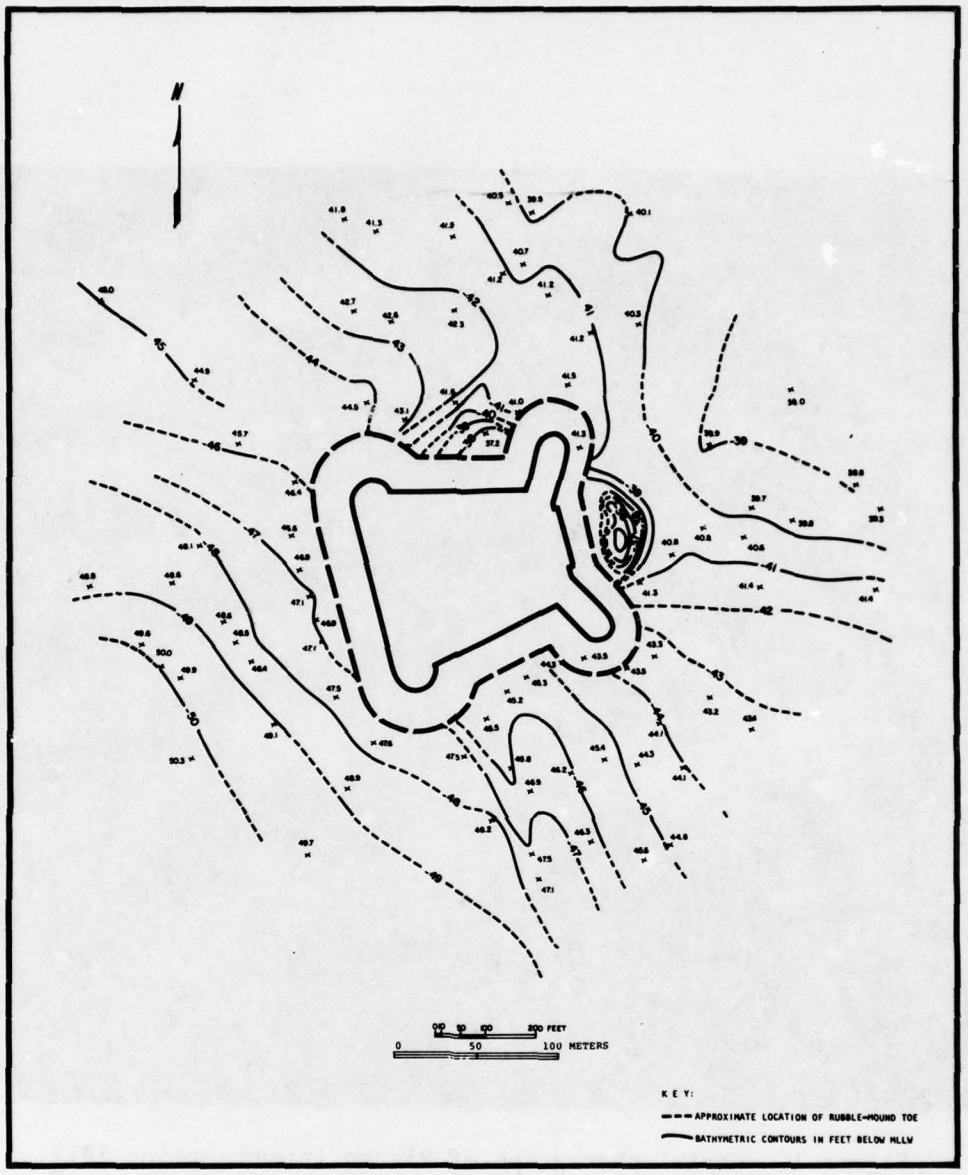


Figure 2. Local bathymetry of Rincon Island (from Dames & Moore, 1974).

Studies of artificial substrate properties affecting fish attraction and ecological succession in southern California were reported by Carlisle, Turner, and Ebert (1964), Turner, Ebert, and Given (1969), and Fager (1971). Carlisle, Turner, and Ebert (1964) conducted visual surveys of biota in bottom areas before and after artificial reef establishment, noting that fishes were attracted within hours of reef construction. Carlisle, Turner, and Ebert (1964) also made ecological observations at a number of offshore oil installations, including Rincon Island. They concluded that these sites exhibited similar attractions for fish and, more generally, that "habitat changes brought about by establishing offshore oil-drilling installations were generally beneficial to the flora and fauna."

Results of a 4-year study of various aspects of manmade reef ecosystems and optimal materials for reef construction, conducted by the California Department of Fish and Game, were published by Turner, Ebert, and Given (1969). Of four types of reef construction materials evaluated, quarry rock was judged optimal on the basis of practicalities of cost and handling, fish attraction (although concrete shelters were better in this regard), and minimal sediment disturbance. More than 200 invertebrate taxa were recorded during the study. Succession on the newly established reefs proceeded from an initial barnacle-hydroid phase, into a mollusk-polychaete assemblage, to an ascidian-sponge stage, and finally a stage characterized by the presence of abundant encrusting ectoprocts (moss animals). Aggregate anemones, gorgonians, and stony corals appeared in later stages. Approximately 5 years was required for successional change to cease on these artificial reefs.

2. Previous Studies of Rincon Island.

The California Department of Fish and Game biologists made an initial survey of Rincon Island in July 1958, 18 months after construction of the island began (Carlisle, Turner, and Ebert, 1964). They conducted 26 observational dives over the period, August 1958 to December 1960. Despite many fluctuations, possibly due to water clarity or incoming year classes of fishes, an overall upward trend in fish populations was observed. Toward the end of the survey period the biota of the island had the appearance of "a well-balanced animal community." Fifty-three species of fish belonging to 44 genera in 22 families were observed during this study. About 97 percent of the fish fauna belonged to the following groups: silverside *(Atherinidae)*, surfperch *(Embiotocidae)*, sea bass *(Serranidae)*, damselfish *(Pomocentridae)*, rockfish *(Scorpaenidae)*, and halfmoon *(Scorpidae)*. The biologists noted populations of large, active fishes in turbulent waters along the west (seaward) side of the island, sedentary forms such as sculpin *(Cottidae)*, and rockfish occupying spaces among the rocks, and the young of many species (especially kelp bass *(Paralabrax clathratus)*, blacksmith *(Chromis*

punctipinnis), and species of surfperch and rockfish) apparently using the kelp beds in the lee of the island as nursery grounds.

Approximately 54 months after island construction, the invertebrate fauna and algae were surveyed along a transect on the east (lee) side of the island by sampling a 0.09-square meter area at each 3.05-meter depth interval. This sampling was augmented with numerous diving observations. The results of the survey are summarized in Appendix H of Carlisle, Turner, and Ebert (1964). Relatively high densities and a pronounced vertical zonation in major taxonomic groups were apparent.

The work of the California Department of Fish and Game biologists provided an idea of the pattern of early colonization for Rincon Island. Brisby's Biota Appendix in Keith and Skjei (1974) provided valuable insight into the contrast between ecological conditions associated with the island and those of the natural bottom at the site of the island before its construction. Brisby knew the area before construction, and has had an arrangement with the Atlantic Richfield Company to use the island since its construction as a field station for educational purposes. His study methods involved use of scuba techniques, surface craft, mechanical collecting gear (including Peterson grabs, dredges, trawls, traps, and other fishing gear), and underwater photography. Brisby's conclusions provide a basic introduction to the island's ecology.

In summary, Brisby found that with construction of the island, the area developed from a biologically depauperate condition into a mature and balanced reef. Before construction, only 14 species of benthic fish were observed. After establishment of a "climax" community on the island, 298 species, representing all major marine phyla, were recorded. Ecological characteristics were somewhat different on each of the four sides of the island, owing to differences in degree of exposure to waves and currents. High water turbidity typified conditions on the landward side of the island. The seaward side was reported to be particularly rich in life. The other two sides were observed to provide an intermediate environment and each, because of differences in exposure, had a somewhat different ecology. "Talus slopes" of mollusk shells were observed along the bases of the three seaward sides.

IV. STUDY METHODS

1. General.

This study was divided into five major subtasks. Detailed information on specific methodologies is provided in Appendix A.

2. Reconnaissance Dives.

The first subtask involved reconnaissance dives by two diver biologists to make a preliminary survey of major species associations around the island. A limited amount of randomly placed quadrat sampling was done to determine variability in densities of biota.

3. Talus Bed Measurements.

The second subtask was to calculate the volume of the mounds of mollusk shells and shell fragments at the base of the rock revetments around the island (shell "talus"). The dimensions of the talus beds were determined and volumes of shell debris in the beds along each of the four cardinal sides were estimated.

Dimensions of the shell talus beds were determined by the following method. Divers swam along each of the cardinal sides of the island, noting significant changes in the morphology of the talus bed (i.e., changes in slope or upper and lower margin). Where such changes occurred, the distance between the upper and lower margins was measured using a steel tape. Depths of the upper and lower margins were also recorded to $\pm$0.2 meter. Cross-sectional geometry of the talus bed at each measurement point was determined from the distance from the waterline, water depth, and slope of the rock revetment. These cross sections were plotted on base charts for each of the four cardinal sides. The volume of the accumulated shell material along each side of the island was then estimated. Boundaries of the talus beds were charted.

4. Seasonal Survey of Permanent Transects.

The third subtask was to survey permanent transects on the island to determine seasonal variability in densities of macrobiota. Transects, extending from the upper limit of the wave splash zone to the limit of the island's influence on the bottom, were established on the four cardinal sides of the island (Fig. 3). These transects were surveyed during each season for 1 year (see App. B for a summary of the data).

Heavy stakes of steel angle iron marked the upper and lower limits of each transect. A single stake was anchored in the armor rock above the splash zone on each side of the island, marking the upper limit of the transect. Three identical stakes were driven into the natural bottom sediment near the seaward margin of the talus bed, and were alined parallel to each side. The three stakes were connected with 0.6-centimeter-diameter polyethylene line and floats were attached to each stake to facilitate locating them during conditions of restricted visibility (Fig. 4).

A nylon line marked off in 1-meter increments, was used as the transect line. During each survey, one end of the transect line was

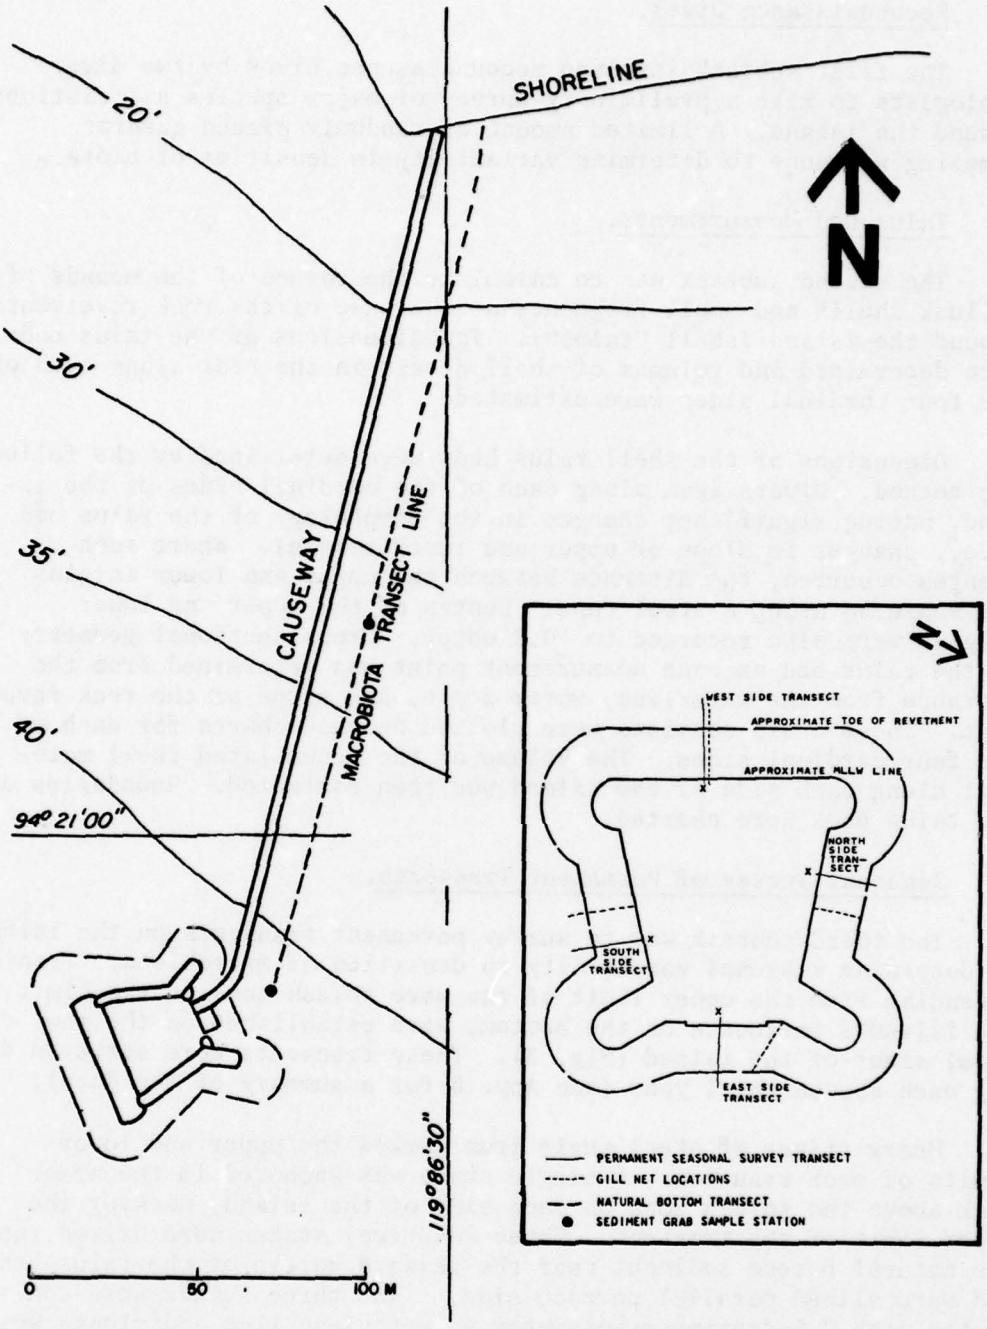


Figure 3. Locations of permanent seasonal transects, gill nets, natural bottom transect, and sediment grab sampling stations. (Depth contours in feet below MLLW.)

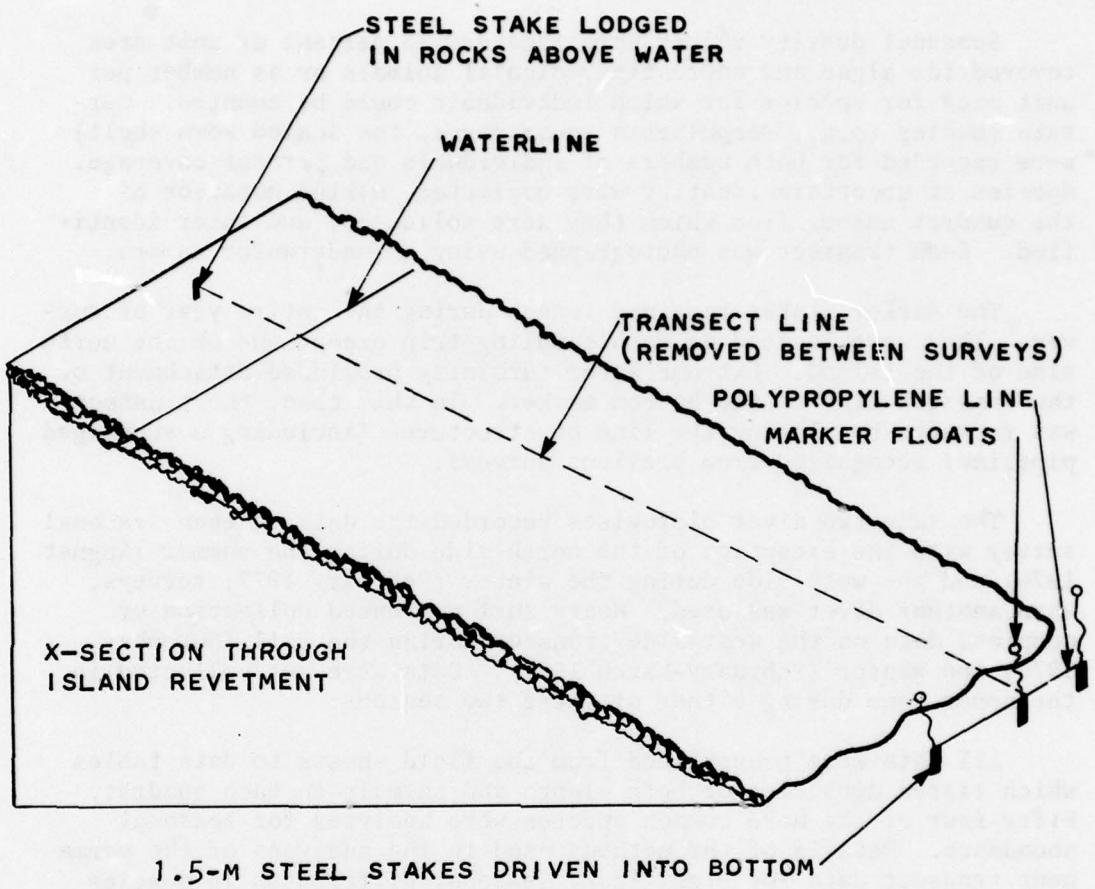


Figure 4. Structure of permanent seasonal survey transects.

attached to the upper (splash zone) marker stake and the other end was attached to the center stake on the bottom. This ensured examination of the same area on each side during the four seasonal surveys. Divers carrying 1-square meter quadrats, underwater clipboards, and plastic collecting bags swam the transect lines, recording data on densities of all species of macrobiota (in duplicate samples) at 1-meter increments.

Seasonal density values were recorded as percent of unit area covered for algae and encrusting colonial animals or as number per unit area for species for which individuals could be counted. Certain species (e.g., *Serpulorbis squamigerus*, the scaled worm shell) were recorded for both numbers of individuals and percent coverage. Species of uncertain identity were collected, making notation of the quadrat number from which they were collected, and later identified. Each transect was photographed using an underwater camera.

The marker stakes remained intact during the entire year of survey. They were located on each sampling trip except one on the north side of the island. Extreme water turbidity precluded attachment of the transect line to the bottom marker. In this case, the transect was repeated by placing the line on structures (including a submerged pipeline) recognized from previous surveys.

The same two diver biologists recorded the data on each seasonal survey with the exception of the north side during the summer (August 1976) and the west side during the winter (February 1977) surveys, when another diver was used. Heavy surf prevented collection of complete data on the west-side transect during the fall (November 1976) and winter (February-March 1977). Data were not collected in the upper zone during either of these two seasons.

All data were transcribed from the field sheets to data tables which listed densities of both plants and animals in each quadrat. Fifty-four of the more common species were analyzed for seasonal abundance. Details of the methods used in the analyses of the permanent transect data for significant seasonal differences in species densities are provided in Subsection 2 of Appendix A.

5. Mapping of Major Species Associations.

The fourth subtask was to chart the distribution of major species associations over all submerged parts of the island. A series of charts was prepared depicting the boundaries of major species associations and the spatial disposition of these associations, accurate to $\pm$0.2 meter in depth and $\pm$0.3 meter in horizontal distance from permanent reference points on the island. This phase of the work required identification of faunal and floral associations on the basis of substrate character and recurrent groups of species that were conspicuous by virtue of size, abundance, or biomass.

Initial identification of major species associations was based on subjective judgment developed during reconnaissance and permanent transect diving. These preliminary identifications were corroborated by computer analysis of the field data. An R-mode cluster analysis program (unweighted pair-group arithmetic average clustering method (UPGMA) as described by Sneath and Sokal, 1973) was used. Input data consisted of presence-absence designations for all species encountered in each 1-square meter quadrat from the east and north sides for the summer (August) and fall (November) seasonal surveys.

The program generates a matrix of similarity for all species. A CALCOMP plotter program was used to generate dendrograms showing the aggregate hierarchical classification among species (see App. C). On the basis of this information, 13 tentative species associations were identified.

Measurements were made to the boundaries of the various species associations from fixed reference points around the island. Depths (referenced to MLLW) and distances were recorded at transition zones or boundaries between associations. These measurements were taken along transects located at 10-meter intervals around the island (5-meter intervals were used around the four corners of the island to assure adequate radial coverage). The starting point for each transect was the upper boundary of the barnacle-limpet zone. In plotting the data, boundaries of associations were extrapolated between transect lines to depict the distributions of the associations. Actual distances were plotted on a base chart of the island. Boundaries of the talus beds, measured during the fourth subtask, were also plotted on this chart. The actual distances were then trigonometrically rectified for plan view plotting according to the methodology in Appendix A,3.

Areas covered by each species association were determined by cutting out the associations on the base chart (before trigonometric rectification), weighing the pieces from each association on a Mettler analytical balance to a precision of $\pm$0.001 gram, and calculating the percent each association represents of the total area of the island bounded by the upper limit of the barnacle-limpet zone and the lower limit of rock on the bottom.

6. Quantitative Characterization of Species Associations.

The fifth subtask involved quantitative characterization of the species associations. Biomass and densities of macrobiota around the island were measured. Analysis of these data provided the rationale for separating or combining associations lying adjacent to one another or on different sides of the island.

Densities and biomass of macrobiota within the associations were determined using randomly placed sample quadrats. Quadrats used in all associations except those in the upper intertidal were of 0.25-square meter size. Duplicate 0.01-square meter quadrats were used in the upper zones. Numbers drawn from a random numbers table, equating to vertical and horizontal distances from permanent points on the island, were used in locating the sampling quadrats.

Divers measured the distances with an underwater steel tape and then, looking away from the bottom, released the quadrat about 1 meter above the bottom. This minimized sampling bias. If the quadrat came to lie in or over a crevice between rocks, it was released a second time.

The depth of the quadrat and time of sampling were recorded and the area within the quadrat was photographed. A record was made of the densities of each species within the quadrat (numbers or percent coverage). Large organisms less than 50 percent enclosed within the quadrat boundaries were not recorded. All detachable macrobiota were removed and placed in labeled plastic bags for subsequent biomass measurement. The contents of each collecting bag were wet-blotted and weighed on a triple-beam balance (precision approximately $\pm$0.2 gram). Wet weights were recorded for each species.

To develop biomass data on organisms that are permanently attached to the substrate, measured areas were scraped by a diver using a steel chisel and hammer. The removed fragments were collected, using a specially designed slurp gun, fitted with a collecting chamber lined with Nitex plankton netting of 333-micrometer mesh size. Contents of the collecting chamber were subsequently weighed as described above.

All raw data (numbers, percent coverage, and wet weight for each species) were tabulated for each quadrat. Tables were arranged in columnar form with species categories across the top and quadrat numbers along the left-hand margin. Quadrats were grouped according to the association and the sampling locations. Quadrats within transition zones and from apparently similar associations on different sides of the island were separated to facilitate testing against "type" association quadrats (those lying well within the boundaries of distinct associations). These quadrats were then either combined with or separated from type associations.

This method of tabulation permitted calculation of summary statistics for all species in each association which in turn facilitated intercomparison of the characteristics of these associations. The following summary statistics were calculated: Frequency (ratio of number of quadrats of occurrence to number of quadrats sampled in each group); mean abundance and 95-percent confidence limits for the mean abundance; and average weight per individual (or per 100-square

centimeter coverage for species whose densities were estimated as percent coverage).

Comparison of summary statistics on biomass and densities permitted separation of associations in a subjective manner for the intertidal associations (down to and including the macrophytic algae zone). However, this approach was too arbitrary when it came to identifying possible differences between similar associations on different sides of the island or between associations grading into one another on the same side. For these instances, a more rigorous statistical test was necessary. Application of parametric statistical tests requires that the data be normally distributed. This was not the case for most of the data collected during quantitative sampling. Also, it is unlikely that data transformation could be effectively used to normalize the data. The nonparametric Wilcoxon "t" test (Tate and Clelland, 1957) was applied to test differences between densities of selected dominant species within potentially similar associations and between dissimilar associations. An association on the north side, which is dominated by the encrusting coralline alga, *Lithothamnium-Lithophyllum* complex, was selected as the type association against which most other associations were tested.

7. Natural Bottom Survey.

In addition to the above subtasks, ecological conditions in nearby natural bottom habitats were investigated. This information was to aid in interpreting the ecological changes induced by the presence of the island.

The composition of the epibenthic macrobiota (plants and animals) on or just above the surface of the sediment or rock on the natural bottom between the island and shore was surveyed along a transect located away from the influence of the island and causeway (Fig. 3). The transect survey was completed in two segments. The first segment, over a depth of 13.7 meters MLLW near the island to a depth 6.1 meters MLLW toward shore, was surveyed by divers using Farallon underwater propulsion units. The second segment, extending from shore to the 6.1-meter MLLW depth, was surveyed by divers entering through the surf and swimming offshore. Triplicate sediment samples for infauna (animals inhabiting the sediments) were taken at the outer terminus of the transect at a 13.7-meter depth and at a point midway in the transect at a depth of 10.7 meters MLLW (Fig.3). The samples were collected by pushing 3.13-liter lidless coffee cans into the sediment and carefully sealing both ends of the cylinder with plastic caps. Samples for grain-size analysis were collected by pushing 0.2-liter jars 10 centimeters into the sediment. Infaunal samples were sieved through 1-millimeter sieve screens and preserved for later taxonomic analysis.

8. Gill Net Survey.

A gill net survey was conducted on 15 and 16 June 1977. A single multimesh nylon monofilament net, 30.5 meters long and 2.4 meters deep, was deployed obliquely along each cardinal side of the island (Fig. 3). The nets consisted of ten 3.05-meter-long panels with two panels each of 1.27-, 2.54-, 3.81-, 5.08-, and 6.35-centimeter bar mesh. Position of these panels in the net was random. When deployed, the nets extended from the intertidal zone of the island to the toe of the island revetment. The nets were fished for two periods: a daytime period of about 4 hours, and a day-night period ranging from a minimum of 17 hours (west side) to a maximum of 23.5 hours (east side).

Fishes caught in each net were removed and identified, and a record was made of the standard length (snout to distal end of caudal peduncle) for bony fishes and total length (snout to end of caudal fin) for sharks. Lengths were recorded to the nearest 0.5 centimeter. Numbers of individuals occurring in each mesh size were also recorded. Summary data tables were prepared listing numbers of individuals, mean length, and length range for each species captured on each side of the island.

V. RESULTS AND DISCUSSION

1. General.

A total of 330 species of macrobiota was identified during this study; 160 of these taxa had not been reported as occurring at Rincon Island. This addition to the number of species reported in Keith and Skjei (1974) brings the total species list to 458. Many additional species undoubtedly exist among the island's varied habitats. An updated master list of taxa of Rincon Island is given in Table 1.

2. Volume and Dimensions of Talus Beds.

Dimensions of the shell talus beds along each of the four cardinal sides are shown in perspective view in Figures 5 to 8 and in plan view in Figures 9 to 12. (The upper boundaries of the talus beds do not match precisely with the lower boundaries of the deepest associations in these figures for two reasons: First, talus bed measurements were taken at positions of change of the talus bed geometry, while associations were measured along fixed transects; second, the deepest association frequently extended into the talus bed on isolated rocks.) Approximate volumes of shell calculated from the measurement of talus bed dimensions are as follows:

West side:	1,450 cubic meters
South side:	98 cubic meters

Table 1. Master species list for Rincon Island.

Scientific name[1]	Common name	Occurrence during present study			
		North	West	South	East
ALGAE					
DIVISION CHLOROPHYTA	**GREEN ALGAE**				
Bryopsis corticulans[2]					
Chaetomorpha aerea[2]					
Cladophora sp.					X
Codium fragile	Deadman's fingers			X	
Derbesia marina		X			
cf. *Enteromorpha* sp.				X	X
Ulva sp.	Sea lettuce	X	X		X
Unid. green algae #1				X	
DIVISION CYANOPHYTA	**BLUE-GREEN ALGAE**				
cf. *Phormidium* sp.		X	X	X	X
DIVISION PHAEOPHYTA	**BROWN ALGAE**				
Cystoseira osmundacea		X			X
Desmarestia herbaceae[2]					
Dictyota binghamiae		X			
D. flabellata			X	X	X
Ectocarpus sp.[2]					
Egregia menziesii (=laevigata)	Feather-boa kelp	X	X		
Giffordia granulosa					X
Halidrys dioica[2]					
Macrocystis sp.	Giant kelp	X			
Petrospongium rugosum[2]					
Pterygophora californica[2]					
Ralfsia pacifica					
Taonia lennebackeriae					X
Unid. brown alga #1					X
Unid. brown alga #2					X
Unid. brown alga #3					X
Unid. juv. laminariales					X
DIVISION RHODOPHYTA	**RED ALGAE**				
Antithamnion sp.					X
Bossiella orbigniana		X	X	X	
Bossiella sp.					
Callithamnion sp.[2]					
Callophyllis flabellulata					X
Ceramium codicola					
cf. *Ceramium* sp.		X	X	X	X
Corallina officinalis		X	X	X	
Cryptopleura cf. *crispa*					
Delesseria sp.					X
Gelidium coulteri		?		X	
G. cf. *robustum*		X		X	
G. purpurascens		X			
G. cartilagineum		?	X		X
G. sp. #1					X
G. sp. #2		X			X
Gigartina canaliculata			X	X	X
G. cf. *exasperata*			X	X	X
G. sp.				X	
G. spinosa armata		X		X	
G. sp. (juv.)				X	X
Grateloupia doryphora (=abreviata)		X		X	
Hildenbrandia prototypus[2]					
Laurencia pacifica			X		
Lithothamnium/Lithophyllum complex		X	X	X	X
Lithothrix aspergillum					
Lomentaria hakodatensis					X
Microcladia cf. *coulteri*					
Neoagardhiella (=Agardhiella) sp.		X			X
Peyssonellia sp.		X	X	X	X

See footnotes at end of table.

Table 1. Master species list for Rincon Island.--Continued.

Scientific name[1]	Common name	Occurrence during present study			
		North	West	South	East
DIVISION RHODOPHYTA (Continued)					
Platythamnion villosum					
P. sp.		X	X		X
Polysiphonia simplex				X	
P. cf. *pacifica*				X	
P. spp.					X
Porphyra perforata[2]					
Prionitis lanceolata		X	X	X	X
Pterosiphonia dendroidea					
Pterosiphonia sp.			X		X
Rhodoglossum affine		X	X	X	
Rhodymenia sp.			X	X	X
R. californica		X			
cf. *R.* sp.					X
Schizymenia pacifica					
Stenogramme interrupta		X	X	X	X
Tiffaniella snyderiae					X
Veleroa subulata/Murrayellopsis dawsonii complex		X	X	X	X
Unid. red alga #1		X		X	
Unid. red alga #2				X	
Unid. filamentous red alga #1				X	
Unid. juvenile red alga				X	
Unid. filamentous red alga #2					X
Unid. "leafy" red alga					X
Unid. "tall" red alga					X
Unid. red alga #3					X
Unid. red alga #4					X
Unid. red alga #5					X
Unid. "flat" red alga					X
Unid. red alga #6			X		
Unid. red alga #7			X		
Unid. coralline #1		X			
Unid. coralline #2			X		
Unid. coralline #3					X
PHYLUM PORIFERA	SPONGES				
Cliona celata californiana	Boring sponge	X	X	X	X
Geodia mesotriaenia[2]	Geode sponge				
Halichoclona gellindra[2]	Lavender sponge				
Haliclona ecbasis[2]	Lavender-blue encrusting sponge				
Hymenamphiastra (=Hymeniacidon) cyanocrypta	Blue leaf sponge	X	X		X
Hymeniacidon ungodon[2]	Little leaf sponge				
H. sinapium	Yellow leaf sponge				
Leucetta losangelensis			X	X	
Leucilla (=Rhabdodermella) nuttingi	Urn sponge			X	X
Leuconia heathi[2]	Thistle sponge				
Leucosolenia sp.[2]	Finger sponge				
Lissodendoryx noxiosa[2]	Noxious sponge				
Spheciospongia confoederata	Liver sponge		X		
Tedania toxicalis	Sponge				
Tethya aurantia[2]	Orange puff-ball sponge				
Verongia thiona	Sulfur sponge		X	X	
Unid. "sulfur" sponge			X	X	
Unid. red sponge #1					X
Unid. purple sponge #2		X			
Unid. orange sponge #3		X			X
Unid. yellow sponge #4		X			

See footnotes at end of table.

Table 1. Master species list for Rincon Island.--Continued.

Scientific name[1]	Common name	Occurrence during present study			
		North	West	South	East
PHYLUM PORIFERA (Continued)					
Unid. grey sponge #5				X	
Unid. sponge #6		X			
Unid. sponge #7			X		
Unid. "white" sponge			X	X	
PHYLUM CNIDARIA	ANEMONES, HYDROIDS, CORALS, GORGONIANS				
CLASS HYDROZOA	HYDROIDS				
Aglaophenia struthionides	Ostrich plume hydroid	X	X		X
Antennella avalonia			X		
Campanularia sp.[2]	Campanulate hydrozoan				
cf. *Eudendrium* sp.					X
Obelia sp.			X		
Sertularia cf. *furcata*					
cf. *Plumularia* sp.		X	X	X	X
cf. *P. lagenifera*					X
cf. *Sertularia* sp			X		
Unid. green hydroid			X		
Unid. hydroid sp. #1			X		
Unid. hydroids		X	X	X	X
CLASS ANTHOZOA	ANEMONES/CORALS				
Anthopleura xanthogrammica/ A. elegantissima[3]	Green anemone	X	X	X	X
Antropora tincta		X		X	
Astrangia lajollaensis	Colonial coral	X	X	X	X
Balanophyllia elegans	Solitary orange coral	X		X	X
Cerianthiopsis sp.[2]	Burrowing anemone				
Corynactis californica	Colonial red anemone	X	X	X	X
Eugorgia rubens[2]	Purple sea fan				
cf. *Epiactis prolifera*	Prolific anemone			X	
Lophogorgia chilensis	Pink gorgonian	X	X	X	X
Metridium sp.[2]	Solitary anemone				
Muricea californica/ M. fruticosa[3]	California/rust gorgonians	X	X	X	
cf. *Pachycerianthus* sp.	Tube anemone	X		X	
Paracyathus stearnsii	Solitary coral	X	X	X	X
Renilla kollikeri[2]	Sea pansy				
Stylatula elongata[2]	Elongate sea pen				
Tealia sp.	Anemone	X			
Unid. anemone #1			X	X	
Unid. white anemone #2			X		
Unid. burrowing anemone			X		
Unid. red cerianthid			X		
PHYLUM ANNELIDA	WORMS				
Chaetopterus variopedatus[2]	Parchment tube worm	X			
cf. *Chaetopterus* sp.	Parchment tube worm				
Dexiospira spirillum					X
Diopatra ornata		X	X	X	X
Dodecaceria fewkesi		X	X	X	X
Eudistylia polymorpha[2]	Feather-duster worm	X	X	X	X
Eudistylia sp.[2]	Feather-duster worm				
Eunereis longipes[2]	Nereid worm				
Eupomatus gracilis		X			X
Halosydna tuberculifera	Scale worm				
H. brevisetosa[2]	Scale worm				

See footnotes at end of table.

Table 1. Master species list for Rincon Island.--Continued.

Scientific name[1]	Common name	Occurrence during present study			
		North	West	South	East
PHYLUM ANNELIDA (continued)					
Nereis eakini[2]	Nereid worm				
N. mediator[2]	Nereid worm				
Paleonotus bellis[2]	Chrysopetalid worm				
Salmacina tribranchiata	Colonial tube worm		X		
Serpula vermicularis[2]	Serpulid worm				
Spirorbis eximius					X
Polyopthalmus pictus					
Unid. serpulids		X	X	X	
Unid. Syllidae					
PHYLUM ARTHROPODA	JOINT-LEGGED ANIMALS				
CLASS CRUSTACEA	CRUSTACEANS				
Alpheus clamator	Shrimp				
Ampithoe sp.	Amphipod				X
Balanus cariosus[2]	Acorn barnacle				
B. crenatus[2]	Acorn barnacle				
B. galeata					
B. glandula	Acorn barnacle	X	X	X	X
B. nubilus	Acorn barnacle		X	X	X
B. pacificus	Acorn barnacle	X	X	X	X
B. tintinnabulum	Acorn barnacle		X	X	
B. sp.	Acorn barnacle				X
Cancer antennarius[2]	Rock crab				
C. anthonyi[2]	Yellow crab				
Cancer cf. *productus*	Rock crab				
Chthamalus fissus	Acorn barnacle	X	X	X	X
Crangon dentipes[2]	Pistol shrimp				
Erichthonius brasiliensis	Amphipod				X
Heptacarpus palpator	Shrimp				
Hippolysmata californica[2]	Red rock shrimp				
Hyale frequens	Amphipod				X
Jaeropsis dubia	Isopod		X		
Loxorhynchus crispatus	Sheep crab	X	X	X	
L. grandis[2]	Sheep crab				
Membranobalanus orcutti	Barnacle				
Munna chromatocephala	Amphipod				
Pachycheles pubescens	Hermit crab	X			
Pachygrapsus crassipes	Striped shore crab	X	X	X	X
Paguristes turgidus[2]	Hermit crab				
P. ulreyi	Hermit crab	X	X	X	
Pagurus californiensis	Hermit crab		X		
Pandalus gurneyi[2]	Shrimp				
Panulirus interruptus					
Petrolisthes cinctipes[2]	Porcelain crab				
P. sp.	Porcelain crab				
Pollicipes polymerus	Gooseneck barnacle		X	X	
cf. *Isocheles pilosus*	Hermit crab		X		
Pugettia producta	Kelp crab				
P. sp.	Kelp crab				
Scyra acutifrons[2]	Masking crab				
Spirontocaris brevirostris[2]	Bent-back shrimp				
Tetraclita squamosa rubescens	Thatched barnacle	X	X	X	X
Unid. pagurids	Hermit crabs	X		X	X
Unid. shrimp		X			
Unid. barnacles				X	X
PHYLUM MOLLUSCA	SNAILS, NUDIBRANCHES, CLAMS, OCTOPUSES				
CLASS GASTROPODA	SNAILS AND NUDIBRANCHES				
Acanthina spirata	Oyster drill		X		
Acanthodoris lutea	Nudibranch	X		X	X
Acmaea mitra	White-cap limpet	X			

See footnotes at end of table.

Table 1. Master species list for Rincon Island.--Continued.

Scientific name[1]	Common name	Occurrence during present study			
		North	West	South	East
CLASS GASTROPODA (Continued)					
A. persona[2]	Mask limpet			X	X
Amphissa sp.[2]	Amphissa				
Anisodoris nobilis	Nudibranch	X		X	X
Antiopella barbarensis	Nudibranch				X
Aplysia californica	Sea hare	X			
A. vaccaria	Sea hare				
Archidoris montereyensis	Light yellow sea slug				
Armina californica[2]	Pansy sea slug				
Astraea undosa[2]	Wavy turban snail				
Cadlina luteomarginata	Nudibranch	X			
Callistochiton crassicostatus	Chiton				
Calliostoma annulatum	Purple-ringed top shell	X			
C. canaliculatum	Channeled top shell	X	X	X	
C. gloriosum	Glorious top-shell				
C. supragranosum[2]	Granulose top-shell				
Ceratostoma nuttalli	Nuttall's hornmouth	X	X	X	X
Collisella cf. conus	Limpet	X		X	
C. digitalis	Fingered limpet	X	X	X	X
C. cf. *limatula*	File limpet				X
C. pelta[2]	Shield limpet				
C. scabra	Rough limpet	X		X	X
C. sp. #1	Limpet			X	
C. sp. #2 (ridges)	Limpet				
C. sp. #3	Limpet				X
C. cf. *strigatella*	Limpet		X		
Conus californicus	California cone	X	X		X
Coryphella trilineata	Nudibranch				
Crepidula cf. *aculeata*	Spiny slipper shell				X
Crepipatella lingulata	Half-slipper shell	X			
Cypraea spadicea	Chestnut cowry	X	X	X	
Diaulula sandiegensis	Circle-spotted sea slug	X		X	X
Diodora aspera	Rough keyhole limpet	X		X	X
Doriopsilla albopunctata (=*Dendrodoris fulva*)	Yellow sea slug	X	X	X	X
Fissurella volcano	Volcano limpet				
Flabellinopsis iodinea	Purple sea slug	X			X
Haliotis corrugata[2]	Pink abalone				
H. cracherodii[2]	Black abalone				
H. fulgens[2]	Green abalone				
H. rufescens	Red abalone	X			
Hermissenda crassicornis	Yellow-green sea slug		X		X
Hypselodoris californiensis[2]	Blue-orange sea slug				
Jaton festivus[2]	Festive murex				
Kelletia kelletii	Kellet's whelk	X	X	X	X
Laila cockerelli[2]	Orange-white sea slug				
Littorina planaxis[2]	Eroded periwinkle				
L. scutulata[2]	Checkered periwinkle				
L. sp.	Periwinkle			X	
Lottia gigantea	Owl limpet	X	X	X	X
Maxwellia gemma	Gem murex	X			
Megathura crenulata	Giant keyhole limpet	X	X	X	X
Mitrella carinata	Carinate dove shell				X
Mitra idae	Ida's mitre		X	X	
Nassarius mendicus	Lean nassa			X	
Navanax inermis	Nudibranch	X			X
Neosimnia sp.[2]	Pink louse shell				
Norrisia norrisii[2]	Smooth turban				
Ocenebra foveolata		X			

See footnotes at end of table.

Table 1. Master species list for Rincon Island.--Continued.

Scientific name [1]	Common name	Occurrence during present study			
		North	West	South	East
CLASS GASTROPODA (Continued)					
O. poulsoni[2]	Poulson's dwarf triton				
O. cf. barbarensis					
O. sp.			X		
Polycera tricolor	Nudibranch	X			
Pteropurpura festiva	Festive murex	X	X	X	
P. macroptera	Murex				X
Pterynotus trialatus[2]	Three-winged murex				
Serpulorbis squamigerus	Scaled worm shell	X	X	X	X
Simnia (Neosimnia) vidleri	Vidler's simnia	X			X
Tegula aureotincta[2]	Gilded tegula				
T. brunnea[2]	Brown tegula				
T. funebralis	Black turban snail				
Triopha maculata	Nudibranch				
Tritonia festiva	Nudibranch	X			
Unid. limpet #1				X	
Unid. limpet #2				X	
Unid. blue/white eolid		X			
Unid. navanax-like eolid		X			
Unid. gastropod #1		X			
Unid. dorid #1		X			
Unid. chiton #1		X			
Unid. limpet #3		X			
Unid. eolid #1					X
Unid. eolid #2			X		
CLASS PELECYPODA	CLAMS AND SCALLOPS				
Anomia peruviana/ Pododesmus cepio[3]	Pearly jingle/ Abalone jingle	X	X	X	X
Bankia setacea[2]	Ship worm				
Chaceia ovoidea[2]	Wart-necked piddock				
Chama pellucida	Agate chama		?		X
Chlamys latiaurata[2]	Kelp scallop				
Gari californica[2]	Sunset clam				
Hiatella arctica	Nestling clam			X	X
Hinnites multirugosus	Rock scallop				
Kellia laperousii				X	
Lima hemphilli[2]	File shell				
Lithophaga plumula	Date mussel				
Mytilus californianus	California mussel	X	X		
M. edulis	Bay mussel	X		X	X
Nettastonnella rostrata[2]	Beaked piddock				
Parapholas sp.	Boring clam	X	X	X	
Pecten diegensis	San Diego scallop				
Penitella penita[2]	Flap-tipped piddock				
Pseudochama exogyra	Reversed chama				
Semele rupicola[2]	Rock dwelling semele				
Teredo diegensis[2]	Ship worm				
Unid. pholads				X	X
Unid. boring clam				X	
CLASS CEPHALOPODA	OCTOPUSES AND SQUIDS				
Octopus bimaculoides	Two-spot octopus				
Octopus sp.		X	X		
CLASS POLYPLACOPHORA					
Mopalia muscosa[2]					
Callistochiton crassicostatus					

See footnotes at end of table.

Table 1. Master species list for Rincon Island.--Continued.

Scientific name [1]	Common name	Occurrence during present study			
		North	West	South	East
PHYLUM ECTOPROCTA	MOSS ANIMALS				
Antropora tincta			X	X	X
Bugula neritina		X	X	X	X
Crisia occidentalis				X	
Diaperoecia californica		X	X		X
Filicrisia franciscana				X	
Lagenipora punctulata		X	X	X	X
Hippothoa hyalina					
Membranipora membranacea					
M. savarti [2]					
M. tuberculata			X		
Phidolopora pacifica		X	X	X	X
Rhyncozoon rostratum		X	X	X	X
Scrupocellaria diegensis		X	X	X	X
Smittina sp. [2]					
Thalamorporella californica [2]					
Unid. encrusting ectoprocts		X	X	X	X
Unid. ectoproct #1			X		X
Unid. yellow ectoproct			X		X
PHYLUM ECHINODERMATA	SEASTARS, URCHINS, BRITTLE STARS, CUCUMBERS				
CLASS ASTEROIDEA	SEASTARS				
Astropecten armatus [2]	Sand starfish				
Patiria miniata	Bat star	X	X	X	X
Pisaster brevispinus	Pink seastar	X	X	X	
P. giganteus	Giant seastar	X	X	X	X
P. ochraceus	Ochre seastar	X	X	X	X
P. sp. (juv.)					X
Solaster dawsoni [2]	Sunburst starfish				
CLASS ECHINOIDEA	URCHINS				
Lytechinus pictus	Pale urchin			X	
Strongylocentrotus franciscanus	Red urchin	X	X	X	X
S. purpuratus	Purple urchin	X	X	X	X
CLASS OPHIUROIDEA	BRITTLE STARS				
Ophiopsilla californica			X		
Ophiopteris papillosa [2]	Brittle star				
Ophiothrix spiculata		X	X		
Unid. ophiuroid				X	X
CLASS HOLOTHUROIDEA	SEA CUCUMBERS				
Cucumaria sp. [2]	Sea cucumber				
Dermasterias imbricata [2]	Leather star				
Eupentacta quinquesemita [2]	Yellow sea cucumber				
Parastichopus californicus/ P. parvimensis [3]		X	X	X	X
Unid. holothuroid		X		X	
Unid. burrowing holothuroid		X	X		
PHYLUM CHORDATA	CHORDATES				
CLASS ASCIDIACEA	TUNICATES (Sea squirts)				
cf. *Amaroucium californicum*					X
Aplidium californicum					
Boltenia villosa		X		X	X
Chelyosoma productum [2]	Simple sea squirt				
Cystodytes lobatus [2]	Compound sea squirt				
Didemnum carnulentum			X		
Pyura haustor	Tunicate				

See footnotes at end of table.

Table 1. Master species list for Rincon Island.--Continued.

Scientific name[1]	Common name	Occurrence during present study			
		North	West	South	East
CLASS ASCIDIACEA (Continued)					
Styela gibbsii					X
S. montereyensis		X	X	X	
S. sp.			X		
Unid. white tunicate				X	
Unid. orange tunicate				X	
Unid. encrusting pink tunicate					X
CLASS CHONDRICHTHYES	CARTILAGINOUS FISHES				
Cephaloscyllium ventriosum	Swell shark				
Cetorhinus maximus	Basking shark				
Heterodontus francisci[2]	Horn shark				
Prionace glauca[2]	Blue shark				
Rhinobatos productus[2]	Shovelnose guitarfish				
Sphyrna zygaena[2]	Smooth hammerhead shark				
Squalus acanthias	Spiny dogfish				
Triakis semifasciata[2]	Leopard shark				
Urolophus halleri[2]	Round stingray				
CLASS OSTEICHTHYES	BONY FISHES				
Alloclinus holderi[2]	Island kelpfish				
Amphistichus argenteus	Barred surfperch				
A. koelzi[2]	Calico surfperch				
Anisotremus davidsoni[2]	Sargo				
Artedius lateralis[2]	Smoothead sculpin				
Atherinops affinis	Topsmelt				
Atherinopsis californiensis	Jacksmelt				
Brachyistius frenatus	Kelp perch				
Cheilotrema saturnum	Black croaker				
Chromis punctipinnis	Blacksmith				
Citharichthys sordidus[2]	Pacific sanddab				
Clinocottus globiceps	Mosshead sculpin				
Clupea harengus pallasi	Pacific herring				
Coryphopterus nicholsi	Blue-spot goby				
Cymatogaster aggregata[2]	Shiner surfperch				
Cynoscion nobilis	White seabass				
Embiotoca jacksoni	Black perch				
E. lateralis	Striped seaperch				
Genyonemus lineatus	White croaker				
Gibbonsia metzi[2]	Striped kelpfish				
G. montereyensis[2]	Crevice kelpfish				
Girella nigricans	Opaleye				
Gymnothorax mordax[2]	California moray				
Halichoeres semicinctus[2]	Rock wrasse				
Heterostichus rostratus	Giant kelpfish				
Hyperprosopon argenteum	Walleye surfperch				
H. ellipticum[2]	Silver surfperch				
Hypsoblennius gilberti[2]	Rockpool blenny				
Hypsurus caryi[2]	Rainbow surfperch				
Hypsypops rubicunda	Garibaldi				
Leuresthes tenuis[2]	California grunion				
Lynthrypnus dalli[2]	Bluebanded goby				
Medialuna californiensis	Halfmoon				
Mola mola[2]	Ocean sunfish				
Myliobatus californica[2]	Bat ray				
Oncorhynchus kisutch[2]	Coho salmon				
Ophiodon elongatus	Lingcod				
Oxyjulis californicus	Senorita				
Oxylebius pictus	Convict fish				
Paralabrax clathratus	Kelp bass				
P. maculato-fasciatus[2]	Spotted sand bass				

See footnotes at end of table.

Table 1. Master species list for Rincon Island.--Continued.

Scientific name[1]	Common name	Occurrence during present study			
		North	West	South	East
CLASS OSTEICHTHYES (Continued)					
P. nebulifer	Barred sand bass				
Paralichthys californicus	California halibut				
Pimelometopon pulchrum	California sheephead				
Platichthys stellatus[2]	Starry flounder				
Phanerodon furcatus	White seaperch				
Porichthys spp.	Midshipman				
Rathbunella hypoplecta	Smooth ronquil	X			X
Rhacochilus toxotes	Rubberlip seaperch				
Rhacochilus vacca	Pile perch				
Sardinops sagax[2]	Pacific sardine				
Scomber japonicus[2]	Pacific mackerel				
Scomberomorus concolor[2]	Monterey Spanish mackerel				
Scorpaena guttata	California scorpionfish				
Scorpaenichthys marmoratus	Cabezon	X			
Sebastes atrovirens	Kelp rockfish				
S. auriculatus	Brown rockfish	X			
S. cf. caurinus	Copper rockfish				
S. chlorostictus[2]	Greenspotted rockfish				
S. elongatus[2]	Greenstriped rockfish				
S. miniatus[2]	Vermilion rockfish				
S. mystinus	Blue rockfish				
S. paucispinis[2]	Bocaccio				
S. rastrelliger[2]	Grass rockfish				
S. rubrivinctus[2]	Flag rockfish				
S. serranoides	Olive rockfish				
S. serriceps[2]	Treefish				
S. sp. #1					
S. sp. #2					
Seriphus politus	Queenfish				
Sphyraena argentea[2]	Pacific barracuda				
Symphurus atricauda[2]	California tonguefish				
Syngnathus californiensis[2]	Kelp pipefish				
Thunnus alalunga[2]	Albacore				
Trachurus symmetricus[2]	Mack mackerel				
Unid. blenny				X	

[1]Taxa without superscript were observed during this study.

[2]Taxa reported by Carlisle, Turner, and Ebert (1969) or Brisby in Keith and Skjei (1974), but not observed during this study.

[3]The two species were not differentiated during this study.

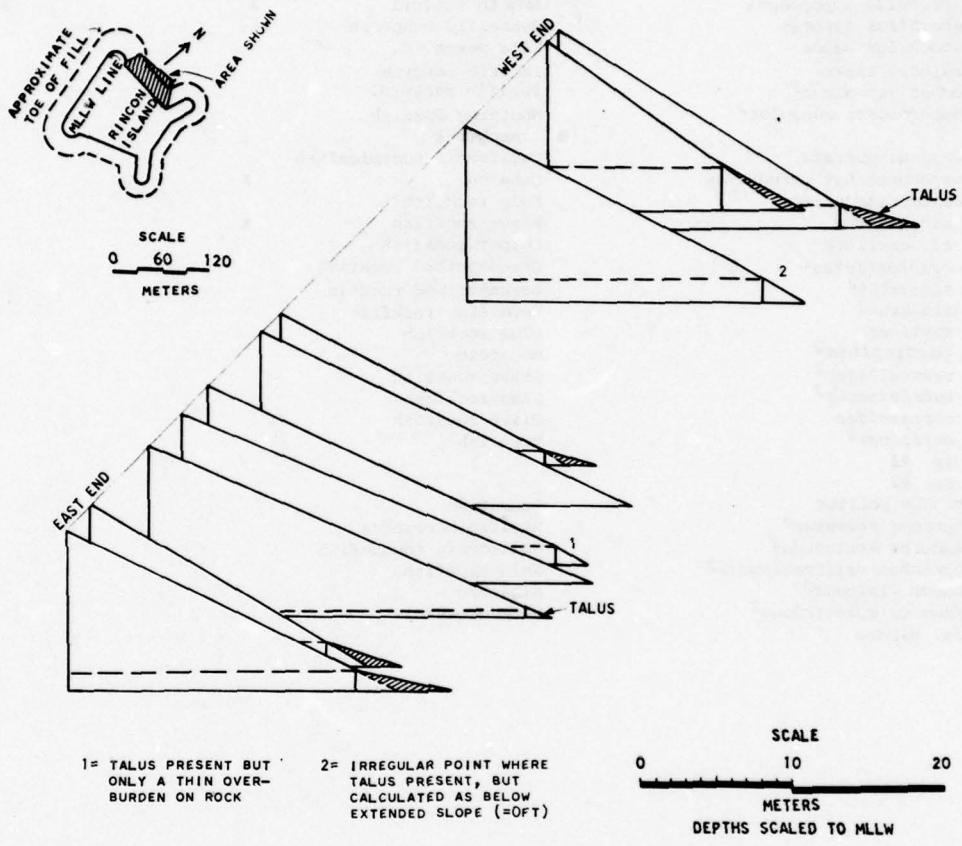


Figure 5. North-side talus bed and armor rock measurements, 15 October 1976.

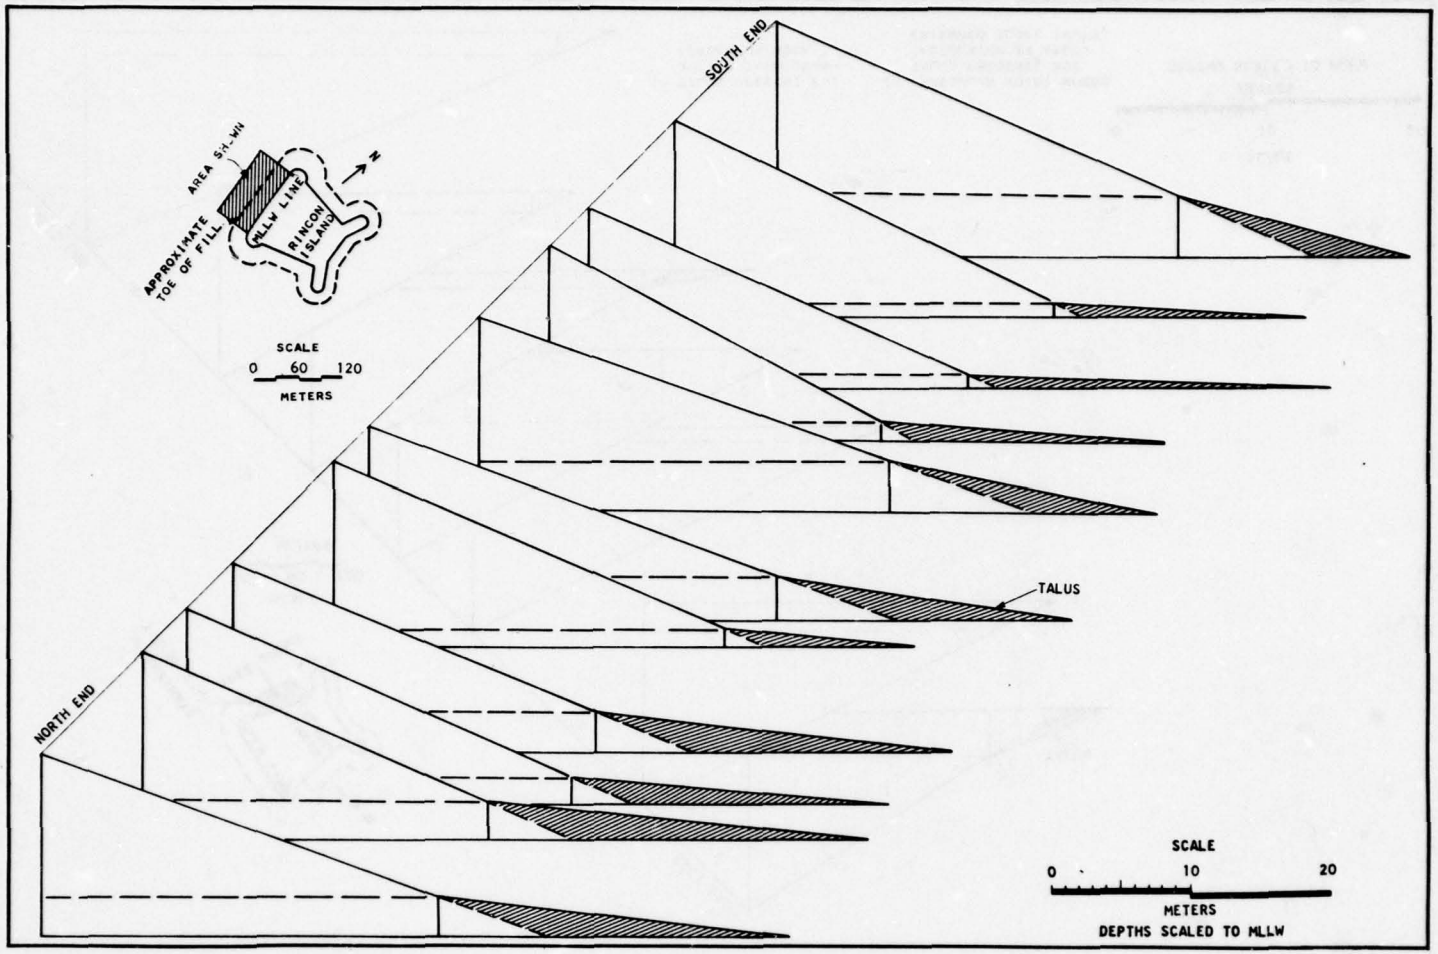


Figure 6. West-side talus bed and armor rock measurements, 15 October 1976.

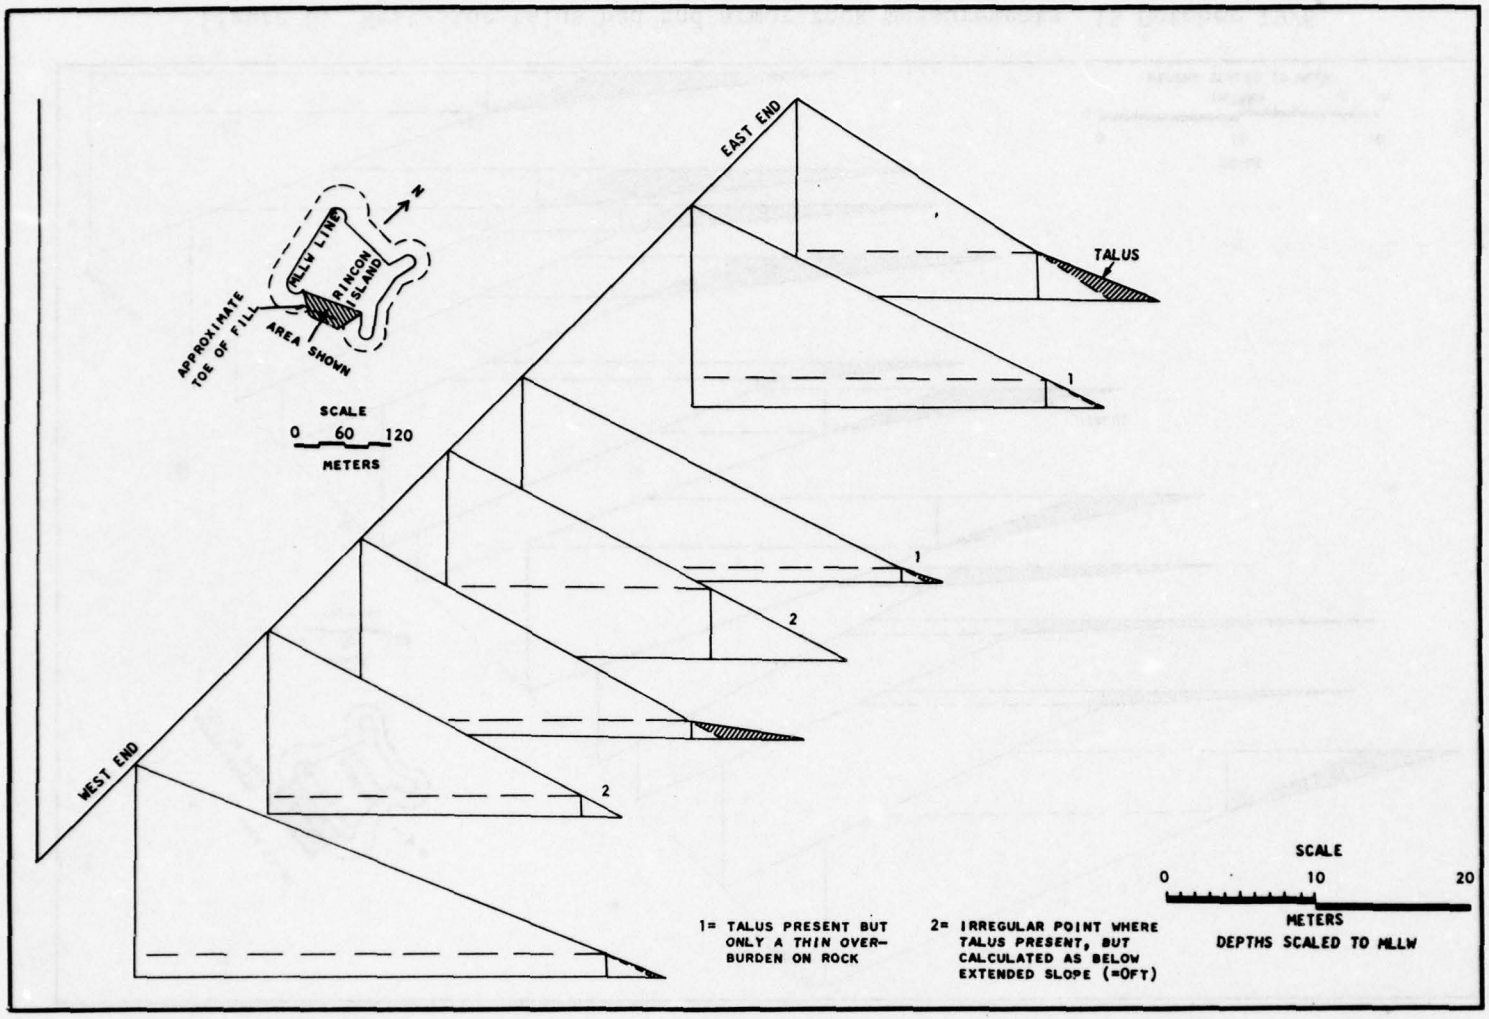


Figure 7. South-side talus bed and armor rock measurements, 19 November 1976.

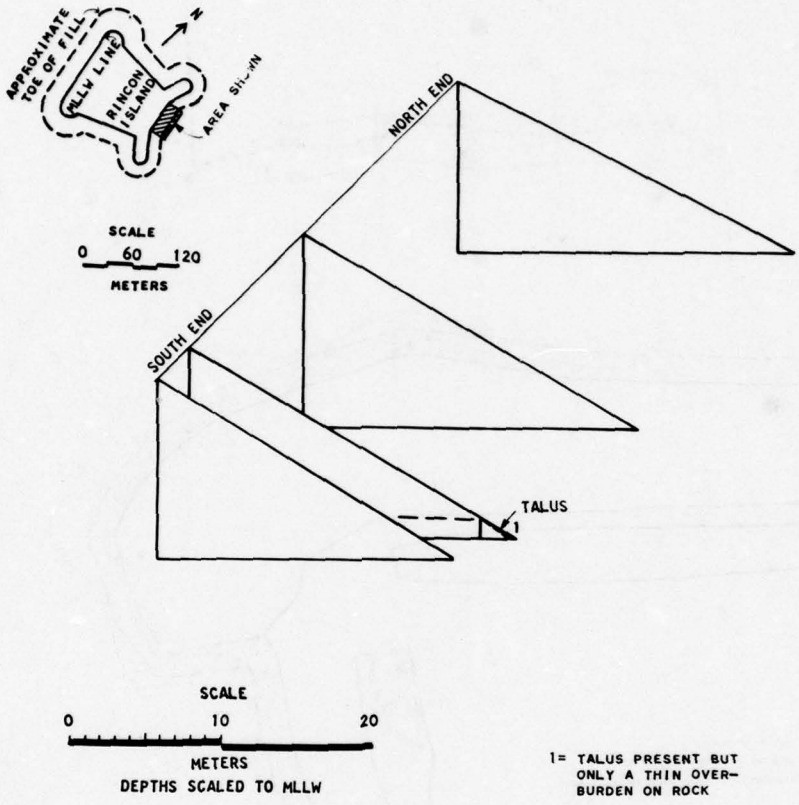


Figure 8. East-side talus bed and armor rock measurements, 15 October 1976.

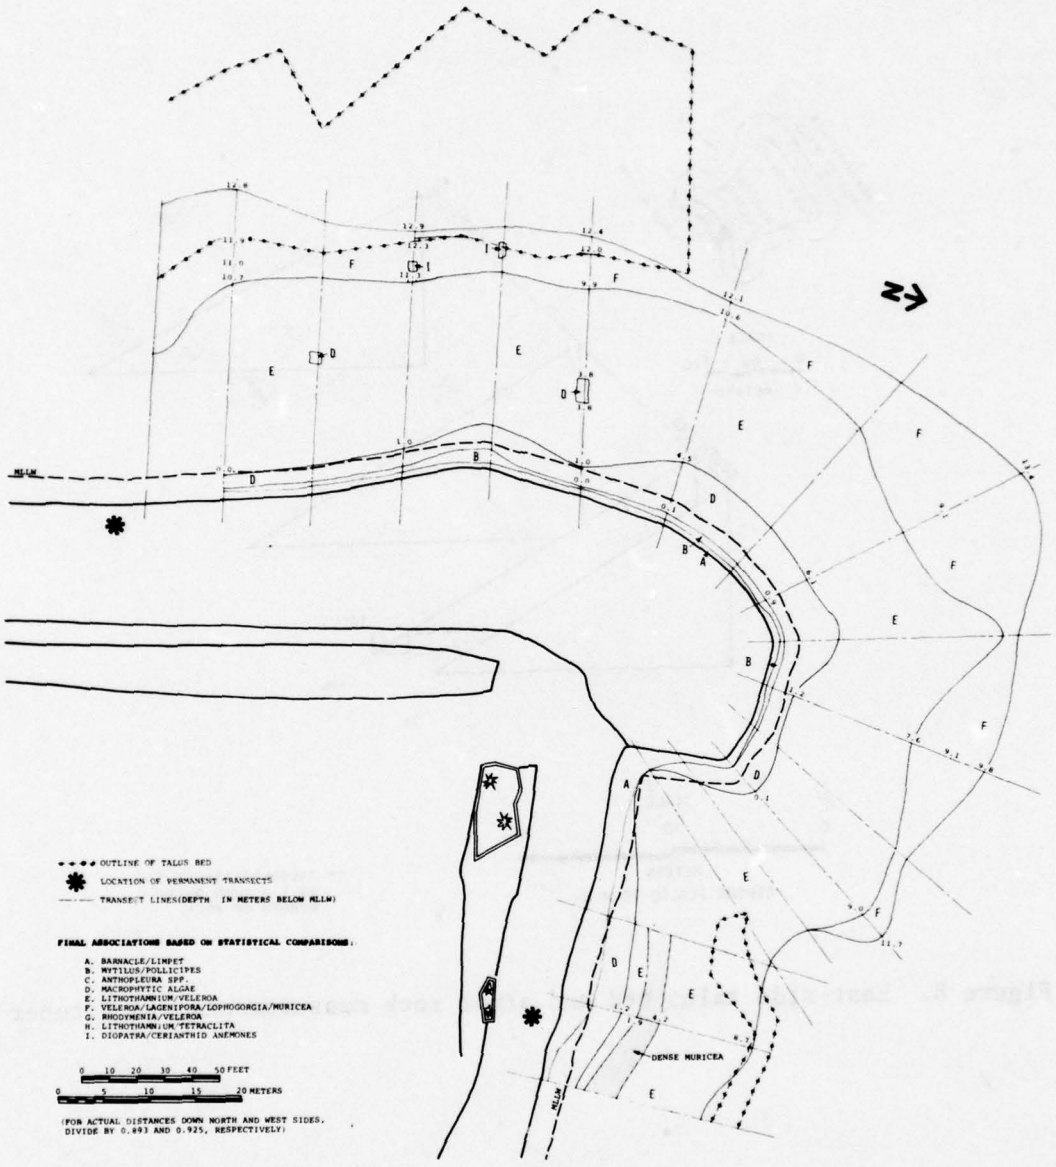


Figure 9. Major species associations, northwest quadrant.

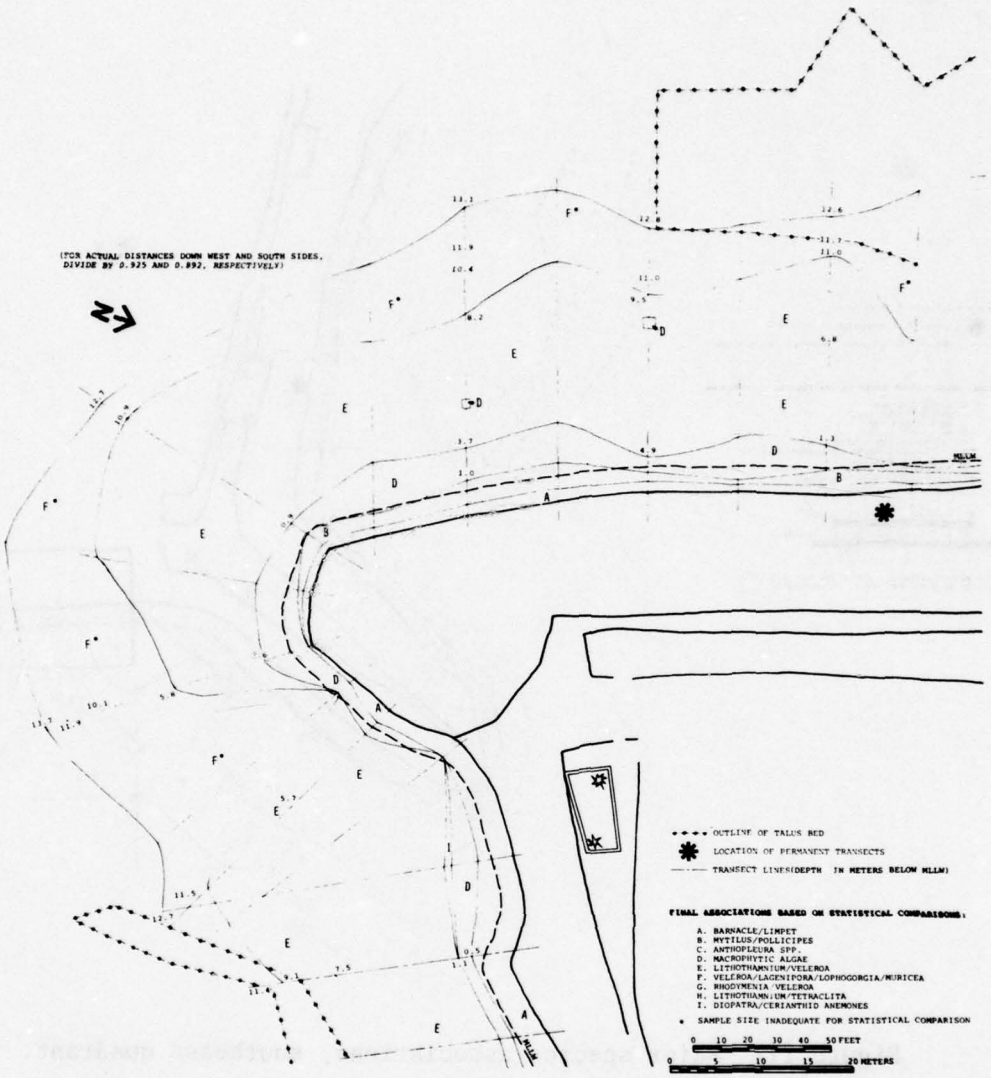


Figure 10. Major species associations, southwest quadrant.

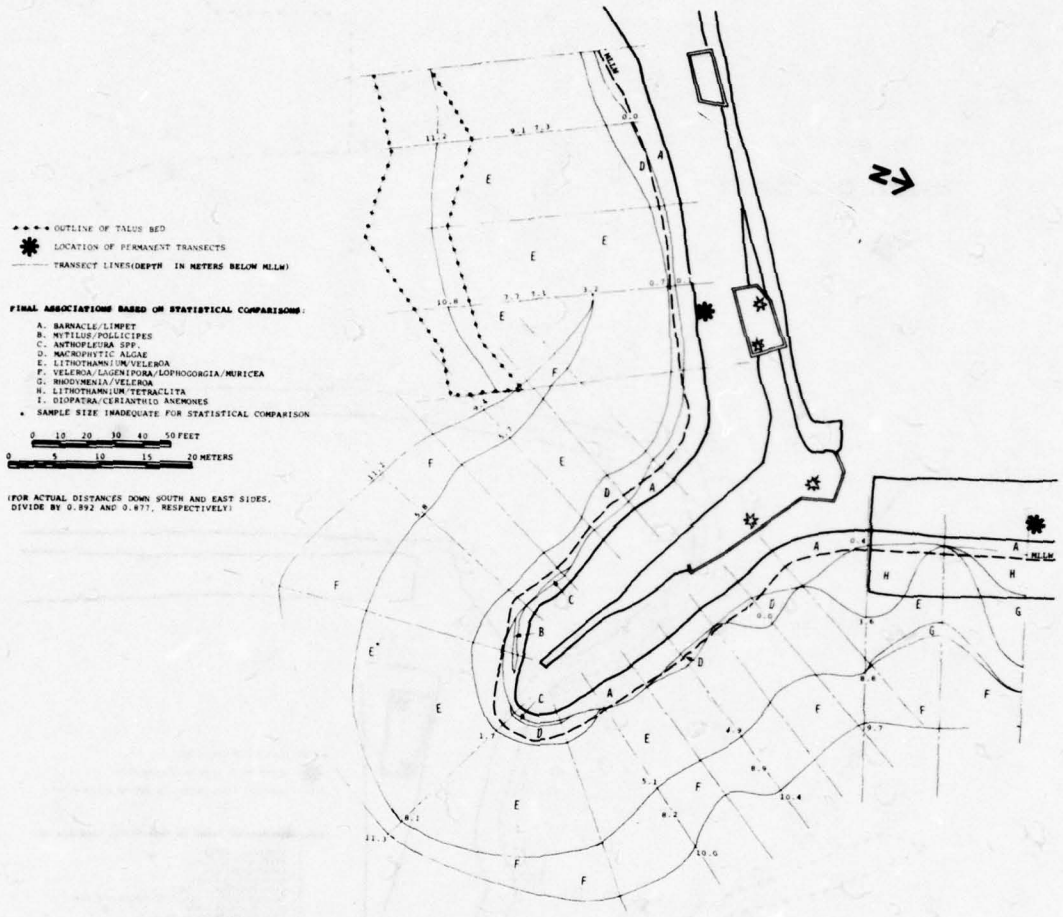


Figure 11. Major species associations, southeast quadrant.

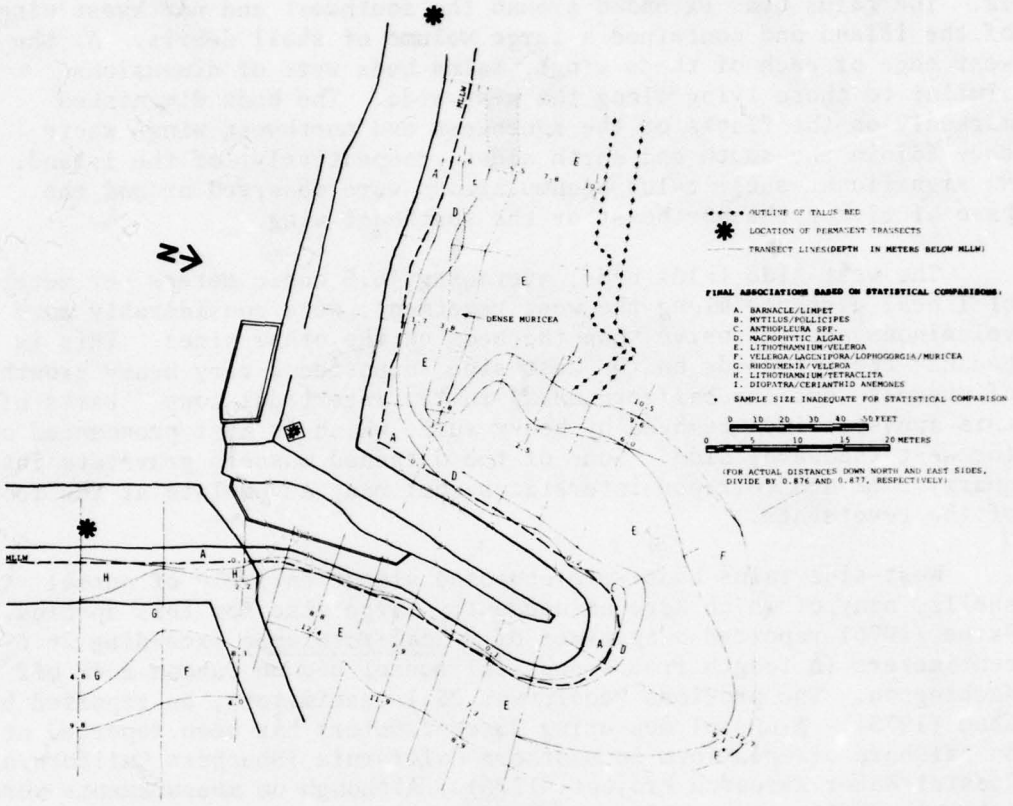


Figure 12. Major species associations, northeast quadrant.

North side:	49 cubic meters
East side:	No significant accumulation.
Total:	1,597 cubic meters

These figures apply only to the talus beds shown in Figures 9 to 12. The talus beds extended around the southwest and northwest wings of the island and contained a large volume of shell debris. At the west edge of each of these wings, talus beds were of dimensions similar to those lying along the west side. The beds diminished markedly on the flanks of the southwest and northwest wings where they adjoin the south and north sides, respectively, of the island. No significant shell talus accumulations were observed around the base of either the northeast or the southeast wing.

The west-side talus beds, averaging 16.5 cubic meters per meter of lineal distance along the west revetment, were considerably more voluminous and extensive than the beds on the other sides. This is because the tetrapods on the west side supported a very heavy growth of mussels *(Mytilus californianus)* in the intertidal zone. Parts of this are sometimes removed by heavy surf, which is most pronounced on the west (seaward) side. Some of the detached mussels gravitate into quarry rock and tetrapod interstices, but many accumulate at the foot of the revetments.

West-side talus beds were composed almost entirely of mussel shells, many of which were of unusually large size for this species. Paine (1976) reported a specimen of *M. californianus* exceeding 26.6 centimeters in length from a subtidal mussel bed on Duncan Rock off Washington. The previous record was 25.1 centimeters, as reported by Chan (1973). A mussel measuring 25 centimeters has been reported at an offshore oil platform in southern California (Southern California Coastal Water Research Project, 1976). Although no measurements were taken on shells in the Rincon Island talus bed, many specimens apparently approaching this size were observed. Some shells of *Pododesmus cepio* were also present in the west-side talus area. The seaward boundary of the west-side talus bed (where it graded into natural sedimentary bottom) was very distinct and lacking in irregularities. The inner margin was somewhat irregular and interspersed with isolated rocks. Isolated pockets of talus existed above the upper margin of the main talus bed.

In contrast, the east side was nearly devoid of shell talus. Only one pocket of talus was observed, approximately 4 meters from the south boundary of the side. Small mounds of mussel shells were observed at the bases of causeway pilings. The east side is the most sheltered side, and appears to act as a deposition site for sediment carried to the rear of the island in turbulent eddies (Keith and Skjei, 1974). The middepth and deeper parts of the east-side revetments were always overlain by a veneer of fine sediment: the

transition from rock revetment to sedimentary bottom is distinct, primarily because of a contrast in slope of the two substrate types.

The north- and south-side talus beds are intermediate in size between those of the west and east sides. The upper and lower margins are highly irregular on both the north and south sides. Some "fingers" of talus extend more than 3 meters up the north-side revetment, and an isolated shallow pocket of talus exists in a flat area about half way down the side near the location of the permanent transect. The sediment lying near the base of the island on both the north and south sides is inclined, possibly because it overlies a buried part of the talus bed. Many isolated rocks punctuate the natural bottom sediment, particularly along the north side. Shells of the bivalves, *Pododesmus cepio* (jingles), *Hinnites multirugosus* (rock scallop), and unidentified species form the bulk of the talus beds on the north and south sides. Some *Mytilus* talus exists near the west end of the north side which may have been carried around from the west side by currents. Biota frequently encountered in association with the talus beds include the tube worm, *Diopatra ornata;* the tube anemone, *Pachycerianthus* sp; the nudibranch, *Dendrodoris fulva;* the whelk, *Kelletia kelletii;* the bat star, *Patiria miniata;* and hermit crabs including *Paguristes ulreyi* and *Isocheles pilosus*.

3. Analysis of Seasonal Data from Permanent Transects.

An overview of the vertical distribution of tentatively discriminated major species associations, synthesized from data of the first two seasonal permanent transect surveys (summer and fall, 1976) is graphically represented for each side of the island in Figures 13 to 16. Figures 17 to 20 augment information provided in Figures 13 to 16 by illustrating the vertical distributions of selected dominant macrobiota over the permanent transects. A broad vertical pattern for *Patiria miniata* is apparent on all sides. Also noteworthy is the dominance of the *Lithothamnium-Lithophyllum* complex over the upper reaches of all but the east side. The east side also appears unique in that distributions of several species are much less restricted vertically than is the case on the other sides (e.g., the red algae, *Veleroa subulata-Murrayellopsis dawsonii* complex and the abundant ectoproct, *Lagenipora punctulata)*.

A total of 250 taxa of macrobiota was identified during the four seasons of the permanent transect sampling program. These taxa are listed in Table 1 together with information on which side of the island each occurred. The species occurring in transects on all four sides of the island may be regarded as ubiquitous and generally the dominant macrobiota over the entire island. Many of the species listed in Table 1 undoubtedly occur on more sides of the island than indicated. An example is the giant kelp, *Macrocystis* sp. Kelp is most

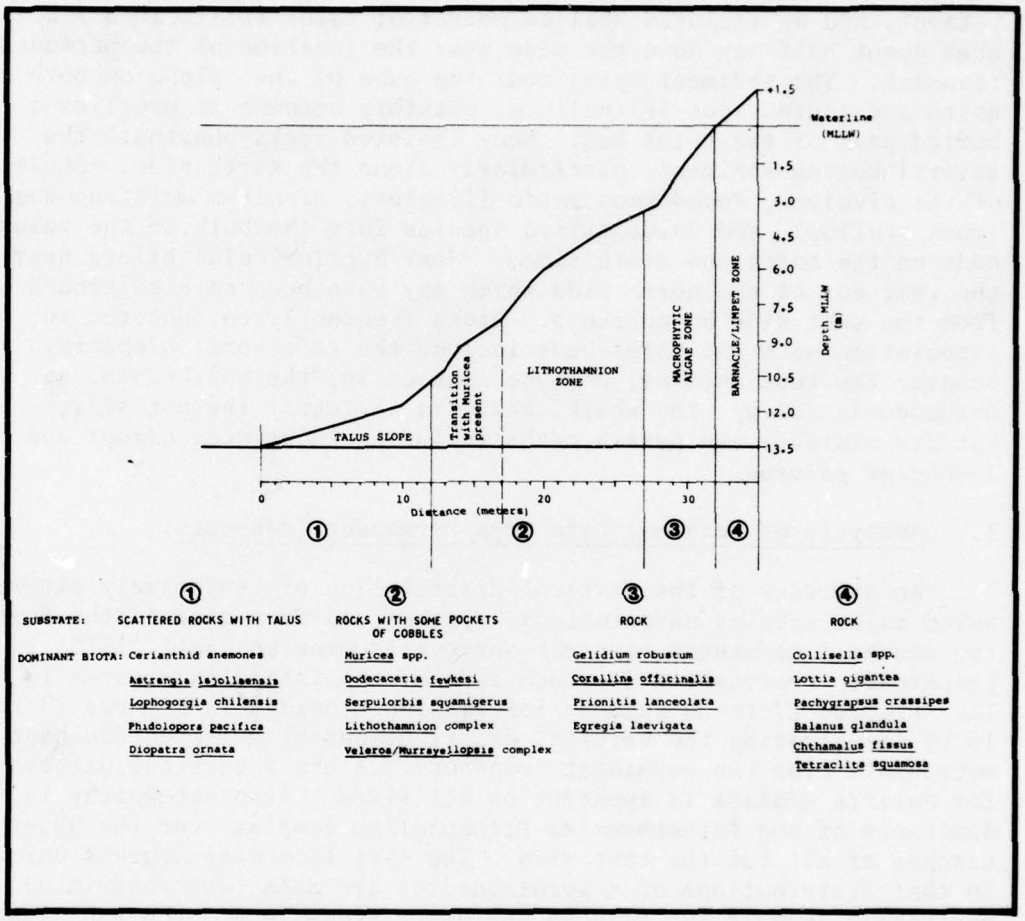


Figure 13. Seasonal overview of distribution of major species associations and substrate character, north-side permanent transect.

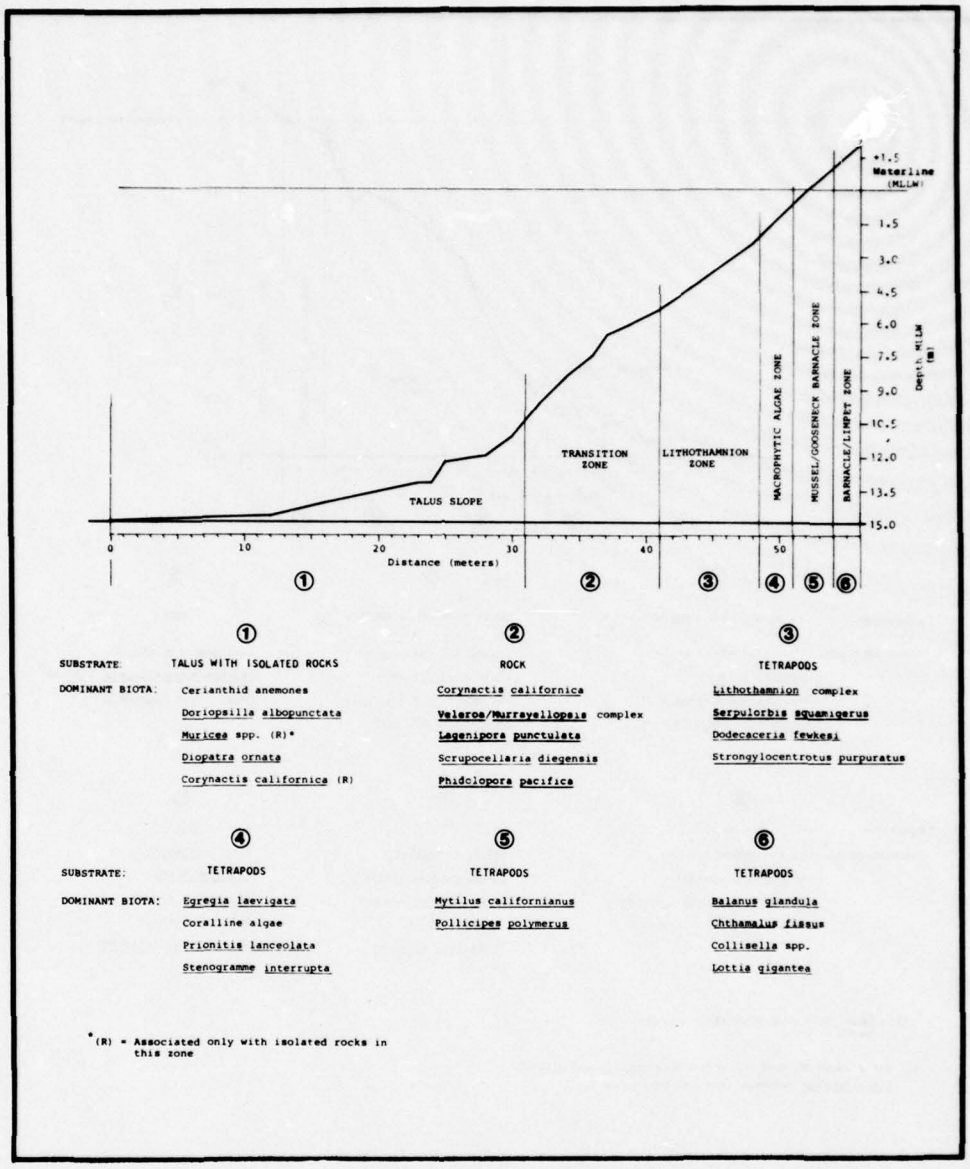


Figure 14. Seasonal overview of distribution of major species associations and substrate character, west-side permanent transect.

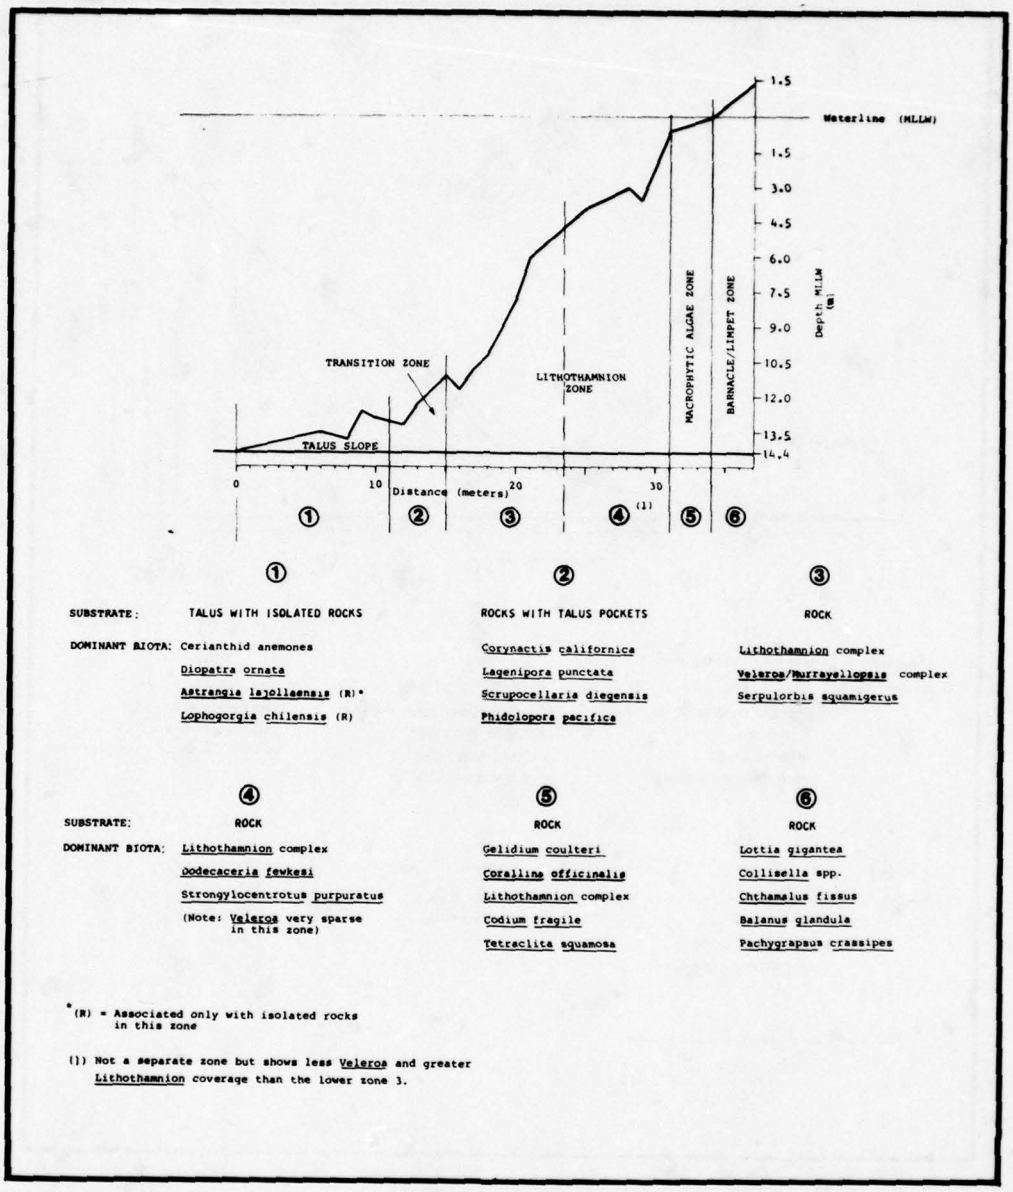


Figure 15. Seasonal overview of distribution of major species associations and substrate character, south-side permanent transect.



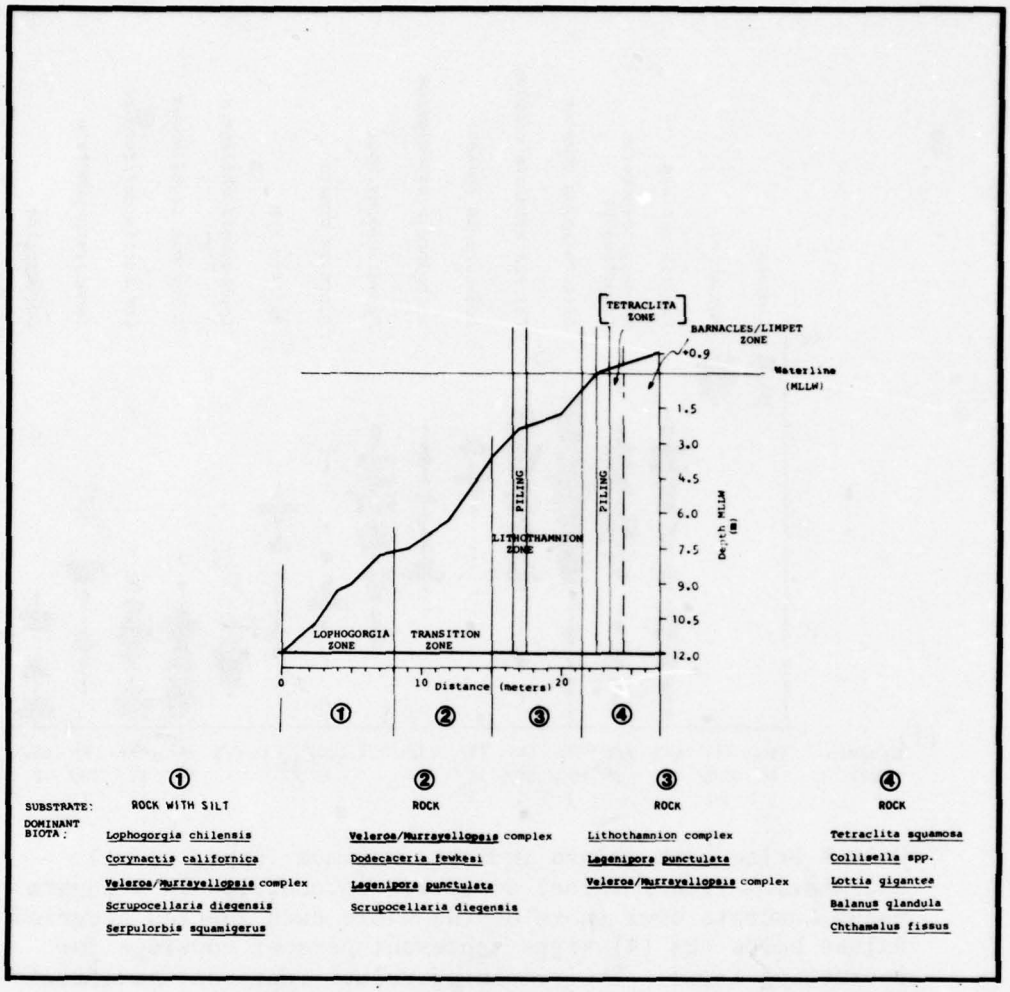


Figure 16. Seasonal overview of distribution of major species associations and substrate character, east-side permanent transect.

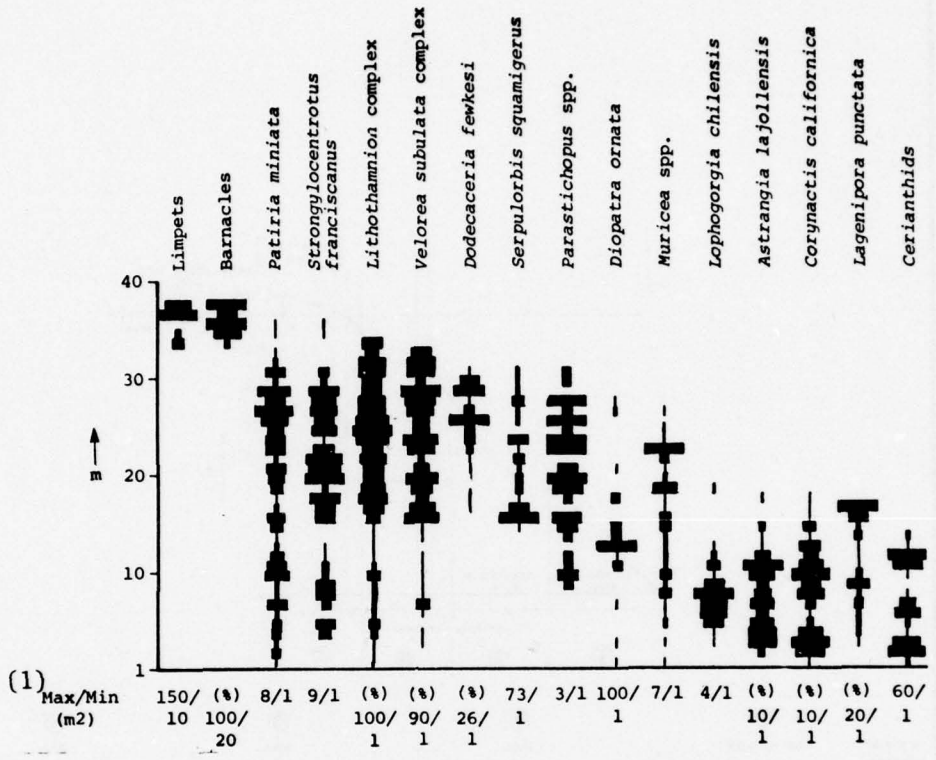


(1) Values below each column indicate maximum (upper value) and minimum (lower value) densities encountered in 1-square meter quadrats over those depths where each species occurred. Values below the (%) signs represent percent coverage for encrusting forms. The remaining values represent numerical densities.

Figure 17. Vertical distribution for dominant biota, north side.

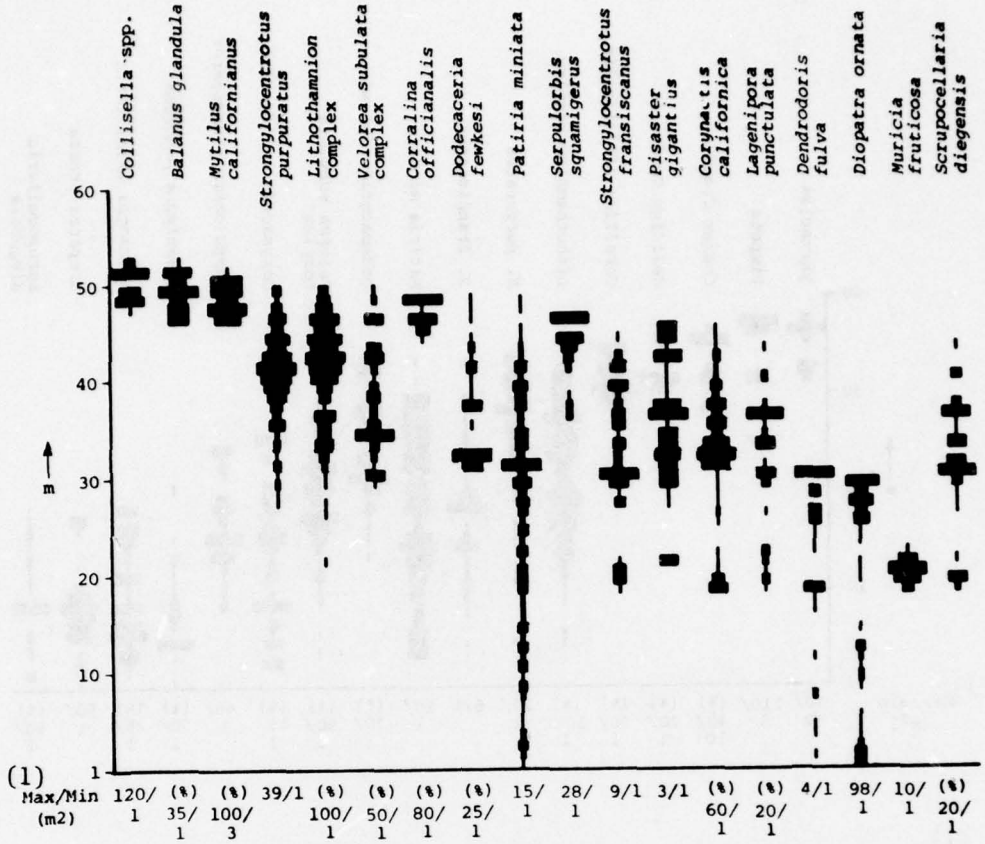


(1) Values below each column indicate maximum (upper value) and minimum (lower value) densities encountered in 1-square meter quadrats over those depths where each species occurred. Values below the (%) signs represent percent coverage for encrusting forms. The remaining values represent numerical densities.

Figure 18. Vertical distribution for dominant biota, west side.

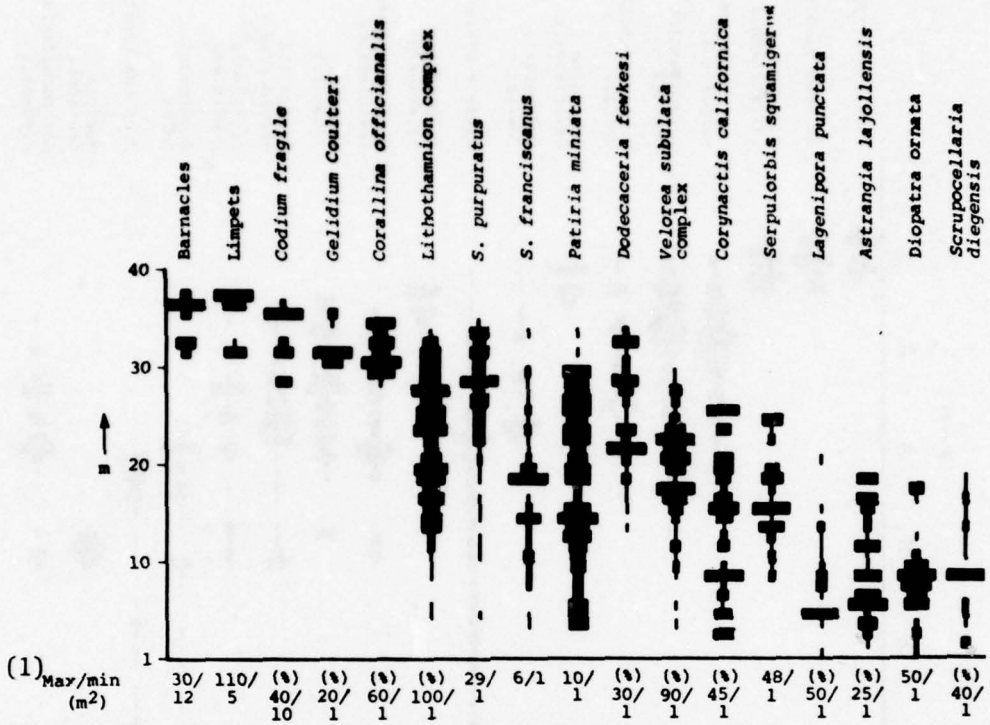

(1) Values below each column indicate maximum (upper value) and minimum (lower value) densities encountered in 1-square meter quadrats over those depths where each species occurred. Values below the (%) signs represent percent coverage for encrusting forms. The remaining values represent numerical densities.

Figure 19. Vertical distribution for dominant biota, south side.

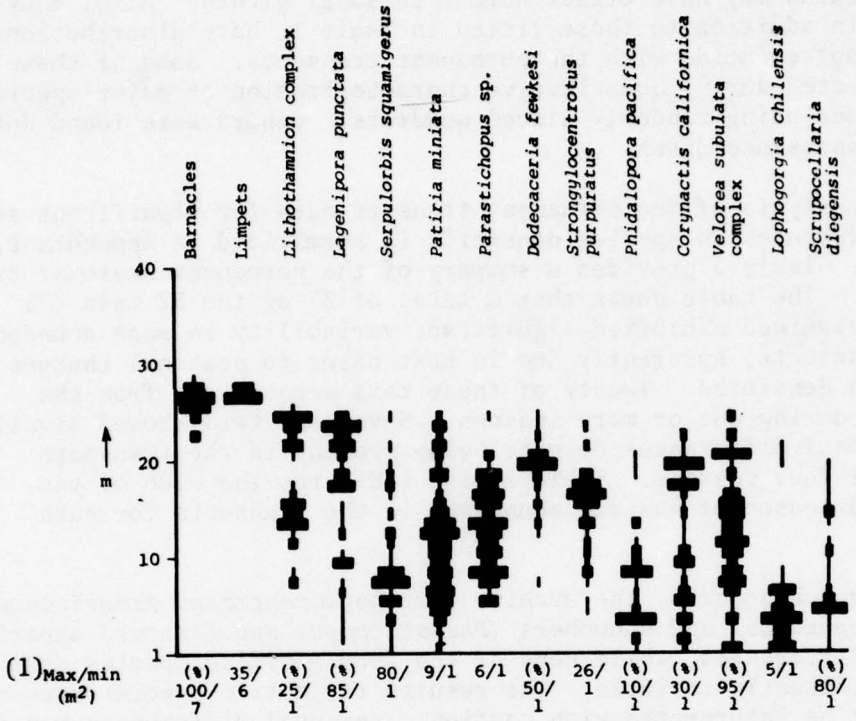

(1) Values below each column indicate maximum (upper value) and minimum (lower value) densities encountered in 1-square meter quadrats over those depths where each species occurred. Values below the (%) signs represent percent coverage for encrusting forms. The remaining values represent numerical densities.

Figure 20. Vertical distribution for dominant biota, east side.

abundant on the south end of the west side of the island, but sparse in the central part, which is where the transect was located. This small kelp bed on the southwest wing of the island varied considerably in size during the course of the study. Heavy wave action and grazing by sea urchins may have offset normal seasonal growth. Also, many species, in addition to those listed in Table 1, have distributions that did not coincide with the permanent transects. Some of these were collected during quantitative characterization of major species associations using randomly placed quadrats. Others were found during reconnaissance dives.

The analysis of the permanent transect data for significant seasonal differences in species densities is summarized in Appendix B, Table B-1. Table 2 provides a summary of the permanent seasonal transect data. The table shows that a total of 37 of the 52 taxa (71 percent) examined exhibited significant variability in mean abundance in the transects, apparently due in most cases to seasonal changes in population densities. Twenty of these taxa were absent from the transects during one or more seasons. Seventeen taxa showed significant seasonal differences despite being present in the transects during all four seasons. Table 2 also indicates the side of the island and season of maximum abundance in the transects for each species.

Among echinoderms, the urchins *(Strongylocentrotus franciscanus* and *S. purpuratus)* and cucumbers *(Parastichopus* spp.) showed apparent seasonal differences, while none of the four starfish species examined were significantly variable. The results for motile species such as these must be interpreted with caution: seasonal differences may reflect changes in distribution rather than actual variations in abundance. All three ectoproct (moss animal) species examined, which collectively account for the bulk of ectoproct biomass on the island, showed seasonal variability. Gorgonians of genus *Muricea* varied seasonally; *Lophogorgia chilensis* did not. Among other coelenterates, significant differences were shown by the anemone, *Corynactis californica,* and the coral, *Paracyathus stearnsii*, but not by *Anthopleura* sp. or *Astrangia lajollaensis*. The two sponges examined showed seasonal differences. Most of the red algae species (Codes 22 to 45 in Table 2, and Table B-1) were seasonally variable, as was expected. The only exceptions were *Laurencia pacifica, Prionitis lanceolata,* and *Rhodoglossum affine*. Most red algae showed peak densities in spring and summer, as was the case with the green algae (Codes 1 to 6 in Table 2, and Table B-1) and generally with the browns (Codes 11 to 20). Conversely, the widely distributed blue-green alga, *Phormidium* sp., was most abundant during the winter.

Table 2. Seasonal transect data summary.

Species Code[1]	Species	Common Name	Seasonal Variability[2]	High Density Side	High Density Season
1	*Enteromorpha* sp.		(S)	East	Summer
2	*Ulva* sp.	Sea lettuce	NS	East	Summer
6	*Codium fragile*	Deadman's fingers	(S)	South	Summer
11	*Cystoseira osmundacea*		(S)	North	Spring
12	*Egregia menziesii*		NS	West	Summer
16	Unid. juv. *laminariales*		(S)	East	Fall
20	*Dictyota flabellata*		(S)	West	Spring
22	*Bossiella orbigniana*		(S)	West	Spring
24	*Corallina officinalis*		S	South	Summer
25	*Gelidium coulteri*		(S)	South	Fall
26	*G. robustum*		(S)	North	Spring
29	*Gigartina canaliculata*		(S)	East	Winter
30	*G. exasperata*		(S)	West	Summer
34	*Laurencia pacifica*		NS	West	Winter
35	*Lithothamnion-Lithophyllum* complex		S	South	Spring
37	*Peyssonellia* sp.		(S)	South	Winter
39	*Prionitis lanceolata*		NS	North	Spring
40	*Rhodoglossum affine*		NS	North	Summer
41	*Rhodymenia* sp.		(S)	East	Spring
42	*R. californica*		(S)	North	Winter
44	*Stenogramme* sp.		(S)	North	Summer
45	*S. interrupta*		(S)	East	Summer
48	cf. *Phormidium* sp.		(S)	East	Winter
68	*Cliona* sp.	Boring sponge	S	West	Winter
89	*Hymenamphiastra cyanocrypta*	Blue leaf sponge	(S)	East	Summer
103	*Anthopleura* sp.	Anemone	NS	South	Spring
104	*Astrangia lajollaensis*	Colonial coral	NS	East	Spring
106	*Corynactis californica*	Colonial red anemone	S	West	Spring
108	*Lophogorgia chilensis*	Pink gorgonian	NS	East	Spring
109	*Muricea* spp.	Gorgonians	S	North	Winter
110	*Paracyathus stearnsii*	Solitary coral	S	East	Winter
128	*Anomia peruviana Pododesmus cepio*	Jingles	(S)	East	Spring
148	*Doriopsilla albopunctata*	Yellow sea slug	S	West	Summer
153	*Kelletia kelletii*	Kellet's whelk	(S)	West	Spring
155	*Lottia gigantea*	Owl limpet	NS	South	Summer
157	*Megathura crenulata*	Giant keyhole limpet	S	West	Summer
158	*Mytilus californianus*	California mussel	NS	North	Spring
159	*M. edulis*	Bay mussel	(S)	North	Winter
170	*Serpulorbis squamigerus*	Scaled worm shell	S	North	Fall
185	*Diopatra ornata*	Worm	S	South	Fall
186	*Dodecaceria fewkesi*	Worm	S	North	Summer
187	*Eudistylia* sp.	Feather-duster worm	NS	North	Winter
200	*Lagenipora punctulata*	Moss animal	S	East	Fall
201	*Phidalopora pacifica*	Lace moss animal	S	East	Summer
202	*Scrupocellaria diegensis*	Moss animal	S	East	Fall
228	*Parastichopus* spp.	Sea cucumber	S	East	Spring
229	*Patiria miniata*	Bat star	NS	North	Winter
230	*Pisaster brevispinus*	Pink seastar	NS	North	Summer
231	*P. giganteus*	Giant seastar	NS	West	Winter
232	*P. ochraceus*	Ochre seastar	NS	East	Winter
241	*Strongylocentrotus franciscanus*	Red urchin	S	North	Spring
242	*S. purpuratus*	Purple urchin	S	West	Fall

[1] Species code referenced in Appendix B, Table B-1.

[2] (S) = Significant, based on absence during one or more seasons
S = Significant, despite presence during all seasons
NS = Not significant at the 95 percent confidence level

4. Distribution of Major Species Associations.

Dendograms resulting from the computer analysis are presented in Appendix C. The species groups identified by the computer generally agreed with the field observations. Clusters are particularly distinct for intertidal associations, as might be expected. On the basis of this exercise and first-hand field observations, the following 13 species associations (not including the shell talus beds) were tentatively identified and designated with generic names of conspicuously dominant species:

a. *Diopatra/cerianthid* anemones
b. *Astrangia*/gorgonians
c. *Lagenipora/Scrupocellaria*
d. *Lithothamnium* complex/*Serpulorbis/Veleroa*
e. Macrophytic algae
f. *Mytilus/Pollicipes*
g. Barnacles/limpets
h. *Corynactis/Astrangia*
i. *Lithothamnium* complex/*Serpulorbis/Dodecaceria/Veleroa*
j. *Astrangia/Corynactis/Lophogorgia*
k. *Tetraclita/Lithothamnium* complex
l. *Lithothamnium/Lagenipora/Veleroa*
m. *Lophogorgia/Corynactis/Veleroa*

The results of the fieldwork which entailed charting of the boundaries of these preliminary or tentatively identified associations relative to permanent features on the island are shown in Appendix C (Figs. C-3 to C-6). The scale on each of these charts may be used to determine plan view distances and actual (i.e., measured down the slope of each side) distances of all association boundaries from permanent features on the island. Permanent features include: navigational warning devices, surveyor triangulation points, and corners of concrete planter boxes used for landscaping the island.

Over most transects, boundaries between associations were distinct. Certain areas which appeared to have characteristics in common with adjacent associations are labeled "transition" zones in the charts. The intertidal associations 5, 6, 7, and 11 were particularly distinct. They contained species not found in other associations, their boundaries were sharply defined, and they were generally much narrower than the remaining (subtidal) associations. Associations 4 and 9, characterized by heavy coverages of *Lithothamnium* complex, accounted for the largest subtidal area of the island.

The east (protected) side differs in the general pattern of associations from the other three (more exposed) sides. Over most of the east side, sea cucumbers *(Parastichopus)*, gorgonians *(Muricea, Lophogorgia)*, stony corals *(Astrangia, Paracyathus)*, and ectoprocts *(Lagenipora, Scrupocellaria)* occurred in abundance. These groups were

generally restricted to the deeper waters on the other three sides. On the east side, a layer of silt varying in thickness from a few millimeters to over a centimeter covered most rock surfaces up to the lower intertidal. This silt precludes growth of some encrusting organisms (especially *Lithothamnium* complex), while others (e.g., *Veleroa* complex) seem tolerant of it.

5. Quantitative Characteristics of Major Species Associations.

The following average biomass values were developed for common attached biota not amenable to routine quantitative removal from the substrate:

Dodecaceria fewkesi (animals only, no tubes): 465 grams per 0.25 square meter
Lithothamnium complex: 783 grams per 0.25 square meter
Serpulorbis squamigerus (animals only, no shells): 1.9 grams per individual
Veleroa complex: 242 grams per 0.25 square meter
Corynactis californica: 190 grams per 0.25 square meter

When the 250 quantitative quadrats were grouped according to the preliminary association in which the quadrat was placed and the side of the island sampled, 26 groups or "subareas" resulted (see App. D, Table D-1). The designation of each of the 26 subareas in Table D-1 corresponds to the numerical association designations in Figures C-3 to C-6. For example, the data in Table D-1 for south-side association 5, refer to the macrophytic algae association on the south side only. Data for this association in other areas of the island are found under correspondingly different designations.

For all species encountered in each of the 26 subareas, the following summary statistics are tabulated in Tables D1 and D-2: frequency of occurrence (ratio of occupied quadrats to total number of quadrats examined in the subarea; mean abundance per quadrat (numerical or percent coverage); 95-percent confidence limits for mean abundance; and average weight per individual (or per 100-square centimeter coverage for species with densities estimated as percent coverage). Multiplication of the value for mean density by the average weight value yields an estimate of biomass for any species in any of the 26 groupings. Reliability of this estimate will be best for common species whose densities are relatively uniform from one quadrat to the next, as indicated by relatively narrow confidence limits for the mean. Table D-3 contains information on areas covered by each of the 26 subareas which were subjected to statistical analysis.

The resulting biomass data are useful in characterizing and comparing the major species associations of Rincon Island. However, the

data are of limited use beyond this for species whose weight is largely composed of nonliving material (e.g., clams, stony ectoprocts).

Species associations as determined by statistical differences within and between the 13 preliminary associations on each side of the island are shown in Figures 9 to 12. These associations may be compared with the preliminary species associations of Figures C-3 to C-6. Based upon statistical analysis, 4 of the 13 preliminary associations were combined with other associations, resulting in a total of 9 distinctly different major species associations. Areas covered by each of these final associations are given in Table D-3.

The quantitative characteristics of these major species associations are discussed below.

a. Barnacle-Limpet Association. This uppermost association (association A in Figs. 9 to 12) was relatively uniform in composition on all sides of the island. Dominant biota include acorn barnacles *(Chthamalus fissus, Balanus glandula,* and *Tetraclita squamosa,* in descending order of abundance) and limpets *(Collisella digitalis, C. scabra,* and *Lottia gigantea).*

The thatched barnacle, *Tetraclita squamosa,* was the species with the highest biomass in the aggregate samples. The only algae occurring in the samples from this zone were small amounts of *Enteromorpha* sp. and patches of *Ralfsia* sp.

b. *Mytilus/Pollicipes* Association. This association (association B in Figs. 9 to 12) is largely confined to a narrow band (about 2 meters wide) on the west side of the island. A small area of this association also exists on the southwest wing, but it was not sampled. The association is dominated in biomass by the California mussel *(Mytilus californianus),* which has an average biomass of 16.9 kilograms per square meter, and gooseneck barnacles *(Pollicipes polymerus)* which average 1.0 kilograms per square meter. A few limpets, striped shore crabs *(Pachygrapsus crassipes),* and acorn barnacles (*Balanus* spp.) are also found here. Small bay mussels *(Mytilus edulis)* were common below the surface layer of larger California mussels. Both species also occur in small numbers on the north and south sides, but only *M. edulis* was found on the east (most sheltered) side. Algae occurring in this association include *Bossiella orbigniana* and *Lithothamnium* complex. The *Mytilus-Pollicipes* association is higher in biomass per unit area than any other association on the island.

c. *Anthopleura* spp. Association. This association (association C in Figs. 9 to 12) is composed almost entirely of green anemones of the genus *Anthopleura.* Although *Anthopleura* spp. occur in large numbers in the macrophytic algae zone, their occurrence in

large patches which could reasonably be labeled as a distinct association was limited to a few areas on the southeast and northeast "wings" of the island.

d. Macrophytic Algae Association. The macrophytic algae association (association D in Figs. 9 to 12), extends around the island in a continuous band except on the east side under the wharf, where light is presumably the limiting factor. Its composition is variable from side to side. Statistical comparisons between association D in various parts of the island and association E on the north side (the type *Lithothamnium* association) generally showed no significant differences for the three taxa selected as characteristic dominants for association E *(Lithothamnium* complex, *Veleroa* complex, and *Dodecaceria fewkesi).* The only exceptions were the south side, which had significantly less *Veleroa* and *Dodecaceria* than association E, and the southeast wing, which had significantly less *Veleroa.* Thus, it appears reasonable to consider association D as an extension of association E, overgrown by macrophytes to depths where physical conditions (including illumination) are favorable.

Lithothamnium dominates algal biomass on all sides of the island. The macrophytic algae zone on the south side is unusual in that *Lithothamnium* complex there is composed of much thicker and irregular patches than elsewhere on the island. The south side also supports the densest growths of a coralline alga (*Corallina officinalis)* and a green alga (*Codium fragile).* Other common species on the south side include feather boa kelp *(Egregia menziesii), Gelidium robustum,* and *Gigartina canaliculata.* The north side also supports substantial beds of *Egregia.* Other north-side macrophytic dominants include *Prionitis lanceolata* and *Gelidium robustum. Cystoseira osmundacea* and coralline algae are abundant in some areas of the north side. Quantitative data for the west side are of limited value in characterizing the macrophytic algae because none occurred in any of the random west-side quadrats. Qualitative observations and results of the seasonal surveys suggest that this zone is dominated by *Egregia, Cystoseira,* coralline algae, and *Gigartina canaliculata.* A bed of giant kelp *(Macrocystis* sp.) is located at the south end of the west side of the island. Judging from earlier air photos, however, the present kelp bed is small compared to the extensive beds that have existed in the past. Large numbers of sea urchins now exist on the island and may account for this phenomenon. It is possible that kelp and urchins alternate in cycles of abundance on the island. The inverse relationship between urchin and algae abundance has been discussed, for example, by North (1962).

e. *Lithothamnium-Veleroa* Association.

The *Lithothamnium* association (association E in Figs. 9 to 12) is characterized by high concentrations of *Lithothamnium* complex,

Veleroa complex, and *Dodecaceria fewkesi*. Macrophytic algae and deeper dominants such as *Corynactis, Astrangia,* gorgonians, and ectoprocts are scarce. An exception to this generalization is found on the north side, where a dense band of gorgonians *(Muricea fruticosa* and *M. californica)* exists (see Figs. 9 to 12). Dense growths of ectoprocts (mostly *Lagenipora punctulata, Scrupocellaria diegensis,* and *Phidolopora pacifica)* and *Serpulorbis squamigerus* are found at the bases of the gorgonians, apparently taking advantage of sheltered habitat conditions. A quadrat from the northeast wing *Lithothamnium-Veleroa* association (outside the dense *Muricea* band) produced the highest number of species (37) of all 250 quadrats analyzed. Bat stars *(Patiria miniata)* and urchins are abundant over the *Lithothamnium-Veleroa* association on all sides. The giant keyhole limpet *(Megathura crenulata)* is frequently encountered here, as are sea cucumbers *(Parastichopus californicus* and *P. parvimensis).* This association accounts for more subtidal areal coverage than all other associations combined and it is highly uniform in species composition around the island. Despite relatively intensive sampling, no statistically significant differences in biomass of the characteristic dominants *(Lithothamnium, Veleroa,* and *Dodecaceria)* were found between this association on the north side and similar associations elsewhere on the island (associations 4, 9, and 12 in Figs. C-3 to C-6 were found not significantly different from the north-side *Lithothamnium-Veleroa* association).

f. *Veleroa-Lagenipora-Lophogorgia-Muricea* Association.

In deeper areas of the *Lithothamnium* zone around the island, the upper parts of the rocks support species representative of that association, while ectoprocts abound on the side and undersurfaces. Deeper yet, the dominant taxa are distinctly different from those characteristic of the *Lithothamnium* association. Taxa commonly occurring in this area include *Veleroa* complex, solitary and colonial corals *Paracyathus stearnsii, Balanophyllia elegans,* and *Astrangia lajollaensis),* gorgonians *Muricea* spp. *Lophogorgia chilensis),* colonial anemones *(Corynactis californica),* ectoprocts *(Scrupocellaria diegensis, Lagenipora punctulata,* and *Phidolopora pacifica)* and the scaled worm shell gastropod, *Serpulorbis squamigerus.* During the phase of work involving charting of the major species associations, five associations were provisionally discriminated (2, 3, 8, 10, and 13 in Figs. C-3 to C-6) in this deeper area. Although this group of associations is distinctly different from the *Lithothamnium* association, there was no statistical reason on the basis of the data and observations to separate any of the five preliminary associations from one another. Accordingly, these deep associations are combined under the letter designation F in Figs. 9 to 12. A large "transition zone" on the west side was not significantly different from the *Lithothamnium* association; however, two smaller transition areas, one on the northwest wing and one on the southeast wing, were significantly different.

g. *Rhodymenia-Veleroa* Association.

On the east side, an association exists which is significantly depauperate in *Lithothamnium* complex and significantly enriched (relative to adjacent *Lithothamnium* associations) in the red alga, *Rhodymenia* sp. This is the *Rhodymenia-Veleroa* association, labeled G in Figs. 9 to 12. High densities of *Veleroa* complex, ectoprocts, colonial anemones, corals, *Serpulorbis squamigerus,* and the densest growths of *Dodecaceria fewkesi* on the island are found here. Nudibranches, especially *Flabellinopsis iodinea,* are also common in this zone. The more fragile branching ectoprocts which occur in deeper water on all four sides of the island exist at shallow depths only on the east side, apparently because wave forces are much reduced relative to the other three more exposed sides.

h. *Lithothamnium-Tetraclita* Association.

Above the *Rhodymenia-Veleroa* association (association G) on the east side, an association composed almost entirely of *Lithothamnium* complex and the large thatched barnacle, *Tetraclita squamosa* occurs over extensive shallow subtidal and intertidal areas (association H in Figs. 9 to 12). Although the two species are found in association in other parts of the island's intertidal and shallow subtidal areas, these occurrences are very limited in extent.

i. *Diopatra-Cerianthid* Anemones Association.

Small pockets of shell talus, usually partially covered with silt, are commonly found in the deeper areas of association F. These areas are designated as association I in Figures 9 to 12, and they extend over the talus beds to the natural bottom. The tube worm, *Diopatra ornata;* tube anemones, *Pachycerianthus* spp.; bat stars, *Patiria miniata,* and nudibranches *(Dendrodoris fulva)* are very common in these associations.

6. Gill Net Survey Results.

Results of the gill net survey are summarized in Table 3. The nets yielded a total of 270 fishes of 23 species. Five taxa accounted for 61 percent of individuals captured. In decreasing order, they were: olive rockfish, *Sebastes serranoides;* midshipman, *Porichthys* spp.; walleye surfperch, *Hyperprosopon argenteum;* swell shark, *Cephaloscyllium ventriosum;* and white seaperch, *Phanerodon furcatus.* Four of these species (all except *C. ventriosum)* were captured on all four sides of the island. The highest number of individuals and species was captured on the east (most protected) side of the island. Average catch rates were highest during the day on the west side, lowest on the east side. However, for the gill net sets overlapping day and night periods, this pattern was reversed. The south and east sides had the greatest number (15) of species in common; the north and west sides were least similar in this respect.

Table 3. Gill net catch per hour at Rincon Island.

	Side:	North							South						
	Time:	Day			Day-Night				Day			Day-Night			
	Hours Fished:	4 Hrs			23 Hrs				4 Hrs			21 Hrs			
SPECIES	COMMON NAME	No.	Mean Length (cm)	Length Range (cm)	No.	Mean Length (cm)	Length Range (cm)	Total	No.	Mean Length (cm)	Length Range (cm)	No.	Mean Length (cm)	Length Range (cm)	Total
SHARKS															
Cephaloscyllium ventriosum	Swell shark				9	62.6	53-72	9				9	63.3	58-85	9
Squalus acanthias	Spiny dogfish				1	88		1				1	93		1
TOADFISHES															
Porichthys spp.	Midshipman				23	24.3	15-31	23				6	19.2	18-20	6
ROCKFISHES															
Sebastes cf. *caurinus*	Copper rockfish											3	14.5	13-17	3
S. mystinus	Blue rockfish														
S. serranoides	Olive rockfish				9	24.3	17-31	9	1	18	18	26	20.9	17.5-27	27
S. auriculatus	Brown rockfish				1	19		1	1	18	18				1
S. atrovirens	Kelp rockfish				1	21		1							
S. sp. #1	Kelp rockfish											1			1
S. sp. #2	Kelp rockfish														
GREENLINGS															
Ophiodon elongatus	Lingcod											1	55		1
SCULPINS															
Scorpaenichthys marmoratus	Cabezon				2	17.5	14-21	2				1	27		1
SEABASSES															
Paralabrax clathratus	Kelp bass											3	26	16-32	3
CROAKERS															
Cheilotrema saturnum	Black croaker				1	24.5		1							
Genyonemus lineatus	White croaker														
Seriphus politus	Queenfish				3	19.3	18.5-20.5	3				1	9		1
OPALEYES/BLACKSMITHS															
Girella nigricans	Opaleye				4	40.5	39-43	4				1	34		1
Chromis punctipinnis	Blacksmith				2	11	6-16	2							
SURFPERCHES															
Embiotoca jacksoni	Black perch	2	17.5	16-19	5	18.6	12-24	7	1		20	3	19	15-23	4
Phanerodon furcatus	White seaperch				8	14.3	12-18	8				2	19	13-25	2
Rhacochilus vacca	Pile perch								1		11				1
Rhacochilus toxotes	Rubberlip surfperch											3	30.5	27-33	3
Hyperprosopon argenteum	Walleye surfperch				1	12		1				3	12.5	11-13.5	3
TOTAL NOS.		2			70			72	4			64			68
TOTAL SPP.		1			14			14	4			15			17
Average Catch/Hour (all species)		0.5			3.0			2.7	1.0			3.1			2.

Table 3. Gill net catch per hour at Rincon Island.--Continued.

	Side:	East							West							
	Time:	Day			Day-Night				Day			Day-Night				
	Hours Fished:	4 Hrs			23.5 Hrs				4 Hrs			17 Hrs				
SPECIES	COMMON NAME	No.	Mean Length (cm)	Length Range (cm)	No.	Mean Length (cm)	Length Range (cm)	Total	No.	Mean Length (cm)	Length Range (cm)	No.	Mean Length (cm)	Length Range (cm)	Total	GRAND TOTAL FOUR SIDES
SHARKS																
Cephaloscyllium ventriosum	Swell shark				4	55.8	53-58	4								22
Squalus acanthias	Spiny dogfish															2
TOADFISHES																
Porichthys spp.	Midshipman				4	23.8	18-26	4				11	18.8	17-21	11	44
ROCKFISHES																
Sebastes cf. *caurinus*	Copper rockfish				1	13.5		1								4
S. mystinus	Blue rockfish				2	16.5	16-17.5	2	2	17	15-19	2	15	14-16	4	6
S. serranoides	Olive rockfish	1	18	18	14	19.9	10.5-23.5	15	1	22		5	20.8	18-24	6	57
S. auriculatus	Brown rockfish				2	22.3	19-25.5	2								4
S. atrovirens	Kelp rockfish				1	23		1								2
S. sp. #1	Kelp rockfish															1
S. sp. #2	Kelp rockfish				1	20		1								1
GREENLINGS																
Ophiodon elongatus	Lingcod				1	47		1								2
SCULPINS																
Scorpaenichthys marmoratus	Cabezon				1	31		1								4
SEABASSES																
Paralabrax clathratus	Kelp bass				2	42	41-43	2								5
CROAKERS																
Cheilotrema saturnum	Black croaker											8	29.4	27-31	8	9
Genyonemus lineatus	White croaker				3	17	15.5-18.5	3								3
Seriphus politus	Queenfish				3	18.5	17.5-19.5	3				1	17		1	8
OPALEYES/BLACKSMITHS																
Girella nigricans	Opaleye				2	35	34-36	2				3	34.3	31-37	3	10
Chromis punctipinnis	Blacksmith				2	16	16	2	8		14-20				8	12
SURFPERCHES																
Embiotoca jacksoni	Black perch				3	17	15-19	3	1	11	11	2	20.5	20-21	3	17
Phanerodon furcatus	White seaperch				5	14.7	11-18.5	5				3	16	13-21	3	18
Rhacochilus vacca	Pile perch				2	20.5	17-24	2				1	21		1	4
Rhacochilus toxotes	Rubberlip surfperch				4	26.1	23.5-29	4	2	2	21-25	1	31	31	3	10
Hyperprosopon argenteum	Walleye surfperch				17	14.2	10-17	17				2	16.5	16-17	2	23
TOTAL NOS.					76			77	14			39			53	270
TOTAL SPP.					20			20	5			11			12	23
Average Catch/Hour (all species)					3.2			2.8	3.5			2.3			2.5	

White croakers *(Genyonemus lineatus)* were captured only on the east side and an unidentified species of rockfish was captured only on the south side.

7. Natural Bottom Survey Results.

Figure 3 shows the location of the natural bottom transect and sampling stations for sediment infauna. Dominant epibiota (organisms on the surface of rocks or sediments) and substrate type encountered along this transect are shown in Figure 21. In general, the deeper areas of the transect, which are representative of the natural bottom existing before the island was constructed, are predominantly sedimentary (sandy silt grading into silty sand in the shoreward direction). On the basis of diver observations, it may be stated that the biomass, numbers, and variety of epibiota encountered visually over natural bottom areas are much lower than that of epibiota oberved on the rock revetments of the island. Although rocky areas exist in the shallower parts of the transect, the biota they support was observed to be of lower abundance and variety than the biota occurring at corresponding depths on the island. The macrophytic algae band is broader over the transect than on the island; however, zonation in general is much less distinct over the natural bottom transect than over the island's revetments. A more detailed account of biota and habitat types observed along this transect is provided in Appendix E.

The results of analysis of the sedimentary infauna samples are summarized in Table 4 (data on grain-size distributions for the two sediments sampled are given in App. F). A total of 62 species was encountered in the six samples. Disregarding sample 4 (a part of which was lost), polychaetes accounted for 35 percent of the wet weight biomass and 50 percent of the taxa present in the samples taken collectively.

Diversity, as represented by Simpson's Index, was relatively uniform and high, averaging about 0.93 for the five complete samples. These high numbers reflect the relatively even distribution of individuals among the species present and the fact that the proportion of total individuals accounted for by any single species is small in these samples.

The biomass values, which averaged approximately 0.7 gram per sample, convert to approximately 14 grams per 0.25 square meter of sedimentary bottom. Even considering the added contribution of epifaunal biomass, the quantitative samples indicate that the biomass of natural bottom habitats is much lower overall than that of the rock revetments of the island (see Tables D-1 and D-2). Also, the number of species encountered during limited sampling of natural bottom areas is much less than recorded on the rock habitats of the island.

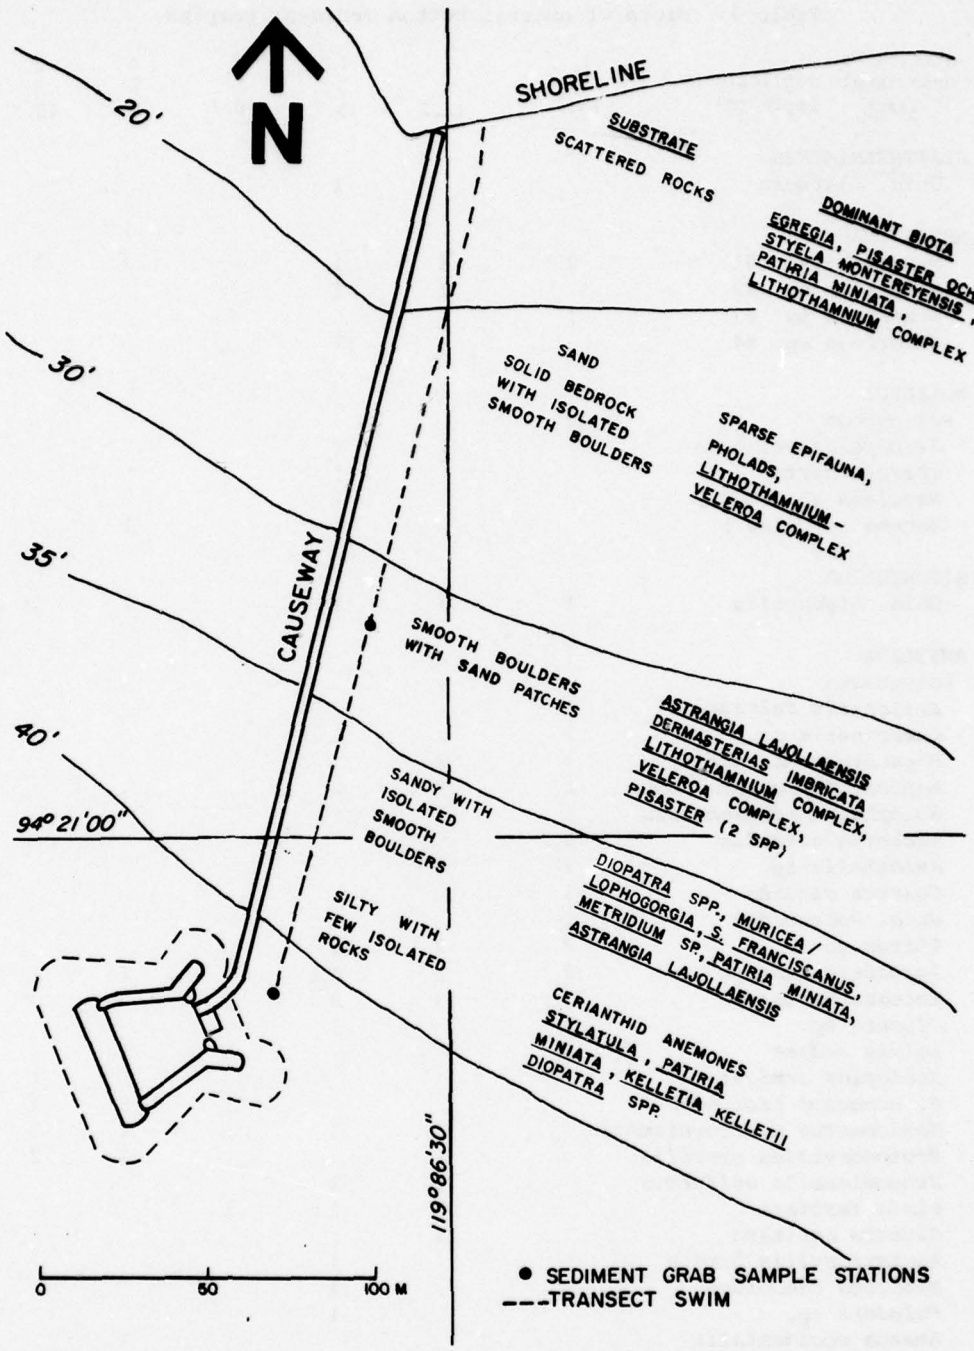


Figure 21. Dominant biota and substrate type along natural bottom transect. (Depth contours in feet below MLLW.)

Table 4. Biota of natural bottom sediment samples.

Station No.	1	1	1	2	2	2
Grab sample replicate No.	1	2	3	1[1]	2	3
Taxon Depth (m):	13.7	13.7	13.7	10.7	10.7	10.7
PLATYHELMINTHES						
Unid. flatworm			1			
NEMERTINA						
Nemertean sp. #1	2	1	1		3	1
Nemertean sp. #2		1	1			
Nemertean sp. #3	1					
Nemertean sp. #4			1			
MOLLUSCA						
Pelecypoda						
Axinopsida sericata		2	2			
Thracia curta[2]			1			
Naculana sp. (juv.)			1			
Macoma sp. (juv.)					1	
SIPUNCULIDA						
Unid. sipunculid	1	1	1		2	1
ANNELIDA						
Polychaeta						
Driloneris falcata	1					
Lumbrineris sp.	1	2	1			1
Sigambra tentaculata	2	2				
Haploscoloplos mexicanus	2	5	2			
Spiophanes missionensis	1	1				
Tauberia gracilis	6					
Axiothella sp.	2	2				
Cossura candida	3					
Unid. Polynoidae	1					
Tharyx sp.	8	2	2			
Ampharete labrops	1	1	1		1	1
Notomastus sp.	1	3	3			
Glycera sp.	1		1			
Loimia medusa	1				1	
Scoloplos armiger						1
S. acmeceps profundus					3	1
Mediomastus californiensis			1		1	2
Protodorvillea gracilis					2	2
Sthenelanella uniformis		2	3			
Pista fasciata		1	1	1		
Glycera capitata		1				
Ancistrosyllis hamata			1			
Nephthys caecoides			1			
Polydora sp.			1			
Amaena occidentalis					1	
Polycirrus perplexus					1	
Prionospio nr. *malmgreni*					1	
Praxiella affinis pacifica					1	
Diopatra ornata					1	
Spiochaetopterus costarum					2	
Typosyllis hyalina					1	

See footnotes at end of table.

Table 4. Biota of natural bottom sediment samples.--Continued.

Station No.	1	1	1	2	2	2
Grab sample replicate No.:	1	2	3	1[1]	2	3
Taxon Depth (m):	13.7	13.7	13.7	10.7	10.7	10.7
ARTHROPODA CRUSTACEA						
AMPHIPODA						
Ampelisca cristata	1					
Paraphoxus obtusidiens				2	2	
Synchelidium sp.				2	1	
Monoculodes cf. *hartmanae*				1		
Aorides columbiae				1		
Metaphoxus frequens						1
Paraphoxus heterocuspidatus					1	
DECAPODA						
Cancer sp. (juv.)						1
Pinnotheridae (juv.)	1		1		1	
CUMACEA						
Diastylopsis tenuis				6		3
Cyclaspis sp.[3]					1	
Hemilamprops californica	1		1	2		3
Lamprops cf. *carinata*				2	1	
OSTRACODA						
Asteropella sp.						1
ISOPODA						
Serolis carinata						
ECHINODERMATA						
OPHIUROIDEA						
Amphiodia digitata		1	1			
A. sp. (juv.)		2				
Amphipholis squamata						
Amphiodia occidentalis			4			
HOLOTHUROIDEA						
Unid. holothurian					1	
CHORDATA						
CEPHALOCHORDATA						
Branchiostoma californiense			1		5	
Total species	20	17	25	7	23	14
Total individuals	38	30	35	16	35	20
Simpson's index of diversity[4]	0.94	0.92	0.95	0.79	0.94	0.91
Wet weight (gm)						
Polychaetes	0.42	0.19	0.19	0.01	0.22	0.18
Total	0.44	0.72	1.20	0.02	0.86	0.22

[1] A part of this sample was lost

[2] A hard bottom-type species.

[3] Undescribed species

[4] $D = 1 - \sum_{i=1}^{s} (p_i)^2$

with high densities of tube worms and tube anemones separate the deep associations from natural bottom on all sides except the east side. Two associations are unique to the east side. The shallower of the two is composed almost entirely of large barnacles and encrusting algae. The deeper association has high densities of certain species of red algae.

Twenty-three species of fishes were captured in gill nets placed on all four sides of the island. Rockfish, surfperch, toadfish, and swell sharks dominated the catch. Nets on the west (most exposed) side yielded the highest catch (numbers and species) during daytime sets. The east-side nets had the highest catches in the combined day-night sets.

The biota along a transect over natural bottom from near the island to shore were considerably lower in abundance or density and in number of species relative to biota at corresponding depths on the island's revetments. This was especially the case for sedimentary bottom in deeper water where the island is situated. Samples of natural sediments were dominated by polychaete worms (35 percent of biomass and 50 percent of species), small crustaceans, clams, ribbon worms, and brittle stars.

The construction of Rincon Island has had a major beneficial effect on local ecological conditions. The quarry rock and tetrapod construction materials offer habitat features which are not found in a natural sedimentary bottom area. The solid substratum is colonized by a high diversity of encrusting and attached biota. Many of these are habitat-forming species in the sense that they provide shelter and food for additional species. High vertical relief and vast amounts of interstitial space attract many species of fishes which are seldom or never encountered over sedimentary bottom areas.

LITERATURE CITED

BLUME, J.A., and KEITH, J.M., "Rincon Offshore Island and Open Causeway," *Journal of the Waterways and Harbors Division,* American Society of Civil Engineers, Vol. 85, No. WW3, Sept. 1959, pp. 61-93.

BUCHANAN, C.C., "A Comparison of Sport Fishing Statistics from Man-Made and Natural Habitats in the New York Bight," *Coastal Plains Center for Marine Development Services, Seminar Series,* No. 1, 1972, pp. 27-37.

CARLISLE, J.G., Jr., TURNER, C.H., and EBERT, E.E., "Artificial Habitat in the Marine Environment," Fish Bulletin 124, The Resources Agency of California, Department of Fish and Game, Long Beach, California, 1964.

CHAN, G.L., "Subtidal Mussel Beds in Baja California With a New Record Size for *Mytilus californianus, The Veliger,*", Vol. 16, 1973, pp. 239-240.

COLUNGA, L., and STONE, R. eds., *Proceedings of an International Conference on Artificial Reefs,* Center for Marine Resources, Texas A & M University; National Marine Fisheries Service; and Texas Coastal and Marine Council, Houston, Tex., 1974.

DAMES & MOORE, "A Study of the Performance of Certain Artificial Islands on the Pacific Coast of the United States," Report No. 2443-079-10, Los Angeles, Calif., 1974.

FAGER, E.W., "Patterns in Development of a Marine Community," *Limnology and Oceanography,* Vol. 16, No. 2, Mar. 1971, pp. 241-253.

KEITH, J.M., and SKJEI, "Engineering and Ecological Evaluation of Artificial-Island Design, Rincon Island, Punta Gorda, California," TM-43, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., Mar. 1974.

NORTH, W.J., "Ecology of the Rocky Nearshore Environment in Southern California and Possible Influences of Discharged Wastes," International Conference on Water Pollution Research, London, Sept. 1962, pp. 247-273.

PAINE, R.T., "Biological Observations on a Subtidal *Mytilus californianus* Bed," *The Veliger,* Vol. 19, 1976, pp. 125-130.

SNEATH, P.H.A., and SOKAL, R.R., *Numerical Taxonomy: the Principles and Practice of Numerical Classification,* Freeman & Company, San Francisco, 1973.

SOKAL, R.R., and ROHLF, F.J., *Biometry, the Principles and Practice of Statistics in Biological Research,* Freeman & Company, San Francisco, 1969.

SOOT-RYEN, T., "A Report on the Family Mytilidae (Pelecypoda)," *Allen Hancock Pacific Expedition,* Vol. 20, No. 1, University of Southern California Press, Los Angeles, Calif., 1955.

SOUTHERN CALIFORNIA COASTAL WATER RESEARCH PROJECT, 1976 Annual Report, El Segundo, Calif., 1976, pp. 179-186.

STONE, R.B., "Artificial Reefs of Waste Material for Habitat Improvement," *Marine Pollution Bulletin,* Vol. 3, No. 2, Feb. 1972, pp. 27-28.

STONE, R.B., "Artificial Reefs and Coastal Fishery Resources," *Proceedings of the 10th Space Congress,* Canaveral Council of Technical Societies, 1973, pp. 2-19.

STONE, R.B., BUCHANAN, C.C., and PARKER, R.O., "Expansion and Evaluation of an Artificial Reef of Murrells Inlet, S.C.," Final Report, Coastal Plains Regional Commission, Washington, D.C., 1973, p. 55.

STONE, R.B., BUCHANAN, C.C., and STEIMLE, F.W., Jr., "Scrap Tires as Artificial Reefs," Report SW-119, U.S. Environmental Protection Agency, Washington, D.C., 1974.

TATE, M.W., and CLELLAND, R.C., *Nonparametric and Shortcut Statistics in the Social, Biological, and Medical Sciences,* Interstate, Danville, Ill., 1957.

TURNER, C.H., EBERT, E.E., and GIVEN, R.R., "Man-made Reef Ecology," Fish Bulletin 146, The Resources Agency of California, Department of Fish and Game, Long Beach, Calif., 1969.

APPENDIX A

DETAILED METHODOLOGY

1. Details of Talus Bed Measurement and Data Processing Methodology.


An initial dive was made to calibrate depth gages of all divers and to verify criteria for use in determining the inshore and offshore boundaries of the talus bed. The north side had an irregular fill base (where rock and talus meet), and a heavy sediment overburden downslope which made the talus boundary difficult to determine.

Using a steel tape, a metered line, and an underwater slate, one diver made the first measurement of the rock revetment, holding the free end of the 30.5-meter steel tape on an azimuth perpendicular to the cardinal side. When the diver reached the end of the rock revetment (beginning of the talus bed), the depth, distance, and time were recorded. Three divers then swam to the first diver's location. Measurements were taken on the cardinal sides between the points where the angle of the side changed direction (beginning of "wing" of the island). The first team of two divers measured the talus bed width (inner to outer margin) by having one diver hold the free end of a 50-meter line (marked) in meter intervals) while the sedond diver swam along the perpendicular azimuth to the outer edge of the talus bed. At this point the second diver recorded depth, time, and distance. The first diver was then signaled to join the second diver at the outer edge. The pair then measured the outer edge of the talus along the entire length of the side, using the method discussed below. A second team of two divers measured the talus along the inner edge.


Swimming along an azimuth parallel to the side, one diver deployed the steel tape along the inner or outer edge of the talus bed (the second diver held the free end of the tape and remained at the start point) until a change in depth ($\pm$0.15 meter) or direction ($\pm 10^{o}$) was noted. At that point the first diver stopped, noted distance swum, depth, and time. The second diver was then signaled to swim to the first diver. From this point the first diver swam up the revetment to the waterline. At the waterline, the diver noted distance and time. He then returned to the bottom where the second diver was waiting. The width of the talus bed was measured from this point to the outer edge where again time, depth, and distance were recorded. The first diver returned to the second diver and repeated the process, moving along the cardinal side. The team on the outer edge used an identical method except that team measured the width of the talus bed from the outer to inner edge. Each time a talus width was measured, the corresponding distance up the revetment (waterline to inner edge of talus bed) was measured. This method allowed multiple points of measurement and allowed divers to observe changes at the outside and inside limits of the bed.

The following diagrams illustrate the methodology used for charting the talus beds.


(1) Line of measured distance (waterline to talus bed-revetment bor der) (d^1) and width of talus bed (d^2) was drawn on quadrangle paper (1 cm = 2.4m)




(2) The next line (distance between revetment measurement points) was then plotted in the form of circle with that distance (d^3) as the radius.

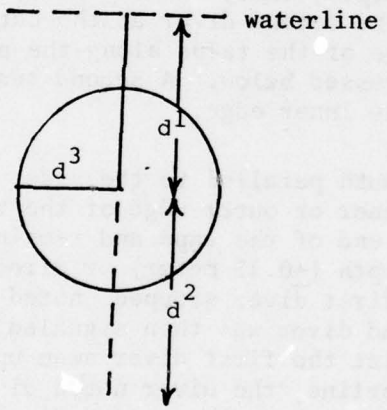

(3) The length of the second revetment measurement (d^4) was then plotted to where it intersected the circle. This gave the distance between measurements at the waterline (d^5) which could be converted for three-dimensional diagraming.

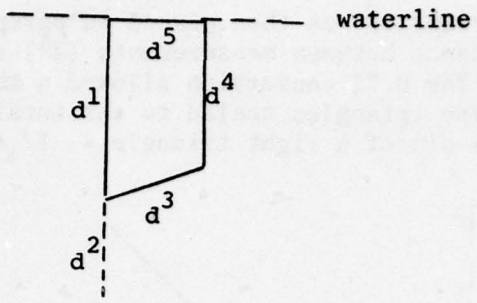


(4) The second talus bed length (d^6) was then plotted as shown

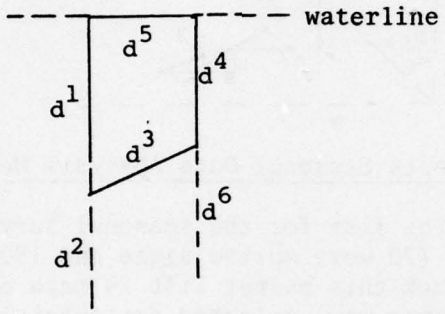


(5) This methodology was continued along the entire side until a planar view of that side was constructed.

(6) To show these data in three-dimensional diagram, the planar diagram was converted to a series of triangles using d^1 as the hypotenus of the revetment and d^2 as the hypotenus of the talus. Depths (height) were converted to MLLW by adding or subtracting the number of meters difference according to time (e.g., at 1330 hours, 15 October 1976 tide at Rincon Island (Ventura) was +0.76 meter; thus, 0.76 meter would be subtracted from the height of the "revetment triangle").

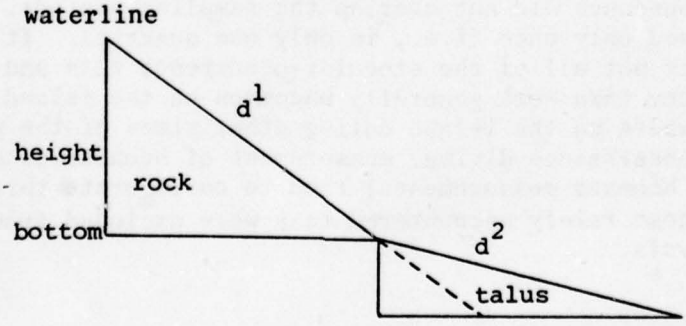

(7) The series of triangles was then placed in perspective by converting the distance between measurements (d^5) to a distance 0.71 times d^5. The 0.71 conversion allowed a three-dimensional depiction of these triangles scaled to the total side of the island. (0.71 = sin of a right triangle = $1/\sqrt{2}$)

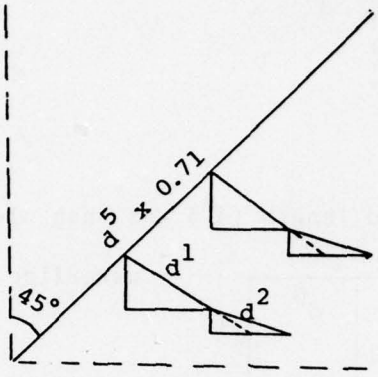

2. Permanent Transects Seasonal Data Analysis Methods.

The master species list for the seasonal surveys included 250 taxonomic categories (70 were marine algae and 180 were marine invertebrate taxa). From this master list 24 taxa of marine algae and 30 taxa of invertebrates were selected for special study of seasonal variability. Proportionately, more algal taxa were used than invertebrate taxa, because seasonal effects are often well pronounced among algae, especially reds *(Rhodophyta)*. The only algal taxa omitted from the analysis were those of uncertain identity or which (a) occurred in low density, and (b) were found on only one side and during only one season. The number of invertebrate taxa selected for analysis was in part dictated by data-handling considerations. Even when unidentified taxa were eliminated, the amount of data remaining was formidable. Many of these taxa were observed at such low frequencies as to be of little value in any seasonal analysis. Either these species are uncommon on the island; the transects missed their centers of abundance; or, if they were seasonally abundant, their peaks in abundance did not overlap the sampling periods. Many taxa were observed only once (i.e., in only one quadrat). It is assumed that most if not all of the singular-occurrence taxa and most of the low-frequency taxa were generally uncommon on the island. Observations elsewhere on the island during other times of the year (i.e., during reconnaissance diving, measurement of boundaries of associations, and biomass measurements) tend to corroborate this. For these reasons, these rarely encountered taxa were excluded from the seasonal analysis.

For the 54 taxa selected for the seasonal effects analysis, additional analysis was necessary to maximize data utility. A bias factor existed if a particular species occurred over a limited part of a permanent transect, and its density was calculated by dividing total abundance by n, the total number of quadrat samples taken in the permanent transect. This provided a value for mean density over the entire island; however, this would be justified only for species ubiquitously distributed (i.e., over the entire length of the transect). The distribution of only one species, the starfish, *Patiria miniata*, approaches this (see Figs. 17 to 20). A better approach would be to divide total abundance by the number (n) of quadrats where the species may reasonably be expected to occur, and express mean density with reference to the parts of the island over which the species actually occurs (or those associations of which it is a member). Mean densities of each species may be more meaningfully compared to resolve seasonal differences using this approach. Briefly, the mechanics of this data processing operation involved scanning the raw data tables to bracket the upper and lower occurrence limits for each species and then logging onto computer keypunch forms the frequency of every density value observed (including zero density values for quadrats lacking a given species, but falling within its range of occurrence).

Before the data were subjected to parametric statistical analysis, it was necessary to perform data transformations to normalize the data. For species whose densities were recorded as percentage coverage, the values were transformed to angles through the use of the arcsine transformation ($\theta = \arcsin \sqrt{\rho}$, where ρ is a proportion). This transformation rendered a distribution of percentages or proportions more nearly normal by stretching out both tails of the distribution and compressing the middle values (Sokal and Rohlf, 1969). Numerical densities were subjected to the square root transformation. Because zero values were frequent in the data, the computer was programed to add 0.5 to all values before data transformation. The transformation was then of the form $\sqrt{Y + \frac{1}{2}}$ (Sokal and Rohlf, 1969).

The actual calculations of the means used all the raw data for variances to be calculated for each of the 54 taxa examined. Seasonal means (data for all four sides lumped) were first tested for significant differences by performing an F test (variance ratio test) to determine whether variances for two seasons under comparison were equal. If the F test was nonsignificant (variances probably equal), the following student's t test for differences between seasonal means was applied (Sokal and Rohlf, 1969):

$$t_s = \frac{(\bar{Y}_1 - \bar{Y}_2) - (\mu_1 - \mu_2)}{\sqrt{\frac{S_1^2}{n_2} + \frac{S_2^2}{n_1}}}$$

with $n_1 = n_2$ 2 df. When significant F ratios were found, indicating disparate variances, an approximate t test was used (Sokal and Rohlf, 1969):

$$t'_s = \frac{(\bar{Y}_1 - \bar{Y}_2) \quad (\mu_1 - \mu_2)}{\sqrt{\frac{S_1^2}{n_1} + \frac{S_2^2}{n_2}}}$$

Summary data for all 54 species selected for seasonal analysis are presented in Table B-1. For each species, this table presents transformed and untransformed means, standard deviations, transformed variances, transformed range data, and an indication of whether the F and t tests are significant at the 95-percent confidence level.

These values are tabulated for each of the four seasons with data combined for all four sides, and for each of the four sides with data combined for all four seasons. Side differences were not tested for significance.

Note that the values in Table B-1 of Appendix B for mean densities for each species refer to their abundance only over the parts of the island wherein the species may reasonably be expected to occur--not over the entire extent of the island revetments.

Because of the lack of data during two seasons for the west-side macrophytic algae, *Mytilus-Pollicipes*, and barnacle-limpet zones, special consideration was required for the species that occurred in these zones. These included most of the algae species and the following invertebrates: *Anthopleura* sp., *Lottia gigantea*, *Mytilus californianus*, and *Pisaster ochraceus*. For these species, means for seasons 1 and 4 were compared since data from seasons 2 and 3 were questionable. A rerun of the entire analysis for all these species resulted in changes from significant to nonsignificant (at the 95-percent confidence level) for only four species: *Laurencia pacifica*, *Rhodoglossum affine*, *Lottia gigantea*, and *Pisaster ochraceus*. No species changed from nonsignificant to significant with the reanalysis.

3. Methodology for Preparation of Figures 9 to 12 and Appendix C Figures C-3 to C-6 (Boundaries of Major Associations).

ARCO Drawing No. CE-1-8, dated 3 March 1965, was used as a base chart for plotting field-acquired data on boundaries of species associations. Different tide levels were shown on the drawing for four different parts of the island; these levels corresponded to times when measurements were taken over the four parts of the island. Spot measurements taken between fixed reference points and the waterline (which was not at MLLW) at times of corresponding tidal heights agreed well with the distances represented on the drawing.

The first step was to adjust the waterline to MLLW. This was done by dividing the tidal height (e.g., +1.2 meters MLLW) by the tangent of the side-slope angle. The slope angle for each side was determined by averaging data obtained during the talus bed measurement phase of this project (see Figs. 5 to 8). The resulting MLLW line is as it would appear if observed directly from some altitude above the island. True distances measured down the slope of each side may be determined using the scale provided on each island sector chart (Figs. 9 to 12 and Figs. C-3 to C-6).

Next, distances measured from fixed reference points at the top edge of the island to the upper limit of the splash zone (barnacle-limpet association) were trigonometrically corrected for slope and plotted. The width of the zone bounded at the top by the barnacle-limpet line and at the bottom by the MLLW line (representing the main part of the intertidal zone) was uniform around the island, providing a positive check on accuracy of the waterline shown on the drawing. Only 2 of the 15 points showed discrepancies. One on the south side was off by about 1.2 meters, and the decision was made to redraw the MLLW line at this point to maintain width uniformity for the intertidal. The other, on the west side, was off by almost 6.1 meters (the measurement during this study indicated a shorter distance). This discrepancy may be due to movements of tetrapods in response to wave forces since the 1965 drawing (a semisubmerged tetrapod lies just seaward of the "first" waterline); or the difference may be a result of the manner in which the measuring tape was laid over the tetrapods (i.e., a greater distance would result if the tape were placed over the highest points on the tetrapods).

The top margin of the barnacle-limpet zone served as the reference point for all distance measurements taken during the association mapping phase of the project. Distances to association boundaries measured down the slope of each side of the island were multiplied by the sine of the average slope for each side. These corrected distances were plotted in Figures 9 to 12 and Figures C-3 to C-6.

APPENDIX B

SUMMARY DATA, SURVEY OF PERMANENT SEASONAL TRANSECTS

Table B-1. Summary data: seasonal surveys of permanent transects.

SPECIES	CON[1]	SIDE/ SEASON[2]	TRANSFORMED MAX[3]	MIN[4]	S**2[5]	S.DEV.[6]	MEAN	UNTRANSFORMED S.DEV.	MEAN	N[7]	P[8]	S[9]	Species
1	1	1	.524	0.000	.003	.053	.005	2.525	.255	48.	-	(S)	cf. *Enteromorpha sp.*
1	1	2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	94.			
1	1	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	90.			
1	1	4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	42.			
1	1	5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	48.			
1	1	6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	126.			
1	1	7	.524	0.000	.002	.050	.005	2.384	.227	110.			
1	1	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	48.			
		COMBINED	.524	0.000	.001	.027	.001	1.293	.067	374.			
2	1	1	.464	0.000	.007	.084	.026	2.801	.735	98.	S	MS	*Ulva sp.*
2	1	2	.322	0.000	.001	.038	.007	1.051	.144	94.			
2	1	3	.580	0.000	.004	.060	.006	3.128	.326	92.			
2	1	4	.464	0.000	.003	.051	.008	2.095	.250	42.			
2	1	5	.322	0.000	.002	.041	.009	1.103	.165	48.			
2	1	6	.071	0.000	.000	.009	.001	.062	.008	126.			
2	1	7	.580	0.000	.011	.103	.033	4.223	1.098	112.			
2	1	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	48.			
		COMBINED	.580	0.000	.004	.061	.010	2.407	.368	376.			
6	1	1	.685	0.000	.109	.330	.423	20.616	22.500	4.	-	(S)	*Codium fragile*
6	1	2	.464	0.000	.054	.232	.344	10.000	15.000	4.			
6	1	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	8.			
6	1	4	.685	0.000	0.000	0.000	0.000	0.000	0.000	3.			
6	1	5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
6	1	6	.685	0.000	.066	.257	.162	13.572	7.895	19.			
6	1	7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
6	1	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
		COMBINED	.685	0.000	.066	.257	.162	13.572	7.895	19.			
11	1	1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	36.		(S)	*Cystoseira osmundacea*
11	1	2	.142	0.000	.001	.030	.008	.388	.084	28.			
11	1	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	24.			
11	1	4	.247	0.000	.002	.048	.009	1.177	.231	20.			
11	1	5	.247	0.000	.002	.044	.009	1.041	.188	32.			
11	1	6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	20.			
11	1	7	.142	0.000	.001	.023	.005	.302	.054	46.			
11	1	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	14.			
		COMBINED	.247	0.000	.001	.028	.004	.597	.076	112.			
12	2	1	2.739	0.000	.230	.479	.715	1.291	.300	30.	S	MS	*Sprogia nanulenii*
12	2	2	1.225	.707	.010	.098	.725	.189	.038	28.			
12	2	3	1.225	.707	.010	.098	.725	.189	.036	26.			
12	2	4	1.225	.707	.010	.102	.727	.194	.038	26.			
12	2	5	1.225	.707	.037	.191	.788	.369	.156	32.			
12	2	6	.707	0.000	.084	.290	.566	0.000	0.000	20.			
12	2	7	.707	.707	.000	.000	.707	0.000	0.000	46.			
12	2	8	2.739	.707	.295	.543	.852	1.871	.500	14.			
		COMBINED	2.739	0.000	.067	.259	.723	.689	.107	112.			
16	1	1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.		(S)	Unid. juvenile Laminariales
16	1	2	.580	0.000	.011	.104	.077	4.240	1.580	56.			
16	1	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
16	1	4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
16	1	5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
16	1	6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
16	1	7	.580	0.000	.011	.104	.077	4.240	1.580	56.			
16	1	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
		COMBINED	.580	0.000	.011	.104	.077	4.240	1.580	56.			
20	1	1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	30.		(S)	*Dictyota flabellata*
20	1	2	.100	0.000	.000	.019	.004	.149	.036	28.			
20	1	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	26.			
20	1	4	.464	0.000	.008	.091	.018	3.922	.749	26.			
20	1	5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	32.			
20	1	6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	20.			
20	1	7	.100	0.000	.000	.015	.002	.147	.022	46.			
20	1	8	.464	0.000	.015	.124	.033	5.345	1.429	14.			
		COMBINED	.464	0.000	.002	.045	.005	1.891	.188	112.			

See footnotes at end of table.

SPECIES	CON [1]	SIDE/ SEASON [2]	TRANSFORMED MAX [3]	MIN [4]	SKEW [5]	S.DEV. [6]	MEAN	UNTRANSFORMED S.DEV.	MEAN	N [7]	F [8]	S [9]	Species
37	1	1	.162	0.000	.001	.025	.005	.342	.065	104.		(S)	Peyssonelia sp.
37	1	2	.071	0.000	.000	.017	.004	.122	.031	112.			
37	1	3	.174	0.000	.001	.025	.005	.306	.066	100.			
37	1	4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	112.			
37	1	5	.162	0.000	.000	.021	.003	.235	.045	48.			
37	1	6	.174	0.000	.001	.026	.005	.345	.071	120.			
37	1	7	.071	0.000	.000	.010	.001	.070	.018	102.			
37	1	8	.162	0.000	.000	.018	.003	.204	.031	124.			
		COMBINED	.174	0.000	.000	.020	.004	.256	.040	438.			
39	1	1	.322	0.000	.004	.064	.014	1.877	.403	62.	S	NS	Prionitis lanceolata
39	1	2	.354	0.000	.002	.049	.007	1.064	.231	92.			
39	1	3	.464	0.000	.007	.081	.021	2.934	.667	60.			
39	1	4	.785	0.000	.015	.121	.033	6.706	1.347	62.			
39	1	5	.785	0.000	.010	.094	.025	4.774	.919	156.			
39	1	6	.201	0.000	.002	.045	.010	.854	.200	20.			
39	1	7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
39	1	8	.322	0.000	.002	.050	.004	1.411	.242	52.			
		COMBINED	.785	0.000	.007	.085	.020	3.945	.880	230.			
40	1	1	.524	0.000	.022	.149	.053	6.574	2.168	16.	NS	NS	Rhodoglossum affine
40	1	2	.100	0.000	.003	.050	.025	.500	.250	4.			
40	1	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	14.			
40	1	4	.322	0.000	.011	.104	.044	2.887	1.214	14.			
40	1	5	.524	0.000	.015	.121	.045	4.844	1.529	14.			
40	1	6	.100	0.000	.001	.024	.006	.238	.056	14.			
40	1	7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
40	1	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
		COMBINED	.524	0.000	.010	.100	.031	3.963	1.019	56.			
41	1	1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	124.		(S)	Rhodymenia sp.
41	1	2	.322	0.000	.006	.064	.012	1.234	.245	100.			
41	1	3	.398	0.000	.003	.057	.013	1.825	.323	110.			
41	1	4	.785	0.000	.017	.129	.045	6.543	1.668	110.			
41	1	5	.685	0.000	.006	.080	.014	4.024	.589	112.			
41	1	6	.226	0.000	.001	.026	.004	.516	.070	128.			
41	1	7	.785	0.000	.008	.091	.027	4.141	.820	272.			
41	1	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
		COMBINED	.785	0.000	.008	.076	.017	3.506	.558	642.			
42	1	1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	124.		(S)	Rhodymenia californica
42	1	2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	100.			
42	1	3	1.107	0.000	.016	.107	.014	7.477	.793	110.			
42	1	4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	110.			
42	1	5	1.107	0.000	.012	.109	.015	7.609	.861	112.			
42	1	6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	128.			
42	1	7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	272.			
42	1	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
		COMBINED	1.107	0.000	.003	.054	.004	3.750	.194	642.			
44	1	1	.685	0.000	.005	.073	.008	4.704	.455	84.		(S)	Stenogramma sp.
44	1	2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	70.			
44	1	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	72.			
44	1	4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	74.			
44	1	5	.685	0.000	.007	.084	.010	4.924	.606	65.			
44	1	6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	124.			
44	1	7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	44.			
44	1	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	46.			
		COMBINED	.685	0.000	.002	.039	.002	2.294	.132	508.			
45	1	1	.580	0.000	.015	.124	.045	5.068	1.621	87.		(S)	Stenogramma interrupta
45	1	2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	70.			
45	1	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	72.			
45	1	4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	74.			
45	1	5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	65.			
45	1	6	.322	0.000	.001	.031	.004	.400	.046	124.			
45	1	7	.464	0.000	.015	.124	.044	4.850	1.604	46.			
45	1	8	.580	0.000	.006	.044	.022	4.203	.852	46.			
		COMBINED	.580	0.000	.005	.064	.013	2.802	.455	508.			
48	1	1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	113.		(S)	cf. Phorndium sp.
48	1	2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	114.			
48	1	3	.524	0.000	.004	.064	.017	2.468	.632	114.			
48	1	4	.322	0.000	.002	.041	.008	1.131	.171	82.			
48	1	5	.174	0.000	.001	.026	.005	.373	.089	106.			
48	1	6	.322	0.000	.002	.041	.008	1.035	.169	140.			
48	1	7	.524	0.000	.004	.060	.008	2.697	.337	64.			
48	1	8	.100	0.000	.000	.011	.001	.112	.012	70.			
		COMBINED	.524	0.000	.002	.034	.006	1.340	.151	631.			

See footnotes at end of table.

SPECIES	CON[1]	SIDE/ SEASON[2]	TRANSFORMED MAX[3]	MIN[4]	S**2[5]	S.DEV.[6]	MEAN	UNTRANSFORMED S.DEV.	MEAN	N[7]	F[8]	t[9]	Species
68	1	1	.174	0.000	.001	.026	.005	.007	.004	144.	S	S	*Clione* sp.
68	1	2	.226	0.000	.002	.042	.011	.799	.149	140.			
68	1	3	.398	0.000	.005	.070	.036	1.700	.568	134.			
68	1	4	.322	0.000	.004	.060	.024	1.564	.504	141.			
68	1	5	.226	0.000	.002	.039	.011	.620	.162	136.			
68	1	6	.174	0.000	.001	.030	.010	.550	.141	128.			
68	1	7	.322	0.000	.002	.050	.017	1.072	.271	148.			
68	1	8	.398	0.000	.006	.080	.037	2.042	.756	136.			
		COMBINED	.398	0.000	.003	.059	.019	1.246	.331	568.			
89	1	1	.226	0.000	.003	.056	.010	1.044	.263	90.		(S)	*Hymenaphiastra cyanocrypta*
89	1	2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
89	1	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
89	1	4	.142	0.000	.001	.036	.007	.447	.100	90.			
89	1	5	.071	0.000	.000	.013	.002	.088	.016	92.			
89	1	6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
89	1	7	.226	0.000	.001	.036	.008	.772	.146	94.			
89	1	8	.174	0.000	.001	.037	.008	.648	.136	92.			
		COMBINED	.226	0.000	.001	.036	.006	.607	.103	542.			
103	2	1	3.037	.707	.206	.454	.805	1.876	.352	90.	S	NS	*Anthopleura* sp.
103	2	2	3.536	.707	.137	.371	.747	1.341	.259	88.			
103	2	3	4.528	.707	.216	.467	.796	2.231	.350	100.			
103	2	4	4.528	.707	.265	.515	.815	2.487	.427	90.			
103	2	5	1.225	.707	.010	.096	.726	.169	.037	136.			
103	2	6	4.528	.707	1.306	1.143	1.263	5.427	2.364	94.			
103	2	7	1.581	.707	.018	.135	.734	.294	.058	124.			
103	2	8	2.915	.707	.094	.307	.777	1.026	.197	66.			
		COMBINED	4.528	.707	.207	.455	.801	2.051	.349	370.			
104	1	1	.464	0.000	.006	.077	.026	2.387	.639	144.	S	NS	*Astrangia lajollaensis*
104	1	2	.247	0.000	.003	.056	.024	1.042	.345	144.			
104	1	3	.322	0.000	.005	.074	.037	1.659	.667	144.			
104	1	4	.398	0.000	.009	.090	.039	2.722	.937	140.			
104	1	5	.398	0.000	.003	.059	.019	1.567	.371	136.			
104	1	6	.464	0.000	.006	.084	.037	2.755	.891	136.			
104	1	7	.398	0.000	.006	.080	.040	2.317	1.144	140.			
104	1	8	.226	0.000	.001	.025	.003	.508	.061	132.			
		COMBINED	.464	0.000	.006	.076	.030	2.072	.658	540.			
106	1	1	.886	0.000	.030	.172	.117	8.928	3.900	140.	S	S	*Corynactis californica*
106	1	2	.464	0.000	.013	.114	.059	4.004	1.530	90.			
106	1	3	1.107	0.000	.036	.189	.127	10.704	4.477	172.			
106	1	4	1.173	0.000	.044	.210	.114	12.552	4.663	144.			
106	1	5	.322	0.000	.005	.066	.025	1.724	.510	48.			
106	1	6	1.107	0.000	.029	.170	.078	9.426	2.962	146.			
106	1	7	.785	0.000	.014	.118	.084	4.764	2.066	146.			
106	1	8	1.173	0.000	.062	.249	.215	15.363	9.077	136.			
		COMBINED	1.173	0.000	.034	.186	.114	10.374	4.074	986.			
108	2	1	2.345	.707	.136	.368	.660	.964	.388	98.	NS	NS	*Lophogorgia chilensis*
108	2	2	2.345	.707	.136	.369	.665	.974	.350	100.			
108	2	3	2.550	.707	.147	.384	.852	1.074	.371	47.			
108	2	4	2.345	.707	.163	.404	.896	1.056	.463	82.			
108	2	5	1.581	.707	.011	.106	.725	.225	.037	136.			
108	2	6	2.345	.707	.091	.302	.786	.848	.206	36.			
108	2	7	2.550	.707	.216	.464	.966	1.264	.652	207.			
108	2	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
		COMBINED	2.550	.707	.144	.379	.864	1.010	.398	377.			
109	2	1	2.121	.707	.200	.447	.976	1.129	.647	34.	S	S	*Muricea* spp.
109	2	2	2.739	.707	.348	.590	1.105	1.884	1.059	34.			
109	2	3	4.528	.707	1.502	1.225	1.450	5.674	3.058	34.			
109	2	4	3.037	.707	.722	.850	1.140	3.870	1.900	34.			
109	2	5	4.528	.707	.708	.841	1.168	3.622	1.566	136.			
109	2	6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
109	2	7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
109	2	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
		COMBINED	4.528	.707	.708	.841	1.168	3.622	1.566	136.			
110	2	1	1.871	.707	.021	.146	.730	.354	.055	110.	S	S	*Parecyathus stearnsii*
110	2	2	2.121	.707	.060	.245	.793	.567	.189	106.			
110	2	3	2.121	.707	.071	.267	.812	.627	.231	106.			
110	2	4	1.871	.707	.063	.252	.804	.568	.209	91.			
110	2	5	2.121	.707	.041	.284	.793	.743	.208	48.			
110	2	6	1.581	.707	.021	.144	.737	.314	.064	147.			
110	2	7	2.121	.707	.071	.266	.817	.614	.234	106.			
110	2	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
		COMBINED	2.121	.707	.054	.232	.784	.544	.168	611.			

See footnotes at end of table.

SPECIES	CON[1]	SIDE/ SEASON[2]	TRANSFORMED MAX[3]	MIN[4]	SKEW[5]	S.DEV.[6]	MEAN	UNTRANSFORMED S.DEV.	MEAN	N[7]	P[8]	E[9]	Species
128	2	1	.707	.707	.000	.000	.707	0.000	0.000	67.		(S)	*Anomia peruviana*
128	2	2	1.225	.707	.009	.097	.725	.187	.036	46.			*Pododesmus cepio*
128	2	3	1.225	.707	.010	.101	.727	.195	.039	102.			
128	2	4	2.739	.707	.060	.245	.756	.788	.131	24.			
128	2	5	1.225	.707	.011	.104	.729	.201	.042	119.			
128	2	6	.707	.707	.000	.000	.707	0.000	0.000	52.			
128	2	7	2.739	.707	.034	.184	.734	.572	.078	146.			
128	2	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
		COMBINED	2.739	.707	.011	.143	.730	.414	.063	557.			
148	2	1	2.121	.707	.068	.261	.818	.548	.237	134.	S	S	*Doriopsilla albopunctata*
148	2	2	1.225	.707	.008	.092	.724	.177	.032	146.			
148	2	3	1.871	.707	.023	.152	.734	.344	.070	186.			
148	2	4	2.121	.707	.060	.244	.795	.672	.191	198.			
148	2	5	1.871	.707	.030	.190	.763	.523	.118	136.			
148	2	6	1.581	.707	.015	.124	.736	.248	.056	248.			
148	2	7	1.581	.707	.027	.163	.752	.363	.092	120.			
148	2	8	2.121	.707	.074	.273	.816	.651	.240	250.			
		COMBINED	2.121	.707	.041	.204	.770	.466	.134	754.			
153	2	1	1.871	.707	.042	.205	.775	.446	.163	154.		(S)	*Kelletia kelletii*
153	2	2	.707	.707	.000	.000	.707	0.000	0.000	150.			
153	2	3	1.871	.707	.014	.118	.725	.270	.040	176.			
153	2	4	2.121	.707	.052	.227	.777	.544	.195	148.			
153	2	5	1.871	.707	.030	.173	.748	.397	.090	144.			
153	2	6	1.581	.707	.008	.088	.719	.194	.023	132.			
153	2	7	1.871	.707	.027	.160	.751	.367	.092	120.			
153	2	8	2.121	.707	.035	.186	.755	.437	.105	248.			
		COMBINED	2.121	.707	.027	.164	.745	.377	.082	634.			
155	2	1	4.528	.707	1.038	1.019	1.201	4.873	1.960	50.	S	NS	*Lottia gigantea*
155	2	2	3.674	.707	.519	.720	.937	2.953	.875	24.			
155	2	3	3.240	.707	.269	.519	.925	1.738	.619	42.			
155	2	4	3.240	.707	.378	.619	.938	2.119	.750	48.			
155	2	5	3.082	.707	.530	.728	1.185	2.423	1.421	38.			
155	2	6	4.183	.707	1.152	1.073	1.242	4.628	2.295	44.			
155	2	7	1.225	.707	.009	.097	.725	.187	.036	56.			
155	2	8	4.528	.707	.602	.776	.919	3.939	.923	20.			
		COMBINED	4.528	.707	.577	.760	1.015	3.141	1.104	164.			
157	2	1	1.581	.707	.033	.180	.765	.375	.118	149.	S	S	*Megathura crenulata*
157	2	2	1.581	.707	.013	.112	.728	.232	.043	142.			
157	2	3	1.225	.707	.013	.115	.734	.262	.051	136.			
157	2	4	1.581	.707	.022	.150	.746	.311	.078	146.			
157	2	5	1.225	.707	.016	.127	.740	.246	.064	171.			
157	2	6	1.225	.707	.005	.070	.717	.139	.019	108.			
157	2	7	1.225	.707	.008	.091	.723	.175	.032	232.			
157	2	8	1.581	.707	.056	.236	.806	.506	.205	132.			
		COMBINED	1.581	.707	.021	.144	.744	.296	.074	633.			
158	2	1	3.240	.707	.313	.560	.861	2.104	.542	24.	S	NS	*Mytilus californianus*
158	2	2	.707	.707	0.000	0.000	.707	0.000	0.000	2.			
158	2	3	3.808	.707	.437	.661	.848	2.965	.638	22.			
158	2	4	11.853	.707	4.790	2.189	1.180	27.439	5.500	26.			
158	2	5	11.853	.707	2.860	1.691	1.057	20.283	3.417	48.			
158	2	6	1.871	.707	.117	.343	.813	.803	.273	22.			
158	2	7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
158	2	8	.707	.707	0.000	0.000	.707	0.000	0.000	4.			
		COMBINED	11.853	.707	1.891	1.375	.985	16.354	2.297	74.			
159	2	1	3.240	.707	.267	.517	.813	2.041	.417	24.		(S)	*Mytilus edulis*
159	2	2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
159	2	3	14.509	.707	11.906	3.450	1.570	52.500	13.125	16.			
159	2	4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
159	2	5	14.509	.707	5.414	2.327	1.161	34.992	6.111	36.			
159	2	6	.707	.707	0.000	0.000	.707	0.000	0.000	4.			
159	2	7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
159	2	8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
		COMBINED	14.509	.707	4.878	2.209	1.115	33.201	5.500	40.			

See footnotes at end of table.

SPECIES	CON[1]	SIDE/ SEASON[2]	TRANSFORMED MAX[3]	MIN[4]	S**2[5]	S.DEV.[6]	MEAN	UNTRANSFORMED S.DEV.	MEAN	n[7]	P[8]	t[9]	Species
170	2	1	8.860	.707	2.402	1.550	1.359	11.308	3.739	203.	S	S	*Serpulorbis squamigerus*
170	2	2	8.972	.707	3.360	1.833	1.655	13.803	5.585	178.			
170	2	3	6.364	.707	1.454	1.206	1.275	8.961	2.588	178.			
170	2	4	10.025	.707	3.121	1.767	1.581	13.885	5.105	198.			
170	2	5	8.972	.707	4.030	2.152	2.187	10.356	5.884	144.			
170	2	6	8.860	.707	1.427	1.195	1.055	9.157	2.060	224.			
170	2	7	10.025	.707	2.532	1.591	1.521	12.038	4.135	221.			
170	2	8	6.205	.707	1.202	1.096	1.184	8.048	2.081	136.			
		COMBINED	10.025	.707	2.602	1.613	1.467	11.474	4.250	765.			
185	2	1	7.106	.707	.993	.996	1.078	6.082	1.842	186.	S	S	*Diopatra ornata*
185	2	2	9.925	.707	2.566	1.602	1.522	12.621	4.344	144.			
185	2	3	7.106	.707	1.977	1.406	1.301	9.490	3.111	178.			
185	2	4	7.106	.707	1.527	1.236	1.219	8.130	2.500	190.			
185	2	5	7.106	.707	1.673	1.293	1.308	7.773	2.846	144.			
185	2	6	7.106	.707	1.628	1.276	1.479	7.538	3.295	144.			
185	2	7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
185	2	8	9.925	.707	1.864	1.365	1.199	10.491	2.794	144.			
		COMBINED	9.925	.707	1.779	1.334	1.280	9.402	2.913	674.			
186	1	1	.785	0.000	.022	.147	.092	6.578	2.788	144.	S	S	*Dodecaceria fewkesi*
186	1	2	.535	0.000	.007	.082	.038	2.883	.778	144.			
186	1	3	.398	0.000	.007	.082	.038	2.342	.775	118.			
186	1	4	.685	0.000	.017	.131	.085	4.944	2.311	161.			
186	1	5	.685	0.000	.017	.132	.081	5.211	2.262	168.			
186	1	6	.580	0.000	.010	.099	.050	3.800	1.154	144.			
186	1	7	.785	0.000	.018	.133	.076	5.547	2.198	144.			
186	1	8	.524	0.000	.009	.097	.045	3.532	1.049	101.			
		COMBINED	.785	0.000	.014	.119	.065	4.721	1.735	600.			
187	2	1	1.871	.707	.036	.190	.741	.625	.115	130.	S	NS	*Eudistylia sp.*
187	2	2	1.871	.707	.027	.165	.738	.604	.071	136.			
187	2	3	1.581	.707	.048	.220	.777	.608	.152	112.			
187	2	4	2.121	.707	.042	.206	.758	.512	.117	128.			
187	2	5	2.121	.707	.059	.242	.780	.588	.167	148.			
187	2	6	1.871	.707	.038	.194	.754	.457	.106	160.			
187	2	7	1.225	.707	.006	.076	.718	.147	.022	46.			
187	2	8	1.581	.707	.022	.149	.748	.304	.062	122.			
		COMBINED	2.121	.707	.038	.195	.758	.458	.113	648.			
200	1	1	.886	0.000	.012	.110	.034	5.611	1.160	144.	S	S	*Lagenipora punctulata*
200	1	2	1.173	0.000	.036	.189	.047	11.568	3.478	142.			
200	1	3	.886	0.000	.024	.156	.054	8.252	2.426	156.			
200	1	4	.735	0.000	.013	.113	.043	5.092	1.331	140.			
200	1	5	.464	0.000	.005	.071	.025	2.145	.560	130.			
200	1	6	.580	0.000	.007	.083	.025	3.504	.694	140.			
200	1	7	1.173	0.000	.046	.215	.117	12.784	5.011	222.			
200	1	8	.464	0.000	.004	.065	.021	2.064	.443	132.			
		COMBINED	1.173	0.000	.021	.146	.058	6.058	2.045	650.			
201	1	1	.322	0.000	.004	.064	.027	1.572	.464	152.	S	S	*Phidolopora pacifica*
201	1	2	.398	0.000	.002	.046	.015	1.324	.222	133.			
201	1	3	.142	0.000	.001	.034	.013	.403	.130	146.			
201	1	4	.226	0.000	.002	.050	.026	.781	.307	132.			
201	1	5	.247	0.000	.002	.039	.013	.674	.167	144.			
201	1	6	.398	0.000	.003	.054	.019	1.446	.314	144.			
201	1	7	.322	0.000	.003	.056	.027	1.237	.386	170.			
201	1	8	.142	0.000	.002	.041	.014	.516	.203	74.			
		COMBINED	.398	0.000	.002	.050	.020	1.130	.283	563.			
202	1	1	.322	0.000	.004	.066	.020	1.869	.463	142.	S	S	*Scrupocellaria diegensis*
202	1	2	1.107	0.000	.032	.179	.072	11.429	2.951	132.			
202	1	3	.464	0.000	.006	.076	.026	2.344	.617	154.			
202	1	4	.464	0.000	.004	.062	.017	2.013	.400	140.			
202	1	5	.322	0.000	.004	.061	.020	1.561	.402	144.			
202	1	6	.464	0.000	.003	.055	.017	1.720	.319	140.			
202	1	7	1.107	0.000	.029	.172	.067	10.422	2.753	144.			
202	1	8	.322	0.000	.004	.064	.021	1.723	.442	74.			
		COMBINED	1.107	0.000	.011	.105	.032	5.737	1.033	692.			
228	2	1	2.550	.707	.177	.421	.998	1.063	.888	144.	S	S	*Parastichopus spp.*
228	2	2	2.121	.707	.070	.264	.747	.653	.189	170.			
228	2	3	3.536	.707	.294	.542	1.003	1.704	.798	143.			
228	2	4	3.536	.707	.274	.523	1.060	1.663	.875	140.			
228	2	5	2.345	.707	.148	.385	.974	.944	.595	144.			
228	2	6	1.871	.707	.045	.213	.798	.461	.182	160.			
228	2	7	3.536	.707	.379	.616	1.177	1.978	1.243	217.			
228	2	8	2.550	.707	.071	.267	.788	.711	.189	132.			
		COMBINED	3.536	.707	.211	.459	.958	1.342	.628	877.			

See footnotes at end of table.

SPECIES	CON[1]	SIDE/ SEASON[2]	TRANSFORMED MAX[3]	MIN[4]	S**2[5]	S.DEV.[6]	MEAN	UNTRANSFORMED S.DEV.	MEAN	N[7]	P[8]	t[9]	Species
229	2	1	3.536	.707	.409	.639	1.315	2.104	1.638	301.	S	NS	*Patiria miniata*
229	2	2	3.937	.707	.359	.599	1.356	1.974	1.692	266.			
229	2	3	4.301	.707	.501	.708	1.368	2.497	1.871	284.			
229	2	4	3.808	.707	.429	.655	1.330	2.223	1.712	249.			
229	2	5	4.301	.707	.551	.742	1.515	2.700	2.344	241.			
229	2	6	3.536	.707	.516	.718	1.456	2.488	2.129	263.			
229	2	7	3.082	.707	.247	.545	1.277	1.580	1.427	232.			
229	2	8	3.937	.707	.283	.532	1.172	1.887	1.155	374.			
		COMBINED	4.301	.707	.425	.652	1.343	2.212	1.728	1148.			
230	2	1	1.225	.707	.011	.106	.730	.285	.064	206.	S	NS	*Pisaster brevispinus*
230	2	2	1.225	.707	.004	.061	.714	.117	.014	216.			
230	2	3	1.225	.707	.008	.089	.723	.172	.030	198.			
230	2	4	1.225	.707	.004	.063	.715	.122	.015	198.			
230	2	5	1.225	.707	.011	.107	.730	.207	.065	224.			
230	2	6	1.225	.707	.004	.065	.715	.126	.016	248.			
230	2	7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.			
230	2	8	1.225	.707	.005	.073	.717	.141	.020	368.			
		COMBINED	1.225	.707	.007	.082	.720	.158	.026	918.			
231	2	1	1.871	.707	.056	.236	.804	.520	.202	256.	NS	NS	*Pisaster giganteus*
231	2	2	2.121	.707	.049	.221	.798	.480	.185	254.			
231	2	3	2.345	.707	.063	.252	.814	.581	.226	249.			
231	2	4	2.121	.707	.051	.226	.791	.507	.177	254.			
231	2	5	1.871	.707	.046	.215	.806	.441	.196	168.			
231	2	6	1.581	.707	.038	.196	.742	.400	.149	248.			
231	2	7	2.121	.707	.058	.240	.812	.528	.218	222.			
231	2	8	2.345	.707	.067	.259	.807	.816	.218	376.			
		COMBINED	2.345	.707	.055	.234	.802	.522	.197	1811.			
232	2	1	1.225	.707	.008	.091	.723	.174	.032	126.	S	NS	*Pisaster ochraceus*
232	2	2	1.225	.707	.012	.110	.731	.213	.047	106.			
232	2	3	1.581	.707	.037	.192	.774	.401	.135	96.			
232	2	4	1.225	.707	.013	.115	.734	.222	.051	117.			
232	2	5	1.581	.707	.022	.149	.763	.315	.074	88.			
232	2	6	1.225	.707	.017	.131	.742	.252	.064	133.			
232	2	7	1.581	.707	.026	.162	.756	.330	.094	102.			
232	2	8	1.225	.707	.007	.086	.722	.146	.028	142.			
		COMBINED	1.581	.707	.017	.130	.739	.261	.063	805.			
241	2	1	3.082	.707	.224	.473	.976	1.380	.676	299.	S	S	*Strongylocentrotus*
241	2	2	2.915	.707	.194	.440	.943	1.235	.583	288.			
241	2	3	3.536	.707	.301	.548	1.016	1.787	.832	304.			
241	2	4	3.082	.707	.308	.555	1.072	1.704	.956	283.			
241	2	5	3.391	.707	.383	.619	1.147	1.981	1.243	242.			
241	2	6	2.550	.707	.202	.449	1.008	1.188	.717	276.			
241	2	7	2.121	.707	.096	.310	.856	.740	.329	222.			
241	2	8	3.536	.707	.248	.498	.924	1.618	.602	304.			
		COMBINED	3.536	.707	.254	.504	.996	1.530	.747	1094.			
242	2	1	6.285	.707	2.020	1.421	1.551	6.357	3.914	147.	S	S	*Strongylocentrotus purpuratus*
242	2	2	5.788	.707	1.719	1.311	1.933	6.035	4.950	239.			
242	2	3	4.637	.707	.576	.759	1.195	2.988	1.500	164.			
242	2	4	4.528	.707	.702	.838	1.209	3.354	1.660	148.			
242	2	5	3.391	.707	.157	.396	.868	1.294	.410	178.			
242	2	6	5.431	.707	.984	.992	1.385	4.371	2.398	216.			
242	2	7	5.148	.707	.482	.694	1.073	3.001	1.131	165.			
242	2	8	6.285	.707	1.978	1.406	1.580	7.988	4.126	149.			
		COMBINED	6.285	.707	1.382	1.176	1.510	5.810	3.159	748.			

See footnotes at end of table

---

[1]1 = Arcsin conversion used for data transformation
2 = Square root conversion used for data transformation

[2]1 = summer (July 1976)
2 = fall (November 1976)
3 = winter (February 1977)
4 = spring (April 1977)
5 = north side
6 = south side
7 = east side
8 = west side

[3]Maximum value of density (transformed)

[4]Minimum value of density (transformed)

[5]Variance

[6]Standard deviation

[7]N = number of quadrats examined over zone of occurrence

[8]F = "F ratio" (ratio of variances)

[9]t = "Student's t," the deviation of the estimated mean from that of the sample population

S = Significant (95 percent confidence level)

NS = Not significant (95 percent confidence level)

(S) = Significant difference in means due to absence during at least one season

APPENDIX C

R-MODE DENDROGRAMS AND BOUNDARIES OF PRELIMINARY (TENTATIVELY IDENTIFIED) SPECIES ASSOCIATIONS

Note: In Figures C-3 to C-6, each association is labeled with an alpha or numeric designation. The number refers to the preliminary identity applied to each association for purposes of field recognition and charting of the boundaries of each major species association (see Sec. IV,4). The letter represents the designation of the identity of the association after the completion of statistical analysis of quantitative compositional data as described in Section V,5.

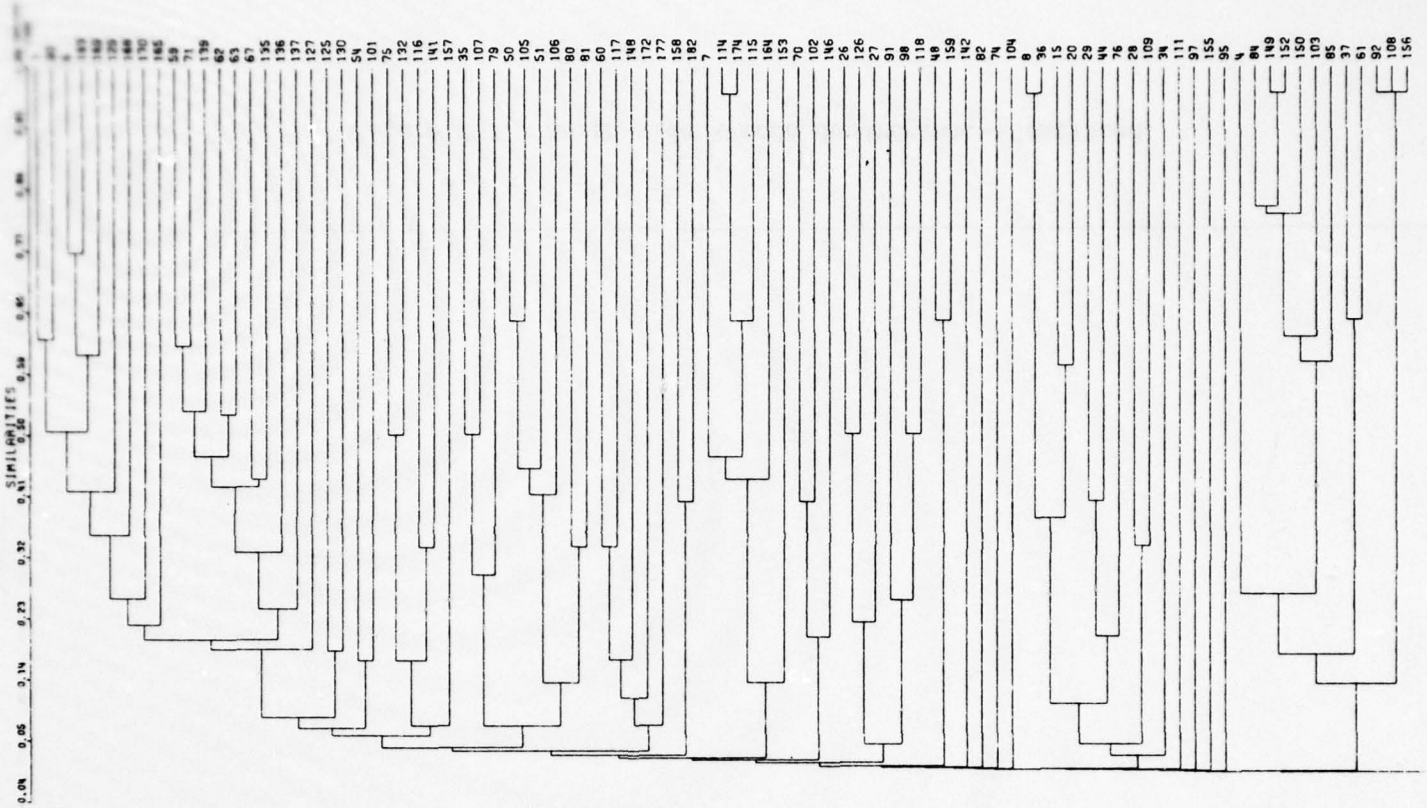


Figure C-1. North-side R-mode dendrogram showing similarities in occurrence among species surveyed in a permanent transect (species with high frequencies of co-occurrence cluster at high similarity values) See Table C-1 for key to species codes.

Figure C-1. North-side R-mode dendrogram.--Continued.

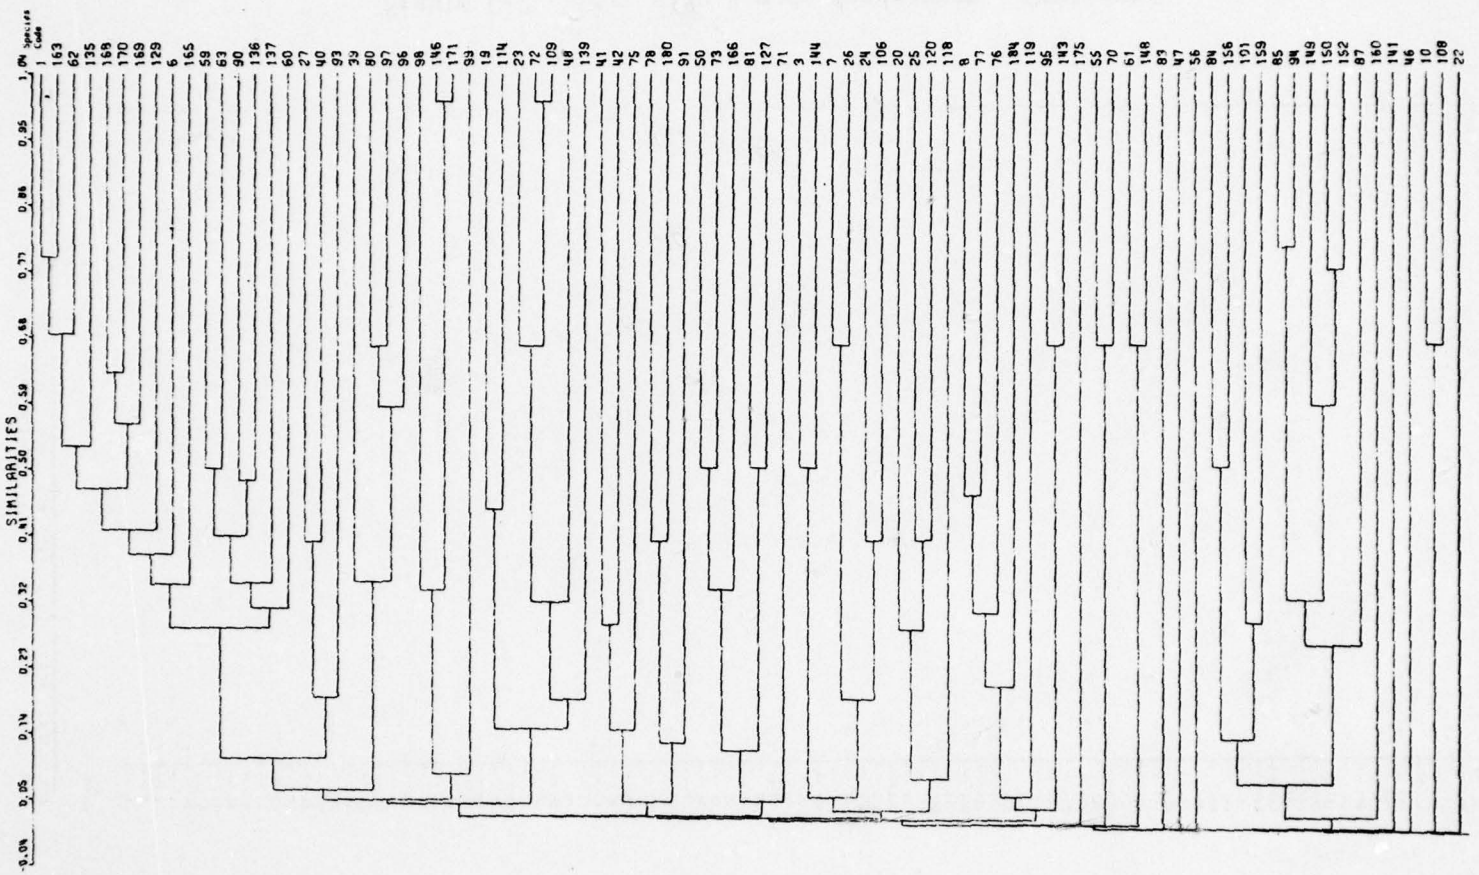


Figure C-2. East-side R-mode dendrogram showing similarities in occurrence among species surveyed in a permanent transect (species with high frequencies of co-occurrence cluster at high similarity values). See Table C-1 for key to species code.



Figure C-2. East side R-mode dendrogram.--Continued.

Table C-1. Key to R-mode dendrograms (Figs. C-1 and C-2).

1. *Veleroa subulata*
2. *Codium fragile*
3. *Gelidium cartilagineum*
4. *Grateloupia abreviata*
5. cf. *Fucus* sp.
6. *Litho/Lithop.*
7. *Peyssonellia sp.*
8. *Stenogramme interupta*
9. *Corallina officinalis*
10. *Unid. fil green alga*
11. Unid. fil red alga
12. Unid. juv. red alga
13. Unid. bushy red alga (cf. *G. coulteri*)
14. cf. *Enteromorpha* sp.
15. *Prionitis lanceolata*
16. Unid. "brown scum"
17. Unid. red alga #1 (W)
18. Unid. red alga #2 (W)
19. Unid. lobate red alga
20. *Egregia laevigata*
21. Unid. brown alga
22. Unid. red alga #1 (E)
23. Unid. red alga #2 (E) cf. *Callophyllis*
24. Unid. red alga #3 (E)
25. Unid. flat red alga (E)
26. cf. *Agardhiella* sp.
27. cf. *Ceramium* sp.
28. Unid. red alga (N)
29. cf. *Gelidium* sp.
30. *Gigartina spinosa armata*
31. Unid. red alga (S)
32. Unid. fil red alga (S)
33. Unid."spindly gr-br alga"
34. *Macrocystis* sp.
35. Unid. green algal slime
36. *Unid. coraline alga (N)* (*cf. C. officinalis*)
37. Rhodoglossum affine
38. cf. *Microcladia* sp. (E)
39. cf. *Gigartina exasperata*
40. Unid. fil red alga (E)
41. Unid. leafy red (E)
42. Unid. small brown alga (E)
43. cf. *Platythamnion sp. (W)*
44. cf. *Bossiella orbigniana*
45. "Wiry" red alga (E)
46. "Spiny" red alga (E)
47. Unid. sponge (W)
48. *Cliona sp.*
49. *Spheciospongia confoederata*
50. *Hymeniacidon cyanocrypta*
51. Unid. purple sponge (N)
52. Unid. grey sponge (S)
53. "Sulfur sponge" (S)
54. Unid. sponge (N)
55. *Rhabdodermella nuttingi*
56. Unid. sponge (E)
57. cf. *Verongia thiona*
58. *Leucetta losangelensis*
59. *Astrangia lajollaensis*
60. *Paracyathus stearnsii*
61. *Anthopleura* cf. *xanthogrammica*
62. *Corynactis californica*
63. *Lophogorgia chilensis*
64. Unid. hydroid (S)
65. Unid. anemone (S) #1
66. Unid. anemone #2 (S)
67. *Muricea fruticosa*
68. Unid. yellow hydroid (W)
69. cf. *Sertularia* sp.
70. *Balanophyllia elegans*
71. *Cerianthid anemones*
72. *Hydractinia* sp.
73. Unid. "alternate" hydroid (E)
74. cf. *Tealia* sp.
75. Unid. hydroids (N)
76. *Aglaophenia struthionides*
77. cf. *Eudendrium sp.*
78. cf. *Plumularia lagenifera*
79. *Pteropurpura festiva*
80. cf. *Dendrodoris fulva*
81. *Kelletia kelletii*
82. *Calliostoma canaliculatun*
83. *Mitra idae*
84. *Lottia gigantea*
85. *Collisella digitalis*
86. *C. cf. strigatella*
87. *C. scabra*
88. *Conus californicus*
89. *Acanthina spirata*
90. *Serpulorbis squamigerus*
91. *Megathura crenulata*
92. *Mytilus californianus*
93. cf. *Anisodoris nobilis*
94. cf. *Collisella limatula*
95. *Dialula sandiegensis*
96. *Hermissenda crassicornis*
97. *Navanax inermis*
98. *Hinnites multirugosus*
99. *Chama pellucida*
100. Unid. gastropod sp. #1 (N)
101. Pholads (cf. Parapholas calif.)
102. Unid. dorid (N)
103. *Collisella* cf. *conus*
104. *Cypraea spadicea*
105. *Acmaea mitra*
106. *Pododesmus cepio*
107. *Ceratostoma nuttalli*
108. *Mytilus edulis*
109. *Diodora aspera*
110. *Nassarius mendicus*
111. Unid. black/yellow dorid (S)
112. Unid. nudibranch (S)
113. Unid. orange dorid (S)
114. *Flabellinopsis iodinea*
115. *Crepipatella lingulata*
116. *Maxwellia gemma*
117. *Octopus* sp.
118. *Aplysia californica*
119. Unid. limpet (E)
120. cf. *Anomia* sp.
121. Unid. white spot dorid (W)
122. Unid. yellow doris (W)
123. Unid. orange cerata eolid (W)
124. Unid. boring clam (S)
125. *Calliostoma annulatum*
126. Unid snail (N)
127. *Diopatra ornata*
128. Unid. serpulids (W)
129. *Dodecaceria fewkesi*
130. *cf. Eudistylia sp.*
131. cf. *Chaetopterus* sp.
132. Unid. cf. *sabellid* (N)
133. Unid. serpulid (E)
134. *Salmacina tribranchiata*
135. *Lagenipora punctulata*
136. *Scrupocellaria diegensis*
137. *Phidolopora pacifica*
138. Unid yellow ectoproct (W)
139. Encrusting ectoprocts
140. Unid. "brain coral" ectoproct
141. *Antropora tincta*
142. *Diaperoecia californica*
143. *Bugula neritina*
144. Unid. ectoprocts (E)
145. *Membranipora tuberculata*
146. *Balanus pacificus*
147. *B. tintinnabulum*
148. *B. nubilus*
149. *Tetraclita squamosa rubescens*
150. *Chthamalus fissus*
151. *Pollicipes polymerus*
152. *Balanus glandula*
153. cf. *Paguristes ulreyi*
154. Unid. pagurids (W)
155. *Loxorhynchus crispatus*
156. *Pachygrapsus crassipes*
157. Unid. pagurid (N)
158. Unid. shrimp (N)
159. Unid. barnacles
160. Unid. small barnacle (E)
161. Unid. pagurid (E)
162. cf. *Isocheles pilosus*
163. *Patiria miniata*
164. *Pisaster brevispinus*
165. *P. giganteus*
166. *P. ochraceus*
167. Parastichopus sp. #1 (short knob-like projections)
168. P. sp. #2 (long black-tipped projections)
169. *Strongylocentrotus franciscanus*
170. *S. purpuratus*
171. cf. *Ophiopsilla californica*
172. Unid. holothuroid (N)
173. Unid ophiuroid (S)
174. Ophiothrix spiculata
175. Unid ophuroid (E)
176. *Lytechinus* sp.
177. *Boltenia villosa*
178. Unid. tunicate (W)
179. *Styela montereyensis*
180. *cf. Amaroucium sp. (E)*
181. *Unid. organisms*
182. *Ocenebra foveolata*
183. *Not sampled*
184. *Unid. coraline (E)*
185. *Collisella spp. (E)*

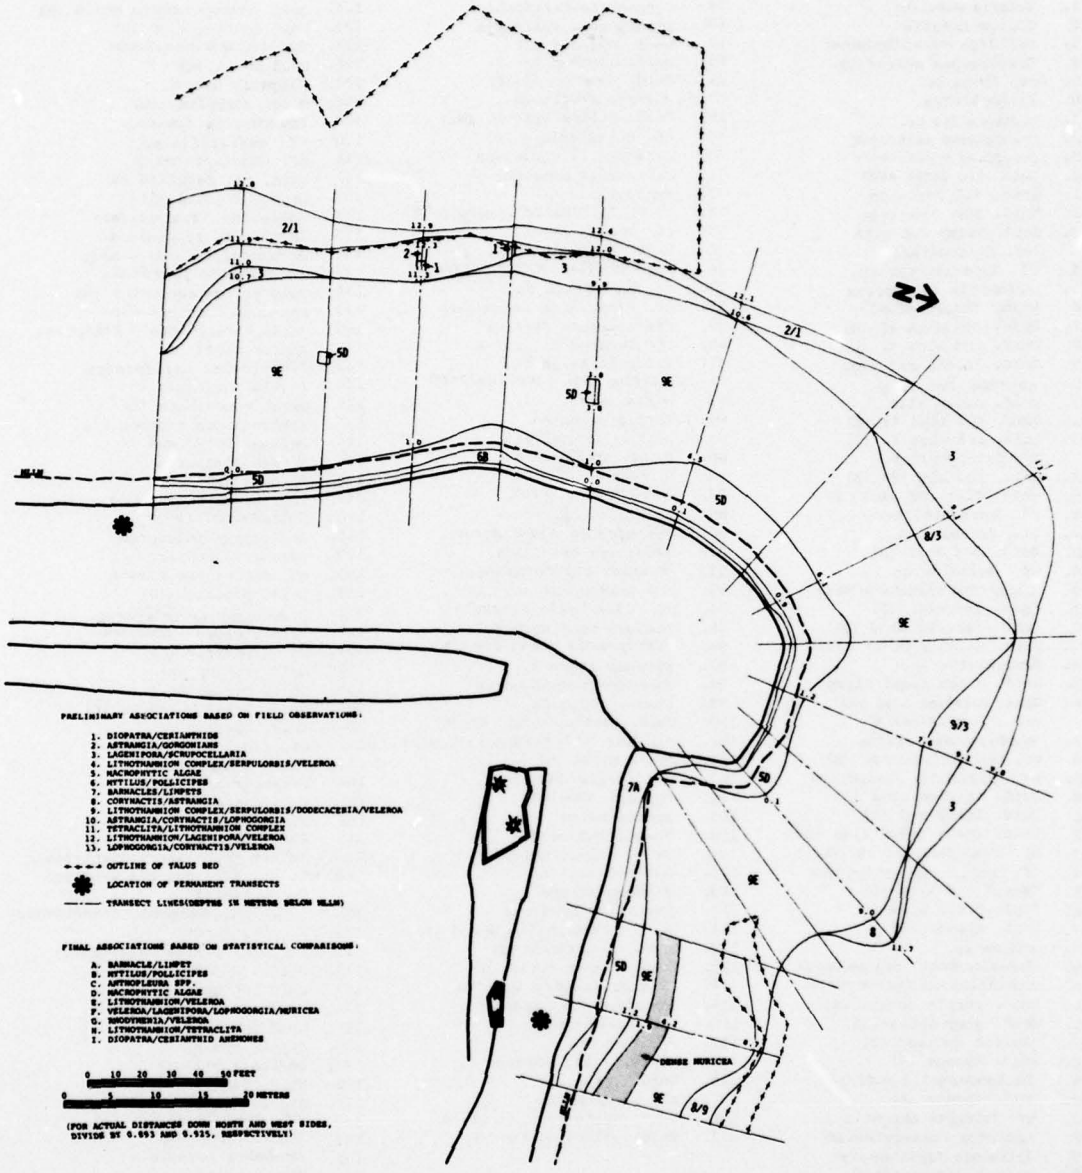


Figure C-3. Preliminary and final species associations, northwest quadrant.

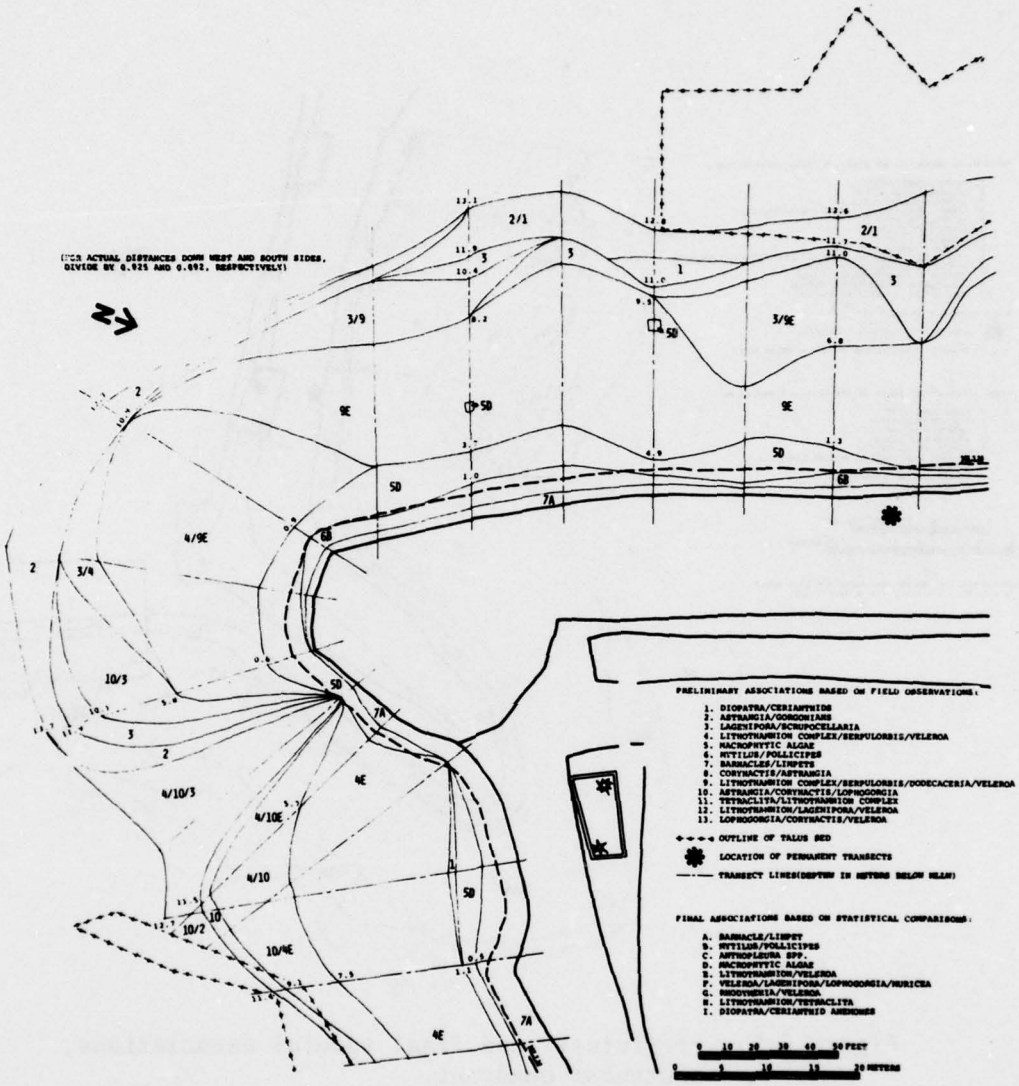


Figure C-4. Preliminary and final special associations, southwest quadrant.

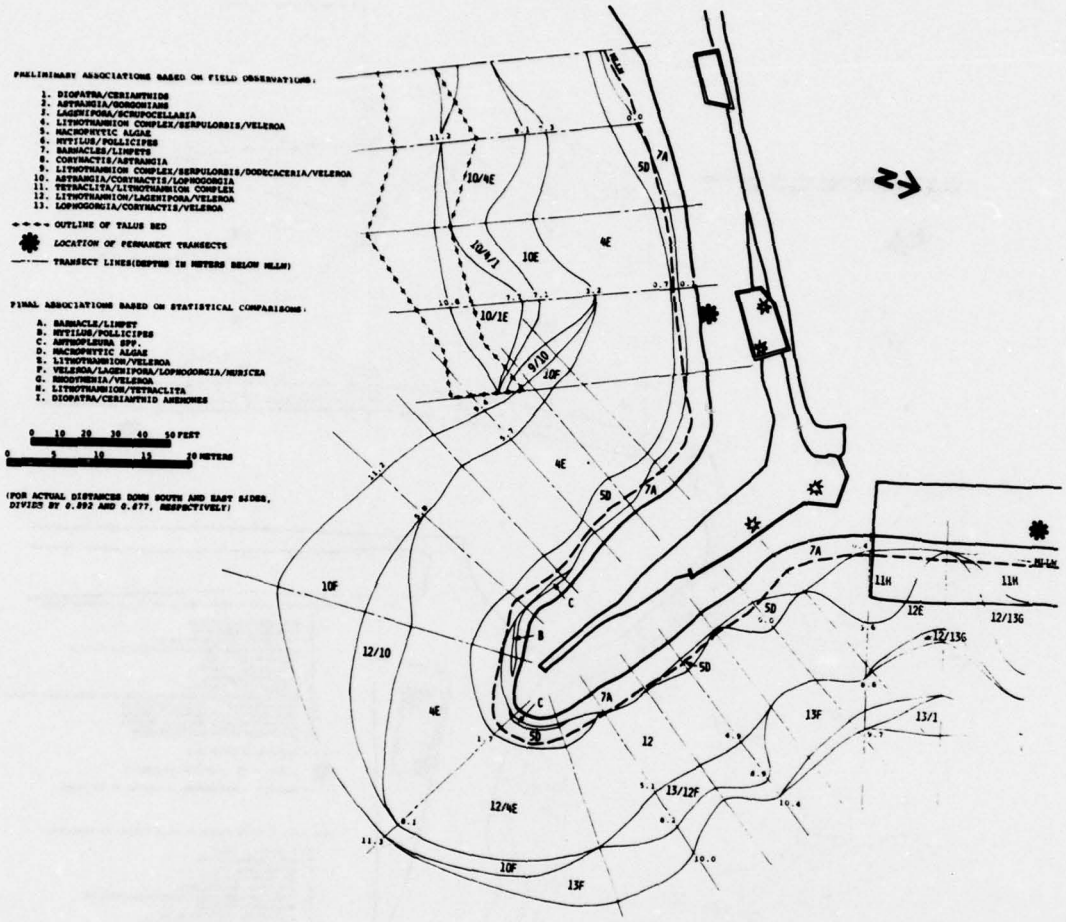


Figure C-5. Preliminary and final special associations, southeast quadrant.

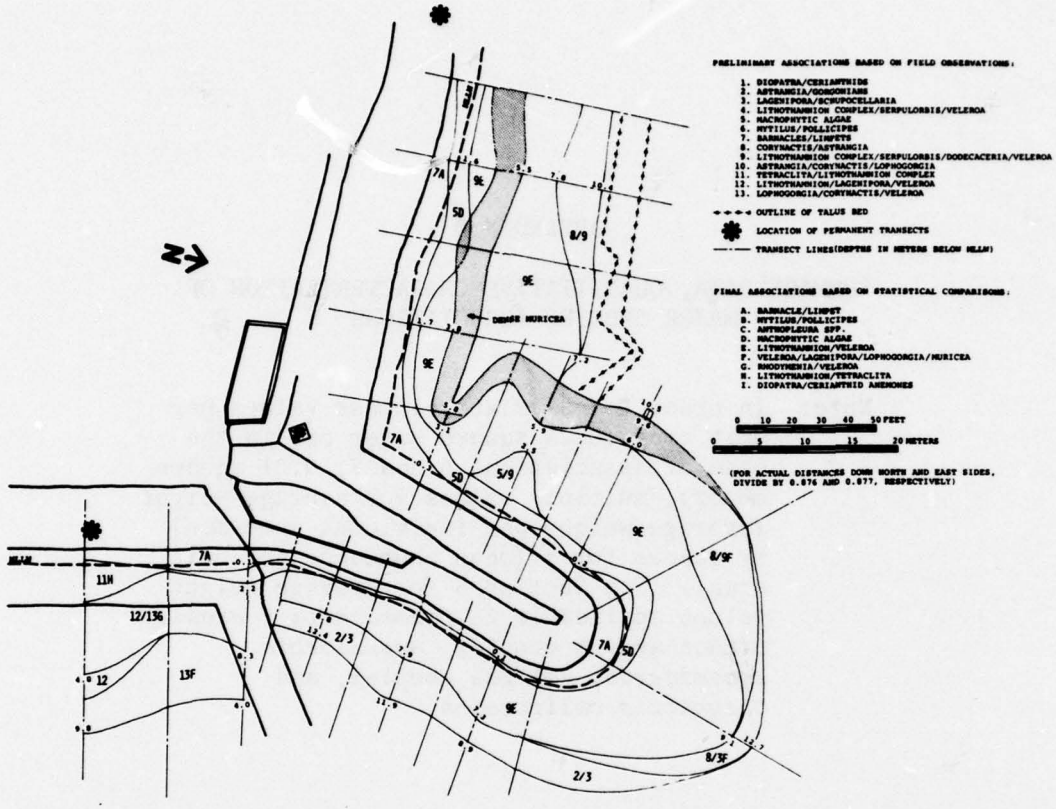


Figure C-6. Preliminary and final special associations, northeast quadrant.

APPENDIX D

SUMMARY DATA, QUANTITATIVE CHARACTERIZATION OF MAJOR SPECIES ASSOCIATIONS

Note: In order to calculate biomass values per unit area (0.25 square meter or, in the case of associations 6 and 7, 0.01 square meter), multiply values for average weight (average weight per individual specimen) by values for $\bar{x}$ (mean abundance per unit area). See Section 5 for average weight values applicable to *Dodecaceria fewkesi*, *Lithothamnium* complex, *Serpulorbis squamigerus*, *Veleroa* complex, and *Corynactis californica*.

Table D-1. Summary data on numerical abundance and biomass of biota in major species associations (see Figs. C-3 to C-6).

Subarea number (corresponding with number in Table D-2)	Subareas for statistical comparisons	Statistical parameters	Common species in upper intertidal associations																
			Balanus glandula	*Chthamalus fissus*	*Tetraclita squamosa*	*Pollicipes polymerus*	*Collisella digitalis*	*Collisella scabra*	*Collisella strigatella*	*Collisella* sp.	*Lottia gigantea*	*Mytilus edulis*	*Mytilus californianus*	*Lithothamnium* complex[5]	*Ralfsia pacifica*[5]	*Enteromorpha*[5] sp.	*Bossiella orbigniana*[5]	*Pachygrapsus crassipes*	
	Association #7 (Barnacle-Limpet)	f[1]	24/28	21/28	11/28	1/28	8/28	8/28		2/28	4/28	1/28		2/28	2/28	2/28			
		$\bar{x}$[2]	4.32	23.18	2.25	0.04	2.46	0.57		0.07	0.14	0.36		0.71	0.43	0.46			
		95% cl$\bar{x}$[3]	±1.82	±10.95	±1.42	±0.07	±2.84	±0.48		±0.10	±0.14	±0.73		1.15	±0.62	±0.68			
		avg wt[4]	0.65	0.03	5.8	2	0.33	0.4		--	13.1	--		--	--	--			
	Association #6 (*Mytilus-Pollicipes*)	f	3/6	0	1/6	5/6	2/6	0	1/6		1/6	3/6	2/6	2/6			2/6	1/6	
		$\bar{x}$	12.50		0.17	20.00	0.50		1.17		0.17	2.00	16.33	2.83			4.5	0.17	
		95% cl$\bar{x}$	±29.33		±0.43	±22.57	±0.89		±3.02		±0.43	±2.41	±26.97	±5.20			±10.65	±0.43	
		avg wt	0.2		1	0.51	2.13		0.44		lost	0.75	10.37	--			0.25	1	

Subarea number (corresponding with number in Table D-2)	Subareas for statistical comparisons	Statistical parameters	Common species in lower intertidal and subtidal associations																
			Lithothamnium[5]	*Veleroa* complex[5]	*Bossiella orbigniana*[5]	*Geldium robustum*[5]	*Geldium coulteri*[5]	**Corallina officinalis**[5]	*Gigartina canaliculata*[5]	*Gigartina spinosa*[5]	*Prionitis lanceolata*[5]	*Egregia menziesii*[5]	*Cystoseira osmundacea*[5]	*Strongylocentrotus purpuratus*	*Patiria miniata*	*Dodecaceria*[6]	*Pisaster ochraceus*	*Serpulorbis squamigerus*[5]	*Anthopleura elegantissima*[5]
1	Association #5 (Macrophytic Algae) South Side	f	8/10	2/10	1/10	2/10	3/10	5/10	2/10	1/10	1/10	1/10		2/10	1/10	0			4/10
		$\bar{x}$	75.00	9.7	9.5	7.05	2.50	20.00	4.50	--	0.5	1.00		0.9	0.10				11.1
		95% cl$\bar{x}$	±28.85	±21.44	±21.48	±15.82	±4.46	±29.24	±6.84	--	±1.13	±2.26		±1.59	±2.23				±21.89
		avg wt	--	--	--	25.03	2.75	3.63	5.71	--	5	47.9		69.22	51				0.33
2	Association #5 North Side	f	8/10	8/10	0	4/10	1/10	1/10	0	1/10	2/10	3/10	1/10	1/10	4/10	2/10	0	2/10	0
		$\bar{x}$	76.50	62.50		5.05	2.00	1.50		0.3	9.5	3.5	0.2	0.10	0.60	1.0		1.7	
		95% cl$\bar{x}$	±29.39	±24.73		±6.93	±4.53	±3.39		±68.95	±19.10	±5.61	±0.45	±23.32	±0.60	±1.65		±2.57	
		avg wt	--	--		11.38	2.55	0.47		0.67	8.67	20.2	2.75	97	92	--			
3	Association #5 West Side	f	4/5	5/5	0	0	0	0	0	0	0	0	0	5/5	2/5	4/5	0	1/5	0
		$\bar{x}$	74.00	45.00										4.0	0.40	3.60		0.2	
		95% cl$\bar{x}$	±53.81	±35.10										±2.92	±7.76	±3.24		±0.32	
		avg wt	--	--										40.35	92.5	--		--	
4	Association #5 Southwest Wing	f	4/4	3/4	1/4	4/4	0	0	0	0	1/4	0	0	1/4	2/4	2/4	1/4	0	1/4
		$\bar{x}$	19.25	62.50	0.4	10.5					15.00			0.25	0.75	1.0	0.25		0.13
		95% cl$\bar{x}$	±34.87	±69.15	±1.42	±15.66					±47.70			±0.80	±1.53	±1.83	±3.70		±0.40
		avg wt	--	--	--	11.43					127.12			197.0	72.0	--	931.0		2.0
5	Association #5 Northeast Wing	f	8/8	5/8	4/8	3/8	1/8	1/8	1/8	0	1/8	0	2/8	3/8	1/8	5/8	1/8	3/8	2/8
		$\bar{x}$	76.25	36.25	29	10.63	7.5	1.25	--		1.63		0.75	1.38	0.38	2.5	0.13	10.00	--
		95% cl$\bar{x}$	±32.15	±26.72	±33.32	±17.33	±17.69	±2.95	--		±2.08		±1.46	±2.31	±0.88	±2.09	±0.29	17.31	--
		avg wt	--	--	4.56	3.32	0.4	0.41	--		±2.08		1.33	95.3	69.7	--	250.0		1.0
6	Association #5 Northeast Wing #5 East Side	f	5/6	3/6	0	0	2/6	2/6	1/6	1/6	1/6	0	0	1/6	1/6	1/6	2/6	0	1/6
		$\bar{x}$	72.50	29.17			13.33	5.67	1.67	1.67	0.83			0.17	0.33	0.5	0.5		0.33
		95% cl$\bar{x}$	±42.80	±44.67			±21.85	±12.72	±4.32	±4.32	±2.16			±0.43	±0.87	±1.82	±0.61		±0.87
		avg wt	--	--			0.35	1.88	3.2	0.87	15.6			1.24	90.0	1.82	332.0		0.5
7	Association #5 Southeast Wing South Side	f	2/3	0	0	2/3	2/3	0	1/3	1/3	0	1/3	0	2/3	0	2/3	0	0	3/3
		$\bar{x}$	35.00			2.33	3.33		1.0	0.33		0.33		7.0		1.17			85.00
		95% cl$\bar{x}$	±140.06			±5.7	±10.34		±4.3	±1.44		±1.44		±28.01		±4			±24.86
		avg wt	--			2.66	5.61		1.03	7.9		122.0		3.29		--			0.22

See footnotes at the end of table.

Table D-1. Summary data on numerical abundance and biomass of biota in major species associations.--Continued.

			Lithothamnium complex[5]	*Dodecaceria fewkesi*[6]	*Veleroa* complex[5]	*Strongylocentrotus purpuratus*	*Strongylocentrotus franciscanus*	*Serpulorbis squamigerus*[5]	*Parastichopus* spp.	*Muricea* spp.[5]	*Parapholas* sp.	*Patiria miniata*	*Filamentous* green algae[5,7]	*Laurencia pacifica*[5]	*Corynactis californica*[5]	*Astrangia lajollaensis*[5]	*Dendropsilla albopunctata*	*Phidolopora pacifica*[5]	*Pisaster giganteus*
8	Association #9 North Side (*Lithothamnion-Lithophyllum* complex/*Veleroa subulata-Murrayelopsis dawsoni* complex)	f[1]	20/20	9/20	17/20	3/20	8/20	3/20	6/20	3/20	5/20	6/20	7/20	4/20				1/20	1/20
		$\bar{x}$[2]	74.0	5.45	35.15	0.20	0.50	6.90	0.45	0.15	1.55	0.85	3.90	1.00				0.10	0.05
		95% cl$\bar{x}$[3]	±6.13	±6.16	±2.38	±0.24	±0.36	11.17	±0.39	±0.21	±1.57	±0.82	±3.60	±0.96				±0.21	±0.10
		avg wt[4]	--	--	--	68.3	379.6		220.2	727.0	--	73.1	--	1.16				0.25	1078.7
9	Association #9 South Side	f	10.11	5.11	9.11	5.11	1.11	0	1.11	0	0	5.11	0	1.11	1.11				
		$\bar{x}$	75.45	1.00	29.91	2.36	0.09		0.09			0.55		1.23	2.73				
		95% cl$\bar{x}$	±25.15	±0.67	±20.59	±1.91	±0.20		±0.2			±0.46		±1.76	±6.08				
		avg wt	--	--	--	--	--		--			--		--	--				
10	Association #9 West Side	f	10/10	1/10	9/10	5/10	2/10	0	0	0	0	4/10	1/10	1/10	8/10	1/10	0	1/10	0
		$\bar{x}$	71.00	0.20	50.5	2	0.2					0.4	10	0.2	12.9	0.05		0.7	
		95% cl$\bar{x}$	±21.64	±0.45	±23.69	±1.72	±0.3					±0.37	±22.61	±0.45	±13.42	±0.11		±1.58	
		avg wt	--	--	--	--						67.63	--	2.25	--	--		--	
11	Association #9-3 Transition West Side	f	5/5	0	5/5	1/5	2/5	0	1/5	0	0	2/5	0	0	1/5	2/5	1/5	2/5	2/5
		$\bar{x}$	71.00		64	0.2	1	0.2			0.4			0.6	7.4	0.6	0.6	0.3	0.4
		95% cl$\bar{x}$	±43.08		±37.85	±0.56	±1.75		±0.56			±0.68			±1.66	±16.12	±1.66	±0.56	±0.68
		avg wt	--		--	22.0	335.2		174.0			84.5			--	--	1.57	--	768.5
12	Association #9 Southeast Wing East Side	f	2/2	0	2/2	0	0	0	1/2	0	0	1/2	0	0	0	0	0	0	0
		$\bar{x}$	100.00		90				0.5			0.5							
		95% cl$\bar{x}$	0		0				±0.88			±0.88							
		avg wt	--		--				375.0			81							
13	Association #9 Southeast Wing South Side	f	5/5	3/5	5/5	0	0	0	1/5	0		3/5		0	0	2/5	0	1/4	
		$\bar{x}$	87.00	0.9	58				0.2			0.8				4		0.5	
		95% cl$\bar{x}$	±20.39	±1.28	±16.18				±0.56			±1.04				±6.8		±1.24	
		avg wt	--	--	--				513.0			89.5				--		--	
14	Association #9 Southwest Wing	f	4/4	1/4	2/4	1/4	1/4	1/4	1/4	0		3/4		0	3/4	1/4	2/4	2/4	
		$\bar{x}$	31.88	0.75	40	0.75	0.25	1.50	0.25			1			7.25	0.25	0.5	4	
		95% cl$\bar{x}$	±64.79	±2.39	±77.89	±2.39	±0.8	±6.03	±0.8			±1.3			±10.49	±0.80	+0.92	±11.69	
		avg wt	--	--	--	69.0	490.0	--				52.5			--		0.5	3.67	
15	Association #9 Northeast Wing North Side	f	9/10	7/10	7/10	4/10	2/10	4/10	0	3/10		4/10		2/10	1/10	0	1/10	2/10	
		$\bar{x}$	75.30	5/4	33	0.6	0.2	9		4.5		0.5		4.5	0.2		0.10	2.05	
		95% cl$\bar{x}$	±28.56	±4.24	±24.62	±0.6	±0.3	±12.77		±20.35		0.51		±8.99	±0.45		±0.23	±4.51	
		avg wt	--	--	--	62.33	347.5			35.87		76.4		0.8	--		--	3.65	
16	Association #9-8 Transition Northeast Wing North Side	f	0	0	1/1	0	0	1/1	0	0		1/1		0	1/1	0	0	1/1	
		$\bar{x}$			80.0			5				1			6.0			10	
		95% cl$\bar{x}$			0			0				0			0			0	
		avg wt			--			--				96			--			3.3	
17	Association #9 Northwest Wing	f	2/3	0	3/3	1/3	0	1/3	0	0		2/3		1/3	2/3	1/3	0	1/3	
		$\bar{x}$	40.00		40	0.33		5.67				1		0.17	10.17	0.33		0.67	
		95% cl$\bar{x}$	±131.54		±62.4	±1.44		±24.38				63.09		±0.71	±42.7	±1.44		±2.86	
		avg wt	--		--	35.0						53.67		--	--	--		--	

See footnotes at the end of table.

Table D-1. Summary data on numerical abundance and biomass of biota in major species associations.--Continued.

			Veleroa complex[5]	*Scrupocellaria diegensis*[5]	*Serpulorbis squamigerus*[5]	*Phidiopora pacifica*[5]	*Lophogorgia chilensis*[5]	*Astrangia lajollaensis*[5]	*Patiria miniata*	*Corynactis californica*[5]	*Lagenipora punctulata*[5]	*Rhodymenia* cf. *californica*[5]	*Strongylocentrotus franciscanus*	*Parastichopus* spp.	*Balanus pacificus*	*Phormidium* sp.[5]	*Muricea* spp.[5]	*Bugula neritina*[5]	*Plumularia* sp.[5]
18	Association #3	f[1]	1/5	2/5	4/5	1/5		1/5	4/5	3/5	1/5		1/5	2/5	3/5	2/5		0	
	West Side	$\bar{x}$[2]	12.0	1.4	2.40	0.10		5.0	1.0	24	0.1		0.20	0.40	3.8	12.0			
	(Lagenipora-	95% c1$\bar{x}$[3]	±33.87	±2.42	±2.57	±0.27		±13.88	±0.88	±41.02	±0.27		±0.56	±0.68	±6.23	±20.39			
	Scrupocellaria)	avg wt[4]	--	--		--		--	89.4	--	--		356.0	186.0	0.08	--			
19	Association #3	f	2/5	2/5	2/5	1/5		2/5	2/5	2/5	0		1/5	0	1/5	0		1/5	
	Northwest Wing	$\bar{x}$	22	0.8	0.60	0.2		4.0	0.60	16.60			0.20		0.20			0.10	
		95% c1$\bar{x}$	±54.38	±1.37	±1.10	±0.34		±8.09	±1.10	±44.02			±0.56		±0.56			±0.27	
		avg wt	--	1.6		--		--	95.33	--			280.0		--			--	
20	Association #10	f	4/5	3/5	1/5	2/5	1/5	1/5	1/5	1/5	3/5	1/5	1/5	0		1/5	1/5	1/5	
	SE Wing South Side	$\bar{x}$	49	8.2	1.20	0.5	0.6	1.0	0.60	8.0	0.6	0.10	0.20			0.10	4	7.0	
	(Astrangia,	95% c1$\bar{x}$	±58.94	±22.07	±3.09	±1.08	±1.66	±2.78	±1.66	±22.20	±1.02	±0.27	±0.56			±0.27	±11.10	±19.42	
	Corynactis, Lophogorgia)	avg wt	--	2.68	--	--	--	--	72.67	--	--	--	252.0			--	41.60	--	
21	Association #12	f	4/4	1/4	2/4	0	0	2/4	2/4	1/4	1/4	3/4	0	1/4		0	0	0	
	East Side	$\bar{x}$	63.75	0.13	1.50			8.75	0.75	6.25	1.0	5.13		0.25					
	(Lithothamnion-	95% c1$\bar{x}$	±30.00	±0.40	±3.78			±18.78	±0.10	±19.88	±3.18	±12.75		±0.80					
	Logenipora, Veleroa)	avg wt	--	--				--	104.0	--	--	--		215.0					
22	Association #13	f	1/1	1/1	1/1	1/1	1/1	0	1/1	1/1	1/1	1/1	0	1/1		0	0	0	
	East Side	$\bar{x}$	75	1	35	5	30		1	4	10	1		1					
	(Lophogorgia,	95% c1$\bar{x}$	00	00	00	00	00		00	00	00	00		00					
	Corynactis, Veleroa)	avg wt	--	--		3.2	10.57		113.0	--	24.1	--		148.0					
23	Association #12-13 Transition	f	3/6	0	1/6	2/6	0	0	4/6	1/6	2/6	6/6	0	2/6		0	0	0	
	East Side	$\bar{x}$	30		1.00	0.17			1.25	0.67	10.83	51.17		0.33					
		95% c1$\bar{x}$	±46.33		±2.59	±0.27			±0.53	±1.78	±21.26	±40.05		±0.55					
		avg wt	--		--	--			101.4	--	10.38	--		313.5					
24	Association #12-13 Transition	f	6/7	2/7	5/7	3/7	2/7		3/7	2/7	3/7			1/7					2/7
	Southeast Wing	$\bar{x}$	56	0.57	16.29	1.21	6.43		0.43	2.86	1.86			0.14					2.14
	East Side	95% c1$\bar{x}$	±45.22	±1.04	±13.60	±1.85	±10.91		±0.49	±4.51	±2.23			±0.35					±3.63
		avg wt	--	3	--	4.67	7.87		94.5	--	6.6			95.0					--

[1] Frequency (ratio of number of quadrats of occurrence to total number of quadrats examined)

[2] Mean abundance per 0.25-square meter area (Note: For associations 6 and 7 only, this value represents mean abundance per 0.01-square meter area)

[3] Ninety-five percent confidence limits for mean abundance

[4] Average wet weight biomass per individual specimen in grams

[5] Mean abundance expressed as percent coverage of 0.25-square meter quadrat, rather than as counts

[6] Mean abundance expressed as $(cm^2)/(6.45)=(in^2)$ of coverage

[7] Presumably, the DERBESIA MARINA predominate with other green algae present

Table D-2. Summary numerical and biomass data for less common species (see Table D-1 for common species) occurring in preliminary major species associations (see Figs. C-3 to C-6).

Subarea number[6]	Species in preliminary major species associations	Statistical parameters			
		f[1]	$\bar{x}$[2]	95% cl$\bar{x}$[3]	avg wt[4]
1	S. Association #5 (Macrophytic)				
	Ceramium sp.[5]	1/10	0.30	±0.68	--
	Lithothrix aspergillum[5]	1/10	0.05	±0.11	--
	Parastichopus spp.	1/10	0.10	±0.23	125.0
	Rhodoglossum affine[5]	1/10	0.20	±0.45	3
	Schizymenia pacifica[5]	1/10	--	--	--
	Unid. alga[5]	1/10	0.05	±0.11	--
	Unid. green alga[5]	1/10	0.20	±0.45	--
2	N. Association #5				
	Aglaophenia struthionides[5]	1/10	0.5	+1.13	5.4
	Balanus sp.	1/10	0.40	±0.49	--
	Scrupocellaria diegensis[5]	4/10	0.40	±0.89	--
	cf. *Stenogramme*[5]	1/10	0.20	±0.45	5.05
	Strongylocentrotus franciscanus	1/10	0.10	±0.23	404.0
	Unid. alga[5]	2/10	1.5	±2.42	0.7
	Ulva sp.[5]	3/10	0.40	±0.67	--
	Unid. coralline alga[5]	1/10	0.05	±0.11	--
	Unid. flat red[5]	2/10	1.0	±1.51	10.5
	Unid. tunicate[5]	1/10	0.10	±0.23	--
3	W. Association #5				
	Balanus pacificus	1/5	2.0	±5.55	--
	cf. *Cliona*[5]	2/5	0.4	±1.1	--
	Corynactis californica[5]	3/5	4.6	±7.68	--
	Fissurella volcano[5]	1/5	0.20	±0.56	2
	Laurencia pacifica[5]	1/5	0.60	±1.66	--
	Megathura crenulata	1/5	0.20	±0.56	482.0
	Parastichopus spp.	1/5	0.20	±0.56	197.0
	Pisaster giganteus	1/5	0.20	±0.56	623.0
	Unid. anemones	1/5	1.40	±3.88	--
	Unid. flat red[5]	1/5	0.40	±1.1	--
	Unid. nudibranch	1/5	0.40	±1.1	--
	fil. green alga[5]	3/5	11.67	±19.72	--
	Unid. barnacles	2/5	1.80	±3.76	--
	Unid. fil. red[5]	5/10	0.10	±0.27	--
	Unid. hydroids[5]	1/5	0.60	±1.66	--
4	SW Wing Association #5				
	Bugula neritina[5]	1/4	1.25	±3.98	2.6
	Corynactis californica[5]	2/4	7.5	±13.77	--
	Gigertina exasperata[5]	1/4	1.25	±3.98	59.8
	Lagenipora[5]	1/4	0.13	±0.4	--
	Leucetta losangelensis[5]	3/4	0.38	±0.4	--
	Megathura crenulata	1/4	0.25	±0.8	284.0
	Pterosiphonia[5]	3/4	0.75	±2.39	--
	Rhodoglossum affine[5]	1/4	0.25	±0.8	--
	Scrupocellaria[5]	1/4	0.13	±0.4	--
	Styela montereyensis	2/4	0.5	±0.92	19.60
	cf. *Pugettia* sp.	1/4	0.25	±0.8	17.0
	Unid. barnacles	2/4	3.25	±7.5	--
	Unid. fine red alga[5]	1/4	3.75	±11.93	0.67
	Unid. flat red[5]	1/4	10	±31.8	--
	Unid. hydroids	1/4	0.5	±1.59	--
	Unid. orange sponge[5]	1/4	0.13	±0.4	--
5	NE Wing Association #5 (N Side)				
	Bugula neritina[5]	1/8	0.25	±0.58	--
	Eudistylia	1/8	0.13	±0.29	--
	Laurencia pacifica[5]	1/8	3.13	±7.27	--
	Megathura crenulata	1/8	0.13	±0.29	421.0
	Rhodoglossum affine[5]	1/8	0.25	±0.58	--
	fil. green alga[5]	3/8	1.13	±1.49	--
	Unid. coralline alga[5]	1/8	3.13	±7.27	--
	Unid. green alga[5]	1/8	0.25	±0.58	--
6	NE Wing Association #5 (E Side)				
	Tetraclita squamosa[5]	1/6	8.33	±21.41	--
	Ulva sp[5]	1/6	0.08	±0.21	--
	fil. green alga[5]	2/6	13.5	±25.61	--
	Unid. flat green[5]	1/6	0.33	±0.86	--
	Unid. fil. brown alga[5]	1/6	15.83	±40.68	3.01

See footnotes at end of table.

AD-A062 065 DAMES AND MOORE LOS ANGELES CA F/G 8/6
ECOLOGICAL EFFECTS OF AN ARTIFICIAL ISLAND, RINCON ISLAND, PUNT--ETC(U)
SEP 78 G F JOHNSON, L A DEWIT DACW72-76-C-0011
UNCLASSIFIED CERC-MR-78-3 NL

2 OF 2
AD
A062 065





END
DATE
FILMED
3-79
DDC

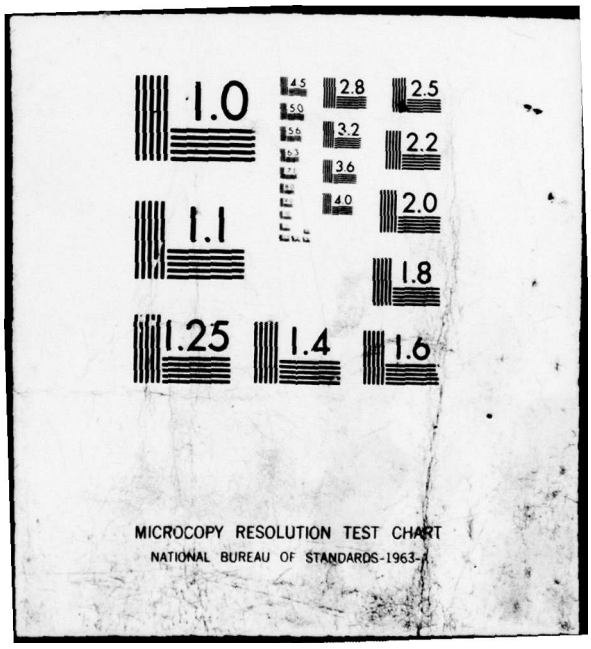

1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0
4.5
5.0
5.6
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

Table D-2. Summary numerical and biomass data for less common species occurring in preliminary major species associations.--continued.

	f	$\bar{x}$	95% cl$\bar{x}$	avg wt
7 SE Wing Association #5 (S. Side)				
Balanus sp.	1/3	0.67	±2.86	--
Cryptopleura sp.[5]	3/3	1.67	±1.44	2.06
Hymeniacidon sinapium[5]	1/3	0.33	±1.44	6.0
Mytilus californianus	2/3	5.33	±20.85	0.14
Ulva sp.[5]	2/3	1.17	±4.0	--
Unid. coralline[5]	3/3	5.67	±9.42	1.0
Unid. flat fil. brown alga[5]	1/3	0.33	±1.44	8.8
Unid. flat green[5]	1/3	0.17	±0.72	--
Unid. polychaete	2/3	0.67	±1.44	--
Unid. flat red[5]	1/3	1.67	±7.18	5.6
Unid. fine red[5]	1/3	0.67	±2.86	--
8 N. Association #9 (Lith)				
Balanus sp.	1/20	0.15	±0.31	--
Calliostoma gloriosum	1/20	0.05	±0.1	3.2
Chama pellucida	1/20	0.10	±0.21	16.0
Cliona sp.[5]	1/20	0.10	±0.21	--
Conus californicus	1/20	0.05	±0.1	0.3
Crepipatella lingulata	4/20	0.2	±0.19	0.8
Dendrodoris fulva	1/20	0.10	±0.21	--
Diopatra ornata	1/20	0.05	±0.1	--
Eudistylia sp.	1/20	0.15	±0.31	--
Gelidium sp.[5]	1/20	0.5	±1.05	--
Hinnites multirugosus	1/20	0.05	±0.1	14.5
Lophogorgia chilensis[5]	1/20	0.05	±0.1	20.8
Pecten diegensis	1/20	0.05	±0.1	--
Pseudochama exogyra	1/20	0.05	±0.1	9.4
Pteropurpura festiva	3/20	0.15	±0.17	2.83
Pteropurpura sp.	1/20	0.25	±0.52	--
Rhodymenia 5	2/20	1.25	±2.09	--
Salmacina tribranchiata[5]	1/20	0.05	±0.1	--
Scrupocellaria diegensis[5]	2/20	1.25	±2.09	--
Styela	1/20	0.05	±0.1	--
Ulva sp.[5]	1/20	0.18	±0.31	--
Unid. coralline[5]	2/20	0.13	±0.22	0.2
Unid. green alga[5]	1/20	0.25	±0.52	--
Unid. flat red[5]	2/20	0.15	±0.23	--
Unid. sponge[5]	1/20	0.10	±0.21	--
Unid. white sponge[5]	1/20	0.05	±0.1	--
Unid. porcellanid crab	1/20	0.05	±0.1	2.5
Unid. ophiuroids	1/20	0.10	±0.21	--
Unid. shrimp	1/20	0.10	±0.21	--
9 S. Association #9 4 (Litho.)				
Anthopleura xanthogrammica[5]	2/11	1.91	±4.04	--
Balanus sp.	1/11	0.27	±0.6	--
Chama pellucida	1/11	0.09	±0.2	1.6
Chaetopterus variopedatus	1/11	0.73	±1.62	3.25
Corallina officinalis[5]	1/11	1.81	±4.05	3.05
Diaperoecia californica[5]	1/11	0.45	±1.01	9.2
Gelidium robustum[5]	1/11	1.96	±2.13	6.29
G. coulteri[5]	1/11	0.91	±2.03	6.6
Lucetta losangelensis[5]	1/11	1.23	±1.76	1.2
Microcladia sp.[5]	1/11	1.23	±1.76	--
Pyura haustor (tunicate)	1/11	0.18	±0.4	0.3
Ulva sp.[5]	2/11	0.41	±0.81	0.09
Unid. fish (goby or?)	2/11	0.18	±0.27	--
Unid. hydroid[5]	1/11	0.18	±0.4	--
fil. brown alga[5]	1/11	1.23	±1.76	--
Unid. fil. red[5]	2/11	1.91	±4.04	--
Unid. flat red[5]	2/11	0.32	±0.6	--
10 W. Association #9 (Litho)				
Brown sponge[5]	1/10	0.05	±0.11	--
Chama pellucida	1/10	0.6	±1.36	3.33
Cliona celata californiana[5]	1/10	1.0	±2.26	19.3
Doriopsilla albopunctata	2/10	0.2	±0.3	1.15
Hermissenda crassicornis	1/10	0.1	±0.23	--
Lagenipora punctulata[5]	1/10	1.20	±1.39	--
Leucetta losangelensis[5]	2/10	0.35	±0.67	0.93
Salmacina tribranchiata[5]	1/10	0.7	±1.58	3
Scrupocellaria diegensis[5]	1/10	1.8	±1.61	--
Spheciospongia confoederata[5]	1/10	1.5	±3.39	15.0
Unid. ectoproct[5]	1/10	0.8	±1.81	1.38
Unid. flat red alga[5]	3/10	2.15	±4.49	--
Unid. hydroids[5]	1/10	1.0	±2.26	--
Unid. red alga[5]	2/10	1.6	±3.38	2.8
fil. brown alga[5]	1/10	3.1	±4.58	--
Unid. barnacles	1/10	0.2	±0.45	--
Unid. sponge[5]	1/10	0.05	±0.11	--
Unid. fil red alga[5]	1/10	1.5	±3.39	--

See footnotes at end of table.

Table D-2. Summary numerical and biomass data for less common species occurring in preliminary major species associations.--continued.

	f	$\bar{x}$	95% cl$\bar{x}$	avg wt
11 W. Association 3_9 Transition				
cf. *Balanus pacificus*	2/5	8.6	±14.93	--
Chaetopterus sp.	1/5	2.0	±5.55	7.0
cf. *Cliona*[5]	1/5	2.0	±5.55	--
Diaperoecia californica[5]	2/5	1.4	±1.72	4.6
Eudistylia sp.	1/5	0.2	±0.56	--
Lagenipora punctulata[5]	1/5	3	±8.33	17.87
Ocenebra foveolata	1/5	0.2	±0.56	1.0
Pteropurpura festiva	1/5	0.2	±0.56	2.4
Salmacina tribranchiata	1/5	2.0	±5.55	3.2
Scrupocellaria diegensis	3/5	5.2	±10.47	0.54
Unid. flat red alga[5]	2/5	8.6	±21.84	--
Unid hydroids[5]	2/5	2.0	±3.51	--
Unid red alga[5]	1/5	0.1	±0.27	--
Unid sponge[5]	1/5	0.1	±0.27	--
12 Southeast Wing (East Side)				
Unid. green alga sp.[5]	1/2	2.0	±12.51	--
Unid. green alga sp. #2[5]	1/2	2.0	±12.51	--
Unid. fil red alga[5]	1/2	10.0	±127.46	2
13 Southeast Wing (Litho Assn) (S. Side)				
Lagenipora punctulata[5]	1/5	0.1	±0.27	--
Unid. anemone	2/5	1.4	±2.42	--
Unid. ectoproct[5]	1/5	0.1	±0.27	--
Unid. fil red alga #1[5]	1/4	0.5	±1.59	0.05
Unid. fil red alga #2[5]	1/4	0.25	±0.4	0.1
14 Southwest Wing *(Litho/Corynactis)*				
Diaperoecia californica[5]	1/4	0.13	±0.8	--
Lagenipora punctulata[5]	1/4	2.5	±7.95	2.3
Loxorhynchus crispatus	1/4	0.25	±0.4	2
Leucetta losangelensis[5]	1/4	0.5	±1.59	--
Pachycheles pubescens	1/4	0.25	±0.4	0.2
Parastichopus spp.	1/4	0.25	±0.4	183.0
Pterosiphonia dendroidea[5]	1/4	1.0	±3.18	--
Scrupocellaria diegensis[5]	2/4	4.0	±11.69	0.67
Unid. nudibranch	1/4	0.25	±0.4	0.5
Unid. hydroids[5]	2/4	1.5	±2.75	--
Unid. green alga[5]	1/4	0.13	±0.8	--
Unid. barnacles	2/4	10.75	±26.39	--
Unid. yellow sponge[5]	1/4	2.5	±7.95	--
Unid. fil red alga #1[5]	1/4	0.5	±1.59	--
Unid. barnacles	2/4	2.0	±3.90	--

	f	$\bar{x}$	95% cl$\bar{x}$	avg wt
15 Northeast Wing (North Side)				
Balanus pacificus	1/10	0.2	±0.45	--
Cypraea spadicea	1/10	0.3	±0.68	24.3
Hinnites multirugosus	1/10	0.10	±0.23	20.0
Lagenipora punctulata[5]	1/10	1.5	±3.39	5.2
Octopus bimaculoides	1/10	0.1	±0.23	70.0
Scrupocellaria diegensis[5]	1/10	1.0	±2.26	13.6
Simnia vidleri	1/10	0.1	±0.23	--
Tedania toxicalis (sponge)[5]	1/10	1.0	±2.26	2.3
Unid. nudibranch	1/10	0.4	±0.9	--
Unid. hydroids[5]	1/10	0.05	±0.11	--
Unid. green alga[5]	1/10	0.5	±1.13	--

Other species present at frequency 1/10:

Chama pellucida	*Doriopsilla albopunctata*
Didemnum sp.	*Ceratostoma nuttalli*
Alpheus clamator	*Ocenebra foveolata*
Loxorhynchus sp.	*Halosydna tuberculifer*
Bugula neritina	*Syllidae* (juv.)
Ulva sp.	*Salmacina tribranchiata*
Crisia occidentalis	*Heptacarpus palpator*
Hiatella arctica	*Erichthonius brasiliensis*
Chama pellucida	*Ophiothrix spiculata*
Lithophaga plumula	

	f	$\bar{x}$	95% cl$\bar{x}$	avg wt
16 Northwest Wing (Transition) (Probably Association 8)				
Bugula neritina[5]	1/1	1	0	--
Diaperoecia californica[5]	1/3	0.17	+0.72	--
Scrupocellaria diegensis[5]	1/3	1.67	±7.18	3.6
Ulva sp.[5]	1/1	0.5	0	--
Unid. flat red (cf. *Polysiphonia*)[5]	1/3	13.33	±57.39	--
Unid. hydroids[5]	1/3	0.33	±1.44	--
Unid. phoronids[5]	1/1	0.5	0	-
Unid. sponge[5]	1/1	0.5	0	--
Unid. orange tunicate[5]	1/1	0.5	0	--
17 Northeast Wing (North Side) 8-9 Transition				
Balanus pacificus	1/1	1	0	--
Diopatra tubes	1/1	3	0	--
Scrupocellaria diegensis[5]	1/1	10	0	2.8
Unid. flat red (cf. *Polysiphonia*)[5]	1/1	4	0	--
Unid. hydroids[5]	1/1	3	0	--
Unid. yellow sponge[5]	1/1	4.0	0	--

See footnotes at end of table.

Table D-2. Summary numerical and biomass data for less common species occurring in tentative major species associations.--Continued.

	f	$\bar{x}$	95% cl$\bar{x}$	avg wt
18 W. Association #3 (*Lagenipora-scrupocellaria*)				
Callistochiton	1/5	0.2	±0.56	2.1
Coryphella trilineata (nud)	1/5	0.2	±0.56	--
cf. *Didemnum* **carnulentum**[5]	1/5	0.1	±0.27	--
Doriopsilla albopunctata	2/5	0.80	±1.37	1.8
Lithothamnium complex[5]	5/5	43.0	±33.87	--
Leucetta losangelensis[5]	1/5	0.10	±0.27	--
cf. *Pododesmus cepio*	1/5	0.2	±0.56	186.0
Strongylocentrotus purpuratus	1/5	12.0	±33.3	113.0
Unid. flat red alga[5]	2/5	0.7	±1.61	--
Unid. hydroids[5]	1/5	0.1	±0.27	--
Unid. gastropod	1/5	0.2	±0.56	--
Unid. crab cf. *C. productus*	1/5	0.2	±0.56	12.0
19 NW Wing Association #3				
Balanus nubilus	1/5	1.0	±1.66	--
***Peyssonellia* sp.**[5]	1/5	0.8	±2.22	--
Leucilla nuttingi[5]	1/5	0.6	±1.66	0.27
Lithothamnium[5]	1/5	0.10	±0.27	--
Leucetta losangelensis[5]	1/5	1.0	±2.78	1.12
Triopha maculata	1/5	0.2	±0.56	--
Unid flat red alga[5]	1/5	6.0	±16.66	--
20 SE Wing Association #10				
Antropora tincta[5]	1/5	0.10	±0.27	--
Aplidium californicum	1/5	1.0	±2.78	3.8
Eudistylia	1/5	--	--	--
Leucetta losangelensis[5]	1/5	0.10	±0.27	--
Mitra idae	1/5	0.20	±0.56	6.0
Petrolisthes sp.	1/5	0.2	±0.56	1.5
Pteropurpura festiva	1/5	0.20	±0.56	1.0
Unid. ectoproct[5]	1/5	0.10	±0.37	--
Unid. holothuroid	1/5	0.10	±0.27	--
Unid. pagurid crab	1/5	0.20	±0.56	9.0
Unid polyclad	1/5	0.20	±0.56	--
Unid. phoronids[5]	2/5	0.2	±0.34	--
21 E. Association #12				
Balanus tintinnabulum	1/4	0.25	±0.8	1.0
Dodecaceria fewkesi[6]	1/4	0.5	±1.59	--
Flabellinopsis iodinea	1/4	0.25	±0.8	--

	f	$\bar{x}$	95% cl$\bar{x}$	avg wt
21 Continued				
E. Association #12				
cf. *Gelidium* sp.[5]	1/4	0.13	±0.4	--
Hermissenda crassicornis	1/4	0.5	±1.59	--
Navanax inermis	1/4	0.25	±0.8	2.5
Paracyathus stearnsii	1/4	0.25	±0.8	--
cf. *Ulva* sp.[5]	2/4	12	±35.06	--
Unid. phoronids[5]	3/4	0.38	±0.4	--
Unid. hydroid[5]	1/4	0.13	±0.4	--
22 E. Association #13				
Antiopella barbarensis	1/1	1	0	4.0
Diaperoecia californica[5]	1/1	5	0	1.9
Paracyathus stearnsii	1/1	1	0	3.0
Salmacina tribranchiata[5]	1/1	0.5	0	1.5
Unid. hydroid[5]	1/1	0.5	0	1.5
Unid. ophiuroids	1/1	30	0	--
Unid. red sponge[5]	1/1	0.5	0	--
Unid. snail	1/1	1	0	0.5
23 E. Association 12-13				
Anthopleura elegantissima[5]	1/6	0.33	±0.86	--
Cystoseira osmundacea[5]	1/6	0.17	±0.43	--
Diaperoecia californica[5]	1/6	0.08	±0.21	--
Dodecaceria fewkesi[6]	2/6	0.67	±1.27	--
Doriopsilla albopunctata	1/6	0.17	±0.46	1.5
Hinnites multirugosus	1/6	0.17	±0.43	5.0
Lithothamnium complex[5]	1/6	0.08	±0.21	--
Ocenebra foveolata	1/6	0.17	±0.43	--
cf. *Ocenebra barbarensis*	1/6	0.17	±0.43	0.2
Parapholas sp.	1/6	0.17	±0.43	--
Parachyathus stearnsii	2/6	0.5	±0.88	1.0
cf. *Ulva* sp.[5]	3/6	10.17	±22.87	0.08
Unid. phoronids[5]	1/6	0.08	±0.21	--
Unid. hydroid[5]	1/6	0.83	±1.4	--
Unid. ophiuroids	1/6	2.5	±6.42	--
Unid. flat brown[5]	1/6	0.08	±0.21	--
24 East Side Assocation 12-13 Southeast Wind (East Side)				
Kelletia kelletii	1/7	0.14	±0.35	15.0
Unid. red sponge[5]	1/7	0.07	±0.18	--
Unid. flat red alga[5]	3/7	0.79	±1.13	--

* Subarea number corresponds with number in Table D-1.

[1] Frequency (ratio of number of quadrats of occurrence to total number of quadrats examined)

[2] Mean abundance per 0.25-square meter area (Note: For associations 6 and 7 only, this value represents mean abundance per 0.01-square meter area)

[3] Ninety-five percent confidence limits for mean abundance

[4] Average wet weight biomass per individual specimen in grams

[5] Mean abunance expressed as percent coverage of 0.25-square meter quadrat, rather than as counts

[6] Mean abundance expressed as $(cm^2)/(6.45)=(in^2)$ of coverage

Table D-3. Areal coverages of major species associations (areal coverages are expressed as percent of total island area between the upper limit of the barnacle-limpet zone and the lower limit of revetment rock on the bottom).

Provisional Species Associations (numerical designations for associations on various sides of the island correspond to those designations in Table D-1 and Figs. C-3 to C-6).

Table D-1 Subarea	Percent Coverage	Table D-1 Subarea	Percent coverage
Upper Intertidal Association #7 (Barnacle-Limpet)	6.70	11	2.15
Association #6 *(Mytilus-Pollicipes)*	1.28	12	3.57
Lower Intertidal and Subtidal		13	3.80
1	0.76	14	4.80
2	0.95	15	3.62
3	2.11	16	1.22
4	0.91	17	1.85
5	0.54	18	1.78
6	0.23	19	2.36
7	0.70	20	2.66
8	4.21	21	1.02
9	5.27	22	1.40
10	12.40	23	1.69
		24	0.66
Remaining island area not quantitatively sampled:	31.36		
Total	100.00 (15,560 m^2)		

Final Species Associations (see Figs. 9 to 12)

Association Designation		Percent Coverage
A	Barnacle-limpet	6.70
B	*Mytilus-Pollicipes*	1.28
C	*Anthopleura* spp.	0.10
D	Macrophytic algae	7.38
E	*Lithothamnium* complex	53.47
F	*Veleroa-Lagenipora-Lophogorgia-Muricea*	29.1
G	*Rhodymenia-Veleroa*	1.02
H	*Lithothamnium-Tetraclita*	0.61
I	Diopatra-cerianthid anemones	0.34[1]
	Total	100.00 (15,560 m^2)

[1]Present as small isolated pockets on the lower parts of association F and, on the north side, association E.

APPENDIX E

OBSERVATIONS ALONG NATURAL BOTTOM TRANSECT

The following is a discussion of substrate and biotic composition of the first segment of the transect (13.7- to 6.1-meter depth).

Over the depth range 13.7 to 11.3 meters, the substrate is silt with some shell fragments. The sediment is very soft and similar to that existing at the base of the east side of the island. The dominant biota are sea pens *(Stylatula elongata)*, bat stars *(Patiria miniata)*, whelks *(Kelletia kelletii)*, and cerianthid anemones. On a few isolated rocks (maximum vertical relief 0.25 meter) stony corals (*Astrangia lajollaensis)* were present and the tectibranch, *Navanax inermis*, was observed.

At about 10.7 meters the substrate is more sandy with many shell fragments. Isolated smooth boulders (1- to 2-meter diameter) are present with the evidence that they are intermittently covered with sand (no epiphytic algae present). *Diopatra* spp. are common to abundant in patches of up to about 100 individuals. *Kelletia, Patiria,* and *Strongylocentrotus franciscanus* are present. Vertical pipes (about 1 meter high) were observed with cf. *Metridium* sp. attached. *Diaulula sandiegensis, Corynactis california, Cancer* sp., cf. *Stylatula,* and cerianthid anemones were present. Also at this depth, gorgonians *(Muricea* spp. and *Lophogorgia chilensis)* appear on isolated rocks, with *Muricea* common to locally abundant.

From 10.7 to 9.1 meters, smooth boulders, as described above, dominate the substrate. However, these boulders are more heavily encrusted with *Astrangia, Veleroa,* and *Lithothamnium* complex. Around the rock bases, where some sand is present, *Diopatra ornata* occur. The midshipman *(Porichthys* spp.), juvenile olive rockfish (*Sebastes serranoides)* and sanddabs *(Citharichthys* sp.) are also present. *Lithothamnium* coverage ranges up to 15 to 20 percent of exposed rock areas. Also present on vertical pipes and rocks are sponges *(Leucetta losangelensis), Metridium,* and *Strongylocentrotus franciscanus. Strongylocentrotus purpuratus* was also observed along these depths, but this species was not abundant. *Cypraea spadicea, Tethya aurantia, Pisaster brevispinus, P. giganteus,* and *Dermasterias imbricata* were also present to common on the solid substrate.

From 7.6 to 6.1 meters the substrate changes from smooth boulders to solid shale bedrock with isolated boulders and sand patches. Pholad bivalves, starfish, and urchins dominate the macrobiota. Some red alga *(Veleroa* complex and *Lithothamnium)* are present; also juvenile red algae was observed attached to the rock.

The next segment of the transect, extending from a depth of about 4.6 meters to shore, is predominantly sand and largely depauperate in macrobiota (visibility was very poor during the two occasions this area was examined). From this point shoreward, scattered rocks (30- to 60-centimeter diameter) were commonly encountered. Acorn barnacles were abundant on these rocks, and coverages of *Lithothamnium* complex and the tunicate, *Styela montereyensis* average about 15 and 45 percent, respectively. Other organisms present to common in this nearshore zone include starfish *(Patiria miniata* and *Pisaster ochraceus)*, feather boa kelp *(Egregia menziesii)*, hydroids and tunicates. Tunicates are especially abundant (60 to 70 percent coverage) between depths of 4.3 to 3.7 meters.

In general, the deeper parts of this transect are predominantly silt. Where rocks occur, they are comparable to the deeper areas of the east-side permanent transect (i.e., very little epibiota, and much silt). Farther inshore along the natural bottom transect, less silt and more sand are present. The rocks, which are smoother than in deeper water, resemble deeper rocks on the north side of the island in that much *Astrangia lajollaensis* is present but differs in that ectoprocts are for the most part missing.

APPENDIX F

SIEVE ANALYSIS OF NATURAL BOTTOM SEDIMENT SAMPLES

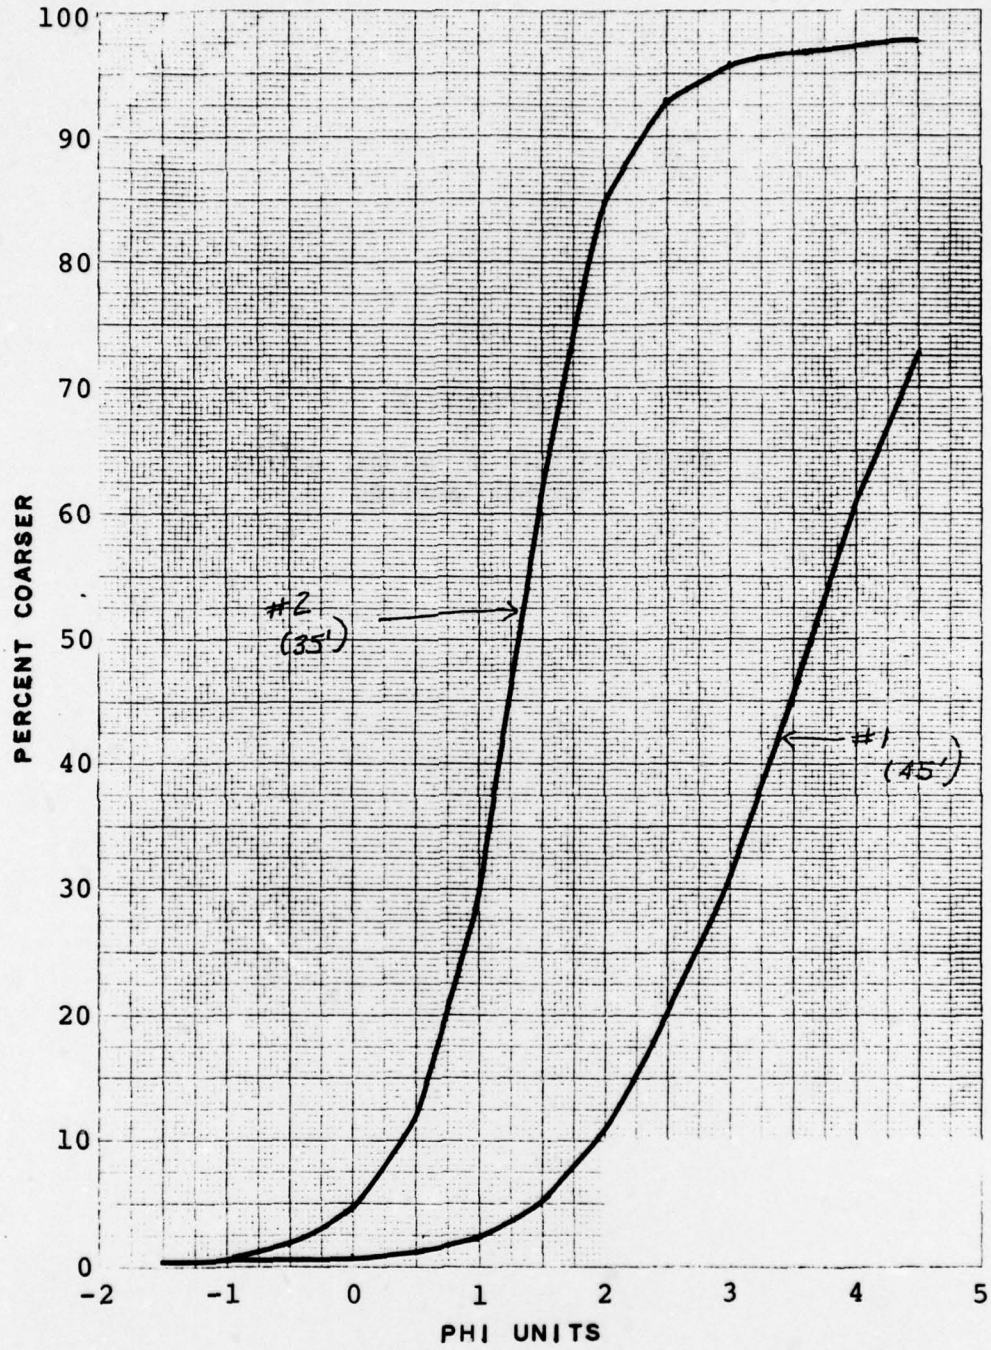


Figure F-1. Seive analysis results from natural bottom sediments (station locations shown on Fig. 18).

Table F-1. Sieve analysis, natural bottom sediments, Sample 1
(Sample location shown on Figure 18.).

SIEVS ANALYSIS
Mech. Anal. Sheet No. 3
(Revised Nov. 1960)

Sample Date and No. SED SAMPLE #1 4507

Locality 45'

ϕ_{84} _____ M_ϕ = 3.65
ϕ_{16} 2.75
$\phi_{84}-\phi_{16}$ _____ $(\frac{1}{2})$ = σ_ϕ = _____
$\phi_{84}+\phi_{16}$ _____ $(\frac{1}{2})$ = M_ϕ = _____
$M_\phi - Md_\phi$ = S = _____
S/σ_ϕ = α_ϕ = _____

Analyzed by D. AUBREY Date 2/4/77

RINCON

SAMPLE DESCRIPTION
Color _____ Size _____

Sorting _____ Roundness _____

Composition _____

Size Range ϕ	Dish No.	Wt. Dish Sample	Wt. of Dish	Wt. of Sample	% of Total Wt.	Cum %	Notes
Before Sieving	4	118.820	40.625	78.125		100%	
-2 to $-1\frac{1}{2}$		34.550	34.278	.272		0.3	SHELL FRAGS
$-1\frac{1}{2}$ to -1		34.653		.375		0.5	" "
-1 to $-\frac{1}{2}$		34.769		.491		0.6	" "
$-\frac{1}{2}$ to 0		34.892		.614		0.8	" "
0 to $\frac{1}{2}$		35.169		.891		1.1	
$\frac{1}{2}$ to 1		36.089		1.811		2.3	
1 to $1\frac{1}{2}$		38.215		3.937		5.0	
$1\frac{1}{2}$ to 2		42.832		8.554		10.9	
2 to $2\frac{1}{2}$		49.931		15.623		20.0	
$2\frac{1}{2}$ to 3		58.585		24.307		31.1	
3 to $3\frac{1}{2}$		69.169		34.891		44.7	
$3\frac{1}{2}$ to 4		81.691		47.413		60.7	
4-4½ -48		91.026		56.748		72.6	

<4½ ϕ

Table F-2. Sieve analysis, natural bottom sediments, Sample 2
(Location shown on Figure 18.).

SIEVS ANALYSIS
Mech. Anal. Sheet No. 3
(Revised Nov. 1950)

Sample Date and No. SED SAMPLE #2 4507

Locality 35'

Analyzed by D. AUBREY Date 29 AUG 77

ϕ_{84} 1.96
ϕ_{16} .62
$\phi_{84}-\phi_{16}$ 1.34 ($\frac{1}{2}$) = σ_ϕ = .67
$\phi_{84}+\phi_{16}$ 2.58 ($\frac{1}{2}$) = M_ϕ = 1.79
$M_\phi - Md_\phi$ = S = .48
S/σ_ϕ = α_ϕ = .72

Mdϕ = 1.31

SAMPLE DESCRIPTION
Color _____ Size _____

Sorting _____ Roundness _____

Composition _____

Size Range ϕ	Dish No.	Wt. Dish Sample	Wt. of Dish	Wt. of Sample	% of Total Wt.	Cum %	Notes
Before Sieving	8	148.980	40.695	108.285		100%	
-2 to -1½		34.527	34.278	.249		0.2	SHELL FRAGS
-1½ to -1		34.917		.639		0.6	" "
-1 to -½		36.111		1.833		1.7	" "
-½ to 0		39.031		4.753		4.4	" "
0 to ½		46.957		12.679		11.7	
½ to 1		66.272		31.994		29.5	
1 to 1½		100.922		66.644		61.5	
1½ to 2		126.101		91.823		84.8	
2 to 2½		134.991		100.713		93.0	
2½ to 3		138.027		103.749		95.8	
3 to 3½		139.093		104.815		96.8	
3½ to 4		139.462		105.184		97.1	
<4		139.810		105.532		97.5	

APPENDIX G

GLOSSARY

armor rock - Heavy rock, usually weighing 500 pounds or more, used to protect a coastal structure or shore from heavy wave attack.

associations - In ecology, a subunit of community organization identified by its major organisms.

azimuth - In this case, the arc of the horizon measured in degrees, clockwise from north to the point toward which the diver is swimming.

bathymetry - The measurement of depths of water in oceans, seas, and lakes, also information derived from such measurements.

benthic - Pertaining to the subaquatic bottom.

biomass - The amount of living material in a unit area for a unit time.

biota - The living part of a system; flora and fauna.

caudal peduncle - The constricted part of a fish immediately ahead of the tail fin.

climatic community - a community that is in equilibrium with the general climate.

climax - The final stage in community succession.

complex - An assemblage of interconnected or interacting parts.

dendogram - The type of diagram commonly referred to as a "family tree" designed to show postulated relationships between taxa.

depauperation - Falling short of usual development or size.

ecosystem - The living organisms and the nonliving environment interacting in a given area.

ectoprocts - A bryozoan (moss animal) of the group Ectoprocta.

epibiota - Life forms attached to or living upon surfaces.

F test - A method used to test the hypothesis that the means in several classes statistically are similar.

genus - A unit of biological classification (taxa) which includes one or several species that share certain fundamental characteristics, supposedly by common evolutionary descent.

gill net - A single-webbed net with meshes sized to catch in the gills of the fish being sought.

infauna - The animals that live in the bottom sediment.

intertidal zone - The zone bounded by the high and low water extremes of the tide.

macrobiota - Large forms of life visible to the naked eye.

macrophytic - Refers to large aquatic plants, e.g., kelps.

nonparametric test - A statistical test that is not concerned with the specific parameters, but rather with the distribution of the variates. Also referred to as distribution free. See parameter.

parameter - A parameter is a measurable characteristic of a population. The mean is an example of a parameter.

quadrat - A plot usually square but occasionally rectangular or circular, in which the organisms are intensely examined and one or several of which form the basis for assessing the entire population of the area.

revetment - A facing of stone, concrete, etc., built to protect a scarp, embankment, or a shore structure against erosion by wave actions or currents.

riprap - A layer, facing, or protective mound of stones randomly placed to prevent erosion, scour, or sloughing of a structure or embankment. Also, the stone so used.

Simpson's Index - An index of the proportions and numbers of species and individuals in a community used to measure the diversity.

species - A group of individuals having common attributes and designated by a common name.

splash zone - The zone immediately landward of the mean high water level affected by the wave spray.

substrate - The base on which an organism lives.

subtidal - Below mean low water (lower low on the Pacific coast of the United States).

succession - In ecology, an orderly process of community development and changes with time which result from interactions between species and environment.

taxa - A taxanomic group or entity such as genus or species in a formal system of scientific nomenclature.

tetrapod - A massive concrete shape for wave protection consisting of a central body and four equal-length limbs radiating out at equal angles from the central body. The tetrapods at Rincon Island weigh between 19.5 and 38.0 tons each.

transect - A line (or belt) through a community along which the important characteristics of the individuals of the species being studied are observed and noted; sampling along a transect may be plotless or refer to specific plots located along a line.

turbidity - An optical condition of water resulting from suspended matter; water is turbid when its load of suspended materials is conspicuous.

Wilcoxon "t" test - A nonparametric test used to statistically determine whether the ranked differences between measurements came from the same or different populations.

Johnson, G. F.
Ecological effects of an artificial island, Rincon Island, Punta Gorda, California / by G. F. Johnson and L. A. deWit. – Ft. Belvoir, Va. : U.S. Coastal Engineering Research Center ; Springfield, Va. : available from National Technical Information Service, 1978.
106 p. : ill. (Miscellaneous report – U.S. Coastal Engineering Research Center ; no. 78-3) (Contract – U.S. Coastal Engineering Research Center ; DACW72-76-C-0011)
Bibliography : p. 64.
This study documents marine ecological conditions at Rincon Island, located approximately 0.8 kilometer offshore between Ventura and Santa Barbara, California. The island was constructed between 1957 and 1958 to serve as a permanent platform for oil and gas production.
1. Artificial islands. 2. Ecological effects. 3. Rincon Island, Calif. 4. Punta Gorda, Calif. I. Title. II. deWit, L. A., joint author. III. Series: U.S. Coastal Engineering Research Center. Miscellaneous report no. 78-3. IV. Series: U.S. Coastal Engineering Research Center. Contract DACW72-76-C-0011.
TC203 .U581mr no. 78-3 627

Johnson, G. F.
Ecological effects of an artificial island, Rincon Island, Punta Gorda, California / by G. F. Johnson and L. A. deWit. – Ft. Belvoir, Va. : U.S. Coastal Engineering Research Center ; Springfield, Va. : available from National Technical Information Service, 1978.
106 p. : ill. (Miscellaneous report – U.S. Coastal Engineering Research Center ; no. 78-3) (Contract – U.S. Coastal Engineering Research Center ; DACW72-76-C-0011)
Bibliography : p. 64.
This study documents marine ecological conditions at Rincon Island, located approximately 0.8 kilometer offshore between Ventura and Santa Barbara, California. The island was constructed between 1957 and 1958 to serve as a permanent platform for oil and gas production.
1. Artificial islands. 2. Ecological effects. 3. Rincon Island, Calif. 4. Punta Gorda, Calif. I. Title. II. deWit, L. A., joint author. III. Series: U.S. Coastal Engineering Research Center. Miscellaneous report no. 78-3. IV. Series: U.S. Coastal Engineering Research Center. Contract DACW72-76-C-0011.
TC203 .U581mr no. 78-3 627

Johnson, G. F.
Ecological effects of an artificial island, Rincon Island, Punta Gorda, California / by G. F. Johnson and L. A. deWit. – Ft. Belvoir, Va. : U.S. Coastal Engineering Research Center ; Springfield, Va. : available from National Technical Information Service, 1978.
106 p. : ill. (Miscellaneous report – U.S. Coastal Engineering Research Center ; no. 78-3) (Contract – U.S. Coastal Engineering Research Center ; DACW72-76-C-0011)
Bibliography : p. 64.
This study documents marine ecological conditions at Rincon Island, located approximately 0.8 kilometer offshore between Ventura and Santa Barbara, California. The island was constructed between 1957 and 1958 to serve as a permanent platform for oil and gas production.
1. Artificial islands. 2. Ecological effects. 3. Rincon Island, Calif. 4. Punta Gorda, Calif. I. Title. II. deWit, L. A., joint author. III. Series: U.S. Coastal Engineering Research Center. Miscellaneous report no. 78-3. IV. Series: U.S. Coastal Engineering Research Center. Contract DACW72-76-C-0011.
TC203 .U581mr no. 78-3 627

Johnson, G. F.
Ecological effects of an artificial island, Rincon Island, Punta Gorda, California / by G. F. Johnson and L. A. deWit. – Ft. Belvoir, Va. : U.S. Coastal Engineering Research Center ; Springfield, Va. : available from National Technical Information Service, 1978.
106 p. : ill. (Miscellaneous report – U.S. Coastal Engineering Research Center ; no. 78-3) (Contract – U.S. Coastal Engineering Research Center ; DACW72-76-C-0011)
Bibliography : p. 64.
This study documents marine ecological conditions at Rincon Island, located approximately 0.8 kilometer offshore between Ventura and Santa Barbara, California. The island was constructed between 1957 and 1958 to serve as a permanent platform for oil and gas production.
1. Artificial islands. 2. Ecological effects. 3. Rincon Island, Calif. 4. Punta Gorda, Calif. I. Title. II. deWit, L. A., joint author. III. Series: U.S. Coastal Engineering Research Center. Miscellaneous report no. 78-3. IV. Series: U.S. Coastal Engineering Research Center. Contract DACW72-76-C-0011.
TC203 .U581mr no. 78-3 627

Johnson, G. F.
Ecological effects of an artificial island, Rincon Island, Punta Gorda, California / by G. F. Johnson and L. A. deWit. – Ft. Belvoir, Va. : U.S. Coastal Engineering Research Center ; Springfield, Va. : available from National Technical Information Service, 1978.
106 p. : ill. (Miscellaneous report – U.S. Coastal Engineering Research Center ; no. 78-3) (Contract – U.S. Coastal Engineering Research Center ; DACW72-76-C-0011)
Bibliography : p. 64.
This study documents marine ecological conditions at Rincon Island, located approximately 0.8 kilometer offshore between Ventura and Santa Barbara, California. The island was constructed between 1957 and 1958 to serve as a permanent platform for oil and gas production.
1. Artificial islands. 2. Ecological effects. 3. Rincon Island, Calif. 4. Punta Gorda, Calif. I. Title. II. deWit, L. A., joint author. III. Series: U.S. Coastal Engineering Research Center. Miscellaneous report no. 78-3. IV. Series: U.S. Coastal Engineering Research Center. Contract DACW72-76-C-0011.
TC203 .U581mr no. 78-3 627

Johnson, G. F.
Ecological effects of an artificial island, Rincon Island, Punta Gorda, California / by G. F. Johnson and L. A. deWit. – Ft. Belvoir, Va. : U.S. Coastal Engineering Research Center ; Springfield, Va. : available from National Technical Information Service, 1978.
106 p. : ill. (Miscellaneous report – U.S. Coastal Engineering Research Center ; no. 78-3) (Contract – U.S. Coastal Engineering Research Center ; DACW72-76-C-0011)
Bibliography : p. 64.
This study documents marine ecological conditions at Rincon Island, located approximately 0.8 kilometer offshore between Ventura and Santa Barbara, California. The island was constructed between 1957 and 1958 to serve as a permanent platform for oil and gas production.
1. Artificial islands. 2. Ecological effects. 3. Rincon Island, Calif. 4. Punta Gorda, Calif. I. Title. II. deWit, L. A., joint author. III. Series: U.S. Coastal Engineering Research Center. Miscellaneous report no. 78-3. IV. Series: U.S. Coastal Engineering Research Center. Contract DACW72-76-C-0011.
TC203 .U581mr no. 78-3 627

Johnson, G. F.
Ecological effects of an artificial island, Rincon Island, Punta Gorda, California / by G. F. Johnson and L. A. deWit. – Ft. Belvoir, Va. : U.S. Coastal Engineering Research Center ; Springfield, Va. : available from National Technical Information Service, 1978.
106 p. : ill. (Miscellaneous report – U.S. Coastal Engineering Research Center ; no. 78-3) (Contract – U.S. Coastal Engineering Research Center ; DACW72-76-C-0011)
Bibliography : p. 64.
This study documents marine ecological conditions at Rincon Island, located approximately 0.8 kilometer offshore between Ventura and Santa Barbara, California. The island was constructed between 1957 and 1958 to serve as a permanent platform for oil and gas production.
1. Artificial islands. 2. Ecological effects. 3. Rincon Island, Calif. 4. Punta Gorda, Calif. I. Title. II. deWit, L. A., joint author. III. Series: U.S. Coastal Engineering Research Center. Miscellaneous report no. 78-3. IV. Series: U.S. Coastal Engineering Research Center. Contract DACW72-76-C-0011.
TC203 .U581mr no. 78-3 627

Johnson, G. F.
Ecological effects of an artificial island, Rincon Island, Punta Gorda, California / by G. F. Johnson and L. A. deWit. – Ft. Belvoir, Va. : U.S. Coastal Engineering Research Center ; Springfield, Va. : available from National Technical Information Service, 1978.
106 p. : ill. (Miscellaneous report – U.S. Coastal Engineering Research Center ; no. 78-3) (Contract – U.S. Coastal Engineering Research Center ; DACW72-76-C-0011)
Bibliography : p. 64.
This study documents marine ecological conditions at Rincon Island, located approximately 0.8 kilometer offshore between Ventura and Santa Barbara, California. The island was constructed between 1957 and 1958 to serve as a permanent platform for oil and gas production.
1. Artificial islands. 2. Ecological effects. 3. Rincon Island, Calif. 4. Punta Gorda, Calif. I. Title. II. deWit, L. A., joint author. III. Series: U.S. Coastal Engineering Research Center. Miscellaneous report no. 78-3. IV. Series: U.S. Coastal Engineering Research Center. Contract DACW72-76-C-0011.
TC203 .U581mr no. 78-3 627