

THE VIEWS AND CONCLUSIONS CONTAINED IN THIS DOCUMENT ARE THOSE OF THE AUTHORS AND SHOULD NOT BE INTERPRETED AS NECESSARILY REPRESENTING THE OFFICIAL POLICIES, EITHER EXPRESSED OR IMPLIED, OF THE ADVANCED RESEARCH PROJECTS AGENCY OR THE U.S. GOVERNMENT.

^T
CARBON MONOXIDE LASER

SEMI-ANNUAL TECHNICAL REPORT

M.J.W. Boness and R.E. Center

Contract No. N00014-72-C-0030

September 1975

sponsored by

ADVANCED RESEARCH PROJECTS AGENCY

ARPA Order No. 1807

ACCESSION NO.
NO. 1807

 AVCO EVERETT RESEARCH LABORATORY, INC. ¹⁶

A SUBSIDIARY OF AVCO CORPORATION

20080903 175

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) CARBON MONOXIDE LASER		5. TYPE OF REPORT & PERIOD COVERED Semi-Annual Technical Rept.
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) M.J.W. Boness and R.E. Center		8. CONTRACT OR GRANT NUMBER(s) N00014-73-C-0030
9. PERFORMING ORGANIZATION NAME AND ADDRESS Avco Everett Research Laboratory, Inc. 2385 Revere Beach Parkway Everett, Massachusetts 02149		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Advanced Research Projects Agency ARPA Order No. 1807		12. REPORT DATE September 1975
		13. NUMBER OF PAGES 16
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Office of Naval Research Department of the Navy Arlington, Virginia 22217		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) CO Laser Medium Quality Heat Exchanger Interferogram Discharge Cavity Near-Diffraction-Limited		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) During this reporting period fabrication and assembly of the laser cavity and heat exchanger were completed. Near diffraction limited medium quality in the passive cold flowing gas over the active volume of the cavity has been achieved.		

AD016605

FOREWORD

ARPA Order No.: 1807

Program Code No.: 421

Contract No.: N00014-73-C-0030

Principal Investigator: R.E. Center
and Phone No.: 617/389-3000, Ext. 593

Name of Contractor: Avco Everett Research Laboratory, Inc.

Effective Date of Contract: November 1, 1971

Contract Expiration Date: June 30, 1975

Amount of Contract: \$884,079

Scientific Officer: Director, Physics Program,
Physical Sciences Division,
Office of Naval Research,
Department of the Navy,
800 North Quincy St.,
Arlington, Virginia 22217

Short Title of Work: CO Laser

ABSTRACT

During this reporting period fabrication and assembly of the laser cavity and heat exchanger were completed. Near diffraction limited medium quality in the passive cold flowing gas over the active volume of the cavity has been achieved.

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
	Foreword	ii
	Abstract	iii
	List of Illustrations	v
I.	INTRODUCTION	1
II.	MK II CAVITY AND HEAT EXCHANGER	2
III.	MEDIUM QUALITY MEASUREMENTS	9
	REFERENCES	16

LIST OF ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
1	Schematic of Complete Laser Discharge Cavity and E-Beam	3
2	End-On View of Mk II CO Laser Cavity Prior to Installation of the Electrodes and Interfacing with the E-Beam	4
3	Schematic of the Porous Plate Heat Exchanger	5
4	Photograph of the Porous Plate Heat Exchanger and LN ₂ Supply Manifolds	6
5	Detail of the Side of the Heat Exchanger showing the Counterflowing LN ₂ Supply Manifolds and the Swagelok Couplings between the Copper Cooling Pipes Embedded in the Porous Plates	7
6	Interferogram of the Medium Homogeneity looking along the Lasing Axis, taken at -175°C, a Flow Velocity of 400 cm/sec and a Pressure of 1/6 atm	12
7	Interferogram taken under Conditions Similar to Fig. 6 but at a Temperature of -170°C	13
8	Vacuum Reference Interferogram for Figs. 6 and 7, the Location of the Side Walls and Direction of Flow are Indicated	14

I. INTRODUCTION

The main objective of this program is the investigation of the pulsed electrical CO laser to determine the relative scaling parameters and the usefulness of high power CO lasers in systems applications.

During this six month period the laser cavity and heat exchanger have been fabricated and assembled. Initial interferometric measurements indicated considerable turbulence in the flow which was greatly improved by introducing a fine stainless steel screen above the heat exchanger. However the original tests performed at a flow velocity of 50 cm/sec did not yield the desired medium uniformity and near-diffraction limited medium quality was eventually obtained by increasing the flow velocity to approximately 400 cm/sec. Hot wire anemometer temperature measurements indicated that the gas temperature was close to the temperature of the heat exchanger, 77°K. The 500 cfm Stokes pump was found to introduce disturbances into the gas flow and preparations are underway to install and connect the system to a 300 cf dump tank facility. Currently the electrodes are being installed and the E-beam interfaced with the discharge cavity. Once completed further flow tests will be performed using the dump tank facility and the effect of the electrode structures upon the medium uniformity investigated. Finally gain and power measurements will be performed.

II. MK II CAVITY AND HEAT EXCHANGER

The design goal of the Mk II cavity and flow system was to overcome the thermal nonuniformities encountered in the original 20 liter discharge system.⁽¹⁾ A schematic of the laser cavity, E-beam and heat exchanger is shown in Fig. 1. The basic concept of the new transverse flow system is to introduce the gas through a porous plate heat exchanger and allow free convection boundary layers to be established on the room temperature side and end walls of the discharge cavity. The flow direction is vertically upwards to ensure that buoyancy effects are favorable and to avoid recirculation zones. Boundary layer calculations were performed⁽²⁾ which indicated that the variations in optical path between the upper and lower portions of the boundary layers which will develop across the windows at the end of the cavity will be compatible with 1.5 times diffraction limited quality of the laser beam. Similarly the thickness of the boundary layers which develop along the side walls indicated that the required medium uniformity was preserved across the active portion of the medium.

Fabrication of the cavity and pumping system were completed and the vacuum integrity of the system shown to conform with the experimental requirements. Initial flow tests and medium quality measurements were performed prior to installing the electrode structures and interfacing the cavity with the E-beam. A photograph looking from one end of the cavity is shown in Fig. 2. Smooth lucite sheets defined the flow walls. These were eventually to be replaced by slotted walls through which the tubular electrodes penetrated and with a rectangular opening on the cathode flow wall to smoothly interface with the E-beam foil. The heat exchanger was constructed according to the design described in a previous report.⁽²⁾ A schematic of the construction is shown in Fig. 3. The heat exchanger consisted of three uniform sintered bronze plates mounted in an isothermal aluminum base. A series of 1/4-inch-diameter copper tubes, spaced two inches apart, were embedded in the sintered bronze plates and connected via manifolds to the coolant supply. Two manifolds provided opposite coolant flow in adjacent copper cooling tubes in order to reduce any transverse temperature gradients. Two views of the heat exchanger are shown in Figs. 4 and 5. Temperature monitoring was provided by instrumenting both the sintered plates and the aluminum box with thermocouple sensors.

The heat exchanger was mounted inside a lucite box which bolted to the bottom of the cavity via a viton o-ring seal. Care was taken to thermally isolate the heat exchanger by supporting it on thin lucite strips and by sealing it to the flow walls by compressible polyethylene strips. In addition the lucite box was lined with aluminum foil to reduce thermal radiative coupling with the surroundings. The large thermal capacity of the heat exchanger required the removal of approximately 10^7 joules in order to reduce the

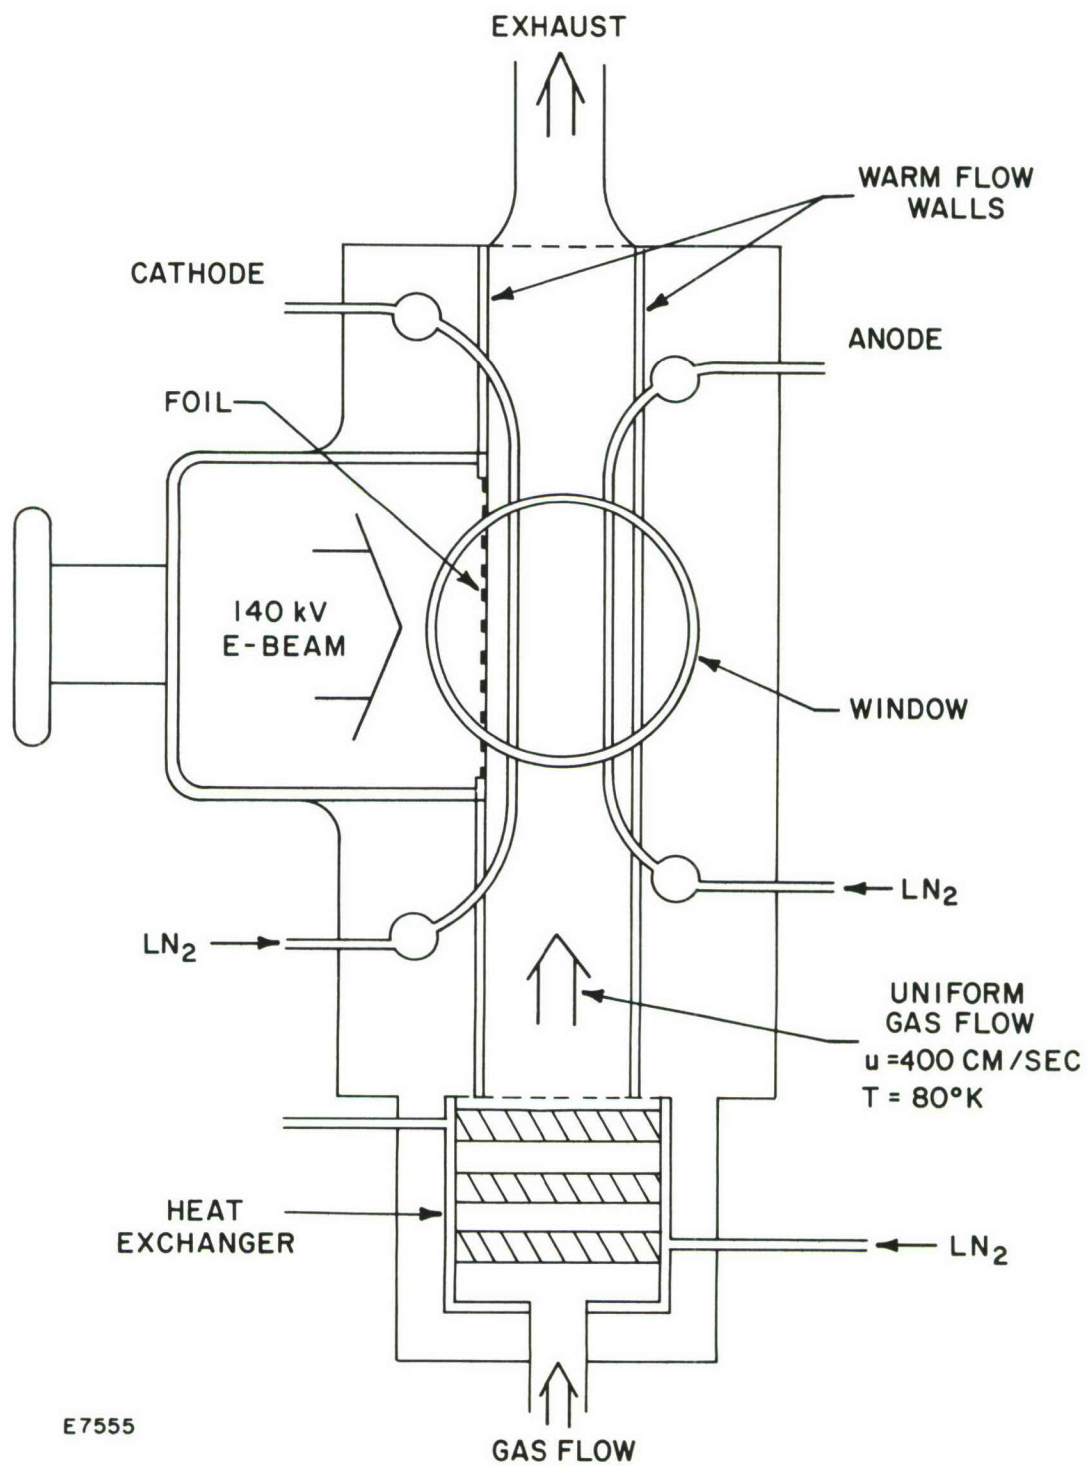


Fig. 1 Schematic of Complete Laser Discharge Cavity and E-Beam

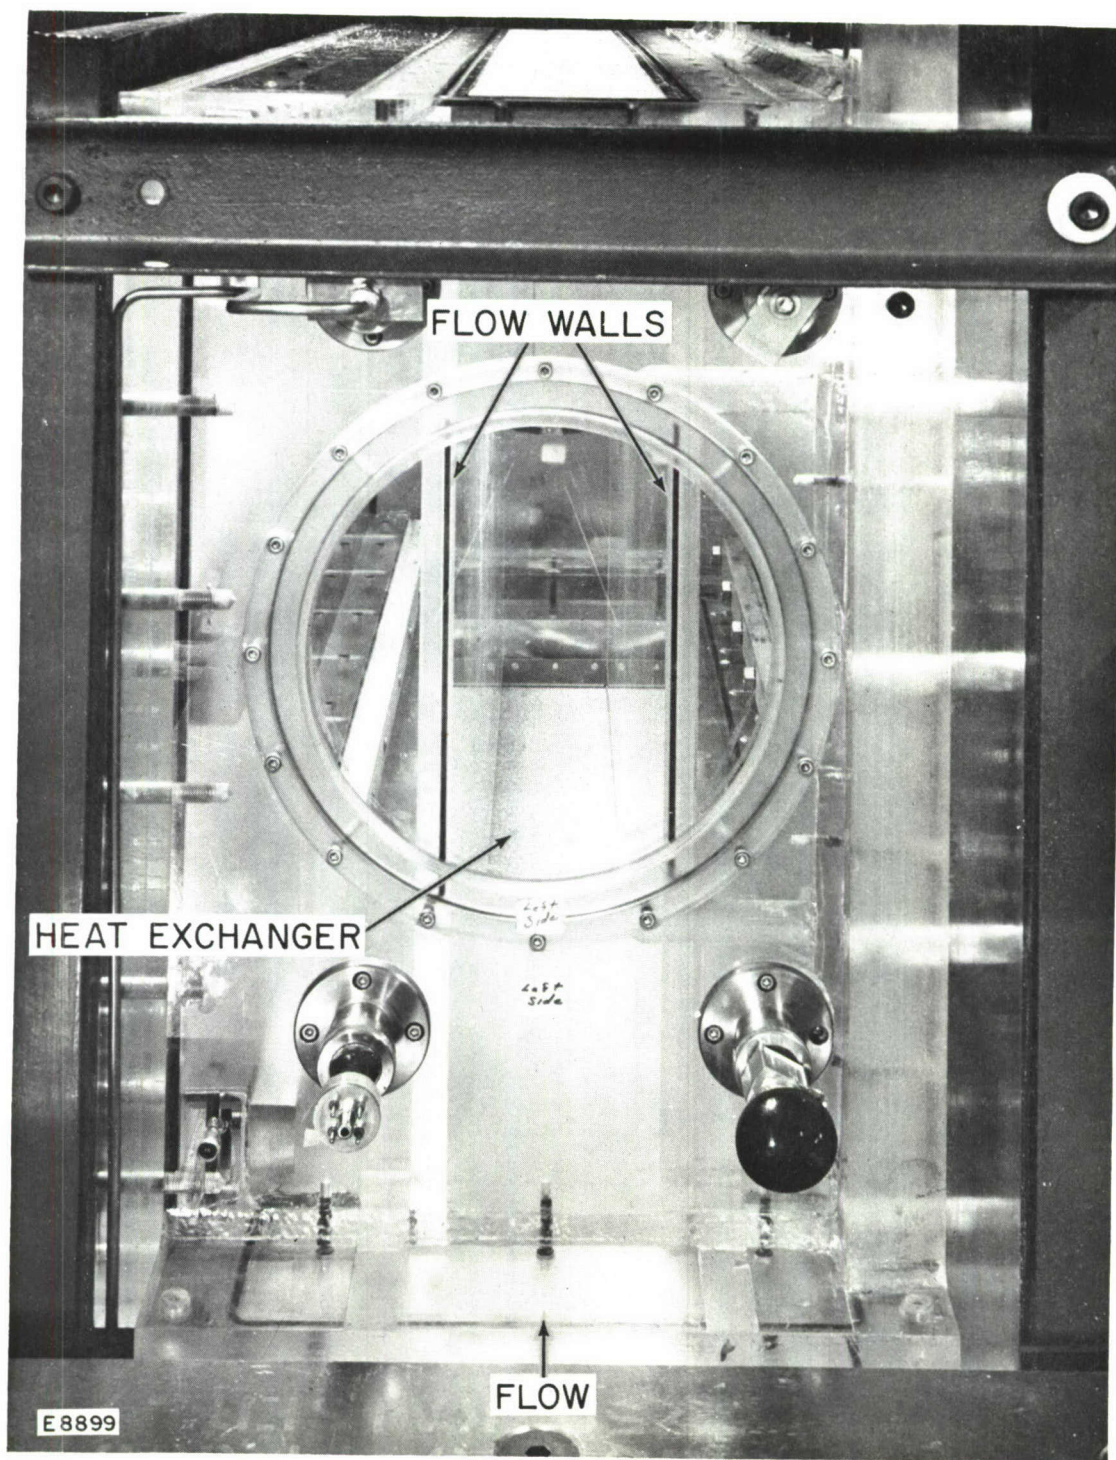


Fig. 2 End-On View of Mk II CO Laser Cavity Prior to Installation of the Electrodes and Interfacing with the E-Beam

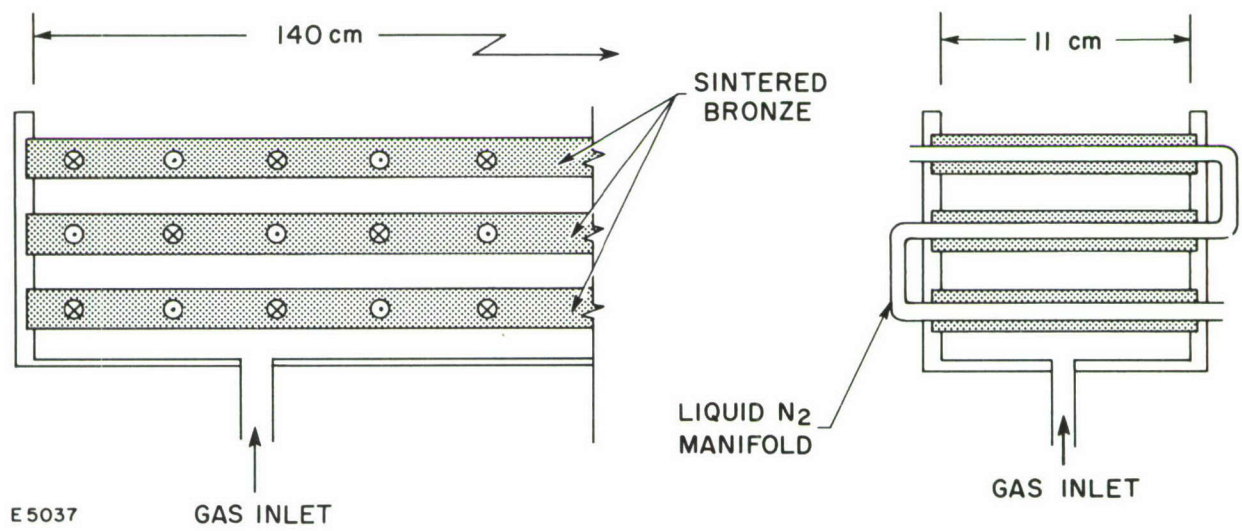


Fig. 3 Schematic of the Porous Plate Heat Exchanger

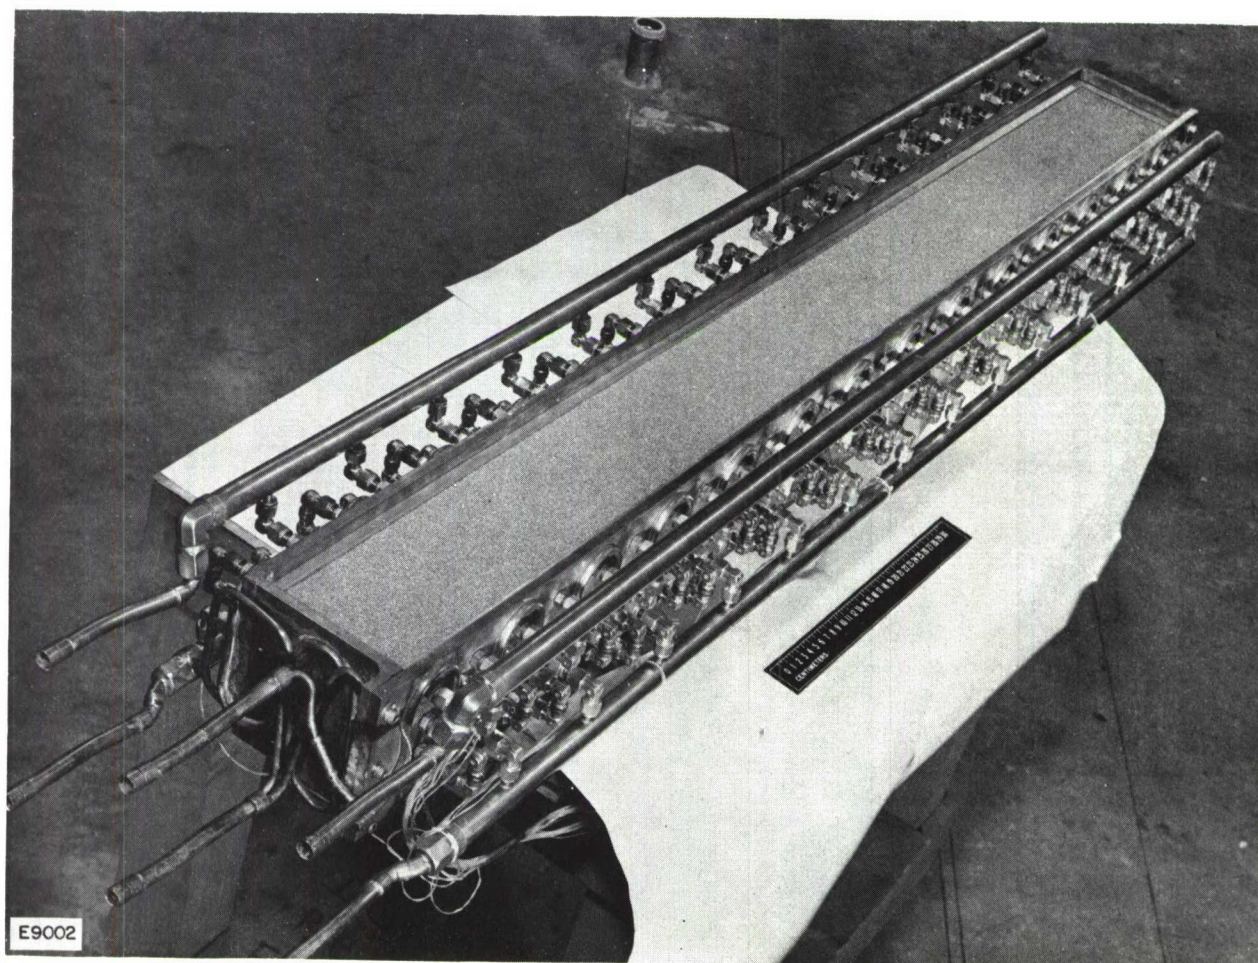


Fig. 4 Photograph of the Porous Plate Heat Exchanger and LN₂ Supply Manifolds. The stainless steel screen is visible on the top of the heat exchanger.

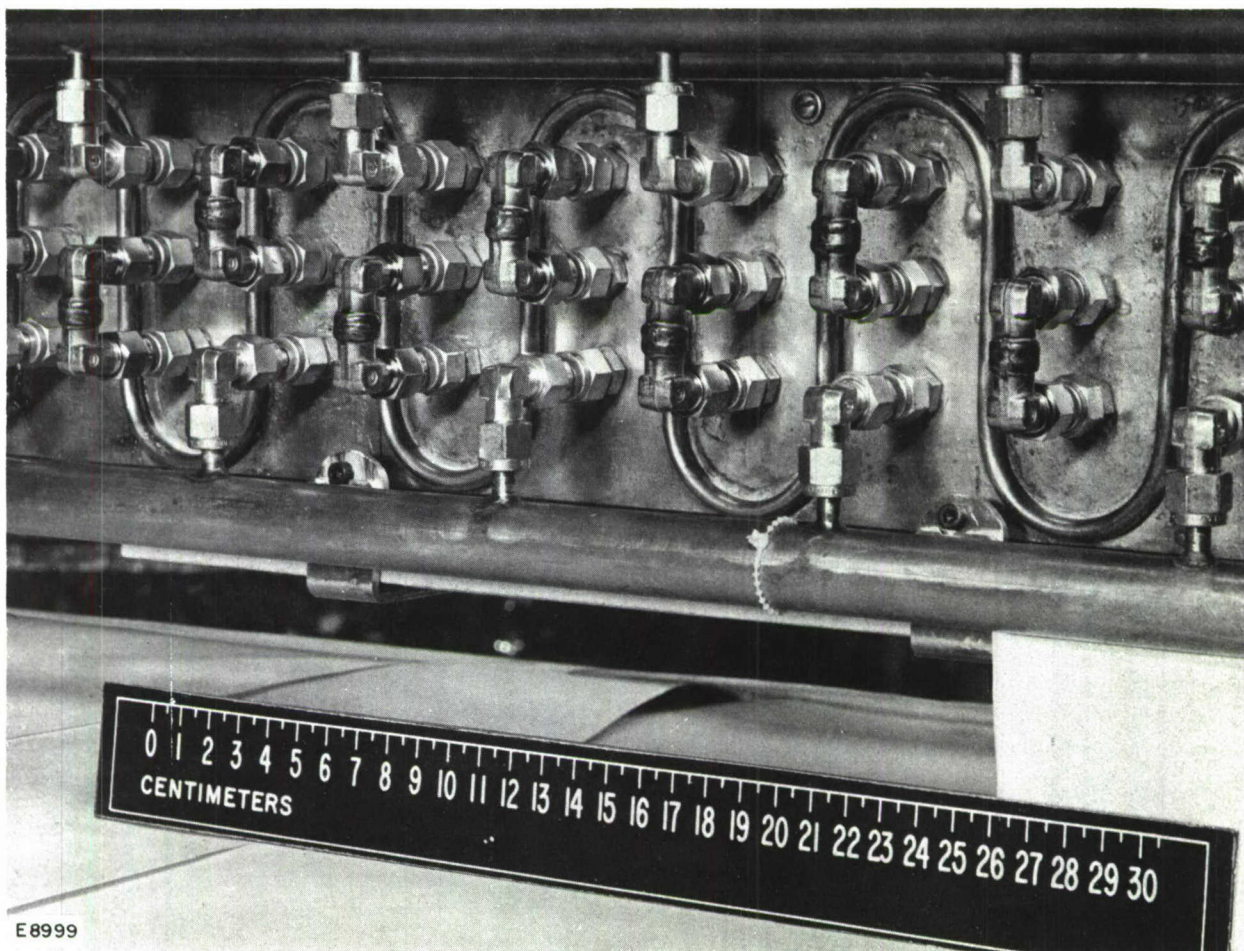


Fig. 5 Detail of the Side of the Heat Exchanger showing the Counterflowing LN_2 Supply Manifolds and the Swagelok Couplings between the Copper Cooling Pipes Embedded in the Porous Plates

temperature by the desired 200°C . The cooling procedure was performed by circulating liquid nitrogen and typically required two hours. The overall thermal cycling time was important since initially minor modifications required frequent disassemblies, therefore to reduce the time required to regain room temperature two electric heaters were mounted immediately below the heat exchanger and their temperatures monitored with thermocouples.

Consideration was given to ensuring an uninterrupted flow surface between the heat exchanger surface and the flow walls while at the same time preserving good thermal isolation between their components. Thin phenolic strips mounted flush with the surface of the flow walls and projecting $\sim 1/2$ -inch below them extended to within 0.020-inch of the surface of the heat exchanger and provided good flow continuity. One phenolic strip is visible in Fig. 2 across the far end of the cavity immediately above the surface of the sintered bronze plate.

III. MEDIUM QUALITY MEASUREMENTS

Interferometric investigations of the medium homogeneity were performed using a conventional Mach-Zehnder optical interferometer arrangement together with a Xenon laser light source.

The system was initially connected to a 500 cfm stokes pump and cold mass flow measurements performed in order to deduce the flow velocity through the cavity. At a cavity pressure of $1/6$ atmosphere (corresponding to $1/2$ amagat at 77°K) the measurements indicated a cavity flow velocity of 60 cm/sec, close to the expected value. However the interferometric measurements performed with cold flow revealed extremely poor medium quality. One contributory source of interference was found to be the 500 cfm Stokes pump which introduced pulsations into the gas flow even though care had been taken to isolate the cavity from the pump using multiple nylon screens. Thus further testing was performed by initially evacuating the cavity then isolating the Stokes pump and using the 150 cu ft capacity of the pumping line as a dump tank while preparations were made to install and connect the system to a 300 cu ft dump tank facility and to fabricate the necessary choking orifice. Subsequent measurements were performed as the system filled and interferograms taken at the instant that the cavity pressure reached $1/6$ atms. Inspection of the interferograms revealed considerable turbulence in the gas flow and since the only portion of the flow region available for interferometric testing was the region defined by the cavity windows, some 25 cm downstream of the surface of the heat exchanger, it was not possible using this diagnostic to determine whether the turbulence developed during the flow, due presumably to turbulent mixing of the boundary layers or whether the turbulence was initially present in the flow emanating from the porous heat exchanger plates. To resolve this question a moveable hot wire anemometer probe was installed one cm above the surface of the heat exchanger and semi-quantitative measurements performed under ambient temperature flow conditions to determine the velocity fluctuations and distribution across the cavity. These measurements revealed the presence of considerable velocity fluctuations in the flow and also indicated that the flow velocity close to the flow walls was approximately 10% higher than in the bulk of the flow. The former effect has been previously reported by several authors and thought to be due to the appearance of instabilities resulting from coalescence of neighbouring jets emanating from the porous plate.⁽³⁾ The latter effect was ascribed to the method by which the porous plates were held and supported which produced dead spaces in the sintered bronze plates immediately beneath the flow walls and thus introduced perturbations in the flow close to the wall. A remedy for both effects was sought by introduction of a stainless steel fine mesh screen close to the surface of the heat exchanger.

The subject of the reduction of turbulent fluctuations by screens has been the subject of many investigations. Screens of open-area ration, β ,

less than about 0.57 have been shown to suffer from flow instabilities through the pores which cause the emerging jets to coalesce in random patterns. (4) The reduction in turbulence intensity is given by $(1 - k)^{-n/2}$ where n is the number of screens and k the resistance coefficient of the screen defined by

$$k = \frac{\Delta p}{1/2 \rho u^2}$$

where Δp = static pressure drop across the screen

ρ = density of fluid

u = fluid velocity

Thus screens possessing high opacity (small β) are more effective in damping turbulence intensity however. However too large an opacity ($\beta < 0.57$) can lead to generation of instabilities due to the effect of coalescing jets, thus a compromise between the two effects must be sought. 220 mesh stainless steel mesh constructed of 0.001 inch diameter wire was chosen possessing a transparency of 50%.

Using the Wieghardt correlation⁽⁵⁾ for the screen resistance coefficient

$$k > 6 (1 - \beta) \beta^{-5/3} \left(\frac{ud}{\nu} \right)^{-1/3}$$

where d = the wire diameter

ν = kinematic viscosity of fluid

the screen resistance coefficient appropriate to the following parameters,

$$d = 2.5 \times 10^{-3} \text{ cm}$$

$$u = 10^2 \text{ cm/sec}$$

$$\nu = 0.4 \text{ cm}^2 / \text{sec (1/2 amagat)}$$

$$\beta = 0.5$$

was calculated to be,

$$k = 11.3$$

which for a single screen would produce a reduction in turbulence intensity by approximately a factor of 3.5.

A single screen was installed 1/2 inch above the heat exchanger. Calculations indicated that the screen would accommodate to the gas temperature within 0.5 secs and should therefore not affect either the absolute temperature or uniformity of the medium.

Hot wire anemometry and interferometric measurements were repeated following installation of the 220 mesh stainless steel screen. The hot wire measurements indicated a reduction in the warm flow turbulence intensity to below the level of the instrumental sensitivity. The increased flow velocity in the vicinity of the sidewalls was also eliminated. However the cold flow interferograms while indicating an improvement in the medium quality were still not compatible with near-diffraction limited performance. The thickness of the boundary layers established on the sidewalls was more consistent with a turbulent rather than laminar development. These layers completely merged together in the upper half of the cavity. Improved performance was therefore sought by conducting tests at increased mass flow rates. Increasing the flow velocity to 100 cm/sec showed clearly discernible improvements in medium quality. Eventually the flow velocity was increased to approximately 400 cm/sec. Since the heat exchanger had not originally been fabricated to conform to pressure loadings appropriate to these flow velocities, further increases in flow velocity would have jeopardized the integrity of the aluminum box which supported the sinter bronze plates.

Temperature measurements performed using the hot wire anemometer confirmed that the medium temperature was indeed within the sensitivity of the measurement, 77°K. Therefore under the prescribed experimental conditions interferometric measurements of the medium uniformity were performed. The following procedure was adopted. After cooling the heat exchanger to 77°K, a settling time of five minutes was allowed for equilibration and then flow tests commenced. Typical interferograms are shown in Figs. 6 and 7, the vacuum reference interferogram is shown in Fig. 8.

The interferogram shown in Fig. 6 was taken at -175°C and that shown in Fig. 7 some five minutes later at a temperature of -170°C. In both cases the vertical temperature gradient along the center line of the cavity is approximately 0.4°K, (equivalent to four fringes). In each case the sidewalls of the cavity are apparently displaced outwards. This effect arises due to the strong refractive effect of the boundary layers combined with the location of the film plane with respect to the focussing mirror. These combine to exaggerate the apparent thickness of the boundary layers. The actual location of the sidewalls and hence an estimate of the thickness of the boundary layers is best obtained by comparing the flow interferograms with the vacuum pattern, Fig. 8.

During these flow tests liquid nitrogen was continuously circulated in the heat exchanger. This technique provided improved medium uniformity but introduced the transverse temperature gradient indicated by the inclined fringes and which is ascribed to the asymmetry of the cooling coil arrangement. Over the active volume of the discharge defined by the position of the

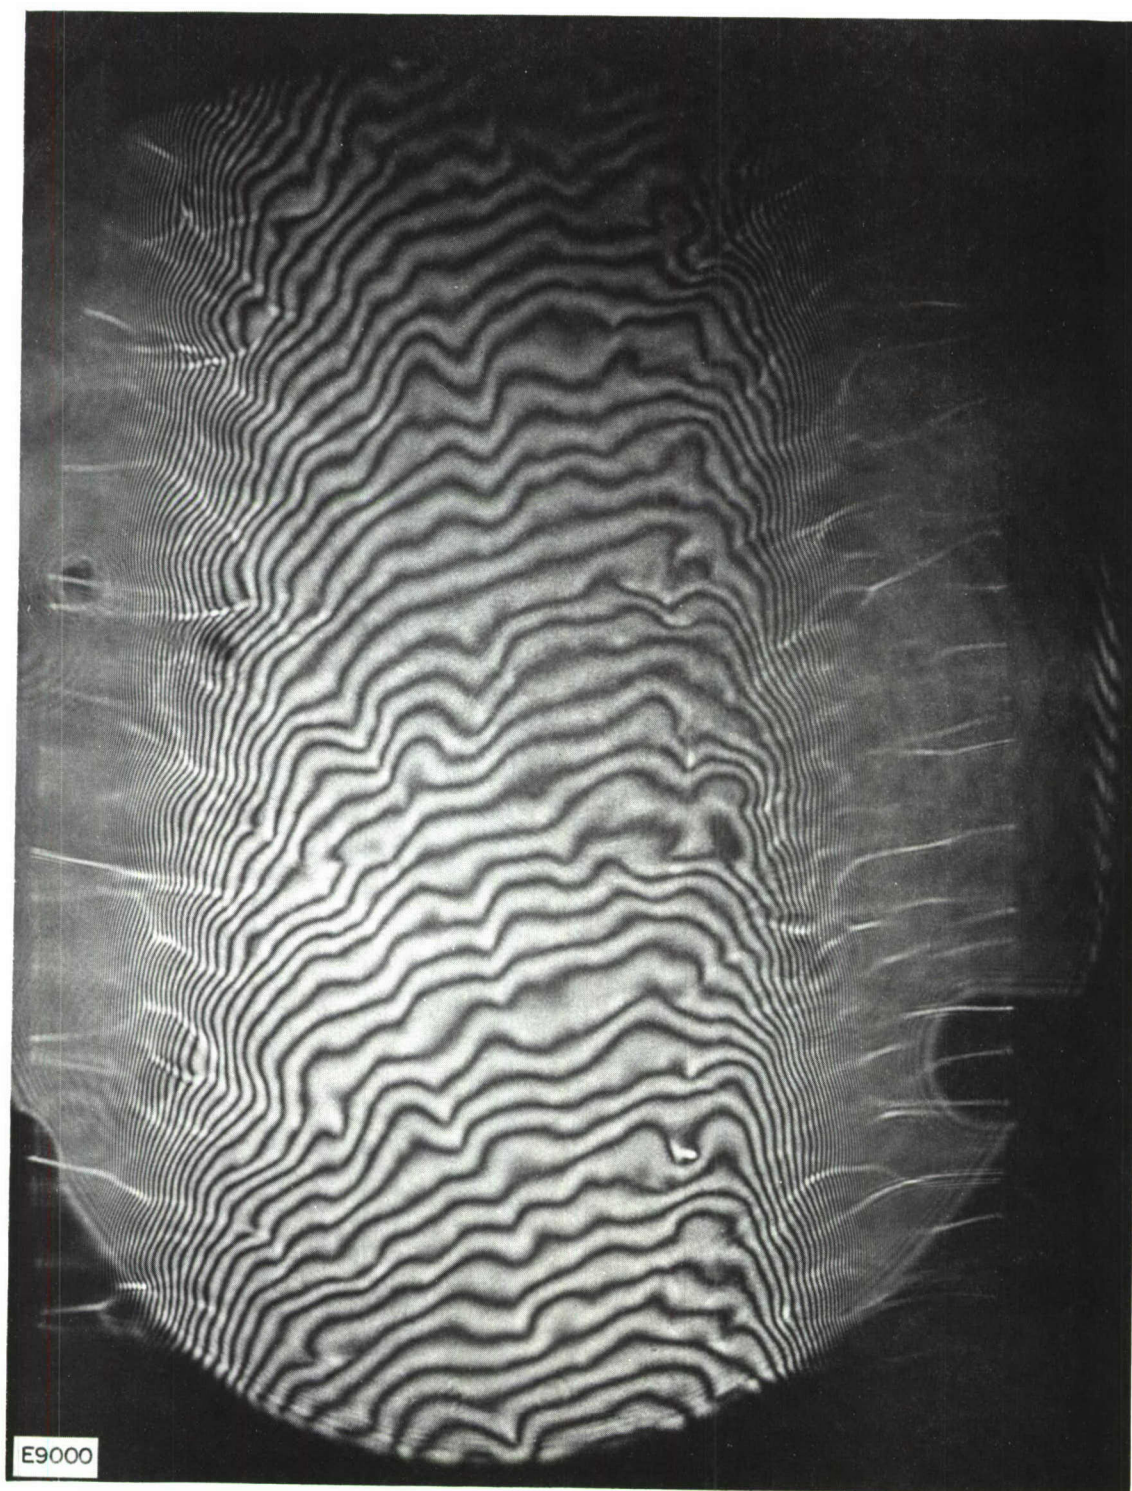


Fig. 6 Interferogram of the Medium Homogeneity looking along the Lasing Axis, taken at -175°C , a Flow Velocity of 400 cm/sec and a Pressure of $1/6\text{ atm}$

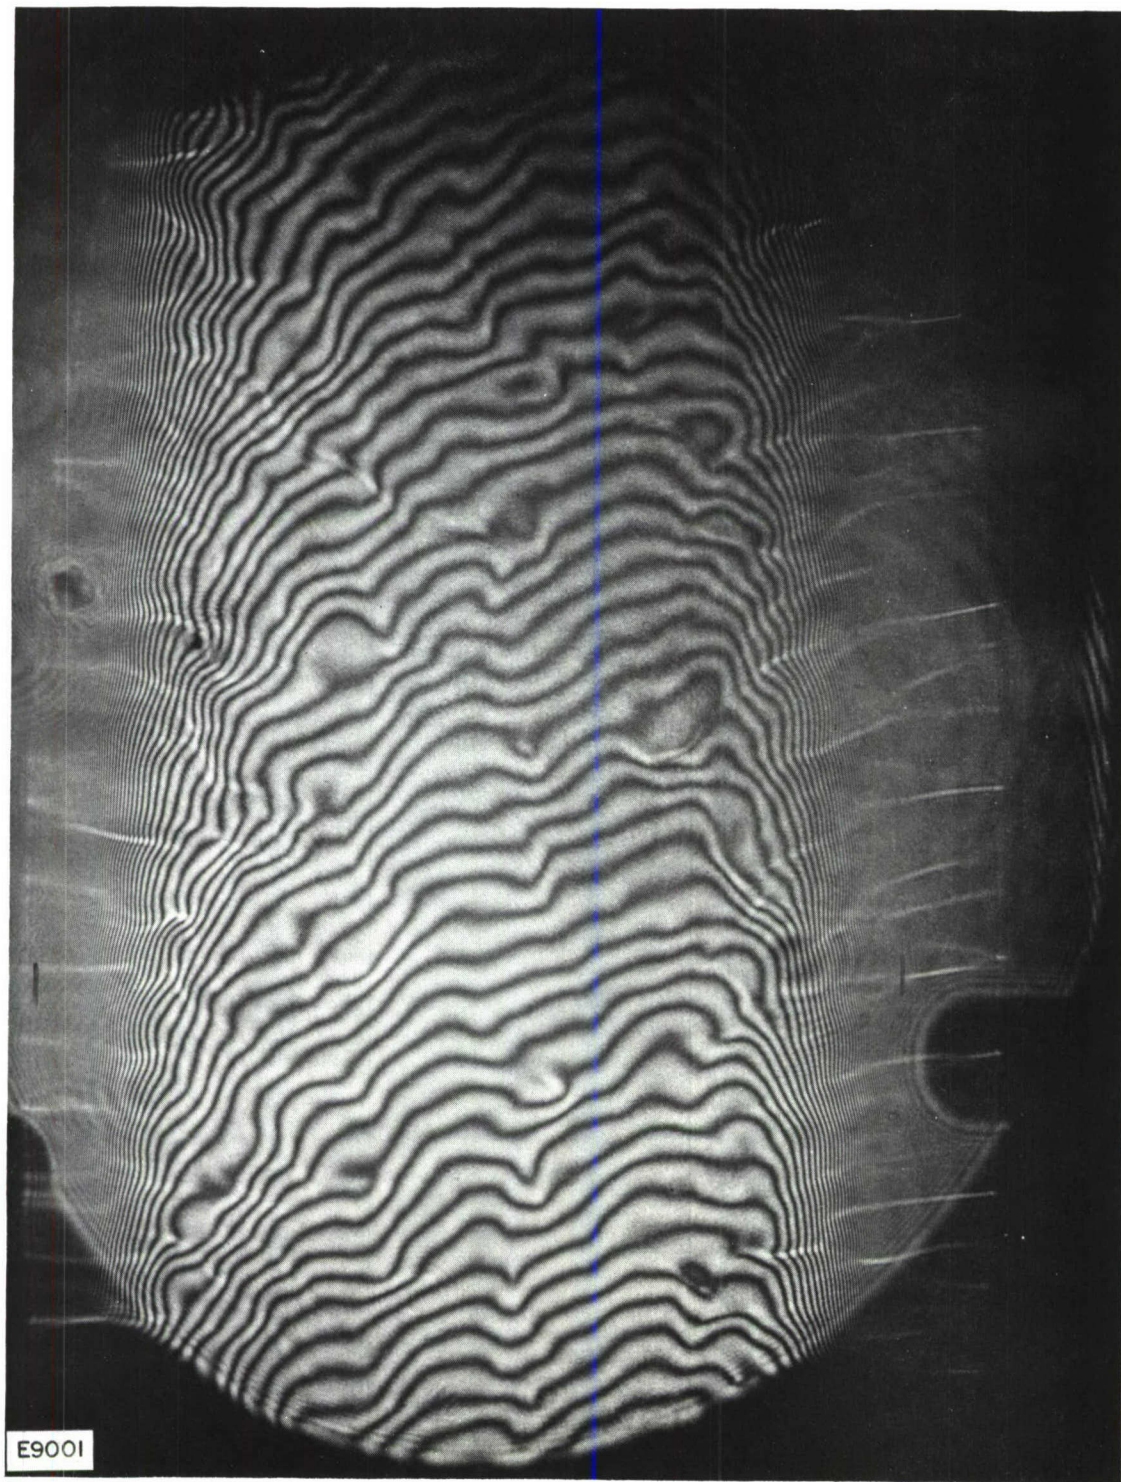


Fig. 7 Interferogram taken under Conditions Similar to Fig. 6 but at a Temperature of -170°C . The vertical temperature gradient along the center line of the cavity is approximately 0.4° . The inclined fringes represent a linear transverse gradient of approximately 1.5°C across the active volume of the discharge.

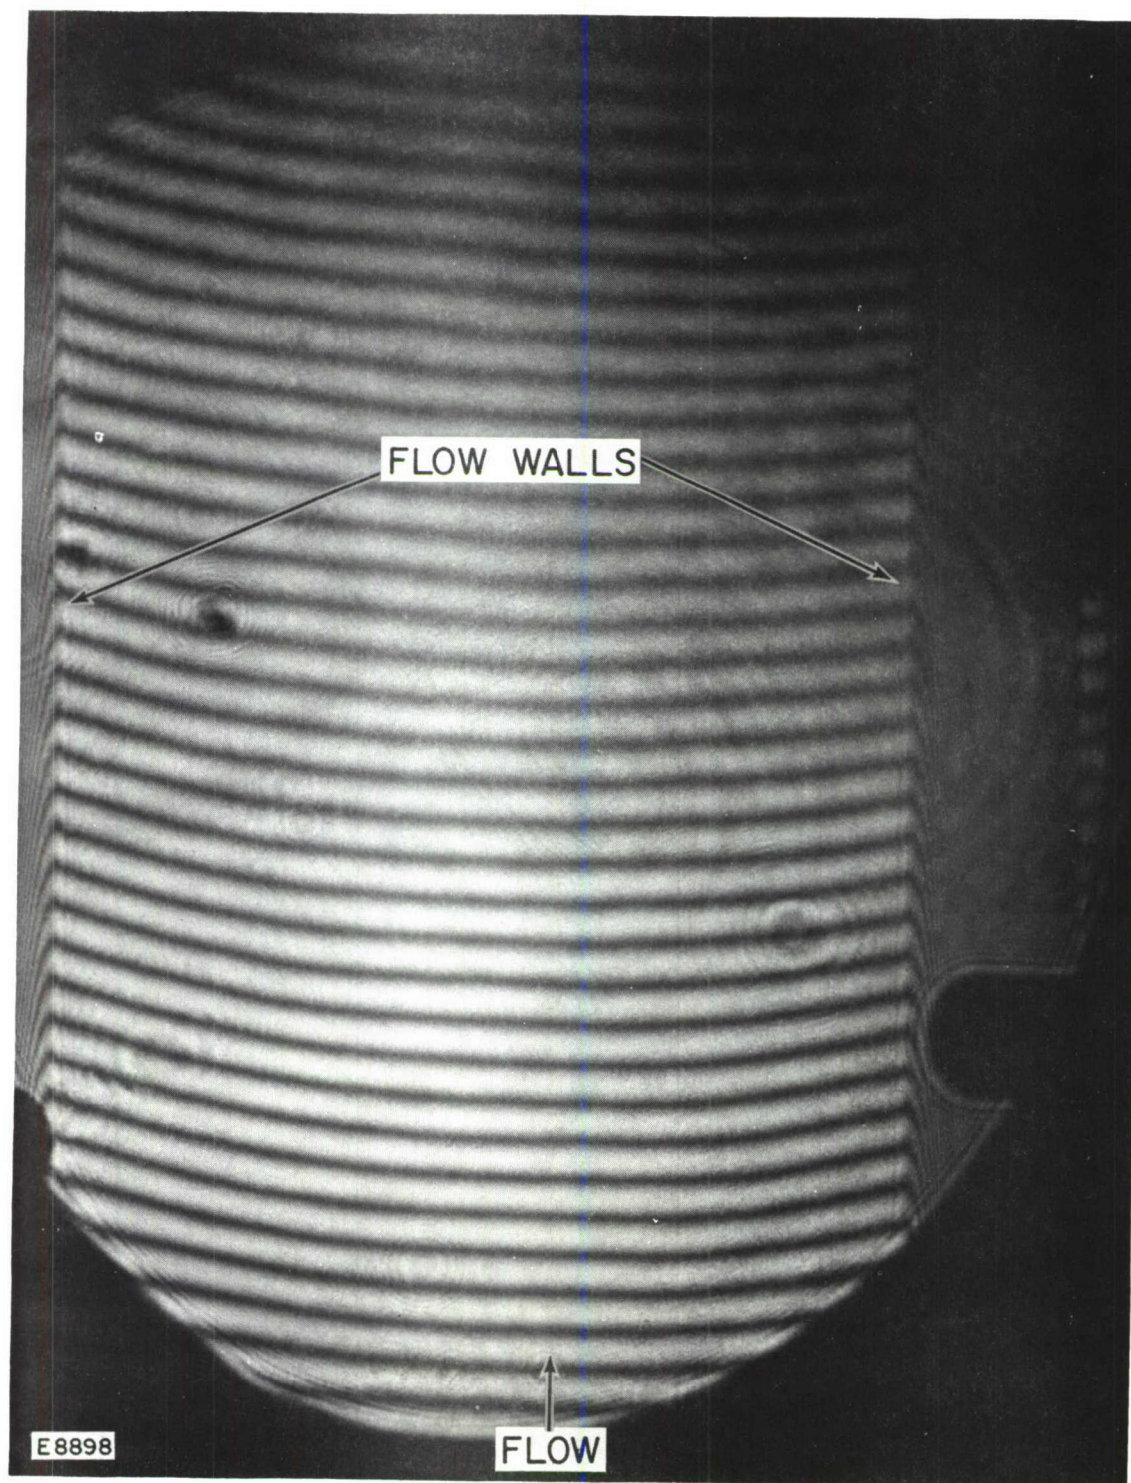


Fig. 8 Vacuum Reference Interferogram for Figs. 6 and 7, the Location of the Side Walls and Direction of Flow are Indicated

electrodes this gradient amounts to 1.5° and can be compensated for by suitably tilting the cavity optics. Under this configuration the medium quality would conform to near-diffraction limited operation of the laser.

Since this phase of the project has been satisfactorily completed, the next step will be to install the flow walls and electrodes, to interface the cavity with the E-beam and then to repeat the flow tests. The electrodes have been constructed to permit cooling by circulating liquid nitrogen should this be found necessary in order to preserve the medium uniformity. Arcing considerations due to the increased E/p in the vicinity of the electrodes due to the warm thermal boundary layers may also dictate the cooling requirements to be employed for the electrodes. Following interferometric measurements in the passive cavity measurements will also be performed on the active medium and finally gain and power measurements performed.

REFERENCES

1. Avco Everett Research Laboratory, Inc. Report, "Carbon Monoside Laser Semi-Annual Technical Report," November 1973.
2. Avco Everett Research Laboratory, Inc. Report, "Carbon Monoside Laser Annual Report," January 1975.
3. Pimenta, M. and Moffat, R.J., AIAA Journal 12, 1438 (1974).
4. Bradshaw, P. and Pankhurst, R.C., "The Design of Low Speed Wind Tunnels," Progress in Aeronautical Sciences, Ed D. Kuchemann, Vol. 5, pp. 1-69.
5. Wieghardt, K.E.G., "On the Resistance of Screens," The Aeronautical Quarterly, Vol. IV, p. 186, February 1953.

DISTRIBUTION LIST FOR CONTRACT NO: N00014-72-C-0030

Office of Naval Research, Department of the Navy, 800 North Quincy Street, Arlington, VA 22217, Attn: Physics Program (421) (3 copies)

Naval Research Laboratory, Department of the Navy, Washington, D.C. 20375, Attn: Technical Library, (1 copy)

Office of the Director of Defense, Research and Engineering, Information Office Library Branch, The Pentagon, Washington, D.C. 20301 (1 copy)

U.S. Army Research Office, Box CM Duke Station, Durham, NC 27706 (1 copy)

Defense Documentation Center, Cameron Station, Alexandria, VA 22314 (12 copies)

Defender Information Analysis Center, Battelle Memorial Institute, 505 King Avenue, Columbus, OH 43201 (1 copy)

Director, Office of Naval Research Branch Office, 536 South Clark Street, Chicago, IL 60615 (1 copy)

San Francisco Area Office, Office of Naval Research, 760 Market Street, Room 447, San Francisco, CA 94102 (1 copy)

Air Force Office of Scientific Research, Department of the Air Force, Washington, D.C. 22209 (1 copy)

Office of Naval Research Branch Office, 1030 East Green Street, Pasadena, CA 91106 (1 copy)

Code 102 1P (ONRL), Office of Naval Research, 800 North Quincy Street, Arlington, VA 22217 (6 copies)

Defense Advanced Research Projects Agency, 1400 Wilson Blvd., Arlington VA 22209, Attn: Director, Laser Division (1 copy)

ODDR&E, Pentagon, Washington, D.C. 20301, Attn: Assistant Director (Space and Advanced Systems) (1 copy)

Office of the Assistant Secretary of Defense, System Analysis (Strategic Programs) Washington, D.C. 20301, Attn: Mr. Gerald R. McNichols (1 copy)

U.S. Arms Control and Disarmament Agency, Department of State Building, Room 4931, Washington, D.C. 20451, Attn: Dr. Charles Henkin (1 copy)

Energy Research Development Agency, Division of Military Applications, Washington, D.C. 20545 (1 copy)

National Aeronautics and Space Administration, Lewis Research Center, Cleveland, OH 44135, Attn: Dr. John W. Dunning, Jr. (1 copy)
(Aerospace Res. Engineer)

National Aeronautics & Space Administration, Code RR, FOB 10B, 600 Independence Avenue, SW, Washington, D.C. 20546 (1 copy)

National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA 94035, Attn: Mr. Robert L. McKenzie (1 copy)
Dr. Kenneth W. Billman (1 copy)

Department of the Army, Office of the Chief of RD&A, Washington, D.C. 20310, Attn: DARD-DD (1 copy)
DAMA-WSM-T (1 copy)

Department of the Army, Office of the Deputy Chief of Staff for Operations & Plans, Washington, D.C. 20310, Attn: DAMO-RQD (2 copies)

Ballistic Missile Defense Program Office (BMDPO), The Commonwealth Bldg., 1300 Wilson Blvd., Arlington, VA 22209, Attn: Mr. Albert J. Bast, Jr.
(3 copies)

U.S. Army Missile Command, Research and Development Division, Redstone Arsenal, ALA 35809, Attn: Army High Laser Energy Programs (2 copies)

Commander, Rock Island Arsenal, Rock Island, IL 61201, Attn: SARRI-LR, Mr. J. W. McGarvey (1 copy)

Commanding Officer, U.S. Army Mobility Equipment R&D Center, Ft. Belvoir, VA 22060, Attn: SMEFB-MW (1 copy)

Commander, U.S. Army Armament Command, Rock Island, IL 61201, Attn: AMSAR-RDT (1 copy)

Director, Ballistic Missile Defense Advanced Technology Center, P.O. Box 1500, Huntsville, AL 35807, Attn: ATC-O (1 copy)
ACT-T (1 copy)

Commander, U.S. Army Material Command, Alexandria, VA 22304, Attn: Mr. Paul Chernoff (AMCRD-T) (1 copy)
Dr. B. Zarwyn (AMCRD-T) (1 copy)

Commanding General, U.S. Army Munitions Command, Dover, NH 07801, Attn: Mr. Gilbert F. Chesnov (AMSMU-R) (1 copy)

Director, U.S. Army Ballistic Res. Lab., Aberdeen Proving Ground, MD 21005, Attn: Dr. Robert Eichelberger (1 copy)
Mr. Frank Allen (1 copy)
Dr. E. C. Alcaez (1 copy)

Commandant, U.S. Army, Air Defense School, Ft. Bliss, TX 79916, Attn: Air Defense Agency (1 copy)
ATSA-CTD-MS (1 copy)

Commanding General, U.S. Army Combat Dev. Command, Ft. Belvoir, VA 22060, Attn: Director of Material, Missile Div. (1 copy)

Commander, U.S. Army Training & Doctrine Command, Ft. Monroe, VA 23651, Attn: ATCD-CF (1 copy)

Commander, U.S. Army Frankford Arsenal, Philadelphia, PA 19137, Attn: Mr. M. Elnick SARFA-FCD, Bldg. 201-3 (1 copy)

Commander, U.S. Army Electronics Command, Ft. Monmouth, NJ 07703, Attn: AMSEL-CT-L, Dr. R. G. Buser (1 copy)

Commander, U.S. Army Combined Arms Combat Developments Activity, Ft. Leavenworth, KS 66027 (1 copy)

National Security Agency, Ft. Geo. G. Meade, MD 20755, Attn: R.C. Foss A763 (1 copy)

Deputy Commandant for Combat & Training Developments, U.S. Army Ordnance Center and School, Aberdeen Proving Ground, MD 21005
Attn: ATSL-CTD-MS-R (1 copy)

Commanding Officer, USACDC CBR Agency, Ft. McClellan, AL 36201, Attn: CDCCBR-MR (Mr. F. D. Poer) (1 copy)

DISTRIBUTION LIST FOR CONTRACT NO: N00014-72-C-0030 (Continued)

Department of the Navy, Office of the Chief of Naval Operations, Pentagon 5C739, Washington, D.C. 20350, Attn: (OP982F3) (1 copy)

Office of Naval Research, 495 Summer Street, Boston, MA 02210, Attn: Dr. Fred Quelle (1 copy)

Department of the Navy, Deputy Chief of Naval Material (Dev.) Washington, D.C. 20360, Attn: Mr. R. Gaylord (MAT 032B) (1 copy)

Naval Missile Center, Point Mugu, CA 93042, Attn: Gary Gibbs (Code 5352) (1 copy)

Naval Research Lab., Washington, D.C. 20375, Attn: (Code 5503-LTPO) (1 copy)
 Dr. P. Livingston (Code 55060) (1 copy)
 Dr. A.I. Schindler (Code 6330) (1 copy)
 Dr. H. Shenker (Code 6530) (1 copy)
 Mr. D.J. McLaughlin (Code 5560) (1 copy)
 Dr. John L. Walsh (Code 5503) (1 copy)

High Energy Laser Project Office, Department of the Navy, Naval Sea Systems Command, Washington, D.C. 20360, Attn: Capt. J.G. Wilson, USN (PMS-405) (1 copy)

Superintendent, Naval Postgraduate School, Monterey, CA 93940, Attn: Library (Code 2124) (1 copy)

Navy Radiation Technology Liaison Office, Air Force Weapons Lab. (NLO), Kirtland AFB, NM 87117, (1 copy)

Naval Surface Weapons Center, White Oak, Silver Spring, MD 20910, Attn: Dr. Leon H. Schindel (Code 310) (1 copy)
 Dr. E. Leroy Harris (Code 313) (1 copy)
 Mr. K. Enkenhus (Code 034) (1 copy)
 Mr. J. Wise (Code 047) (1 copy)
 Technical Library (1 copy)

U.S. Naval Weapons Center, China Lake, CA 93555, Attn: (Code 5114) (1 copy)
 Technical Library (1 copy)

HQ USAF (AF/RDPS), Pentagon, Washington, D.C. 20330, Attn: Lt. Col. A.J. Chiota (1 copy)

HQ AFSC/XRLW, Andrews AFB, Washington, D.C. 20331, Attn: Maj. J.M. Walton, (1 copy)

HQ AFSC (DLCAW), Andrews AFB, Washington, D.C. 20331, Attn: Maj. H. Axelrod (1 copy)

Air Force Weapons Lab., Kirtland AFB, NM 87117, Attn: LR (4 copies)
 AL (2 copies)

HQ SAMSO (XRTD), P.O. Box 92960, Worldway Postal Center, Los Angeles, CA 90009, Attn: Lt. Dorian DeMaio (XRTD) (1 copy)

AF Avionics Lab (TEO), Wright Patterson AFB, OH 45433, Attn: Mr. K. Hutchinson (1 copy)

Dept. of the Air Force, Air Force Materials Lab. (AFSC), Wright Patterson AFB, OH 45433, Attn: Maj. Paul Elder (LPS) (1 copy)
 Laser Window Group

HQ Aeronautical Systems Div., Wright Patterson AFB, OH 45433, Attn: XRF - Mr. Clifford Fawcett (1 copy)

Rome Air Development Command, Griffiss AFB, Rome NY 13440, Attn: Mr. R. Urtz (OCSE) (1 copy)

HQ Electronics Systems Div. (ESL), L.G. Hanscom Field, Bedford, MA 01730, Attn: Mr. Alfred E. Anderson (XRT) (1 copy)
 Capt. James C. Jalbert (XRJ) (1 copy)
 Technical Library (1 copy)

Air Force Rocket Propulsion Lab., Edwards AFB, CA 93523, Attn: B.R. Bornhorst, (LKCG) (1 copy)

Air Force Aero Propulsion Lab., Wright Patterson AFB, OH 45433, Attn: Col. Walter Moe (CC) (1 copy)

Dept. of the Air Force, Foreign Technology Division, Wright Patterson AFB, OH 45433, Attn: PDTN (1 copy)

CINCSAC/INEP, Offutt AFB, NE 68113 (1 copy)

Commandant of the Marine Corps, Scientific Advisor (Code RD-1), Washington, D.C. 20380, (1 copy)

USAF/INAKA, Washington, D.C. 20330, Attn: Lt. Col. W.M. Truesdell, (1 copy)

Aerospace Research Labs., (AP), Wright Patterson AFB, OH 45433, Attn: Lt. Col. Max Duggins (1 copy)

Defense Intelligence Agency, Washington, D.C. 20301, Attn: Mr. Seymour Berler (DTIB) (1 copy)

Central Intelligence Agency, Washington, D.C. 20505, Attn: Mr. Julian C. Nall, (1 copy)

Analytic Services, Inc., 5613 Leesburg Pike, Falls Church, VA 22041, Attn: Dr. John Davis (1 copy)

Aerospace Corp., P.O. Box 92957, Los Angeles, CA 90009, Attn: Dr. G.P. Millburn (1 copy)

Airesearch Manuf. Co., 9851 - 9951 Sepulveda Blvd., Los Angeles, CA 90009, Attn: Mr. A. Colin Stancliffe (1 copy)

Atlantic Res. Corp., Shirley Highway at Edsall Road, Alexandria, VA 22314, Attn: Mr. Robert Naismith (1 copy)

AVCO Everett Research Lab., 2385 Revere Beach Parkway, Everett, MA 02149, Attn: Dr. George Sutton (1 copy)
 Dr. Jack Daugherty (1 copy)

Battelle Columbus Laboratories, 505 King Avenue, Columbus, OH 43201, Attn: Mr. Fred Tietzel (STOIA) (1 copy)

Bell Aerospace Co., Buffalo, NY 14240, Attn: Dr. Wayne C. Solomon, (1 copy)

Boeing Co., P.O. Box 3999, Seattle, WA 98124, Attn: Mr. M.I. Gamble (2-1460, MS 8C-88) (2 copies)

Electro-Optical Systems, 300 N. Halstead, Pasadena, CA 91107, Attn: Dr. Andrew Jensen (1 copy)

ESL Inc., 495 Java Drive, Sunnyvale, CA 94086, Attn: Arthur Einhorn (1 copy)

DISTRIBUTION LIST FOR CONTRACT NO: N00014-72-C-0030 (Continued)

General Electric Co., Space Division, P.O. Box 8555, Philadelphia, PA 19101, Attn: Dr. R.R. Sigismonti (1 copy)
Dr. C.E. Anderson (1 copy)

General Electric Co., 100 Plastics Avenue, Pittsfield, MA 01201, Attn: Mr. D.G. Harrington (Room 1044) (1 copy)

General Research Corp., P.O. Box 3587, Santa Barbara, CA 93105, Attn: Dr. R. Holbrook (1 copy)

General Research Corp., 1501 Wilson Blvd., Suite 700, Arlington, VA 22209, Attn: Dr. Giles F. Crimi (1 copy)

Hercules, Inc., Industrial System Dept., Wilmington, DE 19899, Attn: Dr. R.S. Voris (1 copy)

Hercules, Inc., P.O. Box 210, Cumberland, MD 21502, Attn: Dr. Ralph R. Preckel (1 copy)

Hughes Research Labs., 3011 Malibu Canyon Road, Malibu, CA 09265, Attn: Dr. D. Forster (1 copy)
Dr. A.N. Chester (1 copy)
Dr. Viktor Evtuhov (1 copy)

Hughes Aircraft Co., Aerospace Group - Systems Division, Canoga Park, CA 91304, Attn: Dr. Jack A. Alcalay (1 copy)

Hughes Aircraft Co., Centinela and Teale Streets, Bldg. 6, MS e-125, Culver City, CA 90230, Attn: Dr. William Yates (1 copy)

Institute for Defense Analysis, 400 Army Navy Drive, Arlington, VA 22202, Attn: Dr. Alvin Schnitzler (1 copy)

John Hopkins University, Applied Physics Lab., 8621 Ga. Avenue, Silver Spring, MD 20910, Attn: Dr. Albert M. Stone (1 copy)
Dr. R.E. Gorozdos (1 copy)

Lawrence Livermore Lab., P.O. Box 808, Livermore, CA 94550, Attn: Dr. R.E. Kidder (1 copy)
Dr. E. Teller (1 copy)
Dr. Joe Fleck (1 copy)

Los Alamos Scientific Lab., P.O. Box 1663, Los Alamos, NM 87544, Attn: Dr. Keith Boyer (1 copy)

Lulegian and Associates, Inc., Del Amo Financial Center, Suite 500, 21515 Hawthorne Blvd., Torrance, CA 09503 (1 copy)

Lockheed Palo Alto Res. Lab., 3251 Hanover Street, Palo Alto, CA 94303, Attn: L.R. Lunsford, Orgn. 52-24 Bldg. 201 (1 copy)

Mathematical Sciences Northwest, Inc., P.O. Box 1887, Bellevue, WN 98009, Attn: Mr. Peter H. Rose (1 copy)
Dr. Abraham Hertzberg (1 copy)

Martin Marietta Corp., P.O. Box 179, Mail Station 0471, Denver, CO 80201, Attn: Mr. Stewart Chapin (1 copy)
Mr. Scott Giles (1 copy)

Massachusetts Institute of Technology LINCOLN LAB., P.O. Box 73, Lexington, MA 02173 Attn: Dr. S. Edelberg (1 copy)
Dr. L.C. Marquet (1 copy)
Dr. J. Freedman (1 copy)
Dr. G.P. Dinneen (1 copy)
Dr. R.H. Rediker (1 copy)

McDonnell Douglas Astronautics Co., 5301 Bolsa Avenue, Huntington Beach, CA 92647, Attn: Mr. P.L. Klevatt (1 copy)
Dept. A3-830-BBFO, M/S 9 (1 copy)

McDonnell Douglas Res. Labs., Dept. 220, Box 516, St. Louis, MO 56166, Attn: Dr. D.P. Ames (1 copy)

MITRE Corp., P.O. Box 208, Bedford, MA 01730, Attn: Mr. A.C. Cron (1 copy)

North American Rockwell Corp., Autonetics Div., 3370 Miraloma Avenue, Anaheim, CA 92803, Attn: Mr. T.T. Kumagi (1 copy)
C/476 Mail Code HA18

Northrop Corp., 3401 West Broadway, Hawthorne, CA 90250, Attn: Dr. Gerard Hasserjian, Laser Systems Dept. (1 copy)

Dr. Anthony N. Pirri, Physical Sciences Inc., 18 Lakeside Office Park, Wakefield, MA 01880 (1 copy)

RAND Corp., 1700 Main Street, Santa Monica, CA 90406, Attn: Dr. Claude R. Culp/Mr. G.A. Carter (1 copy)

Raytheon Co., 28 Seyon Street, Waltham, MA 02154, Attn: Dr. Frank A. Horrigan (Res. Div.) (1 copy)

Raytheon Co. (Equipment Division), Boston Post Road, Sudbury, MA 01776, Attn: Dr. Charles Sonnenschien (1 copy)

Raytheon Co., Bedford Labs., Missile Systems Div., Bedford, MA 01730, Attn: Dr. H.A. Mehlhorn (1 copy)

Riverside Research Institute, 80 West End Street, New York, NY 10023, Attn: Dr. L.H. O'Neill (1 copy)
Dr. John Bose (1 copy)
Miss Helen Cressman (HPEGL Library) (1 copy)

R&D Associates, Inc., P.O. Box 3580, Santa Monica, CA 90431, Attn: Dr. R.E. LeLevier (1 copy)
Dr. R. Hundley (1 copy)

Rockwell International Corp., 3370 Miraloma Corp., Anaheim, CA 92803, Attn: R.E. Hovda (DB 29) (1 copy)
Dr. J. Winocur (D/528, HA14) (1 copy)

Rockwell International Corp., Rocketdyne Div., Albuquerque District Office, 3636 Menaul Blvd, NE, Suite 211, Albuquerque, NM 87110
Attn: C.K. Kraus, Mgr. (1 copy)

SANDIA Corp., P.O. Box 5800, Albuquerque, NM 87115, Attn: Dr. Al Narath (1 copy)

Stanford Research Institute, Menlo Park, CA 94025, Attn: Dr. H.E. Lindberg (1 copy)
Dr. J.E. Malick (1 copy)

Science Applications Inc., 1911 N. Ft. Meyer Drive, Arlington, VA 22209, Attn: L. Peckham (1 copy)

Science Applications Inc., P.O. Box 328, Ann Arbor, MI 48103, Attn: R.E. Meredith (1 copy)

Science Applications Inc., 6 Preston Court, Bedford, MA 01730, Attn: R. Greenberg (1 copy)

Science Applications Inc., P.O. Box 2351, La Jolla, CA 92037, Attn: Dr. John Asmus (1 copy)

Systems, Science and Software, P.O. Box 1620, La Jolla, CA 92037, Attn: Alan F. Klein (1 copy)

Systems Consultants, Inc., 1050 31st Street NW, Washington, D.C. 20007, Attn: Dr. R.B. Keller (1 copy)

Thiokol Chemical Corp., WASATCH Div., P.O. Box 524, Brigham City, UT 84302, Attn: Mr. J.E. Hansen (1 copy)

TRW Systems Group, One Space Park, Bldg. R-1 RM 1050, Redondo Beach, CA 90278, Attn: Mr. Norman Campbell (1 copy)

DISTRIBUTION LIST FOR CONTRACT NO: N00014-72-C-0030 (Continued)

United Aircraft Res. Labs., 400 Main Street, East Hartford, CT 06108, Attn: Mr. G.H. McLafferty (3 copies)
Mr. Albert Angelbeck (1 copy)

United Aircraft Corp., Pratt and Whitney Acft. Div., Florida R&D Center, West Palm Beach, FL 33402, Attn: Dr. R.A. Schmidtke (1 copy)
Mr. Ed Pinsley (2 copies)

VARIAN Associates, EIMAC Div., 301 Industrial Way, San Carlos, CA 94070, Attn: Mr. Jack Quinn (1 copy)

Vought Systems Div., LTV Aerospace Corp., P.O. Box 5907, Dallas, Tx 75222, Attn: Mr. F.G. Simpson, Mail Station 254142 (1 copy)

Westinghouse Electric Corp., Defense and Space Center Friendship International Airport - Box 746, Baltimore, MD 21203
Attn: Mr. W.F. List (3 copies)

Westinghouse Res. Labs., Beulah Road, Churchill Boro, Pittsburgh, PA 15235, Attn: Dr. E. P. Riedel (1 copy)
Mr. R.L. Hundstad (1 copy)

United Aircraft Company Research Laboratories, East Hartford, Ct 06108, Attn: A.J. DeMaria (1 copy)

Airborne Instruments Laboratory, Walt Whitorian Road, Melville, NY 11746, Attn: F. Pace (1 copy)

Stanford Research Institute, Menlo Park, CA 94025, Attn: Dr. F.T. Smith (1 copy)

General Electric R&D Center, Schenectady, NY 12305, Attn: Dr. Donald White (1 copy)

Cleveland State University, Cleveland, OH 44115, Attn: Dean Jack Soules (1 copy)

Esso Research and Engineering Co., P.O. Box 8, Linden, NH 07036, Attn: D. Grafstein (1 copy)

University of Maryland, Department of Physics and Astronomy, College Park, MD 20742, Attn: D. Curry (1 copy)

Sylvania Electric Products, Inc., 100 Ferguson Drive, Mountain View, CA 94040, Attn: L.M. Osterink (1 copy)

North American Rockwell Corp., Autonetics Division, 3370 Miraloma Avenue, Anaheim, CA 92803, Attn: R. Gudmundsen (1 copy)

Massachusetts Institute of Technology, 77 Massachusetts Avenue, Cambridge, MA 02138, Attn: Prof. A. Javan (1 copy)

Lockheed Missile & Space Co., Palo Alto Research Laboratories, Palo Alto, CA 94304, Attn: Dr. R.C. Ohlman (1 copy)

ILC Laboratories, Inc., 164 Commercial Street, Sunnyvale, CA 94086, Attn: L. Noble (1 copy)

University of Texas at Dallas, P.O. Box 30365, Dallas, TX 75230, Attn: Professor Carl B. Collins (1 copy)