

FC

FA-TN-75002

AD

5

ADA019309

PREVENTION OF 5.56MM ALUMINUM CARTRIDGE CASE BURN-THROUGH

January 1975

Approved for public release; distribution unlimited.

DDC
RECEIVED
JAN 16 1975
A



Munitions Development & Engineering Directorate

U.S. ARMY ARMAMENT COMMAND
FRANKFORD ARSENAL
PHILADELPHIA, PENNSYLVANIA 19137

DISPOSITION

Destroy this report when it is no longer needed. Do not return it to the originator.

Citation of manufacturers' names in this report does not constitute an official indorsement or approval of the use of such commercial hardware or software.

DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER FA-TN-75002	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER Technical research note
4. TITLE (and Subtitle) PREVENTION OF 5.56MM ALUMINUM CARTRIDGE CASE BURN-THROUGH.		5. TYPE OF REPORT & PERIOD COVERED
7. AUTHOR(s) SAMUEL J. MARZIANO CALVIN VRIESEN - Thiokol Chemical Corp.		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Frankford Arsenal Attn: SARFA-MDS-S Philadelphia, PA 19137		8. CONTRACT OR GRANT NUMBER(s) 1234p.
11. CONTROLLING OFFICE NAME AND ADDRESS SASA, MUCOM		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS AMCMS: 552D.11.23200.01 DA Proj: J562604A010.05
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE Jan 1975
16. DA-J562604-A-010		13. NUMBER OF PAGES 35
18. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		15. SECURITY CLASS. (of this report) Unclassified
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		16a. DECLASSIFICATION/DOWNGRADING SCHEDULE N/A
18. SUPPLEMENTARY NOTES This report documents work performed by the Thiokol Chemical Corporation, Elkton Division, Elkton, Maryland, in collaboration with the Ammunition Development and Engineering Laboratories, SARFA-MDS-S, Frankford Arsenal,		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Aluminum Flash Silicone Rubber Burn-Through Intumescent Coating Cartridge Case Coatings Polyimide Varnish Erosion Polysulfide Sheeting		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report documents recent developments in cartridge case coatings designed to prevent the occurrence of burn-through in 5.56mm aluminum cartridge cases. The research work performed determined the effectiveness and general feasibility of five materials: red grip core paste, polyimide varnish (DuPont), The National Aeronautic and Space Administration's (NASA) 45B3 intumescent coating, polysulfide sheeting, and		

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

142 720

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

18.. SUPPLEMENTARY NOTES: (Continued)

Philadelphia, Pennsylvania 19137. The representatives from Frankford Arsenal were Mr. S. J. Marziano, Technical Supervisor and Ms. Barbara Caldwell, Contracting Officer. The representatives from the Thiokol Chemical Corporation were Dr. Calvin Vriesen, Principal Investigator and Mr. E. C. Ooslerom, Program Manager.

20. ABSTRACT: (Continued)

RTV-734 (Dow Corning) used in combination with other materials. As a result of test firings conducted using the aforementioned materials, two formulations, the NASA intumescent coating and the polysulfide sheeting, internally applied, emerged as the most successful candidates. In light of the general efficiency demonstrated by these materials, it is concluded that an internally applied case coating material could prove to be most effective in the prevention of burn-through in 5.56mm aluminum cartridge cases.

ACCESSION NO.	
HTH	HTH Section ☒
DDC	DDC Section ☐
UNANNOUNCED	☐
JUSTIFICATION.....	
BY.....	
DISTRIBUTION/AVAILABILITY CODES	
INTL	AVAIL. CODE/NO SPECIAL
A	

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION.	3
EXPERIMENTAL WORK	3
Lot 1 - Formulation A (Interior)	5
Lot 2 - Formulation B (Interior)	5
Lot 3 - Formulation C (Exterior)	8
Lot 4 - Formulation D (Exterior)	8
Lot 5 - Formulation E (Exterior)	13
Lot 6 - Formulation F (Interior)	13
Lot 7 - Formulation G (Interior)	18
Lot 8 - Qualification Effort	23
CONCLUSIONS	23
RECOMMENDATIONS	23
DISTRIBUTION	31

List of Tables

Table

I. Test Results of Lot 1	6
II. Test Results of Lot 2	9
III. Test Results of Lot 3	11
IV. Test Results of Lot 4	14
V. Test Results of Lot 5	16
VI. Test Results of Lot 6	19
VII. Test Results of Lot 7	21
VIII. Test Results of Qualification Lot	25

List of Illustrations

<u>Figure</u>	<u>Page</u>
1. Location Points.	4
2. Formulation A: Polysulfide Graphite	7
3. Formulation B: RTV-734 Red Grip Filler	10
4. Formulation C: Exterior RTV-734	12
5. Formulation D: Exterior RK-692 - (Six applications). .	15
6. Formulation E: Exterior RK-692 - (Two applications). .	17
7. X-Ray Views of Formulations: F - Polysulfide - C5500 Paste - Thermax; G - Polysulfide - C5500 Paste	20
8. Formulation F: Polysulfide - C5500 Paste - Thermax Formulation G: Polysulfide - C5500 Paste	22
9. Intumescent Coating 45B3 (3 grains)	26
10. Intumescent Coating 45B3 (4 grains)	27
11. Intumescent Coating 45B3 (5 grains)	28
12. Intumescent Coating 45B3 (6.7 grains)	29
13. Intumescent Coating 45B3 (8.9 grains)	30

INTRODUCTION

A number of interior coatings had been investigated by Frankford Arsenal for efficiency in reducing burn-through erosion. During August 1972, Frankford Arsenal successfully demonstrated the feasibility of aluminum cartridge cases in high performance small caliber ammunition.¹ It had been shown² that a gas path through the wall of an aluminum case, through which propellant gas can flow during the internal ballistic cycle, is a precursor to the burn-through phenomenon. Severe erosion of the case occurs during the burn-through and is accompanied by a large flash next to the breech of the test weapon. The effort in this report was conducted by Thiokol Chemical Corporation during 8 August 1972 to 28 February 1973.

Six coatings were investigated for their efficiency in reducing burn-through erosion. Of these, the 45B3 NASA Intumescent Coating, RTV 734 (Dow-Corning), and a core paste, Red Grip, had been shown to be most effective. The reduction of the burn-through phenomenon was considered to be of value since it might give clues to improved coating formulations. Properties of coatings which were considered to be of importance were:

1. Toughness (tear strength)
2. Thermal stability
3. Elastomeric character
4. Insulation capacity

The six lots of cartridges prepared and submitted under this program are listed in the following section with their formulations and results tabulated and discussed in turn.

Prior to this program, the general capability to effectively coat cartridge cases had been demonstrated by submission of a series of samples prepared by the Thiokol Corporation, using NASA's 45B3 formulation. Results are tabulated in the appendix to this report.

EXPERIMENTAL WORK

To simulate case damage that could occur as a result of field use,

¹Reed E. Donnard and Thomas J. Hennessy, "Aluminum Cartridge Case Feasibility Study using the M16A1 Rifle with the 5.56mm Ball Ammunition as the Test Vehicle," Frankford Arsenal, Report No. R-2065, November 1972

²W. H. Squire and Reed E. Donnard, "An Analysis of 5.56mm Aluminum Cartridge Case Burn-Through Phenomenon," Frankford Arsenal, No. AD750379, 1972

the outside surface of the cases were grooved longitudinally with a rectangular groove 0.0145 inch wide, 0.007 inch deep, and 0.875 inch long.³

Dimensions of case coating thicknesses and groove location were determined at points indicated in Figure 1.

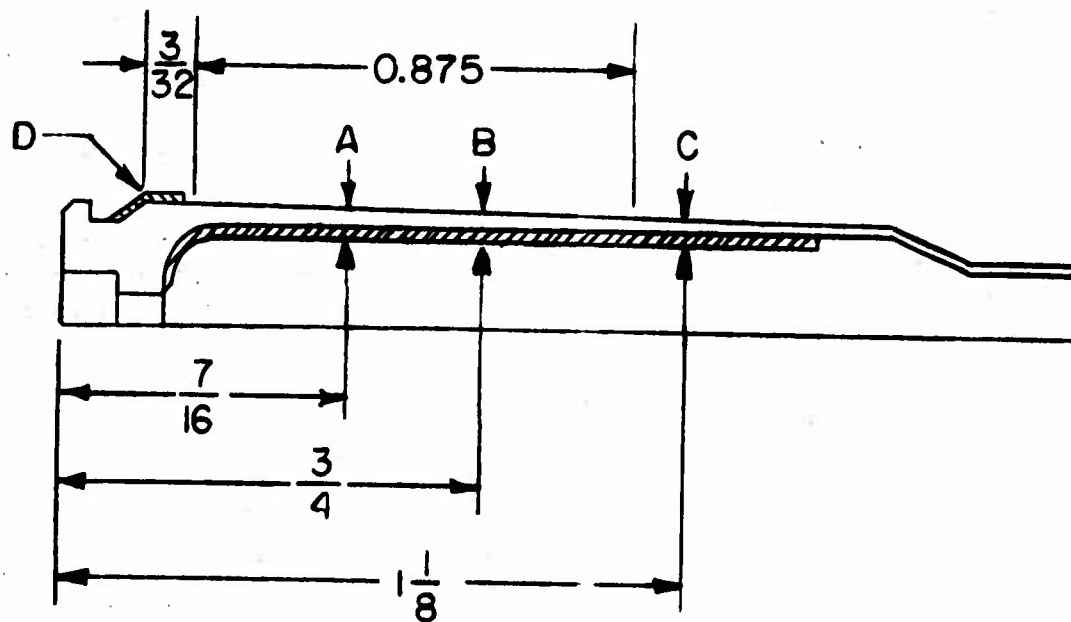


Figure 1. Location Points

³Reed E. Donnard and Leonard Skochko, "Induced-Failure Test Procedure For Aluminum Alloy Cartridge Cases," Frankford Arsenal Report No. 6019, June 1971.

LOT 1

Formulation A (Interior)

Component	Parts by Weight (g)
Graphite	39.0
Polysulfide Binder	26.0
Methyl Ethyl Ketone	35.0

This formulation was selected in order to evaluate the effect of graphite with respect to thermal stability and insulation capability. Graphite has been used extensively in rocket motor nozzles. The binder was that used in NASA's 45B3 Intumescent coating:

LP-3 Polysulfide	45.5
EPON 828 Epoxy Resin	45.5
DMP-30 2, 4, 6-Tri(dimethylamino-methyl)phenol	9.0

Methyl ethyl ketone was used to dissolve the components and to facilitate application which was accomplished by a fill and drain procedure. This allows excess material to drain through primer vent hole.

A review of the test data (Table I) and Figure 2 resulted in the following observations:

- A polysulfide coating cured with an epoxide and applied at a 6-7 grain level in methyl ethyl ketone by a fill and drain procedure is not effective in preventing case burn-through.
- Failure may have been due to solvent occlusion by the formulation - weights were taken only after cure and not before.

LOT 2


Formulation B (Interior) - Red Grip Filler in RTV 734

The Red Grip Filler was obtained from Red Grip Core Paste (Pennsylvania Foundry, Phila., PA 19124) by washing out the water it contained with acetone and air drying the solids which remained. Methylene chloride was used as a carrier and a fill and drain procedure was utilized to arrive at the desired weight.

TABLE I.
Test Results of Lot 1

Formulation A:		Component	Parts by Weight (g)			
LP-3		ERL-2274	11.87			
		DMP-30	11.87			
		Graphite (Fisher Tech.)	2.26			
		Methyl ethyl ketone	39.00			
			35.00			
Application:		Applied on interior by fill and drain procedure.				
Test Date:		9-6-72				
Propellant:		WC 846, Lot 46892, M193 bullet, FA41 primer				
All weights in grains.						
Case No.	Coating Weight	Weight Loss in Firing	Charge Weight	Velocity (fps)	Breach Flash	Erosion
T1	6.0	0.46	24.0	2560	Medium	M
T2	6.2	0.51	24.0	2750	Medium	M
T3	6.0	0.69	24.0	2931	Large	L
T4	5.9	0.63	24.0	2506	Large	L
T5	6.2	0.84	24.0	2529	Large	L
T6	5.8	0.63	24.0	2973	Large	L
T7	6.2	Sectioned average dimensions: A - 0.0208", B - 0.0162", C - 0.0126"				
T8	7.1	0.57	24.0	2527	Large	L
T9	6.8	0.58	24.0	2972	Large	L
T10	6.8	0.85	24.0	2972	Large	L
T11	6.8	0.92	24.0	2354	Large	L

L = large body, rim, and extractor groove erosion
M = moderate body and rim erosion

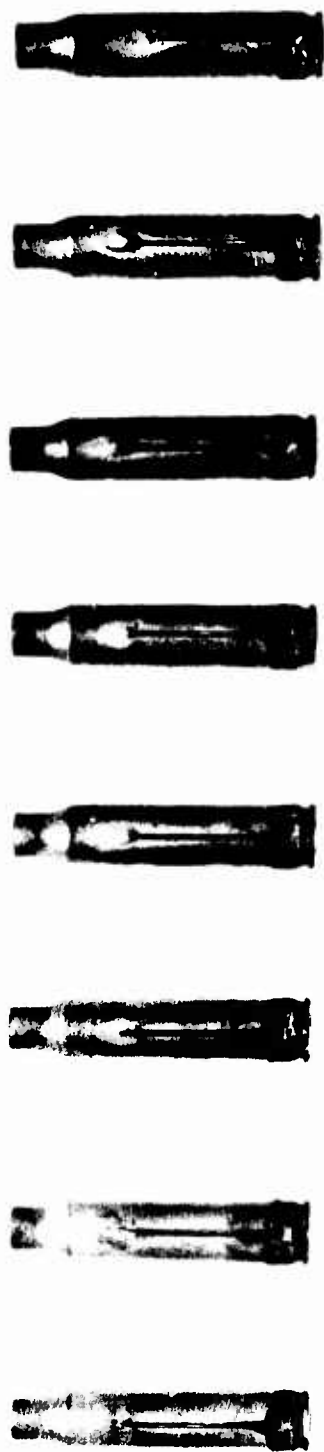

T1 T3 T4 T5 T6 T8 T9 T10



T2 T11 UN-FIRED

LOT #1

TEST DATE: 9-6-72

Figure 2. Formulation A: Polysulfide Graphite

This formulation was examined because it had been shown that both individual components were effective. Tabular data (Table II) and Figure 3 indicate too great a variation in results. This was very likely due to the fact that it was not possible to apply a uniform coating from a suspension.

LOT 3

Formulation C (Exterior) - One coat of Dow-Corning 1200 Primer - Four coats of RTV 734 (10 percent in methylene chloride)

Previous tests at Frankford Arsenal had shown that exterior coatings such as tapes and interior coatings such as RTV 734 were effective in eliminating case burn-through.⁴ The cases in this lot were primed with Dow-Corning Primer 1200. This was followed by four coats of RTV 734 at a 10 percent level in methylene chloride. These applications resulted in a tight fit in the chamber of the test weapon. The application on the exterior of the cases was not effective as indicated by tabular data (Table III) and Figure 4. An examination of fired cases containing an interior coating RTV 734 indicated that the material was forced into and partially out of the test groove and apparently was sufficiently tough to prevent the escape of gases. This property apparently is not effective when RTV 734 is placed on the outside of the case.

LOT 4

Formulation D (Exterior) - Six applications of DuPont RK-692

DuPont's "Pyre-M.L." varnish, RK-692, was selected because of its excellent thermal stability. Its expected life at 150°C is over 1000 hours (DuPont Product Bulletin). It is an aromatic polyimide dissolved in xylene and N-methyl pyrrolidinone at a 15 percent level. The solvents must be removed at lower temperatures (100-150°C) before the

⁴Leonard Skochko, Marvin Fosenbaum and Reed E. Donnard, "Aluminum Cartridge Case Concepts Task - Work Summary," Frankford Arsenal Report No. R-3001, March 1974, No. AD9207126


TABLE II.
Test Results of Lot 2

<u>Component</u>		<u>Parts by Weight (g)</u>				
Formulation B:	RTV 734	80				
	Red grip filler	20				
	Methylene chloride carrier					
Application:	Applied on interior by fill and drain procedure.					
Test Date:	10-4-72					
Propellant:	WC 846, Lot 46892, M193 bullet, FA41 primer					
All weights in grains.						
<u>Case No.</u>	<u>Coating Weight</u>	<u>Weight Loss in Firing</u>	<u>Charge Weight</u>	<u>Velocity (fps)</u>	<u>Breech Flash</u>	<u>Erosion</u>
T12	7.7	5.83	22.0	2962	-	N
T13	6.2	4.30	23.5	3106	Sparks	S
T14	7.7	3.98	22.0	2942	-	N
T15	5.9	4.75	23.5	3147	Large	L
T16	6.0	4.40	22.0	3105	-	N
T17	6.0	4.60	23.5	3098	-	S
T18	6.2	4.87	23.5	3137	Sparks	S
T19	5.9	4.82	23.5	3206	Sparks	S
T20	5.9	Sectioned sample case				

L = large body, rim, and extractor groove erosion

N = no erosion

S = small body erosion



T19



T18



T17



T16



T13



T12



T15



T14



UNFIRED

LOT #2

TEST DATE: 10-4-72

Figure 3. Formulation B: RTV-734 Red Grip Filler

TABLE III.
Test Results of Lot 3

Formulation C: One exterior coat Dow-Corning 1200 Primer, then four exterior coats RTV 734 (10 percent in methylene chloride) each cured one hour with atmospheric moisture.

Test Date: 11-2-72
Propellant: WC 846, Lot 46892, M193 bullet, FA41 primer

All weights in grains.

Case No.	Coating Weight	Weight Loss in Firing	Charge Weight	Velocity (fps)	Breech Flash	Erosion
T21	0.46	0.94	27.0	3203	Large	L
T22	0.77	0.91	27.0	3226	Large	L
T23	0.62	-				
T24	0.77	-				
T25	0.46	-				
T26	0.46	-				
T27	0.62	-				
T28	-	-				

Not tested because of results with T21 and T22.

Sample case

L = large body, rim and extractor groove erosion.



T21



T22



T23
(UN-FIRED)

LOT #3

TEST DATE: 11-2-72

Figure 4. Formulation C: Exterior RTV-734

temperature is elevated to accomplish the actual cure. Six applications were necessary to provide a tight fit in the chamber of a test gun, the greatest amount appearing to adhere during the first data of the test firings (Table IV) and the photographs (Figure 5) indicates that good results were obtained.

LOT 5

Formulation E (Exterior) - Two applications of RK-692

Only two coats of RK-692 were applied to the cartridges of this lot, and a tight fit occurred in the chamber of the test piece. The diameter of the cartridges may have been slightly greater than those used in Lot 4. The primer vents in this case were filled with clay and this was covered in turn with RTV 734 to prevent the RK-692 from entering them.

Test results indicated by Table V and photographs (Figure 6) showed that results were completely unsatisfactory. An apparent conclusion is that a tight fit was not obtained in the test weapon. It was the tight fit which constrained the rounds of Lot 4 during firing and prevented rupture. It must be concluded that external coating is not feasible for field use because wear of the chamber could result in a poor fit of the cartridges.

The precautions taken with the primer vent holes were not adequate to exclude traces of the coating, again causing loose primers.

LOT 6

Formulation F (Interior)

Component	Parts by weight (g)
LP-32	77.3
C5500 paste	13.6
Thermax	9.1

Lot 1 polysulfide coatings had been cured with an epoxide in the presence of an amine catalyst. The 38 mil gumstock prepared for this

TABLE IV.
Test Results of Lot 4

Formulation D: Six exterior coats of DuPont RK-692, each one hour at 220° F, then one hour at 280° F, followed by one-half hour at 400° F.

Application: Dip and drain procedure
Test Date: 11-2-72
Propellant: WC 846, Lot 46892, M193 bullet, FA41 primer

All weights in grains.

Case No.	Coating Weight	Weight Loss in Firing	Charge Weight	Velocity (fps)	Breech Flash	Erosion
T291	0.93	0.05	27.0	3249	Medium	N
T302	1.08	0.05	27.0	3258	Medium	N
T313	0.77	0.01	27.0	3296	None	N
T32	0.77		Damaged in loading.			
T332	0.93	0.94	27.0	3250	Medium	S
T344	1.08	0.49	27.0	3263	Medium	S
T351	0.93	0.36	27.0	3293	Small	L
T36	0.93	0.3791	Sample case			

- 1 Loose primer, enlarged primer pocket
- 2 Blown primer, enlarged primer pocket
- 3 Blown primer, enlarged primer pocket, 1/2 scratch fracture
- 4 Blown primer

L = large body, rim, and extractor groove erosion
N = no erosion
S = small body erosion



T35



T34



T33



T31



T30



T29



T36

UN-FIRED

LOT #4

TEST DATE: 11-2-71

Figure 5. Formulation D: Exterior RK-692
(Six applications)

TABLE V.
Test Results of Lot 5

Formulation E: Two coats RK-692 (each 15 minutes at 280-300° F, then final bake 30 minutes at 390-394° F)

Application: Fill and drain procedure

Test Date: 12-14-72

Propellant: WC 846, Lot 46892, M193 bullet, FA41 primer

All weights in grains.

Case No.	Coating Weight	Weight Loss in Firing	Charge Weight	Velocity (fps)	Breech Flash	Erosion
T37	0.46			Not fired		
T38	0.62	1.52	27.0	3123	Large Loose primer	L
T39	0.46	1.17	27.0	3143	Large Loose primer	L
T40	0.46	-				
T41	0.77	-				
T42	0.77	-				
T43	0.77	0.90	27.0	3158	Large Blown primer	L

Not fired because of results with T38 and T39

L = large body, rim, and extractor groove erosion



T38



T39



T43



T37
(UN-FIRED)

LOT #5

TEST DATE: 12-14-72

Figure 6. Formulation E: Exterior RK-692
(Two applications)

lot was cured with C5500 paste which is composed of lead peroxide with an inhibitor. The use of undiluted lead peroxide results in a very rapid cure.

Rectangles of the gumstock 9/16 inch wide and of a length equal to the circumference of the case were inserted into the cases and positioned with forceps. No adhesive was applied. The positioning was not complete as was evidenced by X-rays taken at Frankford Arsenal (Figure 7). Test results (Table VI) and photographs indicated that this technique was very effective when the inserts were positioned correctly. The insert in Case T43 was in the best position, those in Cases 45 and 46, while not positioned well, did adequately cover the interior under the test groove. Observation of the fired rounds showed that the polysulfide was forced out into the test groove as was RTV 734.

The test results indicate that this polysulfide formulation is effective in preventing erosive burn-through at the level tested (6 grains). An advantage of this formulation is its cost (0.96/lb) as compared to RTV (\$4.50/lb).

Results obtained with Lot 6 as compared to those obtained with Lot 1 may have been due to:

- a. The type of cure used with the polysulfide
- b. The solvent application used with Formulation A

LOT 7

Formulation G (Interior)

The polysulfide formulation in Cases 50-53 was the same as used in Cases 43-49 but was not filled with Thermax filler. The formulation was weighed into the cases and they were spun at such a speed as to properly position the liner and cured under a heat lamp for 12 hours. The test data (Table VII) and Figure 8 indicate that this procedure was partially effective.

The use of Thermax filler and a mixing head for the polysulfide and curative (to considerably reduce cure time) could provide results similar to those obtained with Formulation F.

TABLE VI.
Test Results of Lot 6


<u>Component</u>		<u>Parts by Weight (g)</u>				
Formulation F:	LP-32	77.3				
	C5500 paste	13.6				
(Company	Thermax	9.1				
Proprietary)						
Application:	Rectangles 38 mil gumstock, 9/16 inch wide slipped into case, not bonded.					
Test Date:	2-15-73					
Propellant:	Blend 4/1, WC 846/WC 680, M193 bullet, FA41 primer					
All weights in grains						
<u>Case No.</u>	<u>Liner Weight</u>	<u>Weight Loss in Firing</u>	<u>Charge Weight</u>	<u>Velocity (fps)</u>	<u>Breech Flash</u>	<u>Erosion</u>
T43	6.1	0.21	23.5	3154	None	N
T44	6.2	0.92	23.5	3053	Large	L
T45	6.1	0.26	23.5	3118	None	N
T46	5.9	0.28	23.5	3156	None	N
T47	5.9	0.34	23.5	3152	Small	S
T48	6.1	0.72	23.5	3156	Small	S
T49	6.1	0.30	23.5	3131	Small	S

L = large body, rim, and extractor groove erosion

N = no erosion

S = small body erosion

POLYSULFIDE - C5500 PASTE - THERMAX

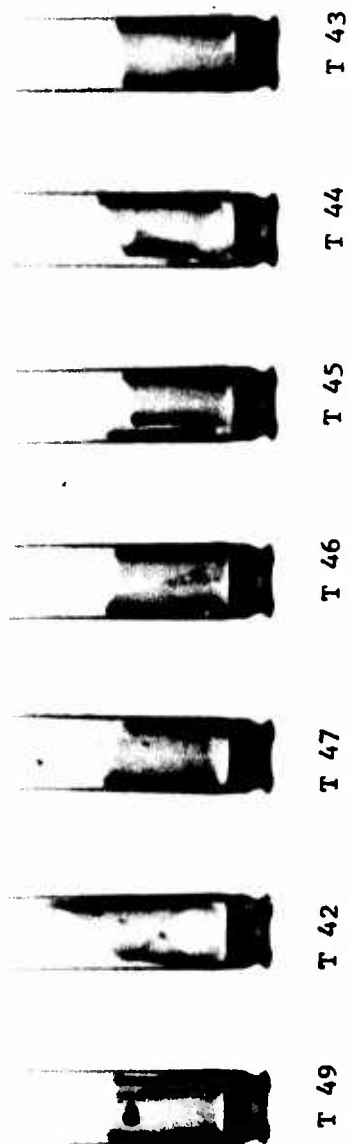

POLYSULFIDE - C5500 PASTE

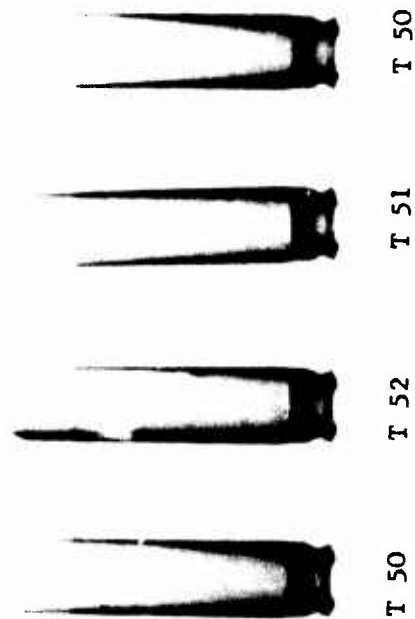


Figure 7. X-Ray Views of Formulations: F - Polysulfide - C5500 Paste - Thermax; G - Polysulfide - C5500 Paste

TABLE VII.
Test Results of Lot 7

Component		Parts by Weight (g)					
Formulation G:		LP-32	85.0				
		C5500 paste	15.0				
Application:		Weighed in, spun and cured 12 hours with heat lamp.					
Case No.	Coating Weight	Dimension A* (in.)	Weight Loss in Firing	Charge Weight	Velocity (fps)	Breech Flash	Erosion
T50	5-6	0.020	0.61	23.5	3219	Small	S
T51	5-6	-	0.83	23.5	3175	Large	M
T52	5-6	-	1.11	23.5	3113	Large	M
T53	5-6	-	0.69	23.5	3205	None	N

M = moderate body and rim erosion


N = no erosion

S = small body erosion

*See Figure 1



T52G



T50G




T49



T48



T46



T45



T51



T50



T47



T44



T43

T53G

T51G

T47

T44

T43

TEST DATE: 2-15-73

Lot #6

Figure 8. Formulation F: Polysulfide - C5500 Paste - Thermax
Formulation G: Polysulfide - C5500 Paste

Lot 8

Qualification Effort

The interior of a series of 5.56mm cartridge cases was lined with the NASA 45B3 Intumescent Coating. The composition of the NASA formulation follows:

	<u>Component</u>	<u>Parts by Weight (g)</u>
Part A:	LP-3 Polysulfide	14.1
	Ammonium salt of	57.0
	4-nitroaniline-2-	
	sulfonic acid	
	Methyl Ethyl Ketone	28.9
Part B:	Shell 828 Epoxide Resin	14.1
	Toluene	4.7
Part C:	Tri (dimethylamino	2.8
	methyl) phenol	
	Toluene	2.8

Results of test firings are shown in Table VIII and in Figures 9 through 13. Eight grains of the coating appear to be necessary to prevent burn-through.

CONCLUSIONS

The most effective coating was a sheet of a proprietary formulation, composed of a polysulfide which was cured with an oxidizing curative, and contained Thermax as a filler. A similar formulation containing no Thermax and cured in the cases while they were rotated was found to be less effective. Little improvement was noted when the polysulfide was cured with an epoxide and applied in a solvent.

A combination of two candidates which had been shown to be effective was examined. These were the filler contained in Red Grip Core Paste and RTV-734. The combination was applied in methylene chloride solvent. Results were not satisfactory.

The silicone RTV-734 was applied externally but found to be ineffective. RK-692 polyimide varnish (DuPont) as an external coating was effective only when a tight fit was obtained in the test weapon. It was concluded that such an external coating is not feasible for field use because wear of the chamber could result in a poor fit for the cartridge.

Results of a qualification effort are included in Table VIII. This involved the application of the NASA Intumescent Coating 45B3. It appeared that at least eight grains per cartridge of this coating were necessary to be effective.

The promising results obtained with the polysulfide sheeting indicate that this approach should be explored further. One procedure would be to cure the polysulfide in the form of cylinders which could be inserted into the cartridge cases.

RECOMMENDATIONS

In light of the effectiveness demonstrated by the case coatings tested, it is recommended that:

1. The concept of utilizing interior cartridge case coatings to prevent the occurrence of burn-through be further explored.
2. The Polysulfide Sheeting formulation, the most effective material tested, be further tested and evaluated.
3. The NASA 45B3 Intumescent Coating based on its effectiveness as tested, be also further investigated.

TABLE VIII.
Test Results of Qualification Lot

Formulation: NASA 45B3
Application: Fill and drain, interior coating
Test Dates: 3-17-72 and 3-27-72
Propellant: WC 486, Lot 46892, M193 bullet, FA41 primer

All weights in grains.

Case No. (Rd)	Coating Weight	Weight Loss in Firing	Charge Weight	Velocity (fps)	Results	
					Breech Flash	Erosion
13	2.85	1.44	-	3175	Large	L
14	2.82	1.34	-	3159	Large	M
17	3.16	1.33	-	3216	Large	M
21	3.29	1.78	-	3163	Large	M
15	3.81	1.21	-	3137	Medium	M
16	3.82	0.90	-	3260	Small	S
18	3.78	1.56	-	3153	Large	L
19	3.95	1.16	-	3158	Large	M
22	3.70	1.58	-	3158	Large	L
1	4.47	1.19	-	3100	Small	S
9	4.50	1.46	-	3097	Small	M
10	4.73	0.88	-	3111	Large	M
11	5.20	1.17	-	3101	Small	S
23	5.19	1.31	-	3127	Large	L
29	6.66	1.09	24.0	3145	None	M
30	7.53	1.17	23.0	3040	None	N
31	7.25	1.15	24.0	3148	None	S
34	7.67	1.24	23.4	3068	Large	M
37	7.47	1.17	23.3	3124	Large	M
39	6.50	1.29	24.2	-	Large	L
50	6.79	0.96	24.0	3120	Large	L
51	6.13	0.95	24.4	3205	None	N
25	8.11	1.10	23.1	3039	None	N
26	8.35	1.04	23.0	3047	None	N
27	8.11	1.05	23.1	3029	None	N
28	8.46	1.11	23.0	3031	None	N
33	8.57	1.13	22.8	3034	None	S
36	8.60	1.38	22.8	3031	None	S
38	8.31	1.18	23.0	3009	Medium	S

N = no erosion

L = large body, rim and extractor groove erosion

M = moderate body and rim erosion

S = small body erosion

5.56mm Case
 WC-846 AL-46892 (26.5 grs)
 Intumescent Coating - 45B3
 Groove - 0.0145"W x 0.007"D x 0.875"L



RD-13

RD-14

RD-17

RD-21

Figure 9. Intumescent Coating 45B3 (3 grains)

5.56mm Case
 WC-846 AL-46892 (25.75 grs)
 Intumescent Coating - 45B3
 Groove - 0.0145"W x 0.007"D x 0.875" L

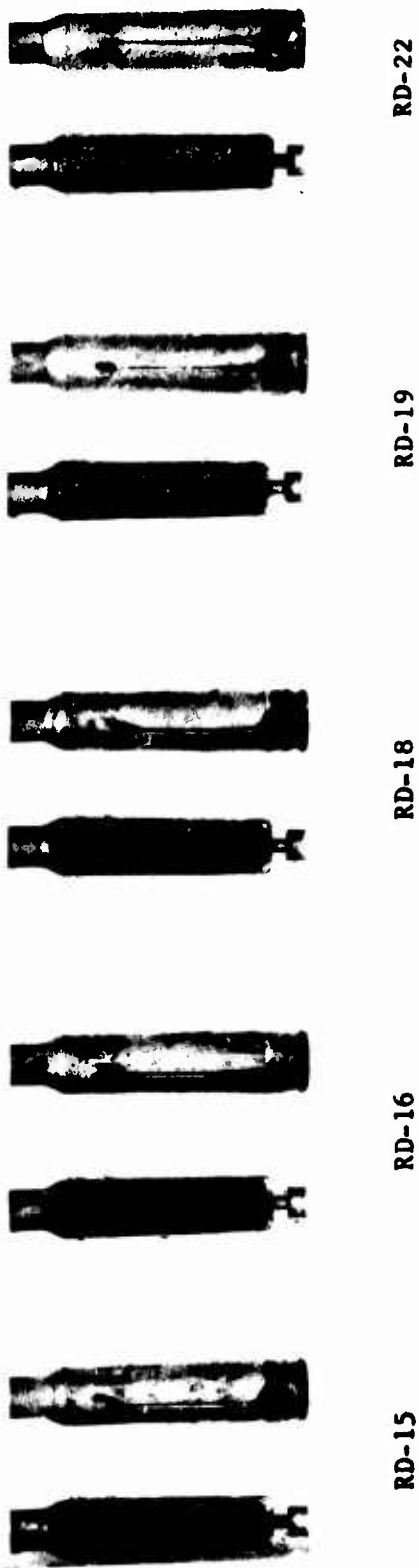


Figure 10. Intumescent Coating 45B3 (4 grains)

5.56mm Case
 WC-846 AL-46892 (25.0 grs)
 Intumescent Coating - 45B3
 Groove - 0.0145"W x 0.007"D x 0.875" L


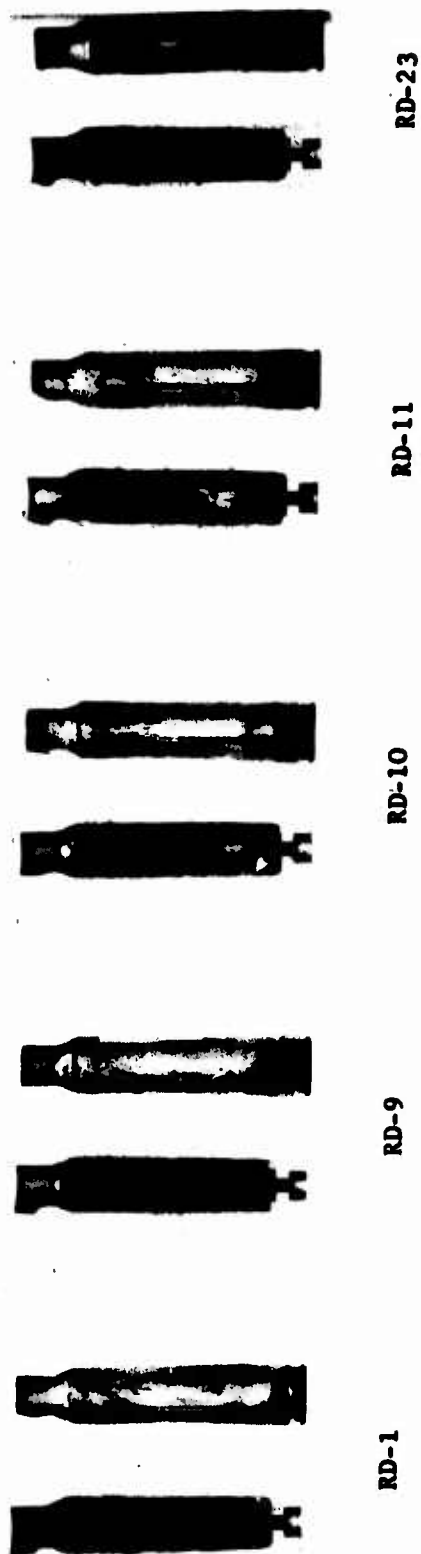


Figure 11. Intumescent Coating 45B3 (5 grains)


5.56mm Case
 WC-846 AL-46892
 Intumescent Coating - 45B3
 Groove - 0.0145"W x 0.007"D x 0.875" L

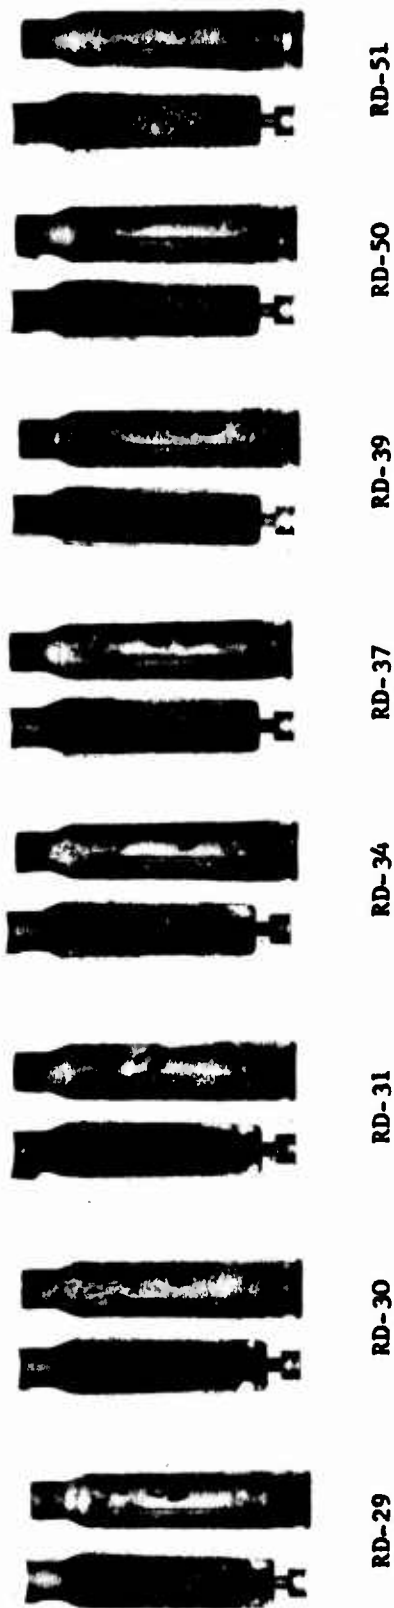

Un-fired

Figure 12. Intumescent Coating 45B3 (6.7 grains)

5.56mm Case
 WC-846 AL-46892
 Intumescent Coating - 45B3
 Groove - 0.0145"W x 0.007"D x 0.875" L

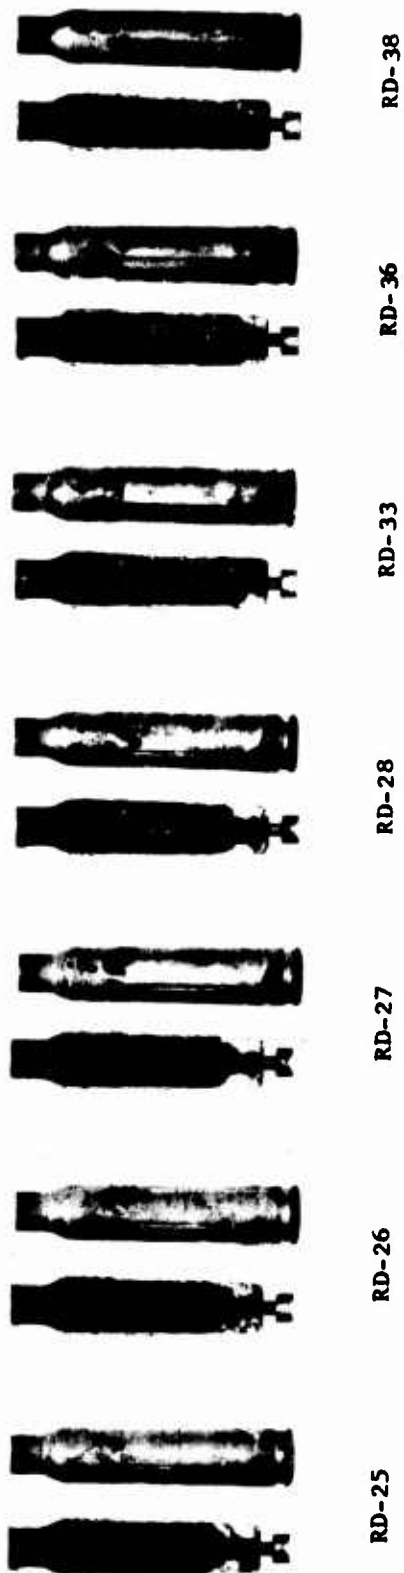

Un-fired

Figure 13. Intumescent Coating 45B3 (8.9 grains)

DISTRIBUTION

Commander
U.S. Army Materiel Command
5001 Eisenhower Avenue
Alexandria, VA 22304

2 Attn: AMCDL-CS,
Chief Scientist

1 Attn: AMCDL,
Deputy for Laboratories

1 Attn: AMCRD,
Deputy Director for Plans

1 Attn: AMCRD-F,
Air Systems Division

1 Attn: AMCRD-E,
Engineering Division

1 Attn: AMCRD-I,
Foreign Science & Tech
Division

1 Attn: AMCRD-J,
Individual Soldier Division

1 Attn: AMCRD-M,
Missile Systems Division

1 Attn: AMCRD-TC,
Mr. L. Croan, Bldg T-7
Research Division

1 Attn: AMCRD-G,
Surface Systems Division

1 Attn: AMCRD-U,
Test & Evaluation Division

1 Attn: AMCRD-W,
Weapons Munitions Systems
Division

Commander
U.S. Naval Ordnance Laboratory
Attn: Code WM
Silver Spring, MD 20910

Commander
U.S. Army Armament Command
Rock Island, IL 61201

1 Attn: AMSAR-RDM,
Systems Development
Division, Chemical &
Nuclear

1 Attn: AMSAR-RDS,
Engineering Support
Division

1 Attn: AMSAR-RDT,
Concepts & Technology
Division

1 Attn: AMCPM-SA,
Selected Ammunition

2 Attn: AMCPM-VRF,
Vehicle Rapid Fire
System Division

1 Attn: AMSAR-LMC
USMC Liaison Officer

1 Attn: Systems Development
Division, Conventional
Ammunition

1 Attn: Manufacturing Engineering
Division

1 Attn: Munitions Reliability
Systems Division

1 Attn: AMSAR-ASF,
Field Service Division

1 Attn: AMSAR-RD,
Director, Research
Development & Engineering
Directorate

1 Attn: AMSAR-RDF,
Mr. Chesnov

Commander
U.S. Army Picatinny Arsenal
Dover, NJ 07801

2 Attn: SARPA,
Scientific & Technical
Information Branch

1 Attn: SARPA,
Technical Director

1 Attn: SARPA-AD-DA3,
Mr. Resiman
ACT Coordinator

1 Attn: SARPA-D,
Director, Ammunition
Engineering Directorate

1 Attn: SARPA-DD,
Chief, Ammunition
Development Division

1 Attn: SARPA-DP,
Chief, Munitions
Engineering Directorate

1 Attn: SARPA-DF,
Chief, Fuze Research &
Engineering Division

1 Attn: SARPA-V,
Director, Feltman
Research Laboratories

1 Attn: SARPA-VP,
Chief, Material
Engineering Laboratories

Commander
U.S. Army Test & Evaluation Command
Aberdeen Proving Ground, MD 21005

1 Attn: STEAP-DS-TU,
Mr. W. Pless

1 Attn: STEAP-MT-TI,
Mr. Hines

Commander
A.F. Armament Laboratories
Attn: DLOS
Eglin AFB, FL 32542

Commander
U.S. Army Hill Air Force Base
Attn: R. Hamilton
Ogden, UT

Commander
U.S. Army Missile Command
Huntsville, AL 35809

1 Attn: Doc & Tech Info Branch

1 Attn: AMSMI-RSM
Mr. E. Wheelahan

Commander
U.S. Army Aviation Materiel Command
P.O. Box 209, Main Office
St. Louis, MO 63166

1 Attn: Technical Info Division

1 Attn: Small Arms Systems Agency

Commander
Rocky Mountain Arsenal
Attn: Technical Information Division
Denver, CO 80240

Commander
Naval Weapons Center
Attn: Mr. P. Miller
China Lake, CA 93555

Commander
Aeronautical Systems Division
Attn: Technical Info Division
Wright-Patterson AFB
Dayton, Ohio 45433

Office Chief of Research &
Development
Department of the Army
Attn: DARD-ARP-T,
Dr. Thomas Sullivan
Washington, DC 20315

Advanced Research & Technology
Division
Department of Defense
Washington, DC 20301

Commander
Air Research & Development
Command
Andrews Air Force Base
Attn: RDRAA
Washington, DC 20025

Director
National Bureau of Standards
Washington, DC 20025

National Academy of Science
Materials Advisory Board
Attn: Dr. J. R. Lane
2101 Constitution Avenue, N.W.
Washington, DC 20418

National Aeronautics & Space
Administration
Attn: Code RRM
Federal Building #10
Washington, DC 20456

Office of Naval Research
Department of the Navy
Attn: Code 423
Washington, DC 20025

Chief
Bureau of Ships
Department of the Navy
Attn: Code 343
Washington, DC 20360

Chief
Bureau of Aeronautics
Department of the Navy
Washington, DC 20360

Federal Aviation Administration
800 Independence Avenue, S.W.
Attn: Admin Standard Division
Washington, DC 20590

Director
Advanced Research Projects
Agency
Department of Defense
Washington, DC 20301

Commander
Harry Diamond Laboratories
Attn: AMXDO-TIB
Washington, DC 20438

Commander
Naval Air Systems Command
Attn: AIR 52031A, Mr. R. Schmidt
Washington, DC 20360

Director
Air Force Materials Laboratory
Research & Technology Division
Wright-Patterson AFB
Dayton, OH 45433

1 Attn: AFML,
Technical Library

1 Attn: AFML/LLD,
Dr. T. M. F. Ronald

Commander
U.S. Army Watervliet Arsenal
Watervliet, NY 12189

Commander
U.S. Army Edgewood Arsenal
Attn: Dr. E. Metcalfe
Edgewood, MD 21005

Commander
U.S. Army Materials & Mechanics
Research Center
Watertown, MA 02172

1 Attn: Technical Info Division

1 Attn: AMXMR-E,
Dr. E. S. Wright

1 Attn: AMXMR-TX

1 Attn: AMXMR-ED,
Mr. P. Riffin

1 Attn: AMXMR-ED,
Mr. K. Abbott

Commander
U.S. Army Redstone Arsenal
Attn: Technical Info Division
Huntsville, AL 35809

Commander
Technical Library, Bldg 313
Aberdeen Proving Ground, MD 21005

Commander
U.S. Army Rock Island Arsenal
Rock Island, IL 61201

1 Attn: Technical Info Division

1 Attn: SWEER-ST,
Mr. Mayer
ACT Project Director

1 Attn: SARRI-LS-C,
Mr. Weidner

Commander
Naval Air Development Center
Attn: Mr. Forrest Williams-MAN
Aero Materials-Department
Johnsville, Warminster, PA 18974

Commandant
U.S. Naval Weapons Laboratory
Dahlgren, VA 22448

Commander
U.S. Naval Engineering
Experimental Station
Attn: Materials Laboratory,
WCTRL-2
Annapolis, MD 21402

Commander
U.S. Naval Ordnance Test Station
Attn: Code 5557
China Lake, CA 93557

Commander
U.S. Army Research Office
Attn: Dr. H. Davis
Chief, Met & Cer Division
Box CM, Duke Station
Durham, NC 27706

Commander
U.S. Army Lake City Army
Ammunition Plant
Independence, MO 64056

1 Attn: SARLC-ATD

2 Attn: SARLC-ATD-TS,
Mr. Elmer Finney

Director
Ballistic Research Laboratory
Aberdeen Proving Ground, MD 21005

1 Attn: Dr. Robert Eichelberger
Technical Director

3 Attn: AMXBR-IB,
A. Baran,
ACT Coordinator

U.S. Atomic Energy Commission
Document Library
Germantown, MD 21403

Metals & Ceramics Information Center
Battelle Memorial Institute
505 King Avenue
Columbus, OH 43201

Director
U.S. Army Air Mobility Research &
Development Laboratory
Ames Research Center
Attn: Mr. Paul Yaggy
Moffet Field, CA 94035

Defense Documentation Center (12)
Cameron Station
Alexandria, VA 22314

Frankford Arsenal:

1 Attn: AOA-M/107-B

1 Attn: TD/107-1

1 Attn: MD/220-1

1 Attn: MT/211-2

1 Attn: QAA-R/235-3

1 Attn: PA/107-2

1 Attn: GC/28-1

3 Attn: TSP-L/51-2
1 - Circulation copy
1 - Reference copy
1 - Record copy

1 Attn: PD/64-4
Mr. George White

1 Attn: PDM/64-4

1 Attn: PDM-E/64-4

1 Attn: PDM-A/64-2

1 Attn: PDM-E/64-4
Project File

Frankford Arsenal - Continued:

1 Attn: MDE/220-1
Mr. Jacobs

1 Attn: PDM-E/64-4
N. Stowell

1 Attn: PDM-E/64-4
Mr. Schwartz

1 Attn: MDC-A/219-2
W. Gadomski

1 Attn: MDC/219-2

1 Attn: MDS/220-2

3 Attn: MDS-S/220-2

1 Attn: MDA/220-3

1 Attn: MDA-A/220-3

Printing & Reproduction Division
FRANKFORD ARSENAL

Date Printed: 10 DEC 1975