

AD A 030890

REPORT NO. NADC-76274-30

12



COATINGS FOR ELECTRICAL CONNECTOR SHELLS

E. J. Jankowsky
Air Vehicle Technology Department
NAVAL AIR DEVELOPMENT CENTER
Warminster, Pennsylvania 18974

13 AUGUST 1976

PROGRESS REPORT
AIRTASK NO. WF 54-593-201
Work Unit No. ZM 301

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

Prepared for
NAVAL AIR SYSTEMS COMMAND
Department of the Navy
Washington, D.C. 20361

DDC
RECEIVED
OCT 19 1976
D

COPY AVAILABLE TO DDC DOES NOT
PERMIT FULLY LEGIBLE PRODUCTION

NADC-76274-30

NOTICES

REPORT NUMBERING SYSTEM - The numbering of technical project reports issued by the Naval Air Development Center is arranged for specific identification purposes. Each number consists of the Center acronym, the calendar year in which the number was assigned, the sequence number of the report within the specific calendar year, and the official 2-digit correspondence code of the Command Office or the Functional Department responsible for the report. For example: Report No. NADC-76015-40 indicates the fifteenth Center report for the year 1976, and prepared by the Crew Systems Department. The numerical codes are as follows:

CODE	OFFICE OR DEPARTMENT
00	Commander, Naval Air Development Center
01	Technical Director, Naval Air Development Center
02	Program and Financial Management Department
09	Technology Management Office
10	Naval Air Facility, Warminster
20	Aero Electronic Technology Department
30	Air Vehicle Technology Department
40	Crew Systems Department
50	Systems Department
60	Naval Navigation Laboratory
81	Technical Support Department
85	Computer Department

PRODUCT ENDORSEMENT - The discussion or instructions concerning commercial products herein do not constitute an endorsement by the Government nor do they convey or imply the license or right to use such products.

APPROVED BY:

Paul M. Sturm

DATE: 13 August 1976

PAUL M. STURM
Commander, USN
Deputy Director, AVTD

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER MADC-76274-30	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER	
4. TITLE and Subtitle COATINGS FOR ELECTRICAL CONNECTOR SHELLS,		5. TYPE OF REPORT & PERIOD COVERED PROGRESS 1 Jul 75 - 1 Jv 76	
7. AUTHOR EDWARD J. JANKOWSKY		6. PERFORMING ORGANIZATION REPORT NUMBER MADC-76274-30	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Air Development Center Air Vehicle Technology Department Warminster, Pennsylvania 18974		8. CONTRACT OR GRANT NUMBER(s)	
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Air Systems Command Department of the Navy Washington, DC 20361		10. PROGRAM ELEMENT PROJECT, TASK AREA & WORK UNIT NUMBERS AIRTASK NO. WP 54-593-201 Work Unit No. ZH 301	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE 13 Aug 1976	
		13. NUMBER OF PAGES 29	
		15. SECURITY CLASS. (of this report) UNCLASSIFIED	
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for Public Release; Distribution Unlimited.			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18. SUPPLEMENTARY NOTES			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Electrical connector shells Corrosion Protective coatings			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Coatings for improved corrosion protection of aluminum alloy connector shells have been investigated with a view toward replacing currently employed coatings. Cyclic heating/corrosion tests as well as 80% salt spray exposure have indicated that duplex electroless nickel-cadmium coatings protect 6061 aluminum alloy well if they are thick enough (17.8 μm (.0007")). Use of these coatings is recommended.			

DD FORM 1473

JAN 73


EDITION OF 1 NOV 68 IS OBSOLETE
S N 0102-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

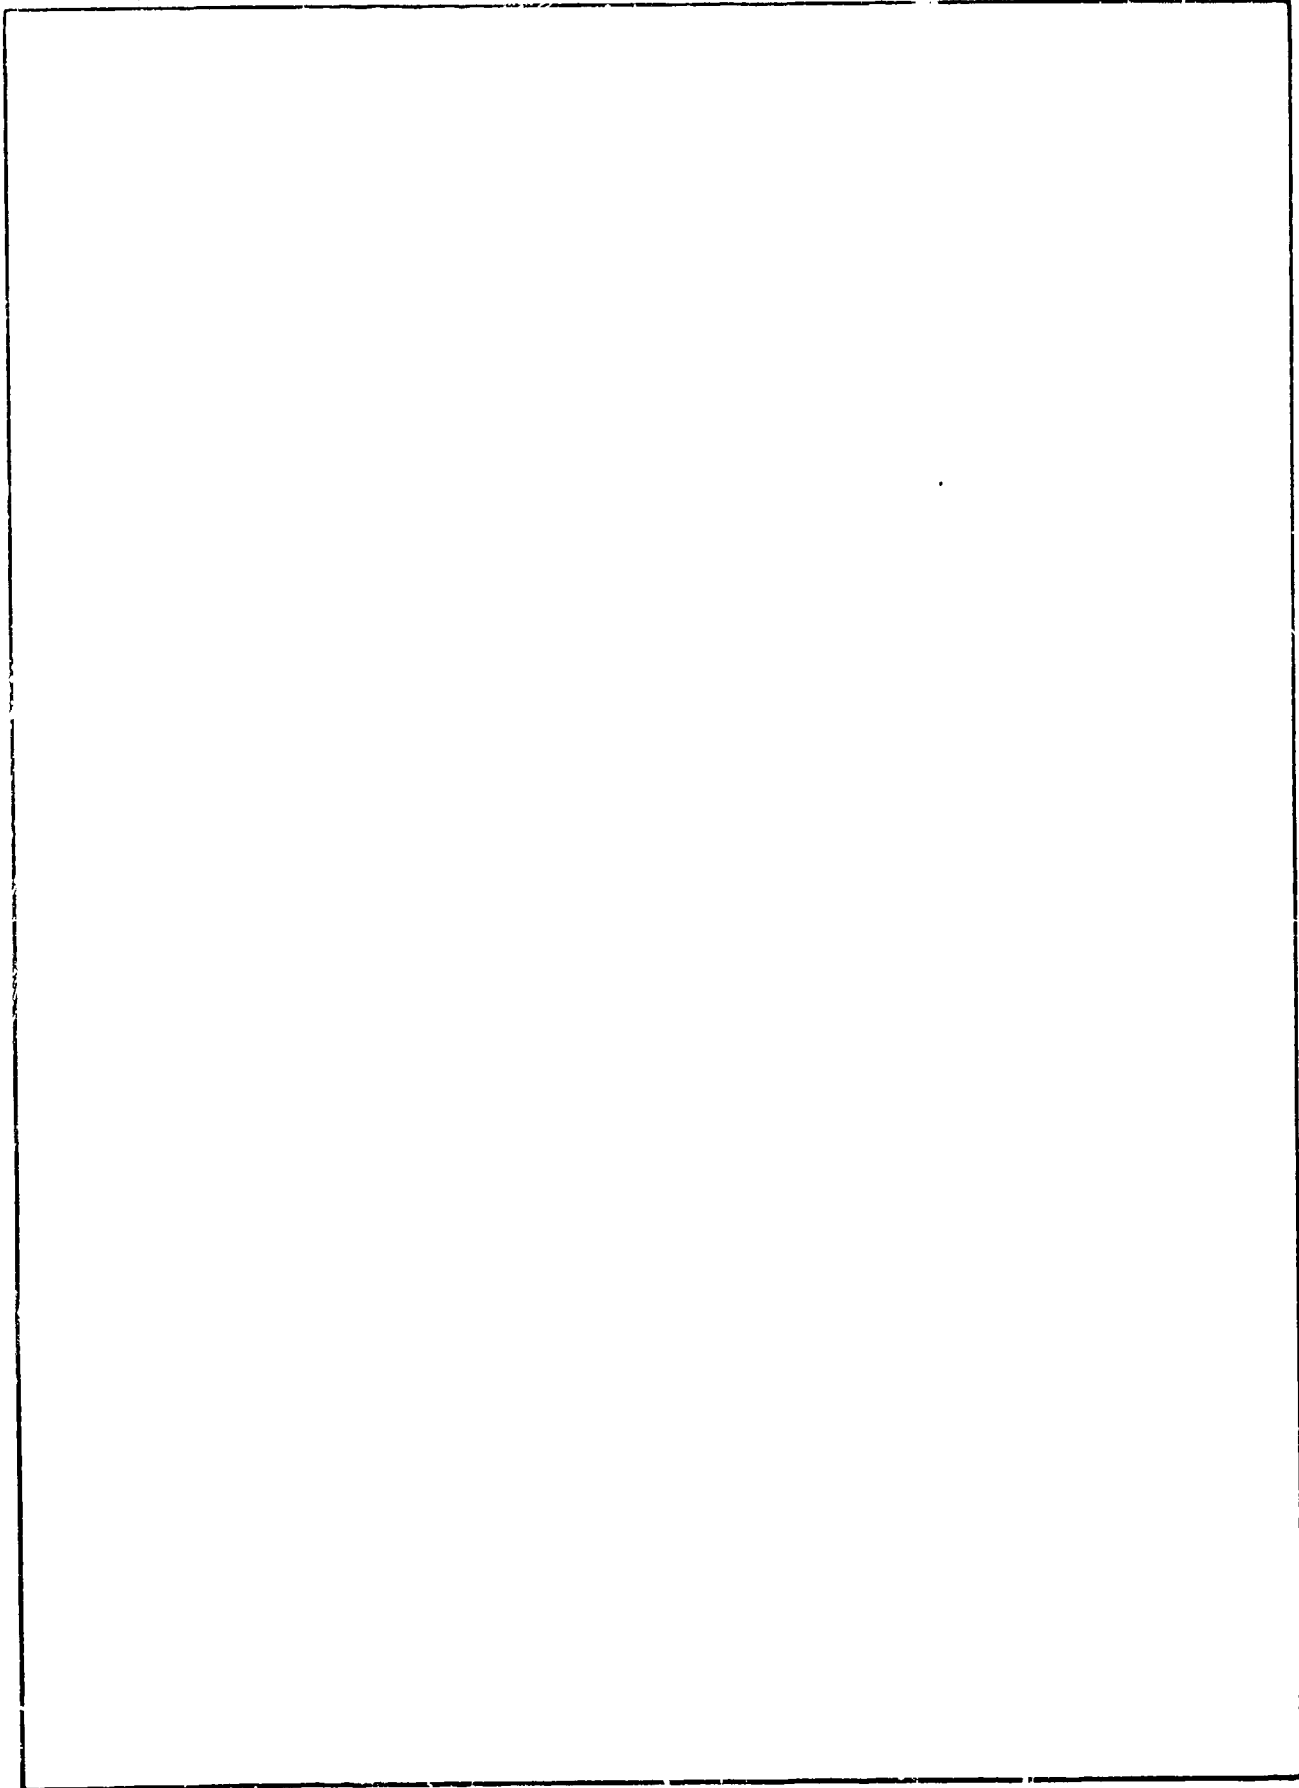

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

NADC-76274-30

ADDITIONAL NO.	
NTIS	White Section <input checked="" type="checkbox"/>
ORC	Ref Section <input type="checkbox"/>
UNCLASSIFIED	
BY	
DISTRIBUTION KEY	
FILE	AVAIL
A	

LIBRARY

SUMMARY

INTRODUCTION

Electrical connector shell corrosion has been a recurring problem in naval aircraft. The aluminum alloy shells corrode under the currently used coating, electroless nickel. Eventually, the coating lifts and breaks under the force of corrosion products and corrosion continues at a faster rate until a good part of the aluminum is eaten away even though the nickel coating itself is not corroded. A more corrosion resistant coating is needed to prevent failures of this type. This report covers an attempt to find a better coating for use up to 200°C.

Standardized panels of 6061-T6 aluminum alloy were used for this work rather than actual connector hardware because of the variety and configurational complexity of the connector types involved.

This investigation was authorized by AIRTASK NO. WF 54-593-201, Work Unit No. ZM 301.

SUMMARY OF RESULTS

Results of cyclic heating corrosion tests indicate that cadmium over electroless nickel protects 6061 aluminum alloy through the full test period (25 cycles of 16 hours at 200°C followed by 32 hours in 5% salt spray) with almost no pitting. For good protection, the minimum total thickness of the coating system was found to be 17.8 μm (.0007"). Either layer could be as thin as 5.1 μm (.0002") provided the other layer made up the remaining thickness to make a total of 17.8 μm (.0007"). It was also found that a coating cycle consisting of electroless nickel plate, bake one hour at 149°C, cadmium plate, chromate treat, and bake one hour at 149°C, was required for best results, since some coatings that met the thickness requirements failed if they were not baked. Thick cadmium, 25.4 μm (.001"), with a chromate coating also shows good protection in this test, while thinner cadmium coatings fail in less than 25 cycles. The best strike coating for cadmium was found to be the copper strike. Cadmium or bronze strikes were considered to be unsatisfactory. The electroless nickel "strike" (actually 2.5 μm (.0001") thick) was a great improvement over the others, but still failed one panel in less than 25 cycles. Electroless nickel alone failed in 11 cycles or less in all thicknesses tested up to 25.4 μm (.001").

Nickel-cadmium (chromated and baked) provided good protection to the basis metal during SO₂-salt spray exposure for 168 hours, showing some blistering but no pitting. Cadmium was pitted and corroded and electroless nickel failed very badly. Similar tests with cadmium and nickel-cadmium in standard 5% salt spray showed similar results in that scribed panels exhibited more corrosion in cadmium plated panels than in nickel-cadmium plated panels.

Results of dissimilar metal tests were not very informative (168 hours in 5% salt spray). Corrosion between bare 7075-T6 and the various coated panels was not much different from corrosion between bare 6061-T6 and bare 7075-T6

aluminum alloys. Results with coated panels coupled with titanium 6Al-4V alloy showed slightly more pitting along the edges of the joined panels, but minor corrosion otherwise.

Electroless nickel looked good in extended baking (100 hours at 200°C) followed by 500 hours of salt spray exposure, a finding contrary to service experience. Cadmium was pitted in thicknesses less than 25.4 μm (.001"), while only one of three panels showed more than six pits for the 25.4 μm coating. Nickel-cadmium again passed this test with only one distinct pit on one panel and very general corrosion and darkening otherwise (no pits).

CONCLUSIONS

1. Of the coatings tested, cadmium over electroless nickel offers the best protection to 6061-T6 aluminum alloy.
2. Baking is necessary after each layer of a nickel-cadmium coating is applied to assure good adhesion and corrosion resistance.
3. Electroless nickel is an unsatisfactory coating for the corrosion protection of 6061-T6 aluminum alloy.
4. Cadmium coating, 25.4 μm thick, offers the second best protection to 6061 although this coating is easier to scratch than nickel-cadmium and corrodes more readily in the scratched area.
5. Cyclic corrosion testing is a satisfactory method for estimating service behavior of coatings for electrical connectors.
6. With few exceptions, if a coating does not fail in 10 cycles or less it will not fail in 25 cycles.
7. Results of SO₂-salt spray exposure correlate well with service experience.
8. Results of 100 hours of heating at 200°C followed by 500 hours in salt spray do not correlate with service experience.
9. Thin cadmium coatings (Class 3, Type II, QQ-P-416) protect aluminum poorly in all the tests.

RECOMMENDATIONS

Based on the work conducted in this investigation, it is recommended that:

1. The coating system for aluminum alloy connector shells of the 200°C class be changed to cadmium over electroless nickel with a combined thickness of 17.8 μm (.0007") minimum and a thickness of cadmium ranging from 5.1 to 12.7 μm (.0002"-.0005") or more.

2. A ten cycle corrosion test be adopted for specification testing with each cycle consisting of 16 hours at 200°C followed by 32 hours in 5% salt spray.
3. Consideration be given to increasing the thickness requirement of connectors intended for low temperature service (85-125°C) from Class 3 of QQ-P-416, to Class 1, or the finish requirement of Recommendation 1.

TABLE OF CONTENTS

	<u>Page No.</u>
SUMMARY	
Introduction	1
Summary of Results	1
Conclusions.	2
Recommendation	2
LIST OF TABLES.	5
LIST OF FIGURES	5
BACKGROUND	6
TEST METHODS	
Cyclic Testing	6
Scribed Panel Tests.	7
Dissimilar Metal Tests	7
Heating - Exposure Testing	7
RESULTS AND DISCUSSION.	8
APPENDIX A.	A-1
APPENDIX B.	B-1

LIST OF TABLES

	<u>Page No.</u>
TABLE I	Cyclic Corrosion Test Results. 9
TABLE II	Scribed Panel Test Results - SO ₂ Salt Spray. 16
TABLE III	Scribed Panel Test Results - 5% Salt Spray 19
TABLE IV	Dissimilar Metal Test Results. 20
TABLE V	Long Cycle Test Results. 23

LIST OF FIGURES

Figure 1.	Cyclic Heating/Corrosion Results - Cadmium Coatings Over a Bronze Strike. 10
Figure 2.	Cyclic Heating/Corrosion Results - Cadmium Coatings Over a Copper Strike. 11
Figure 3.	Cyclic Heating/Corrosion Results - Electroless Nickel Coatings 12
Figure 4.	Cyclic Heating/Corrosion Results - Electroless Nickel Coatings 13
Figure 5.	Cyclic Heating/Corrosion Results - Electroless Nickel, Bake, Cadmium, Chromate, Bake 14
Figure 6.	Results of 68 hr SO ₂ -Salt Spray Exposure. 17
Figure 7.	Electroless Nickel .001" Over 6061 Aluminum Alloy - 168 hrs Exposure to SO ₂ -Salt Spray 18
Figure 8.	Electroless Ni-Cadmium Coatings and Bare 6061-T6 Aluminum Alloy Coupled to 7075-T6 Aluminum Alloy - 168 hrs in 5% Salt Spray 21
Figure 9.	Electroless Ni-Cadmium Coatings Coupled to 6Al 4V Titanium Alloy - 168 hrs in 5% Salt Spray 22

BACKGROUND

A considerable number of corrosion problems with electrical connector shells have been reported by field activities. A preliminary investigation of these failures indicated that the greatest number were encountered with aluminum shells designed for use at temperatures up to 200°C. Most of the connectors in this class (roughly 90%) are 6061 aluminum alloy; most are coated with electroless nickel. About 10% are aluminum casting alloys such as alloy 380 of QQ-A-591d. Coating thicknesses vary from about 12.7 μm (.0005") to slightly more than 25.4 μm (.001"). Failures have been in the form of severe undercutting and lifting of the electroless nickel coating while the base metal, which is anodic to the coating, corrodes away underneath. The 6061 aluminum alloy is resistant to corrosion without a coating and would probably be protected well by a simple MIL-C-5541, Class 3, chemical conversion coating, but the aluminum is subject to seizing and galling and will not function on threaded connectors. The number of coatings that will perform well at 200°C is small, since the coatings must be electrically conductive. If it were not for this requirement, hard anodizing (MIL-C-8625, Type III) or even dichromate-sealed, sulfuric acid anodizing (MIL-C-8625, Type II) would serve. The newer metallic-ceramic coatings with low temperature cures might also be protective, but they are non-conductive unless higher curing temperatures (800°F or higher) are used. The most promising coatings appeared to be thicker cadmium coatings (17.8-25.4 μm (.0007"- .001:)), or variations of a duplex electroless nickel-cadmium coating. It was also considered that strike coatings, other than the conventional copper strike employed for plating aluminum, might provide improved corrosion resistance under cadmium overcoats.

TEST METHODS

CYCLIC TESTING

Electrical connectors of the type involved in corrosion problems heat up for short periods during operation and remain at ambient temperatures in the corrosive environment while the equipment is not operating. It was, therefore, considered that a cyclic heating-salt spray test would most closely simulate actual service. The cycle chosen for laboratory tests was 16 hours at 200°C followed by 32 hours in 5% salt spray (ASTM B117-73). Initial screening was conducted using this cycle and 48.3 x 97.5 x 3.2 mm (2" x 4" x 1/8") panels of 6061-T6 aluminum alloy. Tests were discontinued when six pits or conspicuous blistering appeared on the panels. In some cases, the appearance of very small blisters was recorded, but testing was continued until six pits formed. Testing was stopped after twenty-five cycles (a total of 200 hours at 200°C and 800 hours in salt spray), an arbitrary criterion for excellent protection. Three principal groups of coated panels were tested:

- (1) Cadmium coatings over bronze, copper, electroless nickel and cadmium strikes, respectively. These coatings were 5.1, 7.5, and 12.7 μm (.0002, .0003 and .0005") thick corresponding to the three classes in

Specification QQ-P-416C. Additionally, two thicker cadmium coatings, 17.8 and 25.4 μm (.0007 and .001") over a copper strike were tested in this group. All cadmium coatings were chromate coated.

(2) Electroless nickel only. This group included single and duplex coatings of proprietary coatings designated Electroless Nickel I, II and III, respectively. The proprietary coatings were applied by the plating bath manufacturer. All other electroless nickel was applied in-house over a zincate immersion coating. Coating thicknesses were 12.7 and 25.4 μm (.0005 and .001").

(3) Electroless nickel plus cadmium and a chromate conversion coating. Most of these coatings were baked at 149°C (300°F) for one hour after the electroless nickel layer was applied, and baked again after cadmium plating and chromate treating. Overall coating thickness ranged from 7.6 to 25.4 μm (.0003 to .001").

Additionally, bare 6061 aluminum alloy, MIL-C-5541B chemical conversion coating, and MIL-A-8625C, Type II, sulfuric acid anodize with a dichromate seal, were cyclic corrosion tested.

Three panels of each variable were tested with the exception of some of the proprietary electroless nickel coatings for which only one panel was available.

Plating conditions are given in Appendix A.

SCRIBED PANEL TESTS

Some of the most promising coatings were evaluated in these tests as well as some less protective coatings used for comparison. Coated 48.8 x 97.6 mm (2" x 4") panels were scribed with an "X" to the bare metal and exposed for 168 hours, one set in standard 5% salt spray and one in SO₂-salt spray. SO₂ is injected into the salt spray box four times a day creating a much more corrosive atmosphere. Appendix B gives details. This test has been found to produce corrosion in aluminum alloys that is very similar to the type encountered in naval aircraft service.

DISSIMILAR METAL TESTS

In an attempt to determine galvanic corrosion effects between the various coatings and 7075-T6 aluminum alloy, or 6 Al-4V titanium alloy, 25.4 x 97.6 mm (1" x 4") cleats of bare 7075 and bare 6-4 were bolted to the coated 50.8 x 97.6 mm (2" x 4") panels and exposed to 5% salt spray for 168 hours. The aluminum and titanium alloys chosen for the cleats are the ones most often used in airframes.

HEATING - EXPOSURE TESTING

A few of the coatings were tested using one extended cycle consisting of 100 hours at 200°C, followed by 500 hours in 5% salt spray. It was hoped that

this cycle would produce the same results obtained with many shorter cycles which are less convenient to run.

RESULTS AND DISCUSSION

Results of cyclic corrosion tests, given in Table I, Figures 1 through 4, indicate the types of failures encountered. The experiments with various strikes for cadmium indicate that only one of the strikes, electroless nickel, provides a better protective system than the conventional copper strike. It should be noted, however, that this "strike" was actually $2.5 \mu\text{m}$ (.0001") thick, which is thicker than normal for strike coatings. Adhesion obtained with the cadmium strike, given in ASTM B253, was very poor. Coatings blistered and peeled after one cycle. Based on galvanic compatibility, this strike should have been the best. The bronze strike resulted in excellent adhesion, but poor cyclic corrosion behavior. Cadmium coatings up to $12.7 \mu\text{m}$ (.0005") thick pitted in less than six cycles with the exception of the coatings applied over an electroless nickel strike. It was thought that thicker cadmium coatings (copper strike), $17.8 \mu\text{m}$ (.0007") and $25.4 \mu\text{m}$ (.001"), might withstand the test better. The $25.4 \mu\text{m}$ (.001") coating did withstand the full twenty five cycles, but the $17.8 \mu\text{m}$ (.0007") coating did not. It failed in 5, 8, and 13 cycles, respectively, on the three test panels.

Twenty-three electroless nickel coated panels failed in from one to eleven cycles. Many of these failures appeared to be by a combination of severe blistering and pitting. Coating thicknesses ranged from $12.7 \mu\text{m}$ (.0005") to $25.4 \mu\text{m}$ (.001").

The best results in cyclic corrosion tests were obtained with $17.8 \mu\text{m}$ (.0007") of electroless nickel, followed by baking for one hour at 149°C , cadmium plating to a thickness of $7.6 \mu\text{m}$ (.0003"), chemical conversion coating (chromate), and baking again for one hour at 149°C (shown in Figure 5). When it was found, (1) that baking was needed to prevent blister formation (improve adhesion), and (2) that this coating showed no sign of pitting after twenty-five cycles of testing, a series of experiments was begun to find the limiting thicknesses of the respective layers. Results of this series of tests indicate that the nickel layer can go as low as $5.1 \mu\text{m}$ (.0002"), if the cadmium layer is $12.7 \mu\text{m}$ (.0005") or more, while the cadmium layer can be $5.1 \mu\text{m}$ (.0002") if the nickel layer is at least $12.7 \mu\text{m}$ (.0005").

The chromate coating for the nickel cadmium series was applied before baking rather than after. Some of the plating literature states that baking is detrimental to the corrosion resistance of chromate coatings. This difference is of little practical importance, however, when the connectors are intended for use at 200°C , and baking does result in the darker coatings required for some applications. If the connectors are to be used at lower temperatures, baking should be completed before chromating.

TABLE I

CYCLIC CORROSION TEST RESULTS

(One cycle = 16 hrs at 200°C, 32 hrs in 5% salt spray)

COATING SYSTEM	CYCLES TO FAILURE	
	Blister	Pits ^a
STRIKES FOR CADMIUM *		
Copper Strike, 5.1 μm (.0002") Cadmium	N, N, N	1, 3, 3
" " 7.6 μm (.0003") "	1, 1, 2	2, 2, 2
" " 12.7 μm (.0005") "	N, N, N	4, 5, 15
" " 17.8 μm (.0007") "	N, N, N	5, 9, 13
" " 25.4 μm (.001") "	N, N, N	25, 25, 25 ***
Electroless Nickel Strike, 5.1 μm (.0002") Cadmium	2, 2, 9	4, 6, 25 ***
" " 7.6 μm (.0003") "	4, 4, 4	6, 23, 25 ***
" " 12.7 μm (.0005") "	2, 2, 4	25, 25, 23 ***
Cadmium Strike, 5.1 μm (.0002") Cadmium	1, 1, 1	1, 1, 1
" " 7.6 μm (.0003") "	1, 1, 1	1, 1, 1
" " 12.7 μm (.0005") "	1, 1, 1	1, 1, 3
Bronze Strike, 5.1 μm (.0002") Cadmium	N, N, N	2, 2, 2
" " 7.6 μm (.0003") "	N, N, N	2, 2, 2
" " 12.7 μm (.0005") "	N, N, N	2, 2, 2
ELECTROLESS NICKEL ONLY		
12.7 μm (.0005") Electroless Nickel	4, 4, N	4, 4, 25 ***
25.4 μm (.001") Electroless Nickel, baked 1 hr at 149°C (300°F)	N, N, N	5, 6, 19
10.7 μm (.0004") Electroless Nickel I over	N, N, N	1, 1, 1
2.5 μm (.0001") Electroless Nickel II	N, N, N	1, 1, 1
22.9 μm (.0009") Electroless Nickel I over	N, N, N	1, 1, 1
2.5 μm (.0001") Electroless Nickel II	N, N, N	1, 1, 1
12.7 μm (.0005") Electroless Nickel III over	N, N, N	3, 3, 3
2.5 μm (.0001") Electroless Nickel II	N, N, N	3, 3, 3
22.9 μm (.0009") Electroless Nickel III over	N, N, N	3, 6, 6
2.5 μm (.0001") Electroless Nickel II	N, N, N	3, 6, 6
12.7 μm (.0005") Electroless Nickel I	N	3
25.4 μm (.001") " " I	N	4
12.7 μm (.0005") Electroless Nickel II	N	3
25.4 μm (.001") " " II	N	4
12.7 μm (.0005") Electroless Nickel I: I	N	7
25.4 μm (.001") " " III	N	11
ELECTROLESS NICKEL PLUS CADMIUM *		
12.7 μm (.0005") Electroless Nickel, no Bake,	N, N, N	2, 25, 25 ***
5.1 μm (.0002") Cadmium, No Bake	1, 1, 2	4, 4, 4
7.6 μm (.0003") Cadmium		
5.1 μm (.0002") Electroless Nickel, 149°C Bake,	N, N, N	2, 2, 6
5.1 μm (.0002") Cadmium, 149°C Bake	N, N, N	5, 5, 10
7.6 μm (.0003") " " "	N, N, N	25, 25, 25 ***
12.7 μm (.0005") " " "	N, N, N	25, 25, 25 ***
12.7 μm (.0005") Electroless Nickel, 149°C Bake,	N, N, N	25, 25, 25 ***
5.1 μm (.0002") Cadmium, 149°C Bake	N, N, N	25, 25, 25 ***
7.6 μm (.0003") " " "	N, N, N	25, 25, 25 ***
12.7 μm (.0005") " " "	N, N, N	25, 25, 25 ***
17.8 μm (.0007") Electroless Nickel, 149°C Bake,	N, N, N	25, 25, 25 ***
5.1 μm (.0002") Cadmium, 149°C Bake	N, N, N	25, 25, 25 ***
7.6 μm (.0003") " " "	N, N, N	25, 25, 25 ***
12.7 μm (.0005") " " "	N, N, N	25, 25, 25 ***
CHEMICAL FILM		
MIL-C-5541B, Class B	N, N, N	25, 25, 25 ***
SULFURIC ACID ANODIZE		
MIL-A-8625C, Type II	N, N, N	25, 25, 25 ***
BARB 6021-14 ALUMINUM		
	General corrosion - does not pit	25, 25, 25 ***

^a all cadmium coatings were chromate conversion coated
^{oo} Cycles to failure by pitting. Six pits constitute failure.
^{***} No failure. Test discontinued after 25 cycles.

N = No blistering of the coating

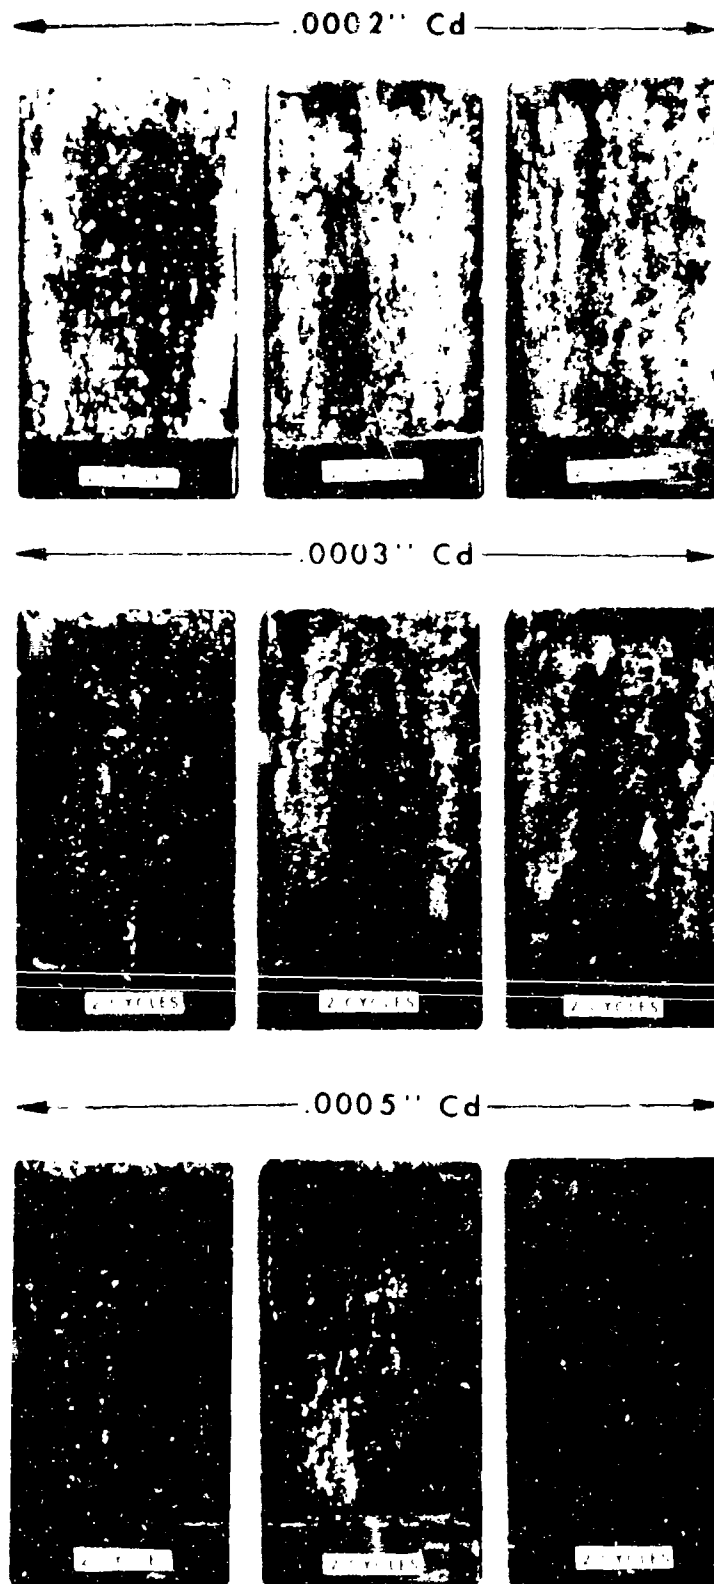


Figure 1. CYCLIC HEATING/CORROSION RESULTS
Cadmium Coatings over a Bronze Strike

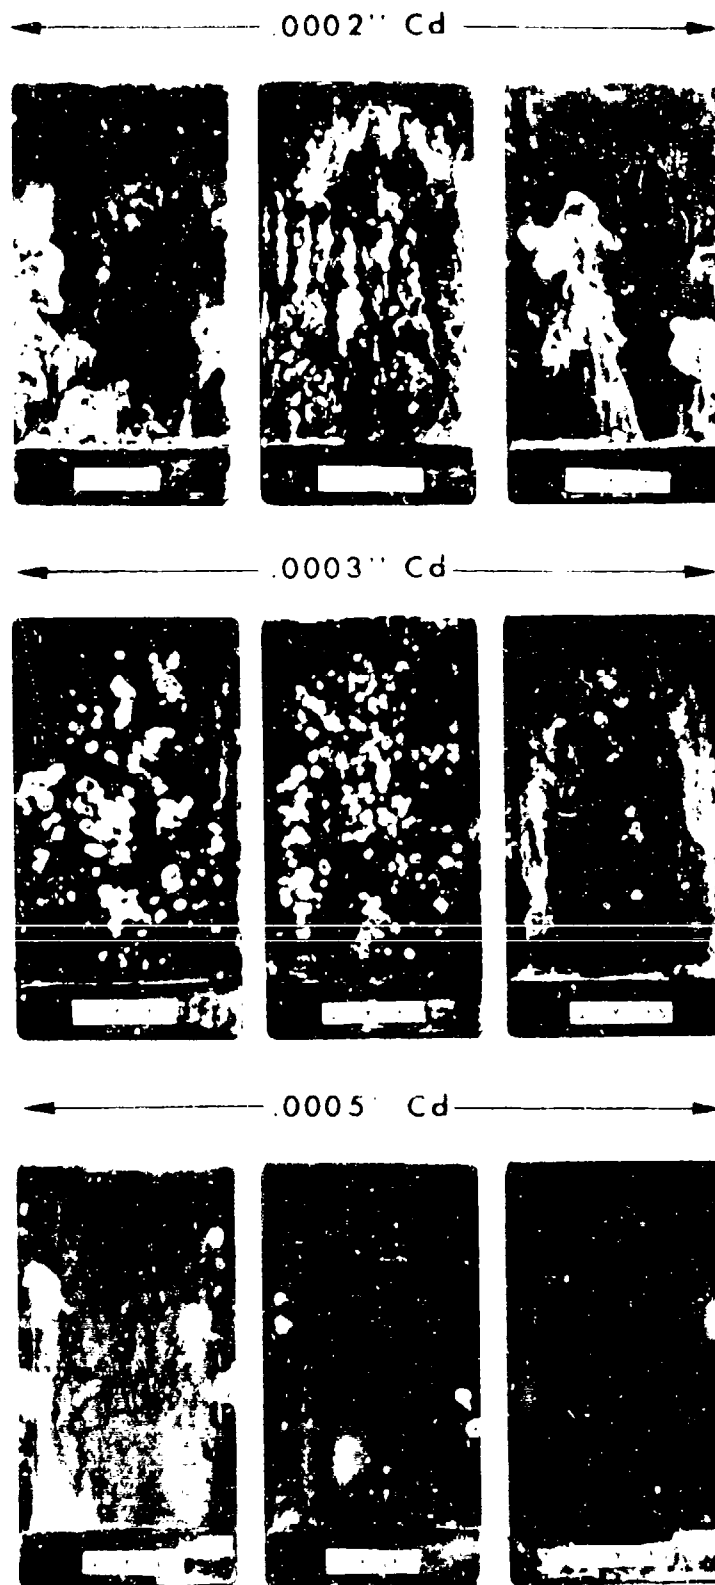


Figure 2. CYCLIC HEATING/CORROSION RESULTS
Cadmium Coatings Over a copper Strike

* This panel was returned to
test and failed in 15 cycles



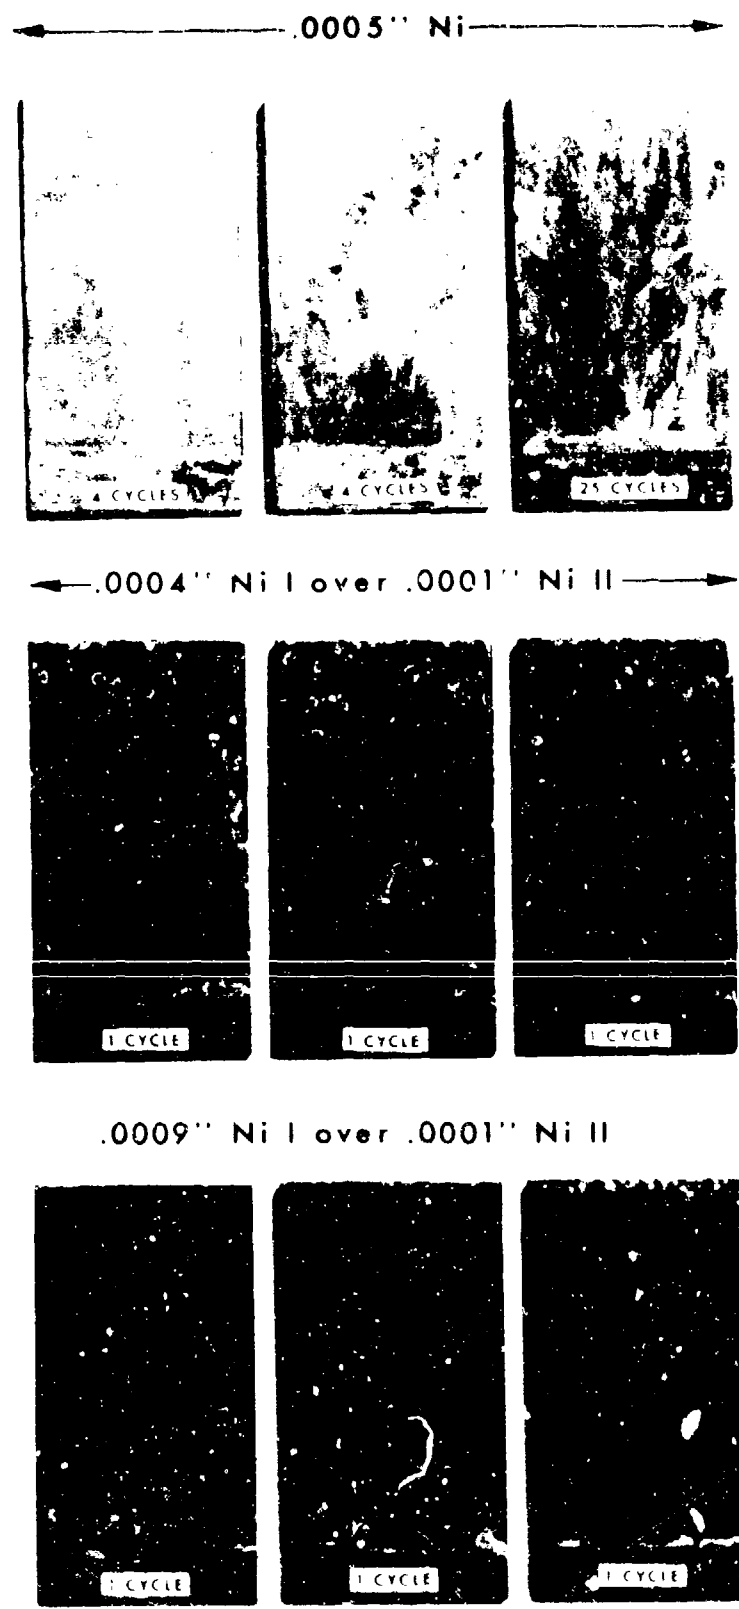


Figure 3. CYCLIC HEATING/CORROSION RESULTS
Electroless Nickel Coatings

← .0005" Ni III over .0001" Ni II →

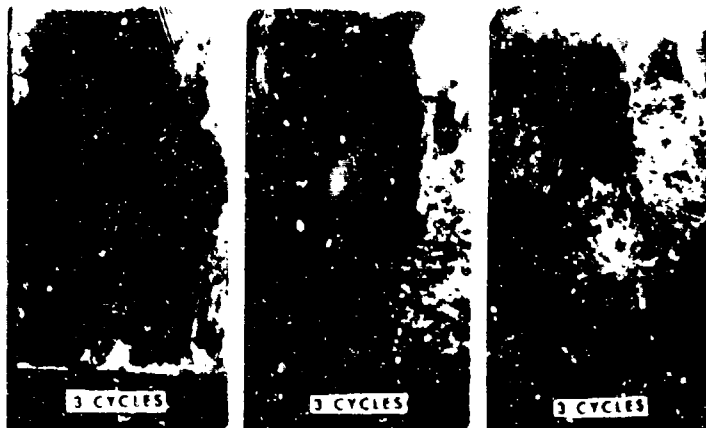

← .0009" Ni III over .0001" Ni II →

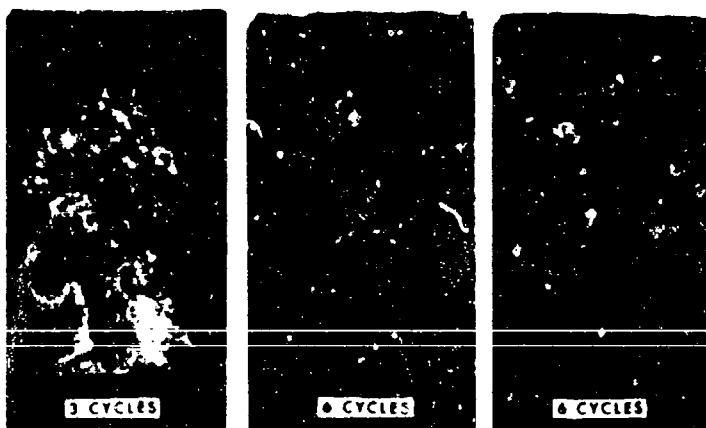

← .001" Ni Baked 1 hr, 300°F →

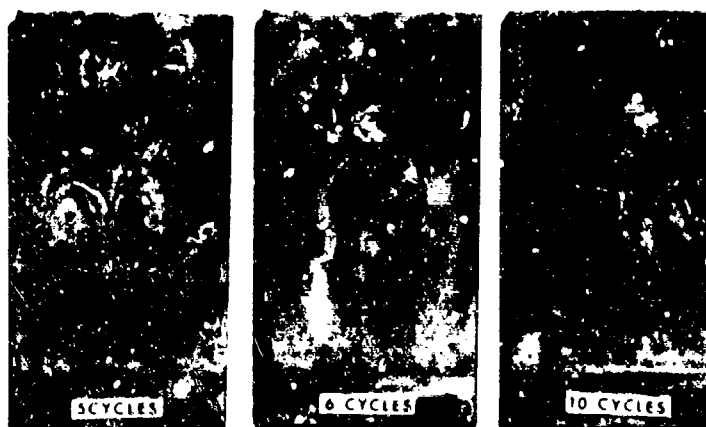


Figure 4. CYCLIC HEATING/CORROSION RESULTS
Electroless Nickel Coatings

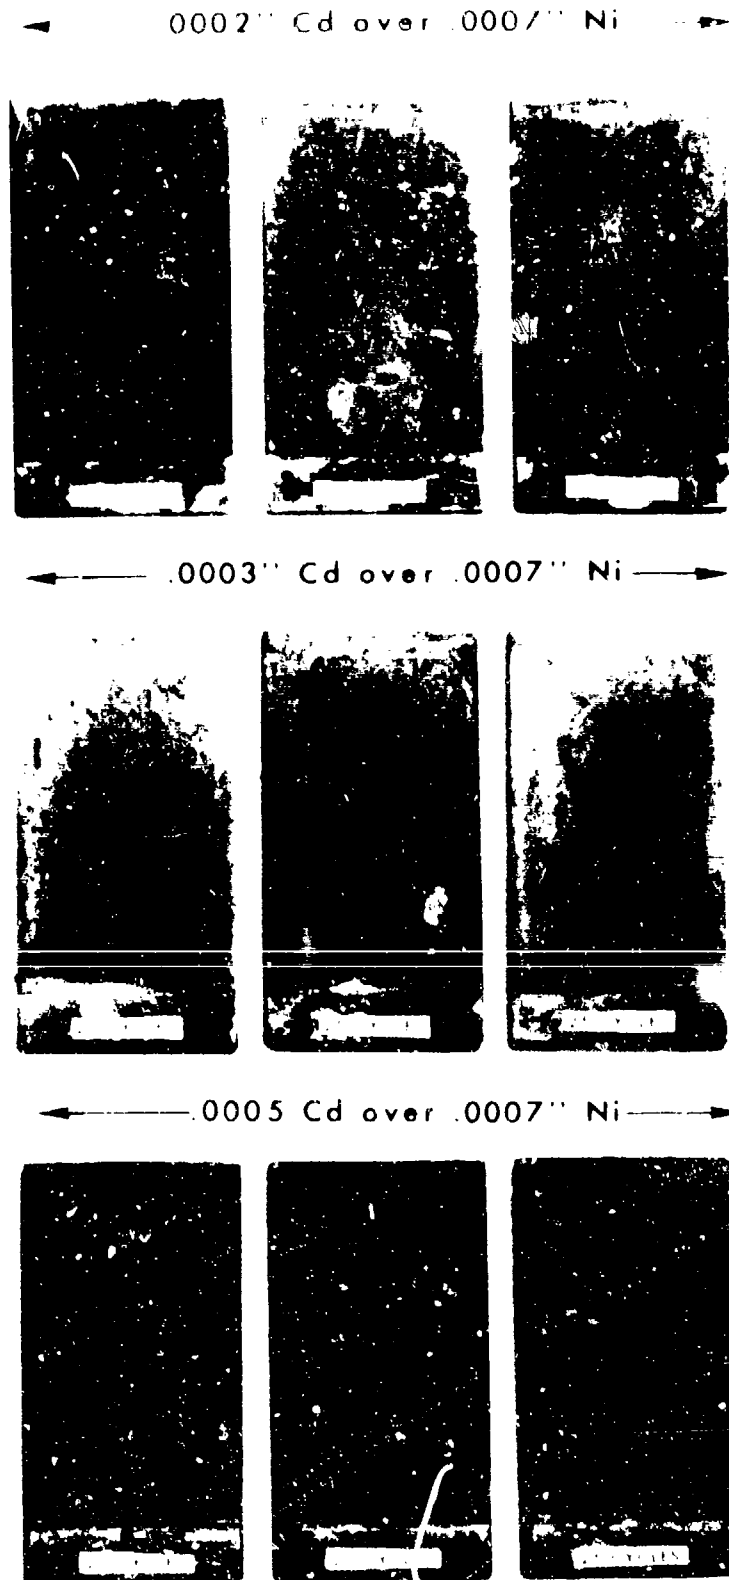


Figure 5. CYCLIC HEATING/EROSION RESULTS
Electroless Nickel, Bake, Cadmium, Chromate Bake

As indicated earlier in this report, 6061 aluminum alloy uncoated, MIL-C-5541B, Class 3 coated, or sulfuric acid anodized with a dichromate seal all withstood twenty-five cycles of testing. The anodized panels showed only one pit in one panel, while the bare and conversion coated panels show general but very shallow pitting not considered cause for rejection.

Results of scribed panel tests in SO_2 -salt spray were striking. These are given in Table II and Figure 6, for the nickel-cadmium coating, thick cadmium, $25.4 \mu m$ (.001") and thick electroless nickel, $25.4 \mu m$. The electroless nickel appears to be intact in this photograph and it is. A better view of what has occurred is given in Figure 7. The nickel layer lifted off the underlying aluminum alloy and very severe attack of the aluminum took place. This is the condition reported for connectors in service. Some blistering occurred in the nickel-cadmium, but it was still protecting the aluminum at the end of the 168 hour exposure period. The cadmium showed considerable corrosion, especially in the scribe marks.

Scribed panel tests in the standard 5% salt spray agreed generally with the SO_2 -salt spray tests, but results were not as easily interpreted. Scribes in the nickel cadmium showed only a few pits as opposed to many pits in the cadmium coating. Results are given in Table III.

Dissimilar metal test results failed to show any outstanding differences in the behavior of electroless nickel-cadmium coatings and coatings of cadmium alone over a copper strike. In both cases, there was pitting along the edge of the cleat. Pitting was slightly more pronounced in the case of the titanium cleats, but still appeared to be only in the coating. Corrosion between the bare 7075 and bare 6061 aluminum alloys appears to be almost as bad as corrosion between the coated panels and the 7075 cleats. In all cases, the corrosion probably takes place by a combination of crevice and galvanic corrosion. Figures 8 and 9 illustrate some of the results and Table IV gives details.

The attempt to shorten cyclic testing times by substituting one extended cycle (100 hours at $200^\circ C$ followed by 500 hours in 5% salt spray) for the repeated short cycles was unsuccessful in that the results showed electroless nickel to be satisfactory when service experience indicates that it is not. Once again, nickel-cadmium passed the tests with no pitting, only a considerable darkening of the film. Thick cadmium ($25.4 \mu m$) showed some pitting, but was otherwise generally good. Thinner cadmium coatings failed. Results are given in Table V in greater detail.

Careful review of all the tests conducted indicates that the most rapid test method that gives meaningful results is the SO_2 -salt spray test. However, SO_2 -salt spray equipment is not generally available. It is, therefore, considered that the cyclic corrosion test is a better specification type test. This test could be shortened to ten cycles, if it were required that three specimens pass the test. The inadequacy of salt spray testing alone is at least suggested by the long cycle test (100 bake followed by 500 hour salt spray), in which electroless nickel appears to be satisfactory.

TABLE II

SCRIBED PANEL TEST RESULTS(SO₂ Salt Spray - 168 hr Exposure)

<u>Coating</u>	<u>Results</u>
Cadmium 5.0 μm (.0002") Copper Strike	Poor - all three panels corroded and pitted
Cadmium 17.8 μm (.0007") Copper Strike	Considerable corrosion - especially in scribes (three panels)
Cadmium 25.4 μm (.001") Copper Strike	Considerable corrosion - especially in scribes (three panels)
Electroless Nickel 17.8 μm (.0007") Cadmium 7.6 μm (.0003") (Baked after each layer)	Excellent by comparison with others - No pits, some blistering, much yellowing of coating. Some light white corrosion. Scribes good in all three
Electroless Nickel 25.4 μm (.001") (Baked 1 hr at 149°C)	Very poor - nickel lifted away from aluminum in one sheet. Aluminum badly corroded. All three panels the same.

MADC-76274-30

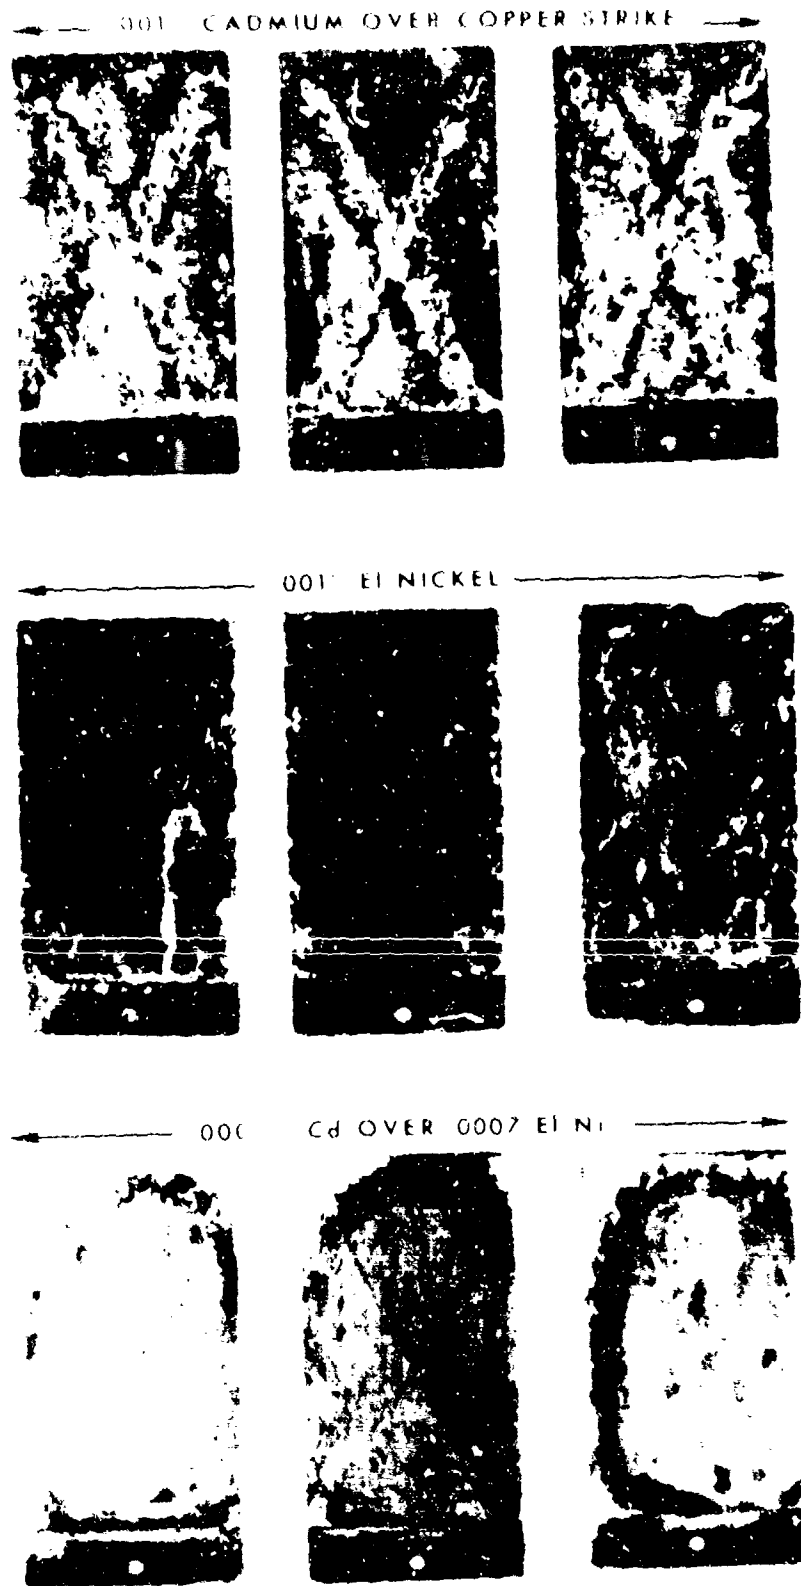


Figure 6. Results of 168 hour SO_2 -Salt Spray Exposure

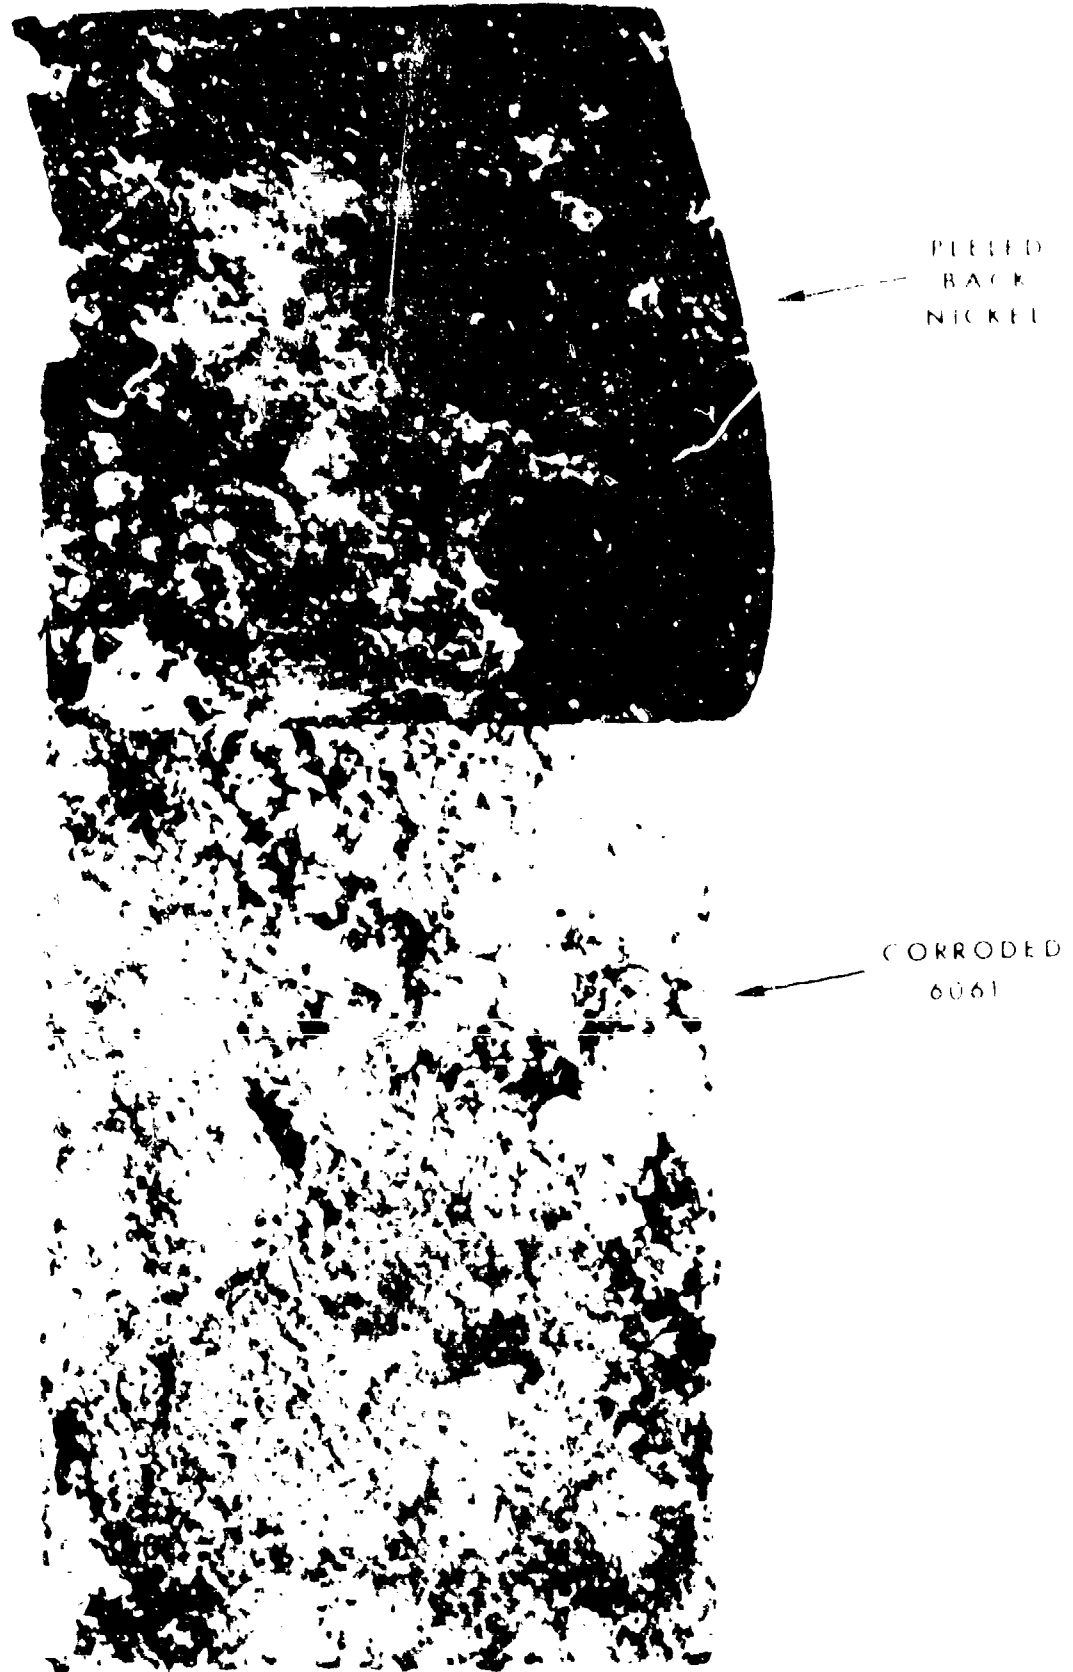


Figure 7. Electroless Nickel .001" over 6061 Aluminum Alloy - 168 hours Exposure to SO₂-Salt Spray

TABLE III

SCRIBED PANEL TEST RESULTS
(5% Salt Spray - 168 hr Exposure)

Coating	Results
* Cadmium 25.4 μ m (.001") Copper Strike	White corrosion fills $\frac{1}{2}$ to $\frac{1}{2}$ of the scribes. Pits are forming.
* MIL-C-5541 Chemical Film	Good - no pits, slight corrosion
* Sulfuric Acid Anodize	Good - no pits, very slight corrosion
** El Ni 5.0 μ m (.0002") Cadmium 5.0 μ m (.0002")	Some white corrosion, 3 pits
** El Ni 5.0 μ m (.002") Cadmium 7.6 μ m (.0003")	Good - slight white corrosion in scribe
** El Ni 5.0 μ m (.0002") Cadmium 12.7 μ m (.0005")	Good - very little white corrosion in scribe
** El Ni 12.7 μ m (.0005") Cadmium 7.6 μ m (.0003")	Good - little white corrosion
** El Ni 12.7 μ m (.0005") Cadmium 12.7 μ m (.0005")	Good - slight white corrosion
** El Ni 17.8 μ m (.0007") Cadmium 7.6 μ m (.0003")	Good - very slight white corrosion
** El Ni 17.8 μ m (.0007") Cadmium 12.7 μ m (.0005")	Good - very slight white corrosion
* Three panels of each	
** One panel of each - all baked after nickel coating and baked again after cadmium coating and chromating.	

TABLE IV

DISSIMILAR METAL TEST RESULTS7075-T6 ALUMINUM CLEATS ATTACHED TO COATED PANELS (168 hrs in Salt Spray)

<u>Coating</u>	<u>Panel</u>	<u>Cleat</u>
None - Control Panels	Good - some very slight pitting of faying surfaces	Some general corrosion faying surfaces
Cadmium 25.4 μm (.001")	Good - slight white corrosion lines at cleat edges. Very light corrosion of faying surfaces	Much general corrosion of faying surface
E1 Ni 5 μm (.0002") Cadmium 7.6 μm (.0003")	All generally the same - Good - white corrosion along edge lines and slight corrosion in faying surfaces (very shallow pitting)	Some light corrosion - very light pitting of faying surfaces in all cleats
E1 Ni 5 μm (.0002") Cadmium 12.7 μm (.0005")		
E1 Ni 12.7 μm (.0005") Cadmium 7.6 μm (.0003")		
E1 Ni 12.7 μm (.0005") Cadmium 12.7 μm (.0005")		
E1 Ni 17.8 μm (.0007") Cadmium 5 μm (.0002")		
E1 Ni 17.8 μm (.0007") Cadmium 7.6 (.0003")		
E1 Ni 17.8 μm (.0007") Cadmium 12.7 μm (.0005")		

6 Al 4V TITANIUM CLEATS ATTACHED TO COATED PANELS (168 hrs in Salt Spray)
(None of the Cleats were corroded)

Cadmium 25.4 μm (.001")	Good - some very small pits along cleat edge	
E1 Ni 5 μm (.0002") Cadmium 7.6 μm (.0003")	All panels similar - slight white corrosion along cleat edge lines with very slight attack of faying surfaces. The last panel in the series was slightly better than the rest.	
E1 Ni 5 μm (.0002") Cadmium 12.7 μm (.0005")		
E1 Ni 12.7 μm (.0005") Cadmium 7.6 μm (.0003")		
E1 Ni 12.7 μm (.0005") Cadmium 12.7 μm (.0005")		
E1 Ni 17.8 μm (.0007") Cadmium 7.6 μm (.0003")		
E1 Ni 17.8 μm (.0007") Cadmium 12.7 μm (.0005")		
E1 Ni 17.8 μm (.0007") Cadmium 5 μm (.0002")		Distinct pitting along one cleat edge. Remainder same as others.

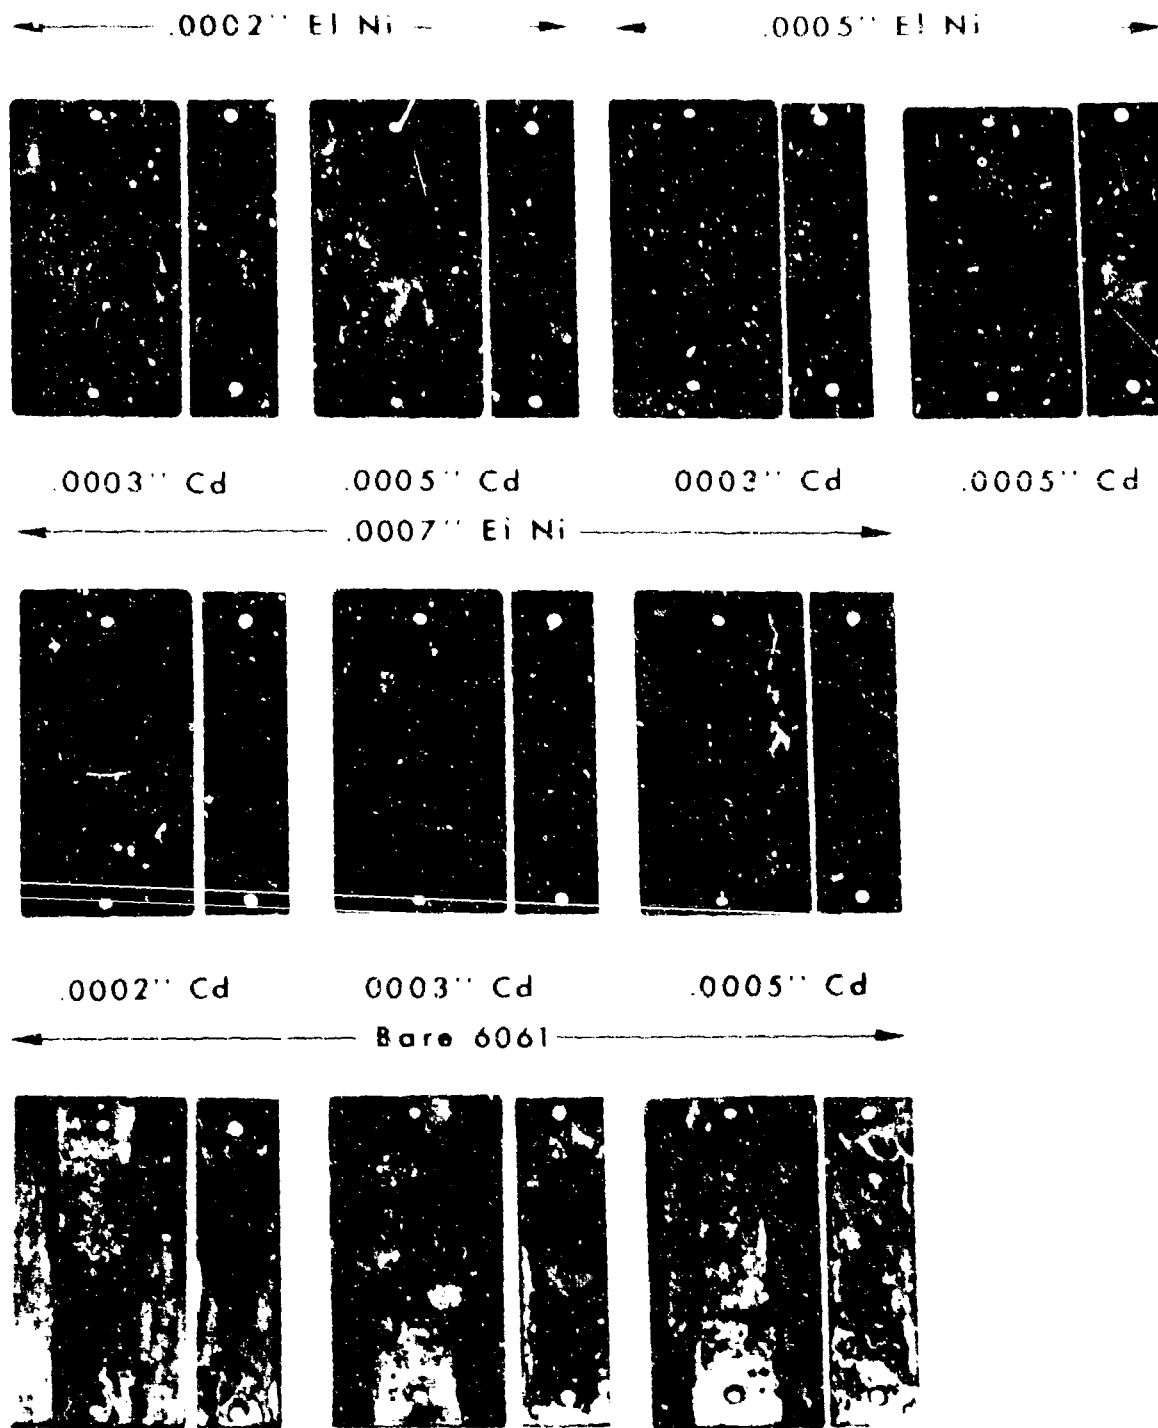


Figure 8. Electroless Ni-Cadmium Coatings and Bare 6061-T6 Aluminum Alloy Coupled to 7075-T6 Aluminum Alloy - 168 hrs 5% Salt Spray

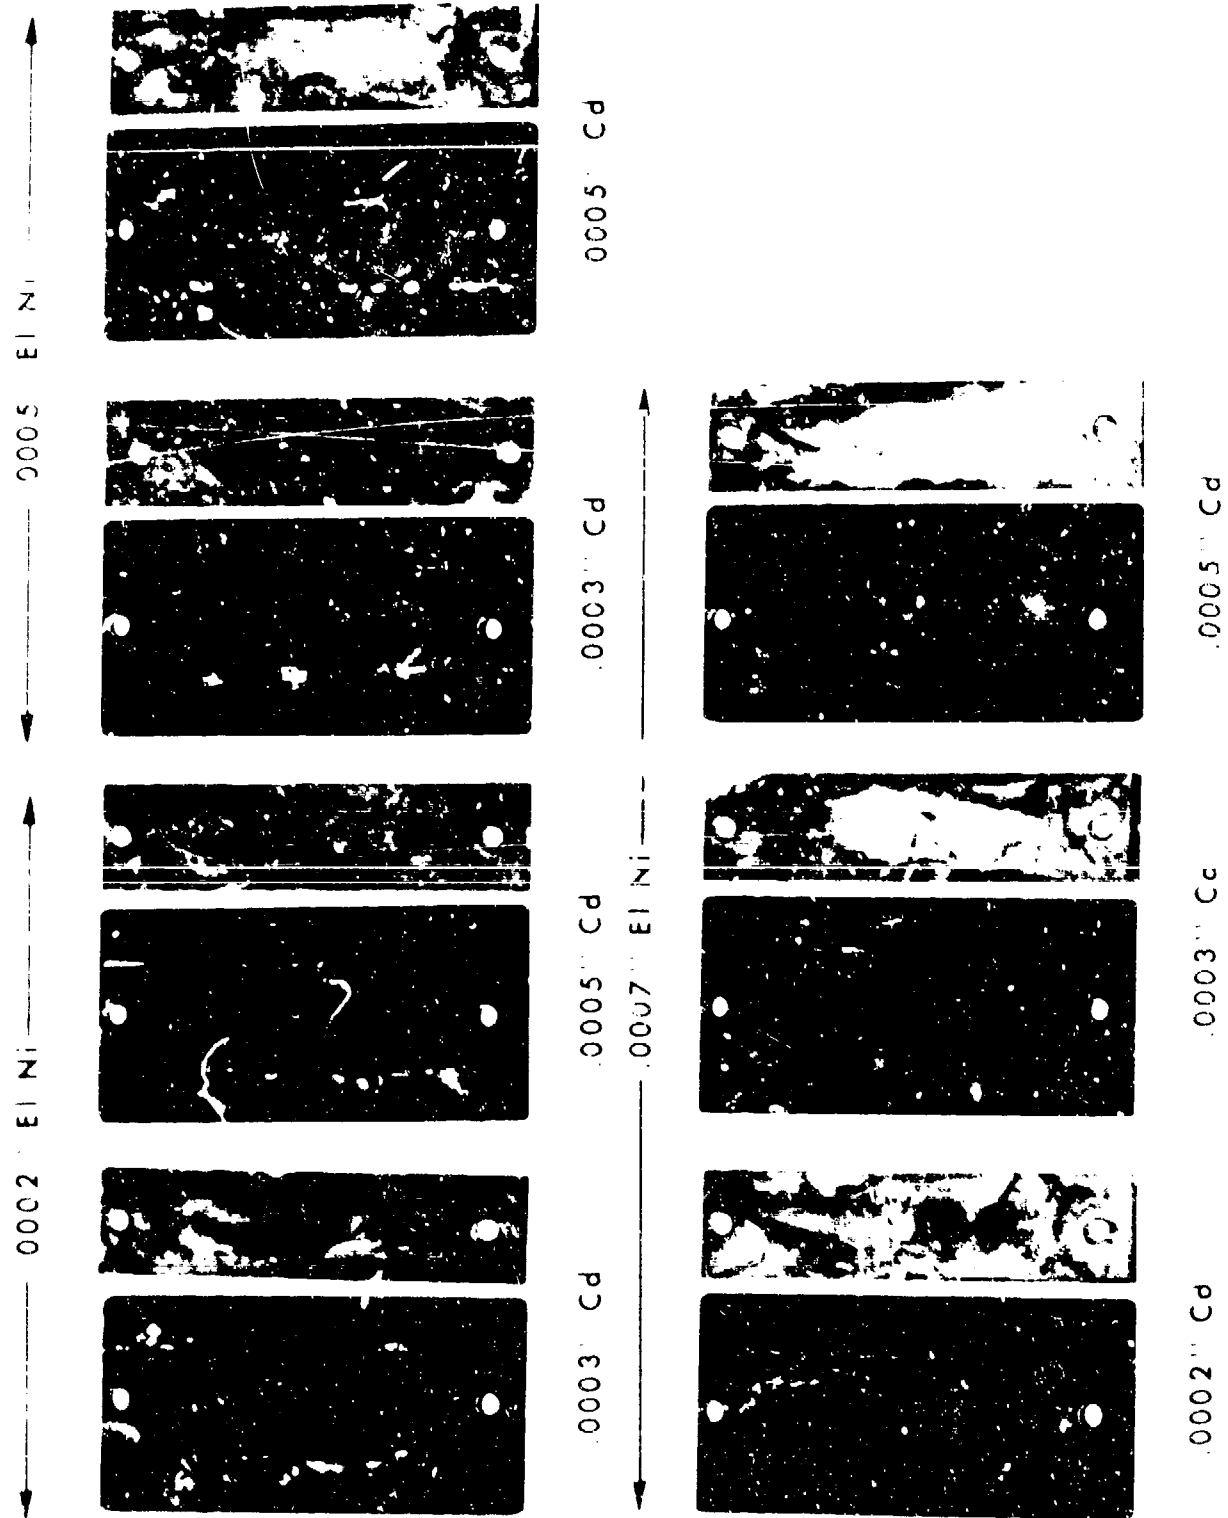


Figure 9. Electroless Ni-Cadmium Coatings Coupled to 6Al-4V-Titanium Alloy - 158 hrs in 5% Salt Spray

TABLE V

LONG CYCLE TEST RESULTS
(100 hrs at 200°C plus 500 hrs in 5% Salt Spray)

<u>Coating</u>	<u>Results</u>
5.1 μm (.0002") Cadmium * over Copper Strike	General heavy white corrosion over all three panels - very bad
17.8 μm (.0007") Cadmium * over Copper Strike	Considerable pitting in all panels
25.4 μm (.001") Cadmium * over Copper Strike	One panel more than six pits; one, three; one, edge pits. All show general light white corrosion
17.8 μm (.0007") Electroless Nickel, Bake, 7.6 μm (.0003") Cadmium, Chromate, Bake	Good - one pit on one panel - general darkening of panel centers
25.4 μm (.001") Electroless Nickel	Overall appearance good in all three

* All chromated

Some discussion of the definition of failure appears to be warranted. Failure, as defined by electronics engineers, appears to be non-functioning of the equipment. From an aircraft corrosion control standpoint, general pitting or blistering of a coating is considered failure. In a sense both definitions are probably correct. As long as the part performs its function, it has not failed. On the other hand, many manhours are spent trying to prevent further deterioration of corroded parts that still function and these manhours are not considered wasted because corroded connectors will ultimately fail mechanically or electrically, if corrosion is not stopped. The most reasonable solution is to apply finishes that will last the life of the aircraft. The corrosion test requirements of connector specifications, such as MIL-C-5015, are not stringent enough to assure good corrosion resistant finishes. It is for that reason that it is recommended that a more severe test, such as some form of cyclic corrosion test, replace the very loose requirements now in effect; (i.e., no exposure of basis metal due to corrosion that will affect performance after 48 hours of salt spray exposure). The requirement should also include a better criterion for evaluating finishes, such as the appearance of six pits or blistering of the coating.

While the work performed in this investigation was directed toward finding better coatings for service up to 200°C, it should be noted that QQ-P-416, Class 3, Type II cadmium plating (5.1 μm) performed poorly in all the tests. This poor behavior is probably caused by the galvanic effect between the conventional copper strike and the thin, porous cadmium layer, as well as between the copper and the basis metal. It is felt that consideration should be given to increasing the thickness requirement for low temperature classes of connectors from Class 3 to Class 1 (12.5 μm (.0005")) for better corrosion protection.

Some actual connector parts of both 6061 wrought aluminum alloy and 380 casting alloy have been coated with various systems and are being tested in both SO_2 -salt spray and cyclic heating-corrosion (5% NaCl). Early results indicate that the complex configuration of the shells (threads, projections, ridges, etc.) make early failure more likely than it is in panel testing. Additionally, some surfaces of the connectors are in a horizontal position during salt spray exposure, no matter how the parts are suspended, and these surfaces will be more severely attacked. Results of these tests will be reported as soon as they are completed.

MADC-76274-30

A P P E N D I X A

PLATING CONDITIONS

A P P E N D I X A

PLATING CONDITIONS

I PLATING CYCLE

- A. Non etch alkaline clean, 71-82°C (160-180°F), 10 min.
- B. Warm water rinse, 45-50°C (112-121°F)
- C. Mild etch, 60-64°C (140-147°F), 2-4 min
- D. Warm water rinse, 45-50°C (112-121°F)
- E. Cold water rinse
- F. Desmut, room temperature, 10-60 sec
- G. Double cold water rinse
- H. Modified zincate, room temperature, 1 min
- I. Cold water rinse, 1 min
- J. 50% HNO₃, 30-60 sec
- K. Cold water rinse, 1-2 min
- L. Modified zincate, 10 sec
- M. Cold water rinse, 1-2 min
- N. Strike or go directly to electroless nickel
- O. Cold water rinse
- P. Plate
- Q. Double cold water rinse
- R. Chromate treat cadmium coatings
- S. Double cold water rinse
- T. Dry

II CYCLE FOR ELECTROLESS NICKEL-CADMIUM

- A. Same as I - A through O
- B. Bake 1 hr at 149°C (300°F)
- C. Dip in 25% HCl, 5 sec
- D. Rinse
- E. Cadmium plate
- F. Rinse
- G. Chromate treat
- H. Rinse
- I. Dry
- J. Bake 1 hr at 149°C (300°F)

III PLATING SOLUTIONS

Zincate Immersion Bath per ASTM B253, Bath I
 Copper Strike per ASTM B253
 Cadmium Strike per ASTM B253

A P P E N D I X A

Bronze Strike

Proprietary - Alstan 80, 30 sec, 108 A/m² (10 A/ft²), 29°C
(85°F), followed by Alstan 71, 4 min, 323 A/m² (30 A/ft²),
29°C (85°F)

Cadmium Plate

Cadmium Oxide	30 g/l (4 oz/gal)
Sodium Cyanide	120 g/l (16 oz/gal)
Brightener	Udylite 53 as required
Room temperature	
Current density	215 A/m ² (20 A/ft ²)

Electroless Nickel

Proprietary - 10.5% phosphorus 82-88°C (180-190°F)

Non-Etch Alkaline Cleaner

Oakite 164	45-60 g/l (6-8 oz/gal)
	71-83°C (160-180°F)

Mild Etch Cleaner

Oakite 160	30 g/l (4 oz/gal)
	38-71°C (100-160°F)

Desmut (Proprietary chromate type)

Isoprep 188	120 g/l (16 oz/gal)
	Room temperature

Chromate Conversion Coating

Iridite No. 1	30 sec, room temperature
1 Part 1A	
1 Part 1B	
10 Parts water	

MADC-76274-30

A P P E N D I X B

SO₂ - SALT SPRAY
(SIMULATED AIRCRAFT CARRIER ENVIRONMENT)

A P P E N D I X B

SO₂ - SALT SPRAY
(SIMULATED AIRCRAFT CARRIER ENVIRONMENT)

APPARATUS:

Salt fog cabinet meeting requirements of ASTM recommended Practice B117-73, Appendix 1.

Test conducted in accordance with ASTM B117-73 with the following exceptions:

Tower Temperature	45.5°C ± 1
Cabinet Temperature	35°C ± 1
SO ₂ gas injection	- 1 hr/6hr cycle continuously
SO ₂ gas flow	- 25 cc/min

CONDITIONS IN COLLECTION BOTTLE
(Tested Weekly)

- (1) 1 to 2 ml/hr collection rate
- (2) pH - 1.8 - 2.5
- (3) Sp-gr - 1.025 - 1.040

D I S T R I B U T I O N L I S T

REPORT NO. NADC-76274-30

CONTINUED FROM BACK COVER

One each to:

Mike Kallio Vitro Labs (SKD-13) Silver Spring, MD 20910	M. H. Plofker RCA - MSRD Springfield, VA 22151	Rou Hubbard Sunbank Electronics Burbank, CA 91505
Al Vys Vitro Labs Silver Spring, MD 20910	Aubrey J. Rowe Litton/Ingersoll Pascagoula, MS 39567	Jerry Iacobucci Flight Connector Eawthorne, CA 90250
H. E. Braundiller Litton Data Systems Van Nuys, CA 91409	Steve Wedger Sperry Univac St. Paul, MN 55116	Lyle Johnson Matrix Science Corp Torrance, CA
E. R. Danosky Raytheon Co. (SSD) Portsmouth, R.I. 02871	R. Battle Bunker Ramo Amphenol Arlington, VA 22209	Joe Janasaka Bunker Ramo Amphenol Broadview, IL 60153
Bob Franc Litton Data Systems Pascagoula, MS 39567	Bert Bergerud Sunbank Electronics Burbank, CA 91505	Martin Lesser Tri Star Elec. Inc. Los Angeles, CA
Ray Haworth General Dynamics Electric Boat Groton, CT 06340	Joel Bouvier Bendix Sidney, NY 13838	John J. Mikulsky Raychem Menlo Park, CA 94025
Calvin Henk Honeywell Marine Sys. W. Covina, CA 91790	Gerry Burge Glenair, Inc. Glendale, CA 91201	Allen Nemetz Bunker Ramo Amphenol Broadview, IL 60153
Wayne F. Huff Interstate Electric Anaheim, CA 92805	G. H. Caval Sparks & Co. Bethesda, MD 20014	W. D. O'Hirok ITT Cannon Santa Ana, CA 92705
Don Kao Hughes Aircraft Fullerton, CA 92634	Edwin W. Durand Tri-Star Electric Santa Monica, CA	Gary Patterson G & H Santa Monica, CA
Joe Lemon Interstate Electric Anaheim, CA 92805	Don Galarowicz Deutech Co. Springfield, VA 22150	O. F. Raimondo General Cable Corp Union, NJ
Larry Mahoney Raytheon EDL Wayland, MA 01778	Elton Hallett Flexible Metal Hose Costa Mesa, CA 92626	Larry Schwartz Kern Engineering Fullerton, CA 92631
Robert E. North Sperry Univac St. Paul, MN 55116	Al Harman Stanford Applied Eng. Costa Mesa, CA 92626	H. Stone Bunker Ramo Amphenol Broadview, IL 60153
		Austin Daigle Consultant Los Alamitos, CA

D I S T R I B U T I O N L I S T

REPORT NO. NADC-76274-30

AIRTASK NO. WF 54-593-201
Work Unit No. ZM 301

	<u>No. of Copies</u>
NAVAIRSYSCOM (AIR 954)	10
2 for retention	1 for AIR 52031C
1 for ALM 320	2 for AIR 533D1B3
1 for AIR 5203	2 for AIR 50452
1 for AIR 52031	
NAVAIRSYSCOMREPLANT.	1
NAVAIRSYSCOMREPAC.	1
NAVAIREWORKFAC, Alameda (Code 340)	1
Jacksonville (Code 340)	1
Norfolk (Code 340)	1
North Island (Code 340)	1
Pensacola (Code 340)	1
Cherry Point (Code 340)	1
WPAFB (AFML/MXA) (AFLC/MGE), Ohio 45433.	2
ARMY ELECTRONICS COMMAND (Code DRSEL-ED-ET-2).	1
Fort Monmouth, New Jersey 07703	
NAVAIRDEVCCN rminster, PA 18974	37
3 for 813	1 for 30P7
2 for 30023	1 for 301
1 for 03	1 for 302
1 for 20	20 for 3022
1 for 30	1 for 303
1 for 40	1 for 304
1 for 50	1 for 305
1 for 60	
DDC.	12

CONTINUED ON INSIDE OF COVER