

AD-A037 677

NATIONAL MILITARY COMMAND SYSTEM SUPPORT CENTER WASH--ETC F/G 15/6  
THE NMCSSC QUICK-REACTING GENERAL WAR GAMING SYSTEM (QUICK). US--ETC(U)  
JAN 77

UNCLASSIFIED

NMCSSC-CSM-UM-9-74-VOL-4-

NL

1 of 1  
ADA037 677



END  
DATE  
FILMED  
4-77



**DEFENSE COMMUNICATIONS AGENCY**  
 COMMAND AND CONTROL  
 TECHNICAL CENTER  
 WASHINGTON, D. C. 20301

The NMCSSC Quick-Reacting General War  
 Gaming System (QUICK). Users Manual. ~~Volume IV~~  
 Volume IV. Sortie Generation Subsystem.  
 Change 2.

IN REPLY  
 REFER TO: C314

NMCSSC-CSM-UM-9-74-Vol-4-2

3 Jan ~~1977~~

TO: RECIPIENTS

SUBJECT: Change 2 to Users Manual CSM UM 9-74, Volume IV, Sortie  
 Generation Subsystem

1. Insert the enclosed change pages and destroy the replaced pages according to applicable security regulations.
2. A list of Effective Pages to verify the accuracy of this manual is enclosed. This list should be inserted before the title page.
3. When this change has been posted, make an entry in the Record of Changes.

FOR THE DIRECTOR

*J. Douglas Potter*  
 J. DOUGLAS POTTER  
 Assistant to the Director  
 for Administration

52 Enclosures  
 Change 2 pages

COPY AVAILABLE TO DDC DOES NOT  
 PERMIT FULLY LEGIBLE PRODUCTION

DDC  
 RECEIVED  
 APR 4 1977  
 A

DISTRIBUTION STATEMENT A  
 Approved for public release;  
 Distribution Unlimited

243000



ADA 037677

AJ No. \_\_\_\_\_  
 DDC FILE COPY



#### ACKNOWLEDGMENT

This document was prepared under the direction of the Chief for Development and Analysis, CCTC, in response to a requirement of the Studies, Analysis, and Gaming Agency, Organization of the Joint Chiefs of Staff. Technical support was provided by System Sciences, Inc. under Contract Number DCA-100-73-C-0058. Changes 1 and 2 were prepared by System Sciences, Inc. under Contract Number DCA-100-75-C-0019.

Section	Page
2.4.3.1 Long Range System: MTYPE=1 .....	23
2.4.3.2 Short-Range System: MTYPE=2 .....	28
2.4.3.3 Long-Range System with Penetration Aids: MTYPE=3 .....	28
2.4.3.4 Type-4 System: MTYPE=4 .....	30
2.4.3.5 Input Parameter Print .....	30.3
2.5 Output .....	31
2.5.1 Standard Output .....	32
2.5.2 Debug Prints .....	32
2.5.3 Error Messages .....	56
 3 PROGRAM POSTALOC .....	 61
3.1 Purpose .....	61
3.2 Concept of Use .....	61
3.3 File Utilization .....	61
3.3.1 Input Files .....	61
3.3.2 Output Files .....	61
3.3.3 Filehandler Buffer Utilization .....	63
3.4 Input .....	63
3.4.1 User-Input Parameters: Print Option Cards .....	63
3.4.2 User-Input Parameters: Processing Parameter Card .....	70
3.4.3 User-Input Parameters: Value-of-Recovery Cards .....	70
3.4.4 User-Input Parameters: Debug Print Option Card .....	70
3.5 Output .....	70
3.5.1 Standard Output .....	76
3.5.2 Detailed Prints .....	76
3.5.3 Summary Print .....	76
3.5.4 Debug Prints .....	76
3.5.5 Error Messages .....	76
 4 PROGRAM PLANOUT .....	 121
4.1 General Description .....	121
4.2 Executing Program PLANOUT .....	121
4.2.1 File Utilization .....	121
4.2.1.1 Input Files .....	121
4.2.1.2 Output Files .....	123
4.2.1.3 Filehandler Buffer Utilization .....	123
4.2.2 Input .....	124
4.2.3 Output .....	124
4.3 Overlay PLAN01 .....	124
4.3.1 General Description .....	124
4.3.2 File Utilization .....	124

## ILLUSTRATIONS

Figure		Page
1	Major Subsystems of the QUICK System .....	2
2	Procedure and Information Flow in QUICK/HIS 6080 .....	3
3	Sortie Generation Subsystem - Data Flow .....	4
4	Program FOOTPRNT File Utilization .....	8
5	Filehandler Buffer Utilization - Program FOOTPRNT .....	9
6	Booster Loading Option Card .....	11
7	MIRV System Title Card Format .....	22
8	Long-Range MIRV Data Format .....	24
9	Short-Range MIRV Data Format .....	29
9.1	Type-4 System (MTYPE=4) Data Format .....	30.1
10	User-Input Parameters for Footprint Parameter Tables .....	30.4
11	User-Input Parameter Settings Print .....	32
12	Basic Weapon Information Print (Print Option 1) .....	33
13	Gross MIRV System Parameter Print (Print Option 2) .....	34
14	Footprint Parameter Table Print (Print Option 3) .....	35
15	Performance Parameter Print (Print Option 12) .....	37
16	Print of Reentry Vehicle Distribution (Print Option 76) .....	39
17	Final Plan Print (Print Option 15) .....	40
18	Print Option Heading and Description .....	41
19	Data Block 5 (STRKSUM) Description (Corridor Sum- mary) .....	42
20	Data Block 6 (RAIDATA) Description (RAIDATA Lists) .....	43
21	Data Block 7 (POLAR COORDINATES) Description .....	44
22	Data Block 8 (STATUS ARRAYS) Description .....	45
23	Data Block 9 (RANGE) Description (Range Conversion Variables) .....	46
24	Data Block 10 (DEBUG) Description (Subroutine Call Chain) .....	46
25	Data Block 11 (POTENTIAL TARGET ARRAYS) Description ..	48
26	Data Block 12 (CONTROL) Description (Program Para- meters) .....	49
27	Data Block 13 (FOOTPRNT Input/Output) Description ....	50
28	Data Block 16 (WPNTGT) Description (Target Indices for List Moving) .....	51
29	Data Block 17 (/C3/- TEMPORARY STORAGE) Description ..	52
30	Data Block 18 (INDEX) Description (Potential Target List Indices) .....	53
31	Data Block 19 (FOOTSAVE) Description (Saved Footprint Information) .....	54
32	Data Block 20 (DISTANCE MATRIX) Description .....	55
33	Data Block 23 (VALPARM) Description (Value Line Variables) .....	56

Figure		Page
72	Print Option 33: Range Surplus and Amounts of Available Low-Altitude Range for Sortie.....	115
73	POSTALOC Error Messages.....	116
74	Program PLANOUT File Utilization.....	122
75	PLANOUT Filehandler Buffer Utilization.....	123
76	Overlay PLAN01 File Utilization.....	124
77	PLNTPLAN Filehandler Buffer Utilization.....	125
78	File Input/Output Request.....	126
79	Sortie Change Cards.....	127
80	PLAN01 Error Messages.....	131
81	Overlay PLNTPLAN File Utilization.....	134
82	PLNTPLAN Filehandler Buffer Utilization.....	135
83	Type 1 Parameter Card: Print Requests.....	136
84	Type 3 Parameter Card: Missile Timing Line Parameters.....	139
85	Timing Line Description.....	140
86	Type 4 Parameter Cards: CORMSL Data.....	141
87	Selective Processing Parameter Card.....	142
88	Tanker Base Data.....	143
89	Print of Missile Timing Data.....	144
90	PLNTPLAN Prints by Subroutine VAM.....	147
91	Tanker Allocation Table.....	148
91.1	One Way Bomber Mission Sortie Numbers.....	149.1
91.2	Bomber Sorties Not Fully Utilized.....	149.2
92	PLNTPLAN Print Option 3: Detailed Bomber Plan (Maintenance Print).....	151
93	PLNTPLAN Print Option 15: Detailed Missile Plan (Maintenance Print).....	155
94	PLNTPLAN Print Option 1: Input Record.....	156
95	PLNTPLAN Print Option 2: PLANTAPE Bomber Plan.....	159
96	PLNTPLAN Print Option 2: EVENTAPE Bomber Plan.....	162
97	PLNTPLAN Print Option 2: PLANTAPE Missile Plan.....	164
98	PLNTPLAN Print Option 4: BOUNDARY Snap.....	166
99	PLNTPLAN Print Option 5: LAUNCH Snap.....	168
100	PLNTPLAN Print Option 6: ASM Adjustment.....	170
101	PLNTPLAN Print Option 7: Precorridor Legs.....	171
102	PLNTPLAN Print Option 8: Depenetration Corridors....	172
103	PLNTPLAN Print Option 9: BASFILE Input.....	173
104	PLNTPLAN Print Option 11: ADJUST Snap.....	176
105	PLNTPLAN Print Option 12: Abbreviated EVENTAPE Plan..	178
106	PLNTPLAN Print 13 (TIMEME Information).....	179
107	PLNTPLAN Error Messages.....	180
108	Program INTRFACE File Utilization.....	183
109	INTRFACE Filehandler Buffer Utilization.....	183
110	Tape and Print Option Card.....	184
111	Gametime Card.....	185
112	Function/Command Code Cards.....	186

Figure		Page
113	Plane Type Card .....	187
114	User Input Card Print .....	188
115	Vehicle/Weapon Tables .....	189
116	ABTAPE Processing Print .....	190
117	Strike Card Format for STRIKE Tape .....	191
118	STRIKE Tape Print .....	192
119	SORTIE SPECIFICATIONS (A and B Cards) .....	193
120	ABTAPE Print .....	195
121	The Offensive System Table .....	196
122	INTRFACE Error Messages .....	197
123	Program TABLE File Utilization .....	199
124	Filehandler Buffer Utilization - Program TABLE .....	200
125	Side Designator Card .....	201
126	Target List (Program TABLE) .....	202
127	Vehicle Characteristics List (Program TABLE) .....	203
128	Weapon Characteristics List (Program TABLE) .....	204
129	Missile Base List (Program TABLE) .....	205
130	Bomber Base List (Program TABLE) .....	207
130.1	Offensive Recovery Base List (Program TABLE) .....	207.1
131	Example TABLE Printout of Target List .....	208
132	Example TABLE Printout of Vehicle Characteristics List .....	209
133	Example TABLE Printout of Weapon Characteristics List .....	210
134	Example TABLE Printout of Missile Base List .....	211
135	Example TABLE Printout of Bomber Base List .....	212
135.1	Example TABLE Printout of Offensive Recovery Bases ....	212.1
136	Program PLOTIT File Requirements .....	215
137	Program PLOTIT User-Input Parameters .....	216
138	Sample Plotter Request Form .....	221
139	Sample Run Instruction Sheet .....	222
140	User Input Data Summary .....	224
141	Sortie Event Data .....	225
142	Off-Map Point Data .....	226
143	Plotted Point Data .....	227
144	Sortie Summary .....	228
145	Sortie Plot Produced by PLOTIT .....	229
146	Program PLOTIT Error Messages .....	230
147	Program FOOTPRNT JCL .....	234
148	Program POSTALOC JCL .....	235
149	Program PLANOUT JCL .....	236
150	Program TABLE JCL .....	237
151	Program PLOTIT JCL .....	238

2.3.2. Output Files. The Allocation-by-Group File (ALOCGRP), to be used by program POSTALOC, is identical to the TMPALOC file for those weapon groups without a MIRV capability. For MIRV groups, the data have been ordered and flagged to specify the assignment of weapons on each booster.

2.3.3 Scratch Files. The ISCR (Base Target Data) contains the basic target data read from the ALOCGRP file. It is placed on the ISCR file so that the core storage reserved for this information may be used for other purposes. A temporary assignment plan is also saved on this file.

The ITABL (User-Input Parameters) file is used for temporary storage of the user-input parameters which define the footprint constraint equations.

2.3.4 Filehandler Buffer Utilization. The filehandler buffer areas utilized by program FOOTPRNT are shown in figure 5.

<u>FILE NAME</u>	<u>BUFFER NUMBER (LUN)</u>
BASFILE	8
TMPALOC	3
ALOCGRP	2
ISCR	25 (Scratch)
ITABL	26 (Scratch)

Figure 5. Filehandler Buffer Utilization-Program FOOTPRNT

2.4 Input. There are two types of user input. One type, program control information, is used in the assignment module of program FOOTPRNT to govern the heuristic footprinting algorithm. The second type, footprint constraint information, is used in the footprint testing module of the program to determine the feasibility of candidate booster assignments.

The program control information is input in free field format as described in appendix D of Users Manual Volume I. The end of these parameters is signalled by a blank card or a terminating parameter field (@). The footprint constraint information is input in the format described later.

2.4.1 Options. Except for program control parameters, described below, the only user option concerns the method used to determine the feasible loading for a booster. This selection is made by use of the user-input parameter LOADOPT discussed in the next section. There are three possible booster loading options as follows.

The Free Loading option uses only a maximum load constraint to determine the number of reentry vehicles in each booster assignment. Any number of RVs from zero to the maximum load (MAXLOAD) may be placed on any booster.

The ADDON (Minimum Desired Loading) option uses the rigid maximum load constraint but also attempts to meet a minimum load constraint. The assignment process proceeds as in the free loading option. If the minimum load constraint is not met, reentry vehicles are added to the assignment until the constraint is met or until the addition of a reentry vehicle is infeasible because of fuel constraints. In the latter case, the assignment is output with the maximum feasible number of reentry vehicles.

The MNLREQ (Minimum Required Loading) option considers rigid maximum load constraints. The program will make target assignments if, and only if, the minimum load constraint has been met. No booster assignment will contain less than the minimum load, unless it is impossible to find a feasible footprint with that load. In that case, no assignment is made. If the minimum load specified exceeds the average of reentry vehicles per booster, some boosters will have no targets to consider for assignment and/or some boosters will not be assigned. In either case, a warning message is issued to the user.

2.4.2 User-Input Parameters: Program Control Information. These parameters as described below are all input in free field format.

2.4.2.1 LOADOPT: Selects the booster loading options as described in the previous section. A value of \*FREE\* selects the free loading option; a value of \*ADDON\* selects the ADDON option; a value of \*MNLREQ\* selects the minimum required option. Figure 6 displays a card selecting the ADDON option.

NAME:	LOADOPT
RANGE:	*FREE*, *ADDON*, *MNLREQ*
DEFAULT:	*FREE*

There are four types of systems modeled in program FOOTPRNT. The first (MTYPE=1) is a long-range system where launch azimuth is an important parameter. The second (MTYPE=2) is a shorter range system. The third (MTYPE=3) is a long-range system similar to the first type except modified to carry a full load of area defense penetration aids. The fourth (MTYPE=4) is a long-range system with a different set of functions and parameters than the first system.

Each MIRV system is identified for program FOOTPRNT by the value of the attribute IMIRV. Each system is identified on input by a system title card requesting the appropriate set of footprint constraint formulae. The reading of the footprint parameter table data is terminated by a system title card with a zero or negative value for IMIRV. The systems can be input in any order. (Figure 7 displays the format for a system title card.)

If more than one IMIRV value refers to a specific formula for footprint test (see below), then the data for that formula must immediately follow the first occurrence of a system title card requesting the use of that formula. Succeeding title cards with the same formula definition need no data following them.


IMIRV is a PAYLOAD attribute only. It may appear with the weapon system but is ignored. The value of the attribute PAYLOAD determines whether or not a missile system is a MIRV.

Different MIRV types (that is, with a different Hollerith name, TYPE) should have different IMIRV numbers, and therefore, different payload numbers, even though the weapons have the same characteristics. This is to permit the weapons to be referenced separately (separate title cards). There cannot be two title cards in FOOTPRNT with the same value of IMIRV.

However, this consumes several payload numbers. If the user wishes to avoid this, he may assign the same IMIRV and payload to several different types of missiles. For example, assume that Polaris and Poseidon both carried the same payload. They could both be assigned IMIRV=1 and referred to as "Polaris" in FOOTPRNT. FOOTPRNT would process the Poseidons as well. This avoids carrying two duplicate payloads in the Payload Table.

In any run of FOOTPRNT, up to 40 different kinds of MIRV systems may be played. Since only one side can be processed at a time, the maximum number of MIRV systems available per side is 40.

The systems may be divided among the functional types (MTYPE=1, 2, 3, or 4) in any manner the user desires.

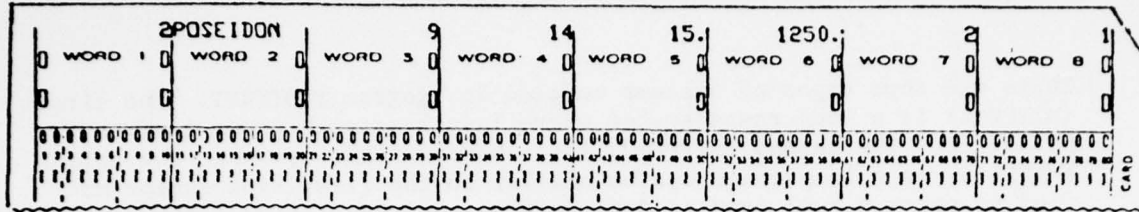

<u>WORD</u>	<u>FORMAT</u>	<u>(J)</u>	<u>RANGE</u>	<u>DESCRIPTION</u>
1	Integer	N/A	1-40	IMIRV value assigned in data base
2	A8	L	Standard	Hollerith name of system
3	Integer	N/A	1-16	Minimum number of RVs permitted on each booster*
4	Integer	N/A	1-16	Maximum number of RVs permitted on each booster (should be greater than or equal to minimum number of RVs)
5	Floating	N/A	$\geq 0.0$	Minimum spacing in nautical miles required between consecutive desired ground zeros (DGZs) in a footprint
6	Floating	N/A	$\geq 0.0$	The maximum distance in nautical miles that the system can send one RV after the first target under optimal conditions
7	Integer	N/A	1,2,3,4	MTYPE: indexes the functional form of the formula
8	Integer	N/A	$\geq 1$	IDATA: indexes the data set of the formula

\* If the free loading booster option is not selected, this value must be less than or equal to the lowest average number of RVs per booster associated with any missile group with this value of IMIRV as indicated by program PLANSET.

Figure 7. MIRV System Title Card Format

A formula for footprint testing is defined by two variables input on the system title card. The first, MTYPE, references the functional form of the formula to be used. If MTYPE=1, the corresponding functions of the long-range system are used. MTYPE=2 requests the short-range functions. If MTYPE=3, the long-range system functions are used as modified by the addition of a full load of area defense penetration aids. If MTYPE=4, a fourth set of functions are used. Within each type, there are data sets for the parameters used in the function. Thus, formula definition requires MTYPE, the functional form indicator, and IDATA, the index to the parameter set. For example, if two long-range systems are desired, there would be two formula definitions: MTYPE=1, IDATA=1; MTYPE=1, IDATA=2. The program will retrieve the correct data set at the initiation of processing for each MIRV group. The values of IDATA for any functional form (i.e., same value of MTYPE) need not be consecutive. For example, the two formula definitions described previously in this paragraph could be defined as: MTYPE=1, IDATA=7; MTYPE=1, IDATA=3. There may be any number of formula definitions (values of IDATA) for each functional form (value of MTYPE).

The format of the user-input parameters for the footprint parameter tables are explained in the following sections. Unless otherwise noted, the default value for each parameter is 0.0; justification within the data field is not applicable, and the decimal point should always be input in each field.

2.4.3.1 Long Range System: MTYPE=1: This system can have a configuration of one to 16 RVs. Figure 8 displays the input format of the necessary data. All formats are F10.0, with one value per field and eight values per card. Each field is 10 columns wide starting with column 1. Successive values are ordered by ascending order of RVs. Thus, the first value is for one RV, the second value for two RVs, and the last value for 16 RVs. The system functions as follows:

a. Fuel load at booster separation: Constant for each initial configuration of RVs.

b. Maximum booster range: in nautical miles

$$RM = RBASIC + RADD * SINE(AZIMUTH)$$

RBASIC and RADD are functions of the initial configuration of RVs and the sign of the azimuth

c. Range extension consumption: number of nautical miles traversed per unit of fuel

$$NM/FUEL = RX + RAXX * SINE(AZIMUTH)$$

RX and RAXX are functions of the initial configuration of RVs and the sign of the azimuth.

Cards 1-2 -- Fuel Load at Booster Separation

<u>Card Number</u>	<u>Name</u>	<u>Description</u>
1, 2	GAS	Pounds of fuel for configurations of 1-16 RVs

Cards 3-10 -- Maximum Booster Range (All configurations)

3, 4	RBASIC	For negative launch azimuths
5, 6	RBASIC	For positive launch azimuths
7, 8	RADD	Additional range dependent on azimuth for negative launch azimuths
9, 10	RADD	Same as Cards 7, 8 for positive launch azimuths

Cards 11-18 -- Range Extension Consumption (All configurations)

11, 12	RX	For negative launch azimuths
13, 14	RX	For positive launch azimuths
15, 16	RAXX	Additional range extension dependent on azimuth for negative launch azimuths
17, 18	RAXX	Same as Cards 15, 16 for positive launch azimuths

Cards 19-30 -- Downrange/Crossrange Ratio (On Board RVs)

19, 20	EONE	} Exponential Constants
21, 22	ETWO	
23, 24	CONE	For negative launch azimuths
25, 26	CONE	Same as Cards 23, 24 for positive launch azimuths
27, 28	CTWO	For negative launch azimuths, azimuth dependent

Figure 8. MTYPE=1 MIRV Data Format (Part 1 of 3)

<u>Card Number</u>	<u>Name</u>	<u>Description</u>
29, 30	CTWO	Same as Cards 27, 28 for positive launch azimuths

Cards 31-46 -- Downrange/Uprange Ratio (On Board RVs)

31, 32	UE1	Same as Cards	19, 20
33, 34	UE1		21, 22
35, 36	UE2		23, 24
37, 38	UE2		25, 26
39, 40	UC1		27, 28
41, 42	UC1		29, 30
43, 44	UC2		31, 32
45, 46	UC2		33, 34

Cards 47-49 -- Denominators Used in the Toss Equations and the Downrange/Uprange and Downrange/Crossrange Ratio Equations

47, 48	TDENOM	Used in the Toss Equations for each number of RVs on board
49	UDEN	Used in the Downrange/Uprange ratio equation with the parameters on Cards 31-46
49	DENOM	Used in the Downrange/Crossrange ratio equations with the parameters on Cards 19-30

Note: Toss Equation parameter cards follow in groups based on the initial booster configuration. For example, if the initial configuration has four RVs on the booster, four cards are used to describe the configuration.

<u>Card Number</u>	<u>Columns</u>	<u>Name</u>	<u>Description</u>
50	1-2	N	The first configuration to be described where N is the initial booster load. If N=0, no configurations will follow. Assuming N=4, the following cards are:

Figure 8. (Part 2 of 3)

<u>Card Number</u>	<u>Columns</u>	<u>Name</u>	<u>Description</u>
51	1-10	TEONE	1 RV on board
	11-20	TETWO	
	21-30	TOSSC1	Negative launch azimuth, 1 RV on board
	31-40	TOSSC1	Positive launch azimuth, 1 RV on board
	41-50	TOSSC2	Azimuth dependent for negative launch azimuth, 1 RV on board
	51-60	TOSSC2	Azimuth dependent for positive launch azimuth, 1 RV on board.
52	--	--	Same as Card 51 for 2 RVs on board
53	--	--	Same as Card 51 for 3 RVs on board
54	1-2	N	The next booster configuration to be described. N=0 or a blank card will end the data cards describing the MIRV system

Figure 8. (Part 3 of 3)

d. Downrange/Crossrange Ratio:

$$DR/CR = G * (CONE + CTWO * SINE(AZIMUTH))$$

where

$$G = \text{EXPF} \left( EONE * \left( \frac{RM-R}{DENOM} \right) **ETWO \right)$$

CONE and CTWO are functions of the number of RVs currently on board and the sign of the azimuth.

EONE and ETWO are functions of the number of RVs currently on board.

DENOM is a constant.

e. Downrange/Uprange Ratio:

$$DR/UR = G * (UC1 + UC2 * SINE (AZIMUTH))$$

where

$$G = \text{EXPF} \left( UE1 * \left( \frac{RM-R}{UDEN} \right) **UE2 \right)$$

UC1 and UC2 are functions of the number of RVs currently on board.

UE1 and UE2 are functions of the number of RVs currently on board.

UDEN is a constant.

f. RV toss equations: nautical miles per unit fuel

$$NM/FUEL = G * (TOSSC1 + TOSSC2 * SINE(AZIMUTH))$$

where

$$G = \text{EXPF} \left( TEONE * \left( \frac{RM-R}{TDENOM} \right) **TETWO \right)$$

where

RM=maximum booster range  
R =range to initial target

TOSSC1 and TOSSC2 are functions of number of RVs originally on board, number of RVs currently on board, and sign of launch azimuth.

TEONE and TETWO are functions of number of RVs originally on board and number currently on board.

TDENOM is a function of number of RVs currently on board.

2.4.3.2 Short-Range System: MTYPE=2: This system does not consider launch azimuth. It considers configurations containing from one to 16 RVs on board. Where R is the distance from the launch base to the initial target in the footprint, the system functions as follows:

a. RV Toss Fuel Consumption Equations:

$$NM/\text{Unit Fuel} = \text{ALPHA2} * R^2 + \text{ALPHA1} * R + \text{ALPHAZ}$$

The parameters are functions of the number of RVs currently on board.

b. Fuel Load at Booster Separation:

$$TF = \text{BETA2} * R^2 + \text{BETA1} * R + \text{BETAZ}$$

The parameters are functions of the initial configuration of RVs.

c. Maximum Booster Range: This parameter, MAXRBOST, is a function of the initial configuration of RVs.

d. Downrange/Crossrange Ratio:

$$DR/CR = \text{GTWO} * R^2 + \text{GONE} * R + \text{GZERO}$$

These parameters are constant.

e. Downrange/Uprange Ratio:

$$DR/UR = \text{DONE} * R + \text{DZERO}$$

These parameters are constant.

Figure 9 displays the input format for this data set. All formats are F10.0. All formats are one value per field. Each field is 10 columns wide starting with column 1. The values are ordered by ascending order of RVs. The first value is for one RV, the second for two RVs, and the last for 16 RVs. There are eight values per card.

2.4.3.3 Long-Range System with Penetration Aids: MTYPE=3: This considers a long-range system with penetration aids similar to the Minuteman-III system. In the configuration for MTYPE=3, the booster will carry up to 16 reentry vehicles. In addition to the warheads, the payload contains chaff canisters for area penetration decoys.

The input data format for this type is very similar to that for the regular long-range system MTYPE=1. The only difference is in specification of the fuel load at booster separation. In place of the card

<u>CARDS</u>	<u>DESCRIPTION</u>
1	ALPHAZ (1-8)
2	ALPHAZ (9-16)
3,4	ALPHA1 (1-16)
5,6	ALPHA2 (1-16)
7,8	BETAZ (1-16)
9,10	BETA1 (1-16)
11,12	BETA2 (1-16)
13,14	MAXRBOST (1-16)

Card 15

<u>COLUMN</u>	<u>DESCRIPTION</u>
1-10	GTWO
11-20	GONE
21-30	GZERO
31-40	DONE
41-50	DZERO

Figure 9. Short-Range MIRV Data Format

specifying the fuel on board (the first data card for MTYPE=1), the following nine cards are used:

Card 1

<u>COLUMN</u>	<u>FORMAT</u>	
1-10	F10.0	Total fuel load before subtraction of spacing and release fuel
11-20	F10.0	SRFDEN

Cards 2-9 -- All formats F10.0 (Eight entries per card)

VARIABLE

- SRFC1 - 1-8 RVs
- SRFC1 - 9-16 RVs
- SRFC2 - 1-8 RVs
- SRFC2 - 9-16 RVs
- SRFEXP1 - 1-8 RVs
- SRFEXP1 - 9-16 RVs
- SRFEXP2 - 1-8 RVs
- SRFEXP2 - 9-16 RVs

The spacing and release fuel, which is subtracted from the total fuel to determine the fuel available for footprinting, is computed as follows:

$$\text{Fuel} = G * (\text{SRFC1} + \text{SRFC2} * \text{SINE}(\text{AZIMUTH}))$$

where:

$$G = \text{EXP}\left(\text{SRFEXP1} * \left(\frac{\text{RM}-\text{R}}{\text{SRFDEN}}\right) ** \text{SRFEXP2}\right)$$

RM=maximum booster range  
R =range to first target

2.4.3.4 Type-4 System: MTYPE=4: The Type-4 system can have one to 16 RVs as an initial launch configuration. Figure 9.1 displays the input format of the necessary data. All formats are floating point (F10.0) and like the inputs for MTYPE=1 there are eight values per card. The system functions are as follows:

a. RV Toss Fuel Consumption Equations:

$$\text{NM/Unit Fuel} = A2 * R^2 + A1 * R + A0$$

where:

A2, A1, and A0 are functions of the number of RVs currently on board and R is the range from the launch base to the initial target.

Cards 1-6 -- RV TOSS Fuel Consumption Rates

<u>Card Number</u>	<u>Name</u>	<u>Description</u>
1, 2	A0	} Fuel consumption rate parameters for all numbers of RVs currently on board
3, 4	A1	
5, 6	A2	

Cards 7-12 -- Fuel Load at Booster Separation

7, 8	B0	} Fuel load parameters for each original configuration of RVs
9, 10	B1	
11, 12	B2	

Cards 13-20 -- Maximum Booster Range

13, 14	BRANGE	For each initial configuration, negative launch azimuths
15, 16	BRANGE	Same as Cards 13, 14 for positive launch azimuths
17, 18	BRADD	Additional booster range, dependent on azimuth, for negative launch azimuths
19, 20	BRADD	Same as Cards 17, 18, for positive launch azimuths

Card 21 (Columns 1-40) -- Downrange/Crossrange Ratio

<u>Columns</u>	<u>Name</u>	<u>Description</u>
1-10	CR2	} Constants
11-20	CR1	
21-30	CRO	
31-40	CRDEN	

Figure 9.1 Type-4 System (MTYPE=4) Data Format (Part 1 of 2)

Card 21 (Columns 41-70) -- Downrange/Uprange Ratio

41-50	UD2	}	Constants
51-60	UD1		
61-70	UDO		

Figure 9.1 (Part 2 of 2)

b. Fuel Load at Booster Separation:

$$TF = B2 * R^2 + B1 * R + B0$$

where:

B2, B1, and B0 are functions of the initial configuration of RVs.

c. Maximum Booster Range:

$$RM = BRANGE + BRADD * SINE(AZIMUTH)$$

where:

BRANGE and BRADD are functions of the initial configuration of RVs and the sign of the azimuth

d. Downrange/Crossrange Ratio:

$$DR/CR = C' + 1 - C'^{**}(R*SINE(AZIMUTH)/CRDEN)$$

for positive azimuths, and:

$$DR/CR = C' - 1 + C'^{**}(-R*SINE(AZIMUTH)/CRDEN)$$

for negative azimuths, where:

$$C' = CR2 * R^2 + CR1 * R + CRO$$

where:

CR2, CR1, CRO, and CRDEN are constants

e. Downrange/Uprange Ratio:

$$DR/UR = UD2 * R^2 + UD1 * R + UDO$$

where:

UD2, UD1, and UDO are constants

2.4.3.5 Input Parameter Print: Figure 10 is a sample list of the user-input parameter cards required to input the footprint parameter tables for MIRV systems. The fields on each card are noted at the top of the figure. The explanation of each field is contained in the preceding discussion. Note that some constants in figure 10 are given in the standard FORTRAN 'E' format and are right justified. Only the 'E' format must be right justified; all other forms are free field.

FIELD 1	FIELD 2	FIELD 3	FIELD 4	FIELD 5	FIELD 6	FIELD 7	FIELD 8
COL	COL	COL	COL	COL	COL	COL	COL
1-10	11-20	21-30	31-40	41-50	51-60	61-70	71-80
2	2	9	14	15.0	1250.	2	2
HYPOTHET							
5.0	4.375	3.89	3.50	3.18	2.92	2.69	2.5
2.33	2.19	2.06	1.94	1.84	1.75	0.0	0.0
-4.00E-3	-3.50E-3	-3.11E-3	-2.80E-3	-2.55E-3	-2.33E-3	-2.15E-3	-2.00E-3
-1.87E-3	-1.75E-3	-1.65E-3	-1.56E-3	-1.47E-3	-1.40E-3	0.0	0.0
2.00E-6	1.75E-6	1.56E-6	1.40E-6	1.27E-6	1.17E-6	1.08E-6	1.00E-6
9.33E-7	8.75E-7	8.24E-7	7.78E-7	7.37E-7	7.00E-7	0.0	0.0
250.	250.	250.	250.	250.	250.	240.	220.
200.	190.	180.	170.	160.	150.	0.	0.
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
3500.	3400.	3300.	3200.	3100.	3000.	2800.	2600.
2400.	2300.	2200.	2100.	2000.	2000.	0.	0.
.50E-6	-1.00E-3	2.00	1.00E-3	1.00			

SYSTEM TITLE CARD  
 IMIRV = 2  
 MTYPE = 2

Figure 10. User-Input Parameters for Footprint Parameter Tables

## 2.5 Output

After listing the values for the user-input parameters, the program prints the basic weapon information from the BASFILE, the gross MIRV system parameters, and the footprint parameter tables. Figures 11, 12, 13, and 14 display these prints.

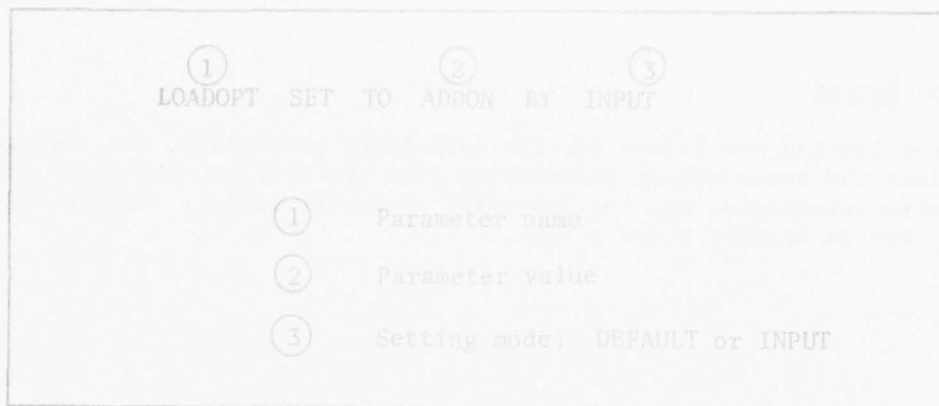


Figure 11. User-Input Parameter Settings Print

2.5.1 Standard Output. At the end of processing of each group with a MIRV capability, the program prints the performance parameters (figure 15), the distribution or reentry vehicles to boosters (figure 16), and the final weapon-target assignments (figure 17). Figure 16 displays the output of print option 76. The print shows the distribution of reentry vehicles to boosters after the addition of the RVs required to meet MINLOAD, if any were required. If the user wishes to see the distribution of RVs prior to these additions, print option 65 should be selected. If the free loading option is used then the two print options are identical.

2.5.2 Debug Prints. There are a number of prints which may be requested to monitor the processing of program FOOTPRNT. Each print is preceded by a header identifying the conditions which have activated the print. Figure 18 displays the format of the heading which precedes every print from FOOTPRNT. In the event that an error occurs, program FOOTPRNT will output an error message (explained in the next section) and then produce a series of appropriate prints which will help in finding the cause of the error. The variable IMUST in the heading signifies if the print is a normal print or the result of an error.

The prints for this program will be described by data block. A data block is a set of similar information (usually contained in one common block) which is printed together. Each print option for program FOOTPRNT consists of one or more data blocks.

Tables 1 and 2, previously shown, display the data blocks which are printed for each request and the common blocks and information which make up each data block, respectively.

Data Block 1, named WPNGRPX, is requested by print option 1. It is described in figure 12.

① IPOTGT =      ② JAFT =      ③ JTGTD =      ④ NUMBOOST =

<u>HEADING</u>	<u>LABEL</u>	<u>DESCRIPTION</u>
①	IPOTGT	Potential target index of target to be added to hit list
②	JAFT	Position in hit list after which new target is to be added
③	JTGTD	Potential target index of target to be omitted from hit list
④	NUMBOOST	Index of booster currently being processed

Figure 28. Data Block 16 (WPNTGT) Description (Target Indices for List Moving)



<u>HEADING</u>	<u>LABEL</u>	<u>DESCRIPTION</u>
⑬	AZIMUTH	Azimuth from group centroid to target
⑭	RVALP	Relative target value (RVAL)
⑮	SINES	Sine of AZIMUTH
⑯	COSINES	Cosine of AZIMUTH
⑰	NDEXR	Target order by increasing range
⑱	NDEXT	Target order by increasing azimuth
⑲	SINER	Sine of RANGE (in radian measure)
⑳	COSINER	Cosine of RANGE (in radian measure)

Figure 29. (Part 2 of 2)

THIS PAGE INTENTIONALLY LEFT BLANK

<u>HEADING</u>	<u>LABEL</u>	<u>DESCRIPTION</u>
①	LINES	Number of timing lines
②	NO	Timing line number
③	ZLAT1	Latitude of left endpoint of line
④	ZLONG1	Longitude of left endpoint
⑤	ZLAT2	Latitude of right endpoint
⑥	ZLONG2	Longitude of right endpoint
⑦	LENGTH	Length of timing line (nautical miles)
⑧	XCROSS	X-coordinate of cross product
⑨	YCROSS	Y-coordinate of cross product
⑩	ZCROSS	Z-coordinate of cross product
⑪	LTYP	Plan Generator type number
⑫	TYPE	= 0 for FLIGHT CORMSL = 1 for LINE CORMSL
⑬	CORMSL	CORMSL for this type in hours (if equal to -1.000E 08, it is ignored)
⑭	MIN FLT	Minimum flight time in hours
⑮	FIRST FIXED GROUP	Group number of first group with fixed assignments (1000 indicates no fixed assignments)

Figure 89. (Part 2 of 2)

There are three printouts which give information used by PLNTPLAN's sub-routine VAM. VAM applies Vogel's Approximation Method to the transportation problem of assigning available tankers to refuel areas where automatic tanker allocation is to be performed. These prints are output mainly for use by QUICK system programmers. The prints are:

- a. The COST matrix, giving the contents of the FORTRAN array by the same name. Row  $i$  refers to tanker base  $i$ ; column  $j$  to refuel area  $j$ . The entry in COST ( $i, j$ ) is the distance between tanker base  $i$  and refuel area  $j$ . The matrix is printed up to 20 columns to a page.
- b. The SOURCE/SINK table, printing for each integer  $I$ :  
SOURCE( $I$ ) =  $N$ , where  $N$  is the number of tankers available for automatic allocation at tanker base  $I$   
SINK( $I$ ) =  $M$ , where  $M$  is the number of bombers which have been assigned to refuel at refuel area  $I$ .
- c. The VAM solution, showing the elements of the  $X(i, j)$  matrix which constitute the final feasible solution to the transportation problems. Again,  $i$  = the tanker base number, and  $j$  = the refuel area number. The value for  $X(i, j)$  = the number of tankers to be allocated from tanker base  $i$  to refuel base  $j$ . At the end of the  $X(i, j)$  matrix, VAM prints "TOTAL COST =  $N$ ," where  $N$  is the total number of tanker miles to be flown using this solution for the allocation.

Examples of the three VAM prints are shown in figure 90.

When nearing the end of execution, PLNTPLAN prints out the following self-explanatory messages:

```
720 TANKER PLANS PROCESSED
704 BOMBER PLANS PROCESSED
1564 MISSILE BOOSTER PLANS PROCESSED TO GO TO 3521 TARGETS.
0 PLANS EXCEED 80 LINES
```

The tanker allocation table is also shown, giving the final assignments of tankers to refuel areas. A sample table is shown in figure 91.

After all missions have been processed, PLNTPLAN prints out the Sortie Sequence Numbers of the bombers that could not return to a recovery base (figure 91.1) and the bombers that were not fully utilized (figure 91.2); that is, bomber sorties that did not drop its entire weapon load.

The standard output ends with the messages:

```
NUMBER OF BUDDY TANKERS = N
CHECKSUM = M
***** PROCESSOR PLNTPLAN COMPLETED *****
```

where  $N$  = the number of bomber refuelings accomplished by buddy tankers and  $M$  = the sum of /DINDATA/ contents in fixed point.

<u>HEADING</u>	<u>LABEL</u>	<u>DESCRIPTION</u>
①	REFUEL AREA	Number of the refuel area
②	TIME OF EARLIEST ARRIVAL	The game time at which the earliest bomber to be refueled at that area is scheduled to arrive
③	NUMBER OF TANKERS ASSIGNED	The total number of tankers which have been assigned by PLNTPLAN to the refuel area
④	NUMBER OF BOMBERS ASSIGNED	The number of bombers which have been scheduled to refuel at the refuel area
⑤	SURPLUS	The number of extra tankers which will be sent to the refuel area
⑥	LATITUDE	Latitude of the refuel area
⑦	LONGITUDE	Longitude of the refuel area

Figure 91. (Part 2 of 2)

ONE WAY BOMBER MISSION SORTIE NUMBERS

296	299	307	309	312	313	315	318	328	343	345	356	376
377	379	394	405	409	429							

Figure 91.1 One Way Bomber Mission Sortie Numbers

BOMBER SORTIES NOT FULLY UTILIZED

288	298	308	314	316	317	342	355	363	383	385	406	426
434												

Figure 91.2 Bomber Sorties Not Fully Utilized

PLNTPLAN also furnishes various detailed prints and debug prints as described below.

4.4.4.1 Print Option 3: Detailed Bomber and/or Tanker Plans. PLNTPLAN print option 3 describes detailed plans for bomber sorties (when GROUP is not equal to -1) and/or for tankers (when GROUP equals -1). Whenever refueling is scheduled for a bomber, an alternate plan is described for missed refueling; the primary plan is described above the broken line in the printout, and the alternate sortie is described below the line. It is possible for a bomber to refuel twice; in this case, the alternate sortie is to be flown if the second refuel is unsuccessful. If the first refuel is not completed, the bomber is to recover at the launch base.

Figure 92 shows a sample bomber sortie print. The headings are the same for tanker plan prints.

4.4.4.2 Print Option 15: Detailed Missile Plans. PLNTPLAN print option 15 gives detailed missile plans for each missile base. Figure 93 shows a sample missile plan print.

4.4.4.3 Print Option 1: OUTSRT Record (Debug Print) Print 1 shows the contents of the STRKFILE input record(s) for each bomber sortie (contents of common block /OUTSRT/). For bomber sorties which have an alternate as well as a primary plan (aircraft which refuel), two OUTSRT records will be printed; the first printed is the primary plan and the second is the alternate. Figure 94 shows a sample print option 1.

4.4.4.4 Print Option 2: Final Plan (Debug Print). There are three separate prints associated with print request 2:

- a. The final bomber plans as output to the PLANTAPE, which will be printed only when the PLANTAPE is written (see figure 95).
- b. The final bomber plans as output to the EVENTAPE, which will be printed only when the EVENTAPE is written (see figure 96).
- c. The final missile plans as output to the PLANTAPE, which will be printed only when the PLANTAPE is written; print 2 will be on for the missiles if it is on for the last bomber sortie processed before the missiles (see figure 97).

4.4.4.5 Print Option 4: BOUNDARY Subroutine (Debug Print). Subroutine BOUNDARY examines a given line segment to determine at what point, if any, it crosses a defense zone boundary. When it is necessary for a QUICK system programmer to see what computations have been performed, print 4, shown in figure 98, may be requested.

<u>FIELD</u>	<u>CARD COLUMNS</u>	<u>RANGE</u>	<u>DESCRIPTION</u>
1	1	S	STRIKE Card Indicator
2	2	0	Constant
3	3	1-9	Command/function code
4	4-8	1-99999	Sortie sequence number
5	9-10	01-12	Month
	11-12	01-31	Day
	13-14	00-23	Hour
	15-16	00-59	Minutes
6	17-18	00-59	Seconds
7	19-24	DDMMSS where	DD=degrees } Latitude of desired MM=minutes } ground zero (DGZ) SS=seconds }
	25	N or S	North or South
8	26-32	DDDMSS where	DDD=degrees } Longitude of DGZ MM=minutes } SS=seconds }
	33	E or W	East or West
9	34-38	2 Alpha, 3 Numeric	Target designator code
10	39-40	-1-99	PLS-Probability* of pre-launch survival
11	41-42	-1-99	PTP-Penetration probability*
12	43-44	-1-99	WSR-Weapon system reliability*
13	45	1-9	Region code
14	46-48	000-999	Fission/yield ratio
15	49		Blank
16	50-54	00001-99999	Yield
17	55-57	000-999	Height of burst (hundreds of feet)
18			
19	58-60	000-999	CEP in 100s of feet
20	61-62	2 Alpha	Task/subtask code
21	63-64	2 Alpha	Country code for target location
22	65-66	2 Alpha	Country code for target owner
23	67-68	00-99	Attrition probability* (i.e., percent change of attrition)
24	69	0-9	Sequential Warhead Number when operation code is 7, 10, or 11. Otherwise, blank.
25	70-71	01-99	Plane type code
26	72-73	01-99	Weapon type code
27	74-77	0001-9999	Unit number (INDEXNO of launch base)
28	78-79	00-99	Sortie number
29	80		Blank

\*A printed probability of -1 implies a value of 100 (necessary since only two digits are reserved for probability representation).

Figure 117. Strike Card Format for STRIKE Tape

	①		
S00	171001112559544200M0393636EAB13690-1791070	00100037036ABURR2930310046717	
S00	181001112559544200M0393636EAB13690-1791070	00100037036ABURR2910310046818	
S00	181001112559544200M0393636EAB13690-1791070	00100037036ABURR2920310046818	
S00	181001112559544200M0393636EAB13690-1791070	00100037036ABURR2930310046818	
S00	191001112559544200M0393636EAB13690-1791070	00100037036ABURR2910310046919	
S00	191001112559544200M0393636EAB13690-1791070	00100037036ABURR2920310046919	
S00	191001112559544200M0393636EAB13690-1791070	00100037036ABURR2930310046919	
		②	③
		51	AB
		52	AB
		53	AB
		54	AB
		55	AB
		56	AD
		57	AB

- ① Strike card record with format as described in figure 117.
- ② Strike card (record) line number; appears in printout only.
- ③ Weapon system identification code corresponding to the command/function code shown in column 3 of the STRIKE tape card (record) format. This code does not appear on the STRIKE tape but is printed to provide additional information which is output on the STRKREST tape.

Figure 118. STRIKE Tape Print

SORTIE SPECIFICATION: "A" CARD FORMAT			
<u>FIELD</u>	<u>CARD COLUMNS</u>	<u>RANGE</u>	<u>DESCRIPTION</u>
1	1	A	A-card indicator
2	2-4	001-999	A-card number
3	5-8	0001-9999	Unit number
4	9-10	01-99	Sortie number
5	13-14	01-99	Plane type code
6	15	0	
7	16-17		Blank
8	18	0	
9	19-22	0000-9999	Reference time (launch time in hours and minutes)
10	23	1	Time reference (1=launch)
11	24-30	0000000	
12	31		Blank
13	32-34	N/A	Plane type alpha-numeric code
14	35		Blank
15	36-37	N/A	Country code of launch base
16	38		Blank
17	39-40	1-9	SAGA Vehicle-Function code 1=ICBM 2=IRBM 3=MRBM 5=SSB/SSBN 6=SSGN 7=LRA 0,4,8,9 not used
18	41-80		Blank
19	N/A		Card identification number (added to print of card image not contained on tape)

SORTIE SPECIFICATION: "B" CARD FORMAT			
<u>FIELD</u>	<u>CARD COLUMNS</u>	<u>RANGE</u>	<u>DESCRIPTION</u>
1	1	B	B-card indicator
2	2-4	001-999	B-card number
3	5-8	0001-9999	Unit number
4	9-10	01-99	Sortie number
5	11-12	01-99	Flight leg number
6	13-14	01-14	<b>Event or operation type indicator</b>
		1	Takeoff
		2	Aerial refueling
		3-4	Dogleg
		6	ASM launch

Figure 119. SORTIE SPECIFICATIONS (A and B Cards)  
(Part 1 of 2)

<u>FIELD</u>	<u>CARD COLUMNS</u>	<u>RANGE</u>	<u>DESCRIPTION</u>
		7	ASM on target
		8	Decoy release
		9	Decoy impact
		10	Missile or bomb on target
		11	MIRV on target
		13	Recovery if bomber; splash if air breathing missile.
		14	Splash (ballistic missiles)
7	15-19		Location identifier for given operation 1=Base index 2=Area number 6="1" 7=Target DESIG code 8 or 9="1" 10-11=Target DESIG code 13=Recovery base INDEXNO if bomber
8	20-25	DDMMSS	Latitude at end of leg in degrees, minutes, and seconds
9	26-33	DDMMSSX	Longitude at end of leg in degrees, minutes, and seconds; East or West
10	34		Mode of operation 1 4 High altitude Low altitude
11	35	0	
12	36-41	HHMMSS	Time of event in hours, minutes, and seconds
13	42	S	Southern latitude indicator (If latitude is North, column 42 is blank)
14	43-44	01-90	Sequential index within unit number
15	45-46		Blank
16	47-49	0-360	Launch/Back azimuth in degrees
17	50		ECM status 0 1 Off On
18	51	0	
19	52-53	00-99	Warhead type
20	54		Height of burst 0=ground 1=air
21	55-56	0	
22	57-58	01-90	Plane type code
23	59-60	2 Alpha	Code for country of target location
24	61	1-9	Region code
25	62		Blank
26	63-64	2 Alpha	Target task code
27	65-67	000-999	Height of burst (hundreds of feet)
28	68-72	00001-99999	Yield (KT)
29	73-75	000-999	CEP (100's feet)
30	76-77	2 Alpha	Code for country target owner
31	N/A		Card number for whole SORTIE SPECIFICATIONS tape (contained only in a print of the tape)

Figure 119. (Part 2 of 2)

B0030475250211A06675318000832400E00112851	020	003001010003UR2	A003700100036UR	124
B0040475250311A06675318000832400E00112851	030	003001010003UR2	A003700100036UR	125
A026047626	030	011051000000	M31 US 00	126
B0010476260001004764600001010000W00110500	0	0220000000003		127
B0020476260111A06404030000494500E00113220	010	340001010003UR2	A003700100036UR	128
B0030476260211A06404030000494500E00113220	020	340001010003UR2	A003700100036UR	129
B0040476260311A06404030000494500E00113220	030	340001010003UR2	A003700100036UR	130
A027047727	030	011051000000	M31 US 00	131
B0010477270001004774600001010000W00110500	0	0220000000003		132
B0020477270111A06404030000494500E00113220	010	340001010003UR2	A003700100036UR	133
B0030477270211A06404030000494500E00113220	020	340001010003UR2	A003700100036UR	134
B0040477270311A06404030000494500E00113220	030	340001010003UR2	A003700100036UR	135

Figure 120. ABTAPE Print

OFFENSIVE SYSTEM TABLE

(1) PLAN GEN TYPE NO.	(2) TYPE NAME	(3) PLANE TYPE	(4) NOBOMB1	(5) IMHDI	(6) NOBOMB2	(7) IWHD2	(8) NASM	(9) IASM	(10) NUMBER
2	B-58	17	1	3	3	1	0	0	64
1	MM-TA	1	1	1	0	0	0	0	150
0		23	0	0	0	0	0	0	720

LABEL	HEADING	DESCRIPTION
(1)	PLAN GEN TYPE NO.	Plan generator type number
(2)	TYPENAME	Weapon type name
(3)	PLANETYPE	Plane type number
(4)	NOBOMB1	Number of type 1 bombs
(5)	IWHD1	Type 1 warhead index
(6)	NOBOMB2	Number of type 2 bombs
(7)	IWHD2	Type 2 warhead index
(8)	NASM	Number of ASMs
(9)	IASM	ASM index
(10)	NUMBER	Number of offensive systems

Figure 121. The Offensive System Table

## SECTION 5. PROGRAM TABLE

### 5.1 Purpose

Program TABLE is a special-purpose program which provides an interface between QUICK and two external simulators used in RISOP/SIOP gaming; i.e., the Event Sequenced Program (ESP) and the Nuclear Exchange Model (NEMO). It outputs specially formatted data required as input for the NEMO and ESP models.

### 5.2 Concept of Use

Specifically, program TABLE reads either the INDEXDB tape produced by program INDEXER or the INMODDB tape produced by program DBMOD and records, in abbreviated form, selected data concerning weapon systems and targets described herein. The extracted data are written on an output tape, TABLTAPE. This program performs no other functions and is not required to operate the QUICK system. However, because it summarizes part of the indexed data base, it enables the user to review the data base before embarking on plan generation if he so chooses.

### 5.3 File Utilization

Program TABLE reads either the INDEXDB tape from program INDEXER or the INMODDB tape from program DBMOD and records, in an abbreviated form, selected data concerning the weapon systems and targets described therein. Figure 123 displays the utilization of files by program TABLE.

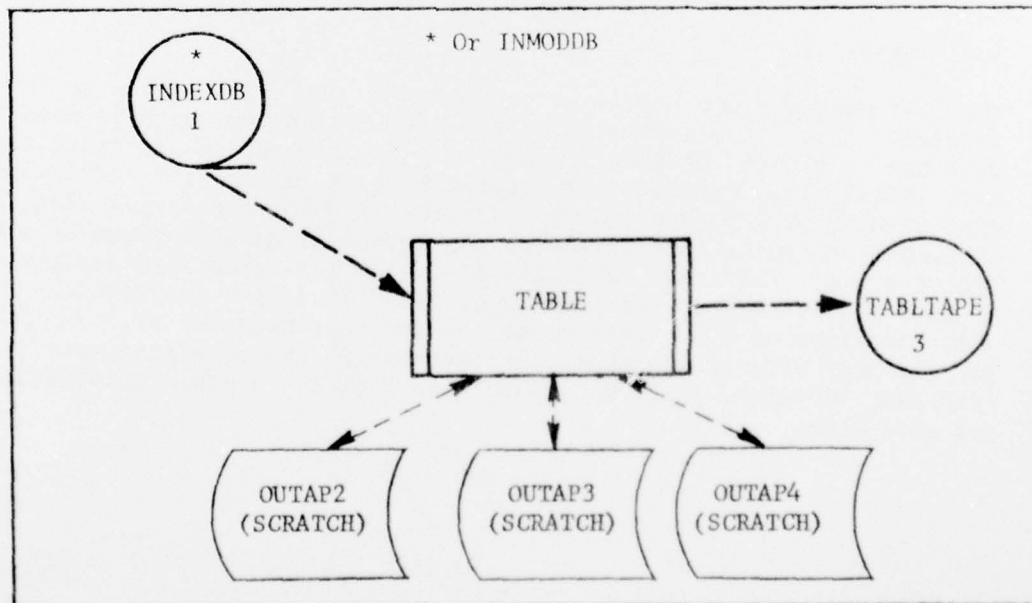


Figure 123. Program TABLE File Utilization

5.3.1 Input File. Program TABLE reads either the INDEXDB or INMODDB tape to obtain the data base information pertaining to targets, missile and bomber launch bases, delivery vehicle, and weapon characteristics.

5.3.2 Output File. Having retrieved the required information, program TABLE prepares a single output tape TABLTAPE which contains six data lists: Target List (FITARGET), Vehicle Characteristics List (FIVEHIC), Weapon Characteristics List (FIWEAPON), Missile Base List (FIMIBASE), a Bomber Base List (FIBASE), and an Offensive Recovery Base List (FIRECBS).

5.3.3 Scratch Files. Three disk scratch files OUTAP2, OUTAP3 and OUTAP4 are used by TABLE in constructing the six data lists subsequently output to TABLTAPE.

5.3.4 Filehandler Buffer Utilization. The filehandler buffer areas utilized by program TABLE are shown in figure 124.

<u>FILE NAME</u>	<u>BUFFER NUMBER (LUN)</u>
INDEXDB or INMODDB	1
TABLTAPE	3
OUTAP2	2 (scratch)
OUTAP3	4 (scratch)
OUTAP4	8 (scratch)

Figure 124. Filehandler Buffer Utilization - Program TABLE

#### 5.4 Input

The user must provide one input parameter to run this program as shown in figure 125. This parameter is the side designator which is used to determine the side (attribute SIDE) to be considered in preparing the data lists. This parameter is entered in card columns 1-4 and is specified as BLUE or RED (see below). If side is BLUE, the target list (FITARGET) contains information on all potential targets owned by side RED; i.e., all RED items in ICLASS 1-15. In this case, the designation of BLUE indicates that the plan to be associated with the TABLTAPE (the plan contained on the sortie specification tape produced by INTRFACE) is for the BLUE offensive systems. Consequently, the remaining data lists (FIVEHIC, FIWEAPON, FIMIBASE, FIBASE and FIRECBS) contain information for side BLUE.

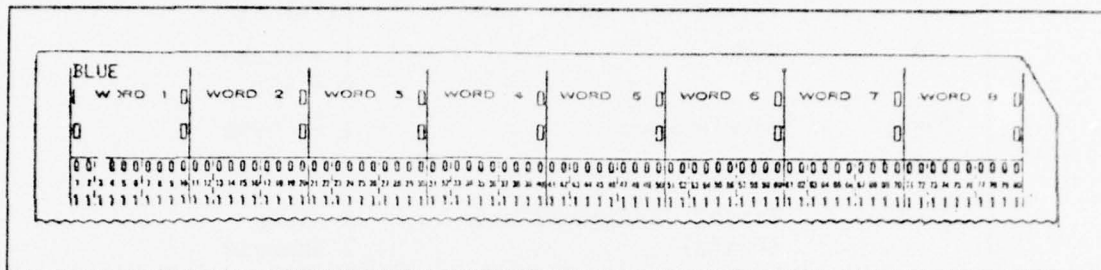


Figure 125. Side Designator Card

### 5.5 Output

1 Output from program TABLE is the TABLTAPE which contains the six data lists shown below. These data lists are also written on the standard output to provide a print. Headings and spacings have been added to the print of the standard output to annotate the contents of these lists. Examples of the printed output for these lists are shown in figures 126-130. The card image format and data content of these lists are described in figures indicated.

- a. Target List: figure 126
- b. Vehicle Characteristics List: figure 127
- c. Weapon Characteristics List: figure 128
- d. Missile Base List: figure 129
- e. Bomber Base List: figure 130
- f. Offensive Recovery Base List: figure 130.1
- g. Example TABLE Printout of Target List: figure 131
- h. Example TABLE Printout of Vehicle Characteristics List: figure 132
- i. Example TABLE Printout of Weapon Characteristics List: figure 133
- j. Example TABLE Printout of Missile Base List: figure 134
- k. Example TABLE Printout of Bomber Base List: figure 135
- l. Example TABLE Printout of Offensive Recovery Base List: figure 135

<u>COLUMNS</u>	<u>DESCRIPTION</u>	<u>REMARKS</u>
1-8	Format and table name	F1TARGET
9	Side	1 = BLUE 2 = RED
10-14	Line number	1 to 9999
15	Blank	
16-20	Target designator code (Desig)	2 Alpha 3 Numeric
21-24	Blank	
25-31	Latitude	Degrees, Minutes, Seconds, S if South, blank if North
32-39	Longitude	Degrees, Minutes, Seconds, E if East, W if West
40-45	Target name	6 characters only
46-55	WAC/BE	10 Alpha
56-60	Category code	5 numeric
61-62	Country code	2 Alpha
63-68	Major reference number	6 numeric
69-70	Task	2 Alpha
71	Blank	
72-76	Index number (INDEXNO)	1-12,000 assigned by INDEXER
77	Blank	
78-80	Complex number	Assigned by INDEXER

Figure 126. Target List (Program TABLE)

<u>COLUMNS</u>	<u>DESCRIPTION</u>	<u>REMARKS</u>
1-8	Format and table name	FIVEHIC
9	Side	1 = BLUE 2 = RED
10-14	Line number	
15	"1"	Fixed constant
16-18	Blank	
19-20	Plane type	Type number = 99
21-55	Blank	
56-58	CEP Mode 1 or CEP Ms1*	Hundreds of feet -0 to 999
59-61	Blank	
62-64	CEP Mode 4*	Hundreds of feet -0 to 999
65-67	Blank	
68-75	Vehicle type name	8 characters
76-80	Blank	

\* CEP Mode 1 or CEP Ms1 = CEP Mode 4

Figure 127. Vehicle Characteristics List (Program TABLE)

<u>COLUMNS</u>	<u>DESCRIPTION</u>	<u>REMARKS</u>
1-8	Format and table name	FIWEAPON
9	Side	1 = BLUE 2 = RED
10-14	Line number (Weapon Number)	
15	Blank	
16-19	Weapon number	Weapon number = 99 (MHDTYPE)
20	Weapon type	0 = Bomb 1 = ASM 2 = Decoy
21-37	Blank	
38-43	Weapon yield	Kilotons
44-46	FISFRAC	
47-80	Blank	

Figure 128. Weapon Characteristics List (Program TABLE)

<u>COLUMNS</u>	<u>DESCRIPTION</u>	<u>REMARKS</u>
1-6	Format and table name	FIBASE
7-8	Blank	
9	Side	1 = BLUE 2 = RED
10	Blank	
11-14	Base number (NUMBAS)	Line number
15	Blank	
16-20	Unit identification number	QUICK index number INDEXNO (1-12000)
21	Blank	
22-28	Latitude	Degrees, minutes, seconds, S if south, blank if north
29-36	Longitude	Degrees, minutes, seconds, E if east, W if west
37	Blank	
38	Red launch command (Bomb- er function)	{ 2 = LRA 3 = TAC 7 = None of the above
39	Blank	
40	Base functions (either home base or dispersal base)	X = yes: Blank or zero = no; Note: differentiation between a "home base" and a "dispersal base" is not made
41-43	Blank	
44	Tanker	1 Alpha character
45-59	Blank	
60-67	Target name	8 Alpha characters
68-69	Blank	
70-71	Country Location	2 Alpha characters

Figure 130. Bomber Base List (Program TABLE)

<u>COLUMNS</u>	<u>DESCRIPTION</u>	<u>REMARKS</u>
1-8	Format and table name	FIRECBS
9	Side	1 = BLUE 2 = RED
10-14	Line number	1 to 99999
15	Blank	
16-20	Target designator code	2 Alpha 3 numeric
21-24	Blank	
25-31	Latitude	Degrees, Minutes, Seconds, S if South, blank if North
32-39	Longitude	Degrees, Minutes, Seconds, E if East, W if West
40-45	Target name	6 Alpha
46-55	WAC/BE	10 Alpha
56-60	Category code	5 numeric
61-62	Country code	2 Alpha
63-68	Major reference number	6 numeric
69-70	Task	2 Alpha
71-75	Index number (INDEXNO)	1-12,000 assigned by INDEXER
76	Blank	
77-80	Capacity	1-9999 assigned by INDEXER

Figure 130.1 Offensive Recovery Base List (Program TABLE)

THIS PAGE INTENTIONALLY LEFT BLANK

|  
207.2

CH-2  
6

TARGET LIST											
S I D E	NO.	TGT DESIG	LAT	LONG	TGT NAME	WAC/BE	CAT CODE	R Y MAJOR	T A S K	INDEX NO.	COMPLEX NO.
F1TARGET2	1	AB 27	300000	1100000	CHRECOV	000000		MX	AB	2435	0
F1TARGET2	2	AB 28	230000	0920000	CHRECOV	000000		CU	AB	2436	0
F1TARGET2	3	AB 29	240000	0820000	CHRECOV	000000		CU	AB	2437	0
F1TARGET2	4	AB 30	240000	0840000	CHRECOV	000000		CU	AB	2438	0
F1TARGET2	5	AB 31	460000	1350000	CHRECOV	000000		JR	AB	2439	0
F1TARGET2	6	AB 32	440000	1350000	CHRECOV	000000		JR	AB	2440	0

Figure 131. Example TABLE Printout of Target List

OFFENSIVE RECOVERY BASE LIST

S I D E	NO.	DESIG	LAT	LONG	NAME	MAC/BE	CAT	CODE	R	Y	MAJOR	K	INDEX NO.	CPCY
FIRECBS	2	1 AB	430000	13800000	ERECOV			JA	JA			AB	1904	60
FIRECBS	2	2 AB	433000	13800000	ERECOV			JA	JA			AB	1905	60
FIRECBS	2	3 AB	430000	13730000	ERECOV			JA	JA			AB	1906	60
FIRECBS	2	4 AB	433000	13715000	ERECOV			JA	JA			AB	1907	60
FIRECBS	2	5 AB	380000	13300000	ERECOV			SK	SK			AB	1908	60
FIRECBS	2	6 AB	390000	13300000	ERECOV			SK	SK			AB	1909	60
FIRECBS	2	7 AB	380000	13215000	ERECOV			SK	SK			AB	1910	60
FIRECBS	2	8 AB	383000	13206000	ERECOV			SK	SK			AB	1911	60
FIRECBS	2	9 AB	420000	02900000	ERECOV			TK	TK			AB	1912	60
FIRECBS	2	10 AB	410000	02854000	ERECOV			TK	TK			AB	1913	60
FIRECBS	2	11 AB	420000	02809000	ERECOV			TK	TK			AB	1914	60
FIRECBS	2	12 AB	423000	02900000	ERECOV			TK	TK			AB	1915	60
FIRECBS	2	13 AB	420000	04000000	ERECOV			TK	TK			AB	1916	60
FIRECBS	2	14 AB	370000	05500000	ERECOV			IR	IR			AB	1917	60
FIRECBS	2	15 AB	380000	05500000	ERECOV			IR	IR			AB	1918	60
FIRECBS	2	16 AB	370000	07200000	ERECOV			PK	PK			AB	1919	60
FIRECBS	2	17 AB	373000	07100000	ERECOV			PK	PK			AB	1920	60
FIRECBS	2	18 AB	370000	07115000	ERECOV			PK	PK			AB	1921	60
FIRECBS	2	19 AB	580000	00700000	ERECOV			UK	UK			AB	1922	60
FIRECBS	2	20 AB	581200	00600000	ERECOV			UK	UK			AB	1923	60
FIRECBS	2	21 AB	550000	00700000	ERECOV			UK	UK			AB	1924	60
FIRECBS	2	22 AB	480000	01200000	ERECOV			WG	WG			AB	1925	60
FIRECBS	2	23 AB	600000	17500000	WRECOV			US	US			AB	1926	60
FIRECBS	2	24 AB	610000	17500000	WRECOV			US	US			AB	1927	60
FIRECBS	2	25 AB	600000	17548000	WRECOV			US	US			AB	1928	60
FIRECBS	2	26 AB	700000	02200000	WRECOV			GL	GL			AB	1929	60

Figure 135.1 Example TABLE Printout of Offensive Recovery Bases

THIS PAGE INTENTIONALLY LEFT BLANK