AD-A069 055 AIR FORCE PACKAGING EVALUATION AGENCY WRIGHTATTERSON --ETC F/G 14/2
PACKAGING AND HANDLING ANALYSIS OF THE LN-31 (683420-14) INERTI--ETC(U)
APR 69 F C JARVIS

UNCLASSIFIED PTPT-79-3 NL

1 OF 1
AD
A069 055

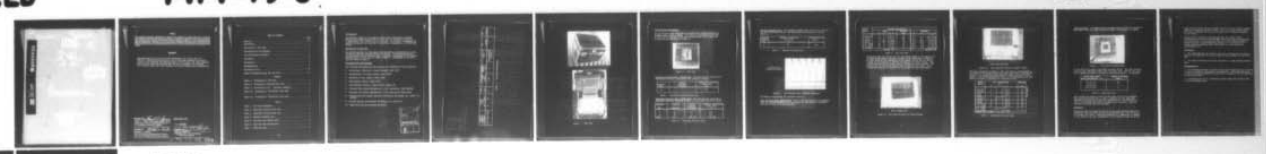

END
DATE
FILMED
6-79
DDC

DDC FILE COPY

AD A069055

NOTICE

When government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto. This report is not to be used in whole or in part for advertising or sales purposes.

ABSTRACT

High maintenance cost of the Inertial Measurement Unit (LN-31 IMU, P/N 683420-14, NSN 6605-00-520-5744) for the F-15 aircraft prompted the investigation of the packaging and handling aspects of this item. The rough handling tests and the field test revealed that the pack is adequate for providing the 15G shock protection level required for routine handling and transportation.

PREPARED BY: Frank C. Jarvis
FRANK C. JARVIS, Mechanical Engineering Technician, Materials Engineering Div.
AF Packaging Evaluation Agency

REVIEWED BY: Matthew A. Venetos
MATTHEW A. VENETOS
Chief, Materials Engineering Division
Air Force Packaging Evaluation Agency

PUBLICATION DATE:
04 APR 1979

APPROVED BY: Jack E. Thompson
JACK E. THOMPSON
Director, Air Force Packaging Evaluation Agency

79 05 25 022

TABLE OF CONTENTS

	Page
Abstract	ii
Introduction	1
Description of Test Pack	1
Instrumentation and Equipment	1
Test Procedures and Results	4
Discussion	8
Conclusions	9
Recommendations	9
Distribution List	10
Report Documentation page (DD form 1473)	12

Figures

Figure 1. Photographs of Test Pack	3
Figure 2. Photograph of Simulated Test Load	4
Figure 3. Oscilloscope Trace of Resonant Frequency	5
Figure 4a. Photograph of "Off-Center" Test Load	6
Figure 4b. Photograph of "Off-Center" Test Load	7

Tables

Table 1. Test Pack Information	2
Table 2. Repetitive Vibration Test Data	4
Table 3. Sinusoidal Vibration Test Data	4
Table 4. Resonant Frequency Data	5
Table 5. Drop Test Data (Method 5007)	6
Table 6. Drop Test Data (Consecutive)	7
Table 7. Field Test Data	8

Introduction

This Agency's survey of the Logistics Support Cost Maintenance and Repair Records (K051.PW3M) revealed that the LN-31 IMU is consistently listed as a "High Burner" cost item of the F-15 aircraft. As a result, a packaging and handling evaluation was conducted to determine if packaging is a contributing factor.

Description of Test Pack

The ATA-300 container is fabricated from high density polyethylene with steel reinforced edges and recessed handles and latches. The cushioning inserts are fabricated from polyurethane foam. Additional information on the physical characteristics of this pack is listed in Table I. Photographs of the test pack are shown in Figure 1.

Instrumentation and Equipment

The following instrumentation and equipment was employed for this evaluation:

1. Oscilloscope, Tektronic, 4 channel storage, Model 564B
2. Accelerometer, tri-axial, Endevco, Model 2233E
3. Amplifiers (3 ea), Endevco, Model 2414C
4. Power Supply, Endevco, Model 2622C
5. Electrodynamic Vibrator, Unholtz-Dickie, Model 506
6. Vibration Test Machine (mechanical), L.A.B. Corporation, Type 5000-96B
7. Vibration Test Machine (mechanical), L.A.B. Corporation, Model 41012
8. Transportation Environment Recorder, Bolt-Beranek and Newman Inc., Model 714, S/N 203
9. Recorder Readout, Bolt-Beranek and Newman, Inc., Model 615
10. Chain Hoist and Quick Release Mechanism

ACCESSION for
NTIS White Section
DDC Buff Section
UNANNOUNCED
JUSTIFICATION
BY
DISTRIBUTION/AVAILABILITY CODES
Dist. AVAIL. and/or SPECIAL
A

INSIDE DIMENSIONS (INCHES)	WEIGHT (LBS) NET	WEIGHT (LBS) GROSS	CUBE (FT^3)	CUSHIONING MATERIAL TH'K (INCHES)	CUSHIONING MATERIAL DENSITY (pcf)	CUSHIONING MATERIAL TYPE	NR. LATCHES	NR. HANDLES
28 X 24½ X 20½	55	93	9	5-6¼	2	POLYURETHANE (Ester)	2	2

Table 1. Test Pack Information

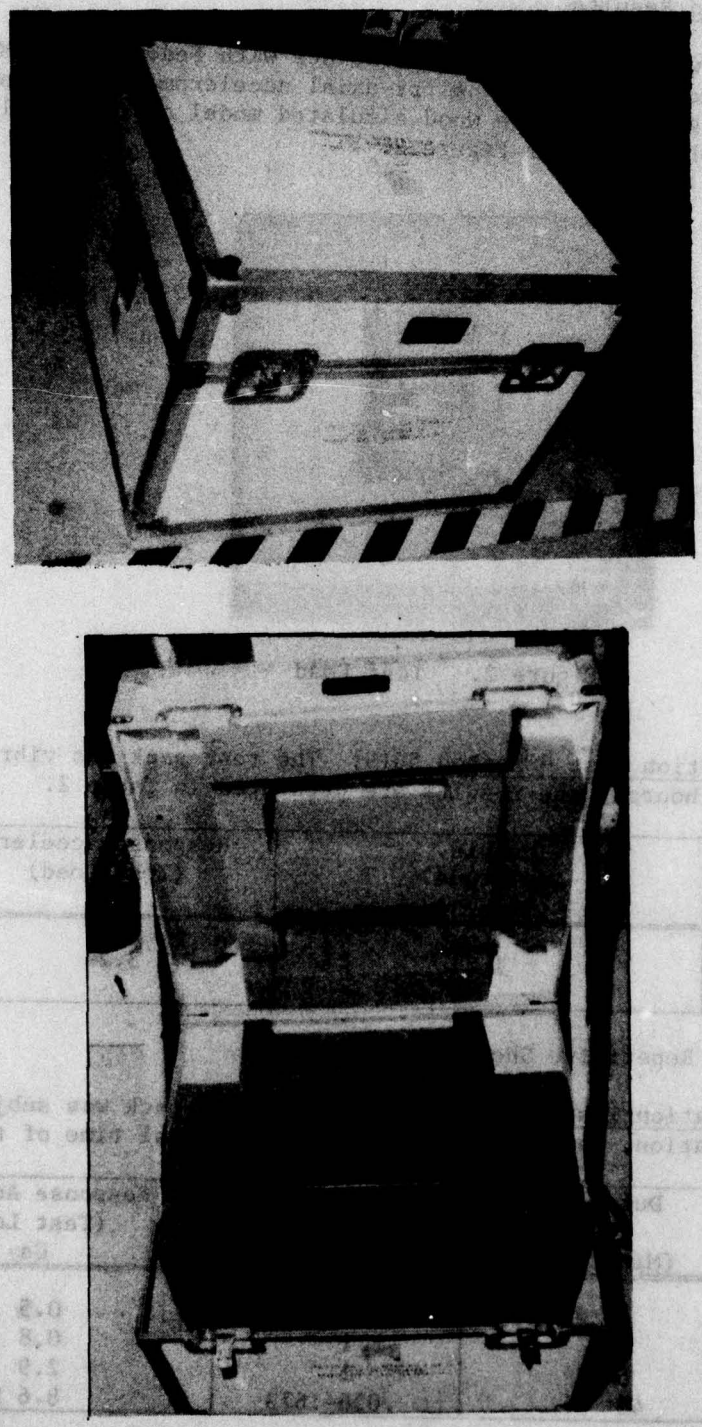

Figure 1. Test Pack

Test Procedure and Results

All of the tests were conducted in accordance with Federal Test Method Standard 101B, except as noted. A tri-axial accelerometer was located at the center of gravity of the wood simulated model of the LN-31 IMU as shown in the photograph of Figure 2.

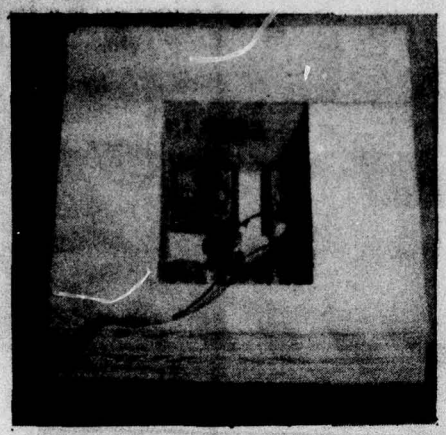

Figure 2. Test Load

Repetitive Vibration Test - Method 5019: The test pack was vibrated for a period of two hours. The results are presented in Table 2.

Frequency (HZ)	Double Amplitude (Inches)	Response Acceleration (Test Load) Gs
4.5	1	3.2

Table 2. Repetitive Shock Vibration Data

Sinusoidal Vibration Test - Method 5020: The test pack was subjected to sinusoidal vibration, as shown in Table 3, for a total time of two hours.

Frequency (HZ)	Duration (Minutes)	Double Amplitude (Inches)	Response Acceleration (Test Load) Gs
2	5	1	0.5
3	5	1	0.8
5	5	1	2.9
5-500	45	.036-.673	8.6 MAX

Table 3. Sinusoidal Vibration Data

Resonant Frequency Test: The resonant frequency data is listed in Table 4 and the oscilloscope trace of the acceleration-time history is show in Figure 3.

Resonant Frequency (HZ)	Response Acceleration (Test Load) Gs	Transmissibility Factor
14	8.5	3.28

Table 4. Resonant Frequency Data

2 Gs/cm (vert.)
50 msec/cm (horiz.)

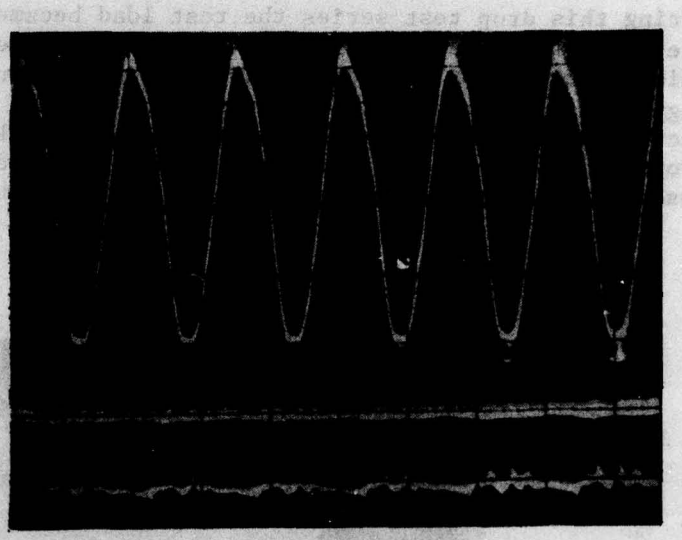

Figure 3. Oscilloscope Trace (Resonant Frequency)

No damage occured during the vibration analysis.

Free Fall Drop Test - Method 5007: The 21 inch drop test data are compared with the Mcdonnell-Douglas test data (Report No. 668-103.BL-2) in Table 5. Note the results are in good agreement.

Impact Surface	MAXIMUM ACCELERATION - G								
	AFPEA				DURATION	MCDONNELL			
	X	Y	Z	R	(ms)	X	Y	Z	R
3 (Bottom)	0	2	12	12.2	55	1.9	2.4	10.1	10.6
1 (Top)	2	1	11	11.2	65	0	0	9.8	9.8
2 (Front)	1	10	4	10.8	75	1.9	10.6	3.1	10.6
4 (Back)	0	10	0	10.0	75	1.5	11.6	2.0	11.8
5 (L. Side)	10	0	2	10.2	75	10.1	0.4	1.6	10.2
6 (R. Side)	9	3	2	9.7	65	11.3	2.0	0	11.3
3-5 (Edge)	10	3	7	12.6	55	9.3	2.4	6.6	11.7
			Average	11.0				Average	10.9

Table 5. Drop Test Data

During this drop test series the test load became wedged in the corner or to one side of the cushion cavity as is shown in the photographs of Figure 4. This was caused by the compression of the cushion inserts and the lack of rigidity of the material to restrain the load in the cushion cavity. This occured after one drop on either side or the back and front surfaces. The drops on the top and bottom surfaces did not produce this effect. This observation prompted the inclusion of the consecutive drop test series.

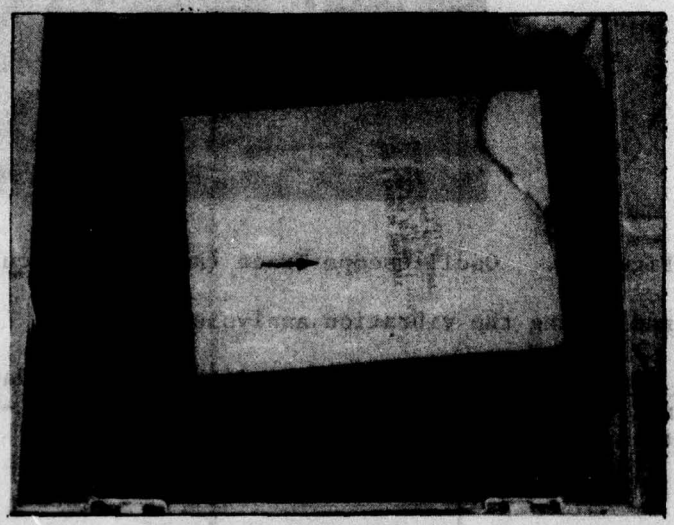

Drop on Right Side

Figure 4a. Test Load Off-Center of Cushion Cavity

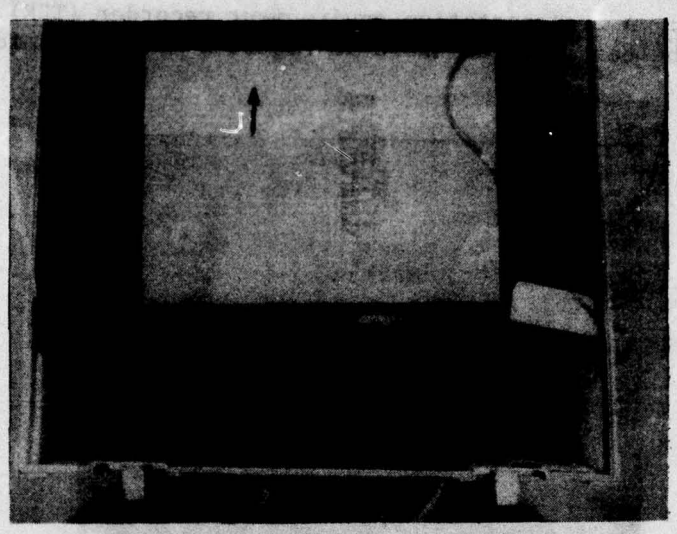

Drop on Back Surface

Figure 4b. Test Load Off- Center of Cushion Cavity

The data is presented in Table 6. The test load was re-positioned in the center of the cushion cavity after each second drop. Although the second of two consecutive drops produced a shock level which is 36% greater, it did not significantly reduce the effectiveness of the pack which is designed to provide a 15 G protection level.

IMPACT SURFACE	MAX. ACCELERATION (Gs) X	Y	Z	R	DURATION (ms)	
3 (Bottom)	2	2	12	12.3	55	No Effect
3 (Bottom)	1	2	12	12.2	55	
1 (Top)	1	5	11	12.1	65	
1 (Top)	0	3	12	12.4	65	
2 (Front)		M I S S E D			-	
2 (Front)	1	14	4	14.6	60	
4 (Back)	0	10	2	10.2	70	
4 (Back)	3	17	5	18.0	45	
5 (L. Side)	9	0	4	9.8	70	
5 (L. Side)	15	3	3	15.6	60	
6 (R. Side)		M I S S E D				
6 (R. Side)	17	3	5	18.0	45	
AVERAGE FOR 1st DROP: 11.1, 2nd: 15.1						

Table 6. Consecutive Drop Test Data

Field Test Data: A transportation environment recorder (TER) was secured in the cavity of the test load as shown in Figure 5 and packed for shipment

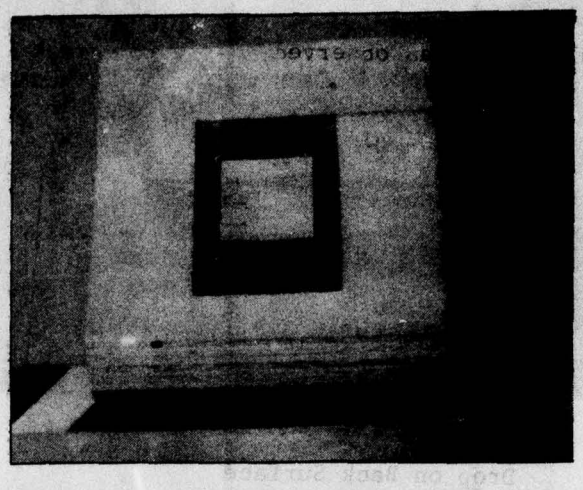

Figure 5. Test Load with TER Recorder

to Luke AFB AZ via Logair from Wright-Patterson AFB OH. The route included stops at Scott, Whiteman, Tinker, Hill and Nellis AFB. Data for the return trip to Wright-Patterson is included in the data of Table 7. A resultant

SHOCK LEVEL RANGE (PEAK ACCELERATION - Gs)	NUMBER OF RECORDED SHOCKS
2.5 to 5.0	140
5.0 to 7.5	7
7.5 to 10.0	4
10.0 to 12.5	3

Table 7. Field Test Data

type recorder was used to collect the test data for this test shipment. This instrument records the x, y and z components of each impact and immediately computes and records the resultant force. The majority of the low level shocks are caused by transportation vibration. Only the resultant values are shown in the table.

Discussion

During the drop test series one of the two cam lock fasteners came loose (unlatched) after the fifth drop and both fasteners came loose at the end of the drop test series. This was attributed to a combination of bending of the fastener lips and a compression of the container tongue and groove.

Cargo tie-down straps will also compress the two sections of the containe together and allow the latches to open. This is a typical problem with this type of fastener and it occurs on many of the containers evaluated by this agency.

During the pack analysis it was observed that the cushion inserts included many cut-outs and beveled edges which would require considerable fabrication time. It is recognized that the cut-outs were necessary to provide the proper load bearing area; however, it is believed a less complex design is feasible which could result in a cost savings of approximately 25%.

Conclusions

1. The rough handling tests and the field test revealed that the pack is adequate to provide the 15 G shock protection level required for the LN-3 IMU.

2. The camlock fasteners can become unlatched in a rough handling enviro ment.

Recommendations

1. The container fastener lip depth and the strike depth should be incre to prevent accidental unlatching of the mechanism. This modification may or may not include increasing the cam travel to compensate for the additi lip and strike depth.

2. Investigate the use of a simplified cushion design for the LN-31 IMU to reduce packaging costs.

DISTRIBUTION LIST

HQ USAF/LETN Wash DC 20330	1
AGMC/SNA Newark AFS OH 43055	1
Aviation Supply Office ATTN: TEP-A Philadelphia PA 19111	1
Commander US Army Natick R&D Ctr/DRXNM-EPS Natick MA 01760	1
NWC-Earle Colts Neck NJ 07722	1
DESC/DESC-T 1507 Wilmington Pike Dayton OH 45444	1
JMPTC Aberdeen Proving Ground MD 21005	2
ADTC/SD3P Eglin AFB FL 32542	1
WR-ALC/DSP Robins AFB GA 31098	1
OO-ALC/DSTC Hill AFB UT 84406	1
OC-ALC/DSPA Tinker AFB OK 73145	2
OC-ALC/MMIMI Tinker AFB OK 73145	1
SA-ALC/DSP Kelly AFB TX 78241	1
SM-ALC/DSP McClellan AFB CA 95652	1

DISTRIBUTION LIST (Contd)

Tobyhanna Army Depot/DRXTO-TP-S Tobyhanna PA 18466	1
HQ AFSC/LGT Andrews AFB DC 20334	1
AFALD/PT	1
AFLC/LOZPP	1
AFALD/PTP Library	20
DDC-TC (Accessions Division) Alexandria VA 22314	12
DLSIE/DRXMC-D US Army Logistics Management ATTN: Mr. Malcolm Alley Fort Lee VA 23801	2
OC-ALC/MMH Tinker AFB OK 73145	1
OC-ALC/MMS Tinker AFB OK 73145	1
AGMC/DMTP Newark AFS OH 43055	1
USA Natick Labs (DRDNA-EPS) Natick MA 01760	1
NAVSUPSYSCMD (SUP-0321A) Wash DC 20376	5
USA Armament Research & Development Command ATTN: DRDAR-LCU-TP Dover NJ 07801	1

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER PTPT Report No. 79-3	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) PACKAGING AND HANDLING ANALYSIS OF THE LN-31 (683420-14) INERTIAL MEASUREMENT UNIT		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER AFPEA Project No. 78-P7-51
7. AUTHOR(s) Frank C. Jarvis		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS AFALD/PTPT Wright-Patterson AFB OH 45433		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS AFALD/PTP Wright-Patterson AFB OH 45433		12. REPORT DATE April 1979
		13. NUMBER OF PAGES 16
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

APPROVED FOR PUBLIC RELEASE
DISTRIBUTION UNLIMITED

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

F-15 IMU (LN-31); packaging, reusable container, shock and vibration test, field test

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

High maintenance cost of the Inertial Measurement Unit (LN-31 IMU, P/N 683420-14, NSN 6605-00-520-5744) for the F-15 aircraft prompted the investigation of the packaging and handling aspects of this item. The rough handling tests and the field test revealed that the pack is adequate for providing the 15 G shock protection level required for routine handling and transportation.

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)