


AD-A193 678

AGARD (ADVISORY GROUP FOR AEROSPACE RESEARCH AND
DEVELOPMENT) ENGINE DISC. (U) NAVAL AIR DEVELOPMENT
CENTER WARMINGIER PA AIR VEHICLE AND CR. . . E U LEE
12 AUG 87 NADC-87189-60

1/1


UNCLASSIFIED

F/G 11/6.1 NL

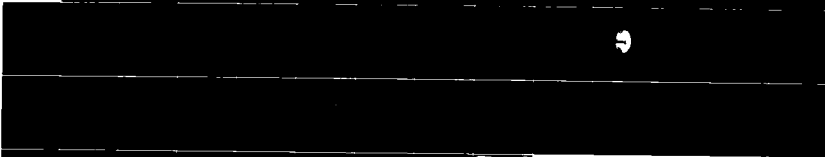

AGARD
DISC
E U LEE

END
DATE
78



DTIC FILE COPY

2

REPORT NO. NADC-87169-60

AD-A193 678



**AGARD ENGINE DISC MATERIAL COOPERATIVE TEST
(SUPPLEMENTARY PROGRAM)**

Eun U. Lee

Air Vehicle and Crew Systems Technology Department

NAVAL AIR DEVELOPMENT CENTER

Warminster, Pennsylvania 18974

DTIC
ELECTE
MAY 19 1988
S **D**
CD

12 AUGUST, 1987

PHASE REPORT

Project No. AP-2

Approved for Public Release; Distribution is Unlimited

Prepared for

NAVAL AIR DEVELOPMENT CENTER

Warminster, Pennsylvania 18974

82 5 10 009

NOTICES

REPORT NUMBERING SYSTEM - The numbering of technical project reports issued by the Naval Air Development Center is arranged for specific identification purposes. Each number consists of the Center acronym, the calendar year in which the number was assigned, the sequence number of the report within the specific calendar year, and the official 2-digit correspondence code of the Command Office or the Functional Department responsible for the report. For example: Report No. NADC-86015-70 indicates the fifteenth Center report for the year 1986 and prepared by the Systems and Software Technology Department. The numerical codes are as follows:

CODE	OFFICE OR DEPARTMENT
00	Commander, Naval Air Development Center
01	Technical Director, Naval Air Development Center
02	Comptroller
05	Computer Department
07	Planning Assessment Resources Department
10	Anti-Submarine Warfare Systems Department
20	Tactical Air Systems Department
30	Battle Force Systems Department
40	Communication & Navigation Technology Department
50	Mission Avionics Technology Department
60	Air Vehicle & Crew Systems Technology Department
70	Systems & Software Technology Department
80	Engineering Support Group

PRODUCT ENDORSEMENT - The discussion or instructions concerning commercial products herein do not constitute an endorsement by the Government nor do they convey or imply the license or right to use such products.

APPROVED BY:

W. F. Moroney

DATE:

4/18/88

W. F. MORONEY
CAPT, MSC, U.S. NAVY

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE				
1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED		1b. RESTRICTIVE MARKINGS N/A		
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION / AVAILABILITY OF REPORT Approved for Public Release; Distribution Unlimited.		
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE				
4. PERFORMING ORGANIZATION REPORT NUMBER(S) NADC-87169-60		5. MONITORING ORGANIZATION REPORT NUMBER(S) N/A		
6a. NAME OF PERFORMING ORGANIZATION Naval Air Development Center	6b. OFFICE SYMBOL (if applicable) 6063	7a. NAME OF MONITORING ORGANIZATION N/A		
6c. ADDRESS (City, State, and ZIP Code) Warminster, PA 18974		7b. ADDRESS (City, State, and ZIP Code) N/A		
8a. NAME OF FUNDING / SPONSORING ORGANIZATION Naval Air Development Center	8b. OFFICE SYMBOL (if applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER N/A		
8c. ADDRESS (City, State, and ZIP Code) Warminster, PA 18974		10. SOURCE OF FUNDING NUMBERS		
		PROGRAM ELEMENT NO	PROJECT NO RS34A51	TASK NO AP-2
				WORK UNIT ACCESSION NO
11. TITLE (Include Security Classification) AGARD Engine Disc Material Cooperative Test (Supplementary Program)				
12. PERSONAL AUTHOR(S) Eun U. Lee				
13a. TYPE OF REPORT Phase	13b. TIME COVERED FROM _____ TO _____	14. DATE OF REPORT (Year, Month, Day)	15. PAGE COUNT	
16. SUPPLEMENTARY NOTATION				
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	SUB-GROUP		
11	06.01		Compressor Spool; Fatigue Crack Initiation; Stress Range; Electrical Potential; Fracture (Micrographs); Crack Length.	
19. ABSTRACT (Continue on reverse if necessary and identify by block number)				
<p>From a gas turbine engine compressor spool of Ti-17 alloy, cylindrical unnotched specimens and flat double edge notched specimens were machined and fatigue-tested. The flat double edge notched specimens were also subjected to electrical potential drop measurements. The microstructure and fracture surface morphology of the representative specimens were examined.</p> <p>The variation of fatigue life, N, with applied stress range, $\Delta\sigma$, was described by an equation of the form $\log N = a + b\Delta\sigma$. The variation of normalized crack voltage, $(V/V_0)/(V_R/V_{R_0})$, with normalized crack length, (a/w), was given by an equation of the form $(V/V_0)/(V_R/V_{R_0}) = A + A_1(a/w) + A_2(a/w)^2 + A_3(a/w)^3$.</p> <p>This investigation was a part of the NATO's AGARD Engine Disc Material Cooperative Test Project.</p>				
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input type="checkbox"/> UNCLASSIFIED/UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS		21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL E.U. Lee		22b. TELEPHONE (Include Area Code) 215-441-1663	22c. OFFICE SYMBOL 6063	

TABLE OF CONTENTS

	<u>Page</u>
List of Tables	4
List of Figures	5
Introduction	8
Experimental Procedure	9
Material and Specimen Preparation	9
Microstructural Examination	9
Fatigue Tests	9
Electrical Potential Drop Crack Measurement	9
Visual Measurement of Crack Size	10
Fractographic Examination	10
Results and Discussion	11
Cylindrical Unnotched Specimen Tests	11
Flat Double Edge Notched Specimen Tests	11
Microstructure	14
Fractography	14
Summary	15
References	17



Accession For	
NTIS - CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

NADC 87169-60

LIST OF TABLES

<u>Table</u>	<u>Title</u>	<u>Page</u>
1.	Chemical Composition of Ti-17 Alloy	18
2.	Applied Stress Range and Corresponding Fatigue Fracture Life in Cylindrical Unnotched Specimen	19
3.	Applied Stress Range and Corresponding Fatigue Crack Initiation Life and Fatigue Fracture Life in Flat Double Edge Notched Specimen	20
4.	Fatigue - Notch Factors, K_t , of Ti-17 and Ti-6Al-4V Alloys	21

LIST OF FIGURES

<u>Figure</u>	<u>Title</u>	<u>Page</u>
1.	Compressor Spool	22
2.	Cylindrical Unnotched Specimen	23
3.	Flat Double Edge Notched Specimen	24
4.	Trapezoidal Load Waveform	25
5.	Attachment of Potential Leads and Set-Up of Wiring — Flat Double Edge Notched Specimen	26
6.	Set-Up for Electrical Potential Drop Measurement	27
7.	Applied Stress Range and Corresponding Fatigue Fracture Life in Cylindrical Unnotched Specimen	28
8.	Change of Normalized Crack Voltage with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 1 ($\Delta\sigma = 475$ MPa)	29
9.	Change of Normalized Crack Voltage with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 2 ($\Delta\sigma = 475$ MPa)	30
10.	Change of Normalized Crack Voltage with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 4 ($\Delta\sigma = 625$ MPa)	31
11.	Change of Normalized Crack Voltage with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 5 ($\Delta\sigma = 775$ MPa)	32
12.	Change of Normalized Crack Voltage with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 6 ($\Delta\sigma = 775$ MPa)	33

NADC 87169-60

<u>Figure</u>	<u>Title</u>	<u>Page</u>
13.	Change of Crack Length with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 1 ($\Delta\sigma = 475$ MPa)	34
14.	Change of Crack Length with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 2 ($\Delta\sigma = 475$ MPa)	35
15.	Change of Crack Length with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 4 ($\Delta\sigma = 625$ MPa)	36
16.	Change of Crack Length with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 5 ($\Delta\sigma = 775$ MPa)	37
17.	Change of Normalized Crack Voltage with Normalized Crack Length in Flat Double Edge Notched Specimen No. 1 ($\Delta\sigma = 475$ MPa)	38
18.	Change of Normalized Crack Voltage with Normalized Crack Length in Flat Double Edge Notched Specimen No. 2 ($\Delta\sigma = 475$ MPa)	39
19.	Change of Normalized Crack Voltage with Normalized Crack Length in Flat Double Edge Notched Specimen No. 4 ($\Delta\sigma = 625$ MPa)	40
20.	Change of Normalized Crack Voltage with Normalized Crack Length in Flat Double Edge Notched Specimen No. 5 ($\Delta\sigma = 775$ MPa)	41
21.	Applied Stress Range and Corresponding Fatigue Crack Initiation Life in Flat Double Edge Notched Specimen	42
22.	Applied Stress Range and Corresponding Fatigue Fracture Life in Flat Double Edge Notched Specimen	43

NADC 87169-60

<u>Figure</u>	<u>Title</u>	<u>Page</u>
23.	Microstructure of Specimen Material Ti-17 Alloy	
	(a) Cylindrical Unnotched Specimen	
	(b) Flat Double Edge Notched Specimen	44
24.	Fractograph of Cylindrical Unnotched Specimen	45
25.	Fractograph of Flat Double Edge Notched Specimen	46

NADC 87169-60

INTRODUCTION

The AGARD (Advisory Group for Aerospace Research and Development) engine disc material cooperative test program is a joint task of the NATO member laboratories to characterize the fatigue cracking and fracture behavior of aircraft gas turbine engine discs. The basic knowledge on the fatigue and fracture is essential for formulating a reliable prediction methodology for aircraft gas turbine engine disc life.

This program consists of two phases. The first phase, CORE project, was aimed at test and specimen standardization and calibration of the different laboratories. It was completed in 1986 and the NADC portion of the work was reported¹ previously. The second phase, SUPPLEMENTARY project, addresses the parameters relevant for real service operation: mission loading, sequence and dwell effects, temperature, fatigue threshold, etc. As a portion of the SUPPLEMENTARY project, NADC investigated the fatigue behavior, electrical potential change with crack growth, microstructure, and fractograph of the specimens from a gas turbine engine compressor spool of Ti-17 alloy. Experimental details of this investigation and the results are presented in this report.

EXPERIMENTAL PROCEDURE

The experimental procedure includes Material and Specimen Preparation, Microstructural Examination, Fatigue Tests, Electrical Potential Drop Crack Measurement, Visual Measurement of Crack Size, and Fractographic Examination.

MATERIAL AND SPECIMEN PREPARATION

A Ti-17 alloy taken from a compressor spool of an aircraft gas turbine engine was selected as the specimen material for the SUPPLEMENTARY project of the AGARD program. From the compressor spool, (figure 1), two types of specimens, cylindrical unnotched specimens and flat double edge notched specimens, were machined at National Aeronautical Establishment, Ottawa, Canada, (figures 2 and 3). The nominal chemical composition of the Ti-17 alloy is shown in table 1.

MICROSTRUCTURAL EXAMINATION

A specimen plane, parallel to the crack plane, was polished, etched by Keller's reagent, and examined in an optical microscope.

FATIGUE TESTS

The fatigue tests were conducted at room temperature in laboratory atmosphere using a closed-loop electro-hydraulic MTS machine. The test conditions were stress ratio ($\sigma_{\min}/\sigma_{\max}$) of 0.1, constant amplitude loading of trapezoidal waveform (figure 4), and frequencies of 2.5 Hz for the cylindrical unnotched specimens and 0.25 Hz for the flat double edge notched specimens.

ELECTRICAL POTENTIAL DROP CRACK MEASUREMENT

For the measurement of the electrical potential drop accompanying crack growth in the flat double edge notched specimen, titanium wire potential probes of 0.5 mm dia. were spot-welded at the opposite corners of each specimen notch, (figure 5). Separate leads of titanium wire were also spot-welded on a flat double edge notched specimen of Ti-6Al-4V alloy with an identical dimension, which served as a reference block. A

NADC 87169-60

Hughes Aircraft Stored Energy Welding Power Supply, Model VTW-31B, was used for the spot-welding. The input and output leads of titanium wire were connected to a DC Supply and a Micro Volt-Ammeter, respectively, (figure 6). Prior to the electrical potential drop measurement, the specimen and the MTS machine frame were electrically insulated by Bakelite washers.

A constant D.C. current, $\sim 6.0A$, was passed through the specimen and the electrical potential over the crack plane was measured by two probes located on both sides of the crack. In addition, a voltage in the reference block was measured to account for the temperature effects and current variation.

VISUAL MEASUREMENT OF CRACK SIZE

When a crack became visible on a surface of the flat double edge notched specimen, the fatigue loading was stopped, and the crack length from the notch was measured using a travelling telescope. The measurement was repeated until the specimen fractured.

FRACTOGRAPHIC EXAMINATION

The fractographic examination of fatigue-fractured specimens was carried out using an Advanced Metals Research (AMR) 1000 Scanning Electron Microscope, operated at an accelerating voltage of 20 kv.

RESULTS AND DISCUSSION

The results and discussion are divided into four parts: Cylindrical Unnotched Specimen Tests, Flat Double Edge Notched Specimen Tests, Microstructure, and Fractography.

CYLINDRICAL UNNOTCHED SPECIMEN TESTS

In the fatigue tests of the cylindrical unnotched specimens, the applied stress ranges were 750, 850, and 950 MPa. The stress range, $\Delta\sigma$ (MPa), and the corresponding number of fatigue cycles to fracture (fatigue fracture life), N_f , are tabulated in table 2 and plotted in figure 7. The plot is a straight line and defined by the equation.

$$\Delta\sigma = 1328 - 90 \log N_f$$

or $\log N_f = 14.76 - 0.01 \Delta\sigma$

For a given stress range, the fatigue fracture life of the Ti-17 alloy specimen from a compressor spool is about two orders of magnitude longer than that of the Ti-6Al-4V alloy specimen from a fan disc in the CORE project¹ of this AGARD program. The comparison is also shown in figure 7.

FLAT DOUBLE EDGE NOTCHED SPECIMEN TESTS

In the fatigue tests of the flat double edge notched specimens, the stress ranges were 475, 625, and 775 MPa. During each fatigue test, the electrical potential over the crack plane and the increasing crack length were measured.

The normalized crack voltage, $(V/V_0)/(V_R/V_{R_0})$, is taken in this study as the measure of the electrical potential over the crack plane, where

V_0 : specimen voltage at the start of the test (crack length $a = 0$)

V : specimen voltage

NADC 87169-60

V_{R_0} : reference voltage at the start of the test

V_R : reference voltage

In the initial stage of crack growth, the normalized crack voltage gradually increases with increasing number of fatigue landing cycles. In the final stage of crack growth, the increase is much steeper. A similar change is also observable on the side of the notch with no visible crack. In such a case, the magnitude of the normalized crack voltage is smaller than that on the side of the notch with a visible crack. These changes are shown in figures 8-12 and can be described by the following equations, respectively.

Specimen No.1:

$$(V/V_0)/(V_R/V_{R_0}) = 0.6797 + 6.0719(a/w) - 29.8160(a/w)^2 + 57.3172(a/w)^3$$

Specimen No.2:

$$(V/V_0)/(V_R/V_{R_0}) = 1.3037 + 0.1718(a/w) + 3.4886(a/w)^2 + 2.8947(a/w)^3$$

Specimen No.4:

$$(V/V_0)/(V_R/V_{R_0}) = 0.9927 + 0.4226(a/w) - 3.4603(a/w)^2 + 21.8985(a/w)^3$$

Specimen No.5:

#1 Notch Side:

$$(V/V_0)/(V_R/V_{R_0}) = 1.2438 - 12.9729(a/w) + 213.9109(a/w)^2 - 1,014.2521(a/w)^3$$

#2 Notch Side:

$$(V/V_0)/(V_R/V_{R_0}) = 1.1690 - 7.4328(a/w) + 147.7939(a/w)^2 - 763.3036(a/w)^3$$

The length change of the crack, emanating from a notch, as a function of the number of fatigue loading cycles is similar to the change of the normalized crack voltage. This is shown in figures 13-16.

The increase of the normalized crack voltage with the normalized crack length is shown in figures 17-20. The normalized crack length is defined as a/w , where a is the crack length from a notch and w the width between the two edge notches.

From the plot of the normalized crack voltage vs the number of fatigue loading cycles, the particular number of fatigue loading cycles at which the normalized crack voltage is 1% higher than the initial value is taken as the fatigue crack initiation life N_i . This was suggested in the AGARD Working Document for this project². The applied stress range, $\Delta\sigma$, and the corresponding fatigue crack initiation life, N_i , and the fatigue fracture life, N_f , are tabulated in table 3 and plotted in figures 21 and 22. These plots are straight lines and are defined by the following equations, respectively.

$$\Delta\sigma = 3037 - 594 \log N_i$$

$$\text{or } \log N_i = 5.11 - 0.002\Delta\sigma$$

$$\Delta\sigma = 2557 - 468 \log N_f$$

$$\text{or } \log N_f = 5.46 - 0.002\Delta\sigma$$

The fatigue crack initiation life and the fatigue fracture life of the Ti-17 alloy specimen are greater than those of the Ti-6Al-4V alloy specimen¹ at the higher stress ranges but close to those at the lower stress range, (figures 21 and 22).

For a given stress range, the fatigue fracture life of the flat double edge notched specimen is shorter than that of the cylindrical unnotched specimen, (figure 22). The reduction in the fatigue fracture life due to the double edge notches is greater in Ti-17 alloy than in the Ti-6Al-4V alloy¹. In this study, the fatigue-life reduction factor or fatigue-notch factor, K_f , is defined as the ratio of the stress range of the unnotched specimen to that of the notched specimen at a specified number of fatigue loading cycles. The K_f values of the Ti-17 alloy are 1.41, 1.73, and 2.00, whereas those of the Ti-6Al-4V alloy¹ are 1.31, 1.42, and 1.48, at 10,000, 20,000 and 30,000 fatigue loading cycles, respectively, (table 4). This indicates that the fatigue-notch sensitivity of the Ti-17 alloy is 8 ~ 35% greater than that of the

Ti-6Al-4V alloy, although the fatigue resistance of the former is greater than that of the latter in the test of cylindrical unnotched specimens.

MICROSTRUCTURE

The optical micrographs of the cylindrical unnotched specimen and the flat double edge notched specimen are shown in figures 23(a) and (b), respectively. The microstructure consists of alpha at prior beta grain boundaries and transformed beta containing acicular alpha.

FRACTOGRAPHY

Each fractograph of the fatigue-fractured cylindrical unnotched specimen and the flat double edge notched specimen shows a slow crack growth area of thumb-nail shape along the outside diameter (O.D.) surface or one of the notches and an overload fracture area, (figures 24 and 25). From the fracture surface morphology, the fatigue crack initiation site can be located at a point on the O.D. surface of the cylindrical unnotched specimen or one notch of the flat double edge notched specimen. In the vicinity of the crack initiation site, cleavage facets are visible, and in the rest of the slow crack growth area, patches of fatigue striations are noticeable. The overload fracture area contains separated-grain facet and shear-lip regions. The grain facets and shear-lip exhibit dimples. Apparently, intergranular fracture and microvoid coalescence takes place during the overload fracture in this material. Such an intergranular fracture was not detectable during the overload fracture in the Ti-6Al-4V alloy specimen from a fan disc in the CORE project.¹

SUMMARY

1. From a gas turbine engine compressor spool of Ti-17 alloy, two groups of specimens: cylindrical unnotched specimens and flat double edge notched specimens were machined and fatigue-tested. The flat double edge notched specimens were also subjected to electrical potential drop measurement. The microstructure and fracture surface morphology of the representative specimens were examined.
2. The variation of the fatigue crack initiation life, N_i , and the fatigue fracture life, N_f , with the applied stress range, $\Delta\sigma$, can be described by the following equations.

Cylindrical Unnotched Specimen:

$$\log N_f = 14.76 - 0.01\Delta\sigma$$

Flat Double Edge Notched Specimen:

$$\log N_i = 5.11 - 0.002\Delta\sigma$$

$$\log N_f = 5.46 - 0.002\Delta\sigma$$

3. In the flat double edge notched specimens, the normalized crack voltage increases with the number of fatigue loading cycles sluggishly in the initial stage of crack growth and rapidly in the final stage of crack growth. A similar feature is also seen in the change of crack length with the number of fatigue loading cycles. The change of the normalized crack voltage with the normalized crack length can be described by the equation of the form

$$(V/V_0)/(V_R/V_{R_0}) = A + A_1(a/w) + A_2(a/w)^2 + A_3(a/w)^3$$

where

V_0 : specimen voltage at the start of the test (crack length = 0)

V : specimen voltage

V_{R_0} : reference voltage at the start of the test

V_R : reference voltage

a : crack length

w : specimen width

A, A_1, A_2, A_3 : constants, which change with specimen

4. The microstructure of the specimens consists of alpha at prior beta grain boundaries and transformed beta containing acicular alpha.
5. The fractographs of the specimens show cleavage facets and fatigue striations within the slow crack growth area and intergranular fracture surfaces and shear-lips with dimples in the overload fracture area.
6. Compared to the Ti-6Al-4V alloy of the CORE project, the Ti-17 alloy shows better fatigue resistance in the unnotched specimen test but greater *fatigue-notch* sensitivity in the notched specimen test.

REFERENCES

1. Lee, Eun U, "AGARD Engine Disc Material Cooperative Test," Report No. NADC-86045-60, 31 March 1986. ADA175533
2. Mom, A.J.A., "Working Document for the AGARD Cooperative Test Programme on Titanium Alloy Engine Disc Material," NLR TR 84022 L, National Aerospace Laboratory NLR, The Netherlands, March 20, 1984.

NADC 87169-60

Table 1. Chemical Composition of Ti-17 Alloy

Element	Weight Percent	
	Minimum	Maximum
Al	4.5	5.5
Sn	1.5	2.5
Zr	1.5	2.5
Mo	3.5	4.5
Cr	3.5	4.5
O	0.08	0.13
N	—	0.04
H	—	0.0125
Fe	—	0.30
Ti	Balance	

NADC 87169-60

Table 2. Applied Stress Range and Corresponding Fatigue Fracture Life in
Cylindrical Unnotched Specimen

<u>Specimen No.</u>	<u>Stress Range $\Delta\sigma$ (MPa)</u>	<u>Fatigue Fracture Life N_f (cycle)</u>
1	750	1,851,300
2	750	1,460,560
3	850	377,240
5	850	472,885
4	950	14,450
6	950	12,410

Table 3. Applied Stress Range and Corresponding Fatigue Crack Initiation Life and Fatigue Fracture Life in Flat Double Edge Notched Specimen

<u>Specimen No.</u>	<u>Stress Range $\Delta\sigma$ (MPa)</u>	<u>Fatigue Crack Initiation Life N_i (cycle)</u>	<u>Fatigue Fracture Life N_f (cycle)</u>
1	475	—	30,088
2	475	18,500	23,643
3	625	—	10,456
4	625	13,100	16,738
5	775	5,700	6,212
6	775	7,200	7,566

NADC 87169-60

Table 4. Fatigue - Notch factors, K_t , of Ti-17 and Ti-6Al-4V Alloys

Fatigue Fracture Life, N_f (cycle)	Stress Range (MPa)				$K_t = \Delta\sigma_c / \Delta\sigma_f$		$\frac{(K_t)_{Ti-17}}{(K_t)_{Ti-6-4}}$
	Cylindrical Specimen		Flat Notched Specimen		Ti-17	Ti-6-4	
	$(\Delta\sigma_c)_{Ti-17}$	$(\Delta\sigma_c)_{Ti-6-4}$	$(\Delta\sigma_f)_{Ti-17}$	$(\Delta\sigma_f)_{Ti-6-4}$			
10,000	966	781	685	597	1.41	1.31	1.08
20,000	941	753	544	532	1.73	1.42	1.22
30,000	925	737	462	498	2.00	1.48	1.35

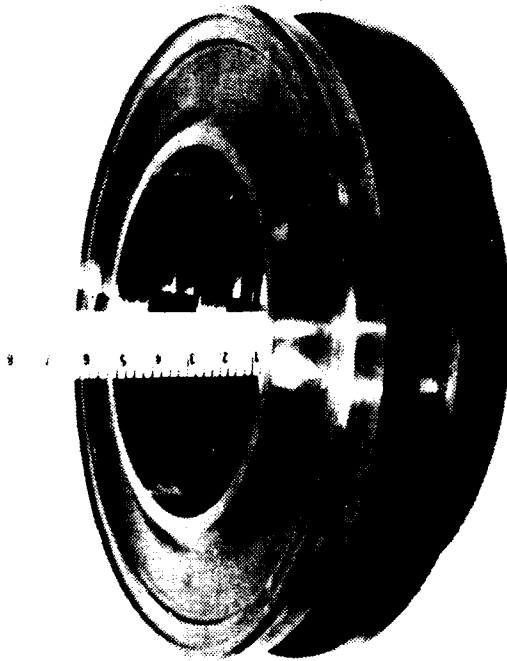


Figure 1 Compressor Spool

NADC 87169-60

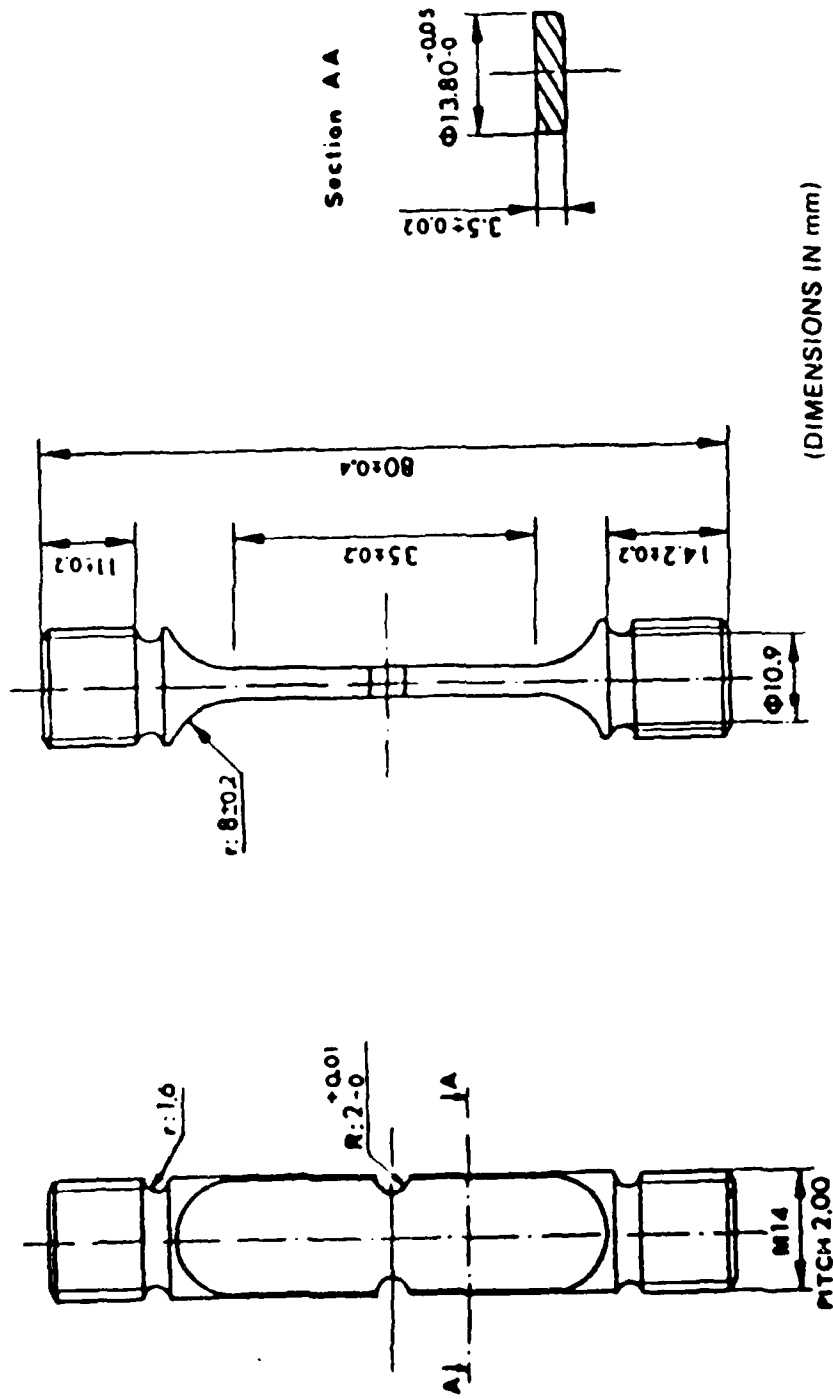


Figure 3. Flat Double Edge Notched Specimen

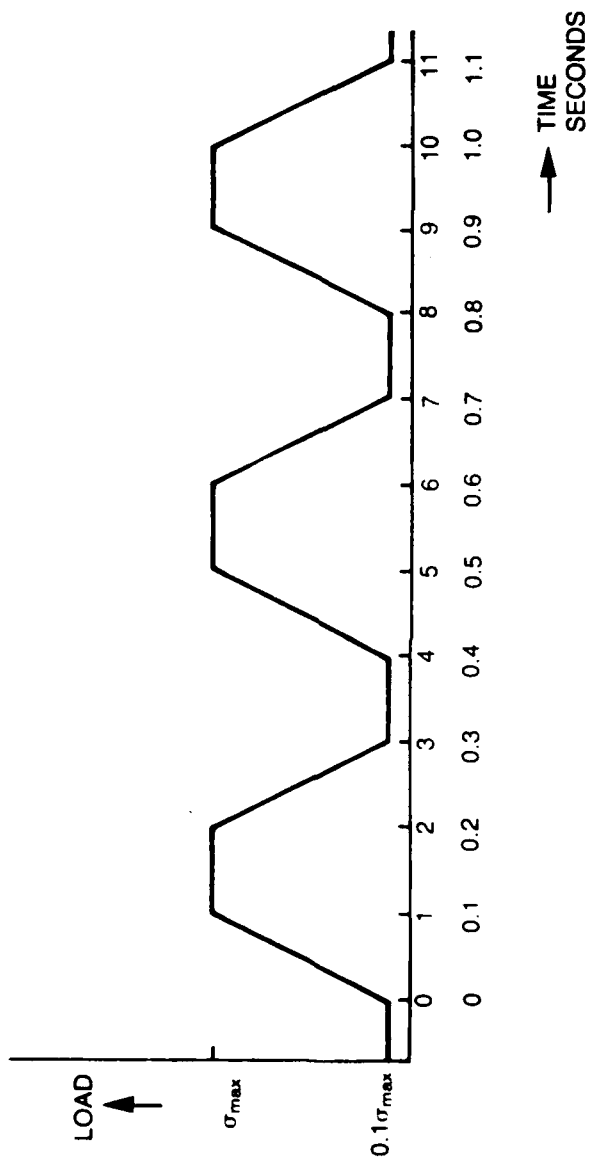


Figure 4. Trapezoidal Load Waveform

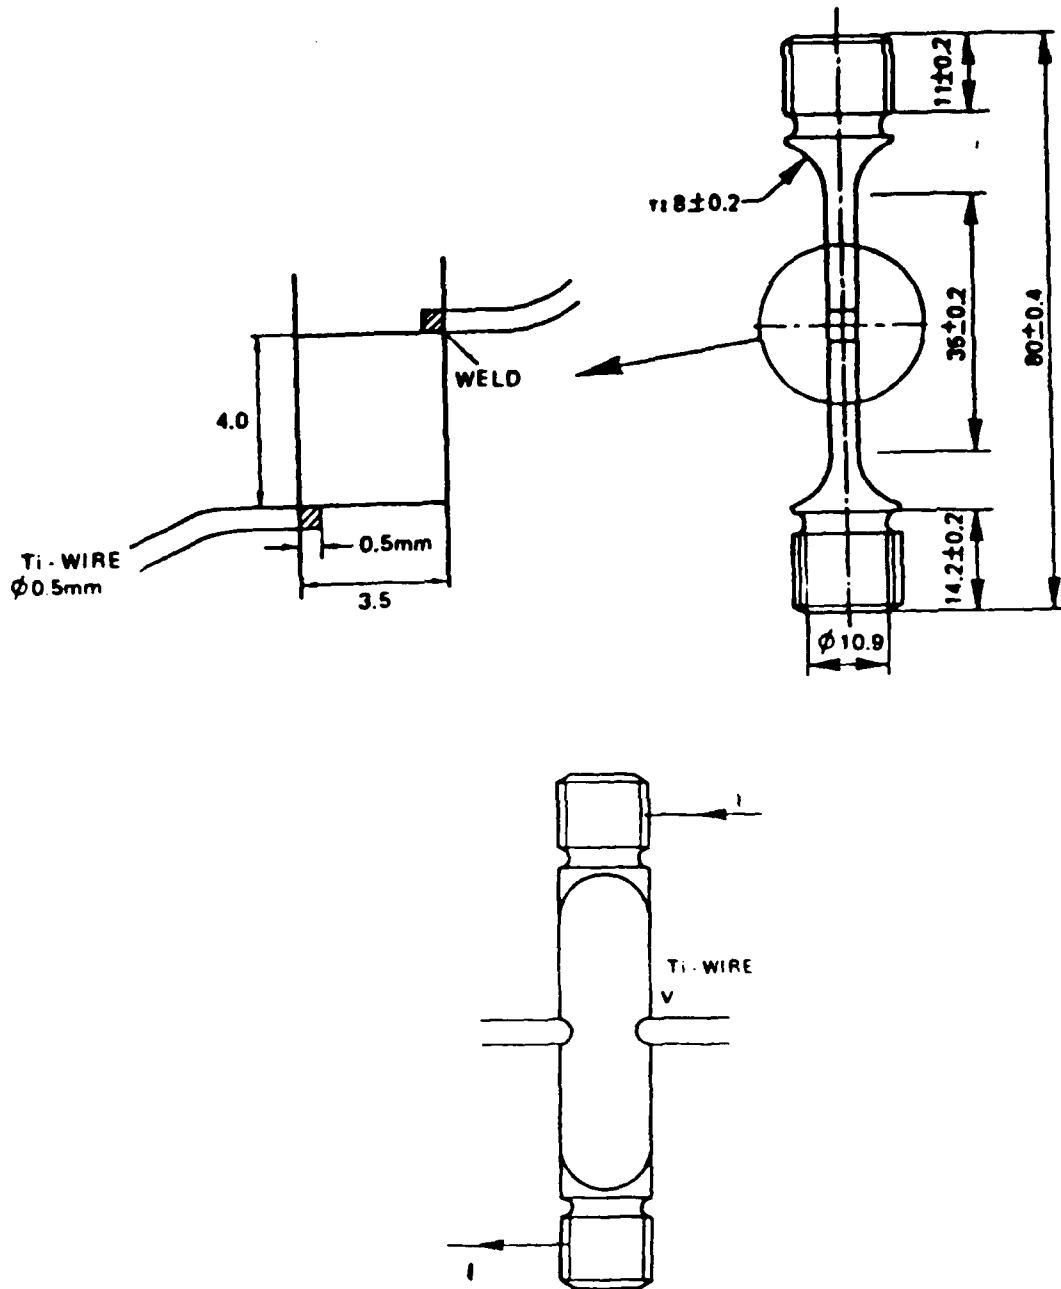


Figure 5. Attachment of Potential Leads and Set-Up of Wiring — Flat Double Edge Notched Specimen

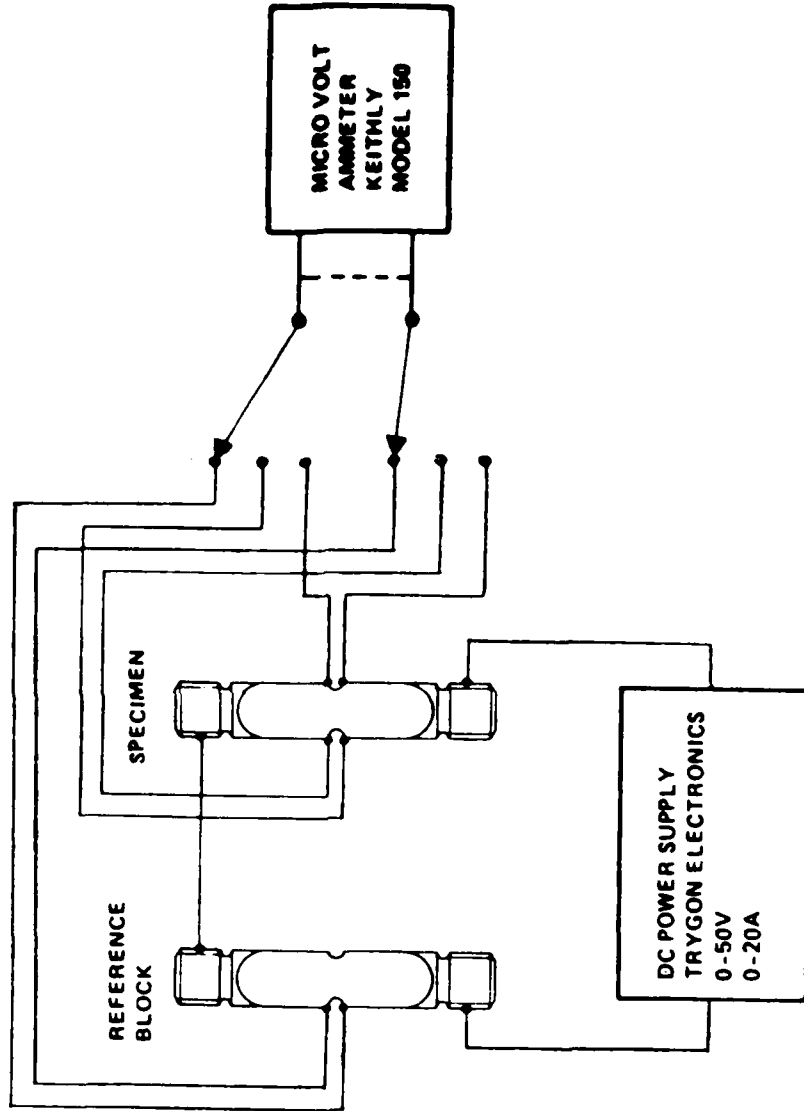


Figure 6. Set-Up for Electrical Potential Drop Measurement

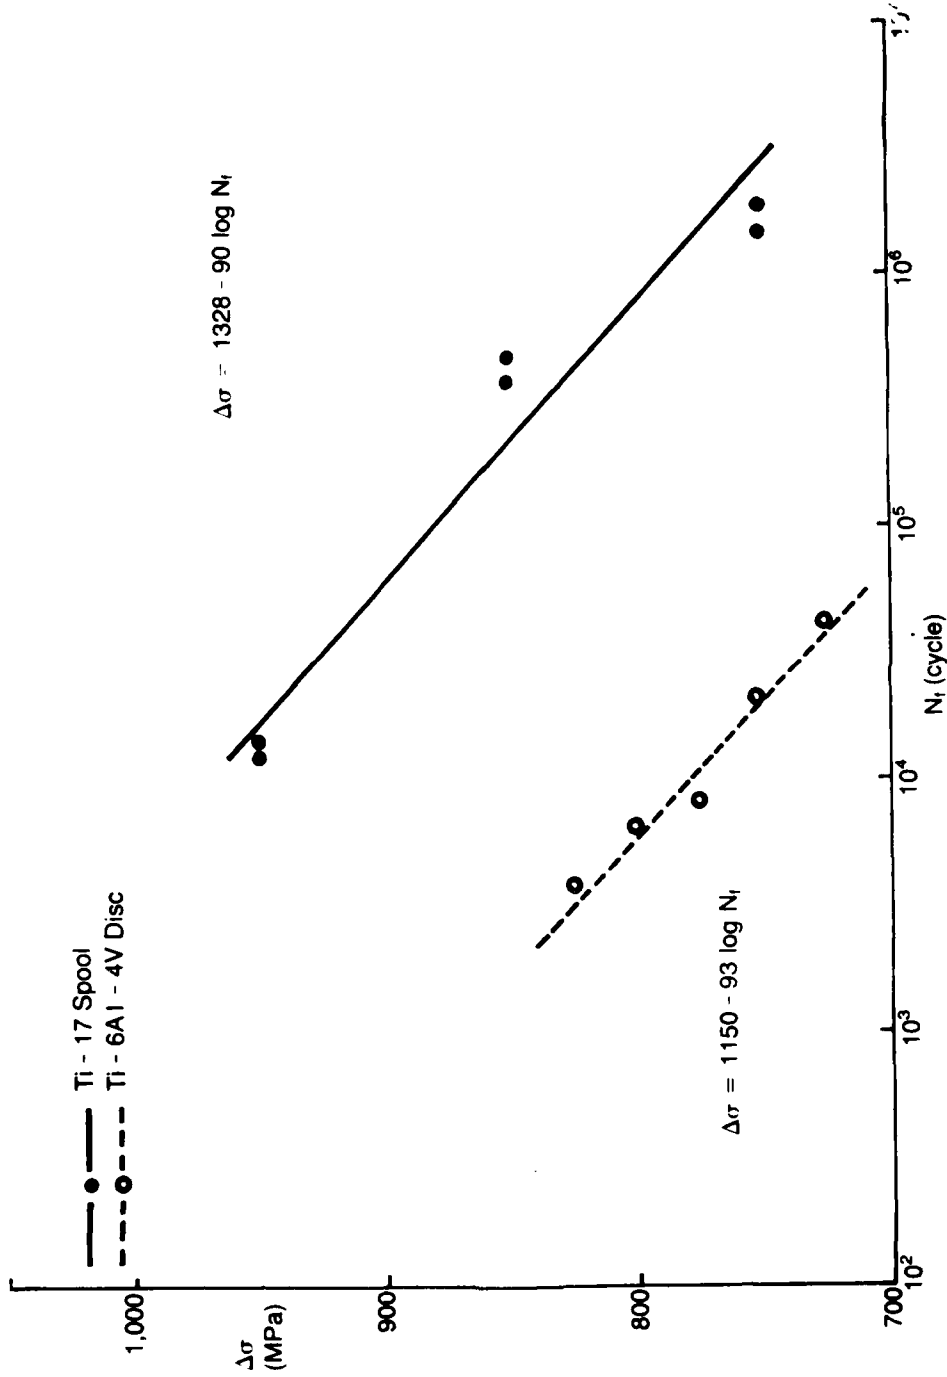


Figure 7. Applied Stress Range and Corresponding Fatigue Fracture Life in Cylindrical Unnotched Specimen

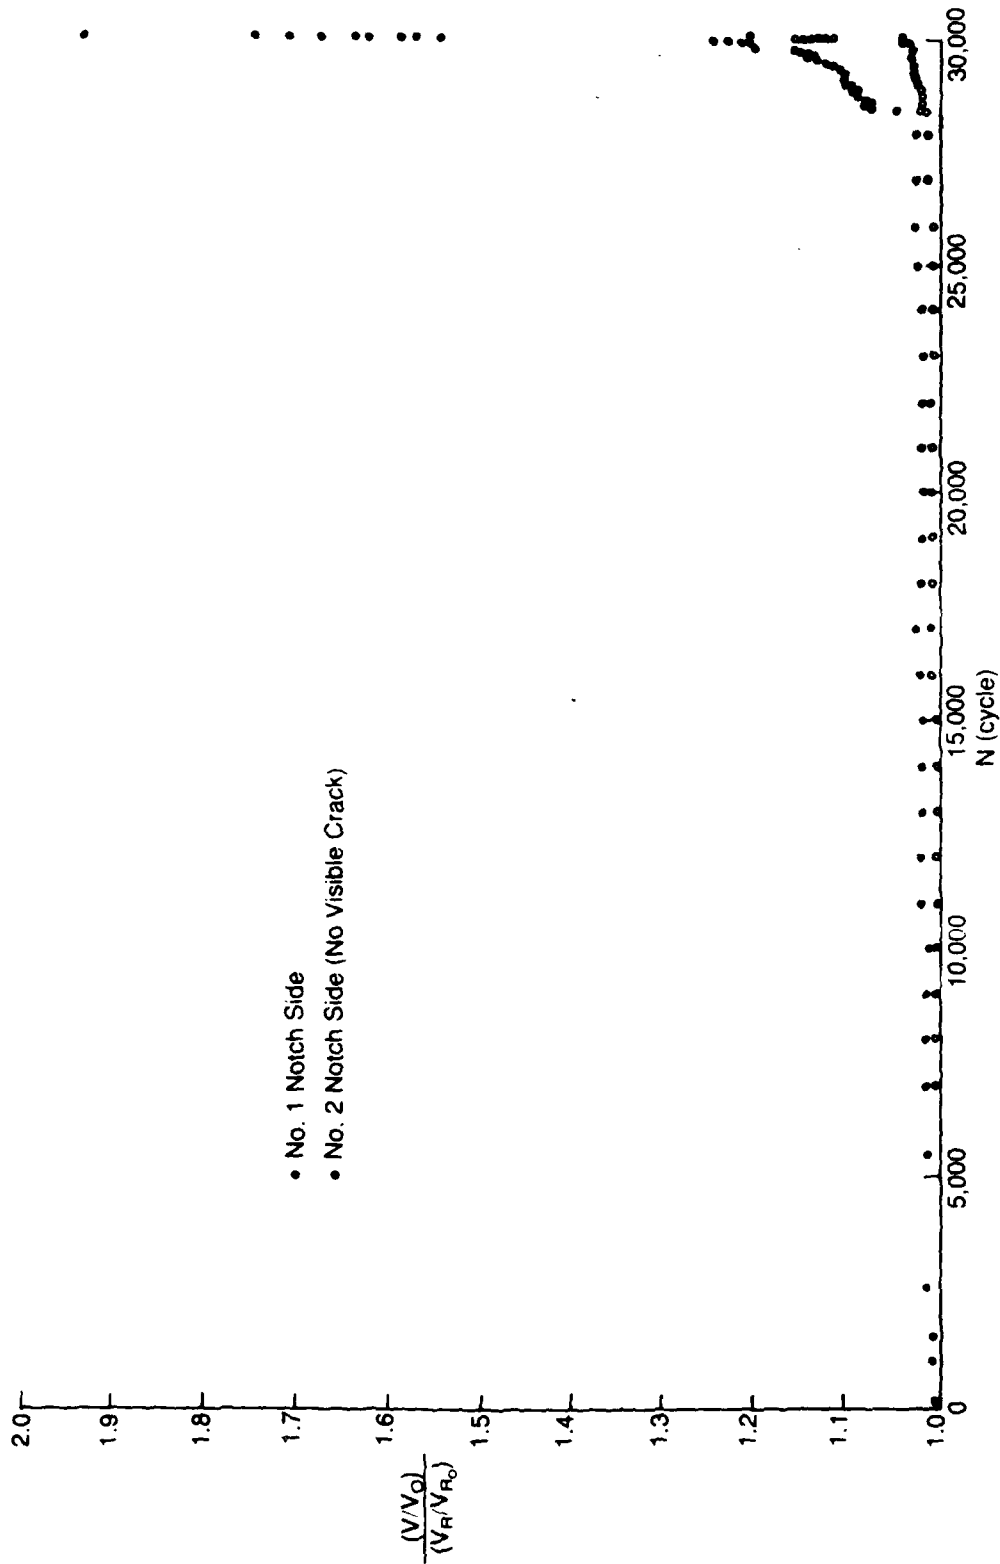


Figure 8. Change of Normalized Crack Voltage with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 1 ($\Delta\sigma_r = 475$ MPa)

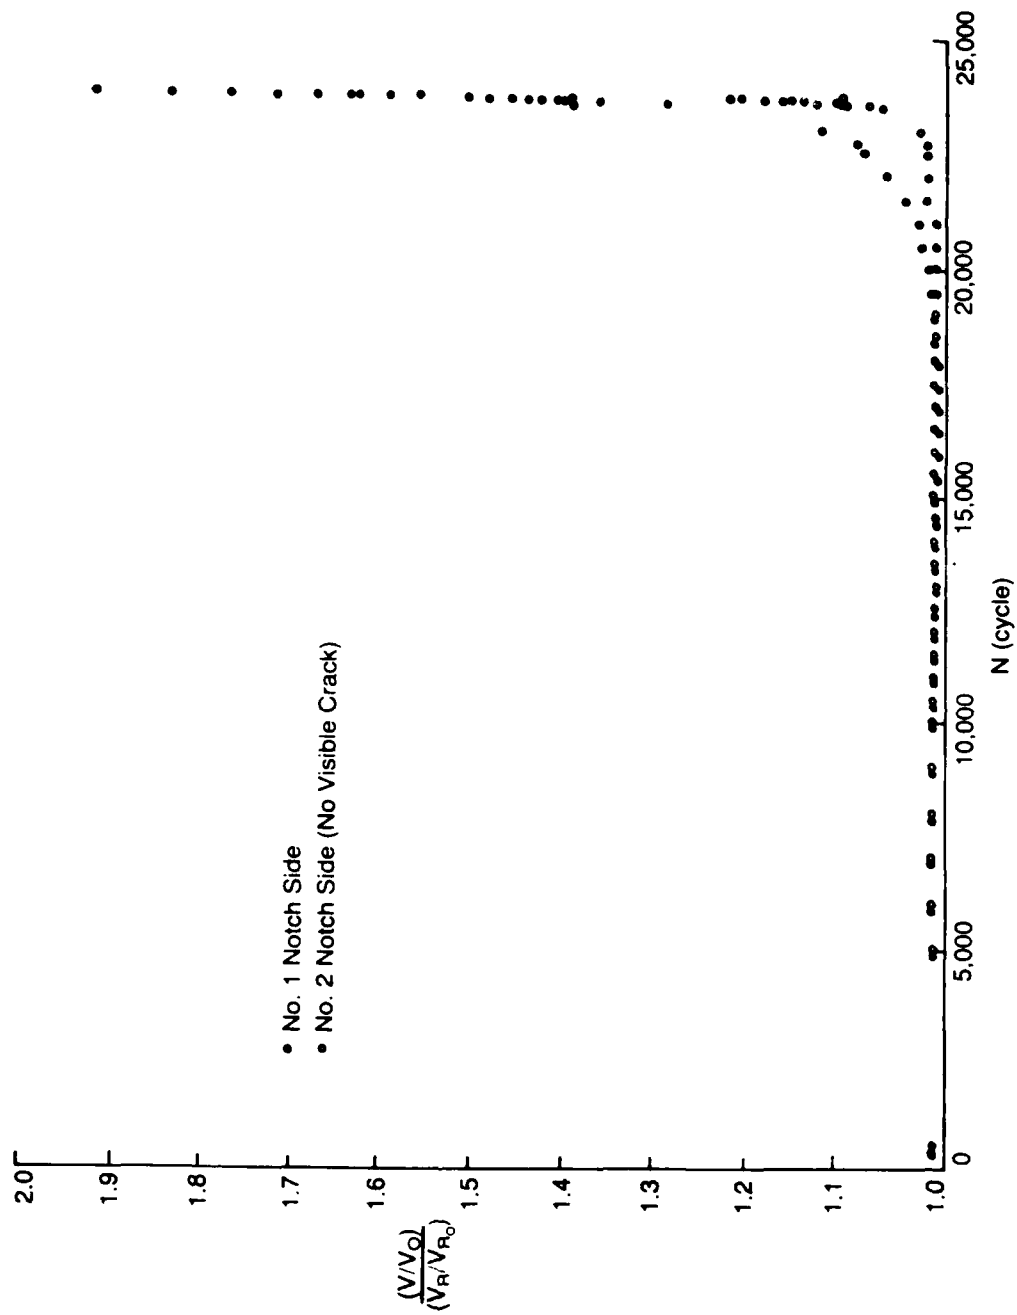


Figure 9. Change of Normalized Crack Voltage with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 2 ($\Delta\sigma = 475$ MPa)

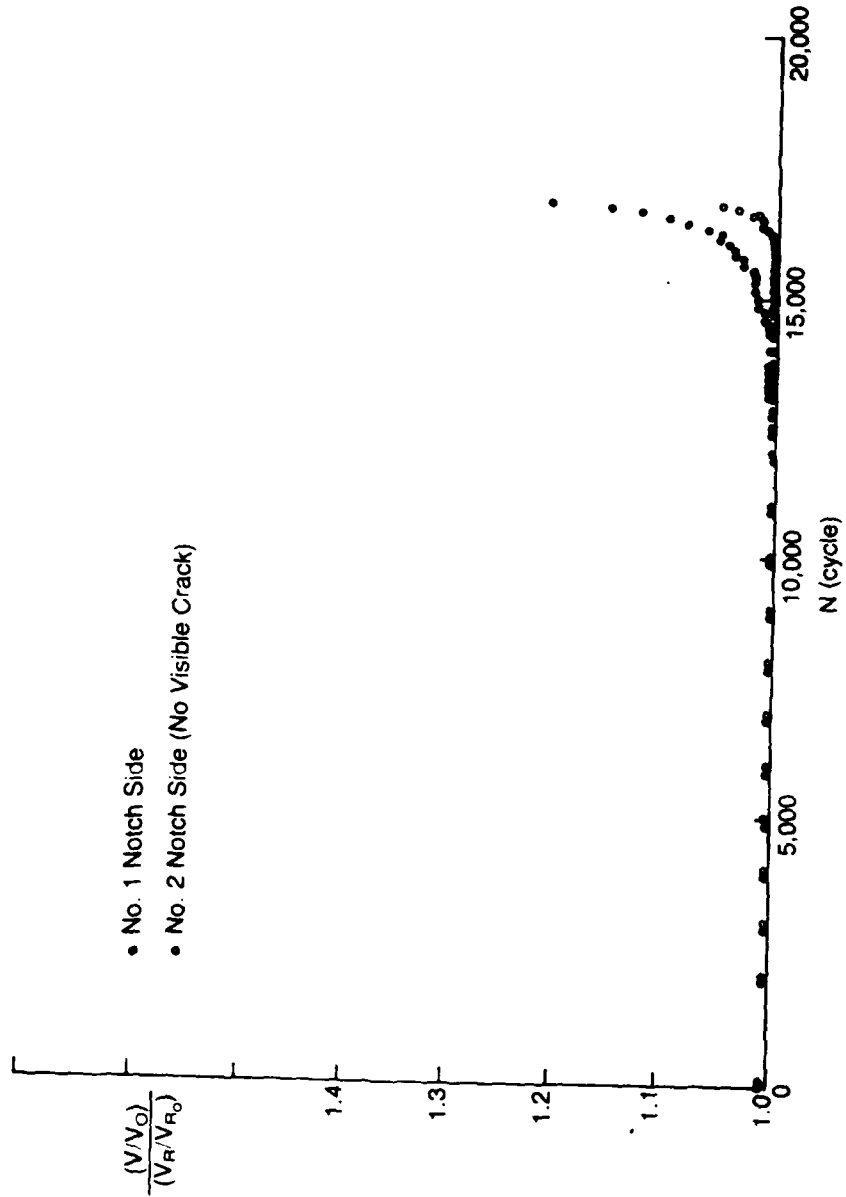


Figure 10. Change of Normalized Crack Voltage with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 4 ($\Delta\sigma = 625$ MPa)

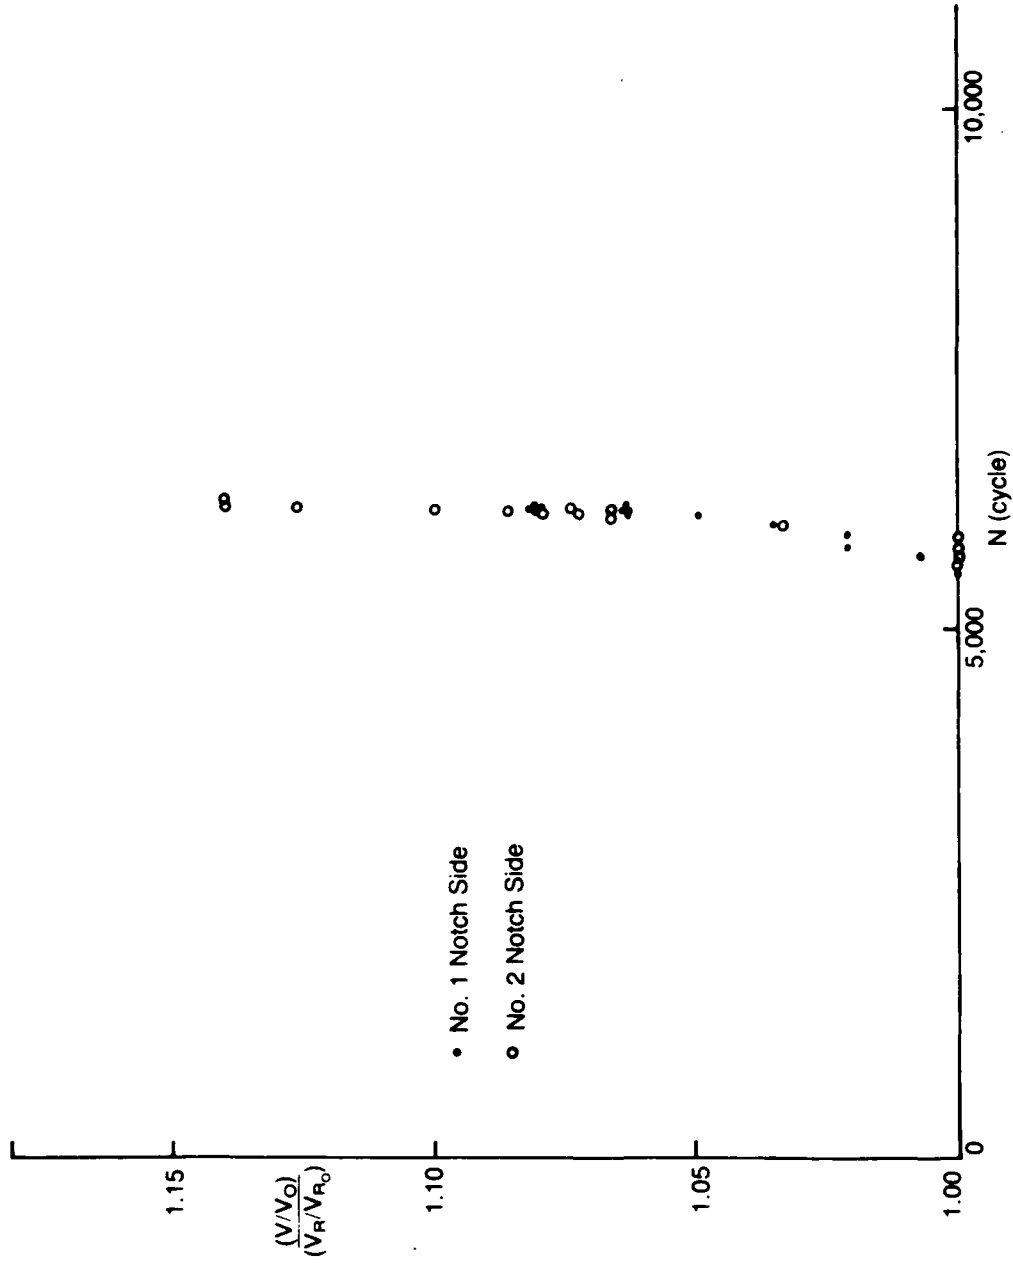


Figure 11. Change of Normalized Crack Voltage with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 5 ($\Delta\sigma = 775$ MPa)

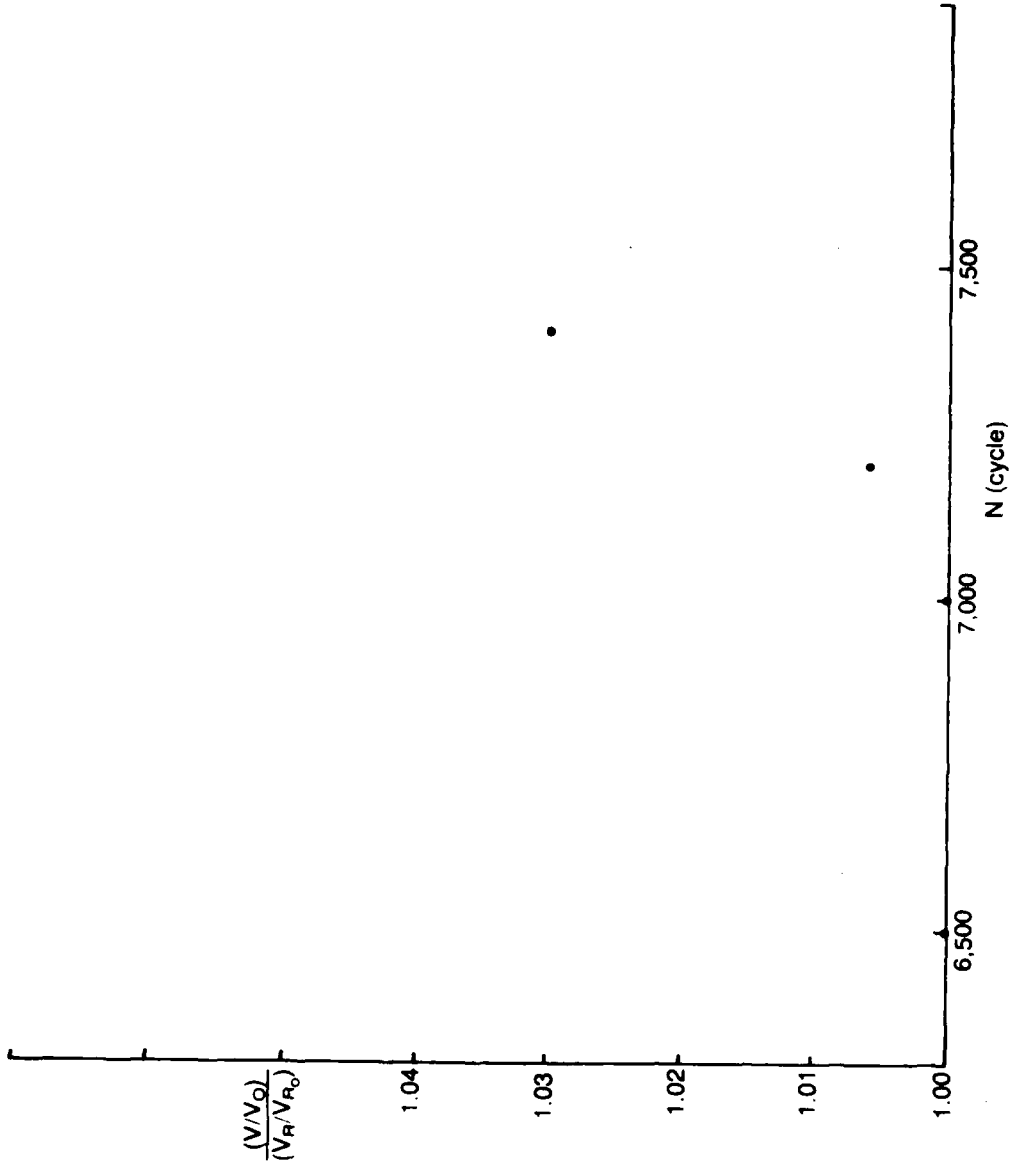


Figure 12. Change of Normalized Crack Voltage with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 6 ($\Delta r = 775$ MPa)

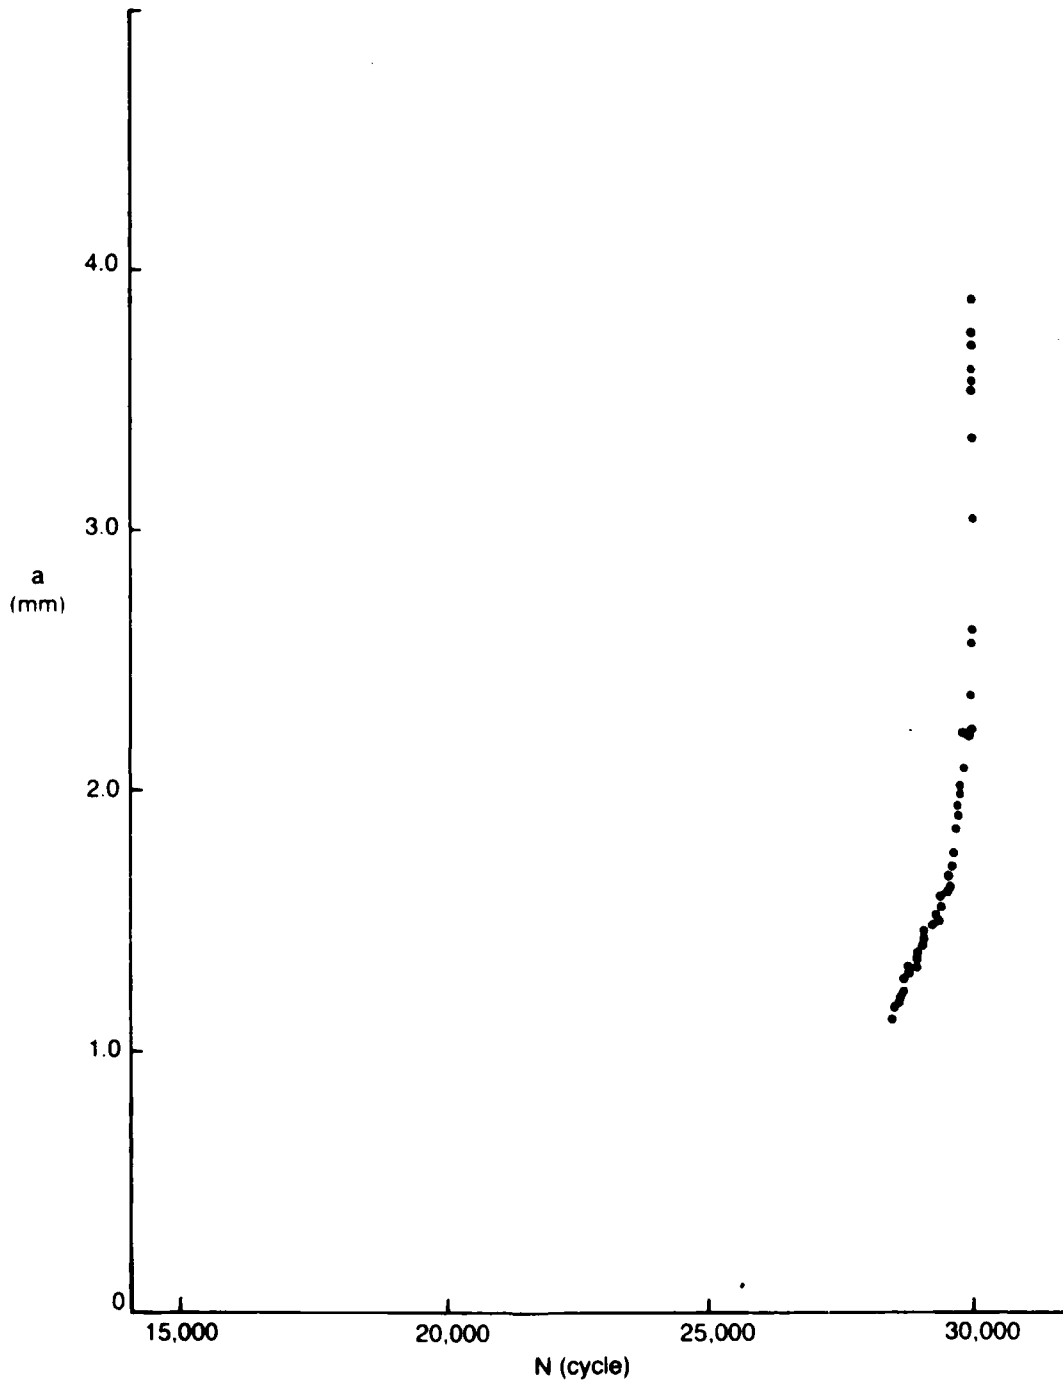


Figure 13. Change of Crack Length with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 1 ($\Delta\sigma = 475$ MPa)

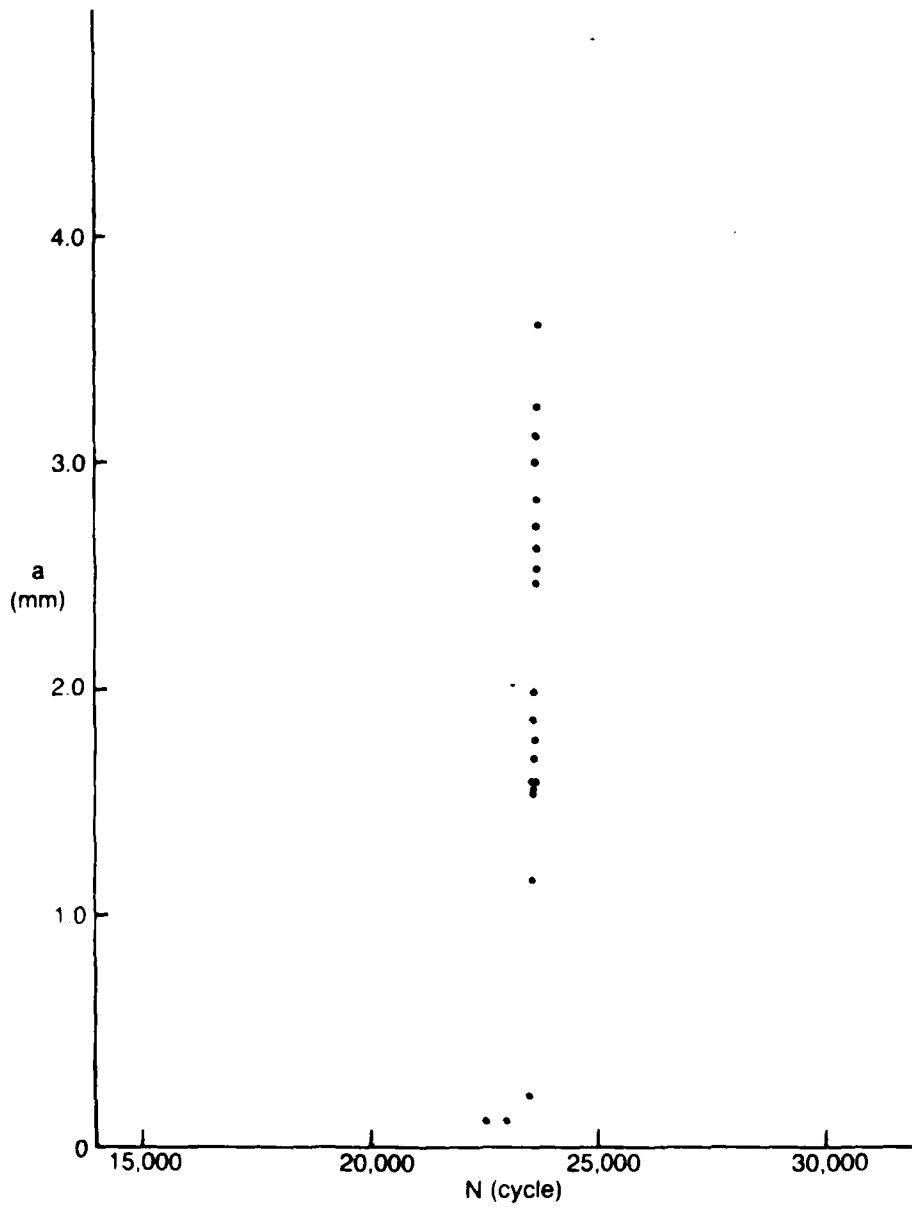


Figure 14. Change of Crack Length with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 2 ($\Delta\sigma = 475$ MPa)

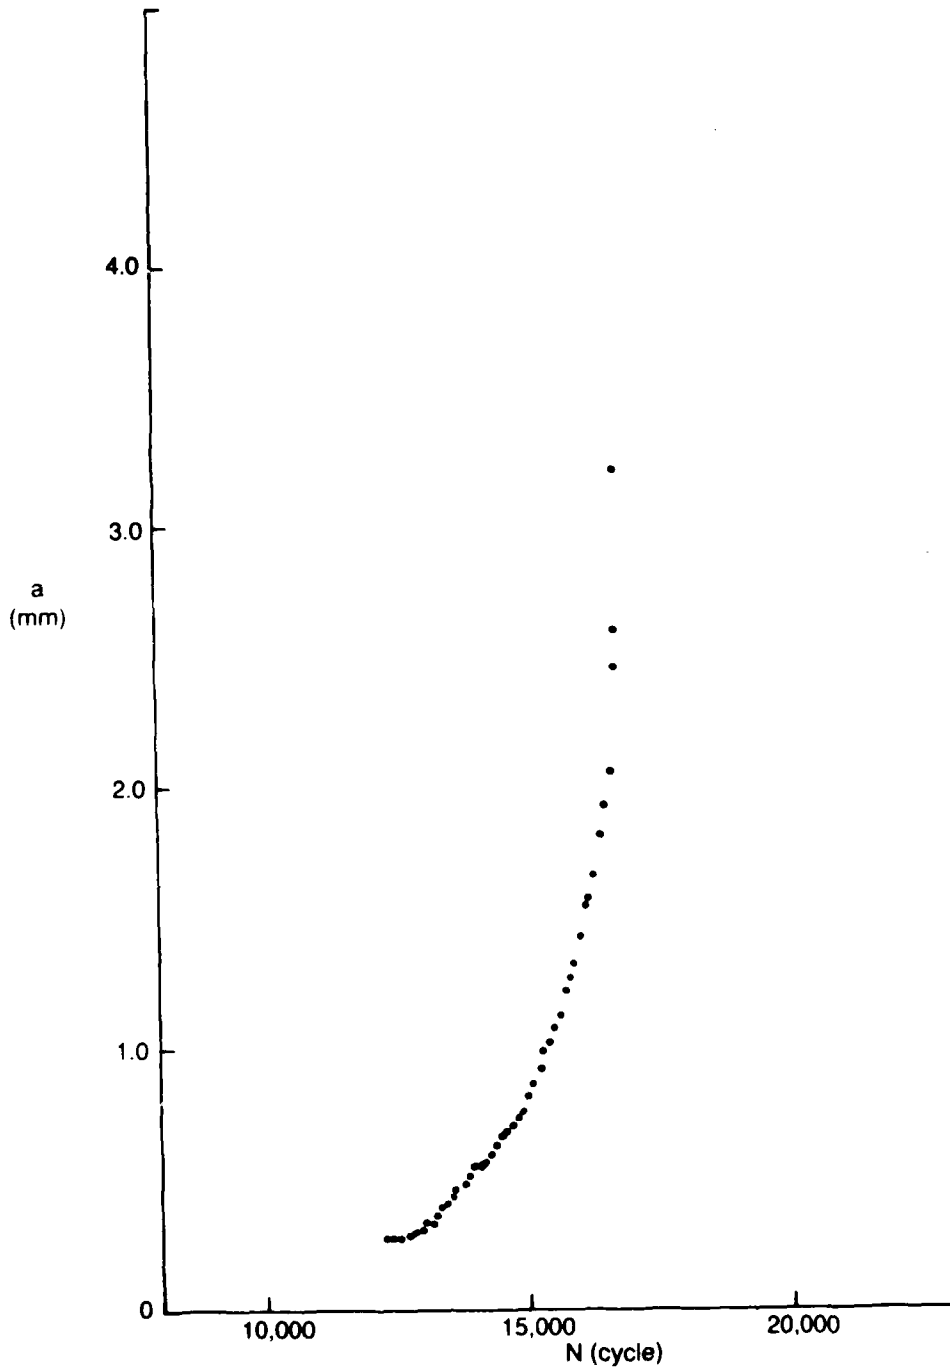


Figure 15. Change of Crack Length with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 4 ($\Delta\sigma = 625$ MPa)

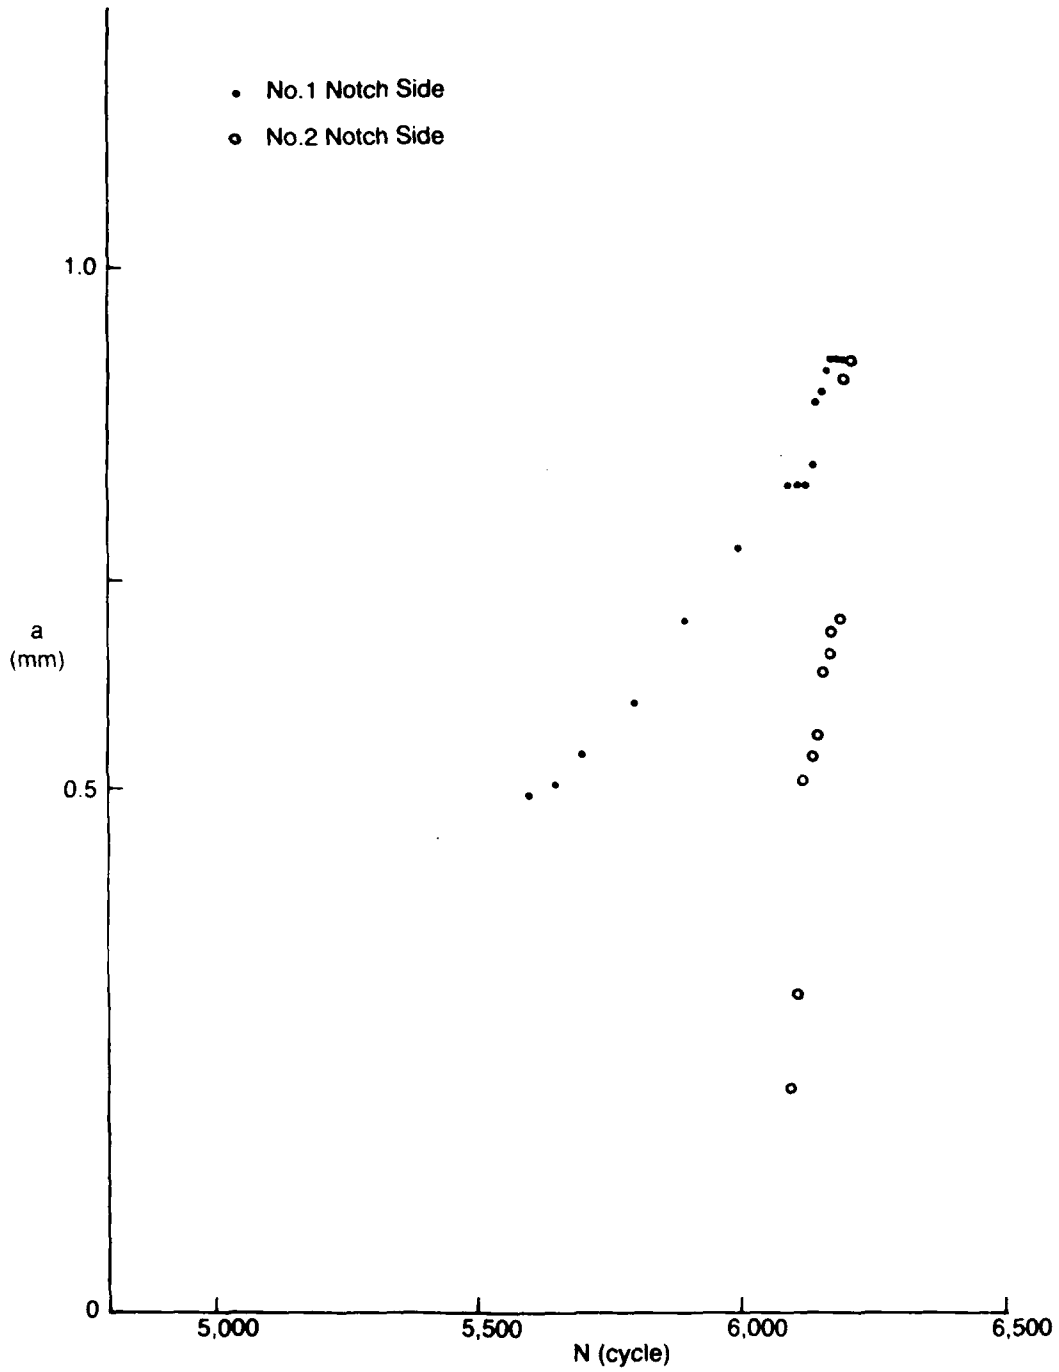


Figure 16. Change of Crack Length with Number of Fatigue Loading Cycles in Flat Double Edge Notched Specimen No. 5 ($\Delta\sigma = 775$ MPa)

$$\frac{(V/V_0)}{(V_R/V_{R_0})} = 0.6797 + 6.0719(a/w) - 29.8160(a/w)^2 + 57.3172(a/w)^3$$

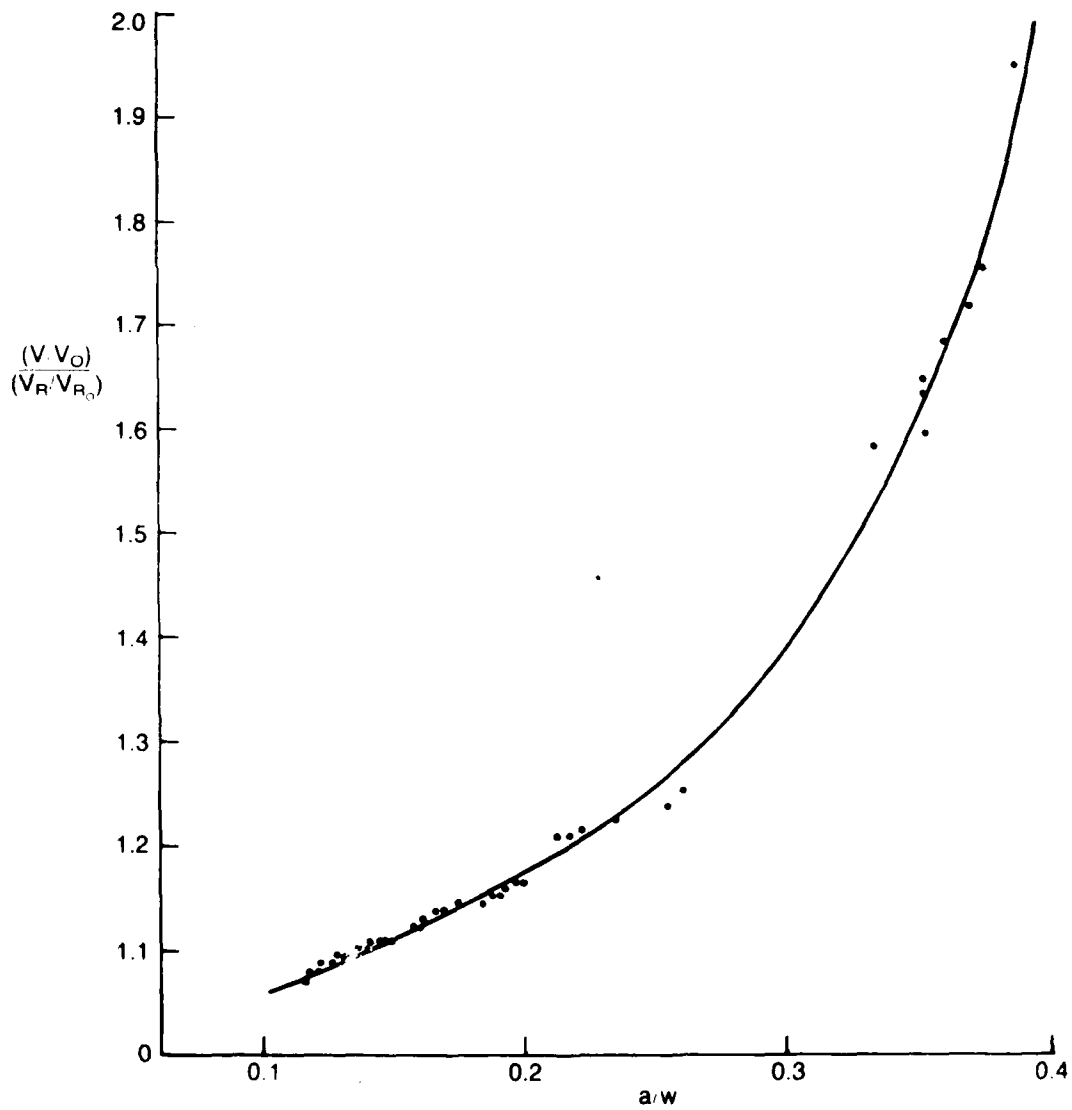


Figure 17. Change of Normalized Crack Voltage with Normalized Crack Length in Flat Double Edge Notched Specimen No. 1 ($\Delta\sigma = 475$ MPa)

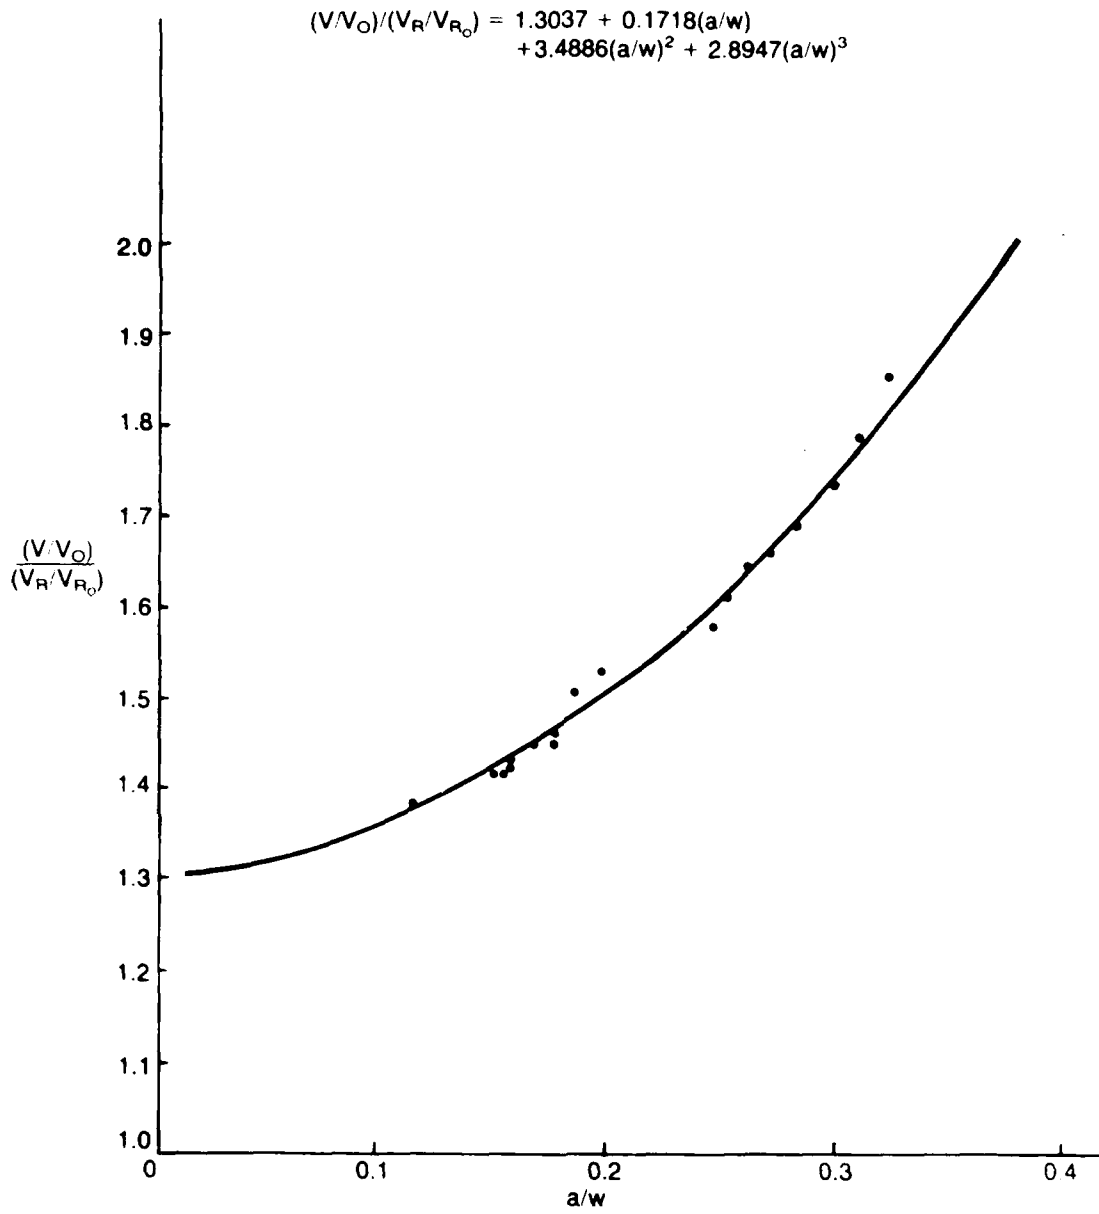


Figure 18. Change of Normalized Crack Voltage with Normalized Crack Length in Flat Double Edge Notched Specimen No. 2 ($\Delta\sigma = 475$ MPa)

$$\frac{(V/V_0)}{(V_R/V_{R_0})} = 0.9927 + 0.4226(a/w) - 3.4603(a/w)^2 + 21.8985(a/w)^3$$

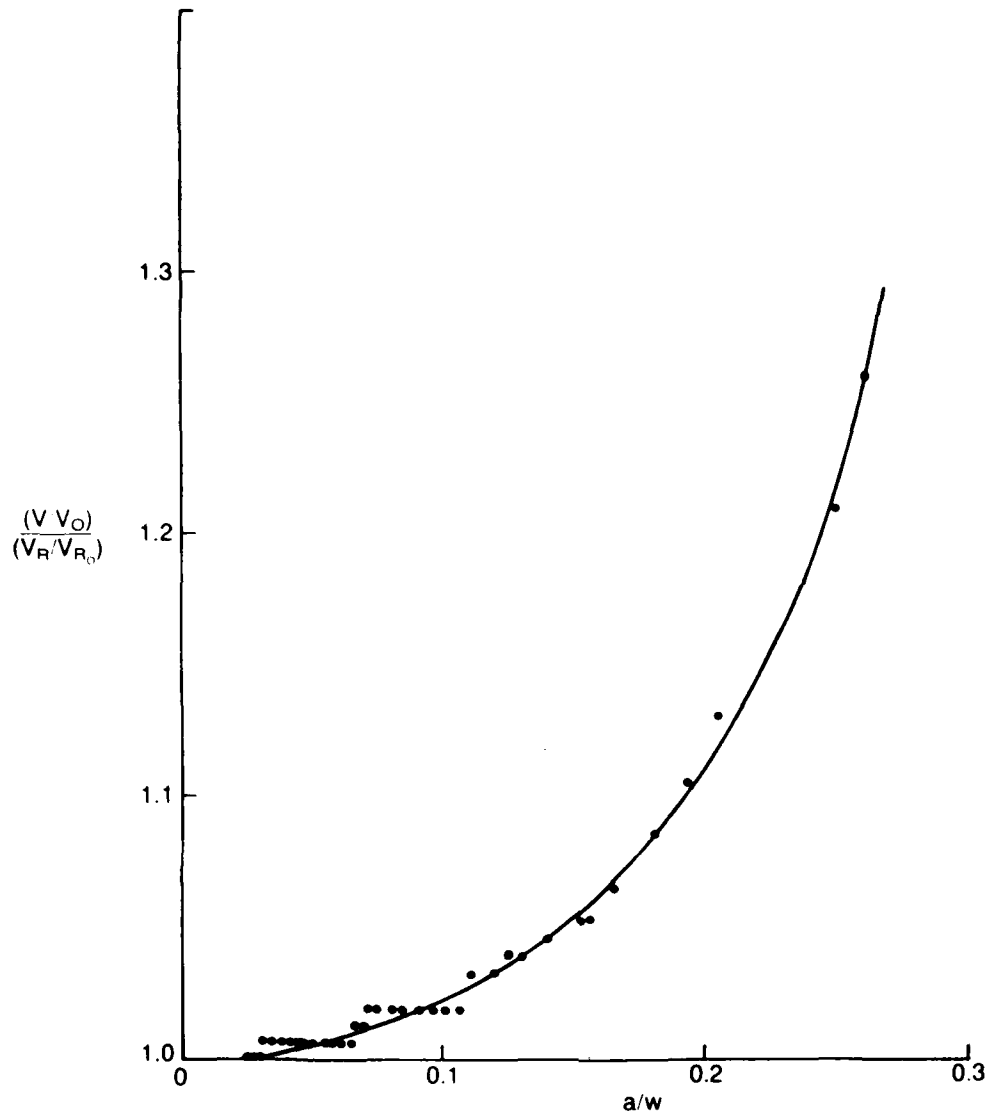


Figure 19. Change of Normalized Crack Voltage with Normalized Crack Length in Flat Double Edge Notched Specimen No. 4 ($\Delta\sigma = 625$ MPa)

- No.1 Notch Side
 $(V/V_0)/(V_R/V_{R_0}) = 1.2438 - 12.9729(a/w) + 213.9109(a/w)^2 - 1,014.2521(a/w)^3$
- No.2 Notch Side
 $(V/V_0)/(V_R/V_{R_0}) = 1.1690 - 7.4328(a/w) + 147.7939(a/w)^2 - 763.3036(a/w)^3$

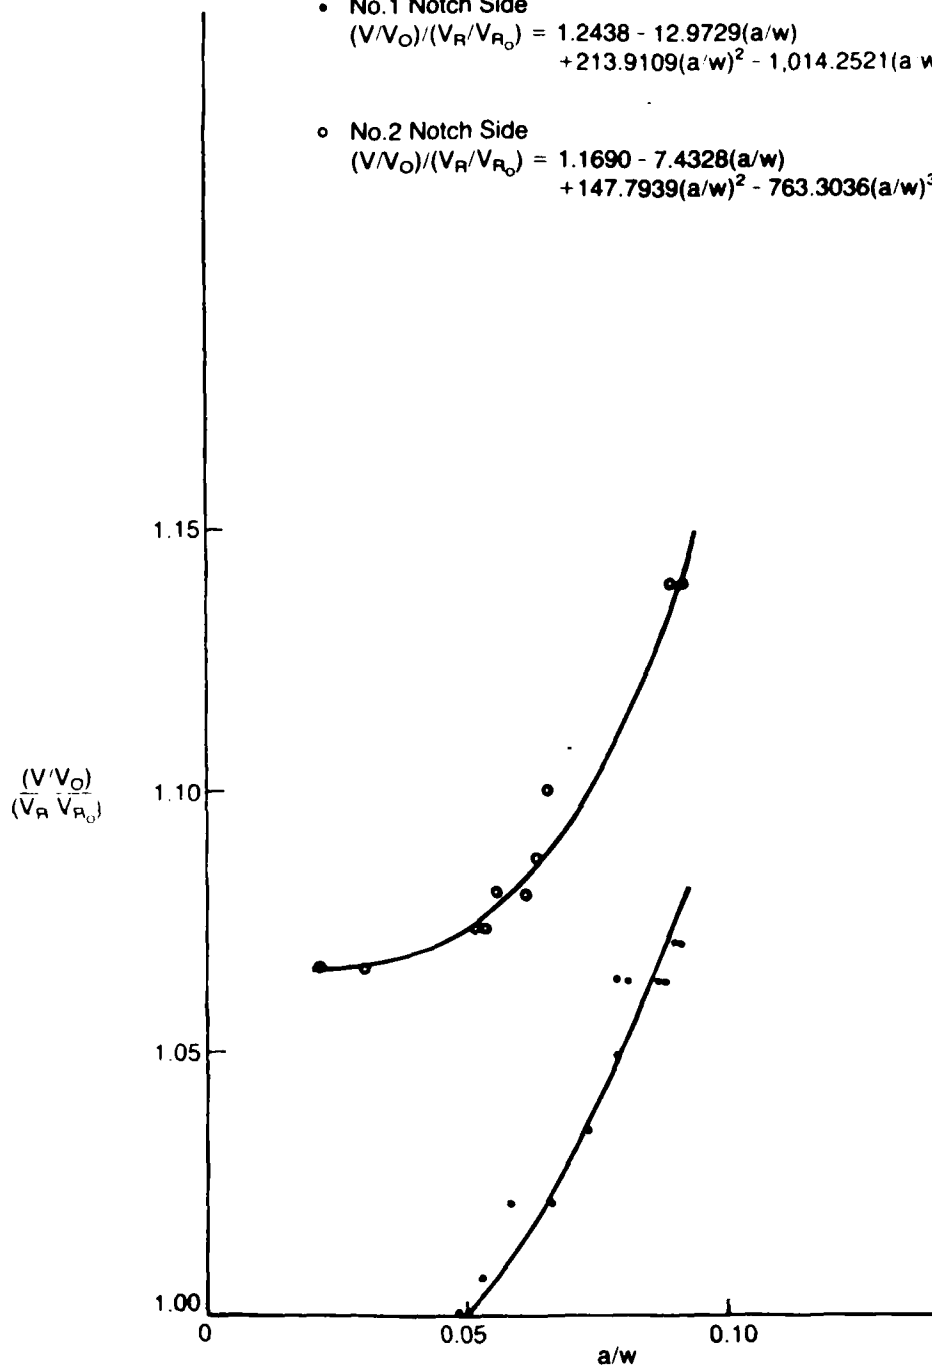


Figure 20. Change of Normalized Crack Voltage with Normalized Crack Length in Flat Double Edge Notched Specimen No. 5 ($\Delta\sigma = 775$ MPa)

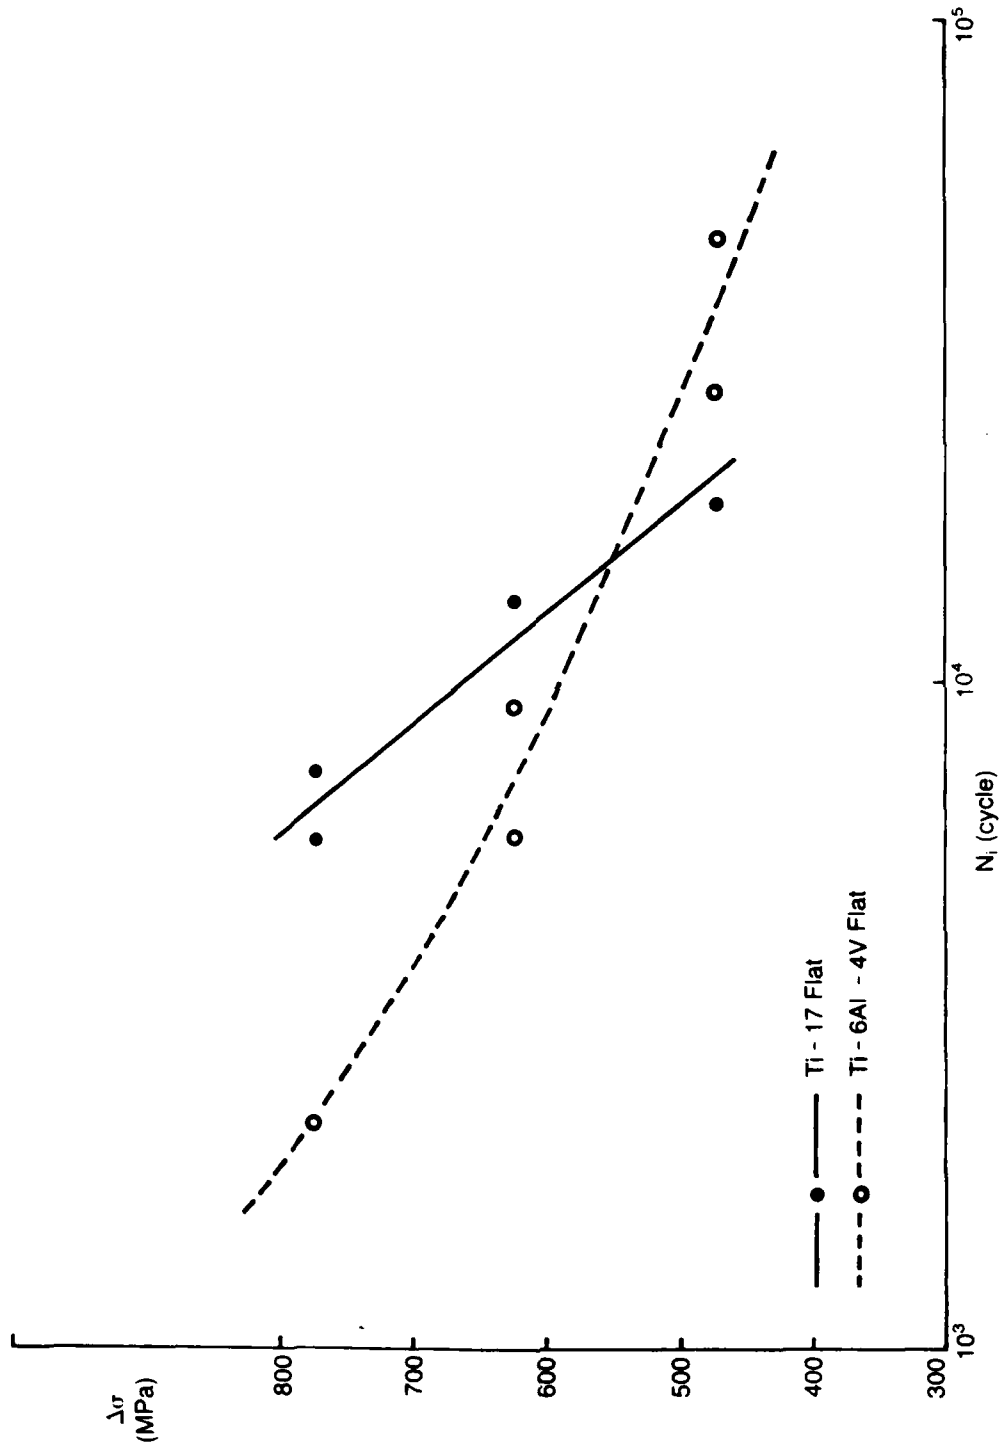


Figure 21. Applied Stress Range and Corresponding Fatigue Crack Initiation Life in Flat Double Edge Notched Specimen


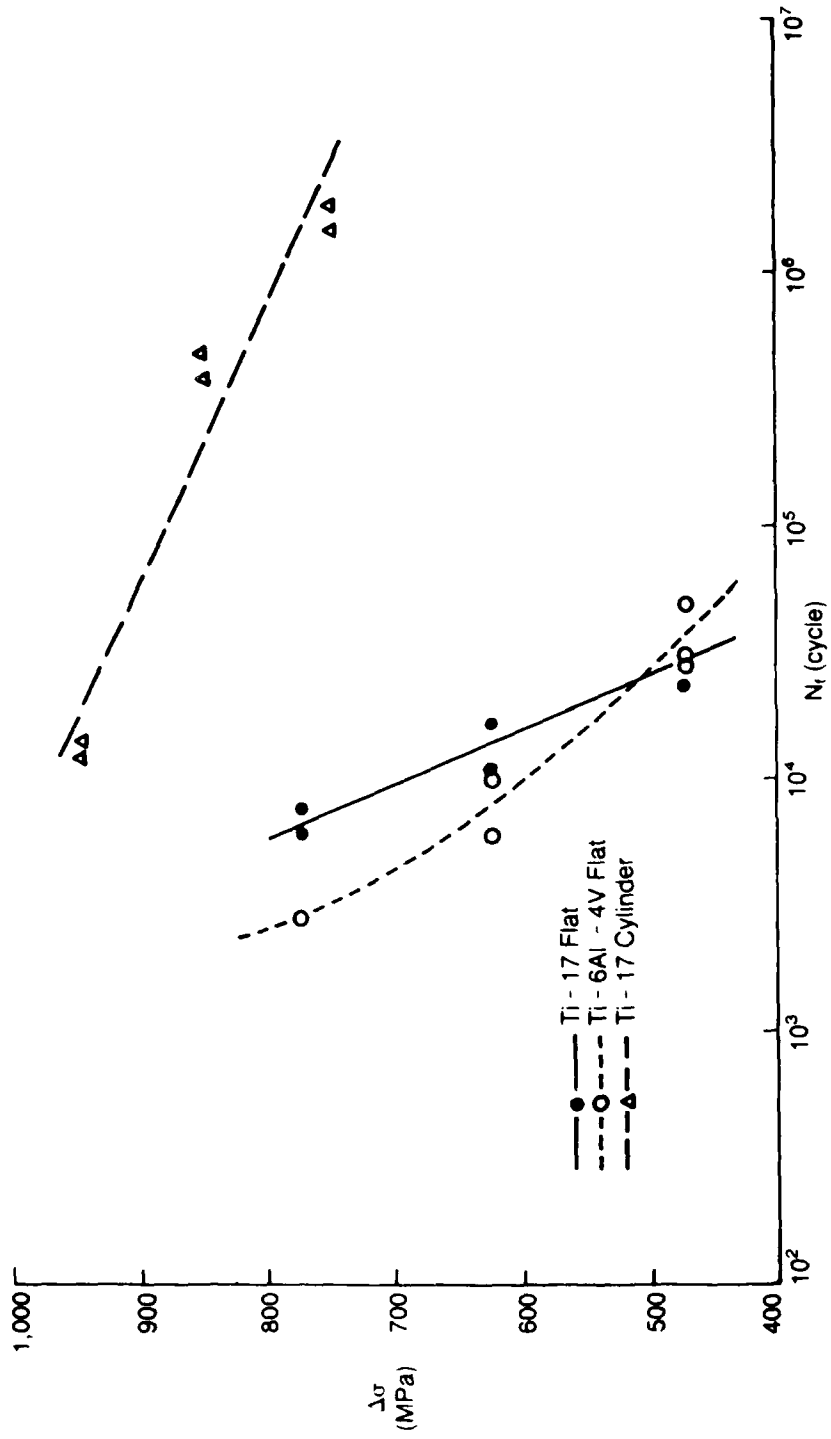


Figure 22. Applied Stress Range and Corresponding Fatigue Fracture Life in Flat Double Edge Notched Specimen



(b)

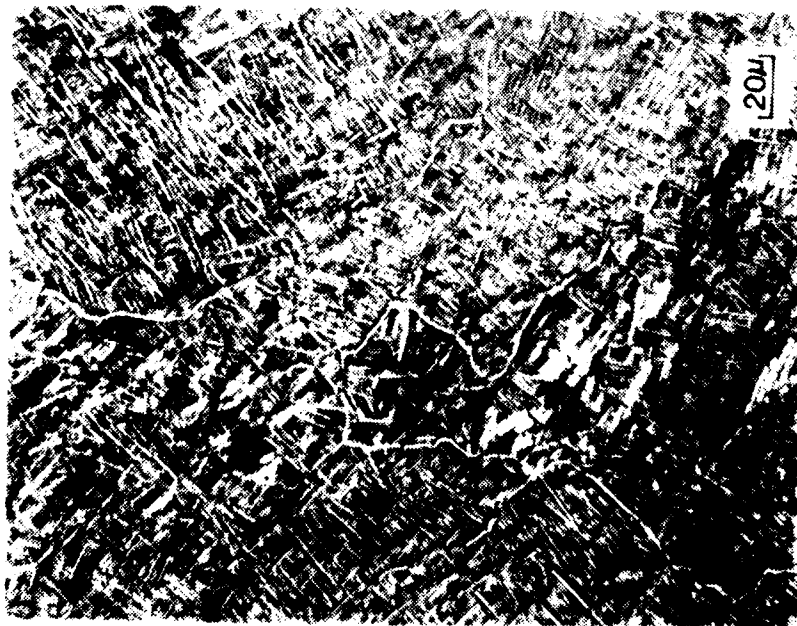

(a)

Figure 23. Microstructure of Specimen Material T-17 Al-0v
(a) Cylindrical, Unnotched Specimen
(b) Flat Double-Edge Notched Specimen

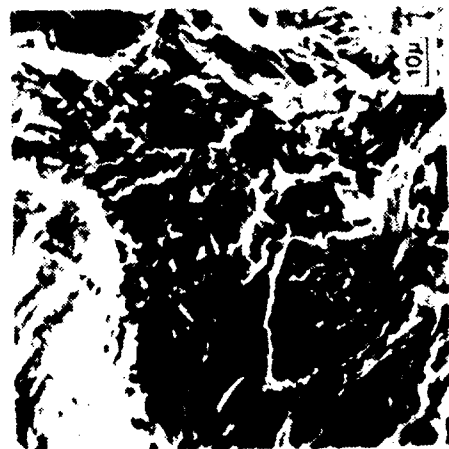
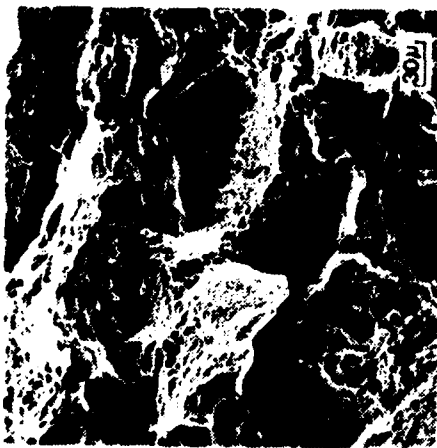
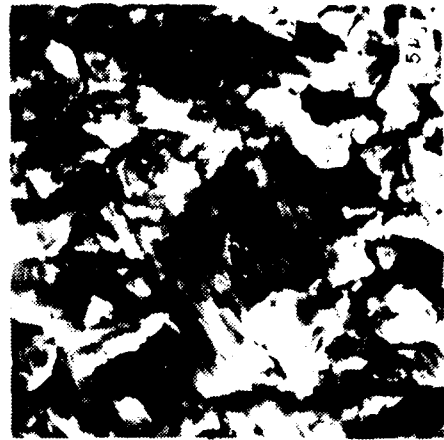
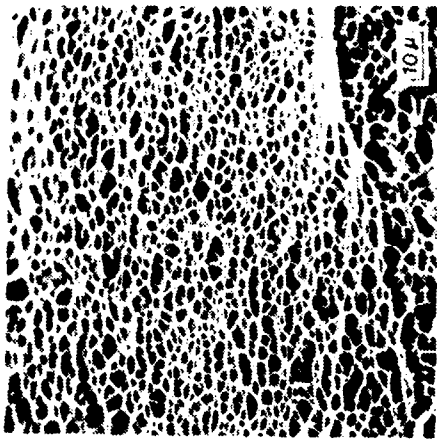


Figure 24 Fractograph of Cylindrical Unmatched Specimen

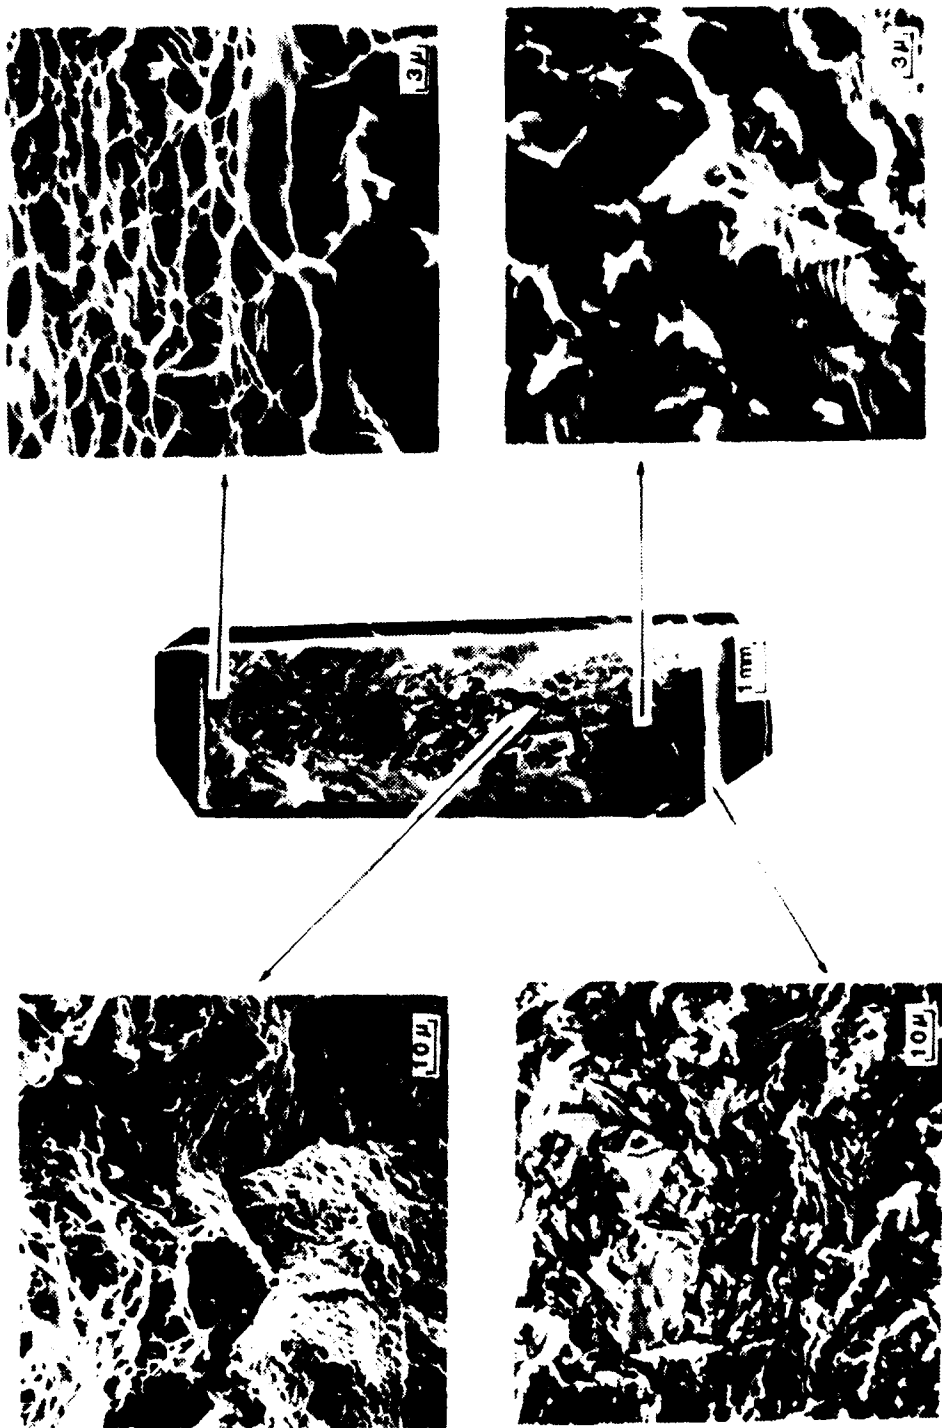


Figure 25. Photograph of Flat Double Edge Notched Specimen

DISTRIBUTION LIST

REPORT NO. NADC-87169-60

	No. of Copies
NAVAIRSYSCOM	9
Washington, D.C. 20361	
2 for AIR-04	
2 for AIR-530	
2 for AIR-931A	
1 for AIR-52032D	
1 for AIR-5302	
1 for AIR-53021	
1 for AIR-530215	
NAVSEASYSYSCOM, Washington, D.C. 20362	1
NAVAIRTESTCEN, Patuxent River, Maryland	1
NAVAVNSAFECEN, NAS, Norfolk, Virginia	1
NAVSHIPPRANDCEN, Bethesda, Maryland 20034	1
NAVSHIPPRANDCEN, Annapolis, Maryland 21402	1
NRL, Washington, D.C. 20375	1
NAVAIREWORKFAC, NAS, Alameda (Code 340), California	1
Jacksonville (Code 340), Florida	1
Norfolk (Code 340), Virginia	1
North Island (Code 340), California	1
Pensacola (Code 340), Florida	1
MCAS, Cherry Point (Code 340), North Carolina	1
ONR, Washington, D.C. 20362	1
USAF Systems Command, WPAFB, Ohio 45433	
(Attn: FBR)	1
(Attn: FB)	1
(Attn: LLD)	1
(Attn: FYA)	1
(Attn: LAM)	1
(Attn: FBA)	1
(Attn: LPH)	1
DTIC	2
Cameron Station, Bldg. 5	
Alexandria, VA 22314	
NAVAIRDEVCEN (Code 8131)	2
NAVAIRDEVCEN (Code 6063)	20
United Technologies Corporation	1
Pratt & Whitney	
P.O. Box 109600	
West Palm Beach, FL 33410-9600	
Allison Gas Turbine Division	1
General Motors Corporation	
P.O. Box 41230	
Indianapolis, IN 46241-0230	
General Electric Corporation	1
P.O. Box 156301	
Cincinnati, OH 45215-6301	
Garrett Turbine Engine Company	1
Phoenix, AZ 85010	

DATE
FILMED
78