

DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188



estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, Paperwork Reduction Project (0704-0188). Washington, DC 20503

1 AGENCY USE ONLY (Leave blank)		2 REPORT DATE March 1994		3 REPORT TYPE AND DATES COVERED Professional Paper	
4 TITLE AND SUBTITLE AN APPROXIMATE MODEL FOR VERTICAL POLARIZATION AND SURFACE ROUGHNESS USING THE PARABOLIC EQUATION				5 FUNDING NUMBERS PR: MP92 PE: 0602435N	
6 AUTHOR(S) H. V. Hitney				8 PERFORMING ORGANIZATION REPORT NUMBER	
7 PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Command, Control and Ocean Surveillance Center (NCCOSC) RDT&E Division San Diego, CA 92152-5001				10 SPONSORING/MONITORING AGENCY REPORT NUMBER	
9 SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Naval Command, Control and Ocean Surveillance Center (NCCOSC) RDT&E Division San Diego, CA 92152-5001				11 SUPPLEMENTARY NOTES	
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13 ABSTRACT (Maximum 200 words) This presentation gives an approximate method that allows vertical polarization and sea surface roughness effects to be included in parabolic equation (PE) radio wave propagation models. This method was implemented in the hybrid Radio Physical Optics (RPO) propagation model, and several comparisons of RPO results to waveguide results are presented.					
14 SUBJECT TERMS				15 NUMBER OF PAGES	
				16 PRICE CODE	
17 SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED		18 SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED		19 SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	
				20 LIMITATION OF ABSTRACT SAME AS REPORT	

94 4 13 047

UNCLASSIFIED

21a. NAME OF RESPONSIBLE INDIVIDUAL

H. V. Hitney

21b. TELEPHONE (Include Area Code)

(619) 553-1428

21c. OFFICE SYMBOL

Code 543

F4-9
1140**AN APPROXIMATE MODEL FOR VERTICAL POLARIZATION AND
SURFACE ROUGHNESS USING THE PARABOLIC EQUATION**

Herbert V. Hitney


Tropospheric Branch, Code 543

Naval Command, Control and Ocean Surveillance Center, RDT&E Division
San Diego, CA 92152-7385

An approximate method is presented that allows vertical polarization and sea surface roughness effects to be included in parabolic equation (PE) radio wave propagation models. This method was implemented in the hybrid Radio Physical Optics (RPO) propagation model, and several comparisons of RPO results to waveguide results are presented.

The simplest and fastest running PE models use fast Fourier sine transforms. These models give exact results for horizontal polarization, but only approximate results for vertical polarization. In addition, there is no known simple method to correctly simulate rough sea surface effects in PE models using sine transforms. For low elevation angles, waveguide models show vertical polarization and rough surface effects to be important primarily for surface duct or surface-based duct conditions, because of the strong interaction between the ducting and reflecting mechanisms. The method presented here is an empirical model that makes simple adjustments to the PE method for ducting cases, such that the PE results match the waveguide results.

The PE method is modified to account for surface-interaction loss by multiplying the magnitude of the lowest PE field value by a factor between 0 and 1 just prior to each PE range step. Comparisons of this technique show remarkably good matches to waveguide results, provided the proper loss factor is applied. Several methods have been used to determine the appropriate loss factor based on the modified refractivity profile for the duct. The figure below shows propagation loss versus height for a strong evaporation duct for the cases of horizontal and vertical polarizations over a smooth sea, and for vertical polarization over rough seas corresponding to wind speeds of 10 and 20 meters per second.

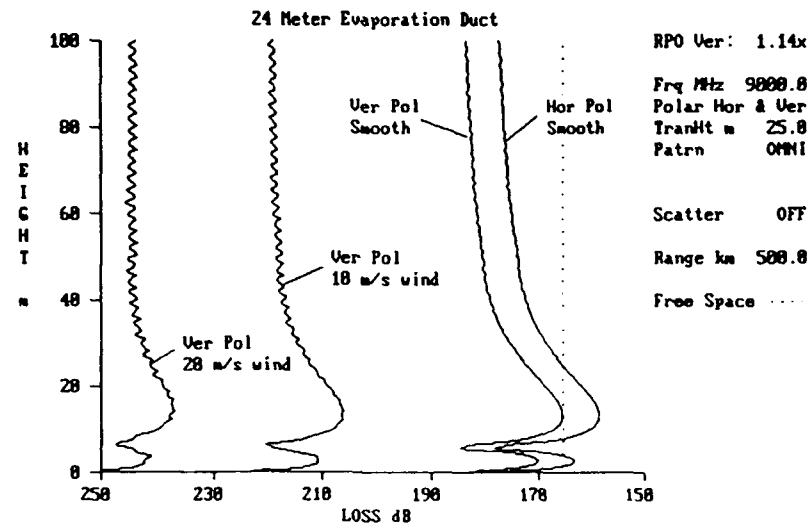

194

DTIC CURRENT INFORMATION 3

Accession For	
NTIS	CRA&I ☒
DTIC	TAB ☒
Unannounced ☒	
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	