

**APPROVED FOR PUBLIC RELEASE  
DISTRIBUTION UNLIMITED**

**AFPTEF REPORT NO. 96-R-01  
AFPTEF PROJECT NO. 93-P-107**

**ROBERT S. TEKESKY**

**Mechanical Engineer**

**DSN 787-3362  
Comm. (513) 257-3362**


**19960227 148**

**Research Testing of  
Commercial Retractable Handles  
for  
Small Containers**

**AFMC LSO/LOP  
AIR FORCE PACKAGING TECHNOLOGY AND ENGINEERING FACILITY  
WRIGHT PATTERSON AFB, OH 45433-5540  
January 1996**

**DATA QUALITY INDICATED 1**

# DISCLAIMER NOTICE

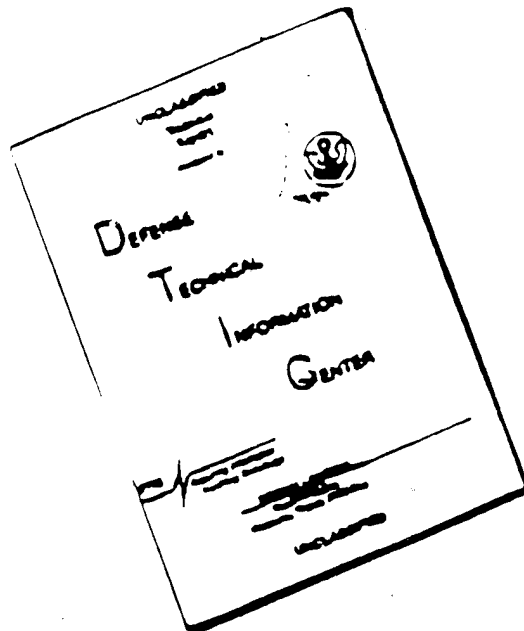

THIS DOCUMENT IS BEST  
QUALITY AVAILABLE. THE COPY  
FURNISHED TO DTIC CONTAINED  
A SIGNIFICANT NUMBER OF  
PAGES WHICH DO NOT  
REPRODUCE LEGIBLY.

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto. This report is not to be used in whole or part for advertising or sales purposes.

PROJECT NO. 93-P-107

TITLE: Research & Testing of Commercial Handles for Small Containers

ABSTRACT

This project was established to identify handle manufactures and their products with some type of handle strength rating. Currently AFPTEF is using aluminum rod bent into a handle shape. The handle is held in place with a cotter pin and aluminum blocks welded to the container wall. This design was developed at AFPTEF to fulfill users need for field repairable handles.

AFPTEF's handles met the users need, however, the handles are not retractable, i.e. spring loaded, and would swing out from the container wall during drop testing. On small containers experiencing free fall drop testing, the handles would get damaged between the container and the ground. The damage was sporadic, therefore, AFPTEF wanted to look at the retractable handles that would hold the handle up against the container wall. The AFPTEF's goal was to test the commercial handles and certify them to a rated load and eliminate the need to repeat testing of handles on other containers.

PREPARED BY:



ROBERT S. TEKESKY  
Mechanical Engineer  
AFPTEF


---

PUBLICATION DATE:

23 JAN 1996

---


REVIEWED BY:



TED HINDS  
Ch, Design Branch  
AFPTEF

---

APPROVED BY:



LESLIE K. CLARKE, III  
Chief, AF Packaging Technology  
and Engineering Facility

---

## TABLE OF CONTENTS

	<u>PAGE</u>
Abstract.....	i
Table of Contents.....	ii
Introduction.....	1
Test Procedure.....	1
Results.....	2
Conclusion.....	3
Recommendations.....	4

## APPENDICES

Appendix 1:	Test Plan.....	5
Appendix 2:	Test Results.....	7
Appendix 3:	Photographs.....	9
Appendix 4:	Distribution List.....	15
Appendix 5:	Report Documentation.....	22

**RESEARCH TESTING  
OF  
COMMERCIAL RETRACTABLE HANDLES  
FOR  
SMALL CONTAINERS**

INTRODUCTION:

This project was established to identify handle manufactures, their products, and establish a handle strength rating. Currently AFPTEF is using aluminum rod bent into a handle shape. The handle is held in place with a cotter pin and aluminum blocks welded to the container wall. This design was developed at AFPTEF to fulfill users need for field repairable handles.

AFPTEF's handles met the users need, however, the handles were not retractable, i.e. spring loaded, and would swing out during drop testing. On small containers experiencing free fall drop testing, the handles would get damaged between the container and ground. The damage was sporadic, therefore, AFPTEF wanted to look at retractable handles that would hold the handle up against the container wall.

AFPTEF's goals were:

- To establish a standard test for commercially manufactured handles.
- To establish a rating system for the handles with handle manufactures and part numbers identified.
- To eliminate repetitive testing of the same handle over again and be able to reference this project to verify handle performance.

TEST PROCEDURE:

The handles are attached to a container wall with four rivets. The handle is rotated until it comes in contact with a physical stop. The angle of the handle is then measured with respect to the container wall. This angle is call the rotation angle and is to be measured and recorded prior to testing. The handle is then pulled from side to side to measure any lateral movement the handle may have. The measurement is taken from the edge of the plate to the inside of the bail. The lateral movement is recorded.

The container is secured to the floor and the handles are pulled in four different directions using a hydraulic tensile tester, see Figure 1. The four directions are described in the test plan, Attachment 1. The pulling force starts at 50 Kg  $\pm$  2 Kg and increase in increments of 10 Kg  $\pm$  2 Kg. At each 10 Kg increase, the handle is visually inspected and measured for bending and/or

pulling away from the container. The force is held for a minimum of 1 minute.

At 120 Kg and each 10 Kg interval after, the force is removed and the handle is observed for permanent deformation and performance. The force at which one starts removing the force for a closer inspection may vary depending on the handle being tested. When permanent deformation occurs, testing is completed.

#### RESULTS:

The handles were manufactured by Nielson Hardware and made of stainless steel, i.e. the bail, plate, and spring. The part number for the handle is H945-3500SS2RG75SS-01. The bail size is 127 mm X 77 mm. The handle had a 94° rotation at the physical stop and 10 mm lateral movement in each direction. The part number of the rivet is CR3213-5-4. See Table I for test results.

During Test A visual inspections were made with the applied force removed. The applied force and comments of the visual inspection are below:

- 80 Kg, the handle functioned normally with an increase rotation up to 105°.
- 100 Kg, the handle functioned normally with an increase rotation up to 112°. The physical stop started to show slight deformation, see Figure 2.
- 130 Kg, the handle functioned normally with a rotation of 112°.
- 160 Kg, the handle functioned normally. The bail flexed past the physical stop. This changed the angle the applied force was pulling.
- 200 Kg, the handle functioned normally.
- 220 Kg, the handle is starting to show signs of deformation. The spring action is a little hampered.
- 250 Kg, the handle came in contact with the container when the load was applied, see Figure 3. The spring action failed to return the bail completely back against the container wall.

During Test B visual inspections were made with the applied force removed. The applied force and comments of the visual inspection are below:

- 150 Kg, the handle functioned normally.
- 170 Kg, the handle functioned normally. When load applied, the bail flexed 5 mm.

- 200 Kg, the handle functioned normally. When load applied, the bail flexed 10 mm.
- 250 Kg, the handle functioned normally. When load applied, the bail flexed 10 mm. The force was increased.
- 350 Kg, the handle functioned normally. The spring action is slightly hesitant, but retracts the bail completely.
- 400 Kg, the handle functioned normally. Spring action still hesitant. When load applied, the bail flexed 15 mm.
- 420 Kg, the handle functioned normally. Spring action hesitation is increasing. Bail starting to show signs of deformation, see Figure 4.
- 430 Kg, spring action more hesitant and not completely returning bail to container wall. Bail deformed.
- 460 Kg, spring action failed to return the bail to the container wall. Bail deformed 25 mm.

During Test C1 visual inspections were made with the applied force removed. The applied force and comments of the visual inspection are below:

- 120 Kg, spring action hesitant. Bail starting to show signs of deformation, see Figure 5.
- 140 Kg, spring action failed. Bail deformed, see Figure 6.

During Test C2 visual inspections were made with the applied force removed. The applied force and comments of the visual inspection are below:

- 120 Kg, the handle functioned normally.
- 150 Kg, bail showing signs of deformation, see Figure 7. Spring action is normal.
- 170 Kg, spring action hesitant. Bail deformed, see Figure 8.
- 180 Kg, spring action more hesitant.
- 200 Kg, spring action failed.

#### CONCLUSION:

The handles performed well. The handles were removed from the container and inspected. The cause of the spring failure for Tests C1 & C2 was determined to be the bail pulled out beyond the spring. This allowed the tension in the spring to be released. In Tests A & B the cause of the spring failure was determined to

be the bail being bent in the area where the spring wrapped around the bail. This caused friction between the bail and spring and didn't allow the spring to retract the bail.




RECOMMENDATIONS:

From the results in Tests A & B only, which is consider the working directions of the handle, the handle could be rated at a maximum load of 220 Kg, however, fatigue factor is not accounted for in this test. Therefore, the work load for the handle should be a certain percentage from the maximum load.

From the results in Tests C1 & C2 only, the handle could be rated at a maximum of 120 Kg. Again, the working load should be a percentage of the maximum load, however, this percentage can be lower than the percentage used to determine the load for the working direction. This test was design to simulate the possibility of the handle being used as a tie down point. The direction that was pulled is considered a worst case scenario.

APPENDIX 1

TEST PLAN

AIR FORCE PACKAGING TECHNOLOGY AND ENGINEERING FACILITY (HANDLE TEST PLAN)			AFPTEF PROJECT NUMBER: 93-P-107	
HANDLE SIZE (MILLIMETERS) BAIL (W X D):      EXTERIOR (L X W X D): 113 X 55      130 X 120 X 15		HANDLE ROTATION:  90 DEGREES	QUANTITY:  4	DATE:  01 Mar 93
ITEM NAME: Retractable Handle			MANUFACTURER: Nielson Hardware	
PART NUMBER: H945SS2RGSS			HANDLE COST: N/A	
HANDLE DESCRIPTION: Spring loaded, retractable, stainless steel plate, spring, and bail.				
CONDITIONING: As noted below				
TEST NO.	REF STD/SPEC AND TEST METHOD OR PROCEDURE NO'S	TEST TITLE AND PARAMETERS	HANDLE ORIENTATION	INSTRUMENTATION
1.	<u>HANDLE HOISTING/PULL TEST</u>			
a.	MIL-STD-648 Para. 4.17.2.1 Part C, Para. 5.8.3 Modified	At the center of a handle, apply a force of <u>200</u> kg in the upward direction, parallel to the container side.		Visual Inspection (VI)
b.	(4.7.4) Modified	At the center of a handle, apply a force of <u>200</u> Kg in the direction perpendicular to the container side.		VI
c.	(4.7.4) Modified	At the center, on the side of the handle, apply a force of <u>180</u> Kg in the direction parallel to the container side. Both directions.		VI
COMMENTS: * Figures in parenthesis () refer to paragraphs in MIL-C-5584D.				
PREPARED BY: Robert Tekesky, Mechanical Engineer			APPROVED BY: Ted Hinds, Chief, Design Group, AFPTEF	

APPENDIX 2  
TEST RESULTS

TABLE I  
Applied Forces and Results

Applied Force (Kg)	Test A Rotation	Test B	Test C1 Lateral Movement	Test C2 Lateral Movement
50	113°	PASSED	22 mm	16 mm
60	115°	PASSED	22 mm	17 mm
70	117°	PASSED	22 mm	17 mm
80	123°	PASSED	23 mm	17 mm
90	130°	PASSED	25 mm	18 mm
100	151°	PASSED	26 mm	18 mm
110	155°	PASSED	27 mm	18 mm
120	155°	PASSED	28 mm	19 mm
130	156°	PASSED	30 mm	21 mm
140	158°	PASSED	32 mm	21 mm
150	159°	PASSED	35 mm	22 mm
160	162°	PASSED		MISSED
170	167°	PASSED		24 mm
180	167°	PASSED		27 mm
190	168°	PASSED		28 mm
200	168°	PASSED		29 mm
210	168°	PASSED		
220	168°	PASSED		
230	168°	PASSED		
240	170°	PASSED		
250	170°	PASSED		

APPENDIX 3  
PHOTOGRAPHS

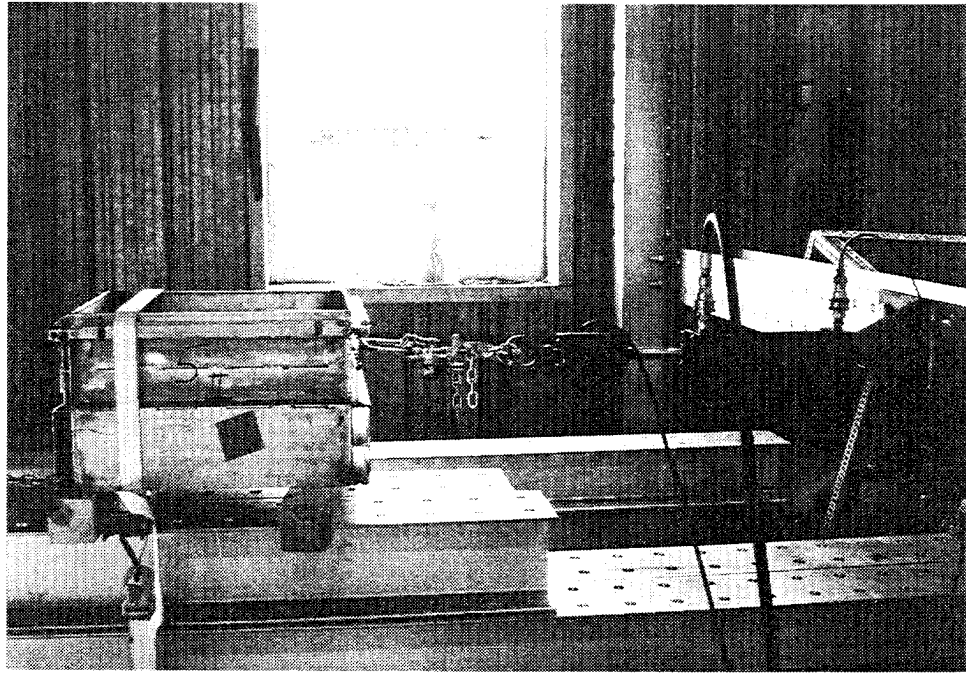


Figure 1. TEST SETUP.

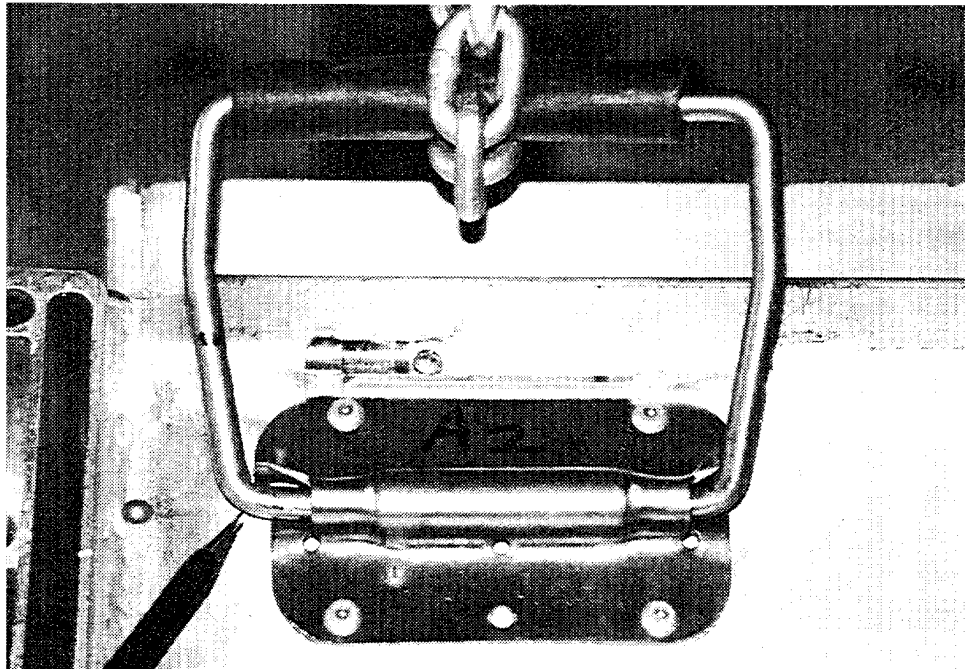


Figure 2. PHYSICAL STOP DEFORMATION.

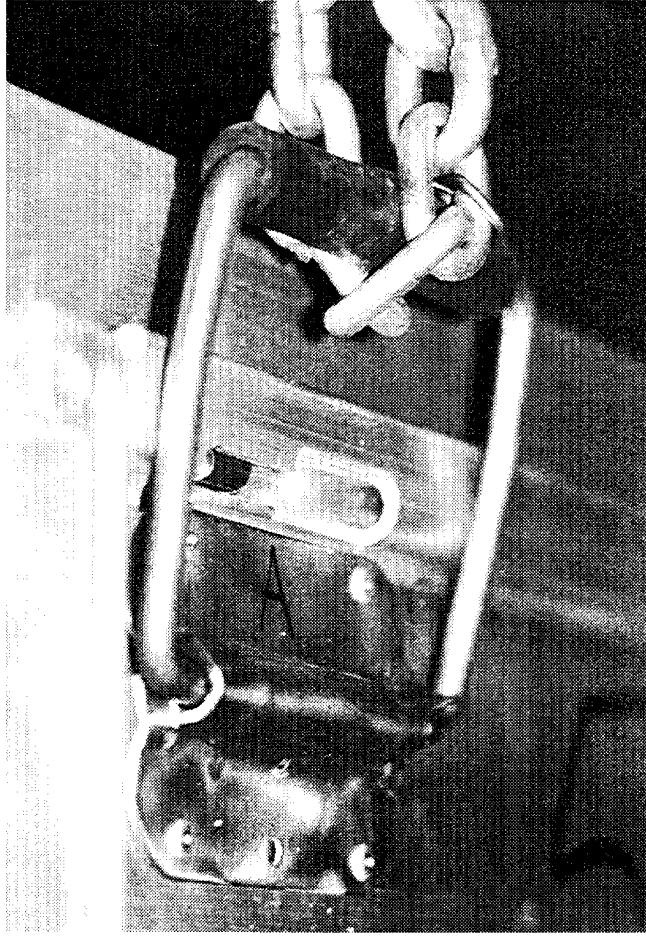


Figure 3. 250 Kg LOAD APPLIED.

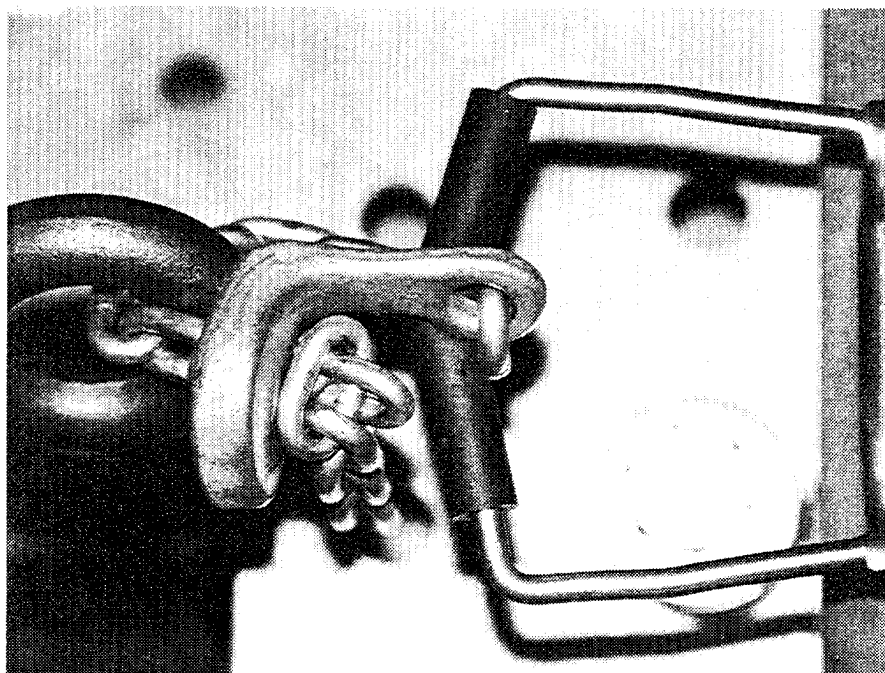


Figure 4. BAIL DEFORMATION.

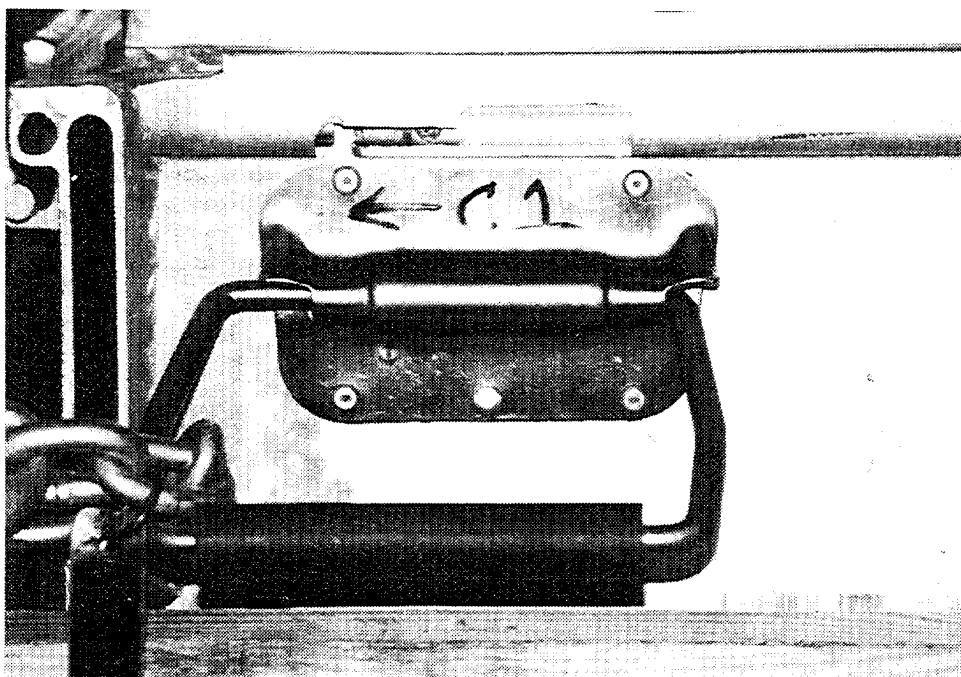


Figure 5. BAIL SHOWING SIGNS OF DEFORMATION.

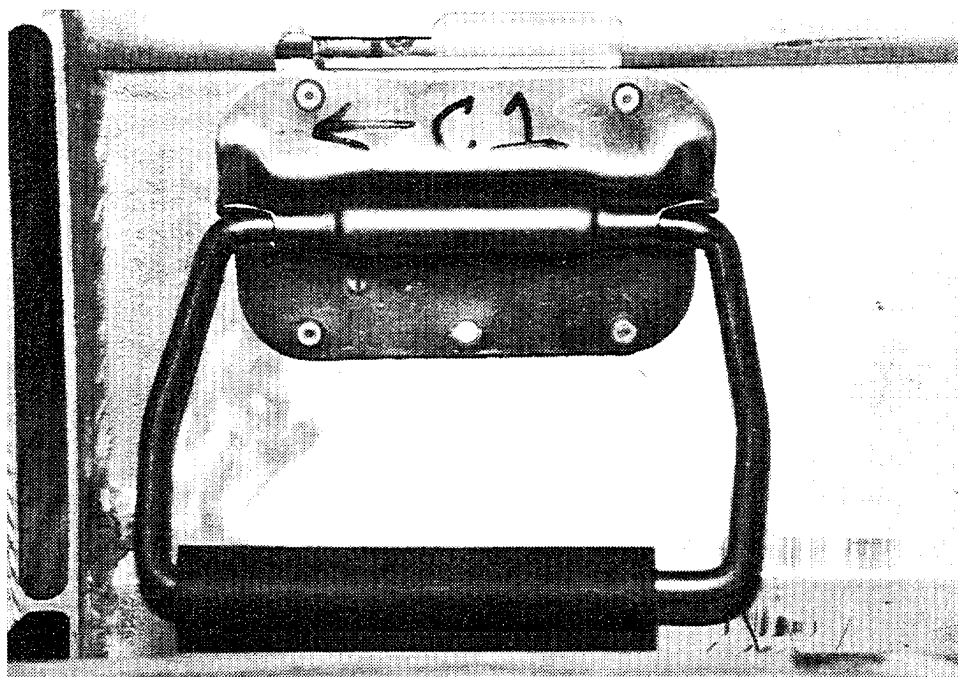


Figure 6. BAIL DEFORMATION.

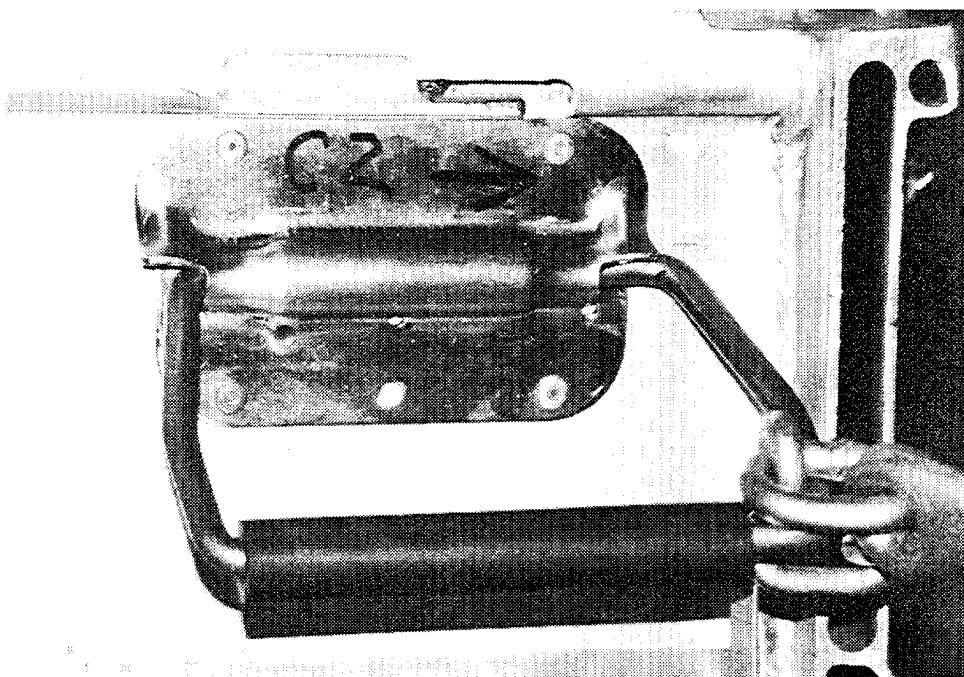


Figure 7. BAIL SHOWING SIGNS OF DEFORMATION.

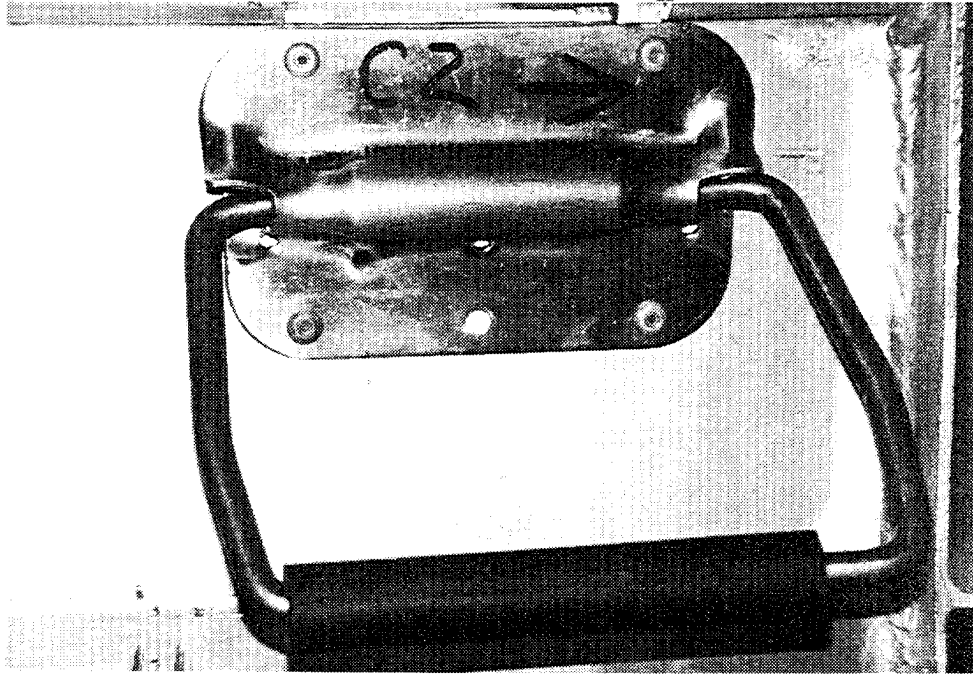


Figure 8. BAIL DEFORMATION.

APPENDIX 4  
DISTRIBUTION LIST

DISTRIBUTION LIST

DTIC/FDAC CAMERON STATION ALEXANDRIA VA 22304-6145	1
*HQ AFMC/LG 4375 CHIDLAW ROAD SUITE 6 WRIGHT-PATTERSON AFB OH 45433-5006	1
*HQ AFMC/LGT 4375 CHIDLAW ROAD SUITE 6 WRIGHT-PATTERSON AFB OH 45433-5006	1
*AFMC LSO/LO 4375 CHIDLAW ROAD SUITE 6 WRIGHT-PATTERSON AFB OH 45433-5006	1
*AFMC LSO/LOP (LIBRARY) 5215 THURLOW ST WRIGHT-PATTERSON AFB OH 45433-5540	10
HQ USAF/LGTT 1030 PENTAGON RM 4B322 WASHINGTON DC 20330-1030	1
72 ABW/LGTP 7615 SENTRY BLVD SUITE 201 TINKER AFB OK 73145-8912	1
75 ABW/LGTP 7530 11th ST HILL AFB UT 84056-5707	1
*OO-ALC/LIWGB ATTN: JOHN LOCHNER 6034 DOGWOOD AVENUE HILL AFB UT 84056-5816	1
76 LG/LGTP 401 WILSON BLVD KELLY AFB TX 78241-5340	1
77 ABW/LGTP 1961 IDZOREK ST MCCLELLAN AFB CA 95652-1620	1
78 ABW/LGTP BLDG 376 455 BYRON ST SUITE 1150 ROBINS AFB GA 31098-1860	1

DISTRIBUTION LIST (Cont'd)

*ASC/ALX 2475 K STREET SUITE 1 WRIGHT-PATTERSON AFB OH 45433-7642	1
*ASC/VXTC BLDG 614 102 WEST D AVE SUITE 168 EGLIN AFB FL 32542-6807	1
*GSA/FSS (2FYE) ATTN: CHARLIE WEILL 26 FEDERAL PLAZA NEW YORK NY 10278	1
COMMANDER *ATTN: GINGER DAVIS (CODE 4122D) NAVAL SUPPLY SYSTEMS COMMAND 1931 JEFFERSON DAVIS HWY ARLINGTON VA 22241-5360	1
COMMANDER ATTN: E PANIGOT (AIR 41212A) NAVAL AIR SYSTEMS COMMAND WASHINGTON DC 20361	1
COMMANDER NAVAL SEA SYSTEMS COMMAND ATTN: G MUSTIN (SEA 66P) WASHINGTON DC 20362	1
ATTN: E. H. BRIGGS (CODE 0512) NAVAL AVIATION SUPPLY COMMAND 700 ROBBINS AVENUE PHILADELPHIA PA 19111-5098	1
ATTN: F SECHRIST (CODE 0541) NAVY SHIPS PARTS CONTROL CENTER PO BOX 2020 MECHANICSBURG PA 17055-0788	1
COMMANDING OFFICER ATTN: F MAGNIFICO (SESD CODE 9321) NAVAL AIR ENGINEERING CENTER LAKEHURST NJ 08733-5100	1
*COMMANDING OFFICER NAVAL WEAPONS STATION EARLE NWHC/CODE 8023 & 5022 COLTS NECK NJ 07722-5000	2

DISTRIBUTION LIST (Cont'd)

*US AMC PACKAGING STORAGE AND CONTAINERIZATION CENTER/AMXLX-TE & AMXLS-TP 16 HAP ARNOLD BLVD TOBYHANNA PA 18466-5097	1
DLSIE/AMXMC-D US ARMY LOGISTICS MGT CTR FT LEE VA 23801-6034	1
ATTN: Mike Ivankoe US ARMY ARDEC/SMCAR-AEP DOVER NJ 07801-5001	1
AFMC LSO/LOE WRIGHT-PATTERSON AFB OH 45433	1
ATTN: DLA-MMDO DEFENSE LOGISTICS AGENCY CAMERON STATION ALEXANDRIA VA 22304-6100	1
AMARC/LGT 6805 E. IRVINGTON RD DAVIS MONTHAN AFB AZ 85707-4341	1
HQ PACAF/LGT BLDG 1102 25 E. ST. STE I326 HICKAM AFB HI 96853-5426	1
HQ USAFE/LGT UNIT 3050 BOX 105 APO AE 09094-0105	1
HQ ACC/LGT 130 DOUGLAS ST STE 210 LANGLEY AFB VA 23665-2791	1
HQ AF SPACECOM/LGT 150 VANDENBURG ST., STE 1105 PETERSON AFB CO 80914-5000	1
HQ AETC/LGT 555 E ST EAST RANDOLPH AFB TX 78150-4440	1
*HQ AFSA/SEW ATTN: ARLIE ADAMS 9700 AVENUE G STE 263 KIRTLAND AFB NM 87117-5670	1

DISTRIBUTION LIST (Cont'd)

\*US TRANSCOM/JTCC 1  
ATTN: DON LAWSON  
203 W LOSEY  
SCOTT AFB IL 62225-5219

SCHOOL OF MILITARY PACKAGING TECHNOLOGY 1  
ATSZ-MP  
ATTN: LARRY FRANKS  
ABERDEEN PROVING GROUND MD 21005-5001

COMMANDANT OF MARINE CORPS 1  
HQ USMC ATTN: MIKE DAWSON (CODE LPP-2)  
2 NAVY ANNEX  
WASHINGTON DC 20380-1775

\*HQ AMC/DOJC 1  
402 SCOTT DR BLDG 1600 ROOM 132  
SCOTT AFB IL 62225-5363

\*HQ AFRES/LGT 1  
155 SECOND ST  
ROBINS AFB GA 31098-1635

\*HQ ANGRG/LGT 1  
3500 FETCHET AVE  
ANDREWS AFB MD 20331-5157

\*HQ USAFA/LGT 1  
8110 INDUSTRIAL DR  
USAF ACADEMY CO 80840-2305

\*ODUSD/L/MRM 1  
PENTAGON 2D261  
WASHINGTON DC 20301-8000

\*AMSTA-AR-AL BLDG 455 1  
ATTN: AL GALONSKI  
PICATINNY ARSENAL NJ 07806-5000

\*COMMANDING OFFICER 1  
NAVAL SURFACE WARFARE CENTER  
ATTN: FRANK NIEHAUS  
300 HIGHWAY 361 CODE 4074  
CRANE IN 47522-5000

\*LOGSA PACKAGING, STORAGE, 1  
AND CONTAINERIZATION CENTER  
AMXLS-TP-P  
ATTN: JOHN HARTSELL  
16 HAP ARNOLD BLVD  
TOBYHANNA PA 18466-5097

*US ARMY ARDEC AMSTA-AR-AEP PKG DIV BLDG 455 ATTN: EUGENE FARRELL PICATINNY ARSENAL NJ 07806-5000	1
*COMMANDER, US ARMY TANK AUTOMOTIVE AND ARMAMENTS COMMAND AMSTA-TR-T ATTN: MIKE BROWN WARREN MI 48397-5000	1
*COMMANDER, US ARMY AVIATION AND TROOP COMMAND AMSAT-I-SDP ATTN: STEVE GEASCHEL ST. LOUIS MO 63120-1798	1
*COMMANDER, US ARMY MISSILE COMMAND AMSMI-MMC-MM-DP ATTN: RON KOCHEVAR REDSTONE ARSENAL AL 35898-5239	1
*US ARMY MISSILE COMMAND AMSMI-RD-ST-GD ATTN: TOM LAMAR REDSTONE ARSENAL AL 35898-5247	1
*LOGSA PACKAGING, STORAGE, AND CONTAINERIZATION CENTER AMXLS-TE ATTN: BOB MCGILL 16 HAP ARNOLD BLVD TOBYHANNA PA 18466-5097	1
*COMMANDER, US ARMY COMMUNICATIONS ELECTRONIC COMMAND AND FORT MONMOUTH AMSEL-LC-MMD-P ATTN: AL GREGOR FORT MONMOUTH NJ 07703-5000	1
*DIRECTOR, US ARMY EDGEWOOD RESEARCH DEVELOPMENT AND ENGINEERING CENTER SCBRD-ENE-S ATTN: SCOTT TOMLINSON ABERDEEN PROVING GROUND MD 21010-5423	1
*BENET LABS - WATERVLIET ARSENAL SMCAR-CCB-SS ATTN: NORM JAMES WATERVLIET NJ 12189-4050	1



APPENDIX 5  
REPORT DOCUMENTATION

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE JAN 96	3. REPORT TYPE AND DATES COVERED FINAL MAY 93 - JAN 96
----------------------------------	--------------------------	---

4. TITLE AND SUBTITLE Research & Testing of Commercial Handles for Small Containers	5. FUNDING NUMBERS
--	--------------------

6. AUTHOR(S) Robert S. Tekesky	
-----------------------------------	--

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Air Force Packaging Technology and Engineering Facility (AFPTEF) AFMC LSO/LOP 5215 Thurlow St. BLDG 70 Wright-Patterson AFB OH 45433-5540	8. PERFORMING ORGANIZATION REPORT NUMBER  96-R-01
--	---

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)	10. SPONSORING/MONITORING AGENCY REPORT NUMBER
---	--

11. SUPPLEMENTARY NOTES
-------------------------

12a. DISTRIBUTION/AVAILABILITY STATEMENT DISTRIBUTION UNLIMITED	12b. DISTRIBUTION CODE
--	------------------------

13. ABSTRACT (Maximum 200 words)  This project was established to identify handle manufactures and their products with some type of handle strength rating. Current handles are not retractable, i.e. spring loaded, and would swing out from the container wall during drop testing. On small containers experiencing free fall drop testing, the handles would get damaged between the container and the ground. The damage was sporadic, therefore, AFPTEF wanted to look at the retractable handles that would hold the handle up against the container wall. The AFPTEF's goal was to test the commercial handles and certify them to a rated load and eliminate the need to repeat testing of handles on other containers.
--

14. SUBJECT TERMS Commercial Handles, Small Containers, Handle Testing	15. NUMBER OF PAGES 23
---	---------------------------

	16. PRICE CODE
--	----------------

17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL
---	--	---	----------------------------------