

DEGRADATION AND DECONTAMINATION OF VX IN CONCRETE

G. W. Wagner* and Richard J. O'Connor
U.S. Army Edgewood Chemical Biological Center
Aberdeen Proving Ground, MD 21010

Jennifer L. Edwards[†] and Carol A. S. Brevett
Geo-Centers, Inc.
Gunpowder Branch Box 68, Aberdeen Proving Ground, MD 21010
[†]Current Address: Johns Hopkins University Applied Physics Lab
11100 Johns Hopkins Road, Laurel, MD 20723

ABSTRACT

Reactions of VX in concrete have been studied in situ using solid state ³¹P NMR. The size of VX drops deposited on concrete affected the natural degradation rate, with 4-μL drops reacting faster than 0.2-μL drops. The half-life observed for VX on the approximately 1-year-old concrete was on the order of 1 week, significantly faster than the rate observed on much older concrete. Water added to concrete samples containing sorbed VX to mimic precipitation and/or a potential decontamination strategy resulted in the desorption of copious amounts of VX into the water along with the expected non-toxic hydrolysis product ethyl methylphosphonate (EMPA), and although a significant amount of the EA-2192 hydrolysis product was also observed, this toxic byproduct of VX was not persistent, slowly undergoing secondary hydrolysis to non-toxic methylphosphonate (MPA). The rate of VX degradation in the presence of external water was only slightly enhanced relative to the background degradation rate. Decontamination of VX sorbed in concrete using the new Decon GreenTM decontaminant resulted in the nearly complete reaction of VX to non-toxic EMPA within a few hours and avoided the formation of toxic EA-2192.

1. INTRODUCTION


The importance of drop sizes and their environmental persistence arises from the predicted size range of VX droplets reaching the ground following a military chemical attack, 0.01 to 2 μL, and the need for battlefield commanders to know the severity and endurance of the hazard. Decisions must be made whether to expend time and resources performing wide-area decontamination or to determine if natural weathering, alone, will allow resumption of normal operations after an acceptable waiting period. Indeed, if wide-area decontamination is warranted for a known persistent agent such as VX, proper decontamination procedures need to be developed and employed to successfully remediate the hazard.

Recent studies examining the persistence of VX in concrete have produced seemingly widely different

results. Examining both small, neat 0.01-μL VX drops and solvent-assisted submonolayer applications of VX, Groenwold et al. (2002), found that VX did not persist on concrete beyond a day or so. Yet in our preliminary study (Wagner et al., 2001), using the exact same concrete as Groenwold et al. (2002), large drops of VX on the order of several μL's persisted for more than a month. It was observed, however, that a small fraction of the applied VX did react relatively quickly within a few hours. This fraction of VX reacting quickly corresponded to about 1 monolayer, evidence that concrete does possess a reactive capacity of about 1 monolayer for VX. Therefore, the idea of a reactive concrete surface with a capacity limited to about 1 monolayer for VX that becomes overwhelmed by large droplets reconciles our result with those of Groenwold et al. (2002).

VX undergoes a slow, but selective hydrolysis in water to yield nontoxic ethyl methylphosphonate (EMPA) as shown in Scheme 1 (Wagner et al. 2001). On the other hand, basic hydrolysis is nonselective, yielding up to 22% of the toxic S-[2-(diisopropylamino)ethyl] methylphosphono thioate (EA-2192). In our preliminary study (Wagner et al. 2001) we noted that VX degradation on the aged concrete was selective for EMPA, as EA-2192 was not detected by ³¹P NMR. Using IT-SIMS, Groenwold et al. (2002) also did not detect any EA-2192 formation on concrete.

Scheme 1

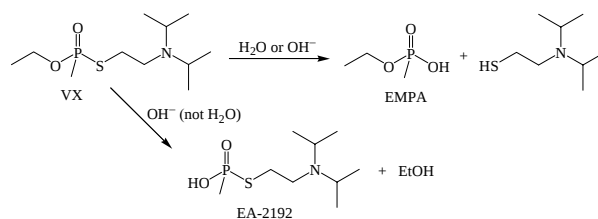

In the current study, the persistence of various drop sizes of VX is examined on fresh concrete and these results are compared to those of the preliminary study. Additionally, the effect of two potential wide-area

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 00 DEC 2004		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Degradation And Decontamination Of Vx In Concrete				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Edgewood Chemical Biological Center Aberdeen Proving Ground, MD 21010 ; Geo-Centers, Inc. Gunpowder Branch Box 68, Aberdeen Proving Ground, MD 21010 Current Address: Johns Hopkins University Applied Physics Lab 11100 Johns Hopkins Road, Laurel, MD 20723				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM001736, Proceedings for the Army Science Conference (24th) Held on 29 November - 2 December 2005 in Orlando, Florida.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 2	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

decontaminants, water and the new Decon GreenTM decontaminant (Wagner and Yang, 2002) are examined.

³¹P NMR spectra obtained for VX drops of sizes 4, 2, 1, 0.5, and 0.2 μ L applied to 8 mm $\times$ 2 mm $\times$ 15 mm fresh concrete coupons are shown in Figure 1. Note that varying the number of drops kept the total amount of VX at 4 μ L for each sample. The fresh concrete was 2 months old when this experiment was conducted. The spectra yield overlapping peaks for VX and EMPA, and lines have been added to the spectra to aid the reader in discerning these peaks. It is observed that in all cases VX slowly decomposes to EMPA over the course of several days; however, the smaller drops react considerably faster than the large drops. After 4 days, considerable VX remains for the 4- μ L drop sample; a small amount of residual VX is evident as a shoulder for the 2- μ L drop sample; but no residual VX is apparent for the 1 μ L and smaller drop samples. The effect of using a solvent (hexane) to uniformly spread the same amount of VX (4 μ L) across the concrete surface was investigated. This experiment was conducted after the “fresh” concrete had aged 14 months, so a control experiment using a single 4- μ L drop of VX was also examined. As with the smaller drops above, the hexane-spread VX sample reacted considerably faster than the single 4- μ L drop sample, with the former reacting within 5 days in contrast to 9 days for the latter.

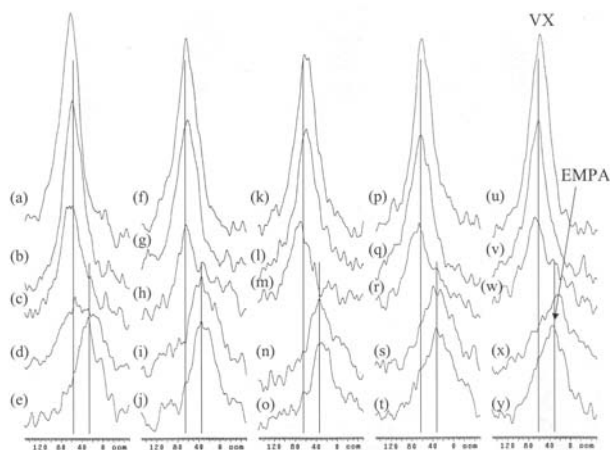


Figure 2. Selected ³¹P NMR spectra obtained for VX added to concrete coupons at (top to bottom) 1 h, 5 h, 29 h, 4 days and 11days: one-4 μ L drop (a-e); two-2 μ L drops (f-j); four-1 μ L drops (k-o), eight-0.5 μ L drops (p-t) and twenty-0.2 μ L drops (u-y).

In contrast to the previous study where VX persisted on an aged concrete sample for months, VX only persists for days on the fresh concrete. Moreover, the exceptional reactivity of the “fresh” concrete was maintained for at least 14 months. The pH measured for water containing crushed samples of the concretes was about 10 for the fresh concrete (after 14 months ageing) and 9 for the aged

concrete. Thus the higher pH of the fresh concrete is one apparent factor for its increased reactivity. Also, ³¹P NMR suggests increased mobility for the VX sorbed on the fresh concrete owing to its much narrower NMR line; another contributing factor to enhanced reactivity.

Additional experiments examining the effect of decontamination attempts using water and the new Decon GreenTM decontaminant were conducted. With 1 mL water added to VX sorbed on the fresh concrete, VX was immediately desorbed from the concrete and persisted beyond three days. Thus the addition of water did not significantly enhance the degradation rate of VX. Indeed, water-induced desorption of VX from concrete may actually increase its contact and/or vapor hazard. Besides VX, the decomposition products EMPA and EA-2192 were also desorbed by water and detected; however, the latter toxic compound did not persist, slowly reacting to non-toxic methylphosphonic acid (MPA) over the course of a few weeks. In contrast to water, addition of 0.8 mL Decon GreenTM resulted in the complete reaction of VX within a few hours and did not significantly desorb VX. Moreover, formation of toxic EA-2192 was avoided owing to the selective nature of the VX reaction with Decon GreenTM (Wagner and Yang, 2002).

REFERENCES

- Groenwold, G. S.; Williams, J. M.; Appelhaus, A. D.; Gresham, G. L.; Olson, J. E.; Jeffery, M. T.; Rowland, B., 2002: Hydrolysis of VX on Concrete: Rate of Degradation by Direct Surface Interrogation Using an Ion Trap Secondary Ion Mass Spectrometer, *Environ. Sci. Technol.*, **36**, 4790-4794, and references therein.
- Wagner, G. W. and Yang, Y.-C., 2002: Rapid Nucleophilic/ Oxidative Decontamination of Chemical Warfare Agents, *Ind. Eng. Chem. Res.*, **41**, 1925-1928.
- Wagner, G. W.; O'Connor, R. J.; Procell, L. R., 2001: Preliminary Study on the Fate of VX in Concrete, *Langmuir*, **17**, 4336-4341, and references therein.

CONCLUSION

VX degrades significantly faster on fresh concrete than on aged concrete. Contributing factors include the higher pH and increased mobility of VX on fresh concrete. There is a marked drop size effect for the degradation of VX on concrete, with sub- μ L sized droplets reacting significantly faster than larger drops. Decontamination with water leads to desorption of VX and its products, potentially increasing the VX contact/vapor hazard, but does not significantly enhance the rate of degradation. In stark contrast, decontamination with Decon GreenTM affords the complete reaction of VX within a few hours, and does not significantly desorb VX.