



Challenges for Middleware Imposed by the Tactical Army Communications Environment

Dr. Allan Gibb

Defence R&D Canada - Valcartier

presented 26 August 2003

IST-030/RTG-012 Workshop on 'Role of Middleware in Systems Functioning over Mobile Communication Networks'



Defence Research and
Development Canada

Recherche et développement
pour la défense Canada

Canada

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 01 DEC 2007		2. REPORT TYPE N/A		3. DATES COVERED	
4. TITLE AND SUBTITLE Challenges for Middleware Imposed by the Tactical Army Communications Environment				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Defence R&D Canada - Valcartier				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 25	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			



Revolution in Battlefield Command and Control

‘Network-Centric Warfare’

- ‘An information-superiority enabled concept of operations that generates increased combat power by networking sensors, decision makers and shooters to achieve:
 - shared awareness
 - increased speed of command
 - higher tempo of operations
 - greater lethality
 - increased survivability
 - a degree of self-synchronization

D.S. Alberts, J.J. Garstka, F.P. Stein, ‘Network centric warfare: developing and leveraging information superiority’, CCRP Publication Series, 1999

Defence R&D Canada – Valcartier • R & D pour la défense Canada – Valcartier

UNCLASSIFIED – APPROVED FOR PUBLIC RELEASE



Revolution in Battlefield Command and Control

- Introduction of digital C3I systems
- Promise of increased battlefield awareness
- Need to distribute digital data
 - quickly
 - widely
 - reliably
- ‘The right information to the right place at the right time’



Outline of Presentation

- Army command and control structure
- The tactical communications environment
- Challenges posed by the tactical communications environment



Army Command and Control Structure

Defence R&D Canada – Valcartier • R & D pour la défense Canada – Valcartier

UNCLASSIFIED – APPROVED FOR PUBLIC RELEASE




Army Command and Control Structure

Typical
Organization
Size

Information
Flow

Plans &
Orders




Microwave or
Satellite link




VHF/UHF



Radio



Reports

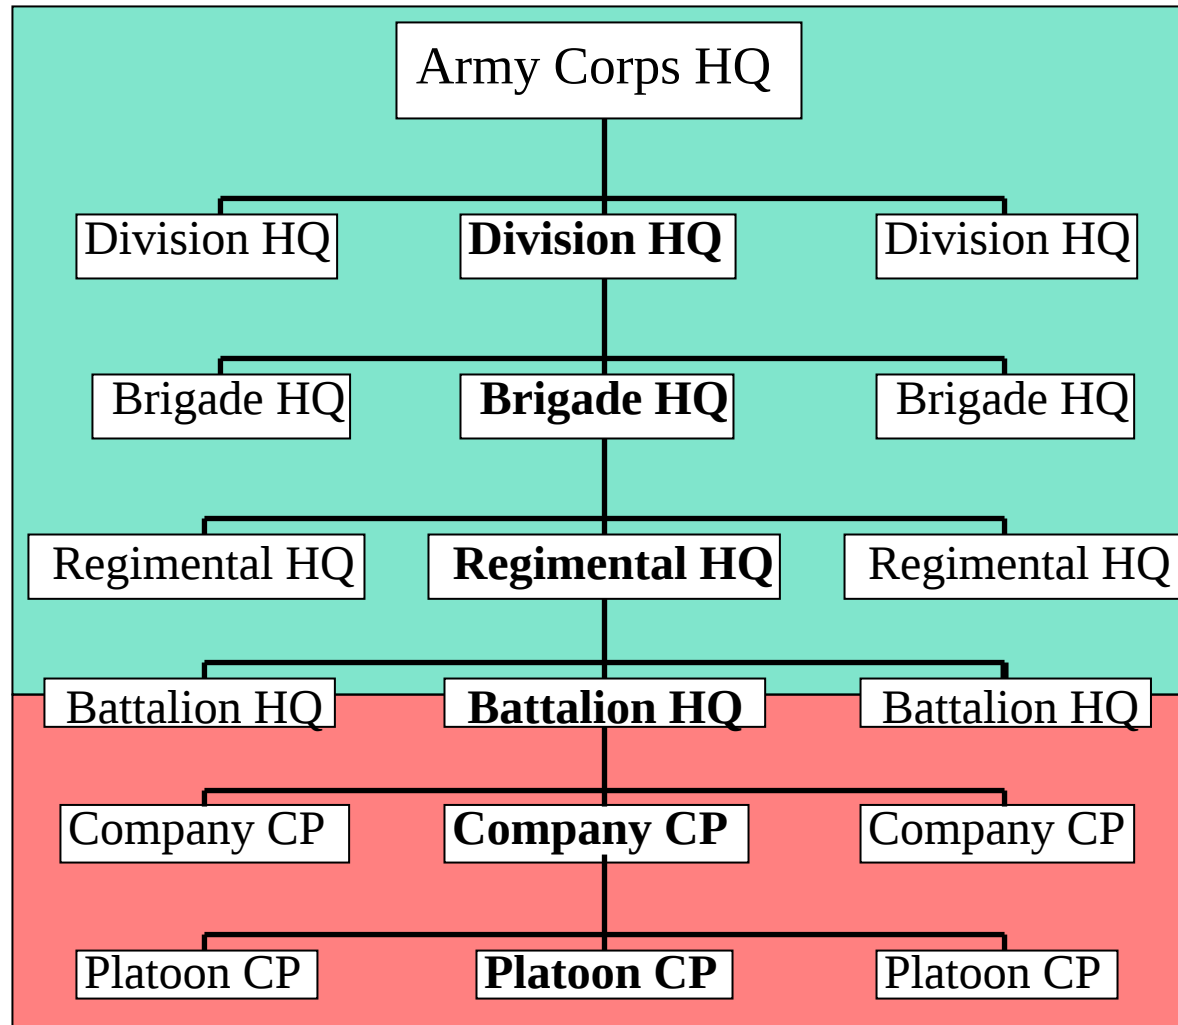

30-50000
persons

10000+

3000+

1000


3-500

100

30

Defence R&D Canada – Valcartier • R & D pour la défense Canada – Valcartier

UNCLASSIFIED – APPROVED FOR PUBLIC RELEASE

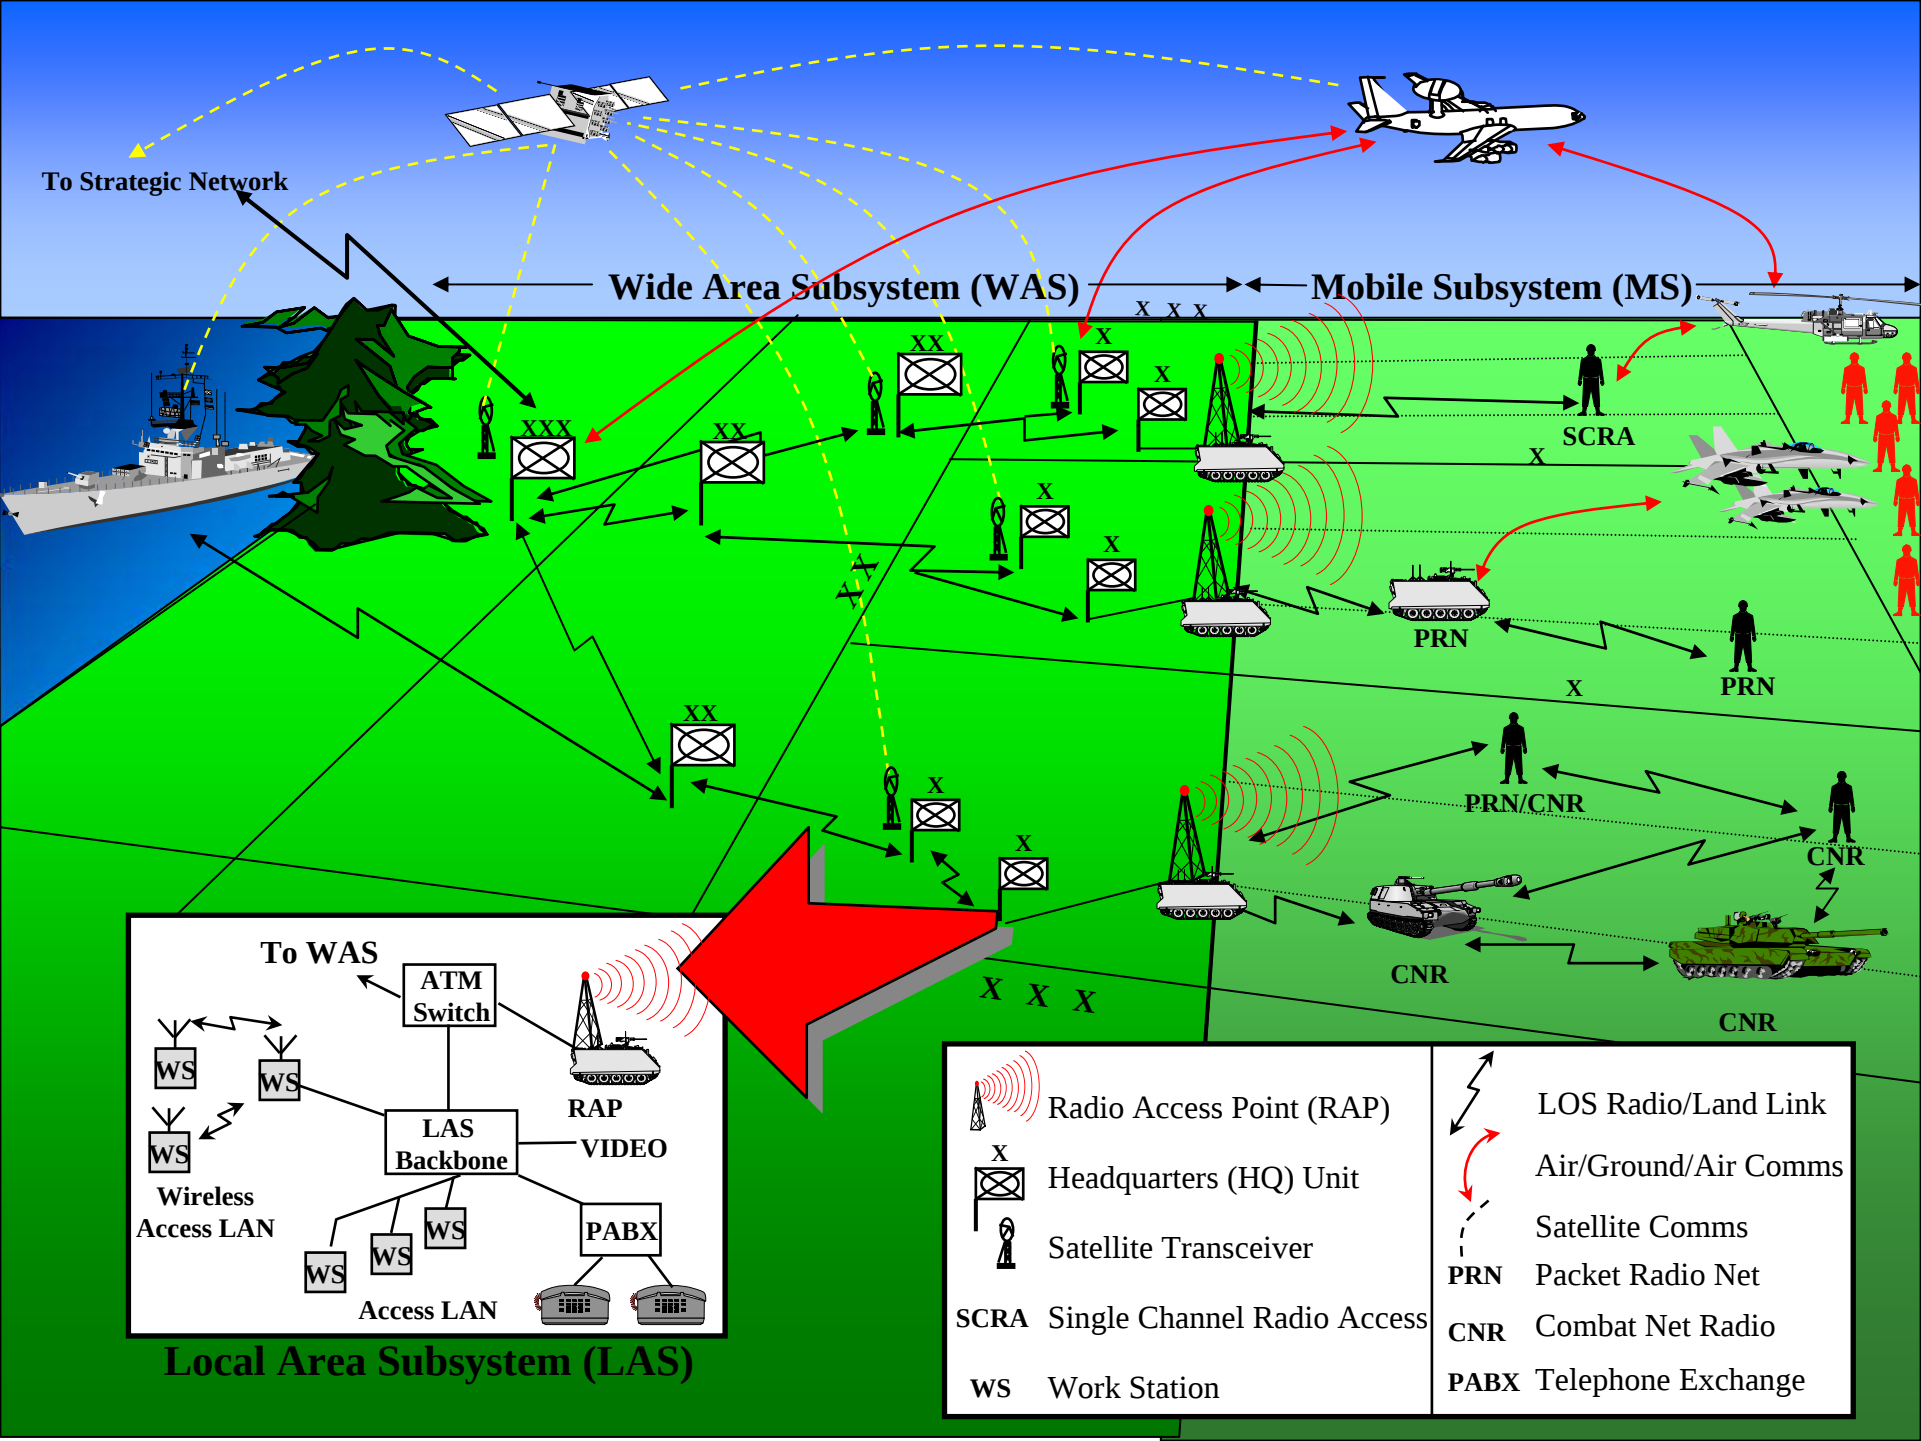

To Strategic Network

Wide Area Subsystem (WAS)

Mobile Subsystem (MS)

SCRA

PRN

X

PRN

PRN/CNR

CNR

CNR

CNR

To WAS

ATM Switch

RAP

VIDEO

LAS Backbone

Wireless Access LAN

Access LAN

PABX

Radio Access Point (RAP)

Headquarters (HQ) Unit

Satellite Transceiver

SCRA Single Channel Radio Access

WS Work Station

LOS Radio/Land Link

Air/Ground/Air Comms

Satellite Comms

PRN Packet Radio Net

CNR Combat Net Radio

PABX Telephone Exchange

Local Area Subsystem (LAS)



The Tactical Communications Environment

Defence R&D Canada – Valcartier • R & D pour la défense Canada – Valcartier


UNCLASSIFIED – APPROVED FOR PUBLIC RELEASE




Army C2 Structure - Tactical Domain

Information Flow

Plans & Orders




VHF/UHF
Radio




Reports

Typical Organization Size

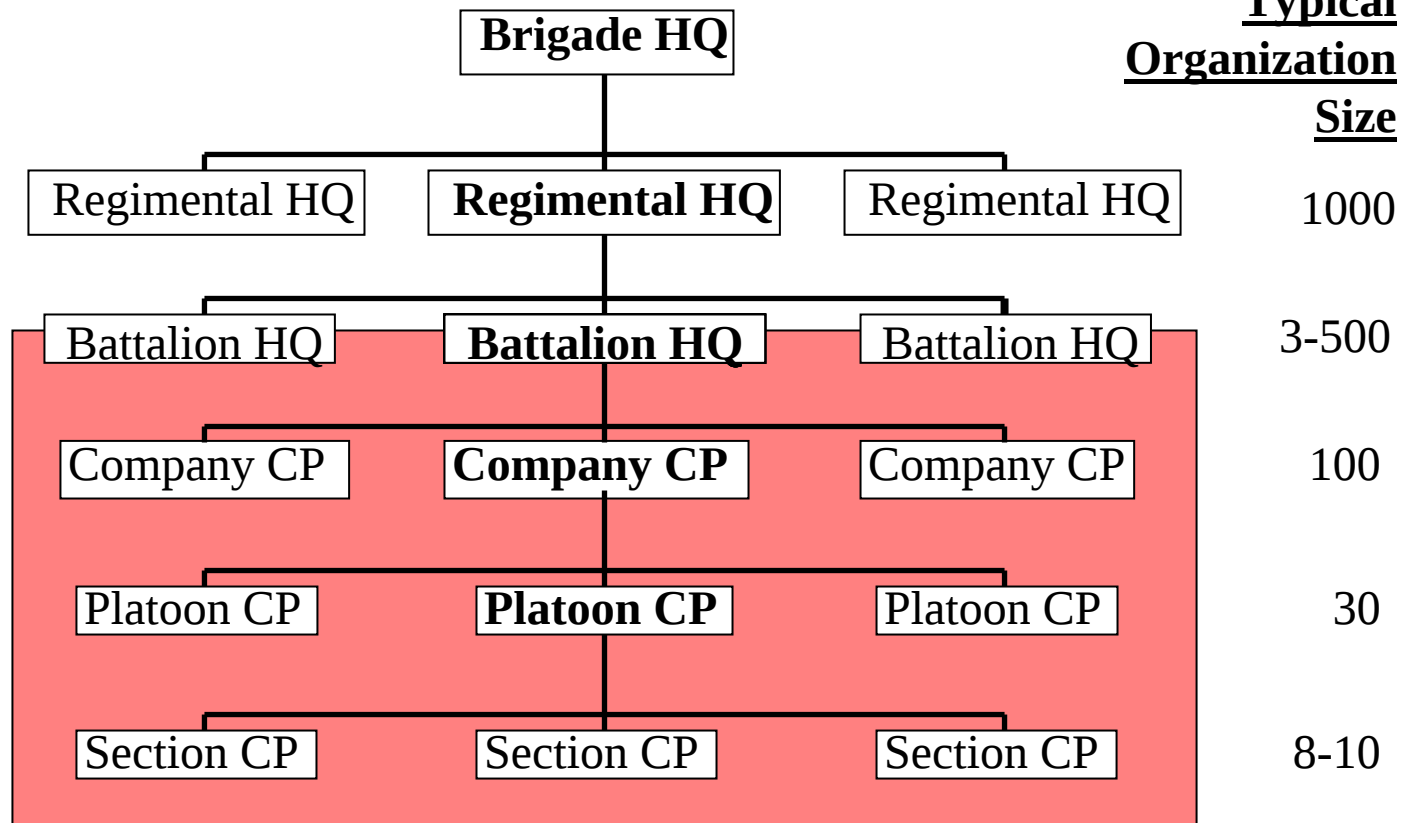



Notional Battle Group (augmented Battalion) Command Net

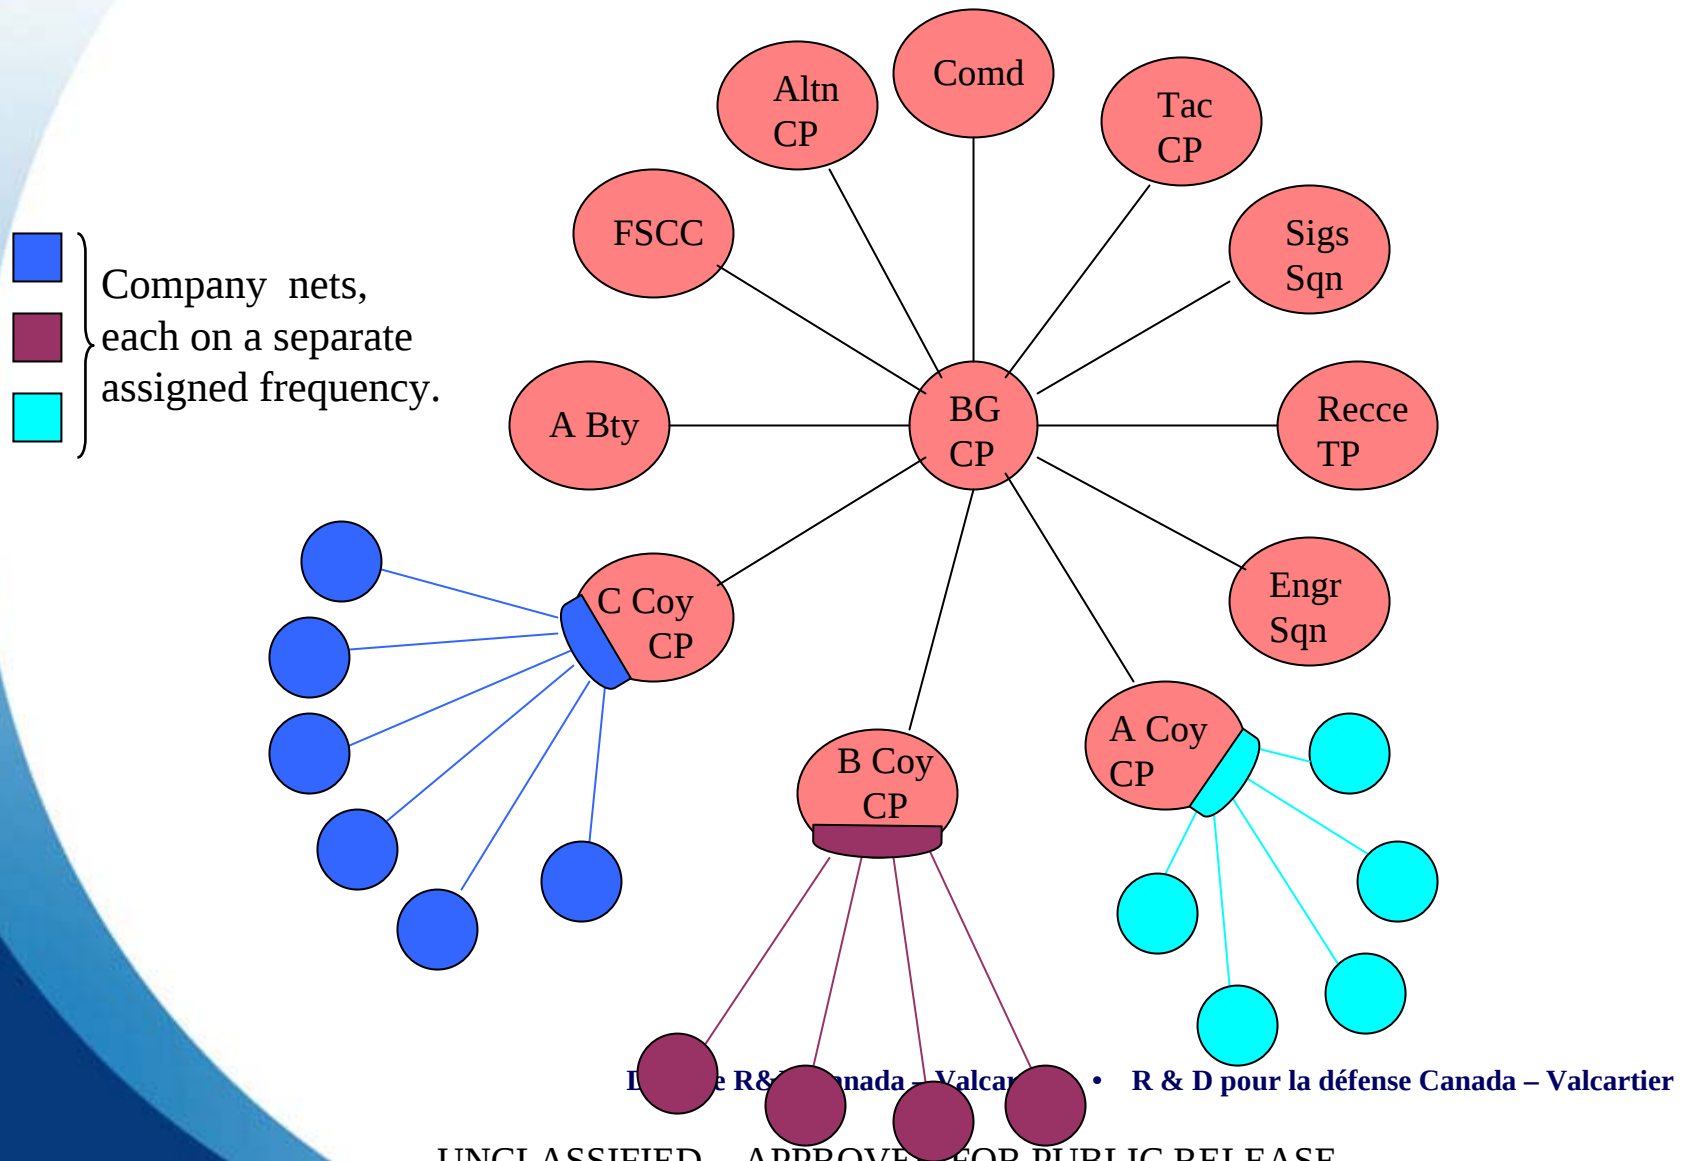


CNR VHF: e.g. CNR(P), SINGCARS

CNR UHF: e.g. NTDR

CNR HB UHF: e.g. 802.11

Medium Range Wireless: 400m – 15km

Short Range Wireless: 0-400m

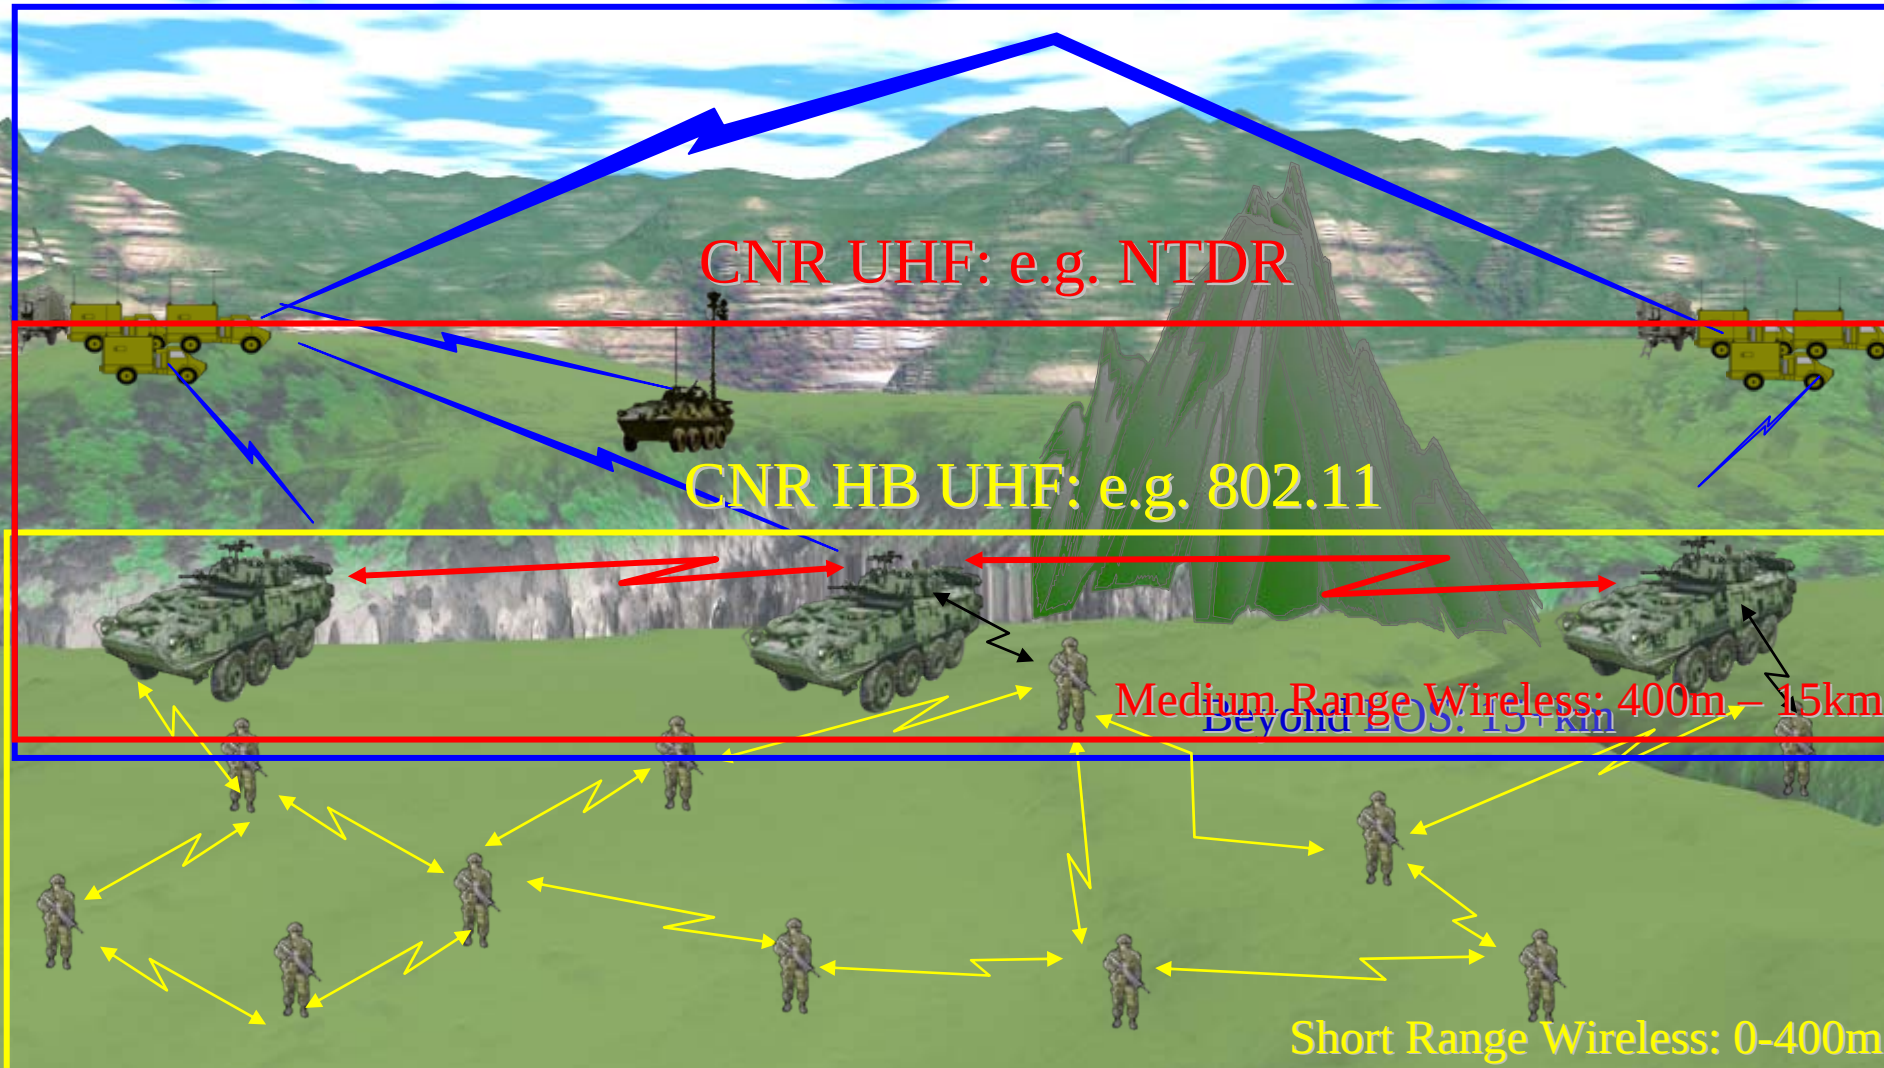



CNR Domain

- VHF: Vast majority of radios capable of 16kbps half duplex.




- UHF: Radios capable of 288kbps full duplex.



- High Band UHF: (e.g. 802.11) capable of 11 Mbps.



Network Layers

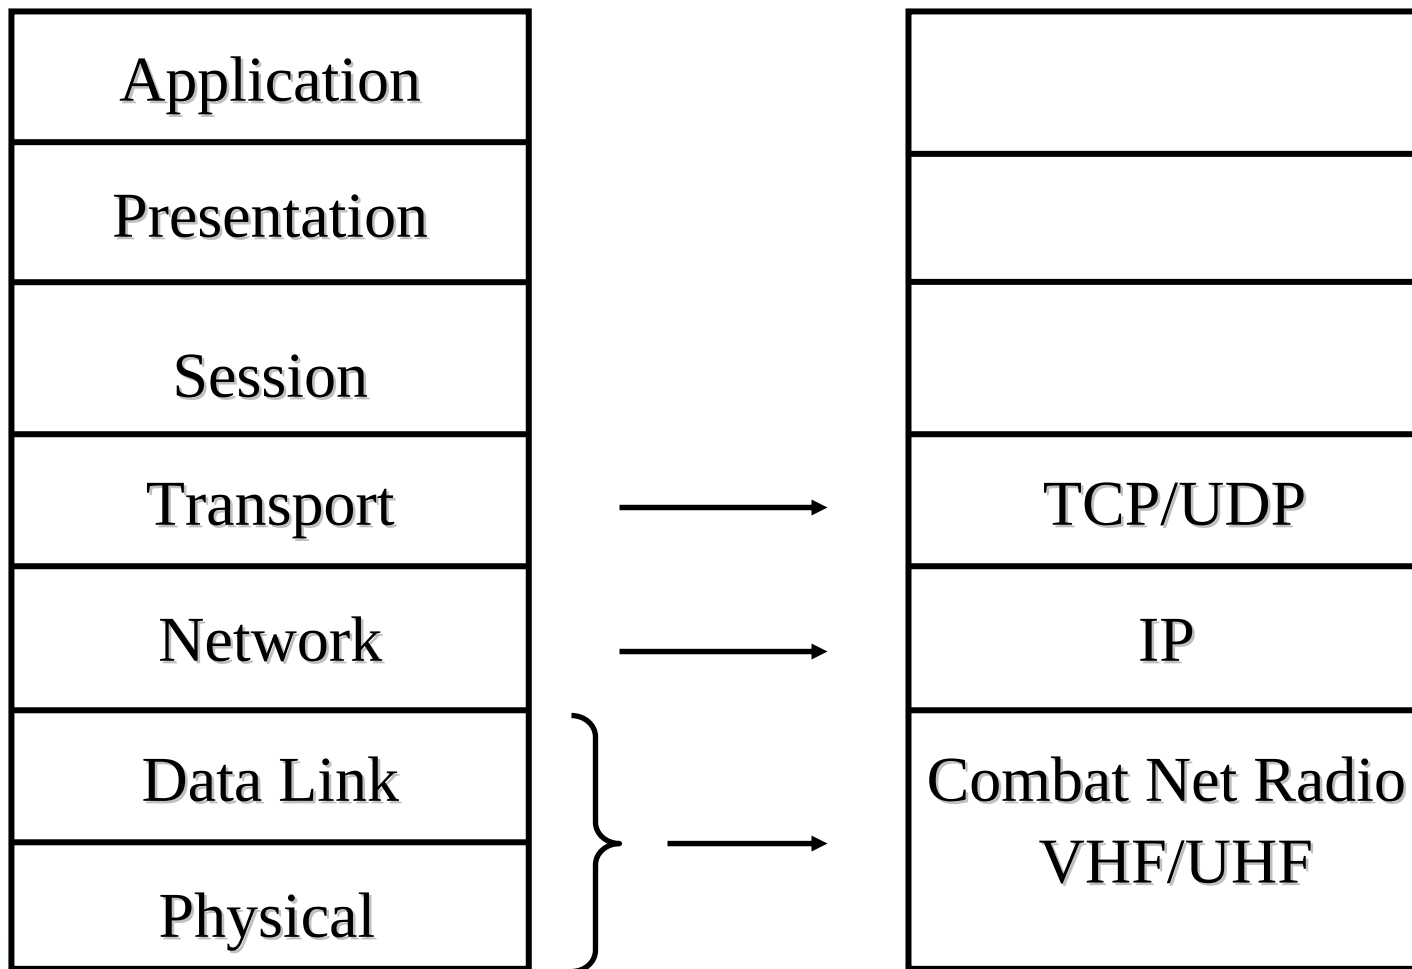



CNR – VHF (Canadian Example)

- Reality: usable throughput at the application layer is a fraction of the base rate:

CNR(P) – Max throughput on DATA ONLY network: $\sim 1\text{kbps}$

SHARED AMONGST USERS

→ 25 radios/net = 40 bps/user

- Reality: residual BER as low as 10^{-5}
- Other VHF CNR radios have similar performance



CNR UHF (225 – 450 MHz)

- Near Term Data Radio (NTDR)
 - 288 kbps is for ‘well situated’ sites
- Reality: true tactical environment performance is approximately:
 - ~16kbps from 22kbps link; and
 - ~80kbps using a 100 kbps link;
- Available throughput is still shared amongst users ($80\text{kbps}/25 = 3.2\text{ kbps}$)
- Error conditions similar to VHF



Transfer Control Protocol (TCP)

- TCP was designed for wired networks:
 - All controls designed for congestion, not errors
 - TCP is very sensitive to Bit Error Rate (BER) and Latency
 - Error in wireless domain trigger TCP congestion controls (e.g. 1 packet lost = 50% cut in tx rate)
 - TCP is connection-oriented → in wireless tactical domain (high BER, latency, long fades) TCP connections timeout regularly




TCP

- As a consequence...

Standard TCP is non-functional in most tactical wireless environments !!



TCP and Bit Error Rate

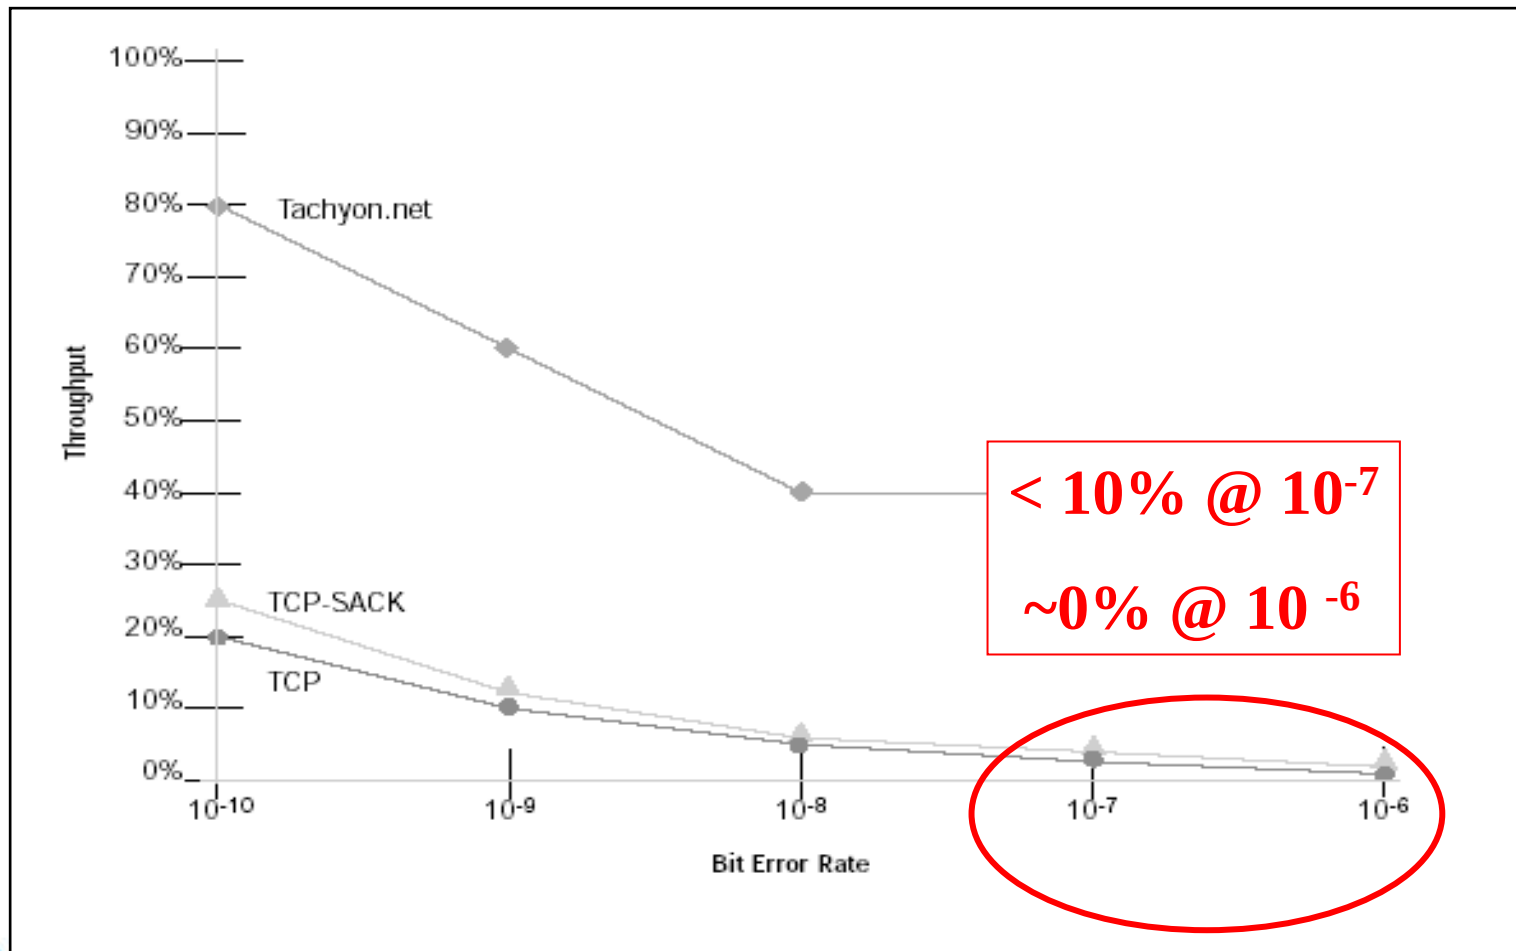



Challenges Posed by the Tactical Communications Environment

Defence R&D Canada – Valcartier • R & D pour la défense Canada – Valcartier

UNCLASSIFIED – APPROVED FOR PUBLIC RELEASE



Network Topology on the Tactical Battlefield

- Unreliable broadcast medium (radio) provides comms links
- Highly mobile entities participate as nodes on C2 network
- Network of sub-networks; each sub-net on different base frequency
- Nodes frequently connect/disconnect from subnetworks
- A single radio can participate on only one sub-net at a time.
 - participation on multiple nets requires multiple radios
- Number of radios in vehicle restricted by space limitations



Connectivity

- Planned loss of connectivity due to:
 - re-assignment of role for node
 - need to participate on multiple networks with single radio by switching frequencies
- Unplanned loss of connectivity due to:
 - terrain or atmospheric interference
 - nodal separation exceeding radio range
 - enemy jamming
 - damage due to enemy action
 - equipment malfunction



Tactical Communications Constraints

- Units are highly mobile
- Communicate by radio (voice and data; voice only; data only)
- Low data throughput (< 1 kbit/second for CNR(P))
- Variable data throughput
 - highly dependent upon traffic load on communications network
- Unreliable links (frequent disconnection, high bit error rates)



Data Distribution Requirements in Tactical Wireless Domain

- Autonomous cooperating nodes
 - disconnected operation
- Peer-to-peer model (not client-server)
 - avoid single point of failure
- Propagate updates asynchronously on 'all-informed' basis
 - profit from (shared) broadcast medium
 - change role without substantial one-time data transfer
 - recover data from any node
- Data recovery must be carefully managed (bandwidth issue)
- Data ownership an important issue (integrity and bandwidth)
 - single ownership of data to avoid/minimize data conflicts
- Negative acknowledgement scheme



The challenge – how to communicate and share information effectively in this highly constrained communication environment ?

DEFENCE



DÉFENSE