

Long-term Acoustic Real-Time Sensor for Polar Areas (LARA)

Holger Klinck, Haru Matsumoto, David K. Mellinger, and Robert P. Dziak
Oregon State University
Hatfield Marine Science Center
2030 SE Marine Science Drive
Newport, OR 97365, USA
phone: (541) 867-0182 fax: (541) 867-3907 email: Holger.Klinck@oregonstate.edu

Award Number: N00014-13-1-0345
<http://www.bioacoustics.us>

LONG-TERM GOALS

The long-term goal of this project is to develop the Long-term Acoustic Real-Time Sensor for Polar Areas (LARA) for real-time monitoring of marine mammals, ambient noise levels, seismic activities (e.g., eruption of undersea volcanoes), and oceanographic conditions in the upper 300 m of the water column.

OBJECTIVES

Most state-of-the-art autonomous passive acoustic monitoring packages are designed to be moored in deep water and stay submerged for the entire deployment period (for a summary see Mellinger *et al.*, 2007). Accordingly deep-moored instruments are usually archival instruments, for which it is not possible to access data, gain timely information on the presence of acoustic signals of interest (such as marine mammal vocalizations or seismic events), or identify system malfunctions prior to instrument recovery. A few passive acoustic monitoring systems use a surface buoy to overcome some of these disadvantages, but these systems cannot be reliably operated in polar areas with potential ice coverage. The Long-term Acoustic Real-Time Sensor for Polar Areas (LARA; Fig. 1) combines the advantages of both the submerged and surface systems and can be operated in ice-covered areas.

APPROACH

LARA will be deployed on a typical oceanographic mooring (Fig. 1) at a predefined depth (~300 m) to record acoustic signals and detect events of interest for up to one year. LARA's control module will run an ice sensing algorithm (ISA) based on the temperature profile in the upper 300 m of the water column. This algorithm has been proven to reliably detect sea ice in the Antarctic Ocean (Klatt *et al.*, 2007) and is currently being tested in the Arctic (Olaf Boebel, pers. comm.). LARA's acoustic module operates an on-board acoustic event detector in real-time (e.g., Klinck and Mellinger, 2011). After an event is detected, a command is sent to the winch via hydro-acoustic modem to raise the sensor to about 10 m depth. During this process the control module is monitoring depth and water temperature. Based on these measurements, the control module decides whether or not to surface the sensor. In case the "no sea ice criterion" is fulfilled, the control module sends a command to the winch to surface LARA. To further reduce the risk of damage by ice and other surface activities only the antenna will

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 SEP 2013		2. REPORT TYPE		3. DATES COVERED 00-00-2013 to 00-00-2013	
4. TITLE AND SUBTITLE Long-term Acoustic Real-Time Sensor for Polar Areas (LARA)			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Oregon State University,Hatfield Marine Science Center,2030 SE Marine Science Drive,Hatfield,OR,97365			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

be raised to the surface (see Fig. 1); the actual sensor unit (containing the archived data) stays about 5 m submerged (note: Kwok and Rothrock (2009) reported a mean Arctic sea ice thickness of 1.89 m for 2008). Several of the components of this sensor (e.g., underwater winch, passive acoustic module, marine mammal detection and ice sensing algorithms) are already developed and proven technology and are being used successfully in other ONR-funded glider and float projects; it is the combination of these components and the real-time transmission of the data that make the platform unique.

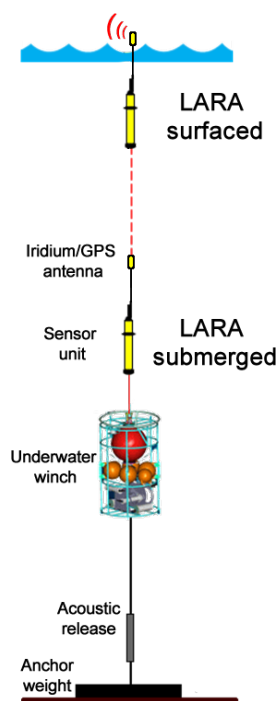


Fig. 1: Schematic of the proposed LARA

WORK COMPLETED

Because of delays associated with the sequester, the project officially started in July 2013. To date we have mainly prepared and forwarded purchase orders to start building the equipment.

The construction of the underwater winch (Fig. 2) has already been completed by NiGK Corporation, Japan and the instrument will be shipped to the U.S. by end of September 2013. We have also started developing LARA's main controller board and are currently bench testing revision 1.0 of the board.



Fig. 2: Underwater winch.

RESULTS

Because the project started just 3 months before the due date of this annual report, there are no significant results to report for the FY13 period.

IMPACT/APPLICATIONS

LARA will expand our capability of long-term passive-acoustic real-time monitoring and more importantly allow us to conduct research in ice-covered regions such as the Arctic, a high priority area of DoD. LARA will also function as a test and development platform for new and improved detection algorithms which will potentially be implemented and used on acoustically equipped gliders and floats as well as the Marine Mammal Monitoring on Navy Ranges (M3R) systems at AUTEC and SCORE. In addition LARA technology will be useful for real-time monitoring of deep-ocean seismic and volcanic activity (e.g., Dziak *et al.*, 2011) - especially in areas where SOSUS coverage no longer exists. For example, the LARA system is intended be used to monitor continued and impending magmatic activity at Axial Volcano and the Middle Valley Ridge segment in the northeast Pacific Ocean. Both areas have seafloor volcanic eruptions forecast for the near future, and the LARA moorings will allow us to observe the accuracy of these models in real-time.

TRANSITIONS

Not applicable.

RELATED PROJECTS

None.

REFERENCES

- Klatt, O., Boebel, O., and Fahrbach, E. (2007): A Profiling Float's Sense of Ice. *Journal of Atmospheric and Oceanic Technology*, 24, pp. 1301-1308
- Klinck, H., and Mellinger, D.K. (2011): The energy ratio mapping algorithm (ERMA): a tool to improve the energy-based detection of odontocete clicks. *Journal of the Acoustical Society of America*, 129(4), pp. 1807-1812.
- Kwok, R., and Rothrock, D.A. (2009): Decline in Arctic sea ice thickness from submarine and ICESat records: 1958-2008. *Geophysical Research Letters*, 36, L15501, doi:10.1029/2009GL039035.
- Matsumoto, H., Jones, C., Klinck, H., Mellinger, D.K., Dziak, R.P., and Meinig, C. (2013): Tracking beaked whales with a passive acoustic profiler float. *Journal of the Acoustical Society of America*, 133(2), pp. 731-740.
- McDonald, M.A. (2004): DIFAR hydrophones applied to whale research. *Canadian Acoustics*, 32, pp. 155-160.
- Mellinger, D.K., Stafford, K.M., Moore, S.E., Dziak, R.P., and Matsumoto, H. (2007): An overview of fixed passive acoustic observation methods for cetaceans. *Oceanography*, 20(4), pp. 36-45.

PUBLICATIONS

None.

PATENTS

None.

HONORS/AWARDS/PRIZES

None.